

Recognized by the
Federal Communications Commission and Industry Canada
Anechoic chamber registration No.: 90462 (FCC)
Anechoic chamber registration No.: 3463 (IC)
TCB ID: DE0001



Accredited by the
German Accreditation Council
DAR-Registration Number

TTI-P-G 166/98



Independent ETSI
compliance test house



Accredited Bluetooth™ Test Facility (BQTF)

Test report no.: 2-3346-01-02/03

FCC Part 15.249

RS110 / RS120

FCC-ID: DMORS03ABUS

IC : 2099A-RS03ACN

IC: 2099A-TR120CN

IC: 2099A-HDR120CN

CETECOM – ICT Services GmbH

Untertürkheimerstr. 6-10

66117 Saarbrücken, Germany

Telephone: + 49 (0) 681 / 598-0

Fax: + 49 (0) 681 /598-9075

Table of contents

- 1 General information
 - 1.1 Notes
 - 1.2 Testing laboratory
 - 1.3 Details of applicant
 - 1.4 Application details
 - 1.5 Test item
 - 1.6 Test specifications

- 2 Technical test
 - 2.1 Summary of test results
 - 2.2 Test report

1 General information

1.1 Notes


The test results of this test report relate exclusively to the test item specified in 1.5.

The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

Test laboratory manager:

2003-11-18	RSC - 8411	Berg M.	
Date	Section	Name	Signature

Technical responsibility for area of testing:

2003-11-18	RSC - 8412	Hausknecht D.	
Date	Section	Name	Signature

1.2 Testing laboratory

CETECOM ICT Services GmbH

Untertürkheimer Straße 6 - 10

66117 Saarbrücken

Germany

Telephone : + 49 681 598 - 0

Telefax : + 49 681 598 - 9075

E-mail : Michael.Berg@ict.cetecom.de

Internet : www.cetecom-ict.de

Accredited testing laboratory

Accredited by : Regulierungsbehörde für Telekommunikation und Post (RegTP)

Listed by : Federal Communications Commission (FCC)

Authority	Identification/Registration No.
RegTP	TTI-P-G 166/98-30
FCC	90462

1.3 Details of applicant

Name : Sennheiser electronic GmbH & Co. KG

Street : Am Labor 1

City : D-30900 Wedemark

Country : Germany

Telephone: +49 5130 600-0

Telex : +49 5130 600-300

E-mail : MANNW@sennheiser.com

Contact person:

Name : Mr. Wolfgang Mann

Telephone : +49 5130 600-585

Telex : +49 5130 600-330

E-mail : MANNW@sennheiser.com

1.4 Application details

Date of receipt of application : 2003-08-21

Date of receipt of test item : 2003-08-24 / 2003-09-08

Date of test : 2003-08-29 / 2003-09-10

1.5 Test item

Type of equipment : **Wireless Headphone**
Type designation : Consists of:1 x Transmitter TR110 or TR120 (with charging circuit for Receiver HDR120)
1 x Receiver HDR110 or HDR120 (with rechargeable batteries)
1 x AC/DC Adapter SIL Model No.:VD990020D
Manufacturer : **see applicant**
Street :
City :
Country :
Serial number : - / -

Additional information :
Frequency : 926.1 – 927.5 MHz
180KF3E (= 2 x max deviation (75 kHz) + 2 x max AF (15 kHz)
Channel spacing : 700 kHz
Number of channels : 3
Antenna : integral antenna
ERP : 89.9 dB μ V/m in 3m
Power supply : Tx: 120V/9V AC/DC Adapter; Rx: 2x1.5V Battery or 2x 1.2V rechargeable battery
Temperature range : +5°C - +45°C
Transmitter spurious : 208.9 μ V/m in 3m
Receiver spurious : < 42 dB μ /m (Noise floor) in 3m

DECLARATION OF COMPLIANCE: I declare that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned Industry Canada standard(s); and that the equipment identified in this application has been subjected to all the applicable test conditions specified in the Industry Canada standards and all of the requirements of the standard have been met.

Signature: _____

Date: 2003-09-02 Michael Berg ; Test management

NAME AND TITLE (Please print or type):

1.6 Test specifications: FCC Part 15 §15.249 CANADA RSS-210

TR120 and HDR120 represent the worst case configuration and was chosen for test.

RS110 consist of Receiver HDR110 and Transmitter TR110

RS120 consist of Receiver HDR120 and Transmitter TR120

2 Technical test

2.1 Summary of test results

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 20 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber.

The receiving antennas are conform with specifications ANSI C63.2-1987 clause 15 and ANSI C63.4-1992 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test set-ups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received.

The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63-4-2001 clause 4.2.

Antennas are conform with ANSI C63.2-1996 item 15.

150 kHz - 30 MHz: Quasi Peak measurement, 9kHz Bandwidth, passive loop antenna.

30 MHz - 200 MHz: Quasi Peak measurement, 120KHz Bandwidth, biconical antenna

200MHz - 1GHz: Quasi Peak measurement, 120KHz Bandwidth, log periodic antenna

>1GHz: Average, RBW 1MHz, VBW 10 Hz, wave guide horn

All measurement settings are according to FCC 15.35, 15.209.

The product fulfils also the requirements for CANADA RSS-210

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

FINAL VERDICT : PASS

2.2 Test report

TEST REPORT

Test report no: 2-3346-01-02/03

LIST OF MEASUREMENTS.

The list of measured parameters is given below.

Clause	Page number
FIELDSTRENGTH OF FUNDAMENTAL § 15.249	9
SPURIOUS RADIATION § 15.249	10
RECEIVER SPURIOUS RADIATION § 15.109	18
CONDUCTED EMISSIONS § 15.107/207	22
TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS	24
TEST SETUP	26
PHOTOGRAPHS OF THE EQUIPMENT	30

Equipment under test : RS110/RS120

Ambient temperature : 24°C

Relative humidity : 43%

FIELDSTRENGTH OF FUNDAMENTAL

§ 15.249

TEST CONDITIONS		MAXIMUM OUTPUT POWER (QUASI PEAK) ERP (mV/m))		
Frequency (MHz)		926.1 MHz	926.8 MHz	927.5 MHz
T _{nom} (23.0)°C	V _{nom} (115V)V	29.4	29.5	29.9
Measurement uncertainty		±3dB		

Quasi Peak

Measured at a distance of 3m

Limits

SUBCLAUSE § 15.249 (a)

Fundamental Frequency (MHz)	Field strength of Fundamental (mV/m)	Field strength of Fundamental (µV/m)
902-928	50 (94 dBµV/m)	500 (54 dBµV/m)
2400-2483.5	50 (94 dBµV/m)	500 (54 dBµV/m)
5725-5875	50 (94 dBµV/m)	500 (54 dBµV/m)
24.0-24.25 GHz	250 (108 dBµV/m)	2500 (68 dBµV/m)

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64; 52-63

Equipment under test : RS110/RS120

Ambient temperature : 24°C

Relative humidity : 43%

SPURIOUS RADIATION

§ 15.249

Radiated

SPURIOUS EMISSIONS LEVEL (µV/m)								
926.1 MHz			926.8 MHz			927.5 MHz		
f (MHz)	Detect	Level (µV/m)	f (MHz)	Detect	Level (µV/m)	f (MHz)	Detect	Level (µV/m)
1852.2	AV	173.8	1853.6	AV	197.2	1855.0	AV	208.9
3704.4	AV	70.0	3707.2	AV	81.1	4637.5	AV	34.3
4630.5	AV	26.6	4634.0	AV	27.2			
Measurement uncertainty			±3 dB					

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW: 1 MHz

H = Horizontal ; V= Vertical

Measured at a distance of 3m

Limits

SUBCLAUSE § 15.249 (a)

Fundamental Frequency (MHz)	Field strength of Fundamental (mV/m)	Field strength of Fundamental (µV/m)
902-928	50 (94 dBµV/m)	500 (54 dBµV/m)
2400-2483.5	50 (94 dBµV/m)	500 (54 dBµV/m)
5725-5875	50 (94 dBµV/m)	500 (54 dBµV/m)
24.0-24.25 GHz	250 (108 dBµV/m)	2500 (68 dBµV/m)

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64; 52-63

Equipment under test : RS110/RS120

Ambient temperature : 24°C

Relative humidity : 43%


Plots of the measurements

SPURIOUS RADIATION 9kHz – 30 MHz

§ 15.109

Part 15.209 Magnetics

EUT: TR110/TR120
 Manufacturer: Sennheiser electronic GmbH & Co. KG
 Operating Condition: Tx on ; Receiver in charging mode
 Test Site: Cetecom, Room 6
 Operator: Berg M.
 Test Specification: 15.109/15.209
 Comment:
 Start of Test: 10.09.03 / 07:41:55

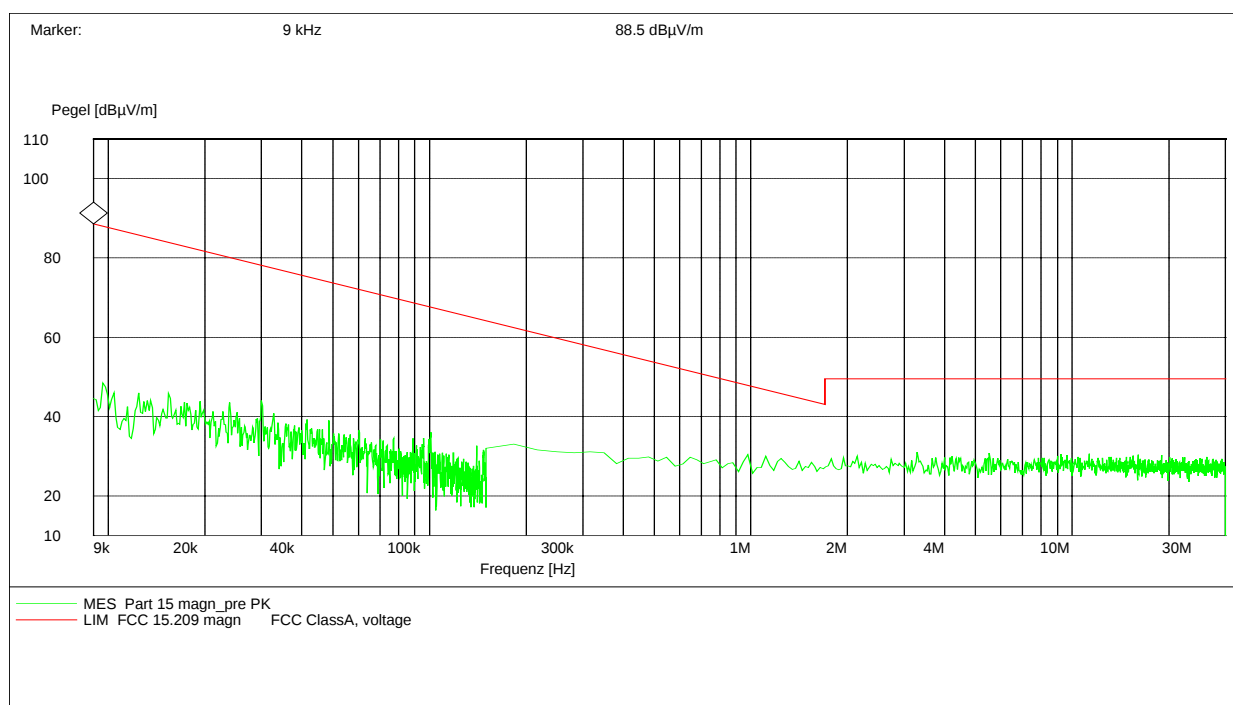

Limits

SUBCLAUSE § 15.109

Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30 / 29.5 dBµV/m	30

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64; 52-63

Equipment under test : RS110/RS120

Ambient temperature : 24°C


Relative humidity : 43%

SPURIOUS RADIATION

§ 15.249

Radiated

926.1 MHz

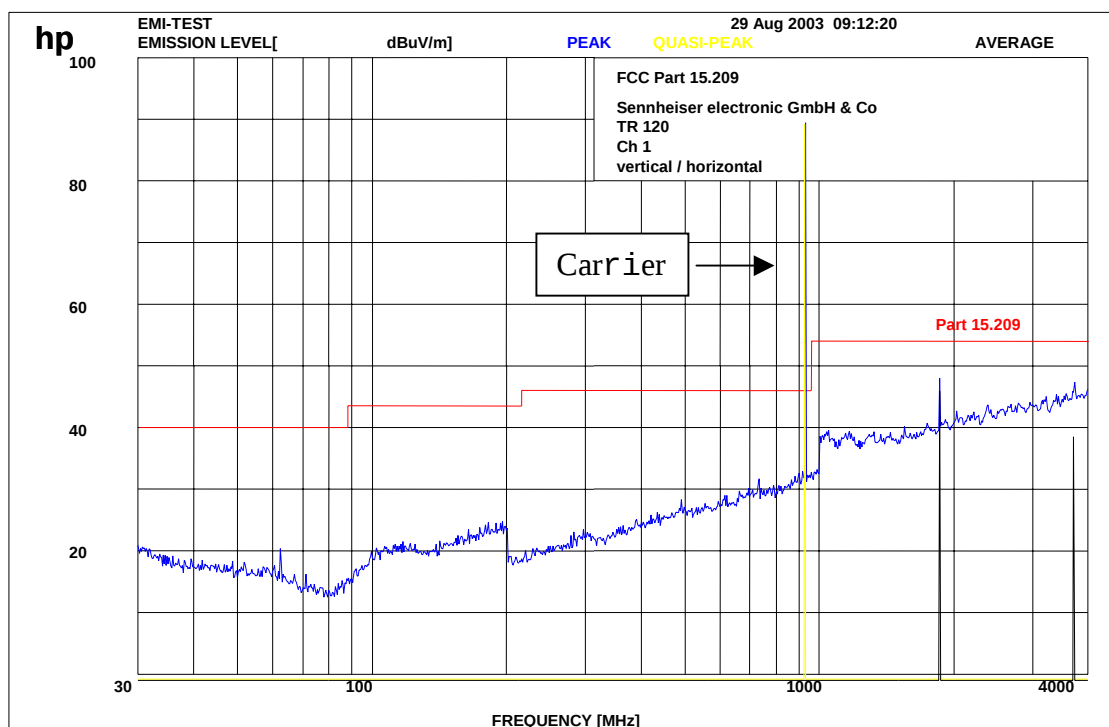

f

< 1 GHz : RBW/VBW: 100 kHz

$f \geq 1\text{GHz}$: RBW/VBW: 1 MHz

Limits

SUBCLAUSE § 15.249 (a)

Fundamental Frequency (MHz)	Field strength of Fundamental (mV/m)	Field strength of Fundamental (µV/m)
902-928	50 (94 dBµV/m)	500 (54 dBµV/m)
2400-2483.5	50 (94 dBµV/m)	500 (54 dBµV/m)
5725-5875	50 (94 dBµV/m)	500 (54 dBµV/m)
24.0-24.25 GHz	250 (108 dBµV/m)	2500 (68 dBµV/m)

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64; 52-63

Equipment under test : RS110/RS120

Ambient temperature : 24°C


Relative humidity : 43%

SPURIOUS RADIATION

§ 15.249

Radiated

926.1 MHz

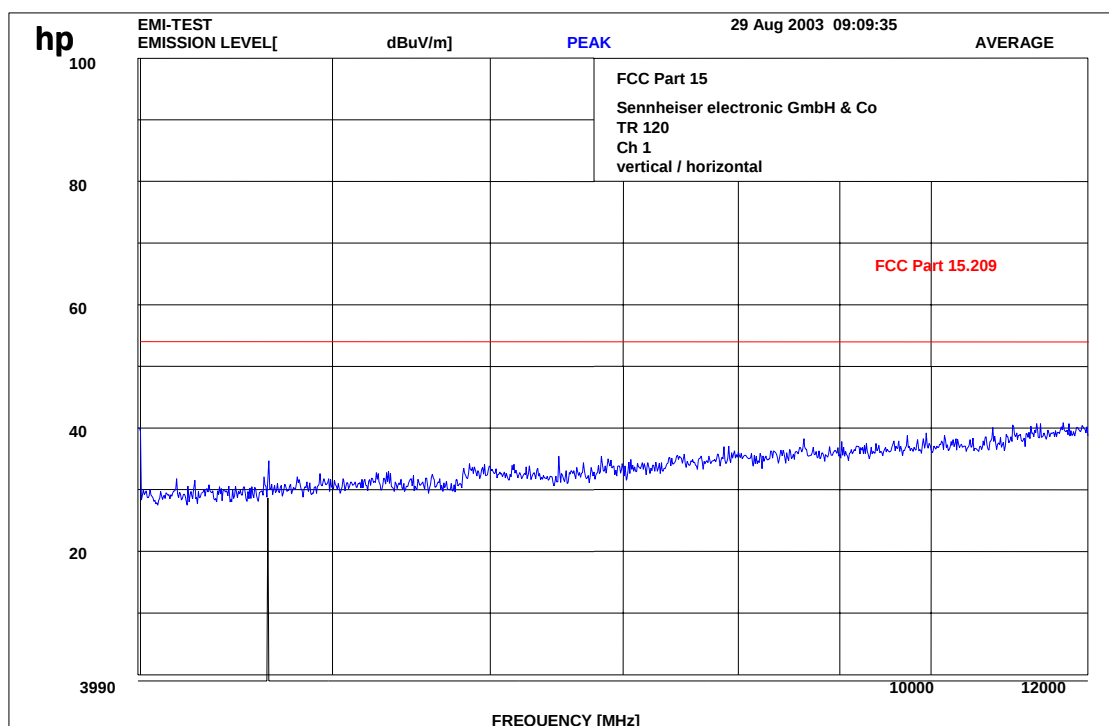

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW/VBW: 1 MHz

Limits

SUBCLAUSE § 15.249 (a)

Fundamental Frequency (MHz)	Field strength of Fundamental (mV/m)	Field strength of Fundamental ($\mu\text{V}/\text{m}$)
902-928	50 (94 dB $\mu\text{V}/\text{m}$)	500 (54 dB $\mu\text{V}/\text{m}$)
2400-2483.5	50 (94 dB $\mu\text{V}/\text{m}$)	500 (54 dB $\mu\text{V}/\text{m}$)
5725-5875	50 (94 dB $\mu\text{V}/\text{m}$)	500 (54 dB $\mu\text{V}/\text{m}$)
24.0-24.25 GHz	250 (108 dB $\mu\text{V}/\text{m}$)	2500 (68 dB $\mu\text{V}/\text{m}$)

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64; 52-63

Equipment under test : RS110/RS120

Ambient temperature : 24°C


Relative humidity : 43%

SPURIOUS RADIATION

§ 15.249

Radiated

926.8 MHz

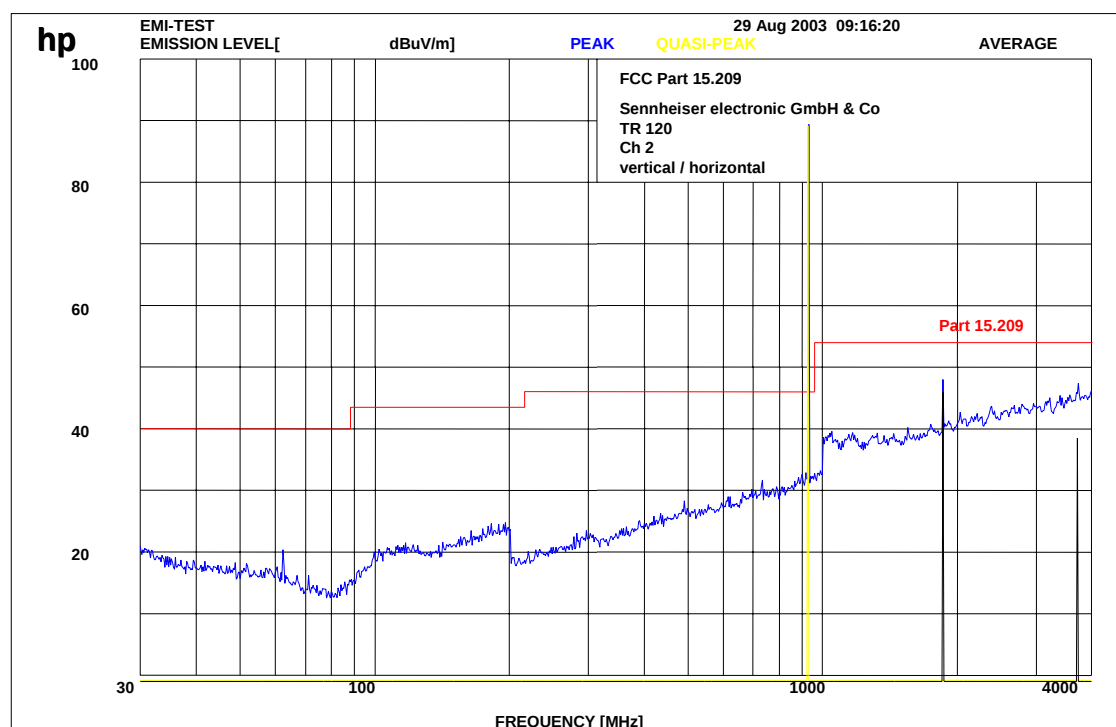

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW/VBW: 1 MHz

Limits

SUBCLAUSE § 15.249 (a)

Fundamental Frequency (MHz)	Field strength of Fundamental (mV/m)	Field strength of Fundamental ($\mu\text{V/m}$)
902-928	50 (94 dB $\mu\text{V/m}$)	500 (54 dB $\mu\text{V/m}$)
2400-2483.5	50 (94 dB $\mu\text{V/m}$)	500 (54 dB $\mu\text{V/m}$)
5725-5875	50 (94 dB $\mu\text{V/m}$)	500 (54 dB $\mu\text{V/m}$)
24.0-24.25 GHz	250 (108 dB $\mu\text{V/m}$)	2500 (68 dB $\mu\text{V/m}$)

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64; 52-63

Equipment under test : RS110/RS120

Ambient temperature : 24°C


Relative humidity : 43%

SPURIOUS RADIATION

§ 15.249

Radiated

926.8 MHz

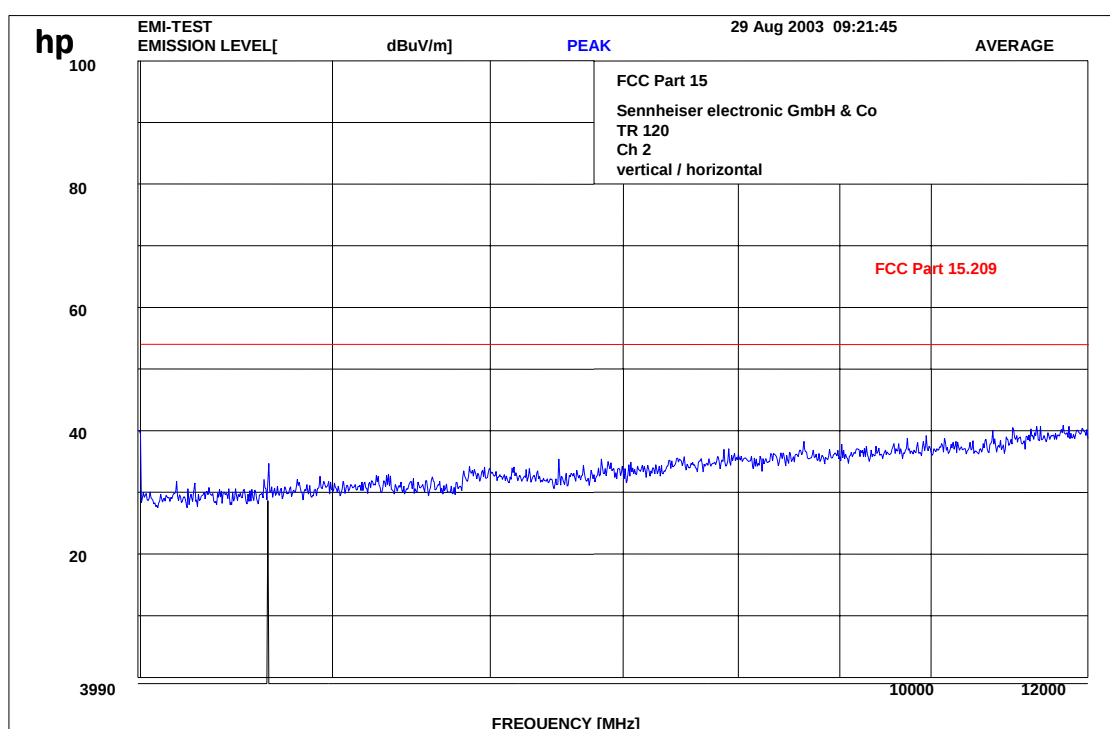

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW/VBW: 1 MHz

Limits

SUBCLAUSE § 15.249 (a)

Fundamental Frequency (MHz)	Field strength of Fundamental (mV/m)	Field strength of Fundamental ($\mu\text{V/m}$)
902-928	50 (94 dB $\mu\text{V/m}$)	500 (54 dB $\mu\text{V/m}$)
2400-2483.5	50 (94 dB $\mu\text{V/m}$)	500 (54 dB $\mu\text{V/m}$)
5725-5875	50 (94 dB $\mu\text{V/m}$)	500 (54 dB $\mu\text{V/m}$)
24.0-24.25 GHz	250 (108 dB $\mu\text{V/m}$)	2500 (68 dB $\mu\text{V/m}$)

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64; 52-63

Equipment under test : RS110/RS120

Ambient temperature : 24°C


Relative humidity : 43%

SPURIOUS RADIATION

§ 15.249

Radiated

927.5 MHz

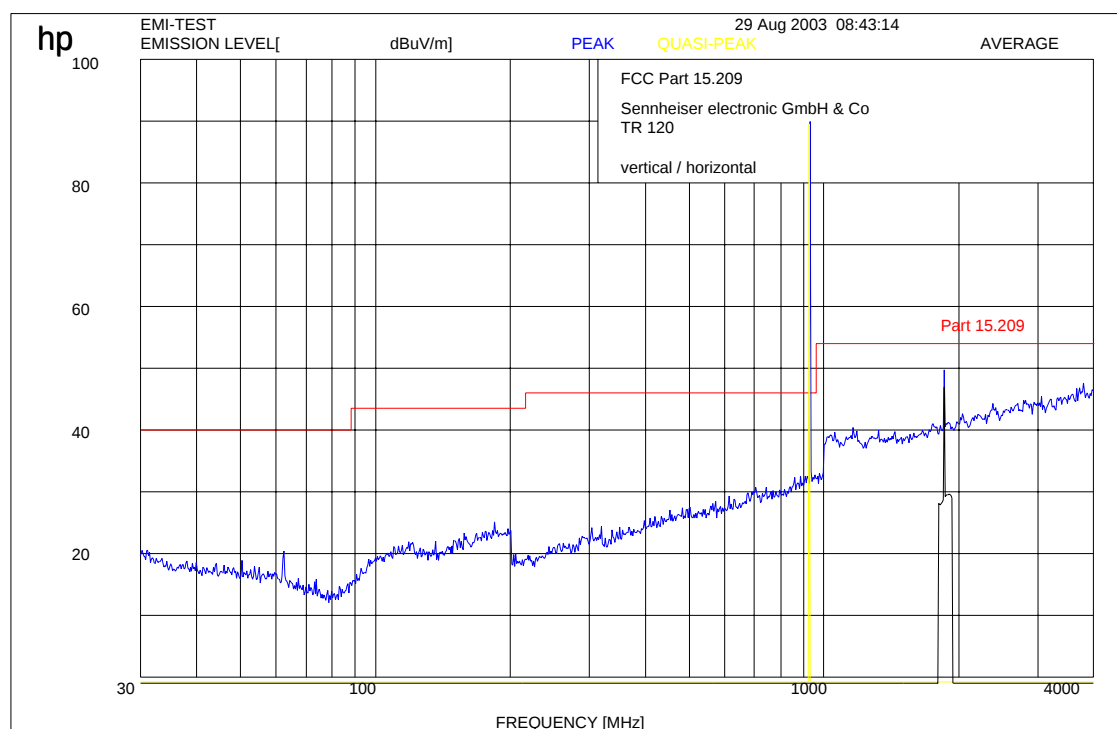

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW/VBW: 1 MHz

Limits

SUBCLAUSE § 15.249 (a)

Fundamental Frequency (MHz)	Field strength of Fundamental (mV/m)	Field strength of Fundamental ($\mu\text{V/m}$)
902-928	50 (94 dB $\mu\text{V/m}$)	500 (54 dB $\mu\text{V/m}$)
2400-2483.5	50 (94 dB $\mu\text{V/m}$)	500 (54 dB $\mu\text{V/m}$)
5725-5875	50 (94 dB $\mu\text{V/m}$)	500 (54 dB $\mu\text{V/m}$)
24.0-24.25 GHz	250 (108 dB $\mu\text{V/m}$)	2500 (68 dB $\mu\text{V/m}$)

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64; 52-63

Equipment under test : RS110/RS120

Ambient temperature : 24°C


Relative humidity : 43%

SPURIOUS RADIATION

§ 15.249

Radiated

927.5 MHz

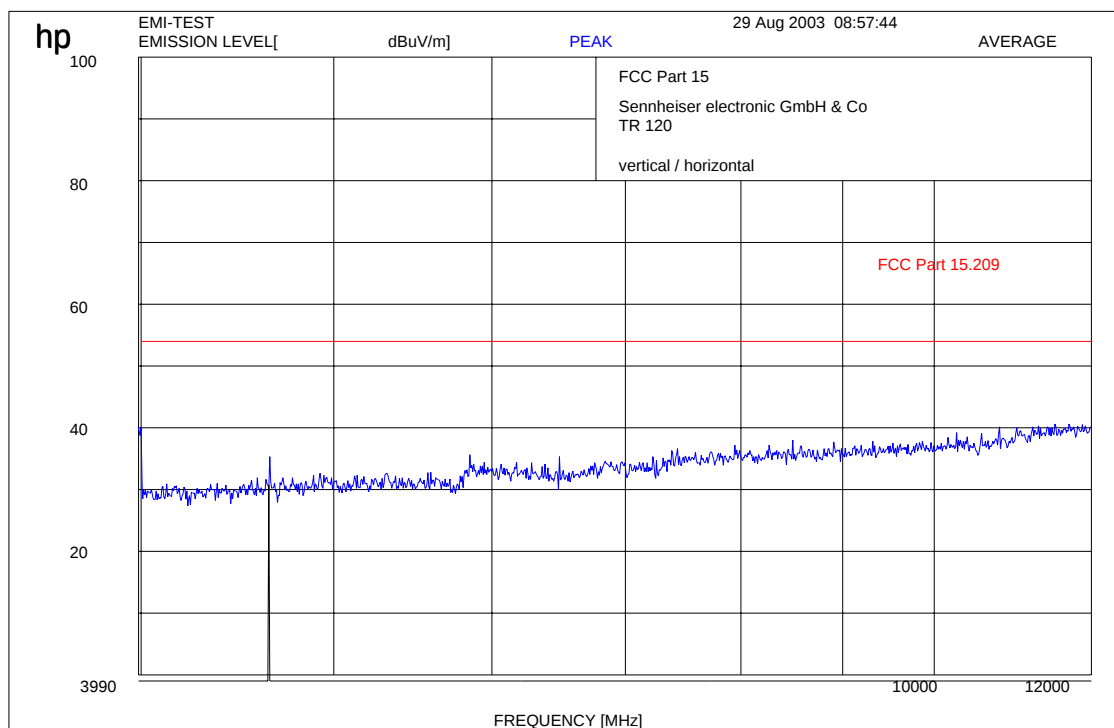

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW/VBW: 1 MHz

Limits

SUBCLAUSE § 15.249 (a)

Fundamental Frequency (MHz)	Field strength of Fundamental (mV/m)	Field strength of Fundamental ($\mu\text{V/m}$)
902-928	50 (94 dB $\mu\text{V/m}$)	500 (54 dB $\mu\text{V/m}$)
2400-2483.5	50 (94 dB $\mu\text{V/m}$)	500 (54 dB $\mu\text{V/m}$)
5725-5875	50 (94 dB $\mu\text{V/m}$)	500 (54 dB $\mu\text{V/m}$)
24.0-24.25 GHz	250 (108 dB $\mu\text{V/m}$)	2500 (68 dB $\mu\text{V/m}$)

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64; 52-63

Equipment under test : RS110/RS120

Ambient temperature : 24°C

Relative humidity : 43%

RECEIVER SPURIOUS RADIATION

§ 15.109

Radiated

SPURIOUS EMISSIONS LEVEL (µV/m)								
926.1 MHz			926.8 MHz			927.5 MHz		
f (MHz)	Detector	Level (µV/m)	f (MHz)	Detector	Level (µV/m)	f (MHz)	Detector	Level (µV/m)
no traceable peak found			no traceable peak found			no traceable peak found		
Measurement uncertainty			±3 dB					

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW: 1 MHz

H = Horizontal ; V= Vertical

Measurement distance see table

Limits

SUBCLAUSE § 15.109

Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64; 52-63

Equipment under test : RS110/RS120

Ambient temperature : 24°C


Relative humidity : 43%

SPURIOUS RADIATION 9kHz – 30 MHz

§ 15.109

Part 15.209 Magnetics

EUT: HDR110/HDR120
 Manufacturer: Sennheiser electronic GmbH & Co. KG
 Operating Condition: Receiver
 Test Site: Cetecom, Room 6
 Operator: Berg M.
 Test Specification: 15.109/15.209
 Comment:
 Start of Test: 10.09.03 / 07:36:25

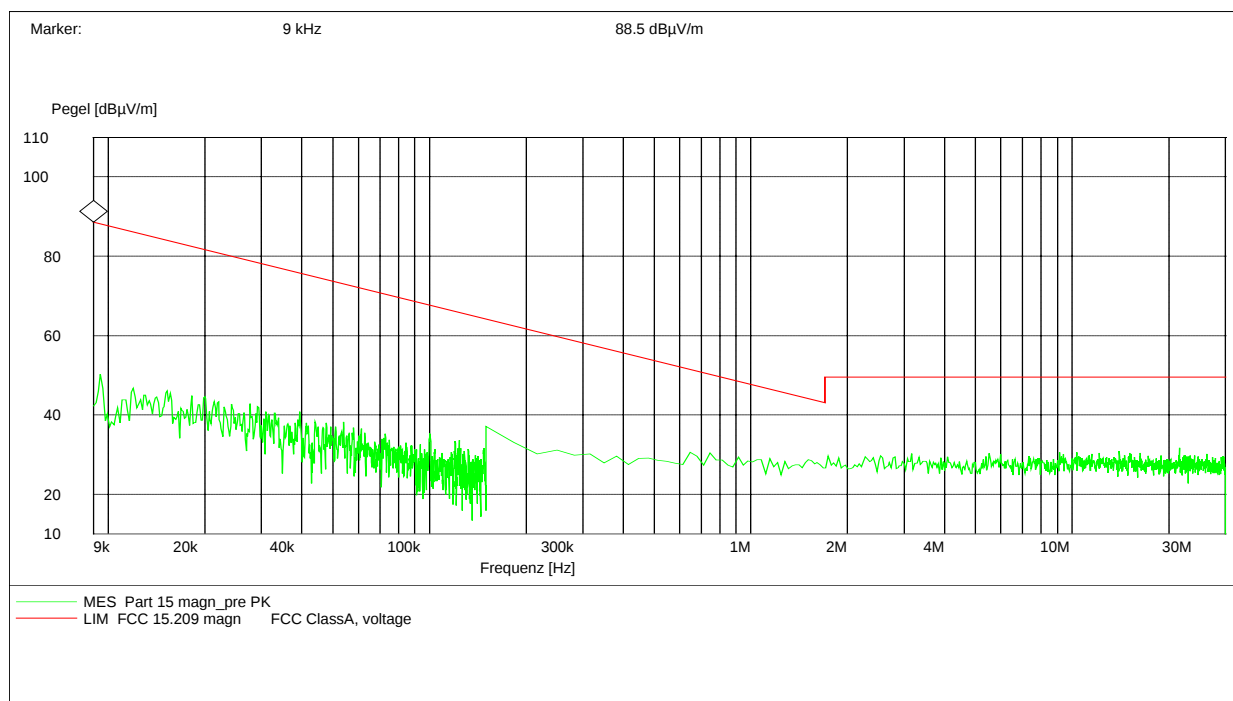

Limits

SUBCLAUSE § 15.109

Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30 / 29.5 dBµV/m	30

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64; 52-63


Equipment under test : RS110/RS120

Ambient temperature : 24°C

Relative humidity : 43%

EMISSION LIMITATIONS (Receiver) SUBCLAUSE § 15.109

Rx mode (Plot valid for all channels)

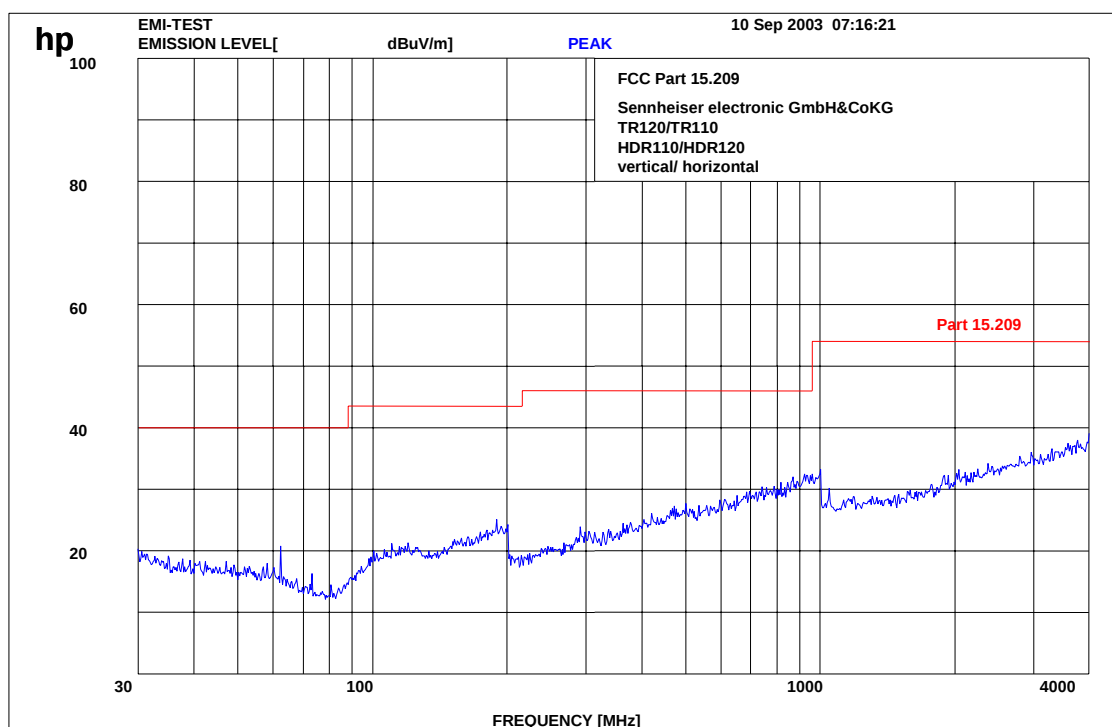

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW/VBW: 1 MHz

LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64; 52-63


Equipment under test : RS110/RS120

Ambient temperature : 24°C

Relative humidity : 43%

EMISSION LIMITATIONS (Receiver) SUBCLAUSE § 15.109

Rx mode (Plot valid for all channels)

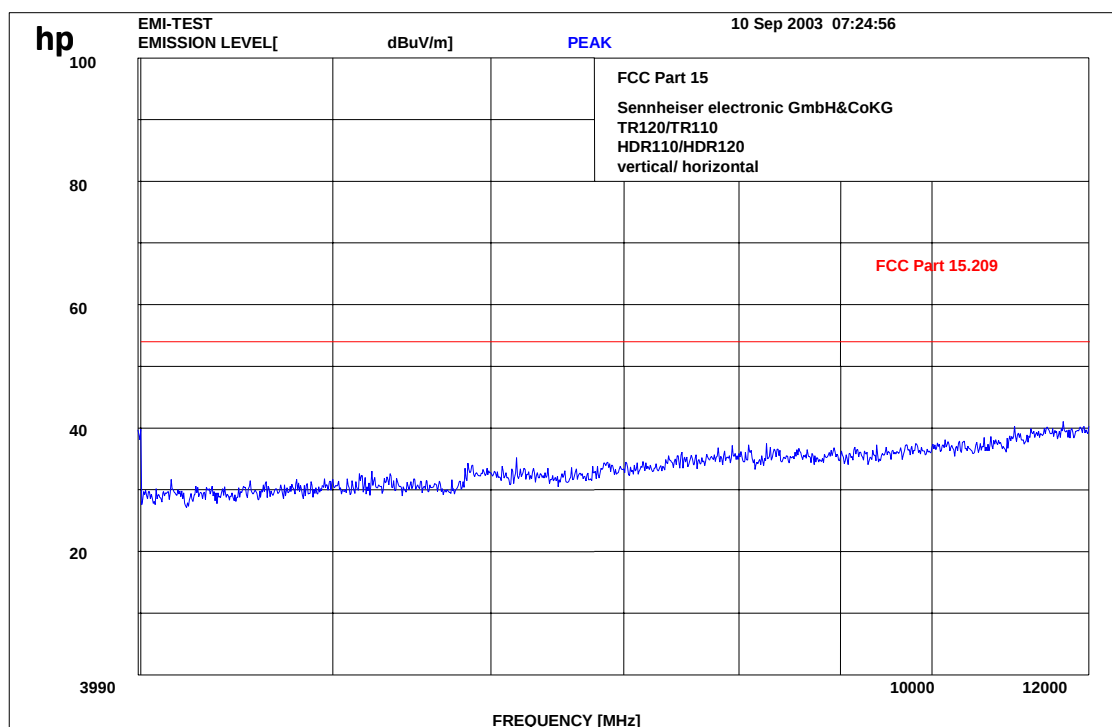

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW/VBW: 1 MHz

Limits

SUBCLAUSE § 15.109

Frequency (MHz)	Field strength ($\mu\text{V/m}$)	Measurement distance (m)
30 - 88	100 (40 dB $\mu\text{V/m}$)	3
88 - 216	150 (43.5 dB $\mu\text{V/m}$)	3
216 - 960	200 (46 dB $\mu\text{V/m}$)	3
above 960	500 (54 dB $\mu\text{V/m}$)	3

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64; 52-63

Equipment under test : RS110/RS120

Ambient temperature : 24°C

Relative humidity : 43%

Conducted emissions

§ 15.107/207

CISPR 22


EN 55022

EUT: TR120/ HDR120
 Applicant: Sennheiser electronic GmbH & Co. KG
 Operating Condition: Tx on ; Rx charging
 Test Site: room 6
 Operator: Berg M.
 Power Supply: 115V / 60 Hz

Start of Test: 10.09.03 / 07:44:34

SCAN TABLE: "EN 55022 V"

Short Description:			Voltage Mains 1.60			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
Frequency 150.0 kHz	Frequency 30.0 MHz	Width 7.5 kHz	MaxPeak	100.0 ms	10 kHz	ESH3-Z5 L1 1458
			Average			

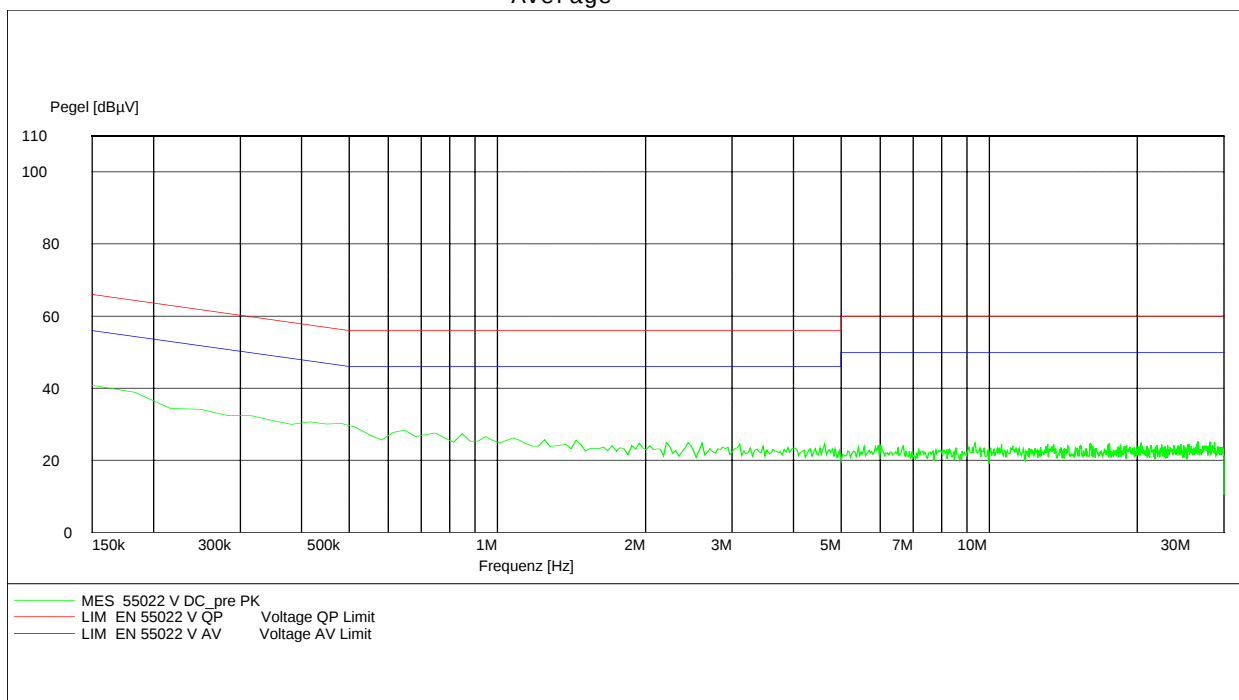

Limit§ 15.207

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

Conducted emissions

§ 15.107/207

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64; 52-63

Equipment under test : RS110/RS120

Ambient temperature : 24°C

Relative humidity : 43%

CISPR 22

EN 55022

EUT: TR120/ HDR120

Applicant: Sennheiser electronic GmbH & Co. KG

Operating Condition: Tx on

Test Site: room 6


Operator: Berg M.

Power Supply: 115V / 60 Hz

Start of Test: 10.09.03 / 07:44:34

SCAN TABLE: "EN 55022 V"

Short Description:			Voltage Mains 1.60			
Start	Stop	Step	Detector	Meas.	IF	Transducer
Frequency	Frequency	Width		Time	Bandw.	
150.0 kHz	30.0 MHz	7.5 kHz	MaxPeak	100.0 ms	10 kHz	ESH3-Z5 L1 1458
			Average			

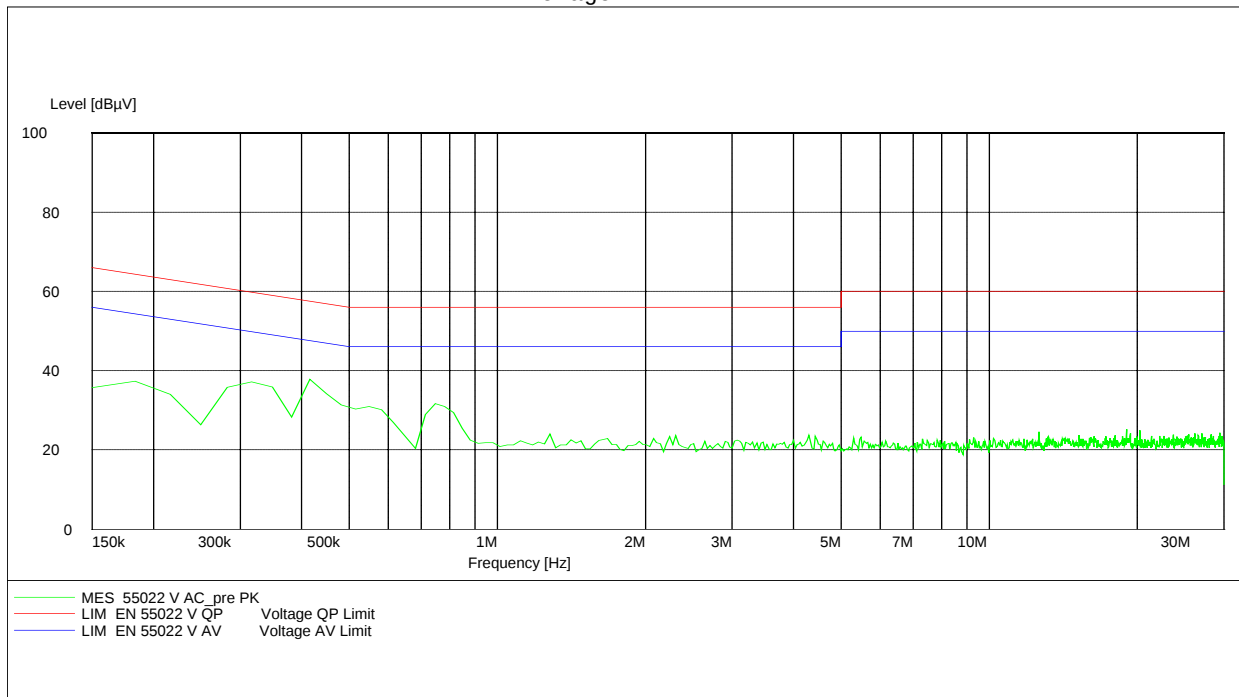

Limit§ 15.207

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64; 52-63

TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

No	Instrument/Ancillary	Type	Manufacturer	Serial No.
01	Spectrum Analyzer	8566 A	Hewlett-Packard	1925A00257
02	Analyzer Display	8566 A	Hewlett-Packard	1925A00860
03	Oscilloscope	7633	Tektronix	230054
04	Radio Analyzer	CMTA 54	Rohde & Schwarz	894 043/010
05	System Power Supply	6038 A	Hewlett-Packard	2848A07027
06	Signal Generator	8111 A	Hewlett-Packard	2215G00867
07	Signal Generator	8662 A	Hewlett-Packard	2224A01012
08	Funktionsgenerator	AFGU	Rohde & Schwarz	862 480/032
09	Regeltrenntrafo	MPL	Erft	91350
10	Netznachbildung	NNLA 8120	Schwarzbeck	8120331
11	Relais-Matrix	PSU	Rohde & Schwarz	893 285/020
12	Power-Meter	436 A	Hewlett-Packard	2101A12378
13	Power-Sensor	8484 A	Hewlett-Packard	2237A10156
14	Power-Sensor	8482 A	Hewlett-Packard	2237A00616
15	Modulationsmeter	9008	Racal-Dana	2647
16	Frequenzzähler	5340 A	Hewlett-Packard	1532A03899
17	Absorber Schirmkabine	---	MWB	87400/002
18	Spectrum Analyzer	85660 B	Hewlett-Packard	2747A05306
19	Analyzer Display	85662 A	Hewlett-Packard	2816A16541
20	Quasi Peak Adapter	85650 A	Hewlett-Packard	2811A01131
21	RF-Preselector	85685 A	Hewlett-Packard	2833A00768
22	Biconical Antenne	3104	Emco	3758
23	Log. Per. Antenne	3146	Emco	2130
24	Double Ridge Horn	3115	Emco	3088
25	EMI-Testreceiver	ESAI	Rohde & Schwarz	863 180/013
26	EMI-Analyzer-Display	ESAI-D	Rohde & Schwarz	862 771/008
27	Biconical Antenne	HK 116	Rohde & Schwarz	888 945/013
28	Log. Per. Antenne	HL 223	Rohde & Schwarz	825 584/002
29	Relais-Switch-Unit	RSU	Rohde & Schwarz	375 339/002
30	Highpass	HM985955	FSY Microwave	001
31	Amplifier	P42-GA29	Tron-Tech	B 23602
32	Absorber Schirmkabine		Frankonia	
33	Steuerrechner	PSM 7	Rohde & Schwarz	834 621/004
34	EMI Test Receiver	ESMI	Rohde & Schwarz	827 063/010
35	EMI Test Receiver	Display	Rohde & Schwarz	829 808/010


TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

No	Instrument/Ancillary	Type	Manufacturer	Serial No.
36	Controler	HD 100	Deisel	100/322/93
37	Relais Matrix	PSN	Rohde & Schwarz	829 065/003
38	Control Unit	GB 016 A2	Rohde & Schwarz	344 122/008
39	Relais Switch Unit	RSU	Rohde & Schwarz	316 790/001
40	Power Supply	6032A	Hewlett Packard	2846A04063
41	Spektrum Monitor	EZM	Rohde & Schwarz	883 720/006
42	Meßempfänger	ESH 3	Rohde & Schwarz	890 174/002
43	Meßempfänger	ESVP	Rohde & Schwarz	891 752/005
44	Biconi Ant. 20-300MHz	HK 116	Rohde & Schwarz	833 162/011
45	Logper Ant. 0.3-1 GHz	HL 223	Rohde & Schwarz	832 914/010
46	Amplifier 0.1-4 GHz	AFS4	Miteq Inc.	206461
47	Logper Ant. 1-18 GHz	HL 024 A2	Rohde & Schwarz	342 662/002
48	Polarisationsnetzwerk	HL 024 Z1	Rohde & Schwarz	341 570/002
49	Double Ridge G Horn Antenne 1-26.5 GHz	3115	EMCO	9107-3696
50	Microw. Sys. Amplifier 0.5- 26.5 GHz	8317A	Hewlett Packard	3123A00105
51	Spectrum Analyzer	8562A	Hewlett Packard	2809AO2682
52	Steuerrechner	PSM 7	Rohde & Schwarz	883 086/026
53	DC V-Netzwerk	ESH3-Z6	Rohde & Schwarz	861 406/005
54	DC V-Netzwerk	ESH3-Z6	Rohde & Schwarz	893 689/012
55	AC 2 Phasen V-Netzwerk	ESH3-Z5	Rohde & Schwarz	861 189/014
56	AC 2 Phasen V-Netzwerk	ESH3-Z5	Rohde & Schwarz	894 981/019
57	AC-3 Phasen V-Netzwerk	ESH2-Z5	Rohde & Schwarz	882 394/007
58	Stromversorgung	6032A	Rohde & Schwarz	2933A05441
59	HF-Test Empfänger	ESVP.52	Rohde & Schwarz	881 487/021
60	Spectrum Monitor	EZM	Rohde & Schwarz	883 086/026
61	HF-Test Empfänger	ESH3	Rohde & Schwarz	881 515/002
62	Relais Matrix	PSU	Rohde & Schwarz	882 943/029
63	Relais Matrix	PSU	Rohde & Schwarz	828 628/007
64	Spectrum Analyzer	FSIQ 26	Rohde & Schwarz	119.6001.27
65	Spectrum Analyzer	HP 8565E	Hewlett Packard	3473A00773
66				

Test setup

TR120

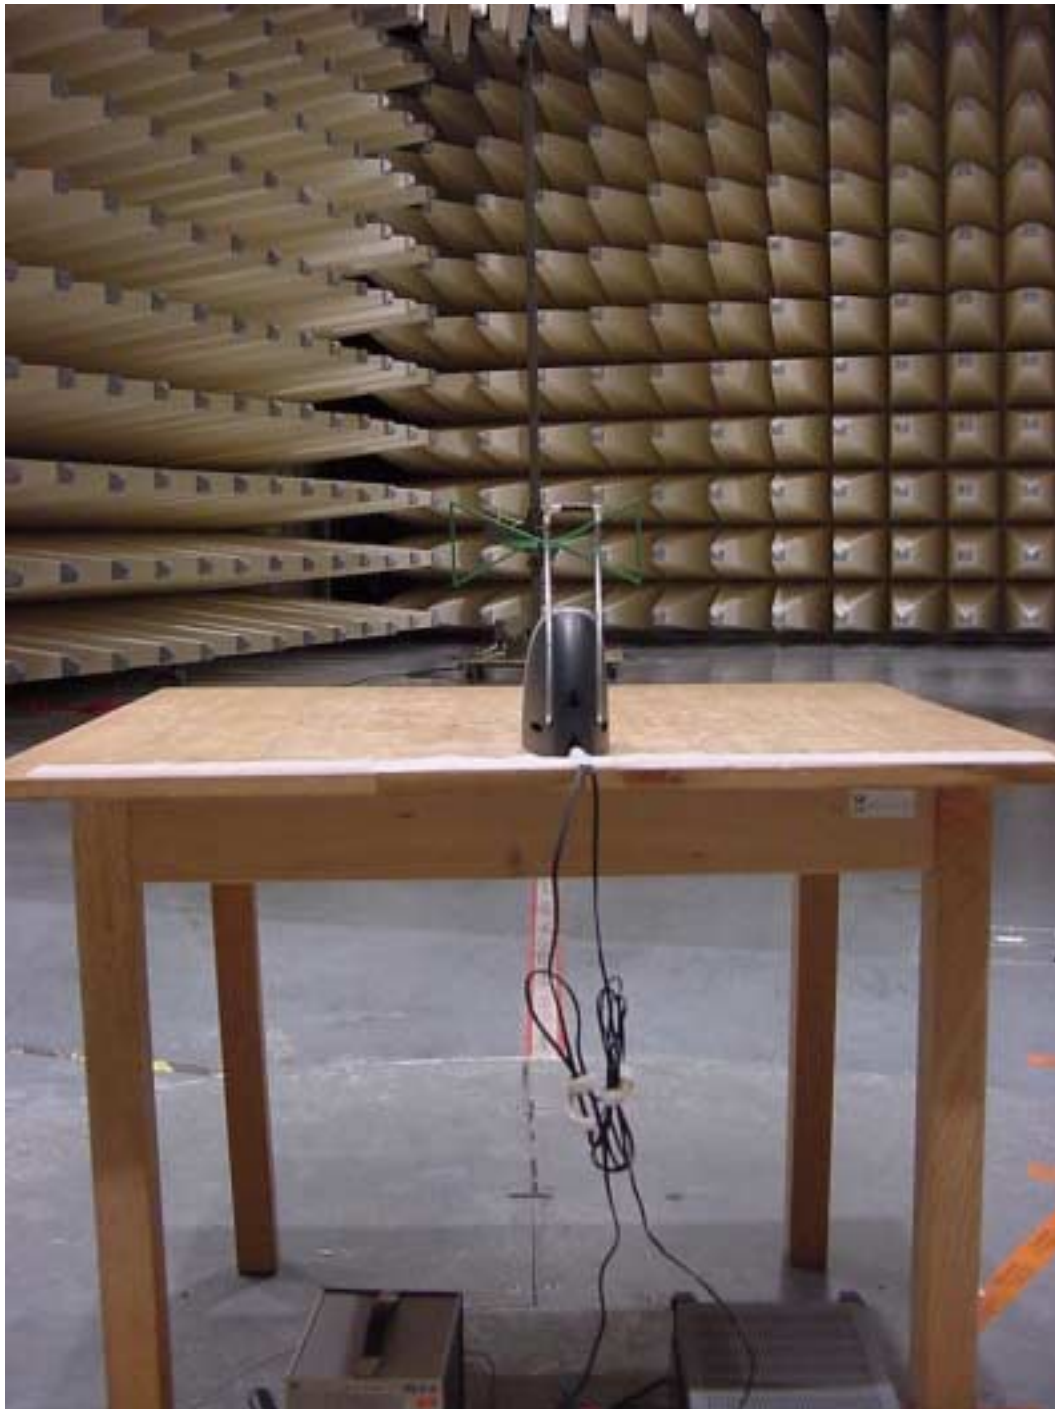

Test setup

TR120



Test setup

RS120



Photographs of the equipment

RS120



Photographs of the equipment

RS110



PHOTOGRAPHS OF THE EQUIPMENT

RS120



PHOTOGRAPHS OF THE EQUIPMENT

TR110



PHOTOGRAPHS OF THE EQUIPMENT

TR110




PHOTOGRAPHS OF THE EQUIPMENT

TR120



PHOTOGRAPHS OF THE EQUIPMENT

TR120

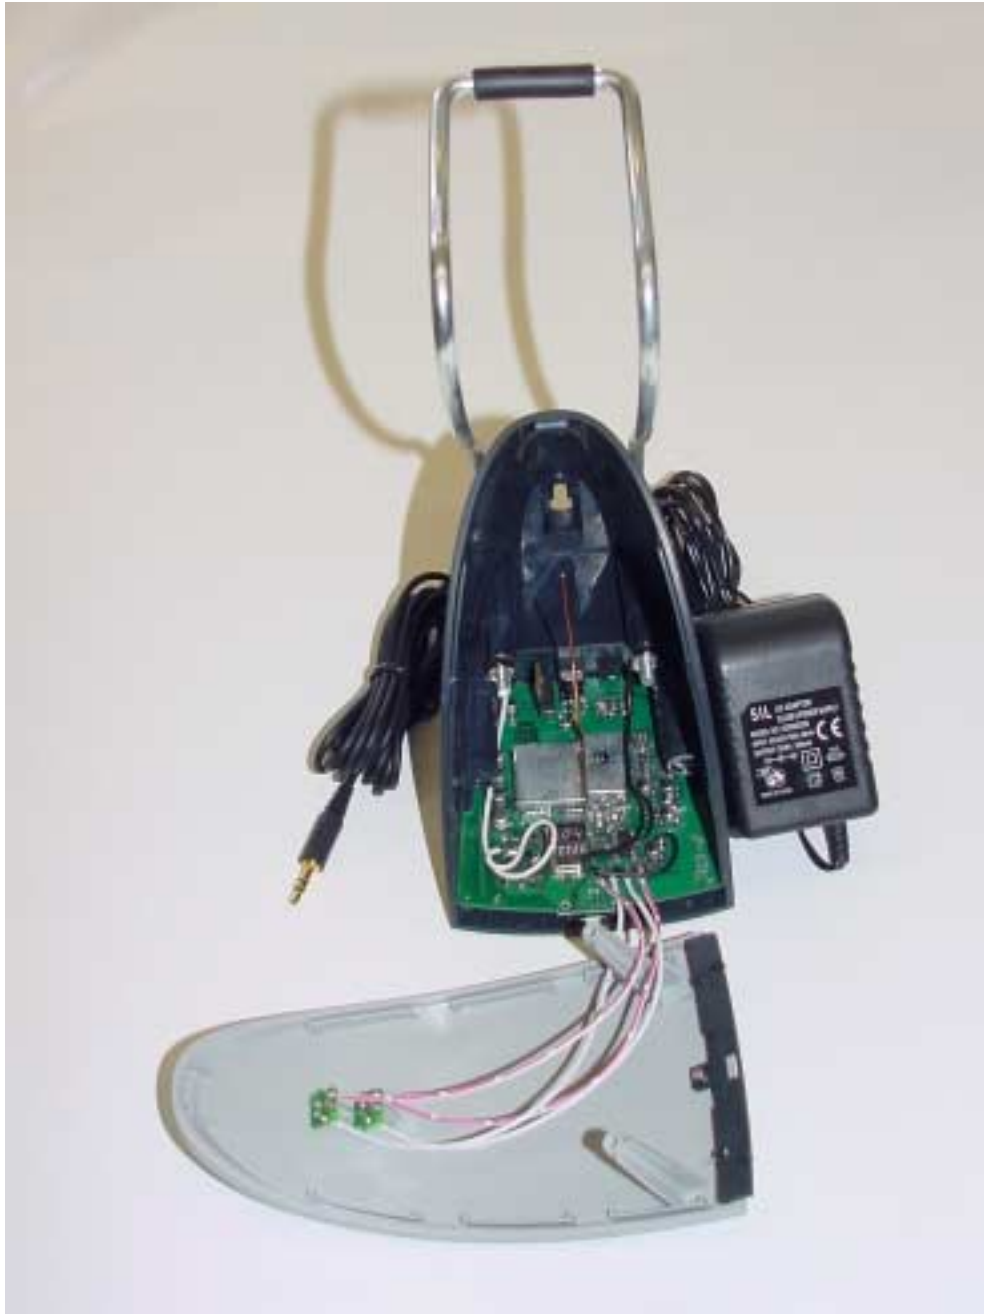

PHOTOGRAPHS OF THE EQUIPMENT

TR120




PHOTOGRAPHS OF THE EQUIPMENT

PCB TR110/120



PHOTOGRAPHS OF THE EQUIPMENT

PCB TR110/120

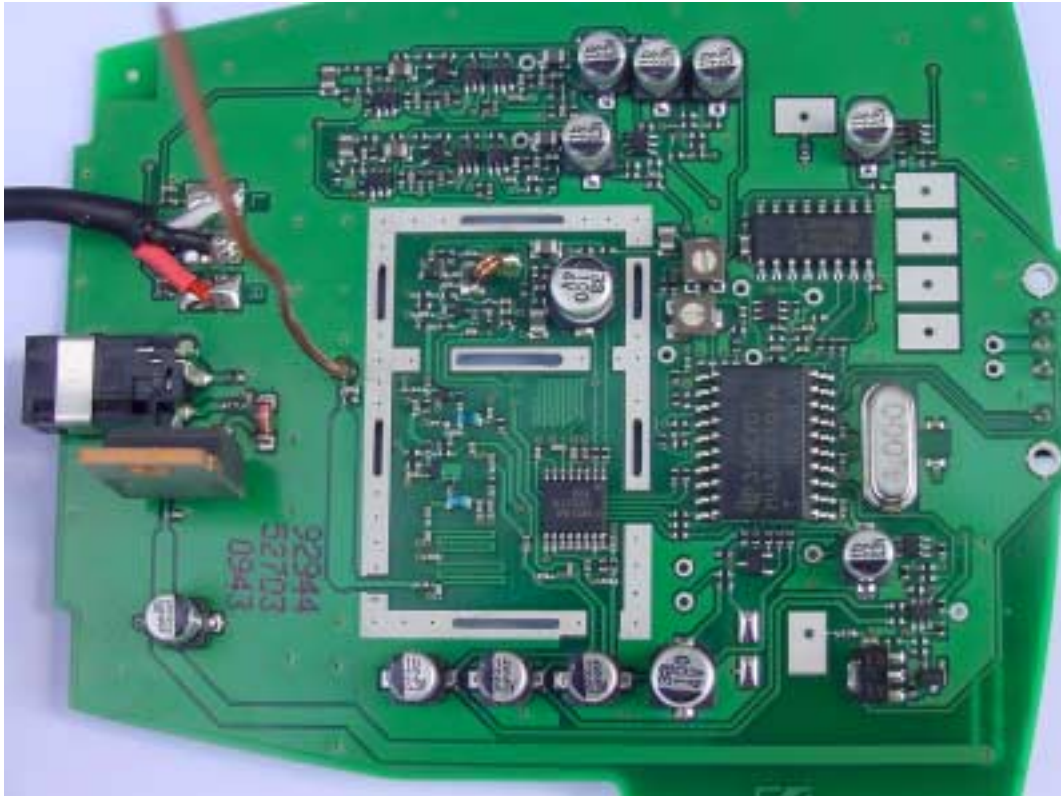

PHOTOGRAPHS OF THE EQUIPMENT

PCB TR110/120



PHOTOGRAPHS OF THE EQUIPMENT

HDR120



PHOTOGRAPHS OF THE EQUIPMENT

HDR120




PHOTOGRAPHS OF THE EQUIPMENT

HDR120




PHOTOGRAPHS OF THE EQUIPMENT

HDR120

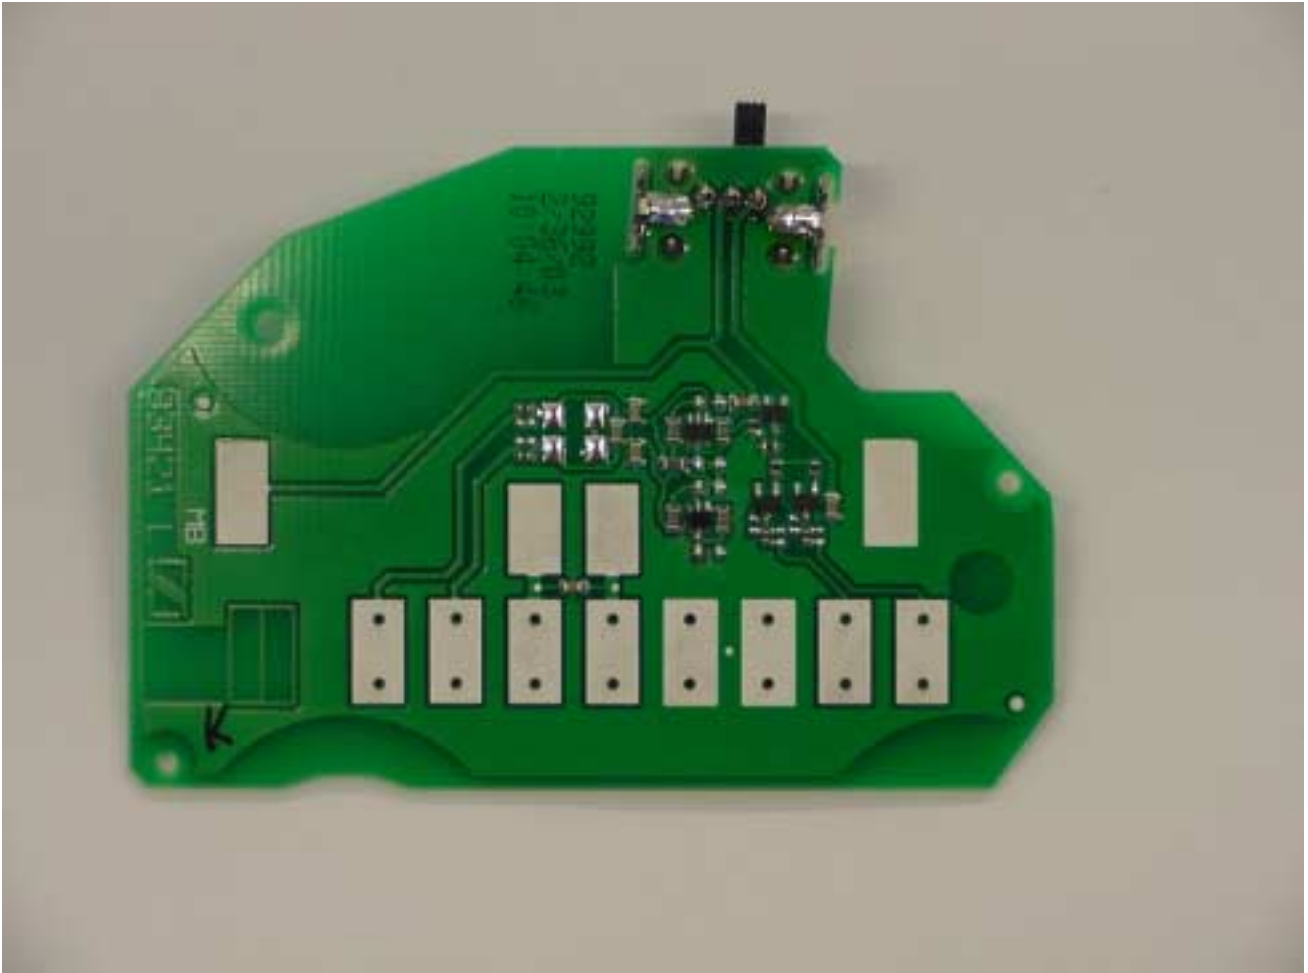


PHOTOGRAPHS OF THE EQUIPMENT

HDR120

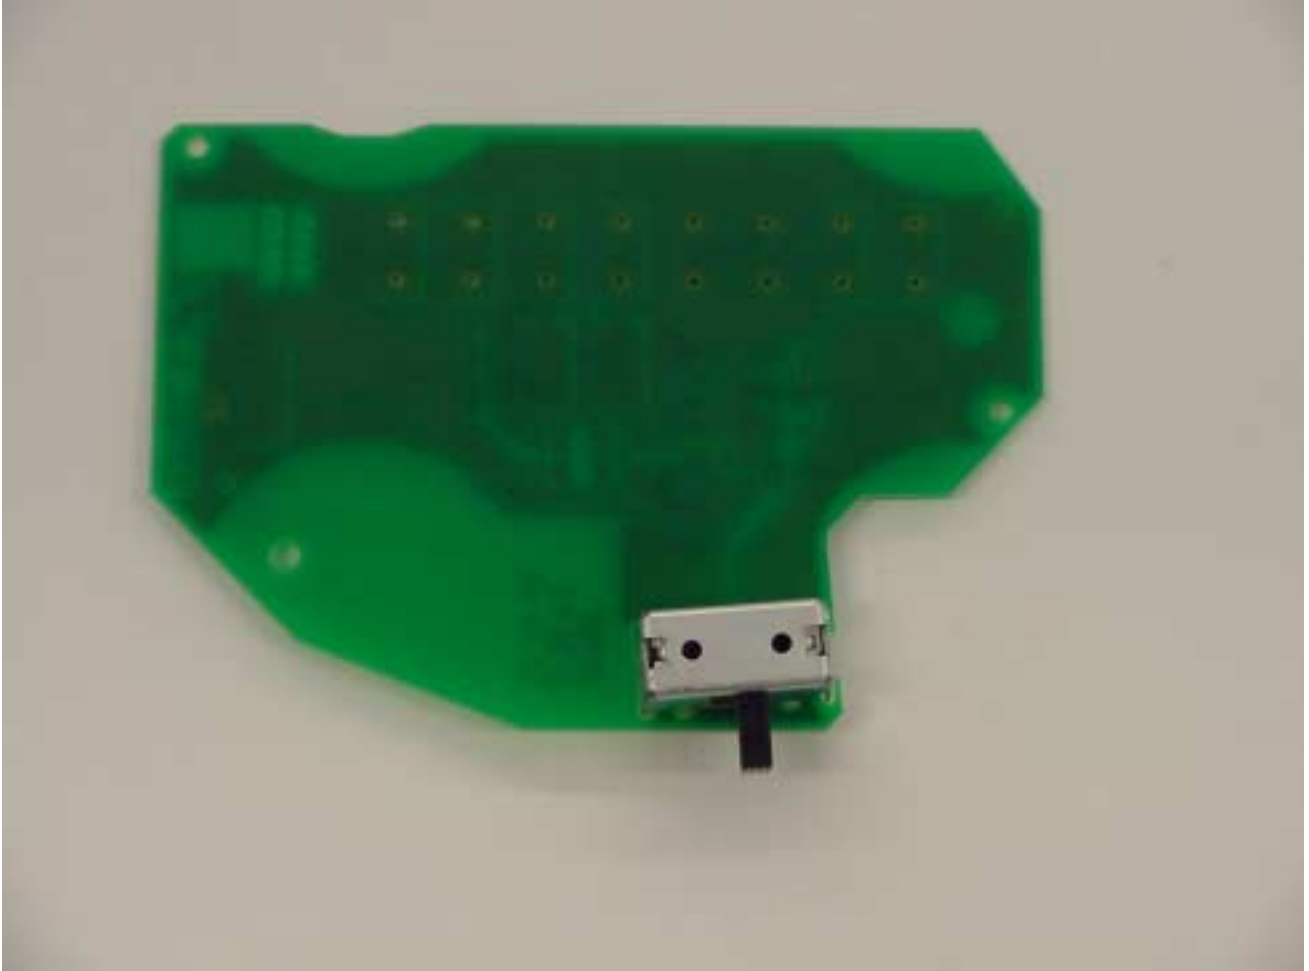

PHOTOGRAPHS OF THE EQUIPMENT

HDR120

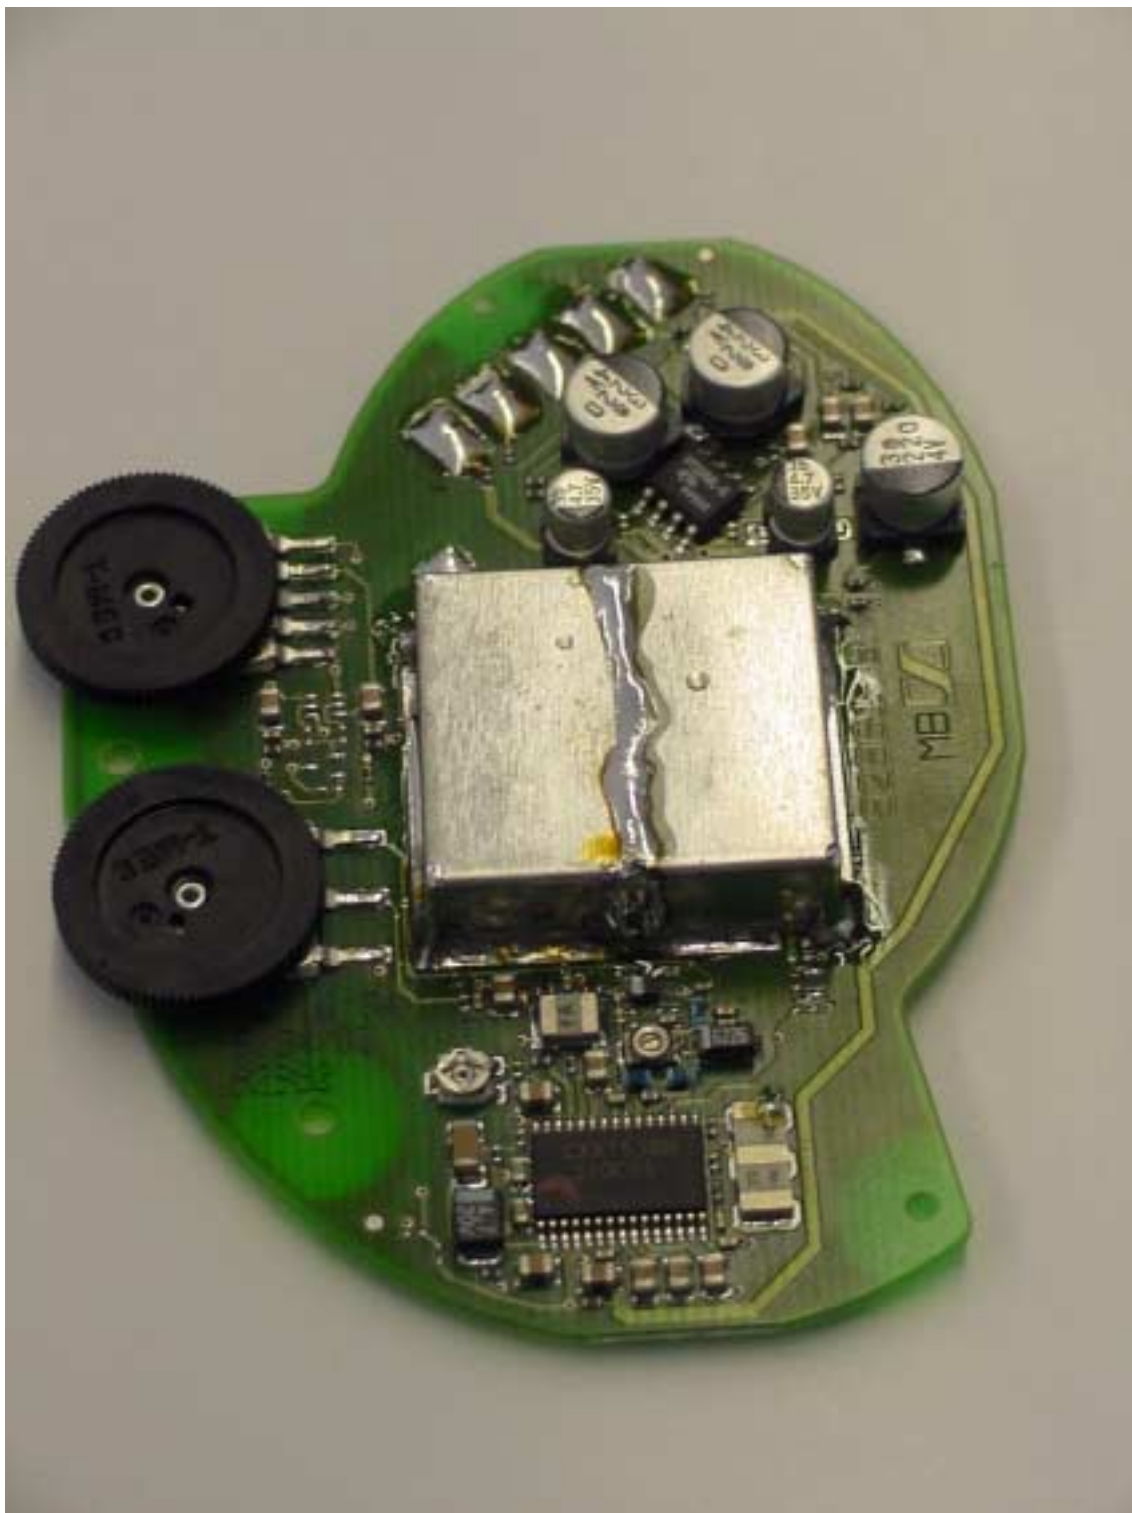

PHOTOGRAPHS OF THE EQUIPMENT

HDR120



PHOTOGRAPHS OF THE EQUIPMENT

HDR120



PHOTOGRAPHS OF THE EQUIPMENT

HDR120

