



849 NW STATE ROAD 45  
NEWBERRY, FL 32669 USA  
PH: 888.472.2424 OR 352.472.5500  
FAX: 352.472.2030  
EMAIL: [INFO@TIMCOENGR.COM](mailto:INFO@TIMCOENGR.COM)  
[HTTP://WWW.TIMCOENGR.COM](http://WWW.TIMCOENGR.COM)

---

**FCC PART 90.265 and RSS-123(i3)**  
**LOW POWER LICENSED**  
**WIRELESS MICROPHONE TRANSMITTER**

<b>APPLICANT</b>	AUDIO-TECHNICA CORPORATION
<b>ADDRESS</b>	2-46-1 Nishi-Naruse Machida Tokyo 194-8666 JAPAN
<b>FCC ID</b>	JFZT902A
<b>IC</b>	1752B-T902A
<b>MODEL NUMBER</b>	ATW-T902a
<b>PRODUCT DESCRIPTION</b>	HANDHELD WIRELESS MICROPHONE
<b>DATE SAMPLE RECEIVED</b>	8/23/2017
<b>DATE TESTED</b>	08/29/2017
<b>TESTED BY</b>	FRANKLIN ROSE
<b>APPROVED BY</b>	Sid Sanders
<b>TEST RESULTS</b>	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL

Report Number	Version Number	Description	Issue Date
1542AUT17TestReport	Rev1	Initial Issue	8/31/2017
1542AUT17TestReport	Rev2	Clerical Updates. Test result added to Audio Response section.	9/12/2017

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL  
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**

## TABLE OF CONTENTS

GENERAL REMARKS .....	2
GENERAL INFORMATION.....	3
RESULTS SUMMARY .....	4
RF POWER OUTPUT .....	5
MODULATION CHARACTERISTICS .....	6
AUDIO FREQUENCY RESPONSE.....	7
MODULATION LIMITING.....	7
OCCUPIED BANDWIDTH .....	9
SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED) .....	11
FIELD STRENGTH OF SPURIOUS EMISSIONS.....	13
TRANSIENT FREQUENCY BEHAVIOR .....	16
FREQUENCY STABILITY.....	18
STATEMENT OF MEASUREMENT UNCERTAINTY .....	19
EMC EQUIPMENT LIST .....	20

## GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

## Summary

The device under test does:

- ☒ Fulfill the general approval requirements as identified in this test report and was selected by the customer.
- ☐ Not fulfill the general approval requirements as identified in this test report

## Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.

I attest that the necessary measurements were made at:

**Timco Engineering Inc.**  
**849 NW State Road 45**  
**Newberry, FL 32669**

**Tested by:**



Name and Title: Franklin Rose, Project Manager/Testing Technician

**Date: 08/30/2017**

**Reviewed and approved by:**

Name and Title: Sid Sanders



**Date: 5 Sept. 2017**

Applicant: AUDIO-TECHNICA CORPORATION  
FCC ID: JFZT902A  
IC: 1752B-T902A  
REPORT: 1542AUT17TestReport\_Rev1

[TABLE OF CONTENTS](#)

## GENERAL INFORMATION

<b>EUT Description</b>	<b>HANDHELD WIRELESS MICROPHONE</b>
<b>FCC ID</b>	<b>JFZT902A</b>
<b>IC</b>	<b>1752B-T902A</b>
<b>Model Number</b>	<b>ATW-T902a</b>
<b>Operating Frequency</b>	169.505 – 171.905 MHz
<b>Test Frequencies</b>	169.505 MHz, 171.905 MHz
<b>Modulation</b>	FM
<b>EUT Power Source</b>	<input type="checkbox"/> 110–120Vac/50– 60Hz
	<input type="checkbox"/> DC Power 12V
	<input checked="" type="checkbox"/> Battery Operated Exclusively
<b>Test Item</b>	<input type="checkbox"/> Prototype
	<input checked="" type="checkbox"/> Pre-Production
	<input type="checkbox"/> Production
<b>Type of Equipment</b>	<input type="checkbox"/> Fixed
	<input type="checkbox"/> Mobile
	<input checked="" type="checkbox"/> Portable
<b>Test Conditions</b>	The temperature was 26°C with a relative humidity of 50%. Atmospheric pressure 1010 mb.
<b>Revision History to the EUT</b>	None
<b>Test Exercise</b>	The EUT was powered on and modulated with the appropriate signal.
<b>Applicable Standards</b>	FCC CFR 47 Part 2, & 90, IC RSS-123(i3), RSS-GEN ANSI/TIA 603-E: 2016 ANSI C63.4 2014
<b>Test Facility</b>	<b>Timco Engineering Inc.</b> <b>849 NW State Road 45</b> <b>Newberry, FL 32669 USA.</b>

## RESULTS SUMMARY

FCC Rule Part	IC Standard	Requirement	Test Item	Result
2.1046(a), 90.265(b)(2)	RSS-GEN, RSS-123 4.1, 4.6.2	Conducted Power	RF Power Output	<b>PASS</b>
2.1047(a)	RSS-123 4.6.2	Modulation Characteristics	Audio Frequency Response	<b>PASS</b>
2.1047(b)	n/a	Modulation Characteristics	Modulation Limiting	<b>PASS</b>
2.1049(c), 90.265(b)(1)	RSS-GEN, RSS-123 4.1, 4.2	Operating Bandwidth	Occupied Bandwidth	<b>PASS</b>
2.1051, 90.210(b)(3)	RSS-123, 4.4	Unwanted Emissions	Spurious Emissions at Antenna Terminals	<b>PASS</b>
2.1053(a), 90.265(b)(1)	RSS-123, 4.4	Unwanted Emissions	Field Strength of Spurious Emissions	<b>PASS</b>
90.214	n/a	Transient Frequency Behavior	Transient Frequency Behavior	n/a <sup>1</sup>
2.1055(a), (b), 90.265(b)(3)	RSS-GEN, RSS-123 4.1, 4.3	Frequency Tolerance	Frequency Stability	<b>PASS</b>

### NOTES:

1. Transient Frequency Behavior does not pertain to this device for the following reason(s):  
The EUT exhibits transmissions immediately when powered-on, continuously without interruption at 100% duty cycle until powered-off. In addition, the EUT has no "push-to-talk" feature.


## RF POWER OUTPUT

**Rule Part No.:** Part 2.1046(a), Part 90.265(b)(2), RSS-123 Issue 3

**Method of Measurement:** TIA 603 E, Section 2.2.1

**Requirement:** The output power shall not exceed 50 milliwatts.

**Test Setup Diagram:**

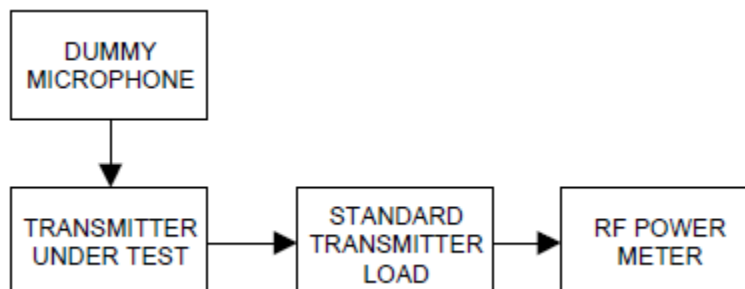

**Test Data:**

RF Output Power, Peak Conducted		
Channel	Power (dBm)	Power (mW)
Channel 1: 169.505	10.00	10.00 mW
Channel 2: 171.905	9.59	9.10 mW

## Part 2.1033 (C)(8) - DC Input into the final amplifier

INPUT POWER:  $(3.0\text{ V})(0.16\text{ A}) = 480\text{ mW}$

## MODULATION CHARACTERISTICS

**Rule Part No.:** Part 2.1049, 90.265(b)(1), RSS 123(4.1)

**Requirement:** Per FCC 90.265(b)(1): On center frequencies 169.475 MHz, 170.275 MHz, 171.075 MHz, and 171.875 MHz, the emission bandwidth shall not exceed 200 kHz. On the other center frequencies listed in this paragraph (b), the emission bandwidth shall not exceed 54 kHz.

Additionally, Per RSS 123(4.1), Table 1: Frequency Band 150-174 MHz Authorized Bandwidth is 54 kHz.

**Test data:**

$$B_n = 2M + 2DK$$

$$M = 3000$$

$$D = 9.0 \text{ kHz (Peak Deviation)}$$

$$K = 1$$

$$B_n = 2(3000) + 2(9000) (1) = \mathbf{24.0 \text{ K}}$$

**Please refer to the following plots.**

## AUDIO FREQUENCY RESPONSE

**Rule Part No.:** Part 2.1047(a), RSS-123(4.6.2)


**Method of Measurement:** TIA 603-E, Section 2.2.6

### Test data:

The following plot shows both the Audio Frequency Response and Low Pass Filter Response of the EUT. Due to software limitation, compliance below 100 Hz is stated numerically.

At **50 Hz**, response was **0.89 kHz**.

The full range above 50 Hz is graphed below:

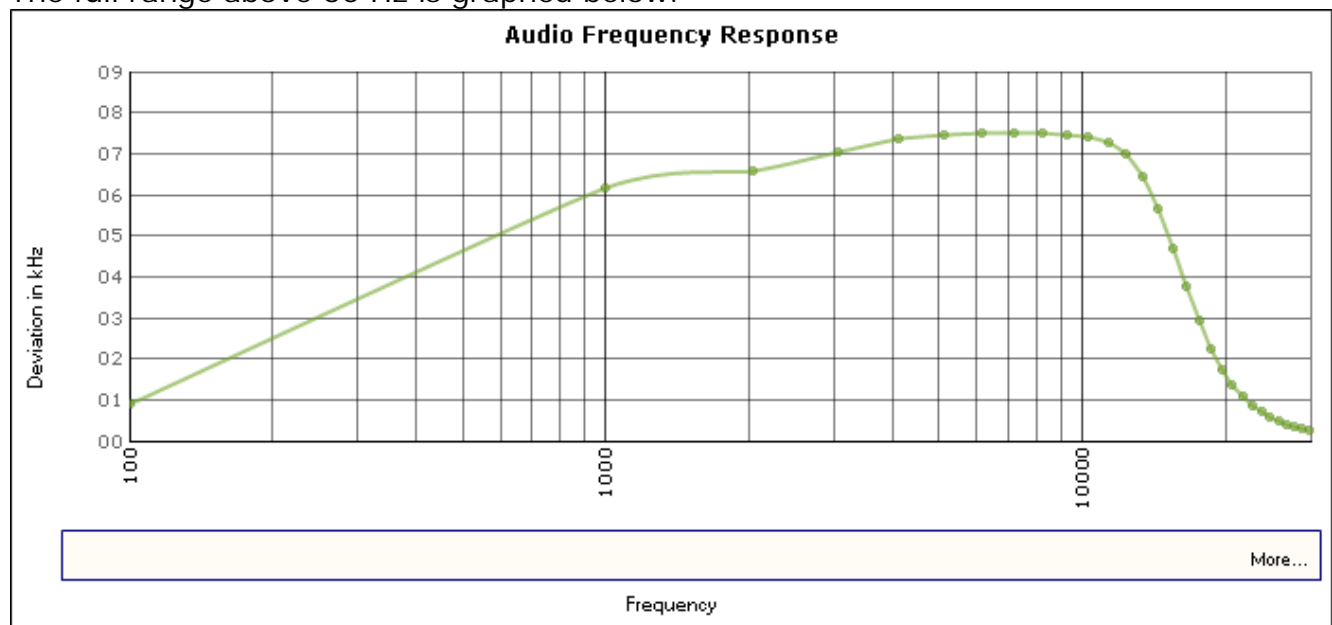

**Result: Meets all Requirements**




## MODULATION LIMITING

**Rule Part No.:** Part 2.1047(b), RSS-123

**Method of Measurement:** TIA 603-E, Section 2.2.3

**Test data:**

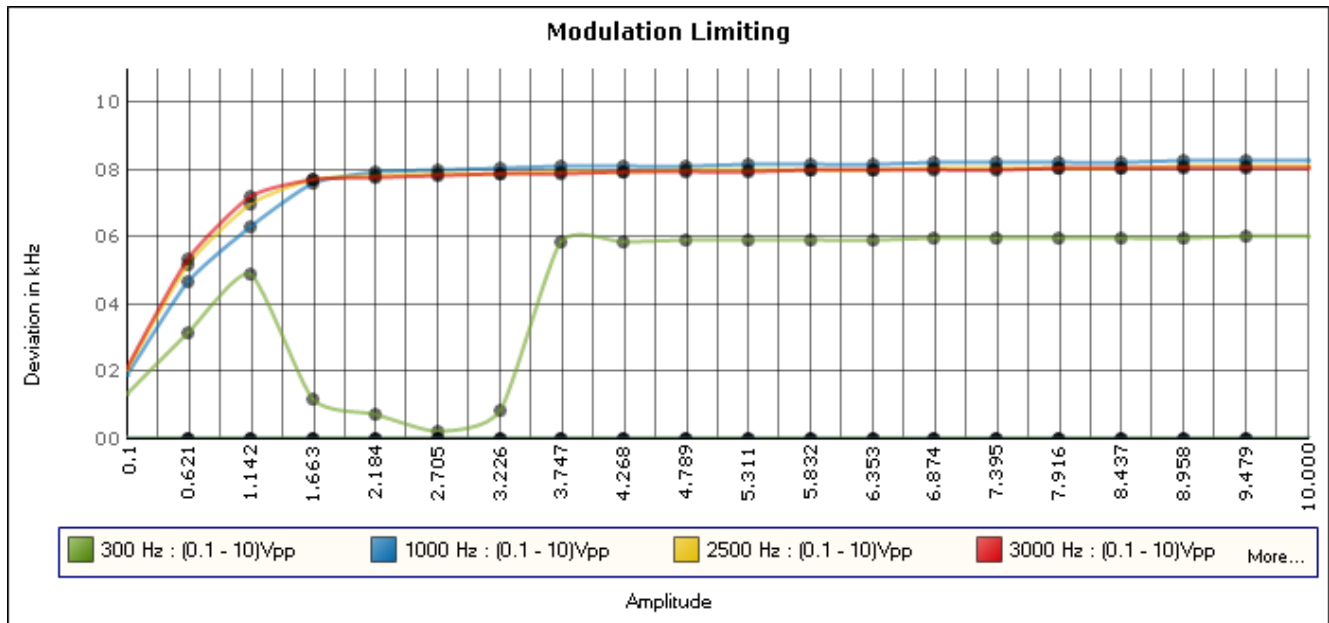

## OCCUPIED BANDWIDTH


**Rule Part No.:** Part 2.1049, 90.210(b), 90.265(b)(1), RSS-123(4.1), RSS-123(4.4)

**Test Requirements:** Per FCC 90.265(b)(1): On center frequencies 169.475 MHz, 170.275 MHz, 171.075 MHz, and 171.875 MHz, the emission bandwidth shall not exceed 200 kHz. On the other center frequencies listed in this paragraph (b), the emission bandwidth shall not exceed 54 kHz.

Additionally, Per RSS 123(4.1), Table 1: Frequency Band 150-174 MHz Authorized Bandwidth is 54 kHz.

**Method of Measurement:** TIA 603-E, Section 2.2.12

### Test Setup:

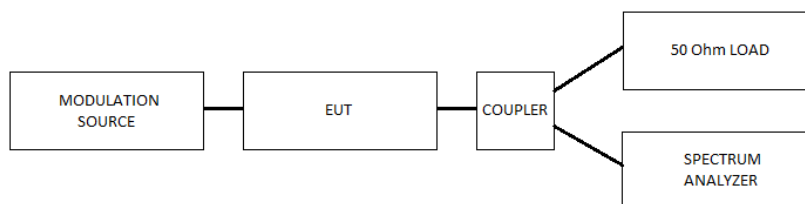


## OCCUPIED BANDWIDTH

Test data:

### MASK B

**99% OCCUPIED BANDWIDTH = 20.44 kHz**

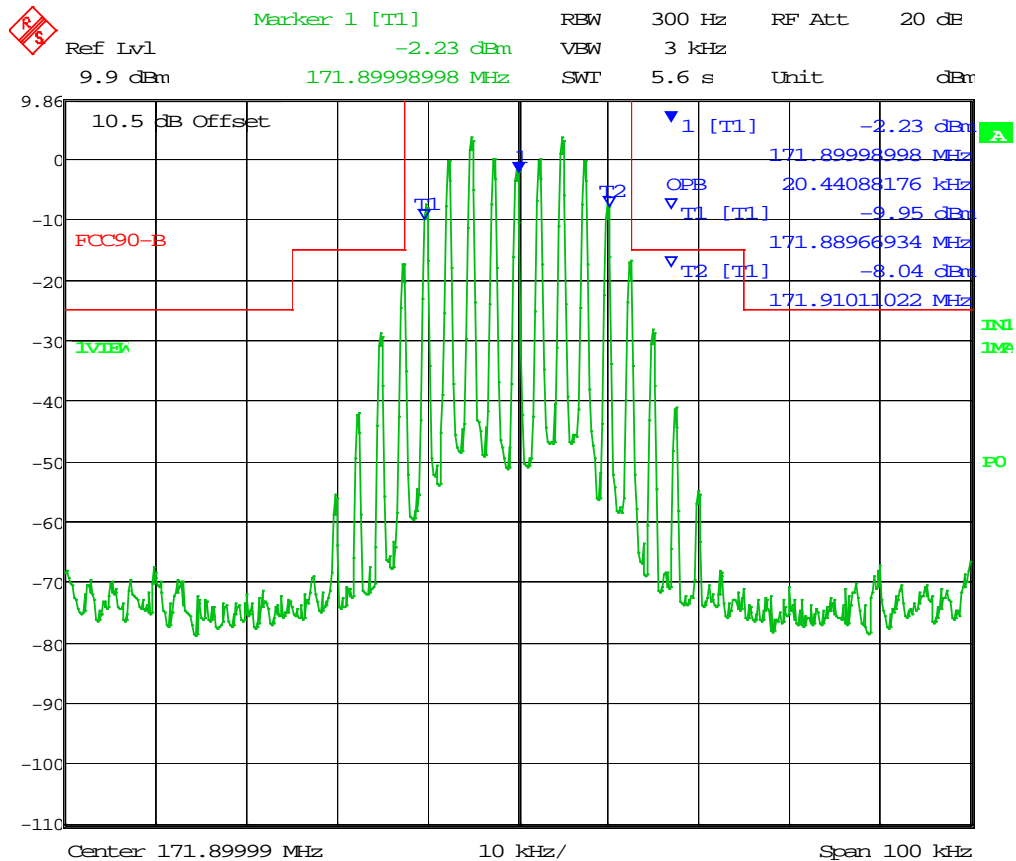

Date: 25.AUG.2017 14:55:10

**Result: Meets all Requirements**

Applicant: AUDIO-TECHNICA CORPORATION  
 FCC ID: JFZT902A  
 IC: 1752B-T902A  
 REPORT: 1542AUT17TestReport\_Rev1

[TABLE OF CONTENTS](#)

## **SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED)**

**Rule Part No.:** Part 2.1051, 90.210(b)(3), RSS-123(4.4)

**Test Requirements:** Per FCC 90.210(b)(3): On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least  $43 + 10 \log(P)$  dB, where  $P$  = Power, in Watts.

Per RSS 123(4.4): At least  $55 + 10 \log_{10}(p_{\text{MEAN}})$  in watts) dB: on any frequency removed from the operating frequency by more than 250% of the authorized bandwidth.

For this test, compliance was demonstrated using the more strict of the two limits:  $55 + 10\log(P)$ .

**Method of Measurement:** TIA 603-E, Section 2.2.13

## SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED)

**Test Data:** CH 1, 169.505 MHz

Power Output	dBm	Watts	Limit (dBc)
	10	0.01	35.00
Limit = 55 + 10 log(P in Watts)			
Frequency	dBc	Margin	
169.505	0.00	0.00	
339.010	67.34	42.34	
508.515	82.28	57.28	
678.020	78.14	53.14	
847.525	84.64	59.64	
1017.030	87.60	62.60	
1186.535	94.45	69.45	
1356.040	97.81	72.81	
1525.545	97.90	72.90	
1695.050	91.71	66.71	

**Test Data:** CH 4, 171.905 MHz

Power Output	dBm	Watts	Limit (dBc)
	9.59	0.01	34.59
Limit = 55 + 10 log(P in Watts)			
Frequency	dBc	Margin	
171.905	0.00	0.00	
343.810	82.37	57.37	
515.715	81.36	56.36	
687.620	81.44	56.44	
859.525	88.01	63.01	
1031.430	90.02	65.02	
1203.335	95.89	70.89	
1375.240	96.65	71.65	
1547.145	94.76	69.76	
1719.050	90.99	65.99	

**Result: Meets all Requirements**

Applicant: AUDIO-TECHNICA CORPORATION  
 FCC ID: JFZT902A  
 IC: 1752B-T902A  
 REPORT: 1542AUT17TestReport\_Rev1

[TABLE OF CONTENTS](#)

## FIELD STRENGTH OF SPURIOUS EMISSIONS

**Rule Part No.:** Part 2.1053, 90.210(b), RSS-123(4.4)


**Test Requirements:** Per FCC 90.210(b)(3): On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least  $43 + 10 \log(P)$  dB, where  $P$  = Power, in Watts.

Per RSS 123(4.4): At least  $55 + 10 \log_{10}(p_{\text{MEAN}}$  in watts) dB: on any frequency removed from the operating frequency by more than 250% of the authorized bandwidth.

For this test, compliance was demonstrated using the more strict of the two limits:  $55 + 10\log(P)$ .

**Method of Measurement:** TIA 603-E, Section 2.2.12

### Test Setup:

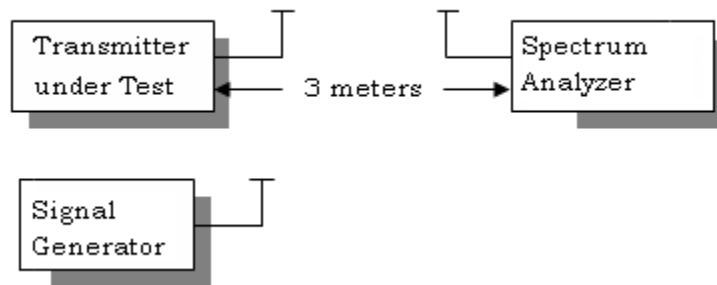

## FIELD STRENGTH OF SPURIOUS EMISSIONS

Test Data: 169.505 MHz

Tuned Freq	169.505 MHz		
Output Power (dBm)	10.00		
Output Power (W)	0.01		
Limit (dBm)	35.00		
Emission Frequency MHz	Antenna Polarity	Field Strength ERP (dBm)	Margin
1695.05	H	-36.84	71.84
1695.05	V	-36.94	71.94
1356.04	V	-37.15	72.15
1356.04	H	-37.20	72.20
1186.54	V	-38.11	73.11
1525.55	V	-38.13	73.13
1525.55	H	-38.44	73.44
1186.54	H	-39.15	74.15
1017.03	V	-40.58	75.58
1017.03	H	-40.58	75.58
339.00	H	-49.52	84.52
140.61	V	-51.68	86.68
847.50	H	-53.23	88.23
847.50	V	-53.31	88.31
339.00	V	-53.54	88.54
678.00	V	-54.76	89.76
678.00	H	-54.77	89.77
508.50	V	-58.20	93.20
508.50	H	-58.24	93.24
57.52	V	-59.89	94.89

## FIELD STRENGTH OF SPURIOUS EMISSIONS

Test Data: 171.905 MHz

Tuned Freq	171.905 MHz		
Output Power (dBm)	9.59		
Output Power (W)	0.01		
Limit (dBm)	34.59		
Emission Frequency MHz	Antenna Polarity	Field Strength ERP (dBm)	Margin
1719.05	H	-35.80	70.39
1375.24	V	-37.07	71.66
1719.05	V	-37.13	71.72
1375.24	H	-37.52	72.11
1547.15	V	-37.77	72.36
1203.34	V	-37.85	72.44
1547.15	H	-38.85	73.44
1203.34	H	-39.30	73.89
1031.43	V	-40.50	75.09
1031.43	H	-41.81	76.40
859.53	H	-44.20	78.79
687.62	H	-46.54	81.13
515.72	V	-46.58	81.17
515.72	H	-48.14	82.73
687.62	V	-51.90	86.49
343.81	H	-52.26	86.85
859.53	V	-53.17	87.76
343.81	V	-54.85	89.44
57.52	V	-58.86	93.45

**Result: Meets all Requirements**



## TRANSIENT FREQUENCY BEHAVIOR

**Rule Part No.:** Part 90.214

**Test Requirements:** Transmitters must maintain transient frequencies within the maximum frequency difference limits during the time intervals below:

Time intervals <sup>1 2</sup>	Maximum frequency difference <sup>3</sup>	All equipment	
		150 to 174 MHz	421 to 512 MHz
Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels			
t <sub>1</sub> <sup>4</sup>	±25.0 kHz	5.0 ms	10.0 ms
t <sub>2</sub>	±12.5 kHz	20.0 ms	25.0 ms
t <sub>3</sub> <sup>4</sup>	±25.0 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels			
t <sub>1</sub> <sup>4</sup>	±12.5 kHz	5.0 ms	10.0 ms
t <sub>2</sub>	±6.25 kHz	20.0 ms	25.0 ms
t <sub>3</sub> <sup>4</sup>	±12.5 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels			
t <sub>1</sub> <sup>4</sup>	±6.25 kHz	5.0 ms	10.0 ms
t <sub>2</sub>	±3.125 kHz	20.0 ms	25.0 ms
t <sub>3</sub> <sup>4</sup>	±6.25 kHz	5.0 ms	10.0 ms

<sup>1</sup>  $t_{on}$  is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.

$t_1$  is the time period immediately following  $t_{on}$ .

$t_2$  is the time period immediately following  $t_1$ .

$t_3$  is the time period from the instant when the transmitter is turned off until  $t_{off}$ .

$t_{off}$  is the instant when the 1 kHz test signal starts to rise.

<sup>2</sup> During the time from the end of  $t_2$  to the beginning of  $t_3$ , the frequency difference must not exceed the limits specified in §90.213.


<sup>3</sup> Difference between the actual transmitter frequency and the assigned transmitter frequency.

<sup>4</sup> If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

**Method of Measurement:** TIA 603-E, Section 2.2.19

## TRANSIENT FREQUENCY BEHAVIOR

### Test Setup:

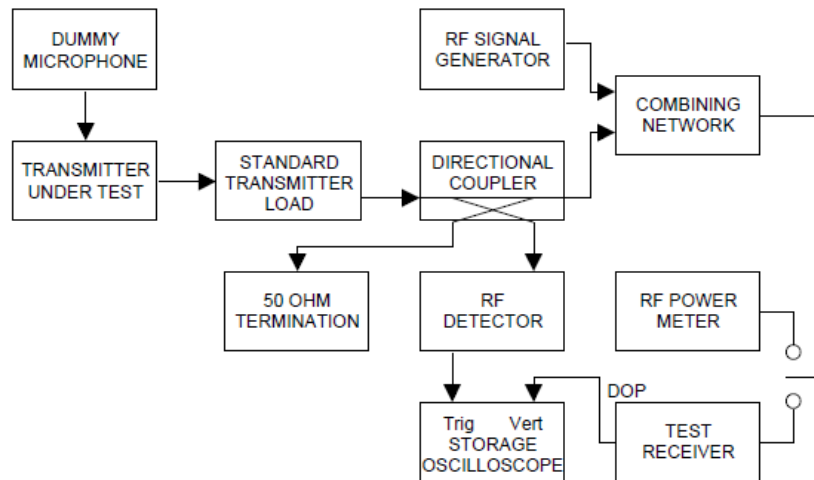

### Test Data:

The EUT begins transmitting when powered-on, and continues to transmit at 100% duty cycle until powered-off. The EUT does not have a “push-to-talk” feature and is not able to be assessed for Transient Frequency Behavior.

## FREQUENCY STABILITY

**Rule Parts. No.:** Part 2.1055, Part 90.265(b)(3), RSS-123(4.3)

**Requirements:** Temperature and voltage tests were performed to verify that the total emissions stay within  $\pm 32.5$  kHz of the assigned frequency. For RSS 123, Table 1 specifies the emissions shall stay within  $\pm 50$  ppm.

**Method of Measurements:** ANSI C63.10, Section 6.8

### Test Data:

Reference Frequency (Hz)	171899700
--------------------------	-----------

Temperature (°C)	Frequency (MHz)	Deviation (kHz)	PPM
-30°C	171899350	0.350	2.036
-20°C	171900040	-0.340	-1.978
-10°C	171900560	-0.860	-5.003
0°C	171900280	-0.580	-3.374
10°C	171899540	0.160	0.931
20°C	171899050	0.650	3.781
30°C	171898970	0.730	4.247
40°C	171899900	-0.200	-1.163
50°C	171899790	-0.090	-0.524

Voltage	Frequency (MHz)	Deviation (kHz)	PPM
2.55	171899640	0.060	0.349
3.00	171899700	0.000	0.000
3.45	171899560	0.140	0.814

**Result: Meets all Requirements**

## STATEMENT OF MEASUREMENT UNCERTAINTY

The data and results referenced in this document are true and accurate. The measurement uncertainty was calculated for all measurements listed in this test report according To CISPR 16–4 or ENTR 100-028 Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: “Uncertainty in EMC Measurements” and is documented in the Timco Engineering, Inc. quality system according to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Timco Engineering, Inc. is reported:

Test Items	Measurement Uncertainty	Notes
RF Frequency Accuracy	$\pm 49.5$ Hz	(1)
RF Conducted Power	$\pm 0.93$ dB	(1)
Conducted spurious emission of transmitter valid up to 40GHz	$\pm 1.86$ dB	
Occupied Bandwidth	$\pm 2.65$ %	
Audio Frequency Response	$\pm 1.86$ dB	
Modulation limiting	$\pm 1.88$ %	
Radiated RF Power	$\pm 1.4$ dB	
Maximum frequency deviation: Within 300 Hz and 6kHz of audio freq. Within 6kHz and 25kHz of audio Freq.	$\pm 1.88$ % $\pm 2.04$ %	
Rad Emissions Sub. Method up to 26.5GHz	$\pm 2.14$ dB	
Temperature	$\pm 1.0$ °C	(1)
Humidity	$\pm 5.0$ %	

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=1.96$ .

## EMC EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
Temperature Chamber LARGE	Tenney Engineering	TTRC	11717-7	09/01/16	09/01/18
Digital Multimeter	Fluke	FLUKE-77-3	79510405	10/21/15	10/21/17
Frequency Counter	HP	5385A	2730A03025	10/21/15	10/21/17
CHAMBER	Panashield	3M	N/A	04/25/16	12/31/17
EMI Test Receiver R & S ESIB 40 Screen Room	Rohde & Schwarz	ESIB 40	100274	08/16/16	08/16/18
Software: Field Strength Program	Timco	N/A	Version 4.10.7.0	N/A	N/A
Type KJ Thermometer	Martel	303	08054494	10/26/15	10/26/17
Modulation Analyzer	HP	8901A	3050A05856	04/13/17	04/13/19
EMI Test Receiver R & S ESU 40 Chamber	Rohde & Schwarz	ESU 40	100320	04/01/16	04/01/18
Coaxial Cable - Chamber 3 cable set (Primary)	Micro-Coax	Chamber 3 cable set (Primary)	KMKM-0244-01; KMKM-0670-00; KFKF-0198-01	08/09/16	08/09/18
Function Generator	Standford	DS340	25200	02/02/16	02/02/18
Bore-sight Antenna Positioning Tower	Sunol Sciences	TLT2	N/A	N/A	N/A
Tunable Notch Filter 54-210 MHz	Eagle	210BFBF	54-210MHz (#42)	09/17/15	09/17/17
Signal Generator HP 8648C	HP	8648C	3847A04696	04/05/17	04/05/19
Coaxial Cable – BMBM-0060-00 Black	Alpha Wire		BMBM-0060-00	06/08/16	06/08/18
Coaxial Cable – BMBM-0031-00 Black	Pasternack		BMBM-0031-00	02/17/17	02/17/19
DC Power Supply	Sky TPOWER	STP6005	n/a	n/a	n/a

\*EMI RECEIVER SOFTWARE VERSION

The receiver firmware used was version 4.43 Service Pack 3

## END OF REPORT

Applicant: AUDIO-TECHNICA CORPORATION  
 FCC ID: JFZT902A  
 IC: 1752B-T902A  
 REPORT: 1542AUT17TestReport\_Rev1

[TABLE OF CONTENTS](#)