

**FCC Part 15.249**  
**RSS-GEN ISSUE 5 February 2021 Amendment 2**  
**RSS-210, ISSUE 10, April 2020 Amendment**

**TEST REPORT**

For

**Jasco Products Company LLC**

10 e memorial road Office, Oklahoma city, OK, 73114, United States

**FCC ID: QOBZWA4014**  
**IC: 6924A-ZWA4014**

**Report Type:**  
Original Report

**Product Type:**  
In-Wall Smart Fan Control

**Report Producer :** Lynette Wen

**Report Number :** RXZ230331080RF01

**Report Date :** 2023-05-16

**Reviewed By:** Andy Shih

*Andy Shih*

**Prepared By:** Bay Area Compliance Laboratories Corp.

(New Taipei Laboratory)

70, Lane 169, Sec. 2, Datong Road, Xizhi Dist.,

New Taipei City 22183, Taiwan, R.O.C.

Tel: +886 (2) 2647 6898

Fax: +886 (2) 2647 6895

www.bacl.com.tw

## Revision History

Revision	No.	Report Number	Issue Date	Description	Author/ Revised by
0.0	RXZ230331080	RXZ230331080RF01	2023-05-16	Original Report	Lynette Wen

## **TABLE OF CONTENTS**

<b>1</b>	<b>General Information.....</b>	<b>4</b>
1.1	Product Description for Equipment under Test (EUT) .....	4
1.2	Objective .....	5
1.3	Related Submittal(s)/Grant(s).....	5
1.4	Test Methodology.....	5
1.5	Statement .....	5
1.6	Measurement Uncertainty .....	6
1.7	Environmental Conditions.....	6
1.8	Test Facility.....	6
<b>2</b>	<b>System Test Configuration.....</b>	<b>7</b>
2.1	Description of Test Configuration.....	7
2.2	Equipment Modifications .....	7
2.3	EUT Exercise Software .....	7
2.4	Support Equipment List and Details.....	7
2.5	External Cable List and Details.....	7
2.6	Test Mode.....	7
2.7	Block Diagram of Test Setup .....	8
<b>3</b>	<b>Summary of Test Results .....</b>	<b>10</b>
<b>4</b>	<b>Test Equipment List and Details .....</b>	<b>11</b>
<b>5</b>	<b>FCC §1.1307(b)(3)(i) – RF EXPOSURE.....</b>	<b>12</b>
5.1	Applicable Standard .....	12
5.2	RF Exposure Evaluation Result.....	13
<b>6</b>	<b>RSS-102 § 2.5.2 – EXEMPTION LIMITS FROM ROUTINE EVALUATION - RF EXPOSURE EVALUATION .....</b>	<b>14</b>
6.1	Applicable Standard .....	14
6.2	RF Exposure Evaluation Result.....	14
<b>7</b>	<b>FCC §15.203 &amp; RSS-GEN CLAUSE 6.8 – Antenna Requirements.....</b>	<b>15</b>
7.1	Applicable Standard .....	15
7.2	Antenna Information .....	15
<b>8</b>	<b>FCC §15.207(a) &amp; RSS-GEN CLAUSE 8.8 – AC Line Conducted Emissions .....</b>	<b>16</b>
8.1	Applicable Standard .....	16
8.2	EUT Setup .....	16
8.3	EMI Test Receiver Setup .....	17
8.4	Test Procedure.....	17
8.5	Factor & Over Limit.....	17
8.6	Test Results .....	18
<b>9</b>	<b>FCC §15.209, §15.205 , §15.249 &amp; RSS-210 ANNEX B.10, RSS-GEN CLAUSE 8.10 - Radiated Emissions.....</b>	<b>22</b>
9.1	Applicable Standard .....	22
9.2	EUT Setup .....	23
9.3	EMI Test Receiver & Spectrum Analyzer Setup.....	23
9.4	Test Procedure.....	24
9.5	Corrected Factor & Margin Calculation.....	24
9.6	Test Results Summary .....	24
9.7	Test Results .....	25
<b>10</b>	<b>FCC §15.215(c) &amp; RSS-GEN CLAUSE 6.7 – 20 dB Bandwidth Testing and 99% OCCUPIED BANDWIDTH .....</b>	<b>28</b>
10.1	Applicable Standard .....	28
10.2	Test Procedure.....	29
10.3	Test Results .....	29

# 1 General Information

## 1.1 Product Description for Equipment under Test (EUT)

Manufacturer	Jasco Products Company LLC
	10 e memorial road Office, Oklahoma city, OK, 73114, United States
Brand Name	Jasco / enbrighten
Product (Equipment)	In-Wall Smart Fan Control
Model Name (HVIN)	ZWA4014
Frequency Range	908.4 / 916 MHz
Modulation Technique	FSK
Power Operation	120Vac/60Hz
Received Date	2023/03/31
Date of Test	2023/4/6 ~ 2023/4/12

*\*All measurement and test data in this report was gathered from production sample serial number: RXZ230331080-01 (Assigned by BACL, New Taipei Laboratory).*

## **1.2 Objective**

This report is prepared on behalf of Jasco Products Company LLC in accordance with Part 2-Subpart J, and Part 15-Subparts A and C of the Federal Communication Commission's rules, and RSS-210, Issue 10, April 2020 Amendment of the Innovation, Science and Economic Development Canada, and RSS-Gen Issue 5, February 2021 Amendment 2, General Requirements for Compliance of Radio Apparatus.

## **1.3 Related Submittal(s)/Grant(s)**

N/A.

## **1.4 Test Methodology**

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices, and RSS-210, Issue 10, April 2020 Amendment of the Innovation, Science and Economic Development Canada, and RSS-Gen Issue 5, February 2021 Amendment 2, General Requirements for Compliance of Radio Apparatus.

## **1.5 Statement**

Decision Rule: No, (The test results do not include MU judgment)

It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (New Taipei Laboratory).

Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

The determination of the test results does not require consideration of the uncertainty of the measurement, unless the assessment is required by customer agreement, regulation or standard document specification.

Bay Area Compliance Laboratories Corp. (New Taipei Laboratory) is not responsible for the authenticity of the information provided by the applicant that affects the test results.

## 1.6 Measurement Uncertainty

Parameter		Uncertainty
AC Mains		+/- 2.53 dB
Emissions Bandwidth		+/- 0.09 %
Emissions, radiated	30 MHz~1GHz	+/- 4.99 dB
	1 GHz~18 GHz	+/- 7.56 dB
	18 GHz~40 GHz	+/- 5.06 dB
Temperature		+/- 0.79 °C
Humidity		+/- 0.44 %

*Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty*

## 1.7 Environmental Conditions

Test Site	Test Date	Temperature (°C)	Relative Humidity (%)	ATM Pressure (hPa)	Test Engineer
AC Line Conducted Emissions	2023/4/12	24.3	64	1010	Aaron
Radiation Spurious Emissions	2023/4/6	22.5	72	1010	Jim Chen
Emission Bandwidth	2023/4/10	24.7	60	1010	Aaron

## 1.8 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (New Taipei Laboratory) to collect test data is located on

☒ 70, Lane 169, Sec. 2, Datong Road, Xizhi Dist., New Taipei City 22183, Taiwan, R.O.C.

Bay Area Compliance Laboratories Corp. (New Taipei Laboratory) is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 3732) and the FCC designation No.TW3732 under the Mutual Recognition Agreement (MRA) in FCC Test.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: TW3732.

## 2 System Test Configuration

### 2.1 Description of Test Configuration

The system was configured for testing in an engineering mode, which was provided by manufacturer.

The engineering mode was configured the system transmitting with maximum power.

Channel	Frequency (MHz)
1	908.4
2	916.0

Tested with channel 1 and 2.

### 2.2 Equipment Modifications

No modification was made to the EUT.

### 2.3 EUT Exercise Software

Use the button to switch the test channel.

Test Frequency	Low	High
Power Level Setting	Default	Default

The system was configured for testing in an engineering mode, which was provided by manufacturer.

The engineering mode was configured the system transmitting with maximum power.

### 2.4 Support Equipment List and Details

Description	Manufacturer	Model Number
Light Bulb	Yousheng Industrial	350W

### 2.5 External Cable List and Details

Description	Length	From	To
Power Cable	1m	EUT	Light Bulb

### 2.6 Test Mode


Full System (model: ZWA4014) test item.

## 2.7 Block Diagram of Test Setup


See test photographs attached in setup photos for the actual connections between EUT and support equipment.

### Radiation:

Below 1GHz:

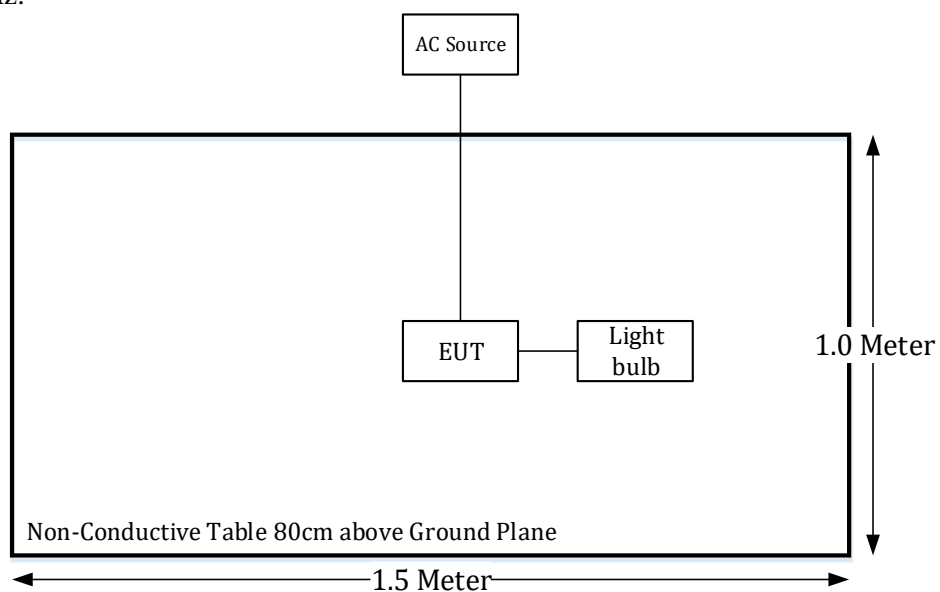


Above 1GHz:

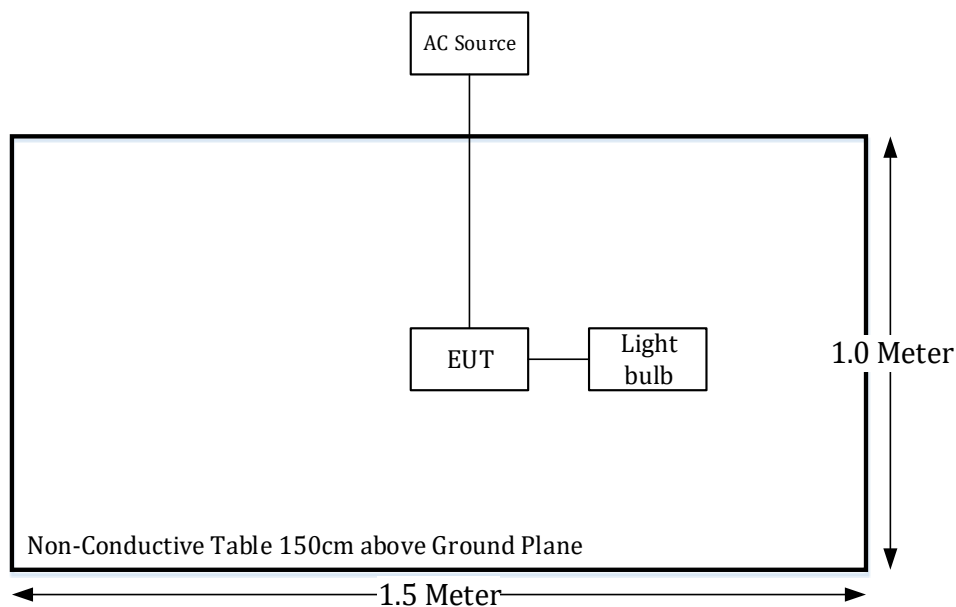




Conduction:

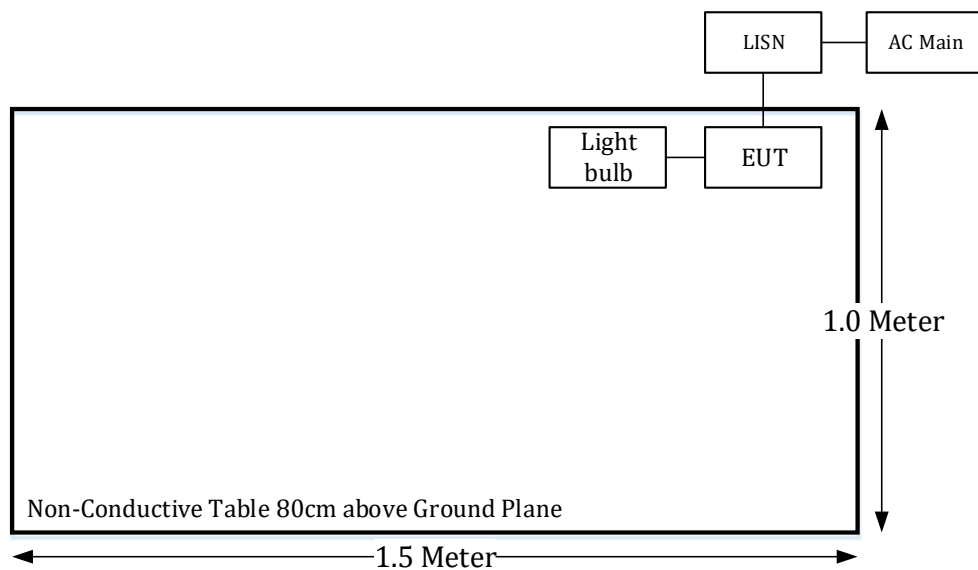

Conducted:

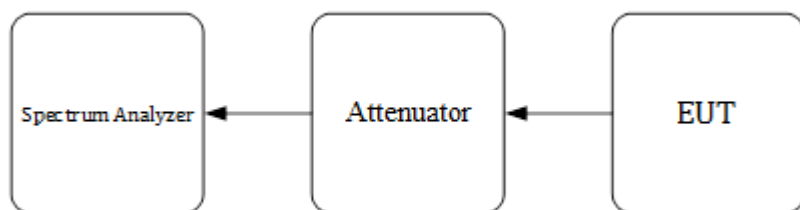

### 3 Summary of Test Results

Rules	Description of Test	Results
§1.1307(b)(3)(i)	RF Exposure	Compliance
§RSS-102 Clause 2.5.2	Exemption Limits From Routine Evaluation- RF Exposure Evaluation	Compliance
§15.203 RSS-GEN Clause 6.8	Antenna Requirement	Compliance
§15.207 (a) RSS-Gen Clause 8.8	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.249 RSS-210 Annex B.10 RSS-Gen Clause 8.10	Radiated Emissions	Compliance
§15.215 (c) RSS-Gen Clause 6.7	20 dB Emission Bandwidth 99% Occupied Bandwidth	Compliance

## 4 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due Date
AC Line Conduction Room (CON-A)					
LISN	Rohde & Schwarz	ENV216	101612	2023/2/2	2024/2/1
EMI Test Receiver	Rohde & Schwarz	ESW8	100947	2022/7/27	2023/7/26
Pulse Limiter	Rohde & Schwarz	ESH3Z2	TXZEM104	2022/7/19	2023/7/18
RF Cable	EMEC	EM-CB5D	1	2022/6/7	2023/6/6
Software	AUDIX	E3	V9.150826k	N.C.R	N.C.R
Radiation 3M Room (966-A)					
Bilog Antenna with 6 dB Attenuator	SUNOL SCIENCES & MINI-CIRCUITS	JB6/UNAT-6+	A050115/15542_01	2023/2/2	2024/2/1
Horn Antenna	EMCO	SAS-571	1020	2022/5/25	2023/5/24
Preamplifier	Sonoma	310N	130602	2022/6/16	2023/6/15
Spectrum Analyzer	Rohde & Schwarz	FSV40	101435	2023/2/1	2024/1/31
EMI Test Receiver	Rohde & Schwarz	ESR7	101419	2022/11/2	2023/11/1
Micro flex Cable	UTIFLEX	UFB197C-1-2362-70U-70U	225757-001	2023/1/24	2024/1/23
Coaxial Cable	COMMATE	PEWC	8Dr	2022/12/24	2023/12/23
Coaxial Cable	UTIFLEX	UFB311A-Q-1440-300300	220490-006	2023/1/24	2024/1/23
Coaxial Cable	JUNFLON	J12J102248-00-B-5	AUG-07-15-044	2022/12/24	2023/12/23
Cable	EMC	EMC105-SM-SM-10000	201003	2023/1/24	2024/1/23
Preamplifier	A.H. system Inc.	PAM-0118P	470	2023/3/24	2024/3/22
Software	Audix	E3	18621a Bacl	N.C.R	N.C.R
Conducted Room					
Spectrum Analyzer	Rohde & Schwarz	FSV40	101140	2023/2/10	2024/2/9
Cable	UTIFLEX	UFA210A	9435	2022/10/3	2023/10/2
Attenuator	MINI-CIRCUITS	BW-S10W5+	1419	2023/2/2	2024/2/1

**\*Statement of Traceability:** BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to the SI System of Units via the R.O.C. Center for Measurement Standards of the Electronics Testing Center, Taiwan (ETC) or to another internationally recognized National Metrology Institute (NMI), and were compliant with the current Taiwan Accreditation Foundation (TAF) requirements.

## 5 FCC §1.1307(b)(3)(i) – RF EXPOSURE

### 5.1 Applicable Standard

According to subpart §1.1307(b)(3)(i), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

For single RF sources (*i.e.*, any single fixed RF source, mobile device, or portable device, as defined in paragraph (b)(2) of this section): A single RF source is exempt if:

(A) The available maximum time-averaged power is no more than 1 mW, regardless of separation distance. This exemption may not be used in conjunction with other exemption criteria other than those in paragraph (b)(3)(ii)(A) of this section. Medical implant devices may only use this exemption and that in paragraph (b)(3)(ii)(A);

(B) Or the available maximum time-averaged power or effective radiated power (ERP), whichever is greater, is less than or equal to the threshold  $P_{th}$  (mW) described in the following formula. This method shall only be used at separation distances (cm) from 0.5 centimeters to 40 centimeters and at frequencies from 0.3 GHz to 6 GHz (inclusive).  $P_{th}$  is given by:

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}} (d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases}$$

Where

$$x = -\log_{10} \left( \frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right) \text{ and } f \text{ is in GHz;}$$

and

$$ERP_{20 \text{ cm}} \text{ (mW)} = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases}$$

(C) Or using Table 1 and the minimum separation distance (R in meters) from the body of a nearby person for the frequency (f in MHz) at which the source operates, the ERP (watts) is no more than the calculated value prescribed for that frequency. For the exemption in Table 1 to apply, R must be at least  $\lambda/2\pi$ , where  $\lambda$  is the free-space operating wavelength in meters. If the ERP of a single RF source is not easily obtained, then the available maximum time-averaged power may be used in lieu of ERP if the physical dimensions of the radiating structure(s) do not exceed the electrical length of  $\lambda/4$  or if the antenna gain is less than that of a half-wave dipole (1.64 linear value).

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$ .
1.34-30	$3,450 R^2/f^2$ .
30-300	$3.83 R^2$ .
300-1,500	$0.0128 R^2 f$ .
1,500-100,000	$19.2 R^2$ .

## 5.2 RF Exposure Evaluation Result

Calculate the EIRP from the radiated field strength in the far field using Equation

$$\text{EIRP} = E_{\text{Meas}} + 20 \log(d_{\text{Meas}}) - 104.7$$

$$\text{EIRP} = 92.75 \text{ dB}\mu\text{V/m} - 95.2 = -2.45 \text{ dBm}$$

$$\text{EIRP Tune-up power} = -2 \text{ dBm}$$

Project info

Band	Freq (MHz)	Tune-up Power (dBm)	Distances (mm)	Tune-up Power (mW)	ERP (dBm)	ERP (mW)
SRD	916	-2	200	0.63	-4.15	0.38

Option A

The available maximum time-averaged power is no more than 1 mW

Band	Freq (MHz)	Result Option A
SRD	916	exempt

**Result:** The device meets the exemption requirement.

## 6 RSS-102 § 2.5.2 – EXEMPTION LIMITS FROM ROUTINE EVALUATION - RF EXPOSURE EVALUATION

### 6.1 Applicable Standard

RF exposure evaluation is required if the separation distance between the user and/or bystander and the device's radiating element is greater than 20 cm, except when the device operates as follows:

- below 20 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 1 W (adjusted for tune-up tolerance);
- at or above 20 MHz and below 48 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than  $4.49/f^{0.5}$  W (adjusted for tune-up tolerance), where  $f$  is in MHz;
- at or above 48 MHz and below 300 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 0.6 W (adjusted for tune-up tolerance);
- at or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than  $1.31 \times 10^{-2} f^{0.6834}$  W (adjusted for tune-up tolerance), where  $f$  is in MHz;
- at or above 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 5 W (adjusted for tune-up tolerance).

In these cases, the information contained in the RF exposure technical brief may be limited to information that demonstrates how the e.i.r.p. was derived.

### 6.2 RF Exposure Evaluation Result

EIRP = 92.75 dBμV/m -95.2 = -2.45 dBm

EIRP Tune-up power = -2 dBm = 0.63 mW

Exemption from Routine Evaluation Limit is:

$$1.31 \times 10^{-2} f^{0.6834} = 1.31 \times 10^{-2} \times 908.4^{0.6834} = 1.38\text{W} > 0.63\text{mW}$$

**Result:** The device meets the exemption requirement.

## 7 FCC §15.203 & RSS-GEN CLAUSE 6.8 – Antenna Requirements

### 7.1 Applicable Standard

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used.

According to RSS-Gen §6.8, The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer. The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested. For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

### 7.2 Antenna Information

Manufacturer	Type	Antenna Gain	Input impedance
Jasco Products Company LLC	Monopole Antenna	-1.29 dBi	50Ω

**Result:** Compliance.

## 8 FCC §15.207(a) & RSS-GEN CLAUSE 8.8 – AC Line Conducted Emissions

### 8.1 Applicable Standard

According to §15.207 for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.


Unless stated otherwise in the applicable RSS, for radio apparatus that are designed to be connected to the public utility AC power network, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the range 150 kHz to 30 MHz shall not exceed the limits in table 4, as measured using a 50  $\mu$ H / 50  $\Omega$  line impedance stabilization network. This requirement applies for the radio frequency voltage measured between each power line and the ground terminal of each AC power-line mains cable of the EUT.

For an EUT that connects to the AC power lines indirectly, through another device, the requirement for compliance with the limits in table 4 shall apply at the terminals of the AC power-line mains cable of a representative support device, while it provides power to the EUT. The lower limit applies at the boundary between the frequency ranges. The device used to power the EUT shall be representative of typical applications.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56 <sup>Note 1</sup>	56 to 46 <sup>Note 1</sup>
0.5-5	56	46
5-30	60	50

*Note 1: Decreases with the logarithm of the frequency.*

### 8.2 EUT Setup

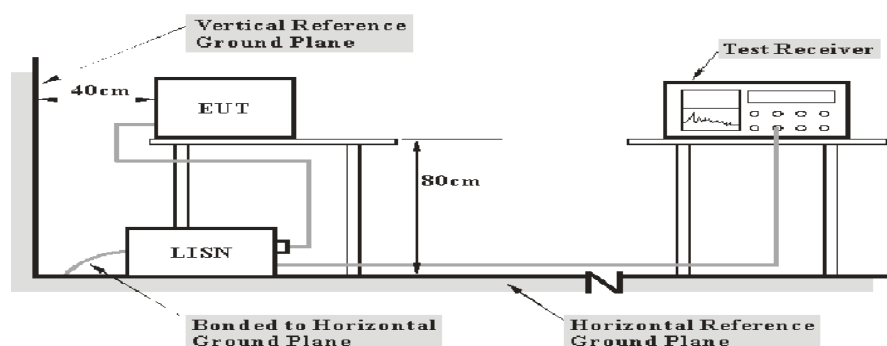

Note: 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 and RSS-GEN limits.



### 8.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150kHz to 30MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations

Frequency Range	IF B/W
150kHz – 30MHz	9kHz

### 8.4 Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

### 8.5 Factor & Over Limit

The factor is calculated by adding LISN/ISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$


The “Over Limit” column of the following data tables indicates the degree of compliance with the applicable limit line. For example, an over limit of -7 dB means the emission is 7 dB below the limit line. The equation for Over Limit calculation is as follows:

$$\text{Over Limit} = \text{Level} - \text{Limit Line}$$

## 8.6 Test Results

Test Mode: Transmitting

Main: AC120 V, 60 Hz, Line

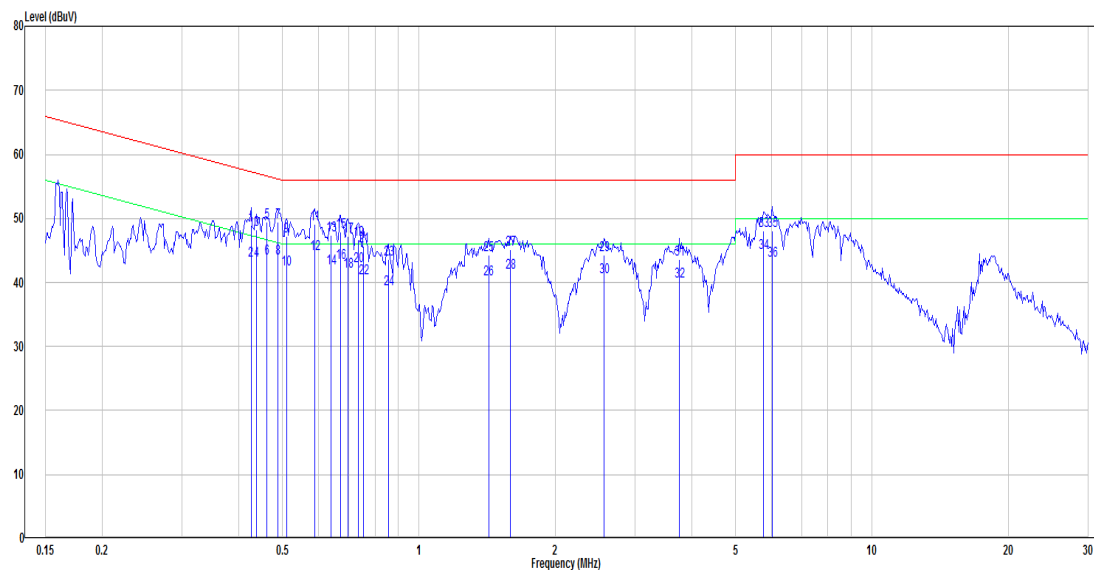

No.	Frequency	Reading	Correct	Result	Limit	Over limit	Remark
	(MHz)	(dBμV)	Factor(dB)	(dBμV)	(dBμV)	(dB)	
1	0.426	29.31	19.54	48.85	57.33	-8.48	QP
2	0.426	23.90	19.54	43.44	47.33	-3.89	Average
3	0.437	28.66	19.54	48.20	57.11	-8.91	QP
4	0.437	23.87	19.54	43.41	47.11	-3.70	Average
5	0.461	29.82	19.54	49.36	56.67	-7.31	QP
6	0.461	24.21	19.54	43.75	46.67	-2.92	Average
7	0.489	29.91	19.54	49.45	56.19	-6.74	QP
8	0.489	24.23	19.54	43.77	46.19	-2.42	Average
9	0.510	27.70	19.54	47.24	56.00	-8.76	QP
10	0.510	22.47	19.54	42.01	46.00	-3.99	Average
11	0.589	29.62	19.54	49.16	56.00	-6.84	QP
12	0.589	24.88	19.54	44.42	46.00	-1.58	Average
13	0.641	27.91	19.55	47.46	56.00	-8.54	QP
14	0.641	22.76	19.55	42.31	46.00	-3.69	Average
15	0.672	28.34	19.55	47.89	56.00	-8.11	QP
16	0.672	23.54	19.55	43.09	46.00	-2.91	Average
17	0.697	27.65	19.55	47.20	56.00	-8.80	QP
18	0.697	22.22	19.55	41.77	46.00	-4.23	Average
19	0.735	27.19	19.55	46.74	56.00	-9.26	QP
20	0.735	22.97	19.55	42.52	46.00	-3.48	Average

Note: It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.  
(New Taipei Laboratory)


21	0.755	26.05	19.55	45.60	56.00	-10.40	QP
22	0.755	21.09	19.55	40.64	46.00	-5.36	Average
23	0.857	23.98	19.55	43.53	56.00	-12.47	QP
24	0.857	19.33	19.55	38.88	46.00	-7.12	Average
25	1.426	24.75	19.58	44.33	56.00	-11.67	QP
26	1.426	20.90	19.58	40.48	46.00	-5.52	Average
27	1.593	25.52	19.58	45.10	56.00	-10.90	QP
28	1.593	21.96	19.58	41.54	46.00	-4.46	Average
29	2.567	24.68	19.62	44.30	56.00	-11.70	QP
30	2.567	21.26	19.62	40.88	46.00	-5.12	Average
31	3.759	23.90	19.65	43.55	56.00	-12.45	QP
32	3.759	20.55	19.65	40.20	46.00	-5.80	Average
33	5.774	28.44	19.69	48.13	60.00	-11.87	QP
34	5.774	24.96	19.69	44.65	50.00	-5.35	Average
35	6.024	28.34	19.70	48.04	60.00	-11.96	QP
36	6.024	23.69	19.70	43.39	50.00	-6.61	Average

Note:

Level = Read Level + Factor

Over Limit = Level - Limit Line

Factor = (LISN, ISN, PLC or current probe) Factor + Cable Loss + Attenuator

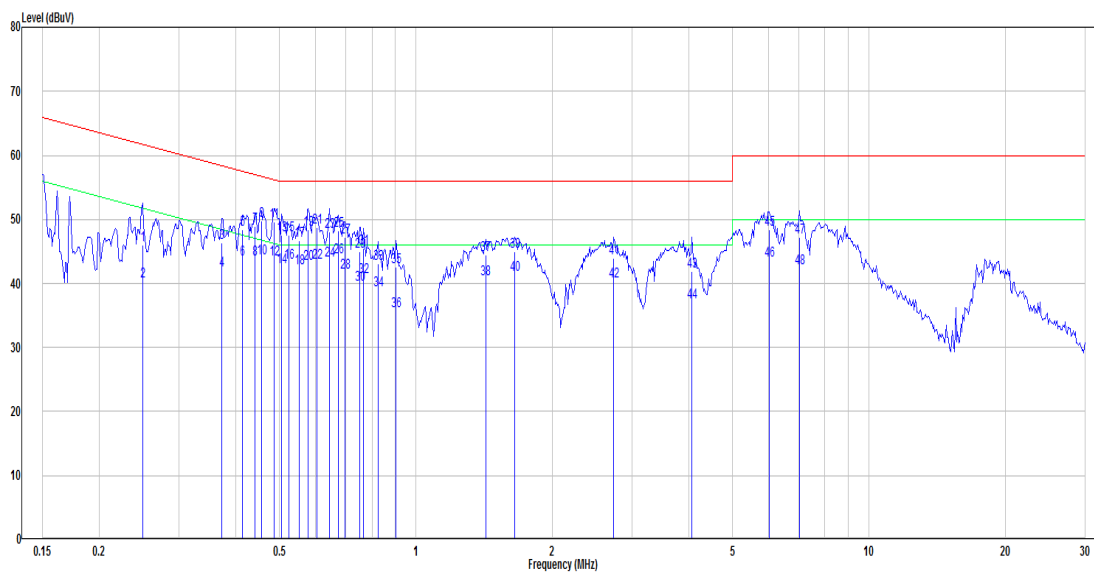**Main: AC120 V, 60 Hz, Neutral**

No.	Frequency (MHz)	Reading (dBμV)	Correct Factor(dB)	Result (dBμV)	Limit (dBμV)	Over limit (dB)	Remark
1	0.249	26.45	19.54	45.99	61.78	-15.79	QP
2	0.249	20.77	19.54	40.31	51.78	-11.47	Average
3	0.373	26.75	19.55	46.30	58.43	-12.13	QP
4	0.373	22.54	19.55	42.09	48.43	-6.34	Average
5	0.415	28.90	19.55	48.45	57.55	-9.10	QP
6	0.415	24.18	19.55	43.73	47.55	-3.82	Average
7	0.442	29.40	19.55	48.95	57.02	-8.07	QP
8	0.442	24.25	19.55	43.80	47.02	-3.22	Average
9	0.456	30.32	19.55	49.87	56.76	-6.89	QP
10	0.456	24.38	19.55	43.93	46.76	-2.83	Average
11	0.486	30.08	19.55	49.63	56.23	-6.60	QP
12	0.486	24.30	19.55	43.85	46.23	-2.38	Average
13	0.505	28.00	19.55	47.55	56.00	-8.45	QP
14	0.505	23.01	19.55	42.56	46.00	-3.44	Average
15	0.524	27.96	19.55	47.51	56.00	-8.49	QP
16	0.524	23.65	19.55	43.20	46.00	-2.80	Average
17	0.552	27.15	19.55	46.70	56.00	-9.30	QP
18	0.552	22.90	19.55	42.45	46.00	-3.55	Average
19	0.579	28.81	19.55	48.36	56.00	-7.64	QP
20	0.579	23.62	19.55	43.17	46.00	-2.83	Average
21	0.604	29.16	19.55	48.71	56.00	-7.29	QP
22	0.604	23.72	19.55	43.27	46.00	-2.73	Average
23	0.644	28.56	19.55	48.11	56.00	-7.89	QP

24	0.644	24.09	19.55	43.64	46.00	-2.36	Average
25	0.675	28.74	19.55	48.29	56.00	-7.71	QP
26	0.675	24.54	19.55	44.09	46.00	-1.91	Average
27	0.697	27.62	19.55	47.17	56.00	-8.83	QP
28	0.697	22.25	19.55	41.80	46.00	-4.20	Average
29	0.751	25.39	19.56	44.95	56.00	-11.05	QP
30	0.751	20.26	19.56	39.82	46.00	-6.18	Average
31	0.767	25.86	19.56	45.42	56.00	-10.58	QP
32	0.767	21.44	19.56	41.00	46.00	-5.00	Average
33	0.826	23.52	19.56	43.08	56.00	-12.92	QP
34	0.826	19.33	19.56	38.89	46.00	-7.11	Average
35	0.904	22.99	19.56	42.55	56.00	-13.45	QP
36	0.904	16.22	19.56	35.78	46.00	-10.22	Average
37	1.426	24.82	19.58	44.40	56.00	-11.60	QP
38	1.426	21.07	19.58	40.65	46.00	-5.35	Average
39	1.654	25.32	19.59	44.91	56.00	-11.09	QP
40	1.654	21.71	19.59	41.30	46.00	-4.70	Average
41	2.736	24.27	19.62	43.89	56.00	-12.11	QP
42	2.736	20.72	19.62	40.34	46.00	-5.66	Average
43	4.070	22.26	19.67	41.93	56.00	-14.07	QP
44	4.070	17.40	19.67	37.07	46.00	-8.93	Average
45	6.024	28.76	19.71	48.47	60.00	-11.53	QP
46	6.024	23.91	19.71	43.62	50.00	-6.38	Average
47	7.025	27.44	19.73	47.17	60.00	-12.83	QP
48	7.025	22.72	19.73	42.45	50.00	-7.55	Average

Note:

Level = Read Level + Factor

Over Limit = Level - Limit Line

Factor = (LISN, ISN, PLC or current probe) Factor + Cable Loss + Attenuator

## 9 FCC §15.209, §15.205 , §15.249 & RSS-210 ANNEX B.10, RSS-GEN CLAUSE 8.10 - Radiated Emissions

### 9.1 Applicable Standard

As per FCC§15.249 (a), except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
920-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

As per FCC§15.249 (c), Field strength limits are specified at a distance of 3 meters.

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

According to RSS-210 Issue 10 Clause Annex B B.10 (a): The field strength of fundamental and harmonic emissions, measured at 3 m, shall not exceed 50 mV/m and 0.5 mV/m respectively.


According to RSS-210 Issue 10 Clause Annex B B.10 (b): Emissions radiated outside of the specified frequency bands, except for harmonic emissions, shall be attenuated by at least 50 dB below the level of the fundamental emissions or to the general field strength limits listed in RSS-GEN Issue 5, whichever is less stringent.

Field strength limits at various frequencies		
Fundamental frequency	Field strength (mV/m)	
	Fundamental emissions	Harmonic emissions
920-928 MHz	50	0.5
2400-2483.5 MHz	50	0.5
5725-5875 MHz	50	0.5
24.0-24.25 GHz	250	2.5


As per RSS-210 Issue 10 Clause Annex B B.10, Field strength limits are specified at a distance of 3 meters.

## 9.2 EUT Setup

Below 1 GHz:

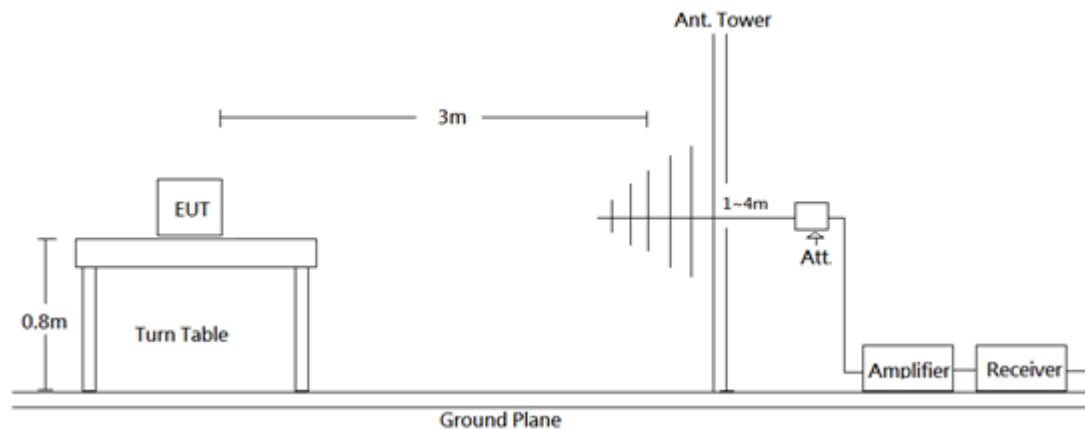

Above 1 GHz:

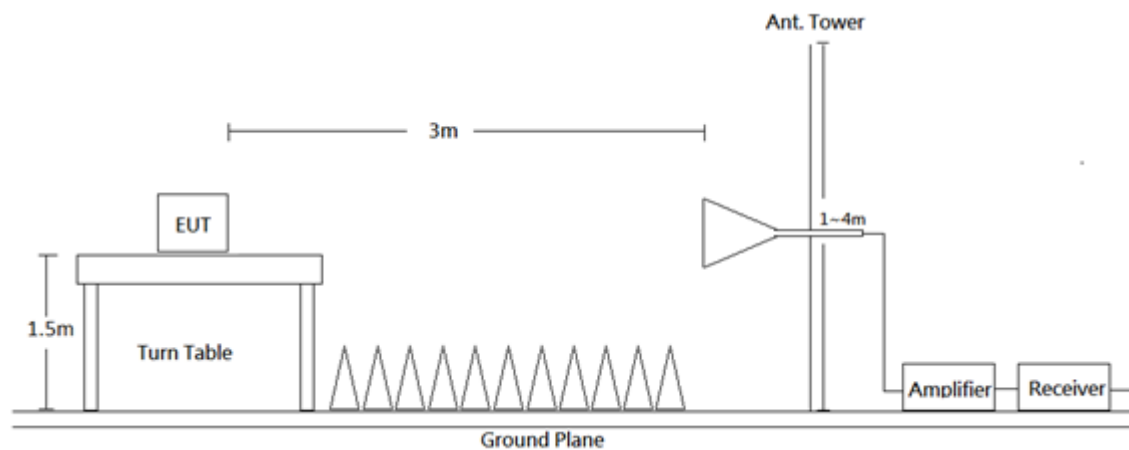

Radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.205, FCC 15.209, FCC 15.249 and RSS-GEN, RSS-210 limits.

## 9.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 10 GHz. During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	VBW	Measurement method
30-1000 MHz	120 kHz	300 kHz	QP
Above 1 GHz	1 MHz	3 MHz	PK
Above 1 GHz	1 MHz	10 Hz	AVG

## 9.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detector mode from 30 MHz to 1 GHz and PK and average detector modes for frequencies above 1 GHz.

## 9.5 Corrected Factor & Margin Calculation

The Correct Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Correct Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Level} - \text{Limit}$$

## 9.6 Test Results Summary

According to the data in the following table, the EUT complied with the FCC 15.205, FCC 15.209, FCC 15.249 and RSS-210, RSS-Gen.




## 9.7 Test Results

Test Mode: Transmitting

(Pre-scan with three orthogonal axis, and worse case as Y axis.)

30MHz-1GHz:

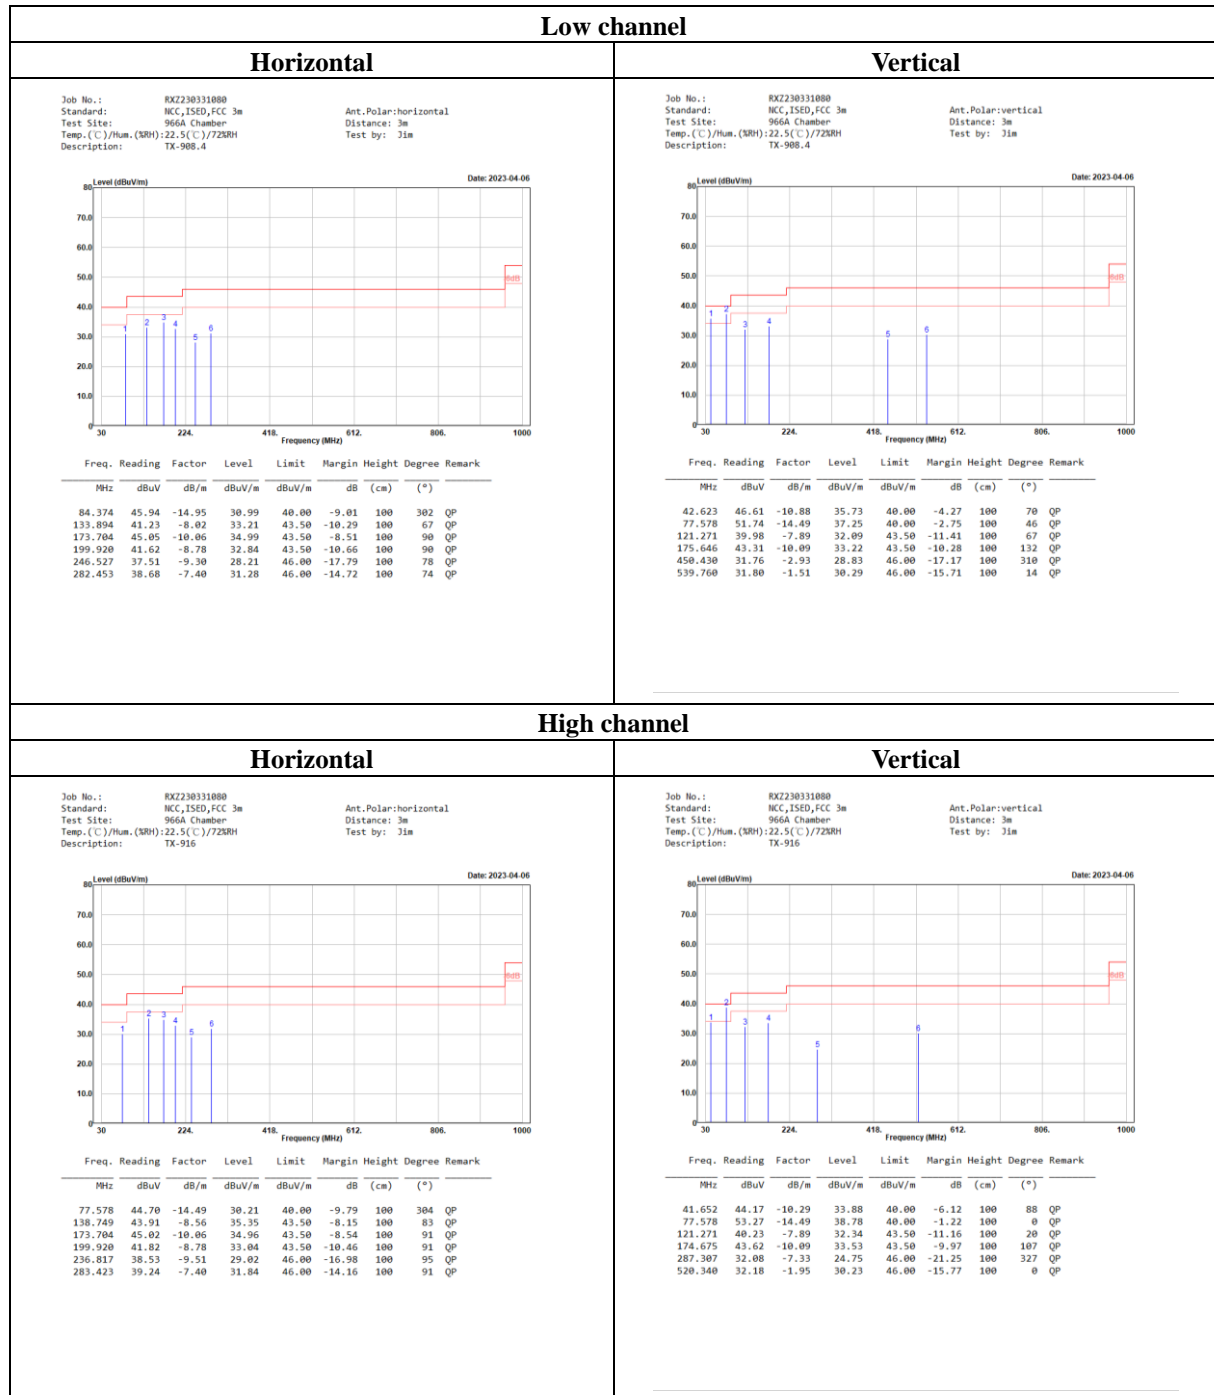


Level (Result) = Reading + Factor

Margin = Level – Limit.

Factor = Antenna Factor + Cable Loss – Amplifier Gain.

Spurious emissions more than 20 dB below the limit were not reported.

## Fundamental:

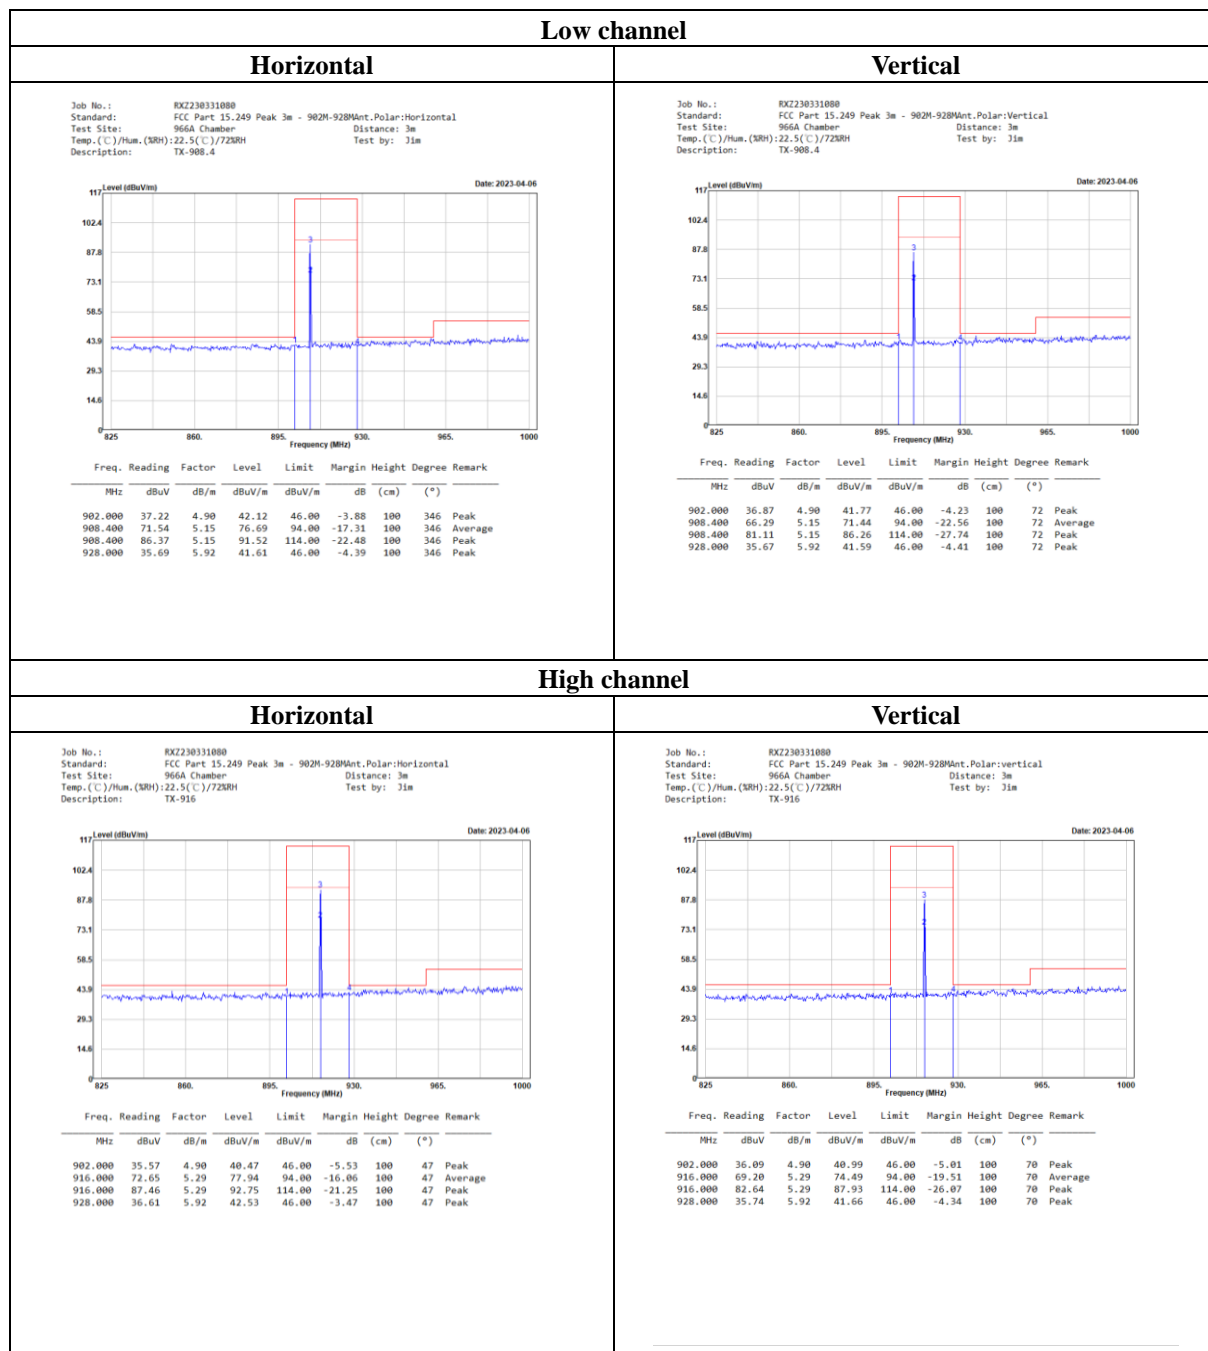


Level (Result) = Reading + Factor.

Margin = Level – Limit.

Factor = Antenna Factor + Cable Loss – Amplifier Gain.

Spurious emissions more than 20 dB below the limit were not reported.

1GHz-10GHz:

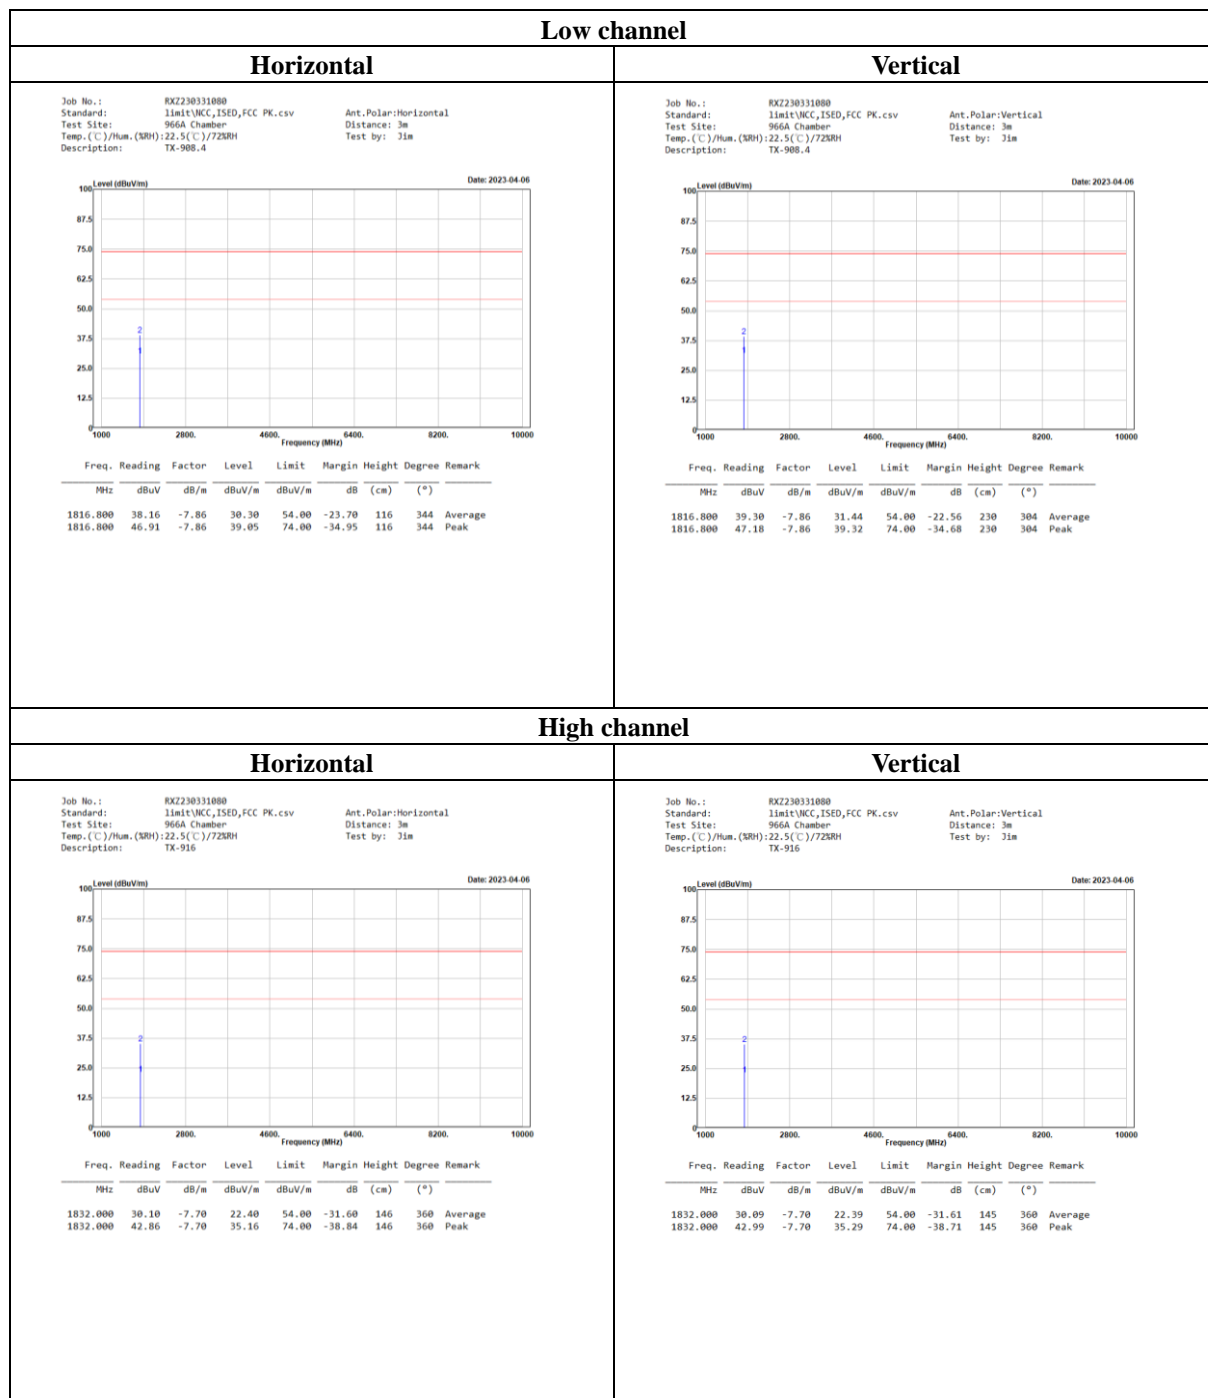

Level (Result) = Reading + Factor.

Margin = Level – Limit.

Factor = Antenna Factor + Cable Loss – Amplifier Gain.

Spurious emissions more than 20 dB below the limit were not reported.

## **10 FCC §15.215(c) & RSS-GEN CLAUSE 6.7 – 20 dB Bandwidth Testing and 99% OCCUPIED BANDWIDTH**

### **10.1 Applicable Standard**

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

According to RSS-Gen Clause 6.7:

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

In some cases, the “x dB bandwidth” is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated x dB below the maximum inband power level of the modulated signal, where the two points are on the outskirts of the in-band emission.

The following conditions shall be observed for measuring the occupied bandwidth and x dB bandwidth: The transmitter shall be operated at its maximum carrier power measured under normal test conditions.

The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span. The detector of the spectrum analyzer shall be set to “Sample” .

However, a peak, or peak hold,

may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / x dB bandwidth if the device is not transmitting continuously.

The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

## 10.2 Test Procedure

20dB bandwidth test:

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).


## 10.3 Test Results

Channel	Frequency (MHz)	20 dB Emission Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
Low	908.4	99.1	92.62
High	916.0	118.0	114.33

Please refer to the following plots


## 20 dB Emission Bandwidth

### Low Channel

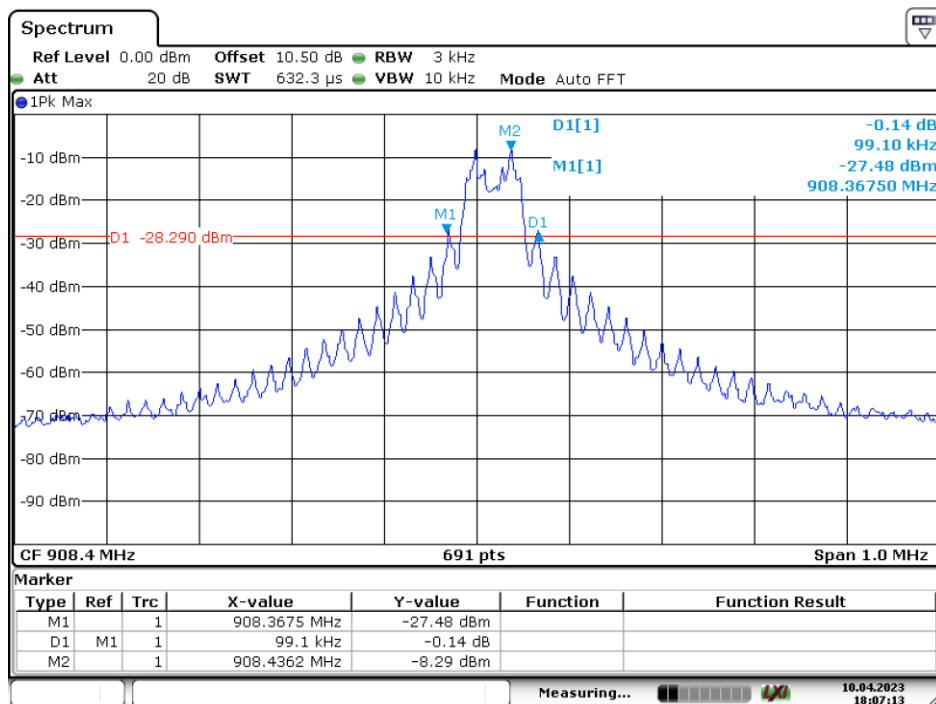

Date: 10.APR.2023 18:07:13


### High Channel

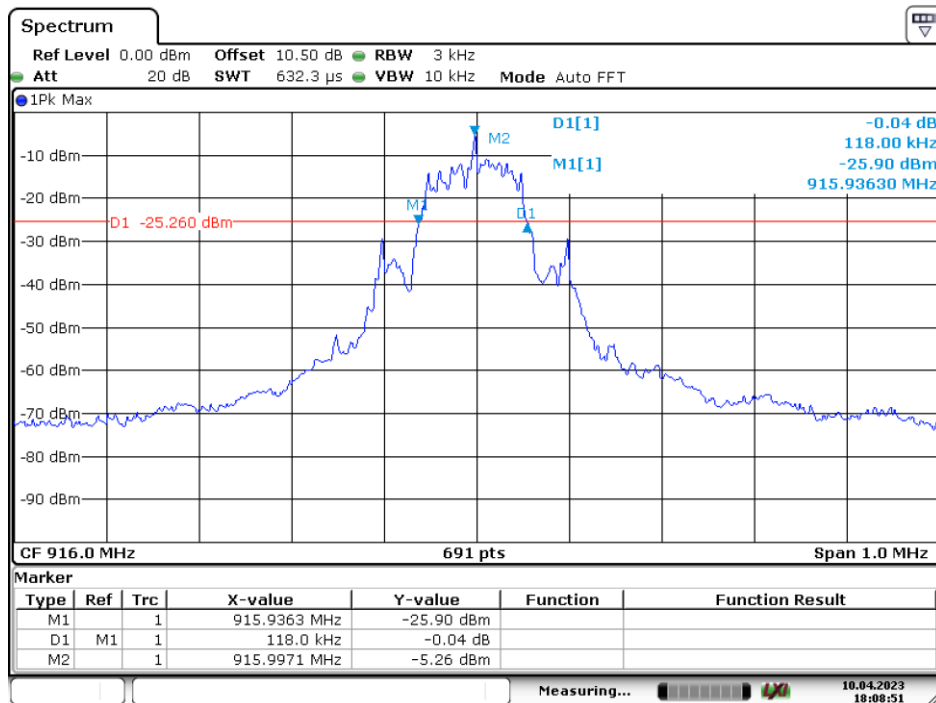

Date: 10.APR.2023 18:08:51


## 99% Occupied Bandwidth

### Low Channel

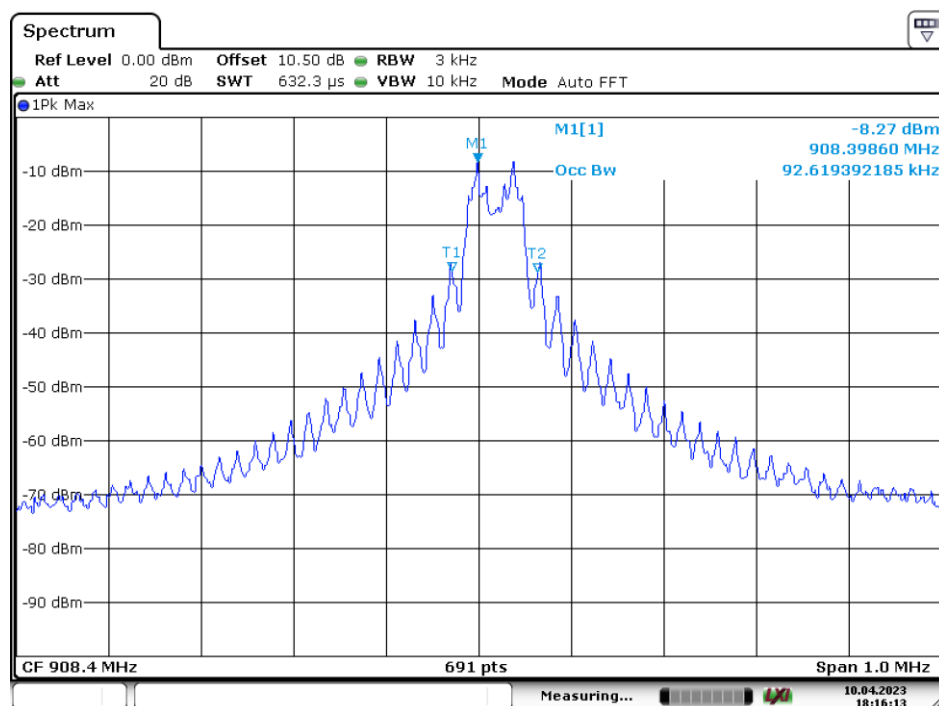

Date: 10.APR.2023 18:16:13

### High Channel

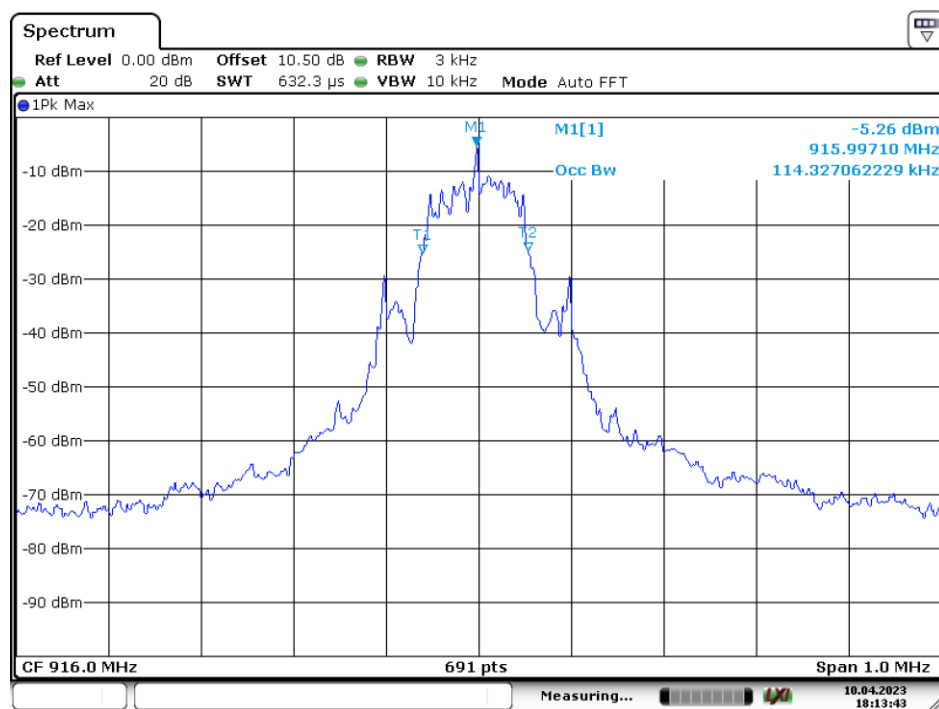

Date: 10.APR.2023 18:13:43

\*\*\*\*\* END OF REPORT \*\*\*\*\*