



REPORT No.: SZ18060085W02

TEST REPORT

APPLICANT : Hot Pepper, Inc.

PRODUCT NAME : 4G Smart Phone

MODEL NAME : VLE5

BRAND NAME : Hot Pepper

FCC ID : 2APD4-A80C

STANDARD(S) : 47 CFR Part 15 Subpart C

TEST DATE : 2018-06-14 to 2018-07-12

ISSUE DATE : 2018-07-18

Tested by:

Su Hang

Su Hang (Test Engineer)

Approved by:

Peng Huarui

Peng Huarui (Supervisor)

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Http://www.morlab.cn

Fax: 86-755-36698525

E-mail: service@morlab.cn





DIRECTORY

1. Technical Information	4
1.1. Applicant and Manufacturer Information	4
1.2. Equipment Under Test (EUT) Description	4
1.3. Test Standards and Results	5
1.4. Environmental Conditions	5
2. 47 CFR Part 15C Requirements	6
2.1. Antenna requirement	6
2.2. Number of Hopping Frequency	6
2.3. Peak Output Power	10
2.4. 20dB Bandwidth	17
2.5. Carried Frequency Separation	24
2.6. Time of Occupancy (Dwell time)	27
2.7. Conducted Spurious Emissions	34
2.8. Conducted Emission	47
2.9. Restricted Frequency Bands	51
2.10. Radiated Emission	60
Annex A Test Uncertainty	73
Annex B Testing Laboratory Information	74



REPORT No.: SZ18060085W02

Change History		
Issue	Date	Reason for change
1.0	2018-07-18	First edition



1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	Hot Pepper, Inc.
Applicant Address:	5151 California Ave., Suite 100, Irvine 92617, USA
Manufacturer:	Hot Pepper, Inc.
Manufacturer Address:	5151 California Ave., Suite 100, Irvine 92617, USA

1.2. Equipment Under Test (EUT) Description

Product Name:	4G Smart Phone
Serial No:	(N/A, marked #1 by test site)
Hardware Version:	HXF-M 94V-0
Software Version:	HPP-VLE5180706
Modulation Type:	FHSS (GFSK(1Mbps), $\pi/4$ -DQPSK(EDR 2Mbps), 8-DPSK(EDR 3Mbps))
Operating Frequency Range:	The frequency range used is 2402MHz – 2480MHz (79 channels, at intervals of 1MHz); The frequency block is 2400MHz to 2483.5MHz.
Bluetooth Version:	Bluetooth classic
Antenna Type:	PIFA Antenna
Antenna Gain:	0.2dBi

Note 1: The EUT contains Bluetooth Module operating at 2.4GHz ISM band; the frequencies is $F(\text{MHz})=2402+1*n$ ($0 \leq n \leq 78$). The lowest, middle, highest channel numbers of the Bluetooth Module used and tested in this report are separately 0 (2402MHz), 39 (2441MHz) and 78 (2480MHz).

Note 2: The EUT connected to the serial port of the computer with a serial communication cable, we use the dedicated software to control the EUT into the test mode, and then use MT8852B base station to control the EUT continuous transmission.

Note 3: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



1.3. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No	Identity	Document Title
1	47 CFR Part 15 (10-1-15 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section in CFR 47	Description	Test Date	Test Engineer	Result
1	15.203	Antenna Requirement	N/A	N/A	PASS
2	15.247(a)	Number of Hopping Frequency	Jun 14, 2018	Su Hang	PASS
3	15.247(b)	Peak Output Power	Jun 14, 2018	Su Hang	PASS
4	15.247(a)	20dB Bandwidth	Jun 14, 2018	Su Hang	PASS
5	15.247(a)	Carrier Frequency Separation	Jun 14, 2018	Su Hang	PASS
6	15.247(a)	Time of Occupancy (Dwell time)	Jun 14, 2018	Su Hang	PASS
7	15.247(d)	Conducted Spurious Emission	Jun 14, 2018	Su Hang	PASS
8	15.207	Conducted Emission	Jun 25, 2018	Wang Dalong	PASS
9	15.247(d)	Restricted Frequency Bands	Jul 12, 2018	Wang Dalong	PASS
10	15.209, 15.247(d)	Radiated Emission	Jul 12, 2018	Wang Dalong	PASS

Note 1: The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013.

1.4. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106

2. 47 CFR Part 15C Requirements

2.1. Antenna requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.


2.2. Number of Hopping Frequency

2.2.1. Requirement

According to FCC §15.247(a)(1)(iii), frequency hopping systems operating in the 2400MHz to 2483.5MHz bands shall use at least 15 hopping frequencies.

2.2.2. Test Description

A. Test Setup:

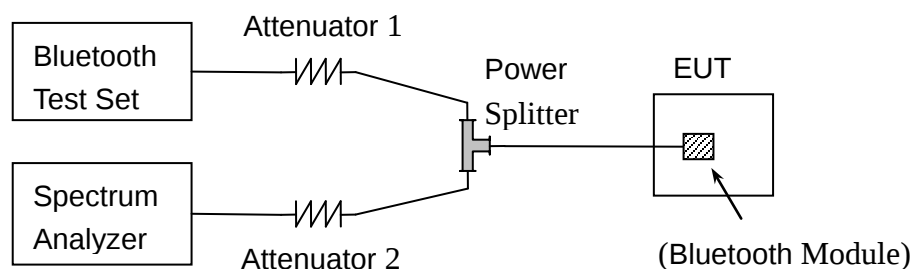

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

**B. Equipments List:**

Please reference ANNEX A(1.5).

2.2.3. Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW $\geq$ 1% of the span

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize


2.2.4. Test Result

The Bluetooth Module operates at hopping-on test mode; the frequencies number employed is counted to verify the Module's using the number of hopping frequency.

A. Test Verdict:

Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
GFSK	2400 - 2483.5	79	15	PASS
$\pi/4$ -DQPSK	2400 - 2483.5	79	15	PASS
8-DPSK	2400 - 2483.5	79	15	PASS


B. Test Plots:

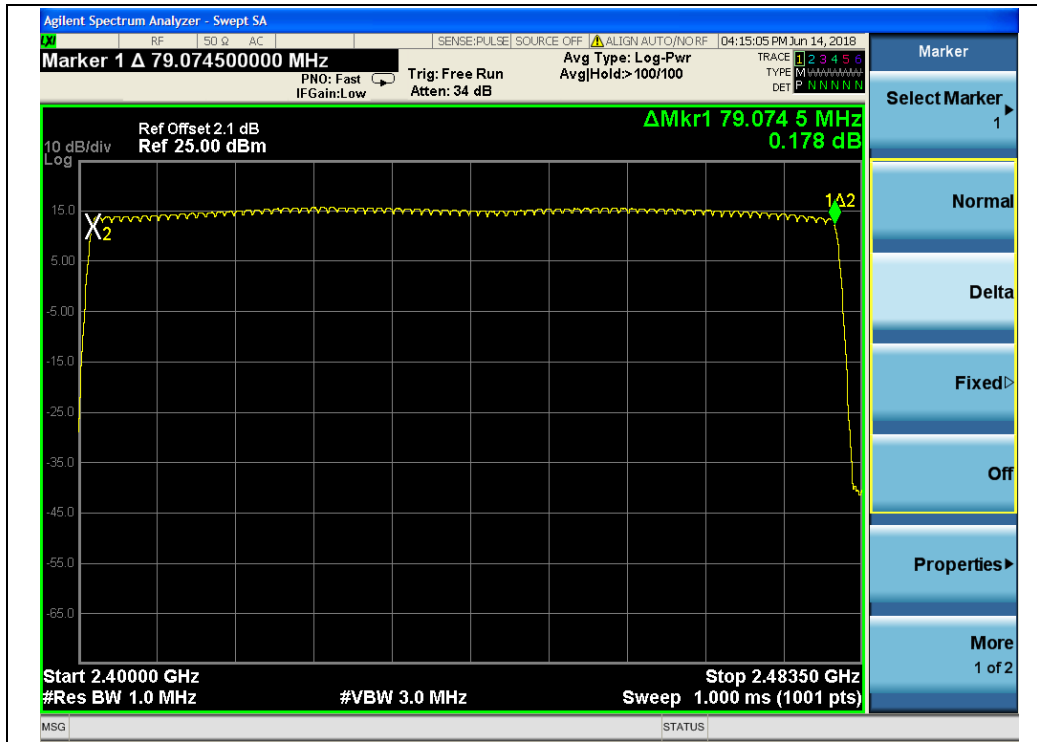

(GFSK)



($\pi/4$ -DQPSK)

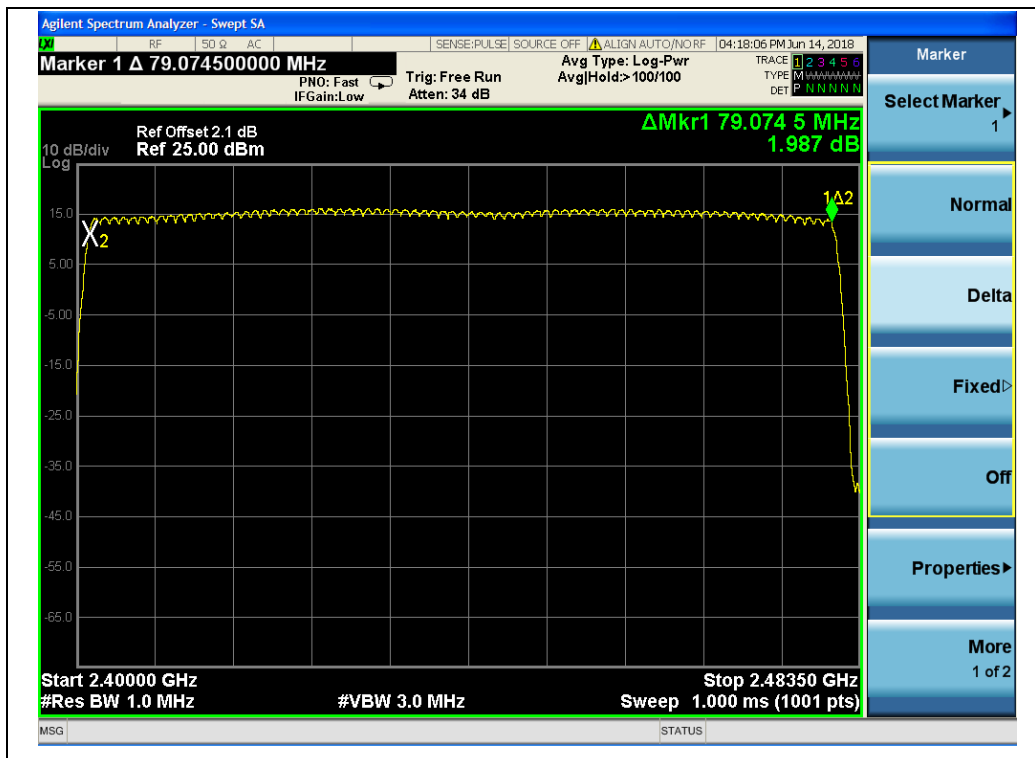

(8- DPSK)


2.3. Peak Output Power

2.3.1. Requirement

According to FCC §15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

2.3.2. Test Description

A. Test Setup:

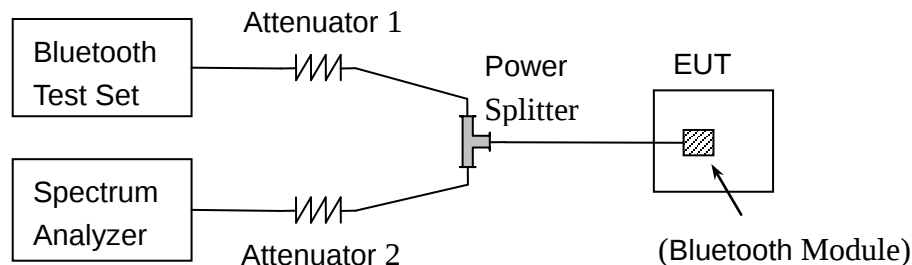

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please refer ANNEX A(1.5).

2.3.3. Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the module. The lowest, middle and highest channel were tested by USB Wideband Power Sensor.




2.3.3.1 GFSK Mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	13.94	0.02477	20.97	0.125	PASS
39	2441	15.29	0.03381			PASS
78	2480	13.53	0.02254			PASS

Channel	Frequency (MHz)	Measured Output Average Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	10.45	0.01109	20.97	0.125	PASS
39	2441	11.49	0.01409			PASS
78	2480	9.59	0.00910			PASS


B. Test Plots:

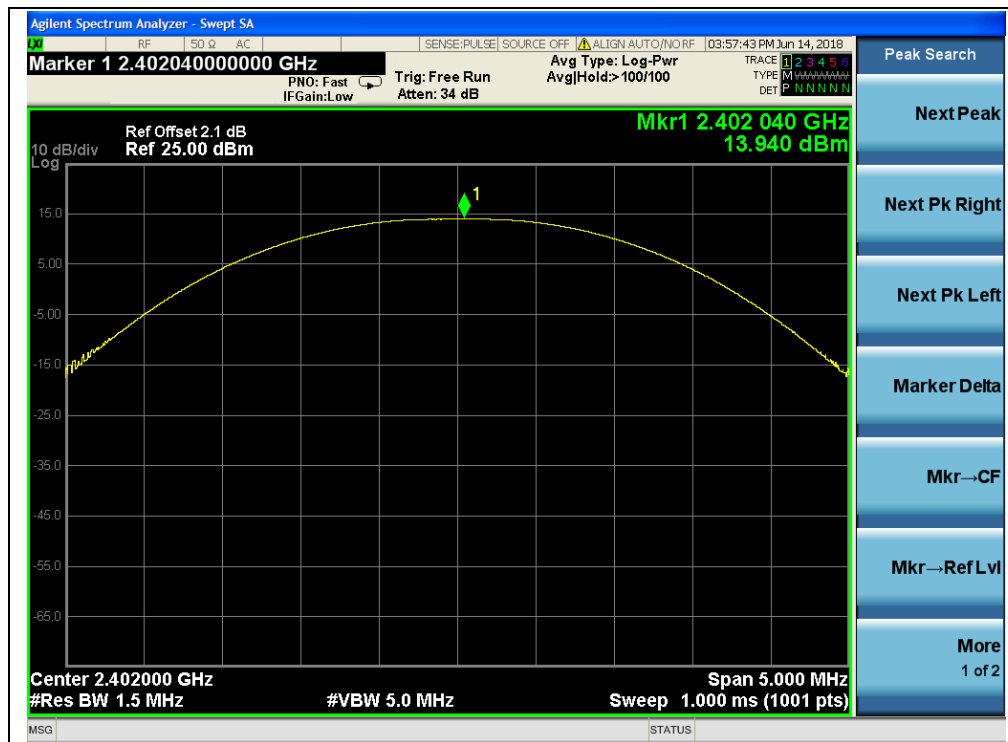

(GFSK, Channel 0, 2402MHz)

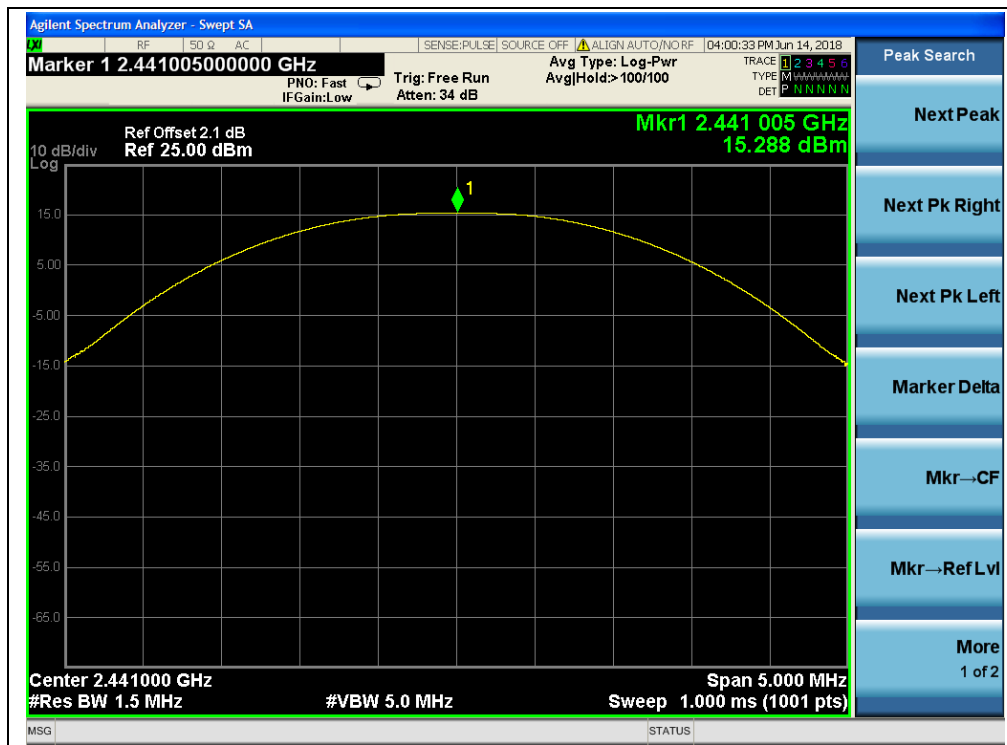

(GFSK, Channel 39, 2441MHz)

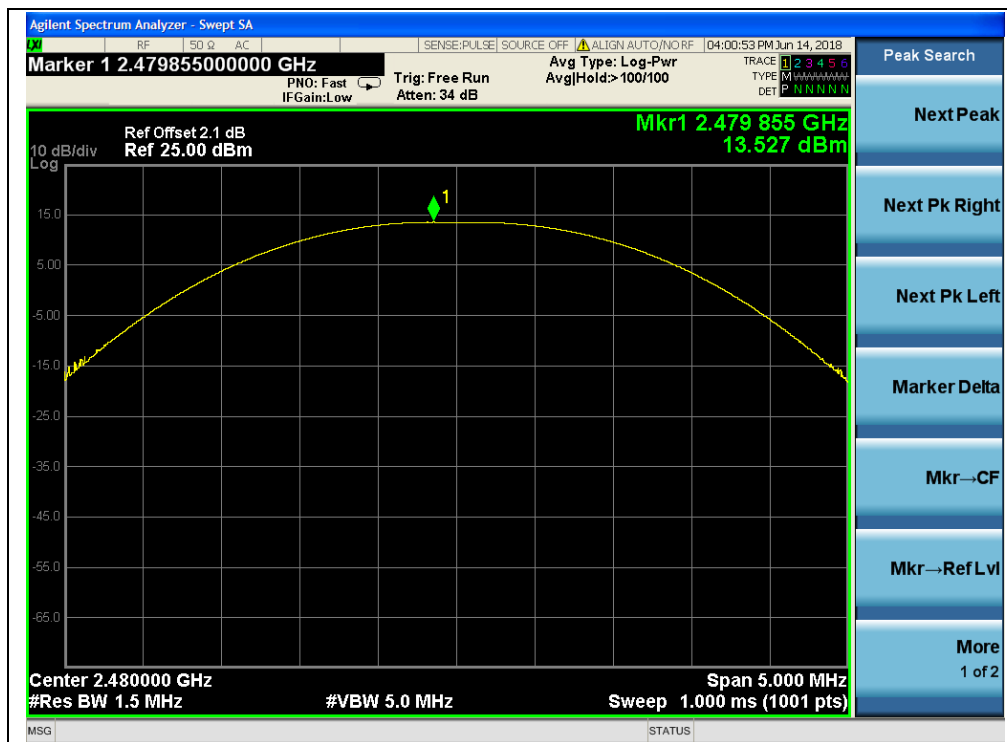

(GFSK, Channel 78, 2480MHz)




2.3.3.2 $\pi/4$ -DQPSK Mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	14.66	0.02924	20.97	0.125	PASS
39	2441	15.88	0.03873			PASS
78	2480	14.26	0.02667			PASS

Channel	Frequency (MHz)	Measured Output Average Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	10.64	0.01159	20.97	0.125	PASS
39	2441	11.61	0.01449			PASS
78	2480	9.75	0.00944			PASS


B. Test Plots:

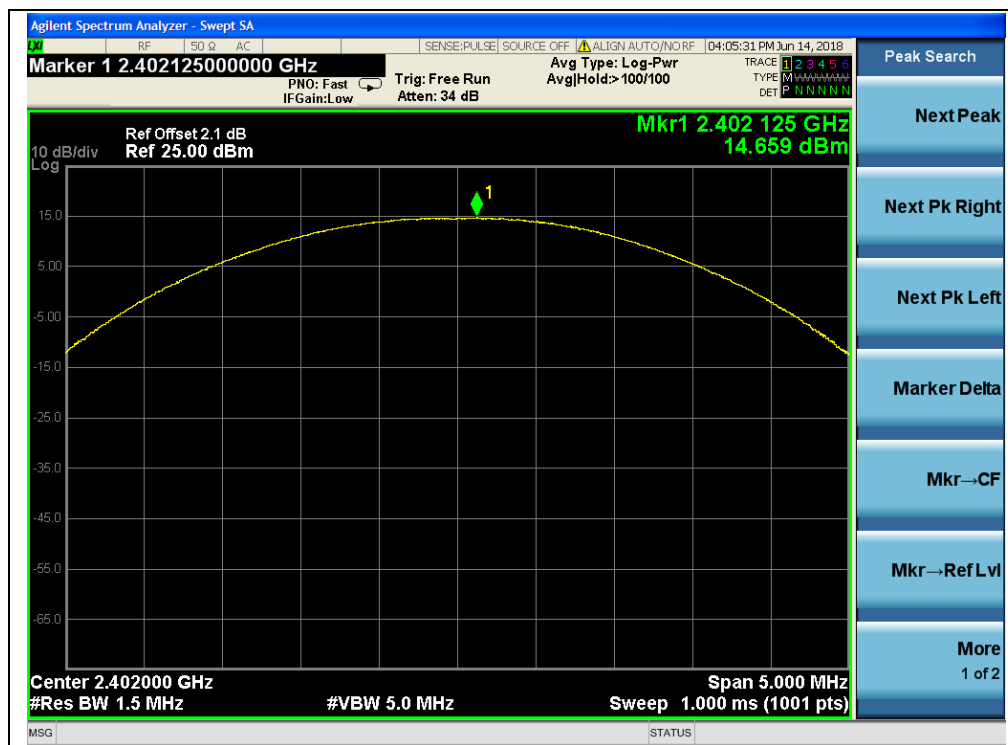

($\pi/4$ -DQPSK, Channel 0, 2402MHz)

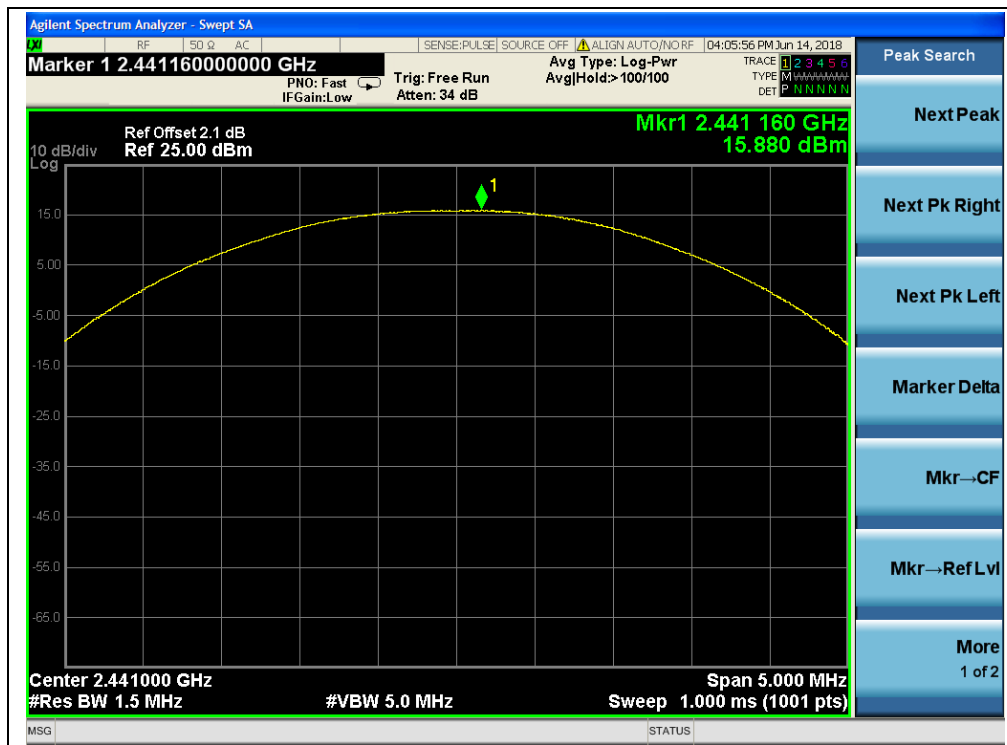

(π/4-DQPSK, Channel 39, 2441MHz)

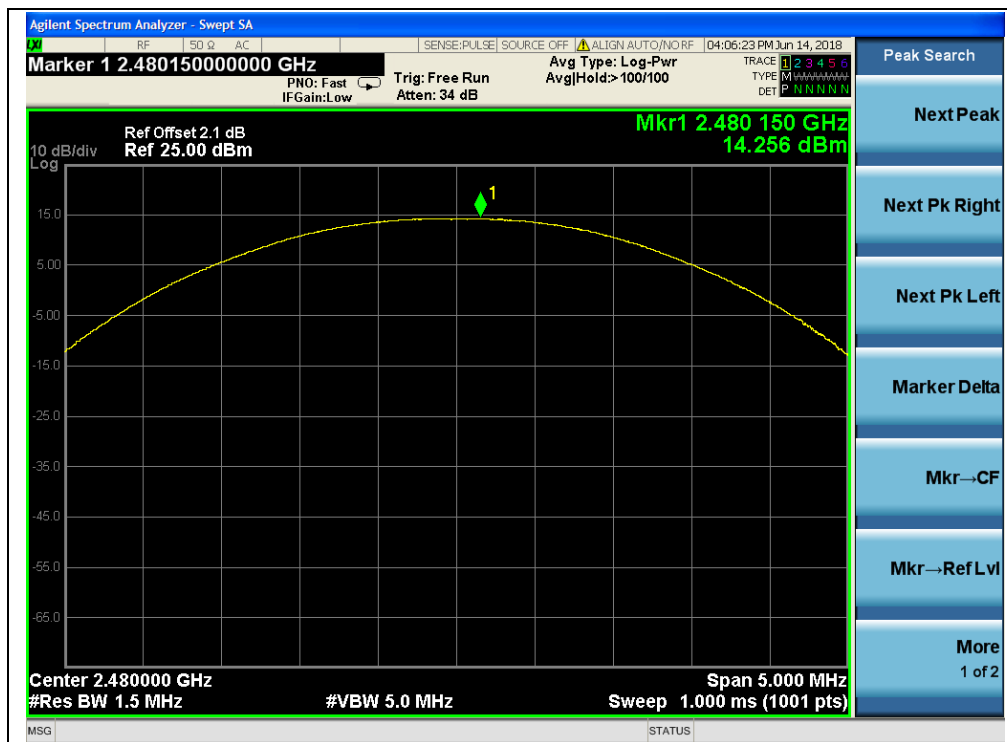

(π/4-DQPSK, Channel 78, 2480MHz)




2.3.3.3 8-DPSK Mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	14.77	0.02999	20.97	0.125	PASS
39	2441	15.97	0.03954			PASS
78	2480	14.46	0.02793			PASS

Channel	Frequency (MHz)	Measured Output Average Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	10.75	0.01189	20.97	0.125	PASS
39	2441	11.71	0.01483			PASS
78	2480	9.92	0.00982			PASS


B. Test Plots:

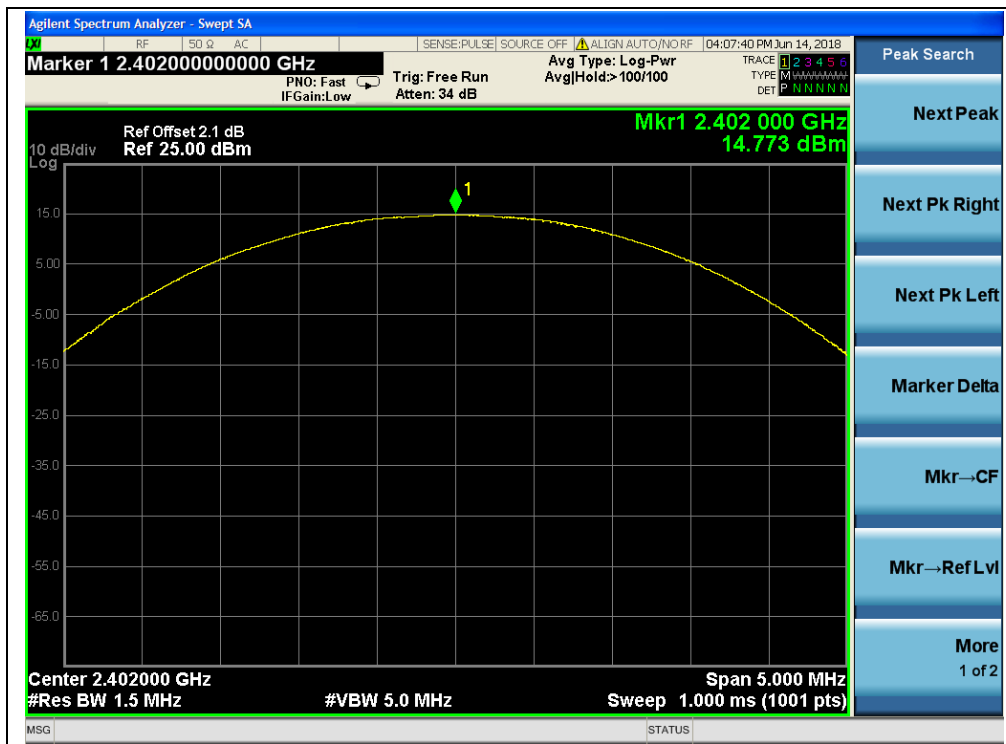

(8-DPSK, Channel 0, 2402MHz)

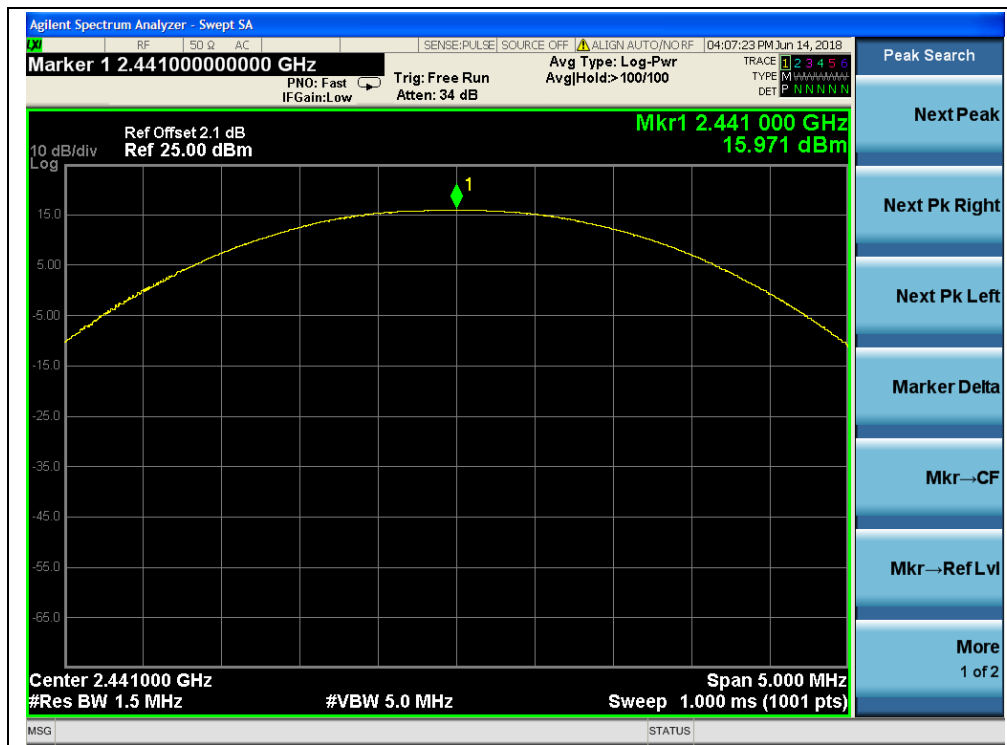

(8-DPSK, Channel 39, 2441MHz)

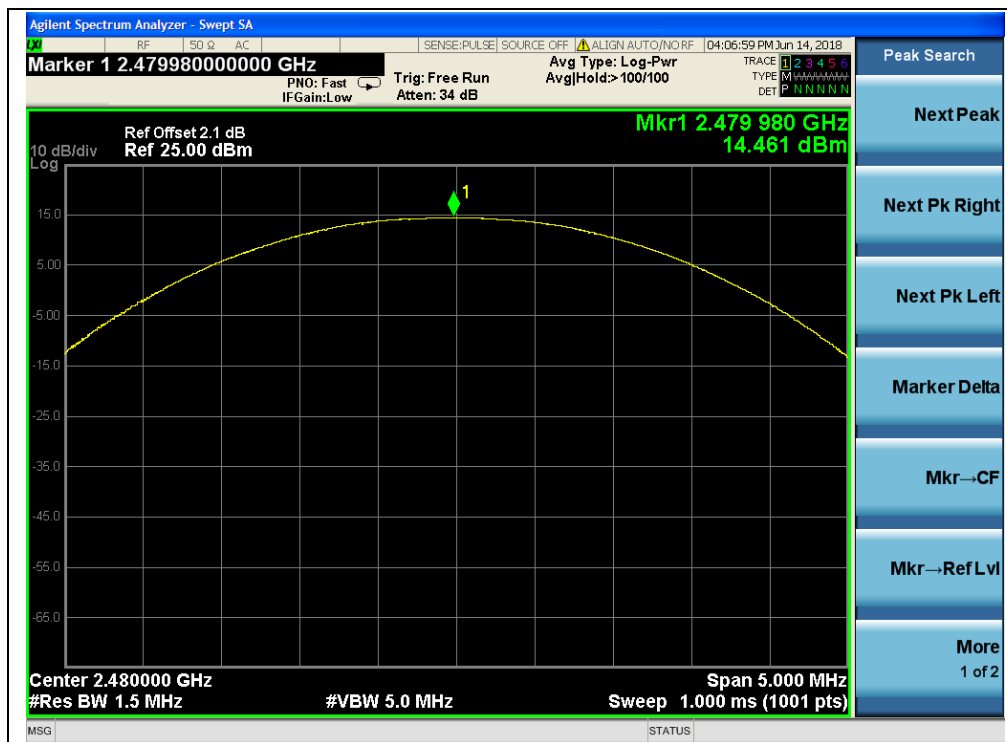

(8-DPSK, Channel 78, 2480MHz)


2.4. 20dB Bandwidth

2.4.1. Definition

According to FCC §15.247(a)(1), the 20dB bandwidth is known as the 99% emission bandwidth, or 20dB bandwidth ($10 \cdot \log 1\% = 20\text{dB}$) taking the total RF output power.

2.4.2. Test Description

A. Test Setup:

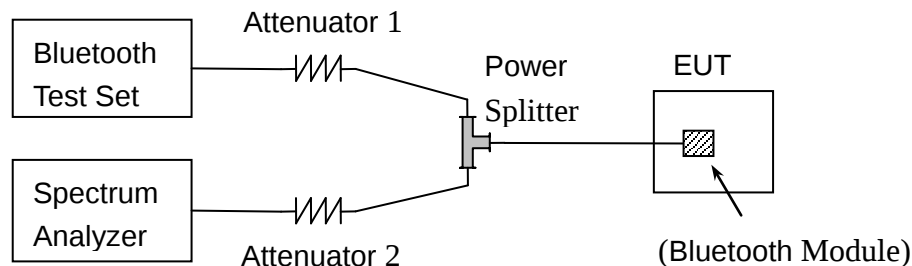

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please refer ANNEX A(1.5).

2.4.3. Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW $\geq$ 1% of the 20 dB bandwidth

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold



2.4.4. Test Result


The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to record the 20dB bandwidth of the Module.

2.4.4.1 GFSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
0	2402	0.9544	PASS
39	2441	1.031	PASS
78	2480	0.9639	PASS


B. Test Plots:

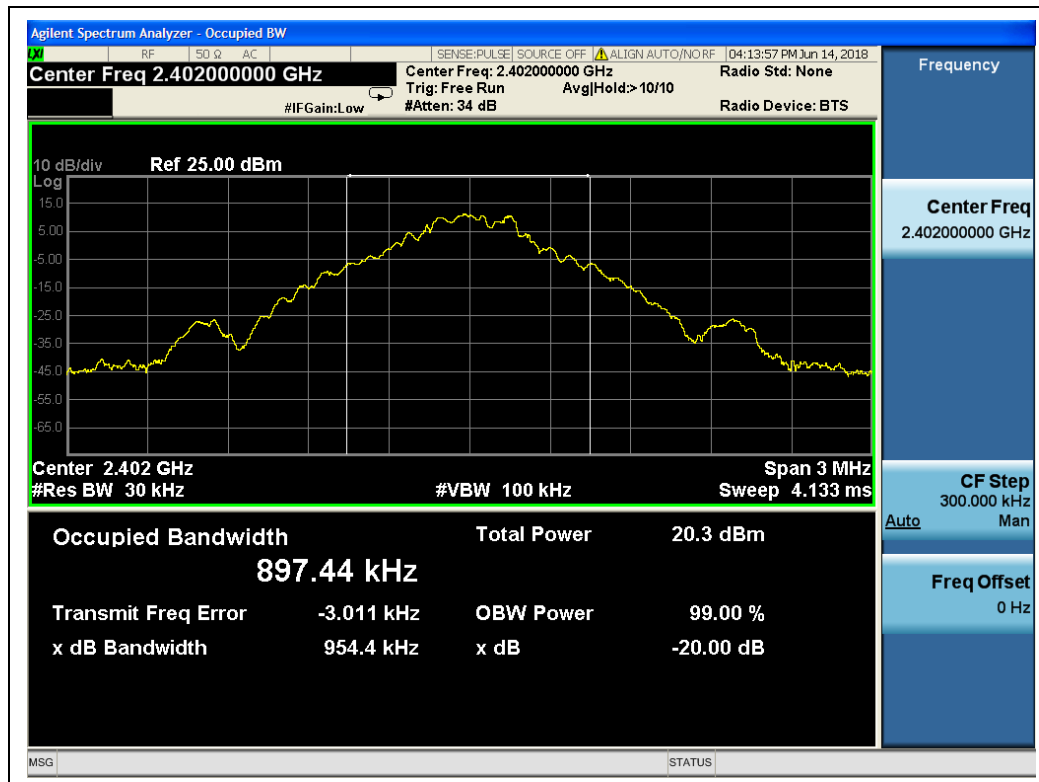

(GFSK, Channel 0, 2402MHz)

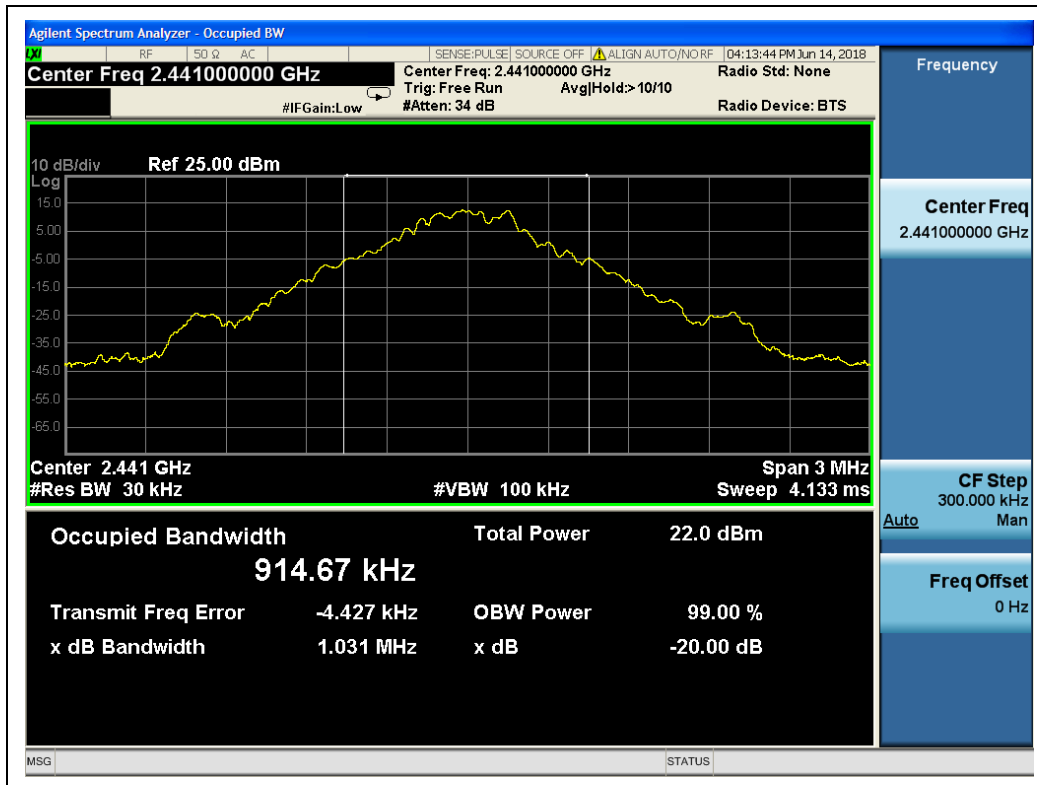

(GFSK, Channel 39, 2441MHz)

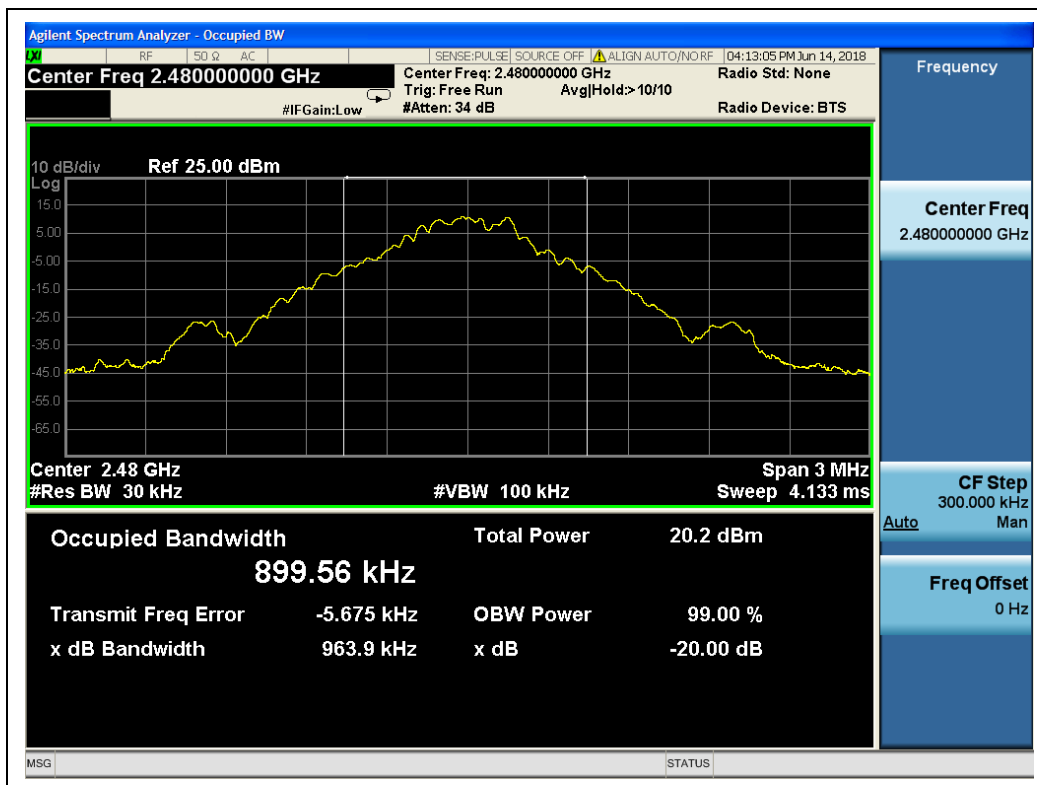

(GFSK, Channel 78, 2480MHz)




2.4.4.2 $\pi/4$ -DQPSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
0	2402	1.281	PASS
39	2441	1.303	PASS
78	2480	1.281	PASS


B. Test Plots:

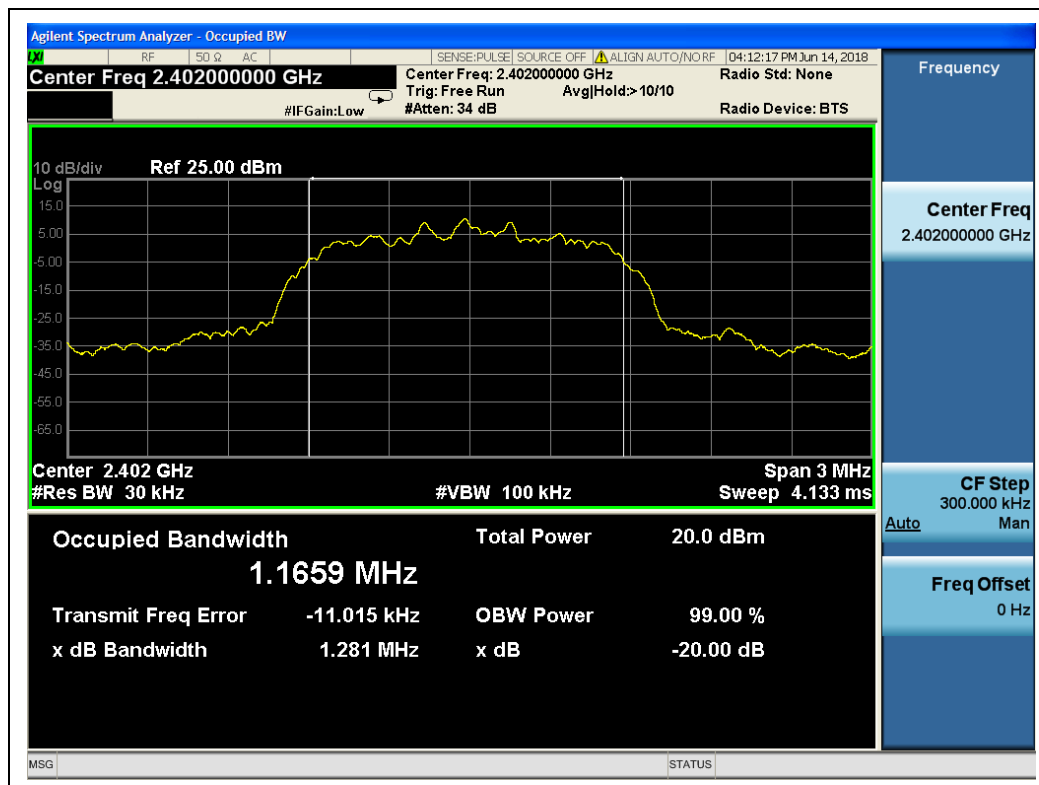

($\pi/4$ -DQPSK, Channel 0, 2402MHz)

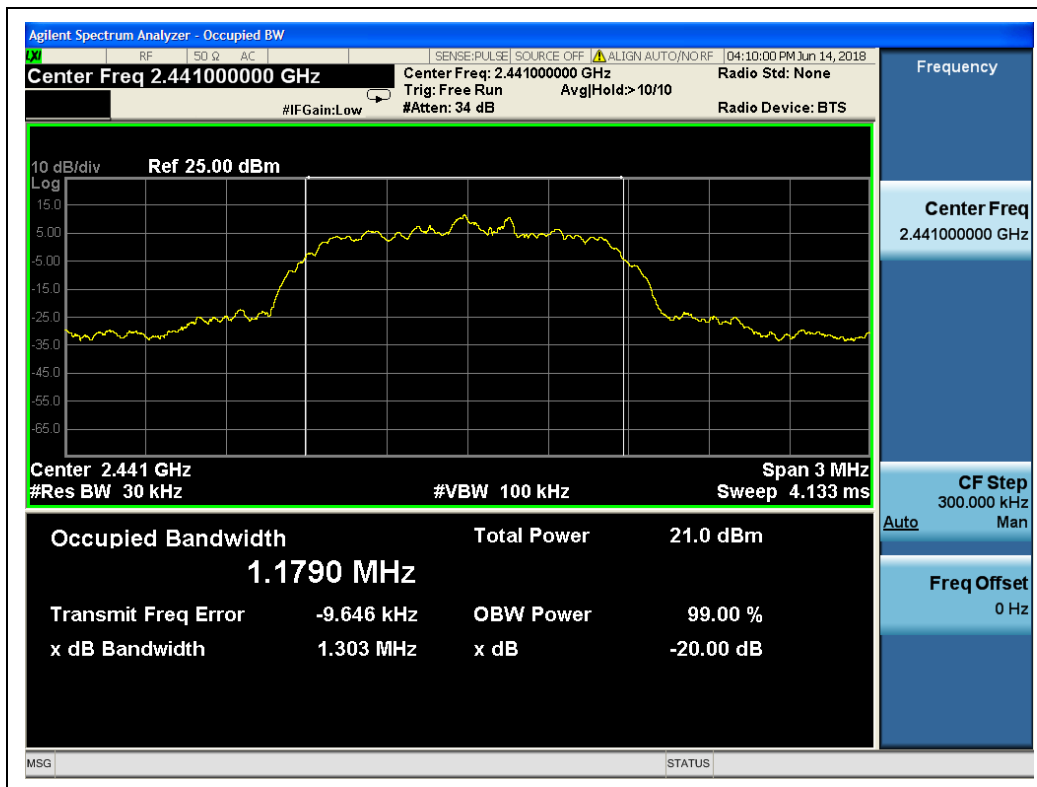

(π/4-DQPSK, Channel 39, 2441MHz)

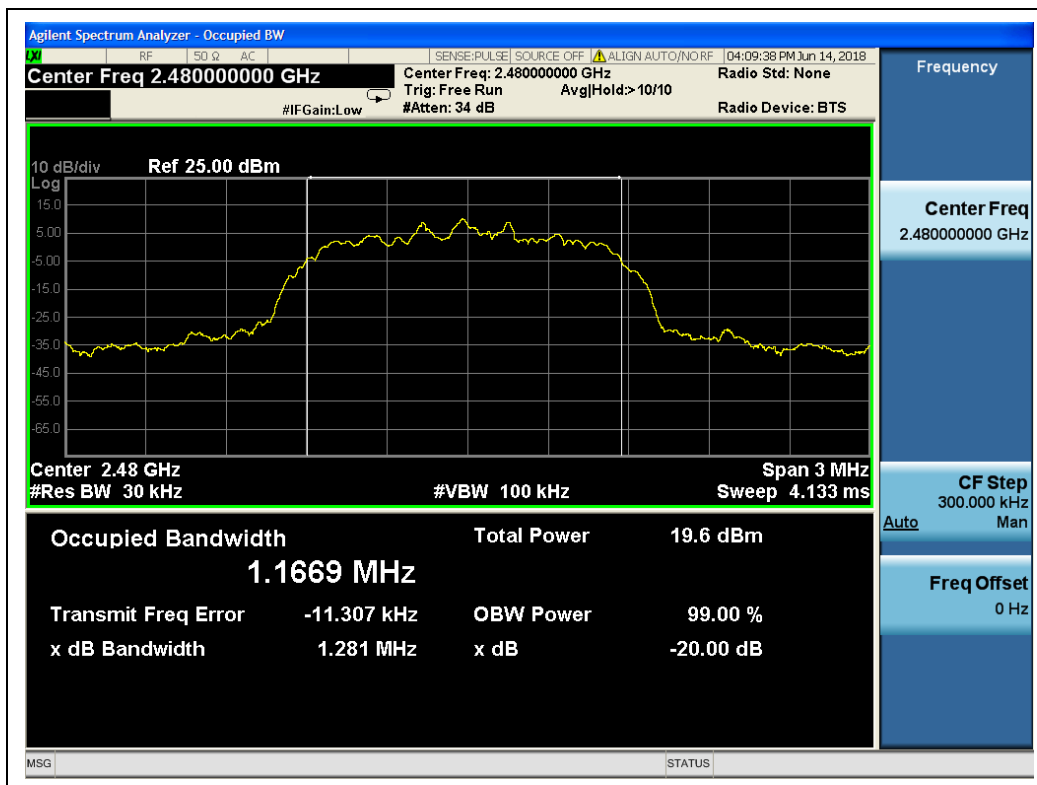

(π/4-DQPSK, Channel 78, 2480MHz)



2.4.4.3 8-DPSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
0	2402	1.294	PASS
39	2441	1.297	PASS
78	2480	1.291	PASS


B. Test Plots:



(8-DPSK, Channel 0, 2402MHz)

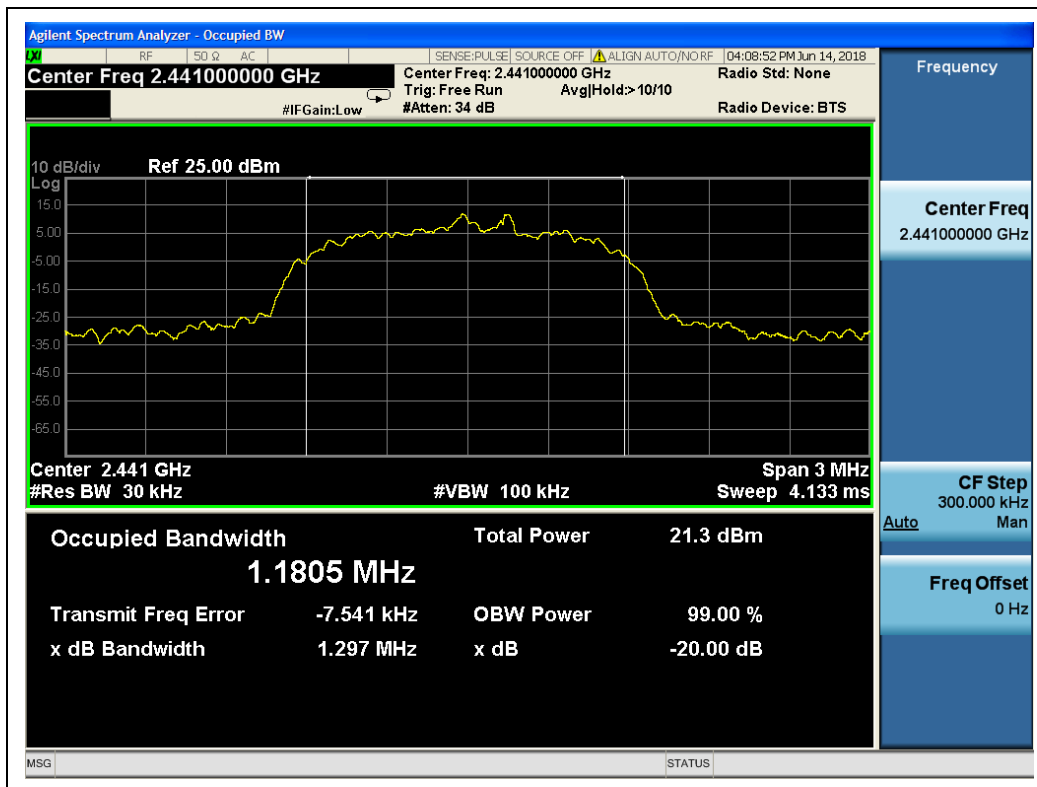

(8-DPSK, Channel 39, 2441MHz)

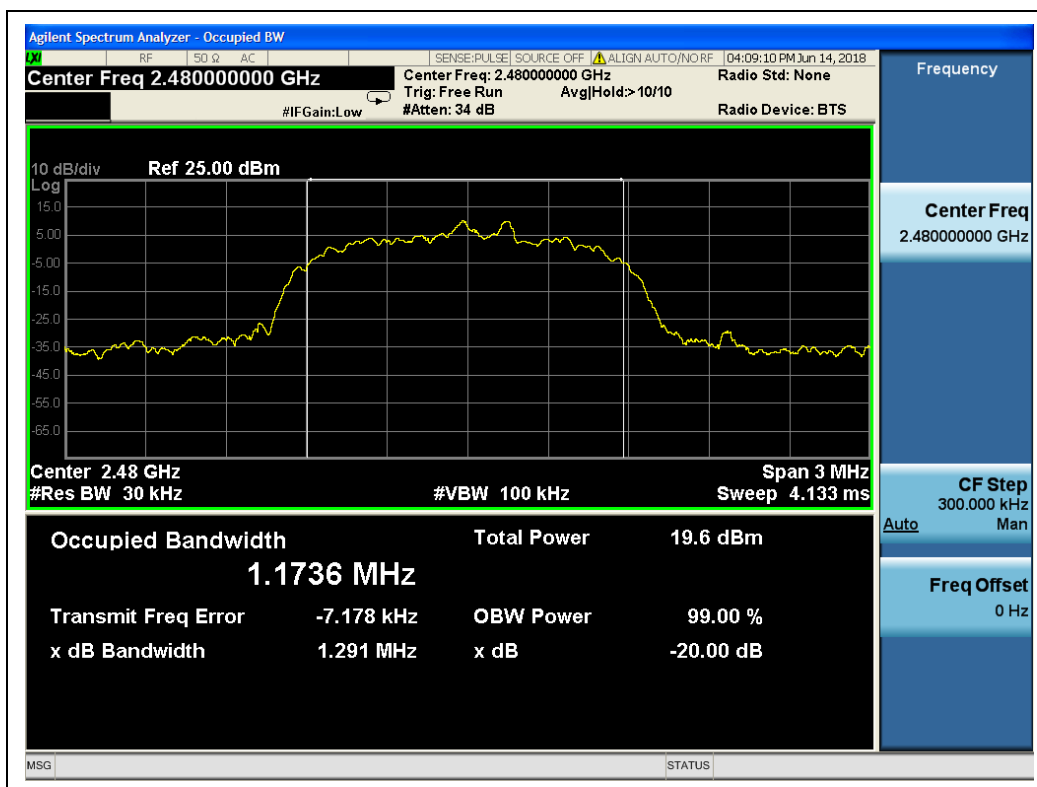

(8-DPSK, Channel 78, 2480MHz)


2.5. Carried Frequency Separation

2.5.1. Definition

According to FCC §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

2.5.2. Test Description

A. Test Setup:

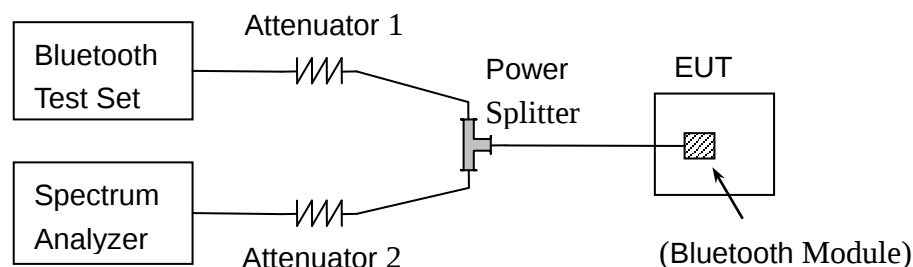

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please refer ANNEX A(1.5).

2.5.3. Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span

Video (or Average) Bandwidth (VBW) $\geq$ RBW

Sweep = auto

Detector function = peak


Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.


2.5.4. Test Result

The Bluetooth Module operates at hopping-on test mode. For any adjacent channels (e.g. the channel 39 and 40 as showed below), the Module does have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel (refer to section 2.4.4), whichever is greater. So, the verdict is PASSING.


Test Mode	Measured Channel Numbers	Carried Frequency Separation	20dB bandwidth (MHz)	Min. Limit	Verdict
GFSK	39 and 40	1.002	0.9544	two-thirds of the 20dB bandwidth	PASS
$\pi/4$ -DQPSK	39 and 40	1.002	1.281		PASS
8-DPSK	39 and 40	1.002	1.291		PASS

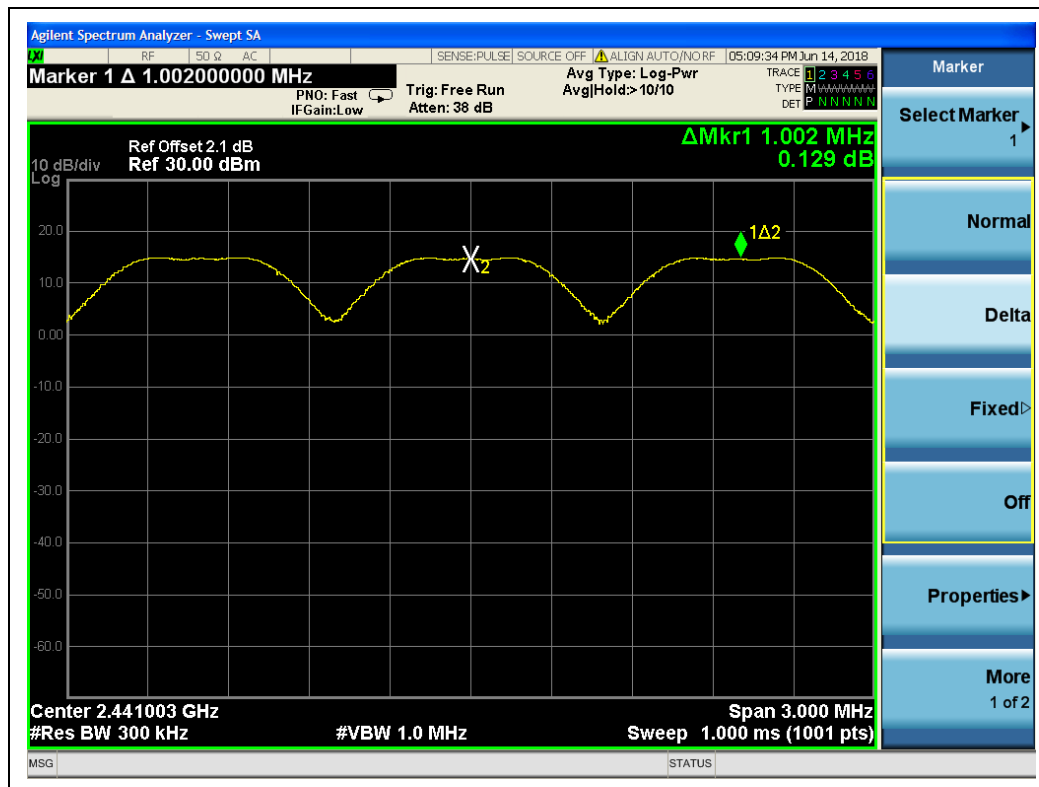

(GFSK)

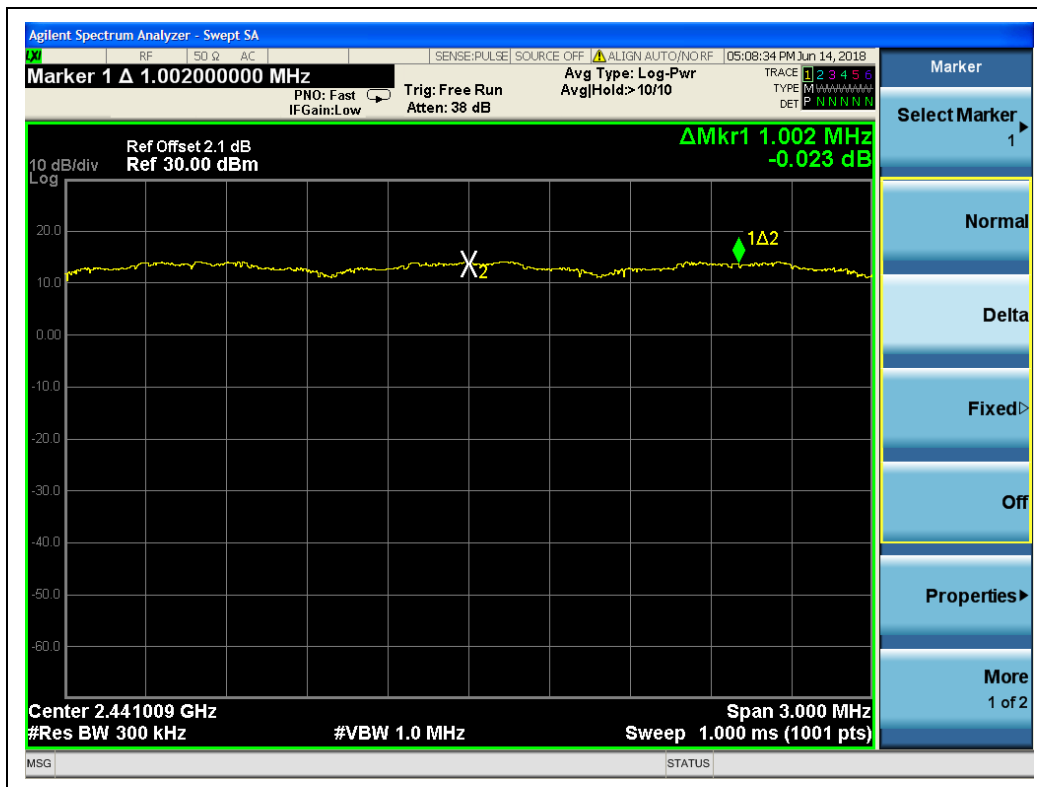

($\pi/4$ -DQPSK)

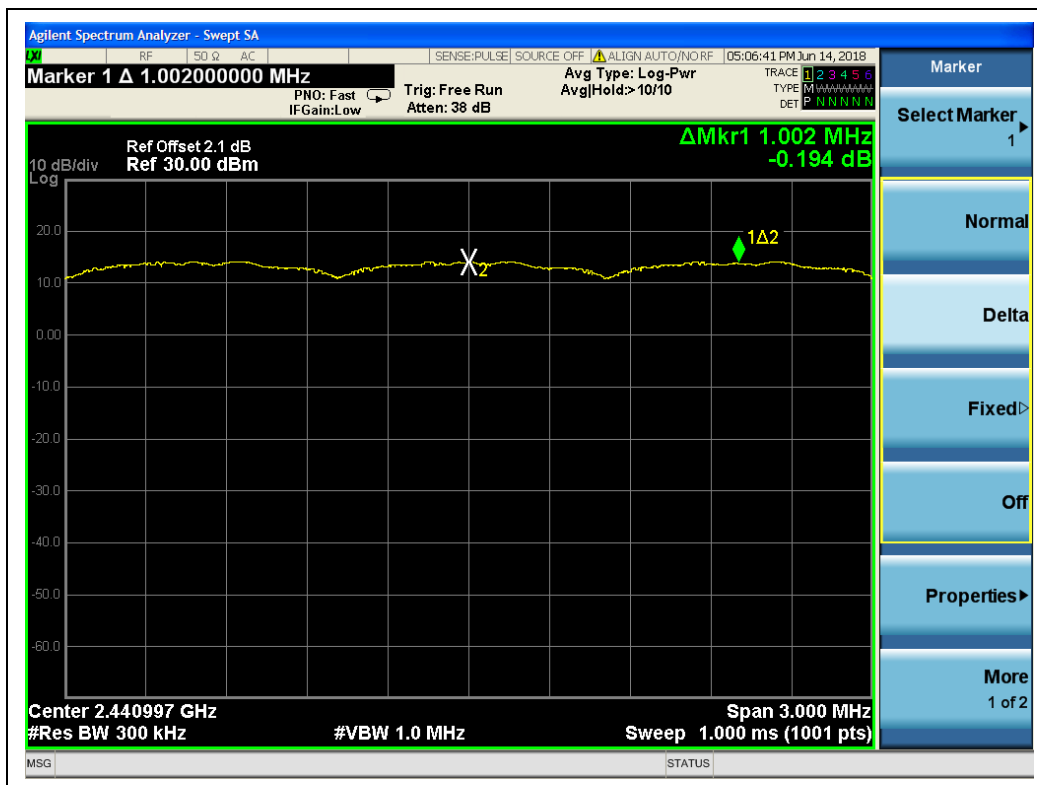

(8-DPSK)


2.6. Time of Occupancy (Dwell time)

2.6.1. Requirement

According to FCC §15.247(a) (1) (iii), frequency hopping systems in the 2400 - 2483.5MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

2.6.2. Test Description

A. Test Setup:

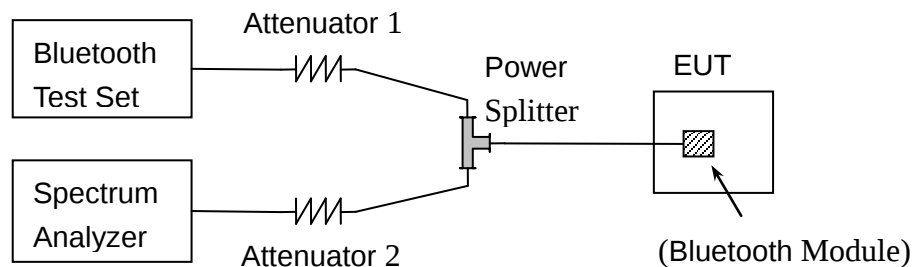

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please refer ANNEX A(1.5).

2.6.3. Test Procedure

Option 1:

DH1: Dwell time equal to Pulse time (ms) * (1600 / 2 / 79) * 31.6 Millisecond
DH3: Dwell time equal to Pulse time (ms) * (1600 / 4 / 79) * 31.6 Millisecond
DH5: Dwell time equal to Pulse Time (ms) * (1600 / 6 / 79) * 31.6 Millisecond




2.6.4. Test Result

2.6.4.1 GFSK Mode


A. Test Verdict:

DH Packet	Pulse Width (ms)	Dwell Time (ms)	Limit (sec)	Verdict
DH1	0.39	124.80	0.4	PASS
DH3	1.64	262.40		PASS
DH5	2.89	308.27		PASS


B. Test Plots:

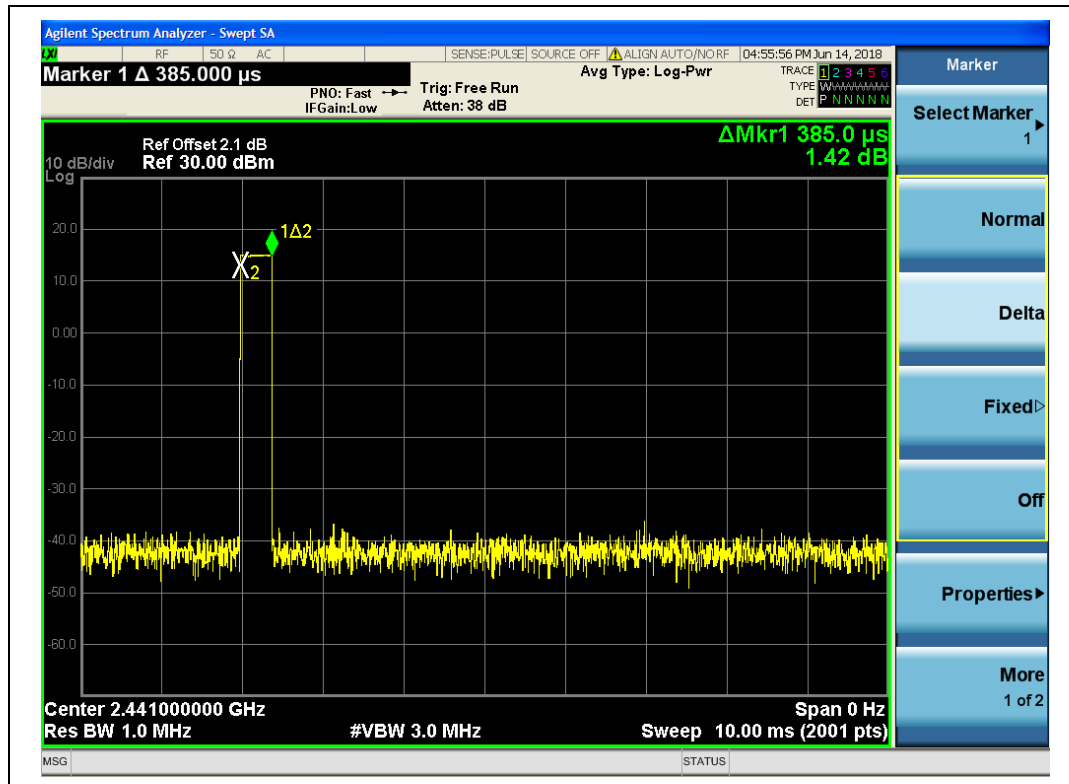

(DH1, GFSK)

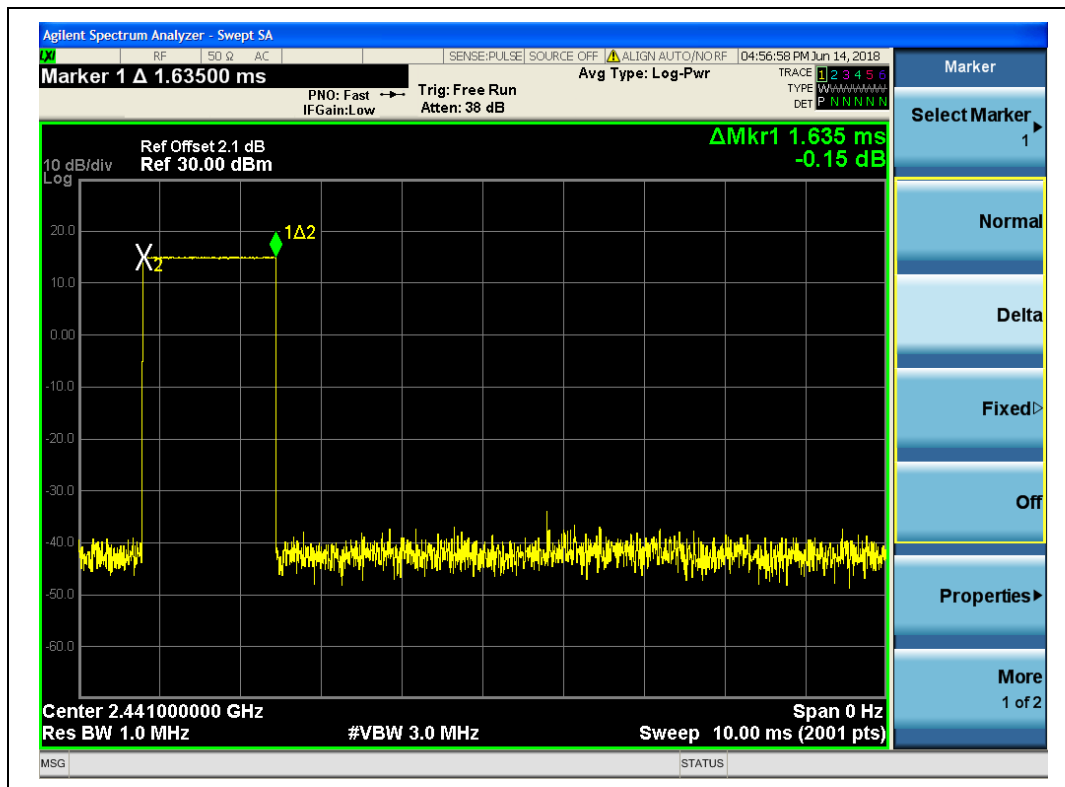

(DH3, GFSK)

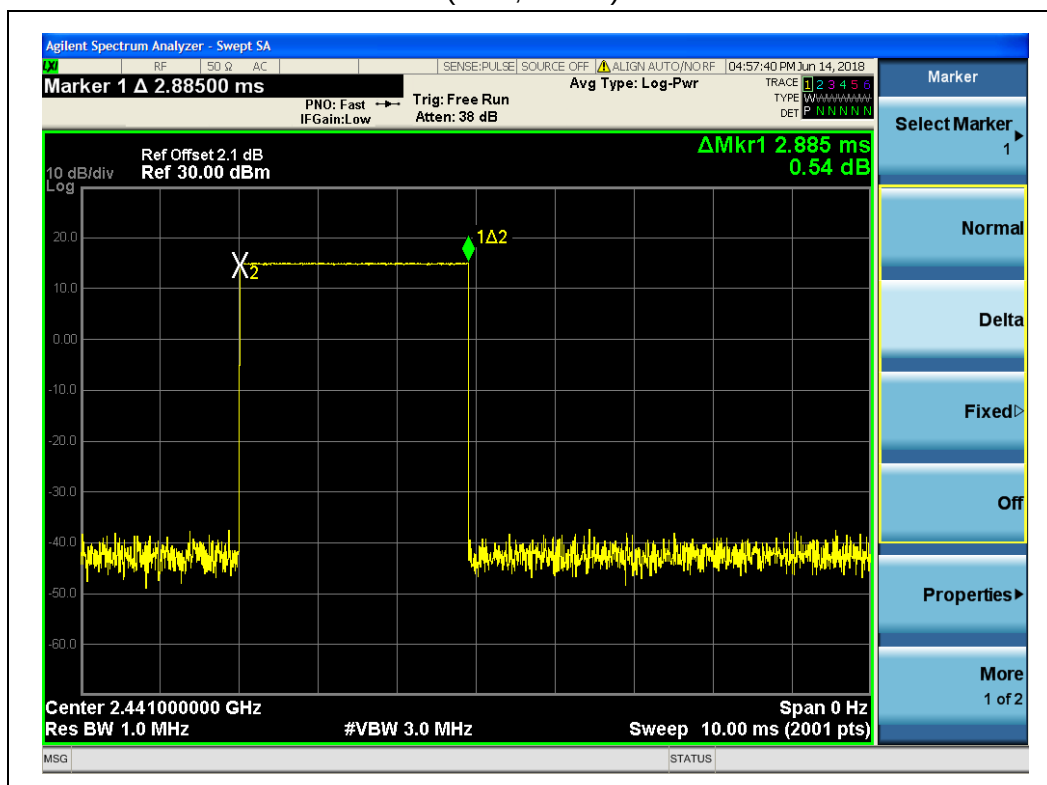

(DH5, GFSK)




2.6.4.2 $\pi/4$ -DQPSK Mode


A. Test Verdict:

DH Packet	Pulse Width (ms)	Dwell Time (ms)	Limit (sec)	Verdict
DH1	0.38	121.60	0.4	PASS
DH3	1.64	262.40		PASS
DH5	2.89	308.27		PASS


B. Test Plots:

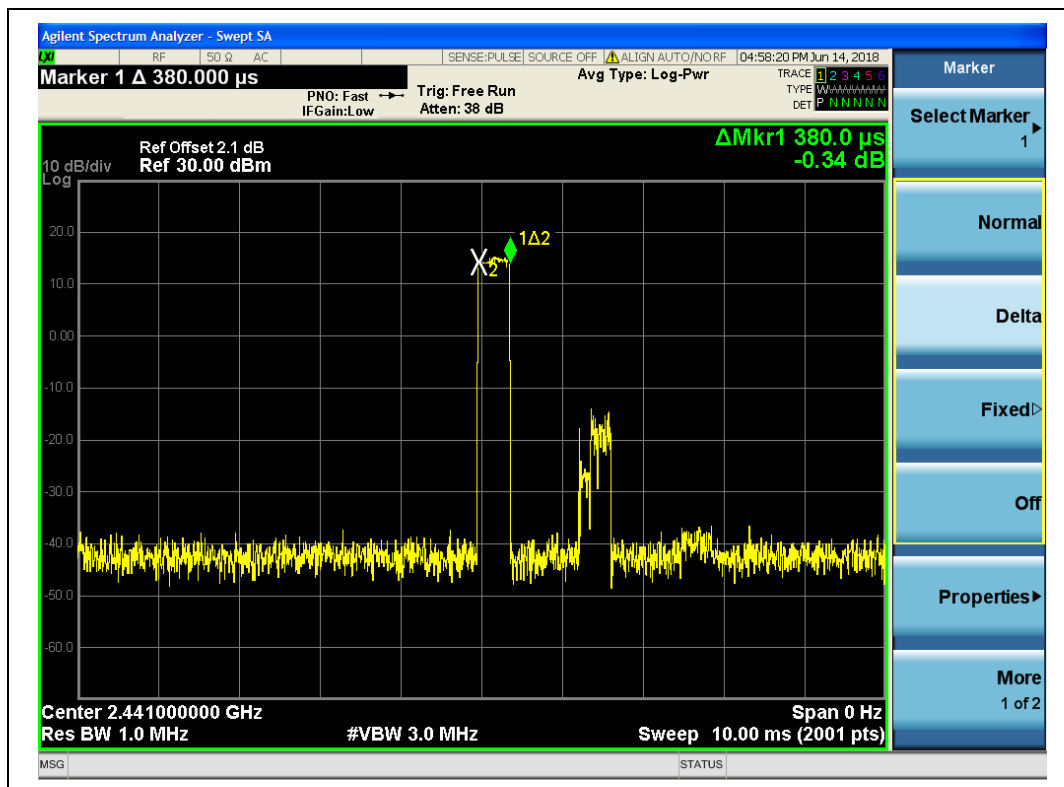

(DH1, $\pi/4$ -DQPSK)

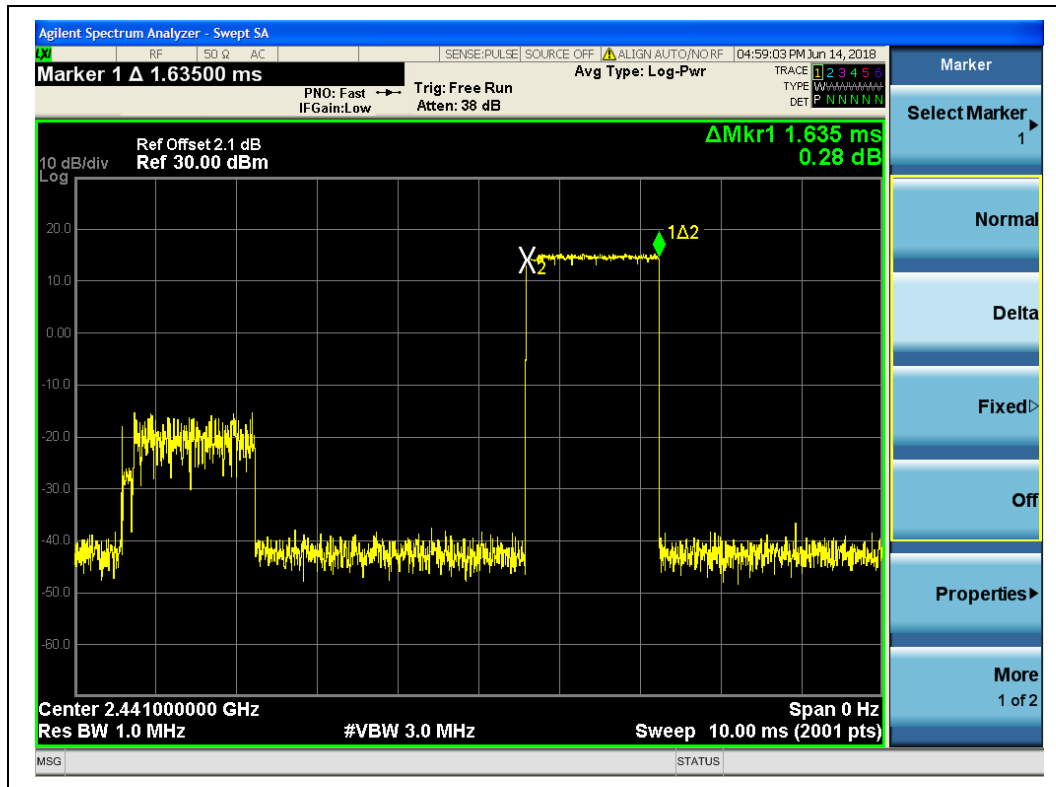

(DH3, $\pi/4$ -DQPSK)

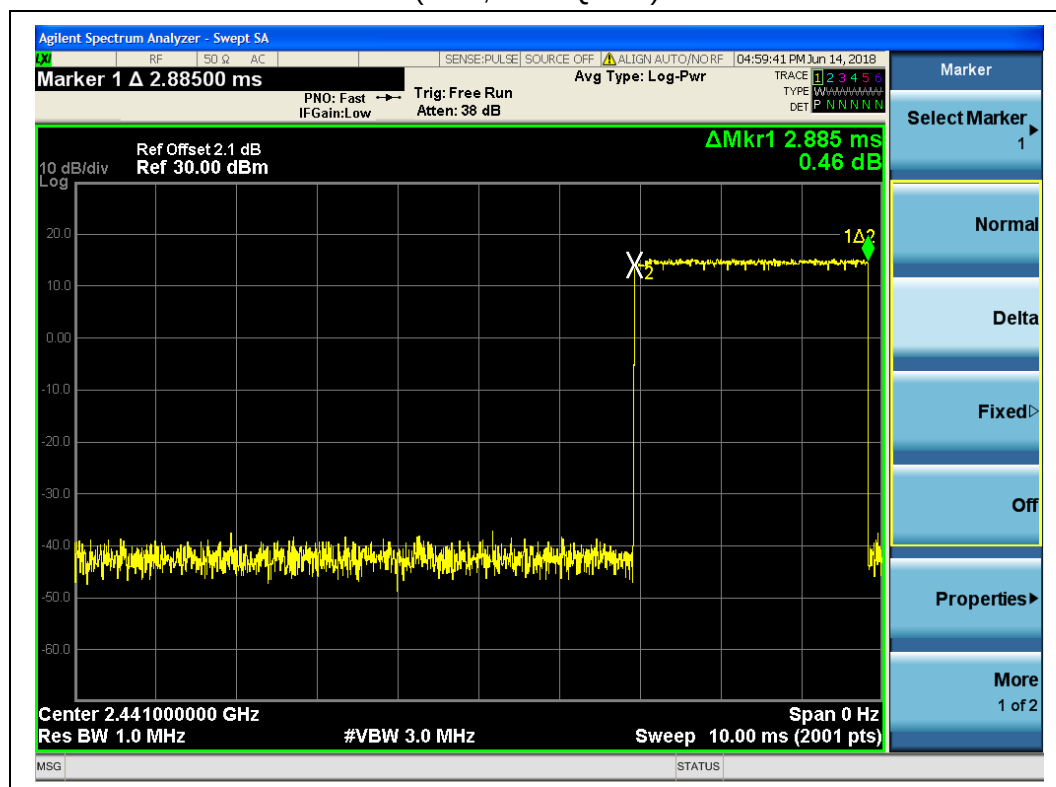

(DH5, $\pi/4$ -DQPSK)




2.6.4.3 8-DPSK mode


A. Test Verdict:

DH Packet	Pulse Width (ms)	Dwell Time (ms)	Limit (sec)	Verdict
DH1	0.39	124.80	0.4	PASS
DH3	1.64	262.40		PASS
DH5	2.89	308.27		PASS


B. Test Plots:

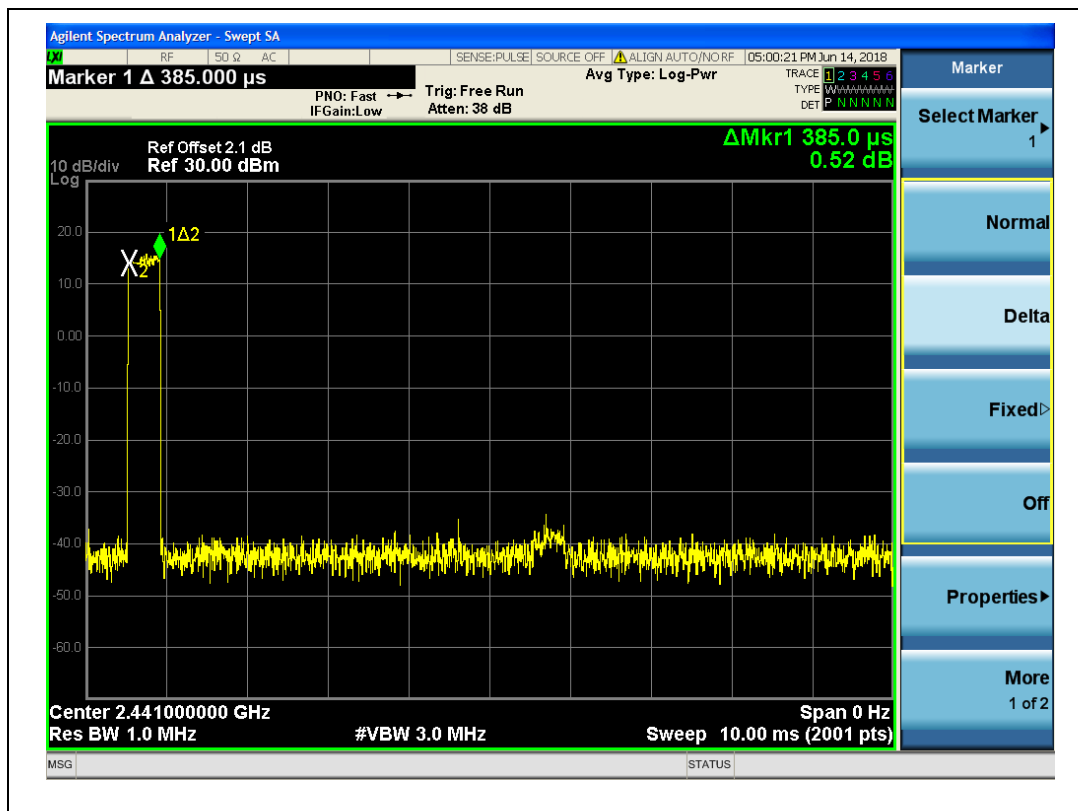

(DH1, 8-DPSK)

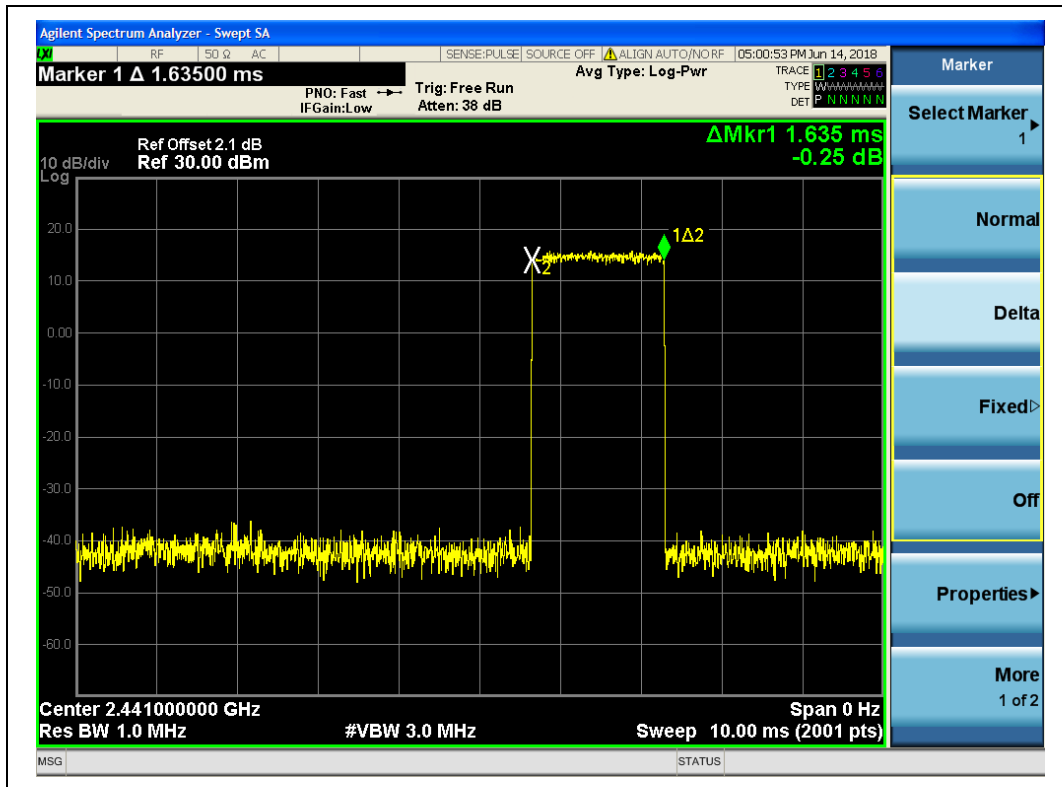

(DH3, 8-DPSK)

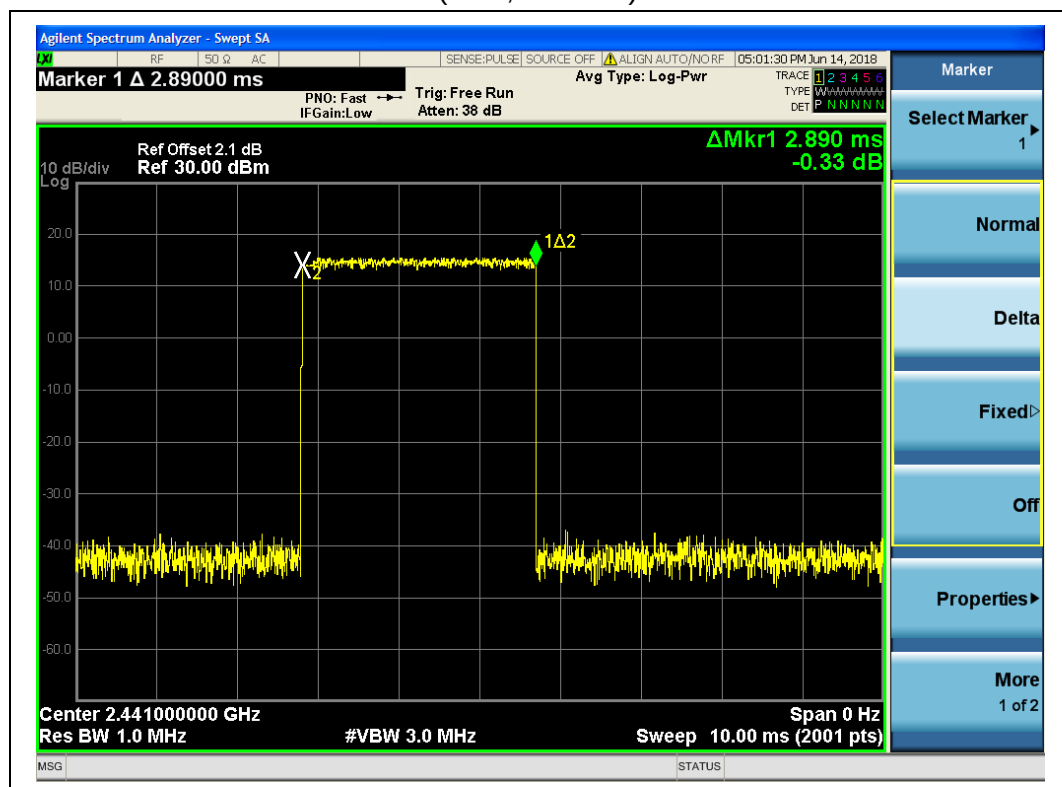

(DH5, 8-DPSK)


2.7. Conducted Spurious Emissions

2.7.1. Requirement

According to FCC §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.7.2. Test Description

A. Test Setup:

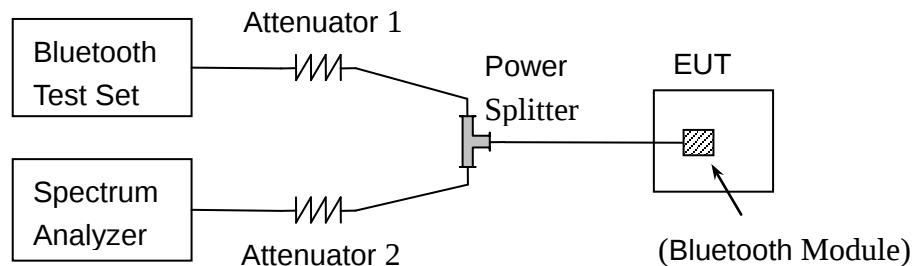

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please refer ANNEX A(1.5).

2.7.3. Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak



Trace = max hold

Allow the trace to stabilize.

2.7.4. Test Result

The Bluetooth Module operates at hopping-off test mode. The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.


2.7.4.1 GFSK Mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
0	2402	-36.76	13.00	-7.00	PASS
39	2441	-36.81	14.49	-5.51	PASS
78	2480	-38.34	12.83	-7.17	PASS

B. Test Plots:


Note: The power of the Module transmitting frequency should be ignored.

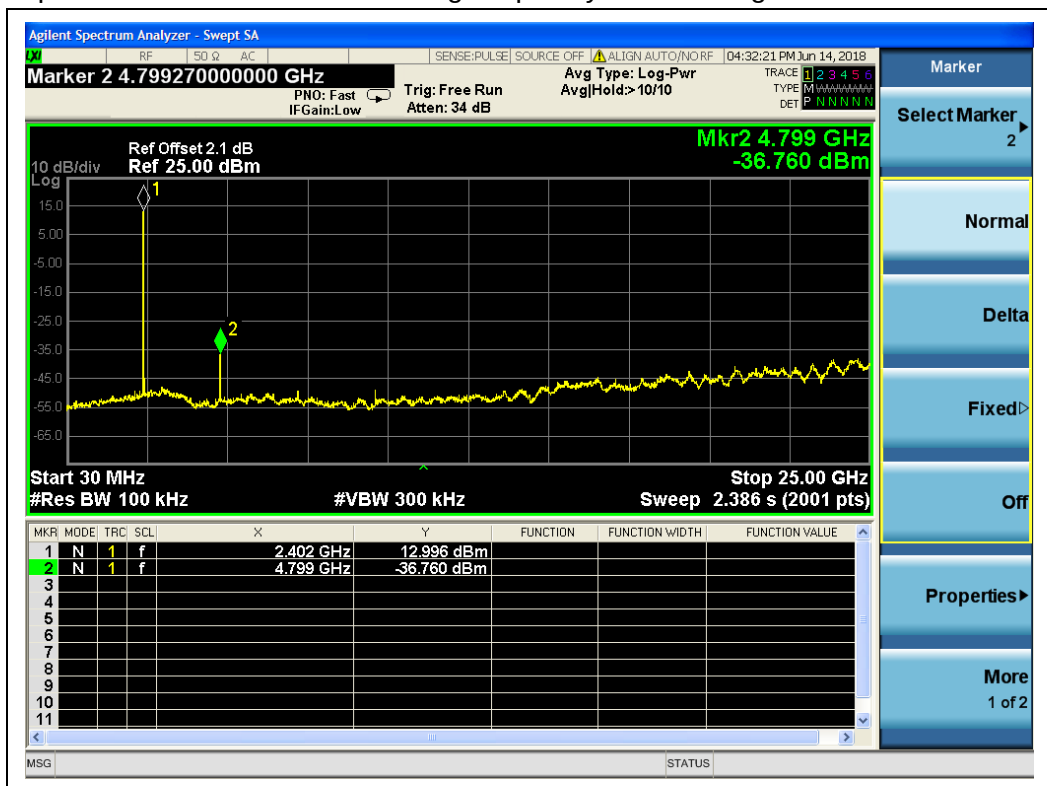


(Channel = 0, 30MHz to 25GHz, GFSK Mode)

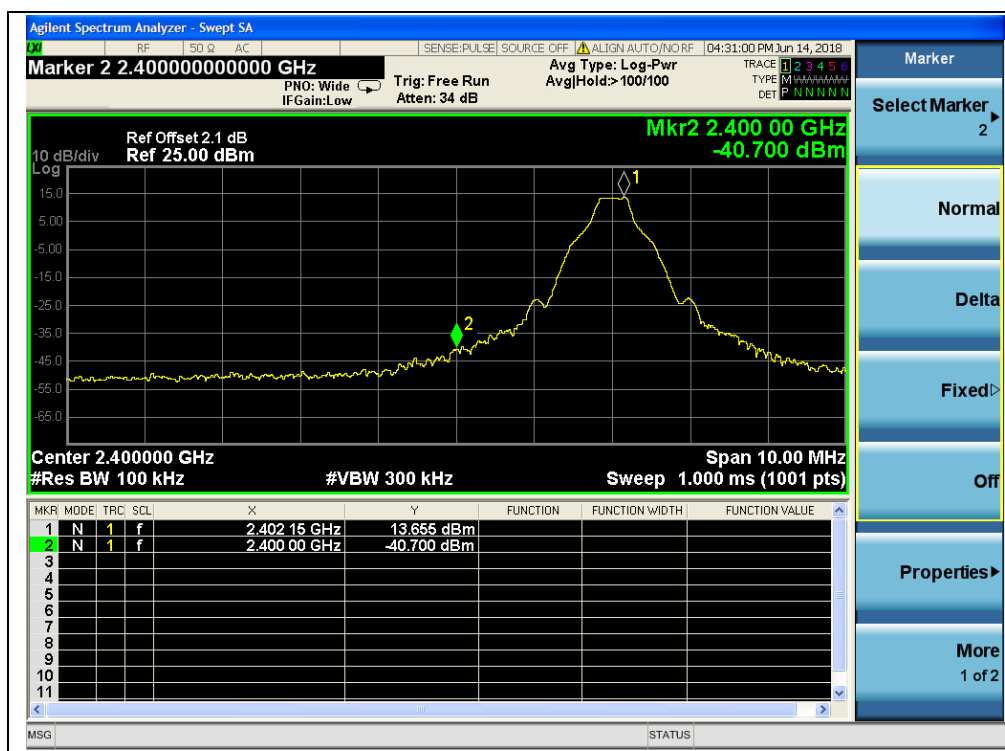


(Channel = 0, Band edge, GFSK Mode)

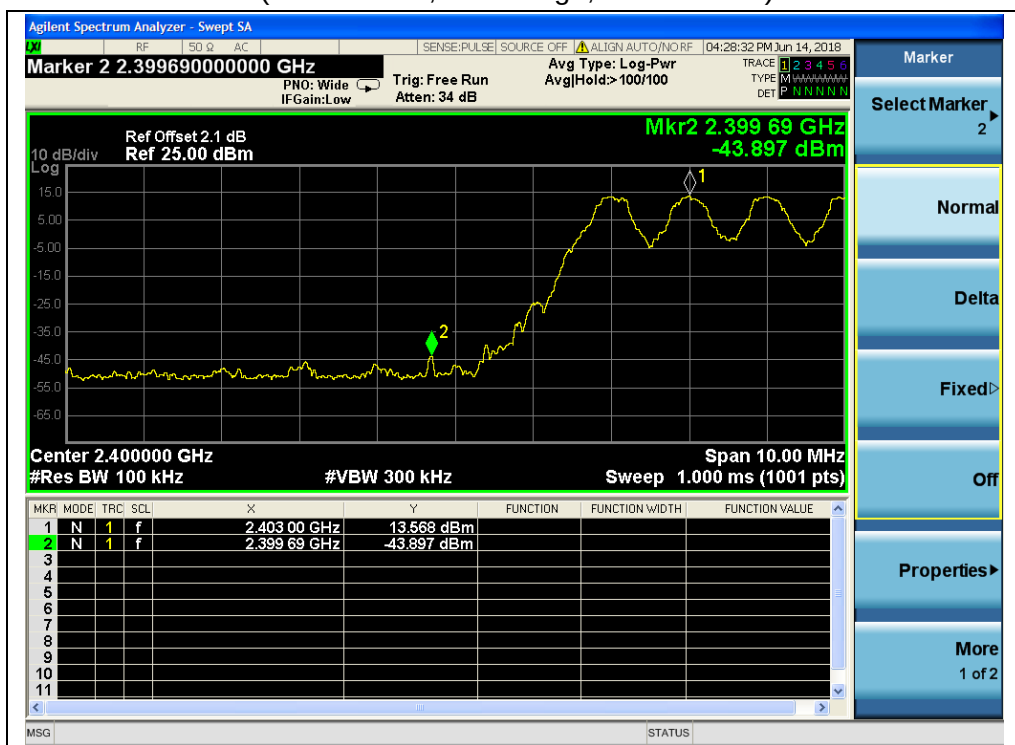


(Channel = 0, Band edge with hopping on, GFSK Mode)

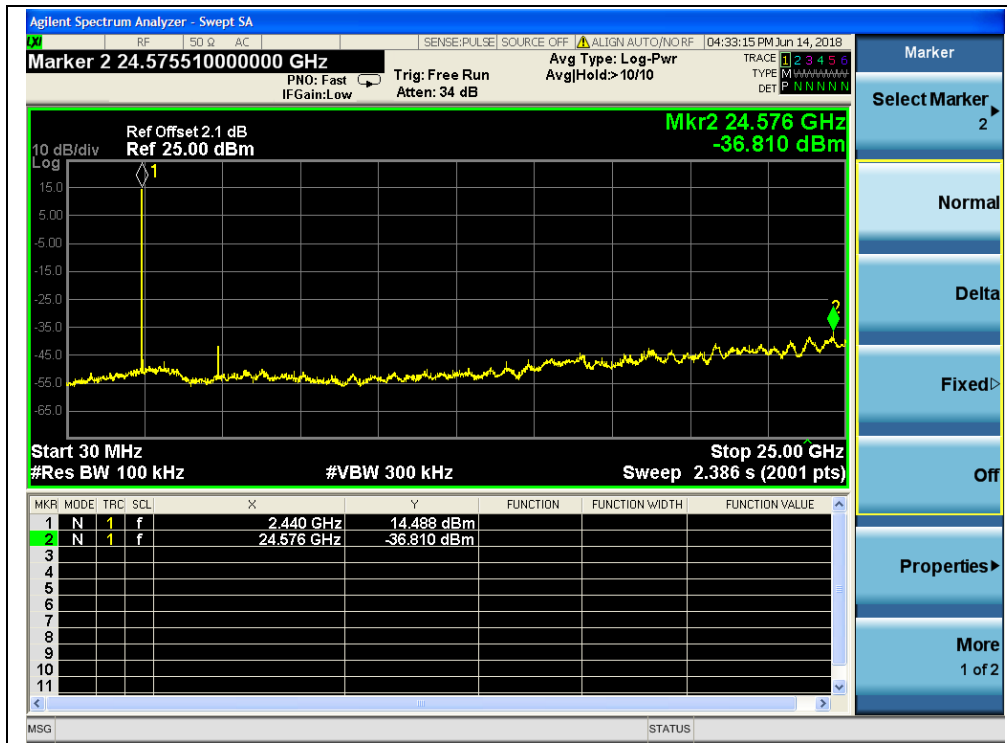

(Channel = 39, 30MHz to 25GHz, GFSK Mode)

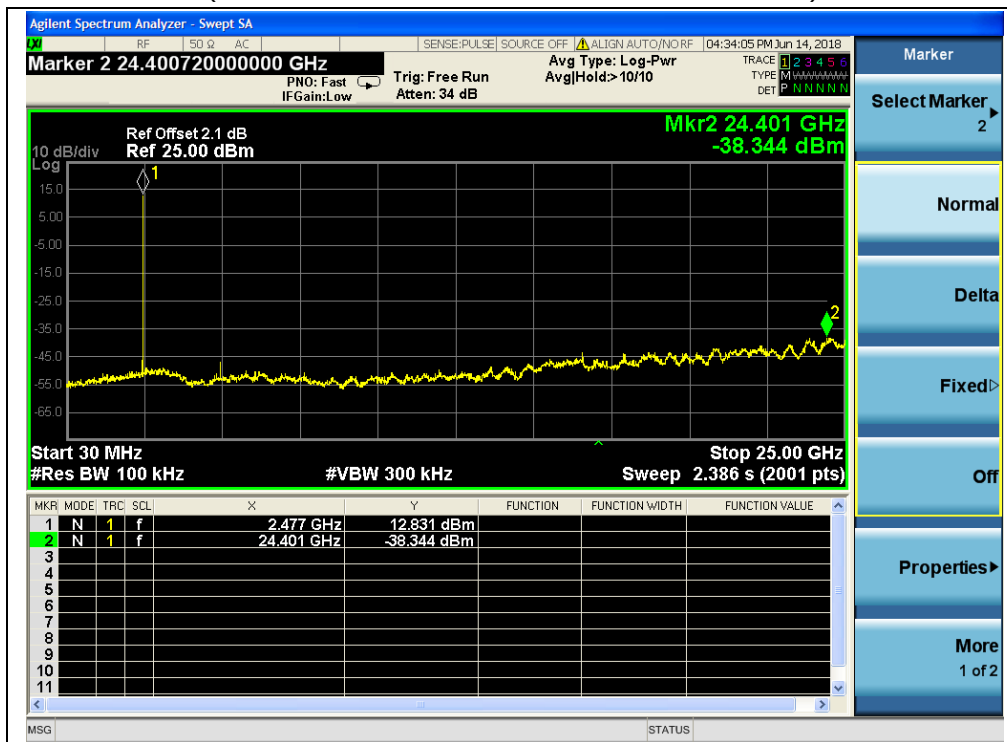

(Channel = 78, 30MHz to 25GHz, GFSK Mode)

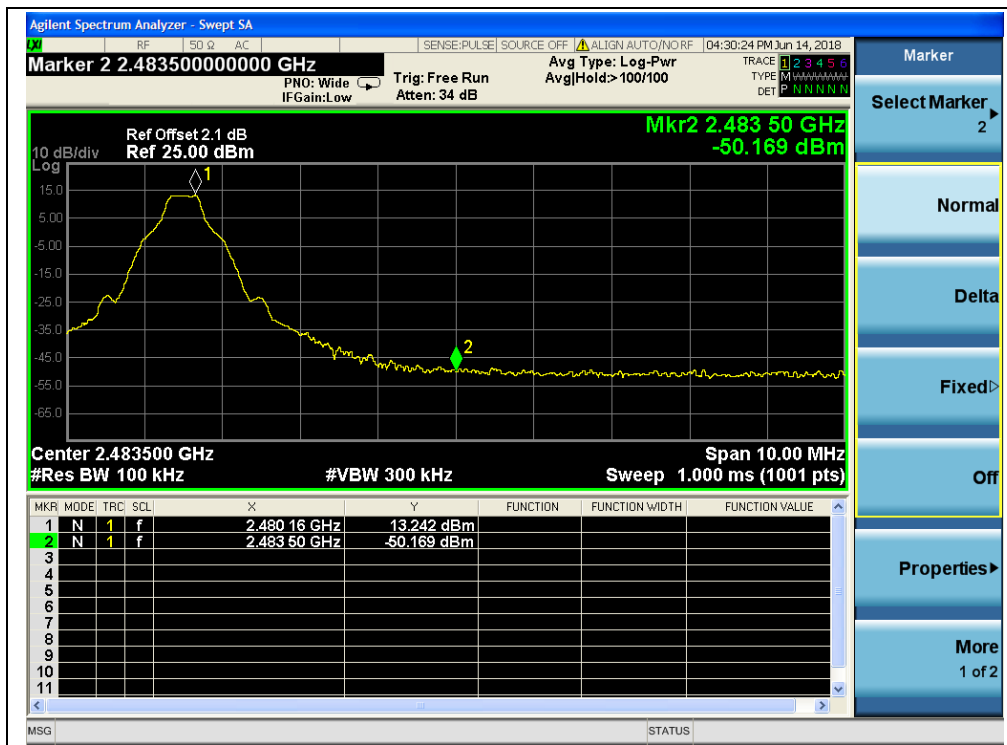

(Channel = 78, Band edge, GFSK Mode)



(Channel = 78, Band edge with hopping on, GFSK Mode)




2.7.4.2 $\pi/4$ -DQPSK Mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
0	2402	-39.71	9.50	-10.50	PASS
39	2441	-38.05	10.77	-9.23	PASS
78	2480	-37.89	10.51	-9.49	PASS

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

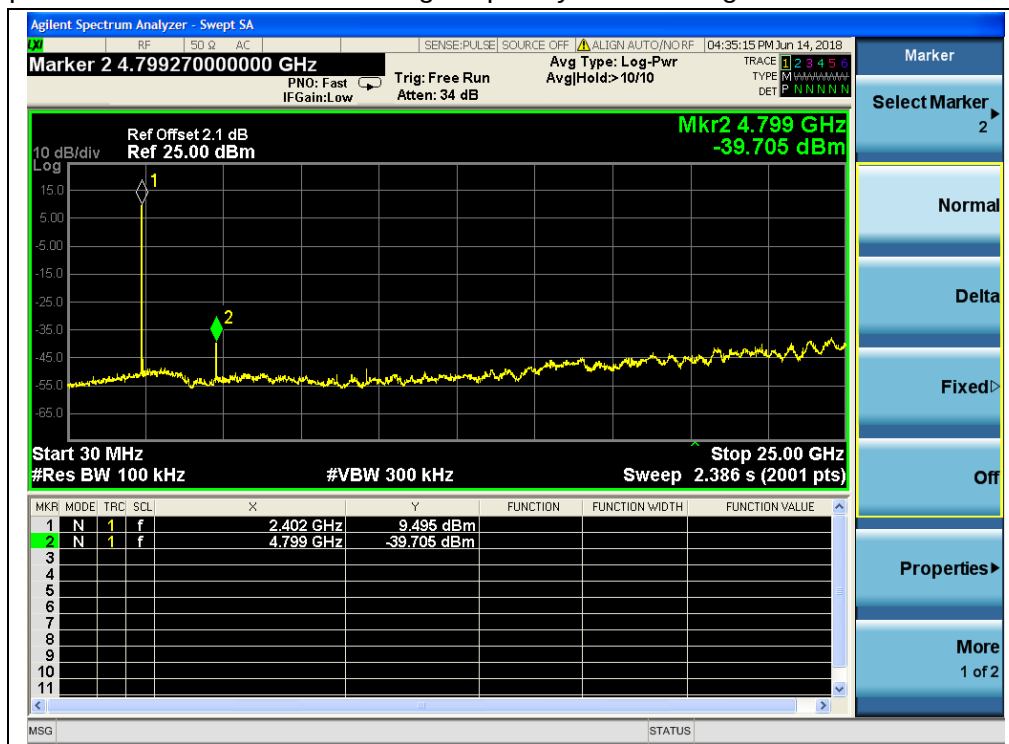


(Channel = 0, 30MHz to 25GHz, $\pi/4$ -DQPSK)

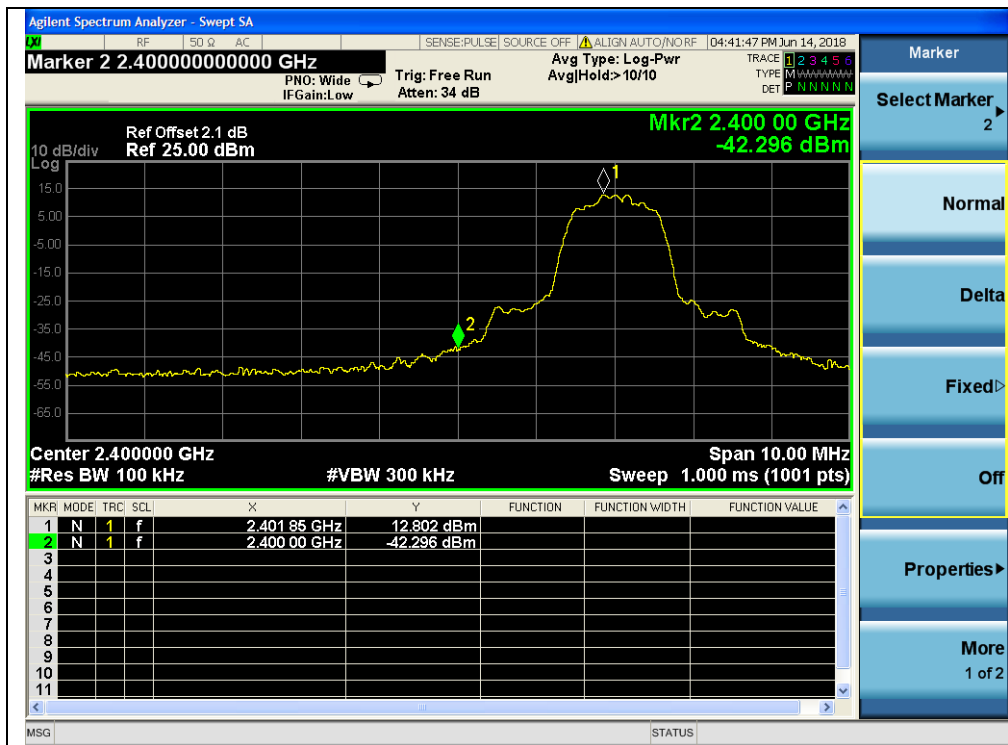

(Channel = 0, Band edge, $\pi/4$ -DQPSK)

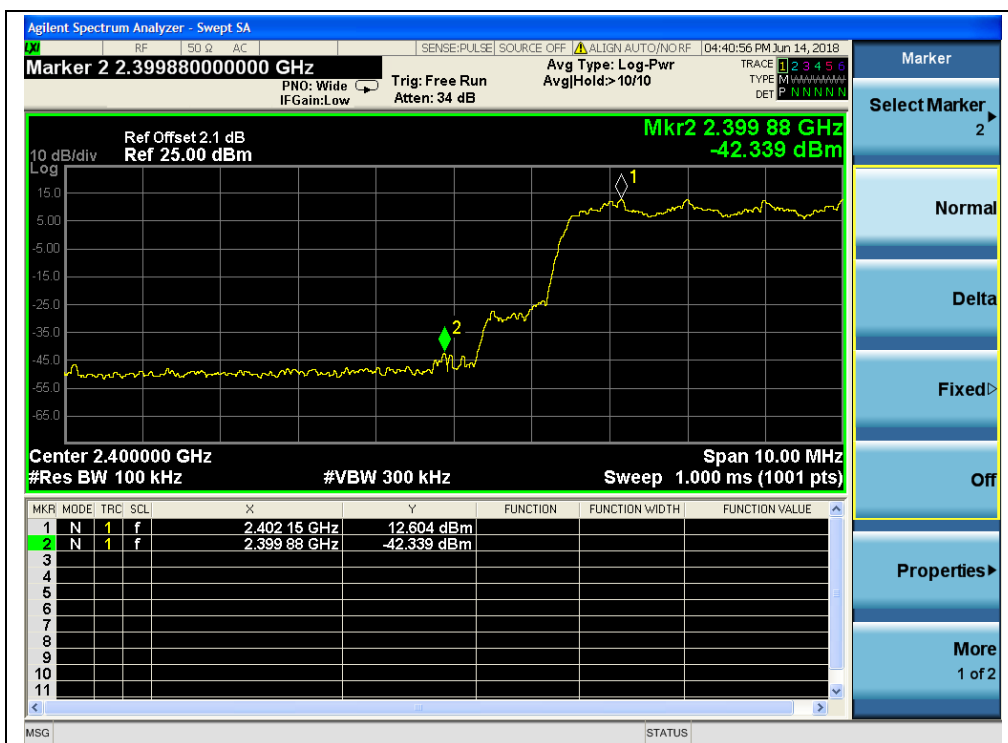


(Channel = 0, Band edge with hopping on, $\pi/4$ -DQPSK)

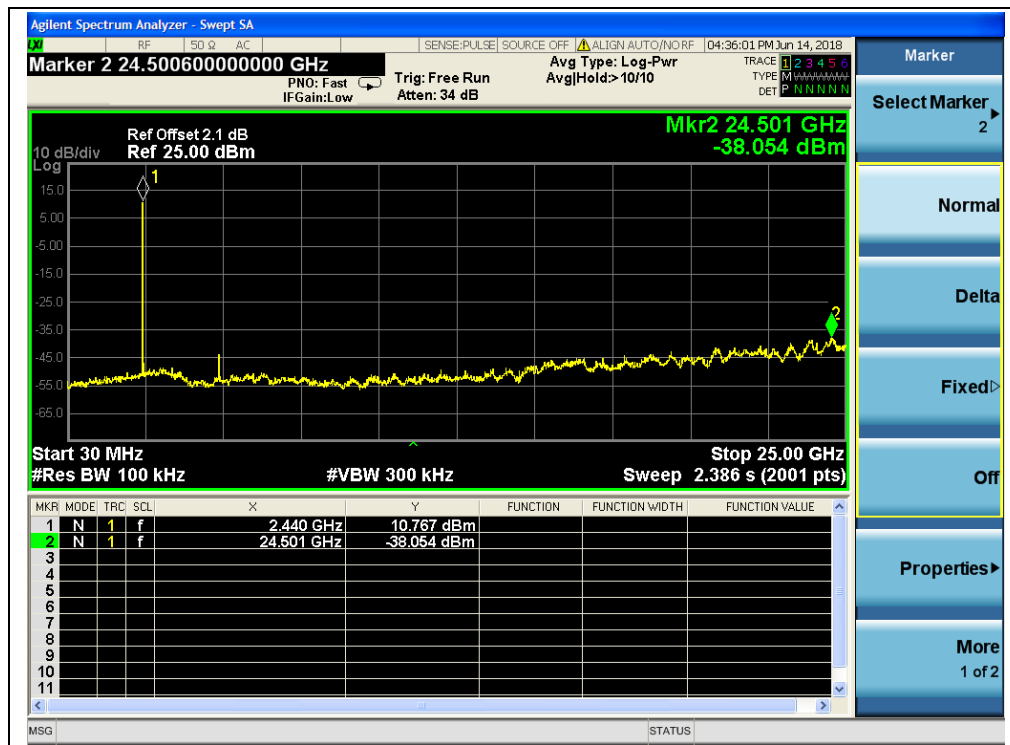(Channel = 39, 30MHz to 25GHz, $\pi/4$ -DQPSK)(Channel = 78, 30MHz to 25GHz, $\pi/4$ -DQPSK)



(Channel = 78, Band edge, $\pi/4$ -DQPSK)

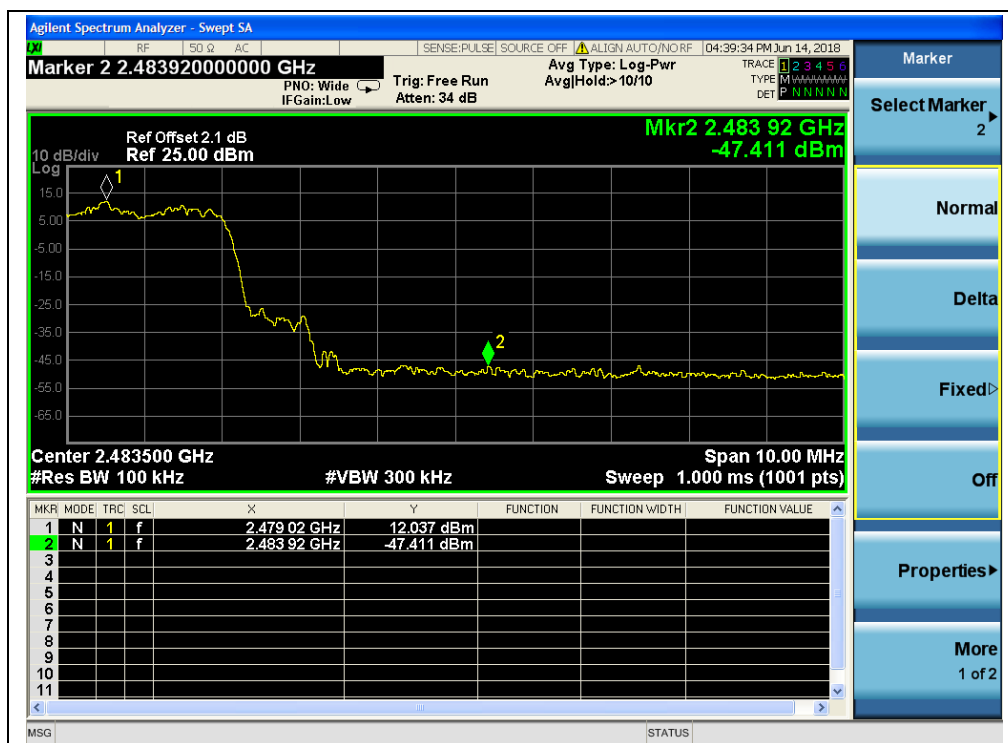

(Channel = 78, Band edge with hopping on, $\pi/4$ -DQPSK)




2.7.4.3 8-DPSK Mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
0	2402	-38.72	12.47	-7.53	PASS
39	2441	-38.63	13.69	-6.31	PASS
78	2480	-37.84	10.52	-9.48	PASS

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

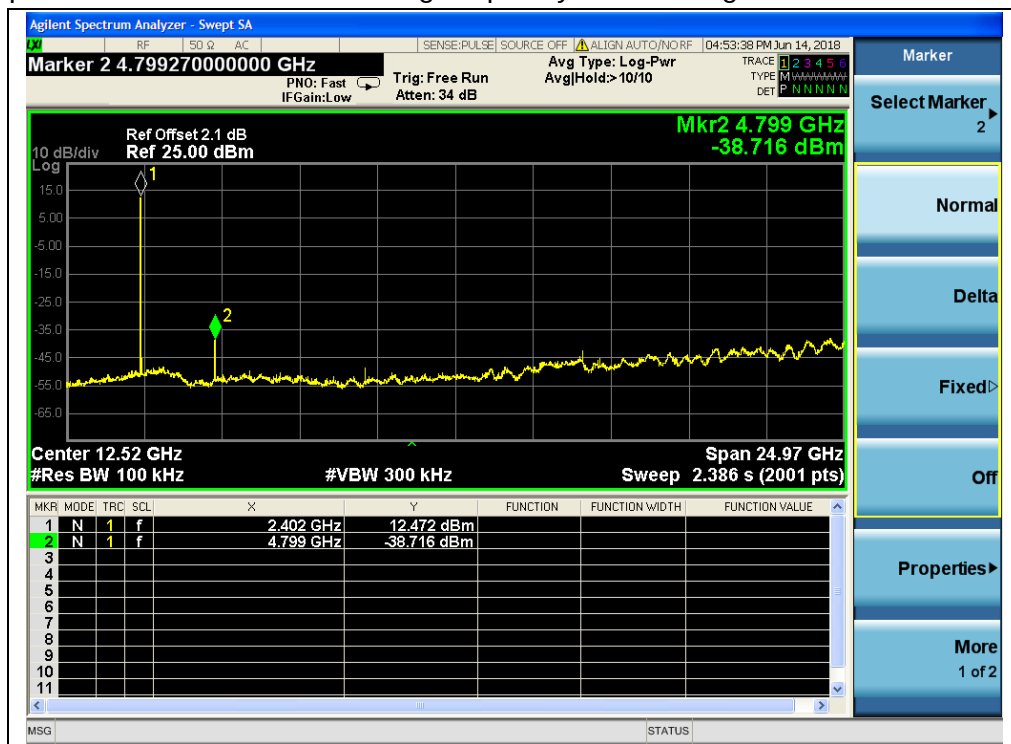


(Channel = 0, 30MHz to 25GH, 8-DPSK)

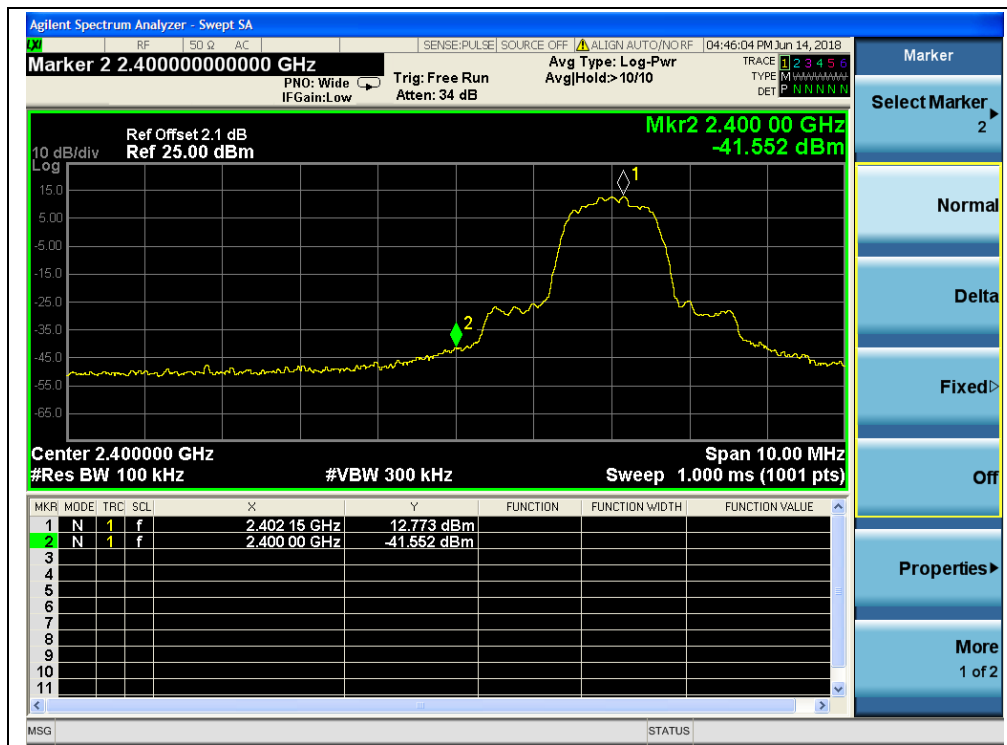

(Channel = 0, Band edge, 8-DPSK)

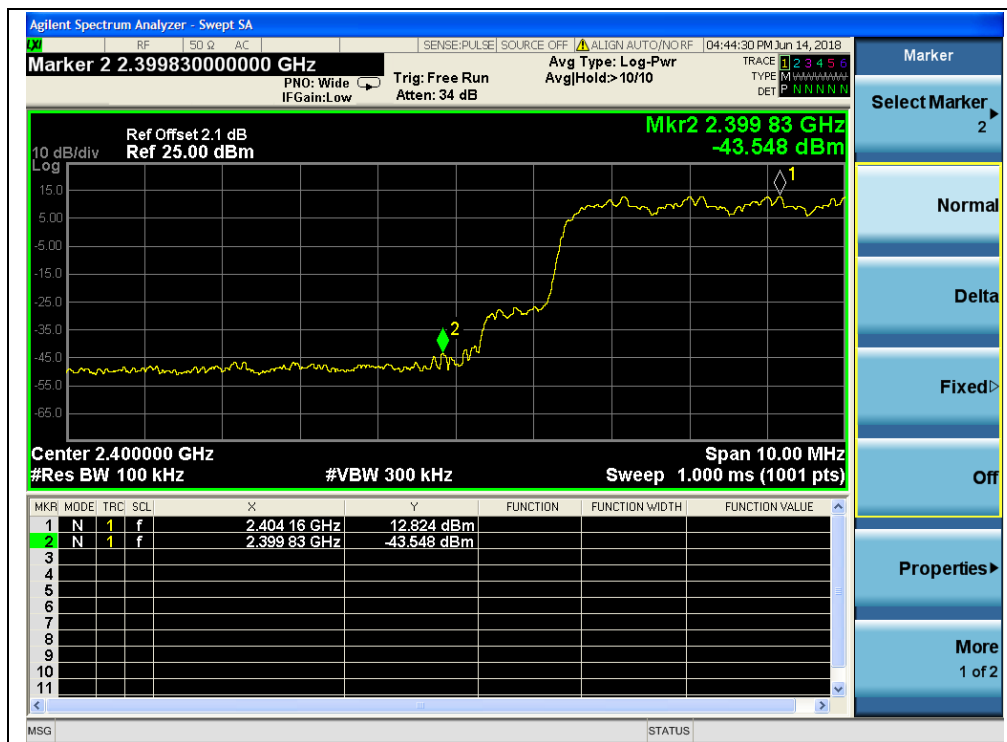

(Channel = 0, Band edge with hopping on, 8-DPSK)

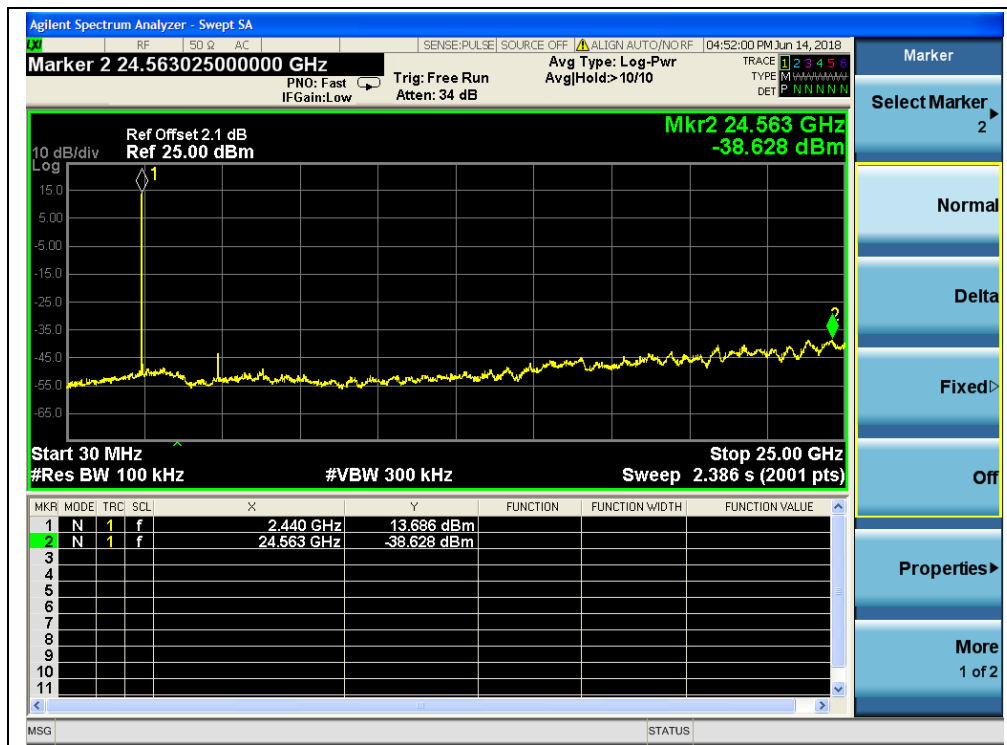


(Channel = 39, 30MHz to 25GHz, 8-DPSK)



(Channel = 78, 30MHz to 25GH, 8-DPSK)



(Channel = 78, Band edge, 8-DPSK)

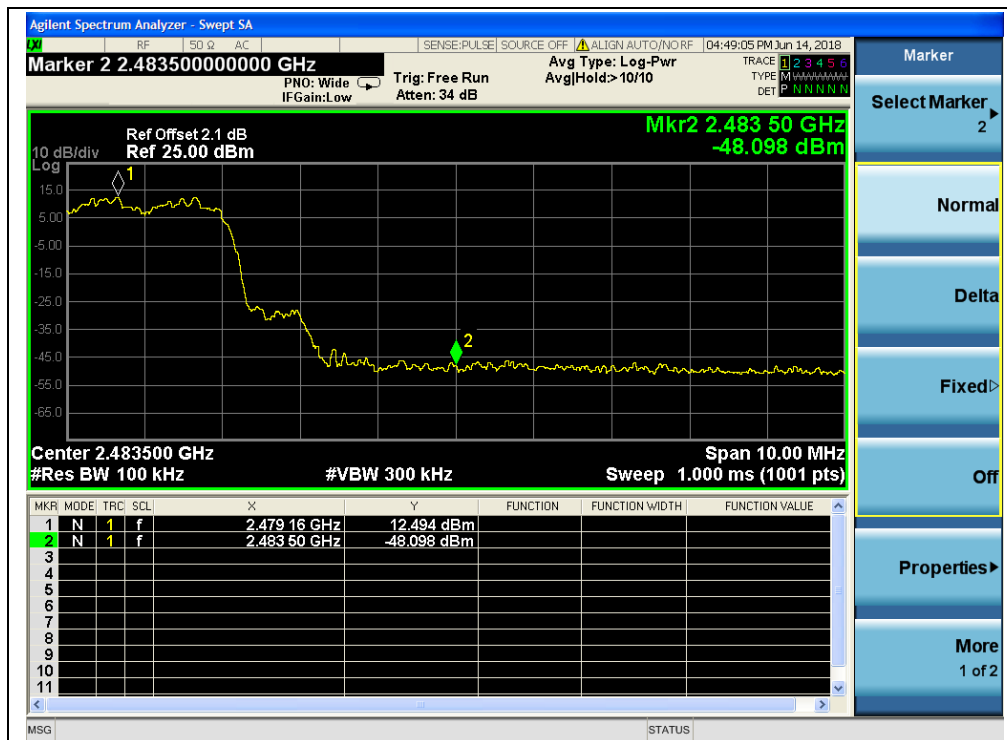

(Channel = 78, Band edge with hopping on, 8-DPSK)

2.8. Conducted Emission

2.8.1. Requirement

According to RSS-GEN section 8.8, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency (MHz)	range	Conducted Limit (dB μ V)	
		Quai-peak	Average
0.15 - 0.50		66 to 56	56 to 46
0.50 - 5		56	46
5- 30		60	50

NOTE:

- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.8.2. Test Description

A. Test Setup:

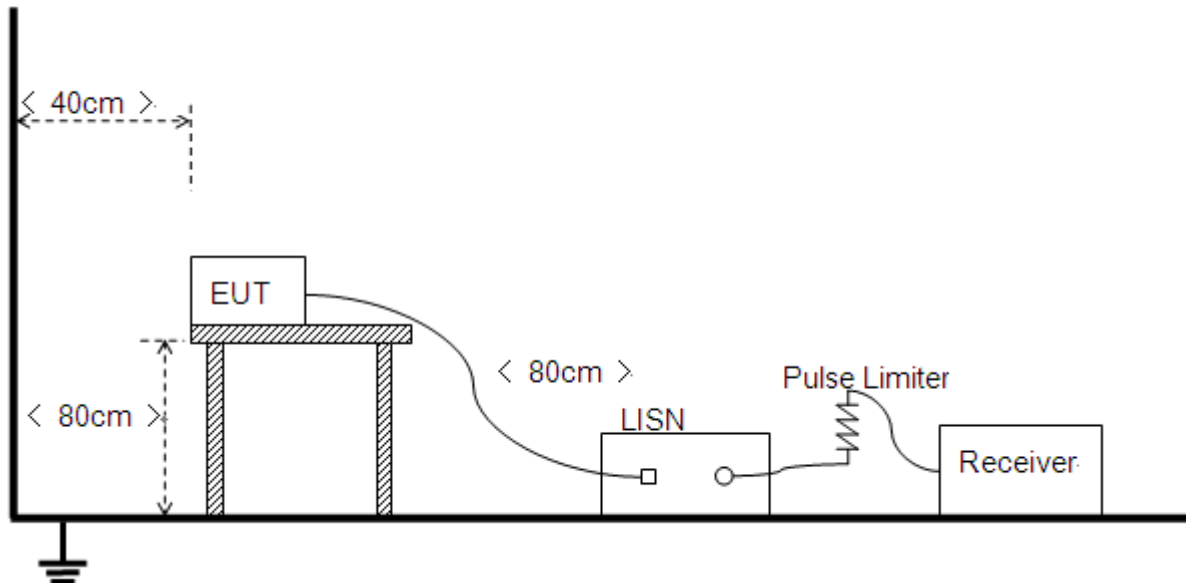

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

The factors of the site are calibrated to correct the reading. During the measurement, the Bluetooth



EUT is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.5).

2.8.3. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.


Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test setup:

The EUT configuration of the emission tests is EUT + Link.


Note: The test voltage is AC 120V/60Hz.

B. Test Plots:

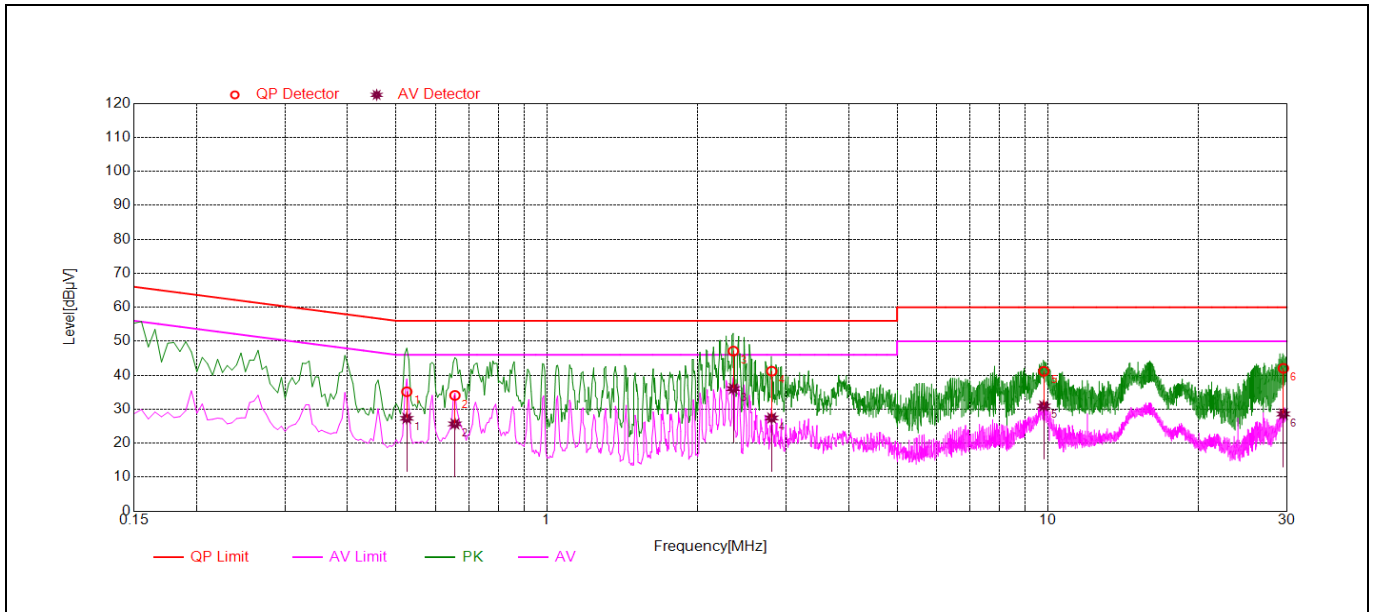

(Plot A: L Phase)

NO.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.52	35.13	27.31	56.00	46.00	Line	PASS
2	0.65	34.05	25.66	56.00	46.00		PASS
3	2.36	47.09	36.03	56.00	46.00		PASS
4	2.81	41.18	27.41	56.00	46.00		PASS
5	9.81	41.15	30.94	60.00	50.00		PASS
6	29.53	42.02	28.58	60.00	50.00		PASS

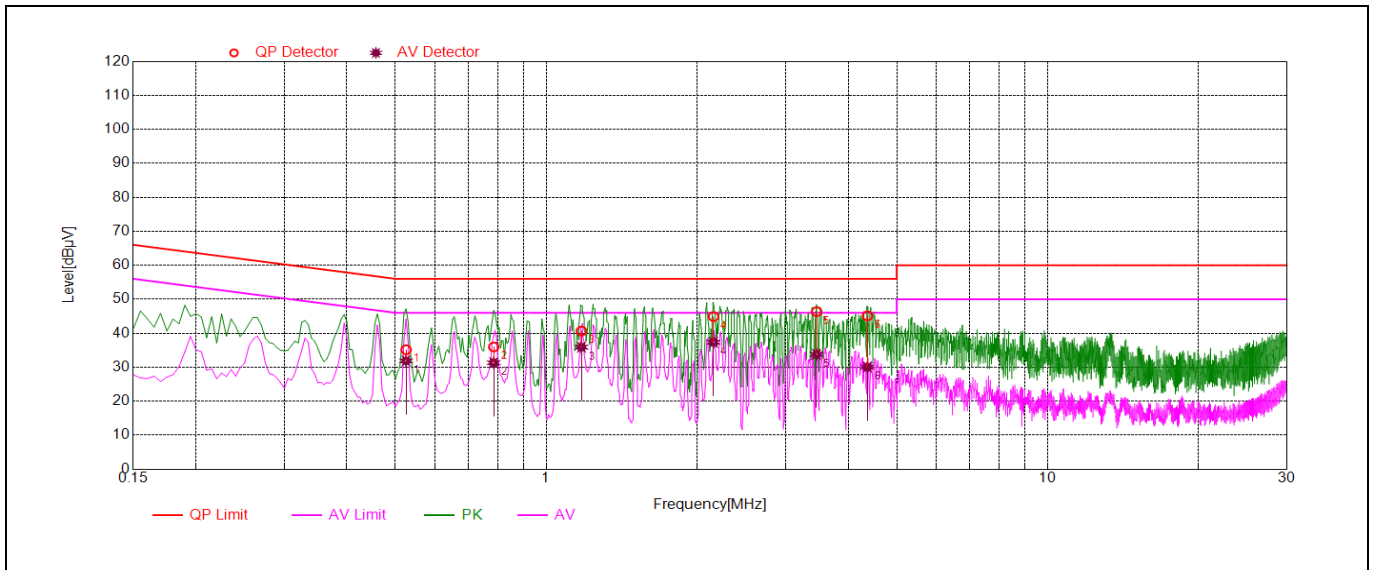

(Plot B: N Phase)

NO.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.52	35.14	31.86	56.00	46.00	Neutral	PASS
2	0.79	35.96	31.31	56.00	46.00		PASS
3	1.18	40.64	35.90	56.00	46.00		PASS
4	2.16	44.90	37.35	56.00	46.00		PASS
5	3.46	46.34	33.79	56.00	46.00		PASS
6	4.37	45.12	30.03	56.00	46.00		PASS


2.9. Restricted Frequency Bands

2.9.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.9.2. Test Description

A. Test Setup:

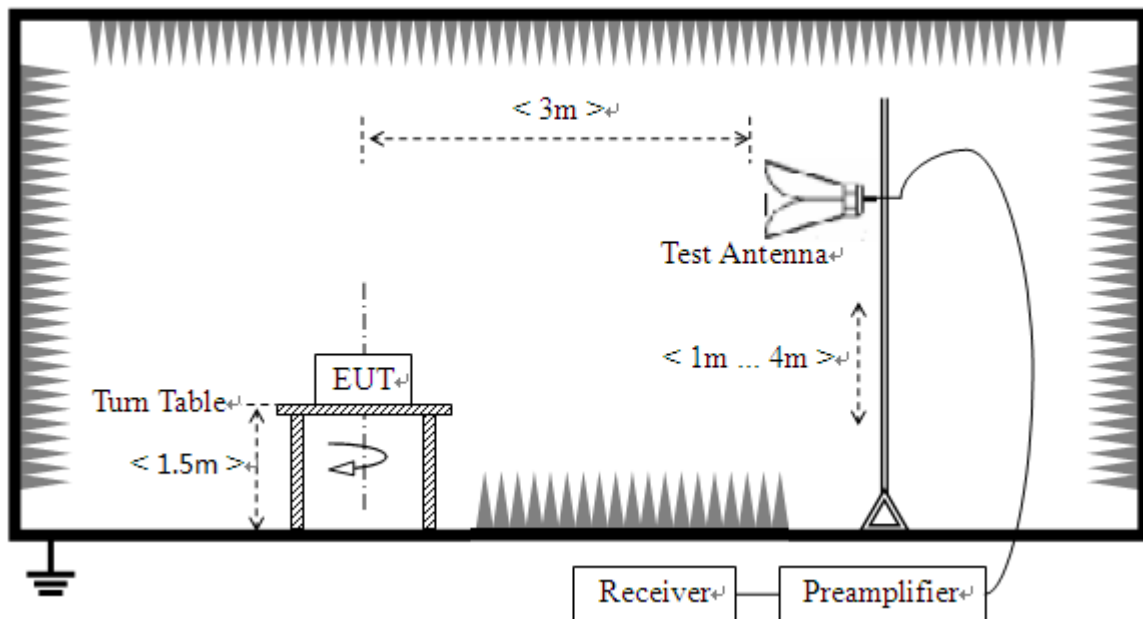

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under non hopping-on test mode transmitting 339 bytes DH5, 679 bytes 2DH5 and 1021 bytes 3DH5 packages at maximum power.

For the Test Antenna:

Horn Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

**B. Equipments List:**

Please refer ANNEX A(1.5).

2.9.3. Test Procedure

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 KHz for $f < 1\text{GHz}$

VBW = 3 MHz for peak and 10Hz for average

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

2.9.4. Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

AT: Total correction Factor except Antenna

UR: Receiver Reading


Gpreamp: Preamplifier Gain

AFactor: Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

2.8.4.1 GFSK Mode**A. Test Verdict:**

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
0	2372.01	PK	45.13	-33.63	32.56	44.06	74	Pass
0	2380.64	AV	32.91	-33.63	32.56	31.84	54	Pass
78	2487.02	PK	45.11	-33.18	32.50	44.43	74	Pass
78	2485.02	AV	32.93	-33.18	32.50	32.25	54	Pass



Keysight Spectrum Analyzer - Swept SA

RL PRESEL 50 Q DC SENSE:INT ALIGN AUTO 03:56:59 PM Jul 12, 2018

Marker 1 2.372008000000 GHz PNO: Fast Trg: Free Run Avg Type: Voltage
IFGain:Low Att: 6 dB Avg|Hold:>100/100

TRACE 1 2 3 4 5 6
TYPE M M M M M M M M
DET P P N N N N N

10 dB/div Ref 100.00 dBμV

Mkr1 2.372 008 GHz
45.129 dBμV

Start 2.30000 GHz Stop 2.40400 GHz
Res BW (CISPR) 1 MHz #VBW 3.0 MHz Sweep 1.000 ms (1001 pts)

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	2.372 008 GHz	45.129 dBμV			
2	N	1	f	2.390 000 GHz	43.049 dBμV			
3								
4								
5								
6								
7								
8								
9								
10								
11								

Marker

Select Marker 1

Normal

Delta

Fixed

Off


Properties

More 1 of 2

(Channel = 0, PEAK, GFSK)



(Channel = 0, AVERAGE, GFSK)

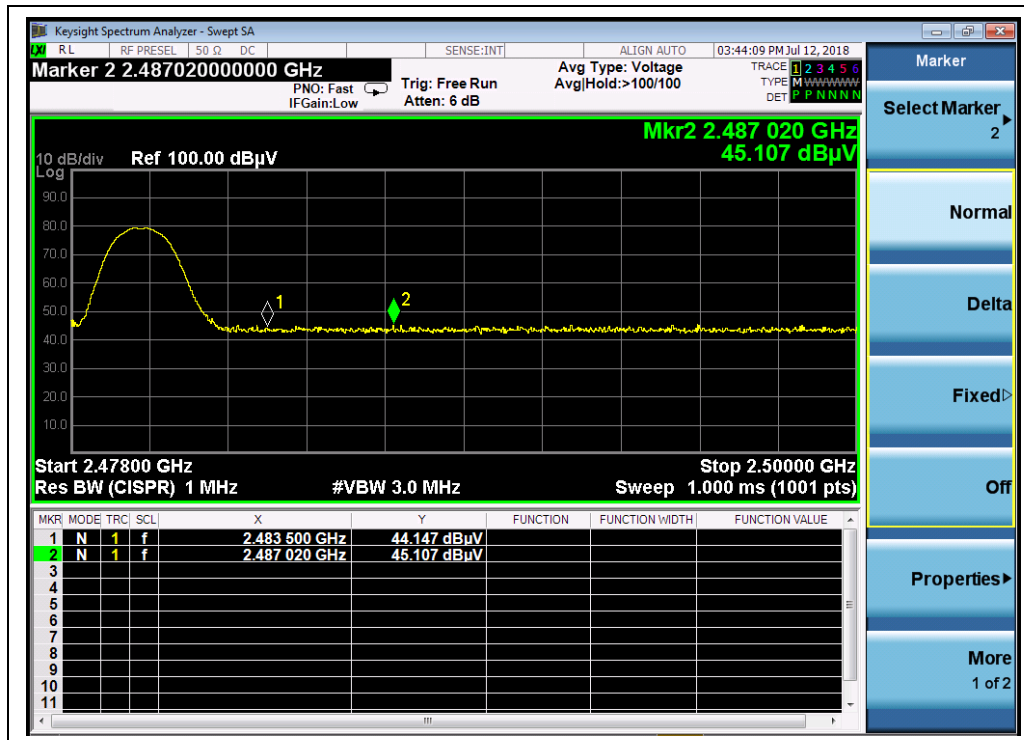

(Channel = 78, PEAK, GFSK)



(Channel = 78, AVERAGE, GFSK)




2.8.4.2 $\pi/4$ -DQPSK Mode



A. Test Verdict:


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
0	2381.37	PK	44.34	-33.63	32.56	43.27	74	Pass
0	2365.25	AV	32.92	-33.63	32.56	31.85	54	Pass
78	2486.32	PK	44.11	-33.18	32.50	43.43	74	Pass
78	2485.11	AV	32.90	-33.18	32.50	32.22	54	Pass

B. Test Plots:

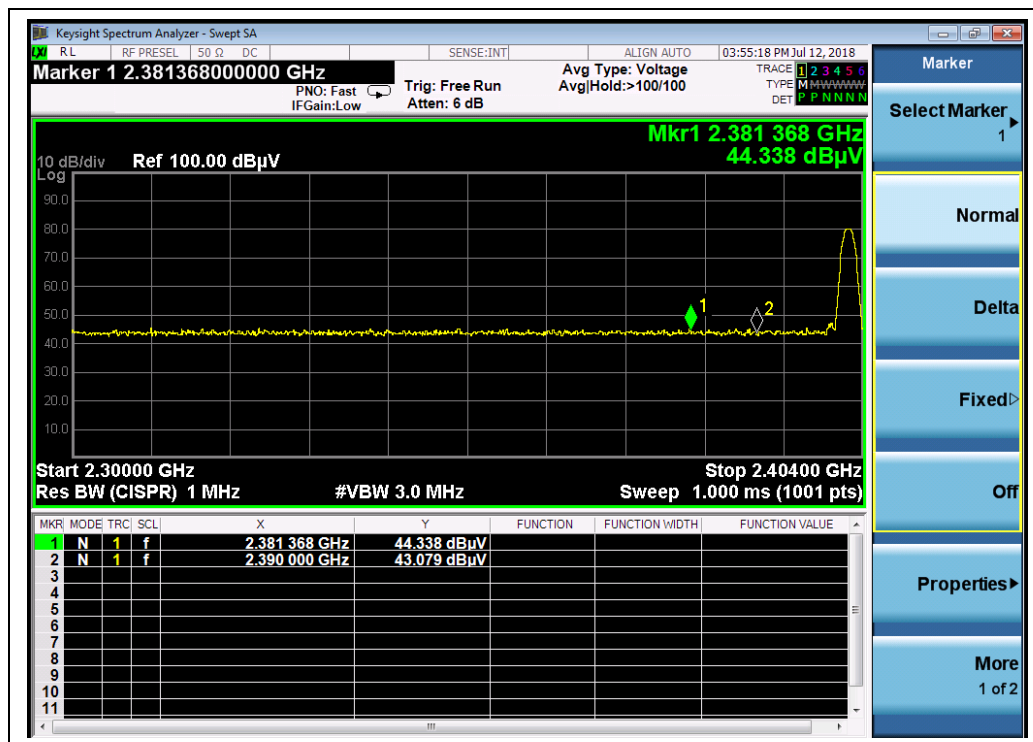

(Channel = 0, PEAK, $\pi/4$ -DQPSK)

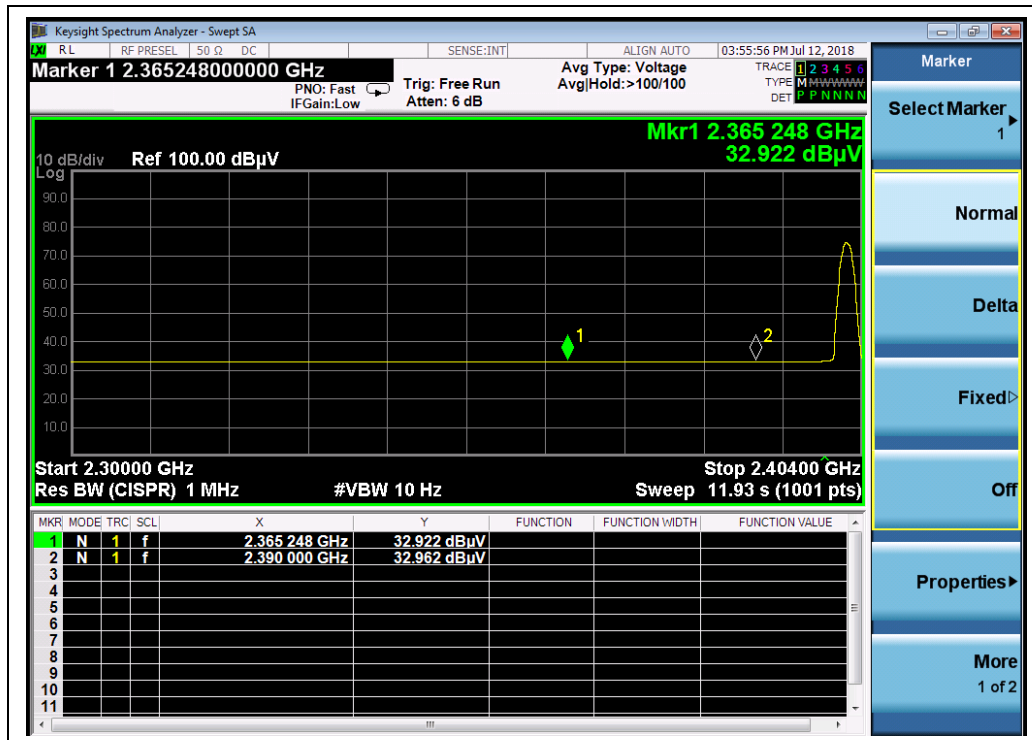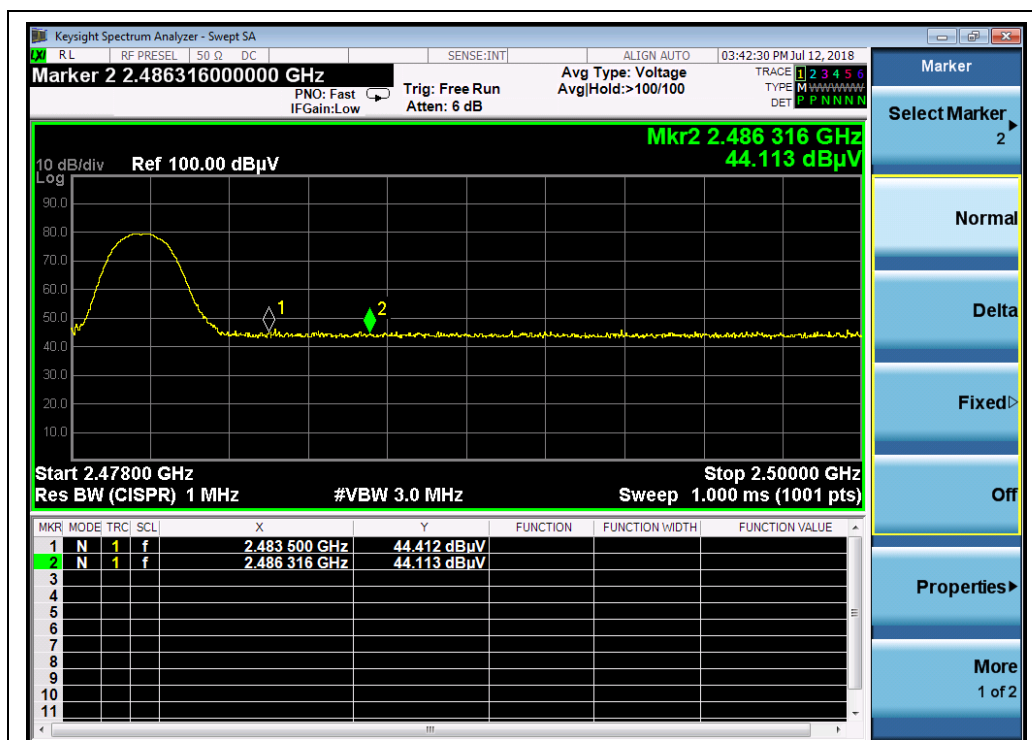(Channel = 0, AVERAGE, $\pi/4$ -DQPSK)(Channel = 78, PEAK, $\pi/4$ -DQPSK)

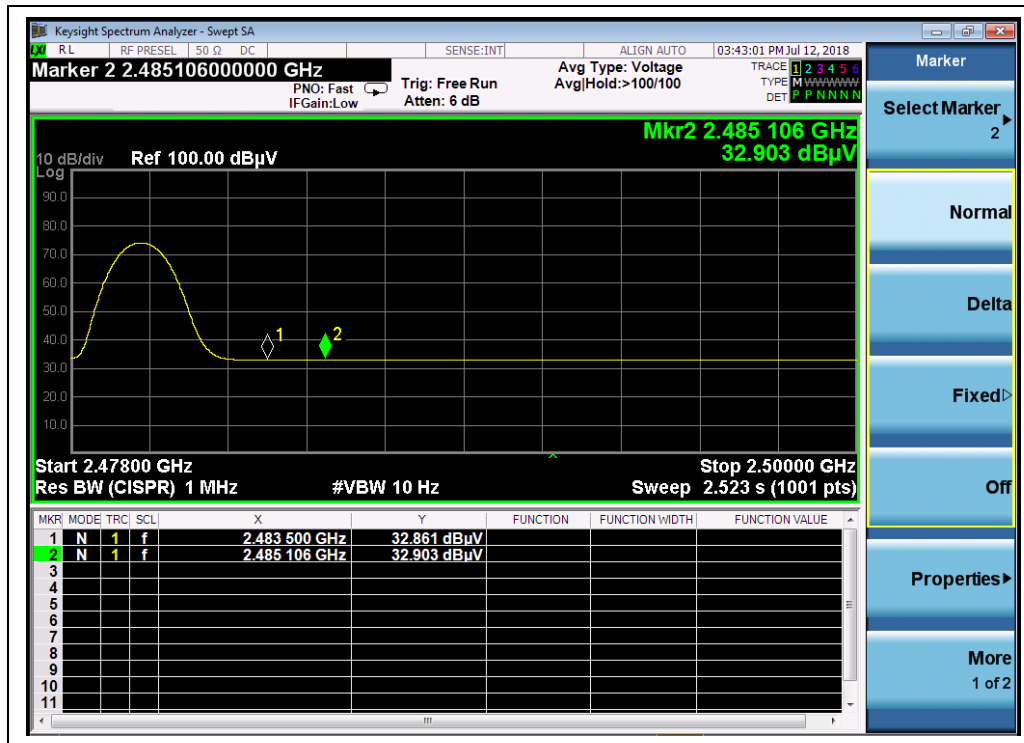


(Channel = 78, AVERAGE, $\pi/4$ -DQPSK)

2.8.4.3 8-DPSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBμV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
0	2342.78	PK	45.64	-33.63	32.56	44.57	74	Pass
0	2376.58	AV	32.96	-33.63	32.56	31.89	54	Pass
78	2485.96	PK	46.67	-33.18	32.50	45.99	74	Pass
78	2485.39	AV	32.91	-33.18	32.50	32.23	54	Pass


B. Test Plots:

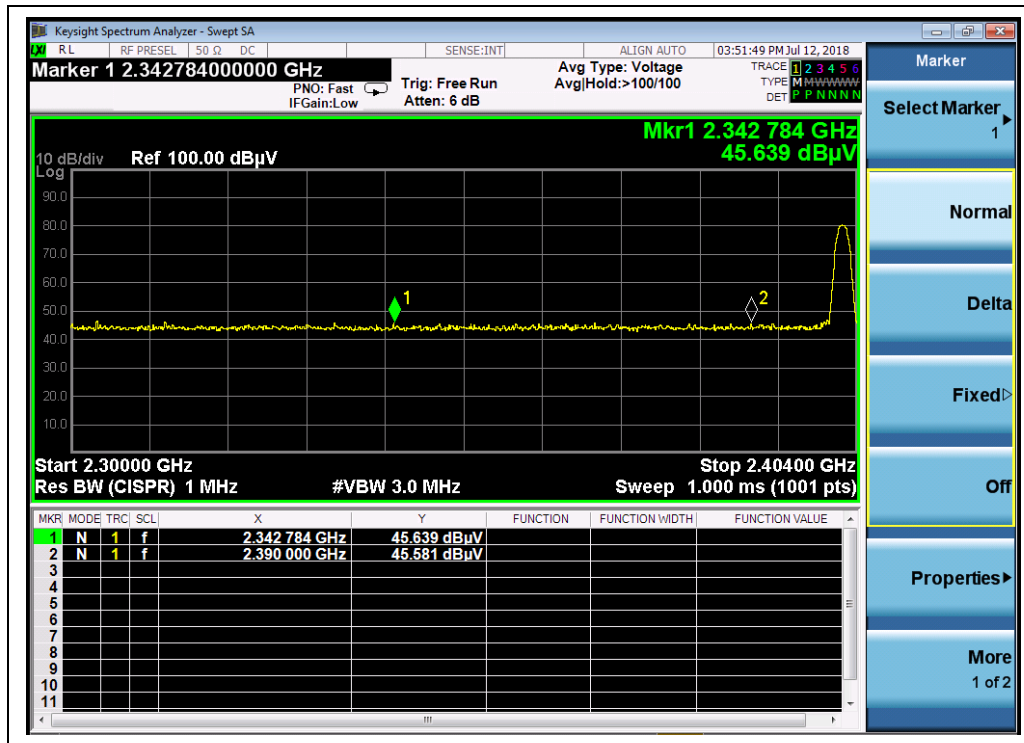


(Channel = 0, PEAK, 8-DPSK)

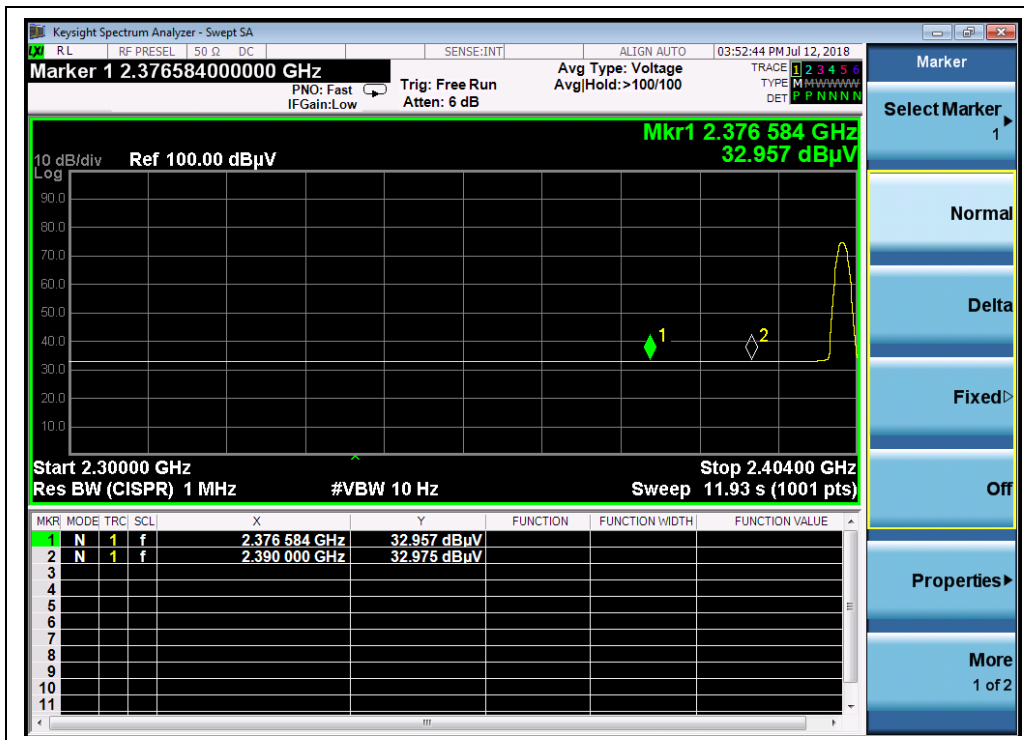

(Channel = 0, AVERAGE, 8-DPSK)

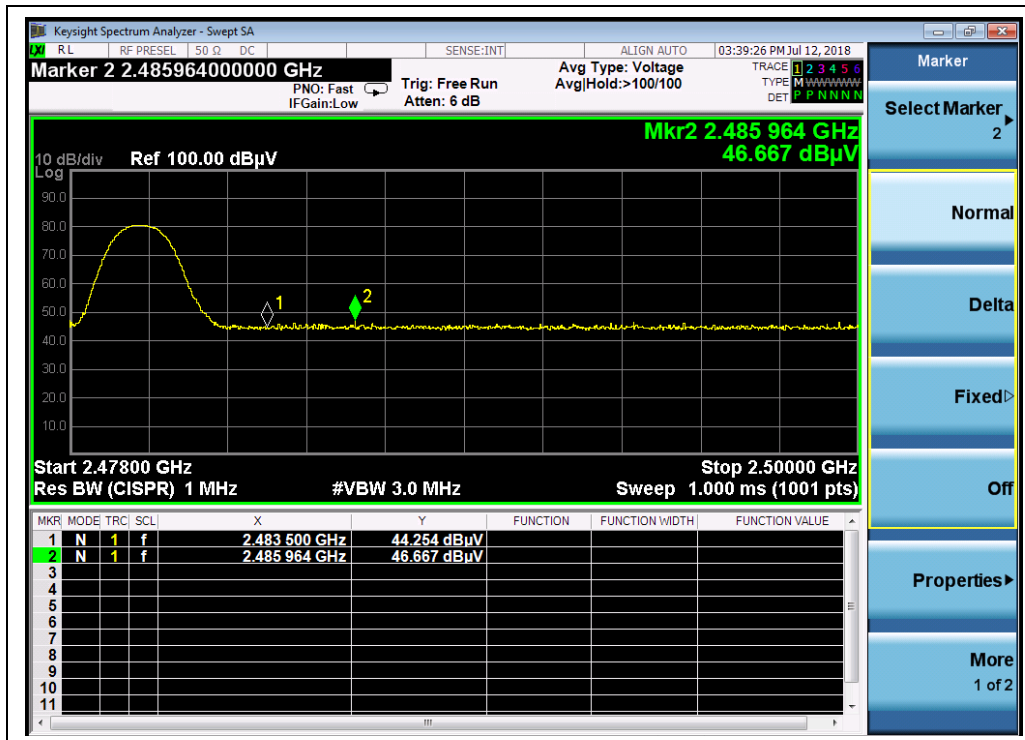

(Channel = 78, PEAK, 8-DPSK)

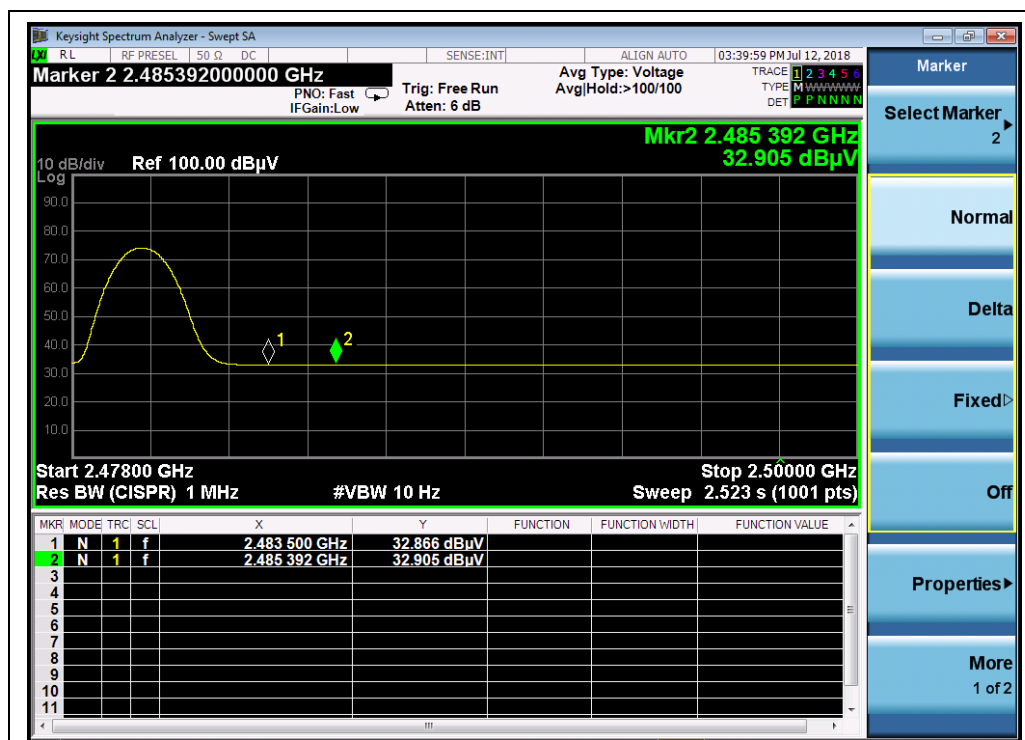

(Channel = 78, AVERAGE, 8-DPSK)



2.10. Radiated Emission

2.10.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:


1. For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)


2.10.2. Test Description

A. Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

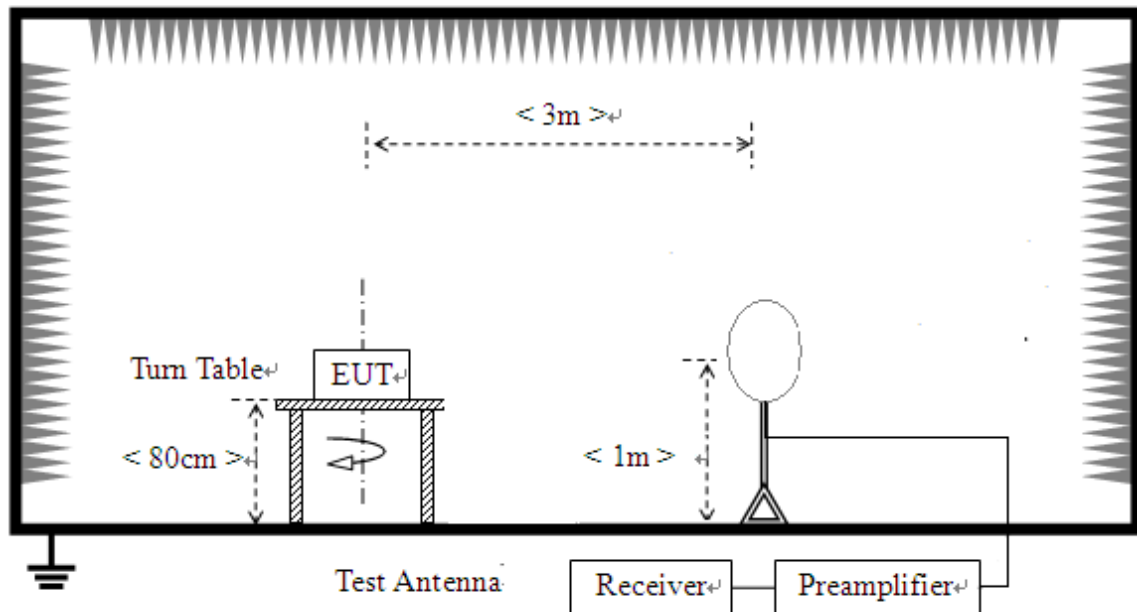

- 2) For radiated emissions from 30MHz to 1GHz

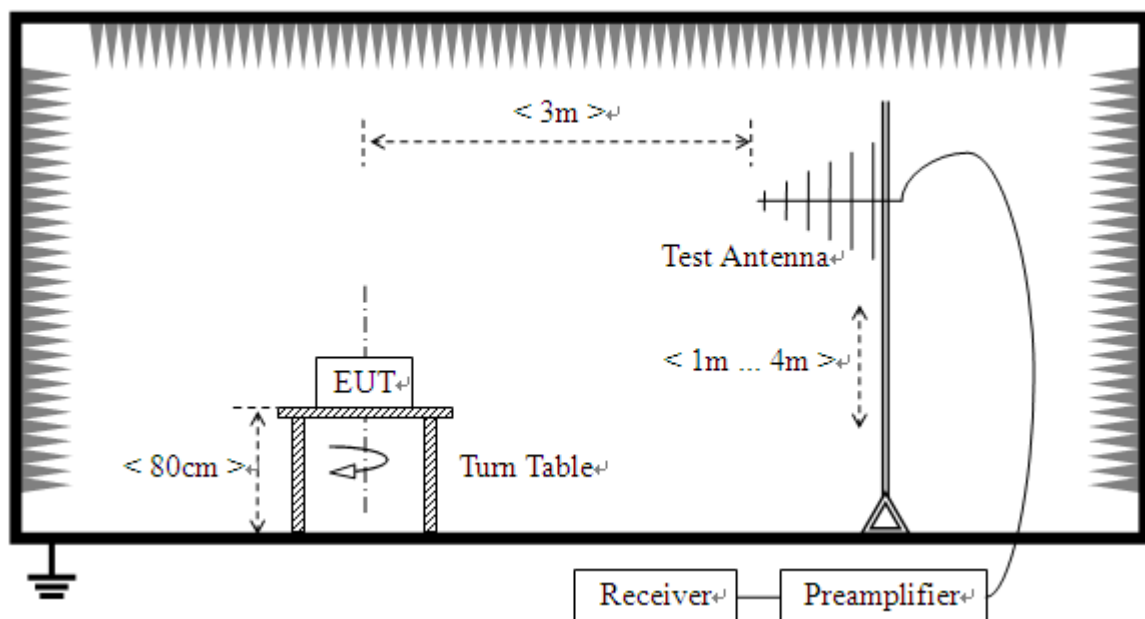

3) For radiated emissions above 1GHz

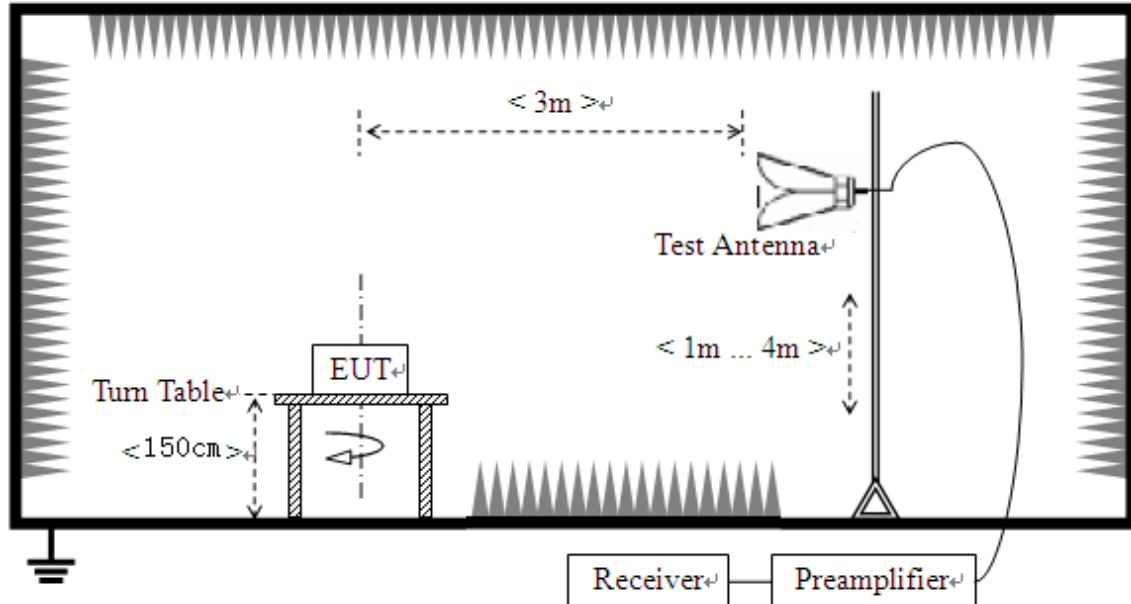

The RF absorbing material used on the reference ground plane and on the turntable have a maximum height (thickness) of 30 cm (12 in) and have a minimum-rated attenuation of 20 dB at all frequencies from 1 GHz to 18 GHz.

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10 (2013). For radiated emissions below or equal to 1GHz, the EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10.

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

(a) In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.

(b) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Place the test antenna at 3m away from area of the EUT, while keeping the test antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The test antenna may have to be



higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final test antenna elevation shall be that which maximizes the emissions. The test antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The emission levels at both horizontal and vertical polarizations should be tested.

B. Equipments List:

Please reference ANNEX A(1.5).

2.10.3. Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

2.10.4. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.


Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note2: For the frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note3: For the frequency, which started from 25GHz to 40GHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.


**GFSK Mode:**

Plots for Channel = 0

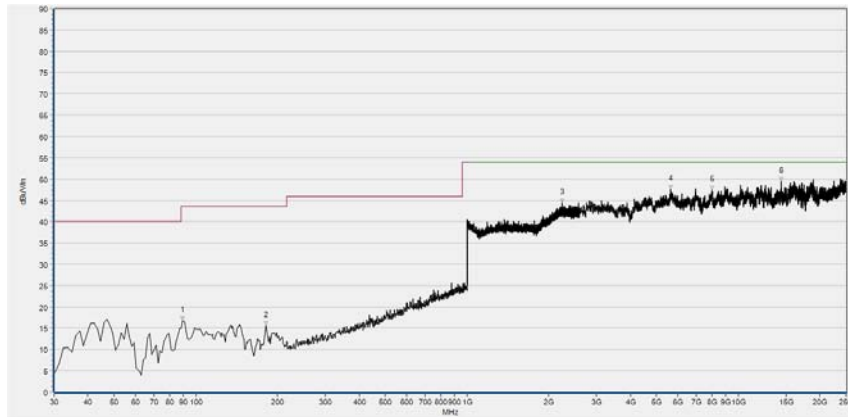

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
89.487	16.73	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
181.752	15.56	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2240.816	44.38	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5626.587	47.55	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8005.492	47.49	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
14417.130	49.39	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(30MHz to 25GHz, Antenna Horizontal, GFSK, channel 0)

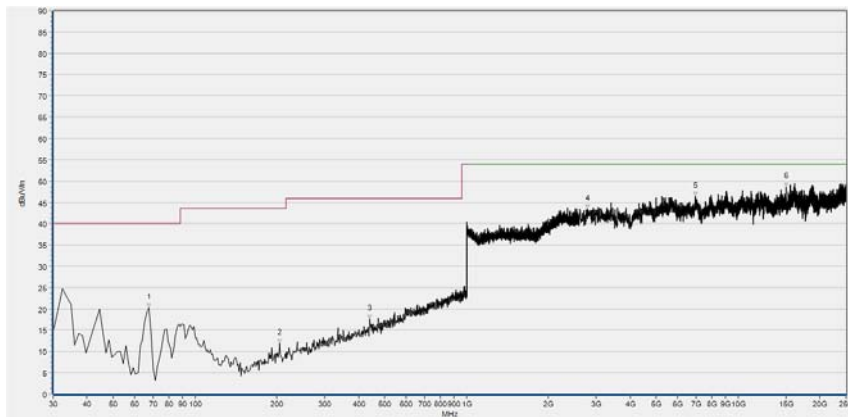

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
67.635	20.34	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
204.819	11.93	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
440.338	17.58	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2783.306	43.33	N/A	N/A	74.00	N/A	74.00	Vertical	PASS
6946.390	46.35	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
15020.004	48.65	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(30MHz to 25GHz, Antenna Vertical, GFSK, channel 0)

Plot for Channel = 39

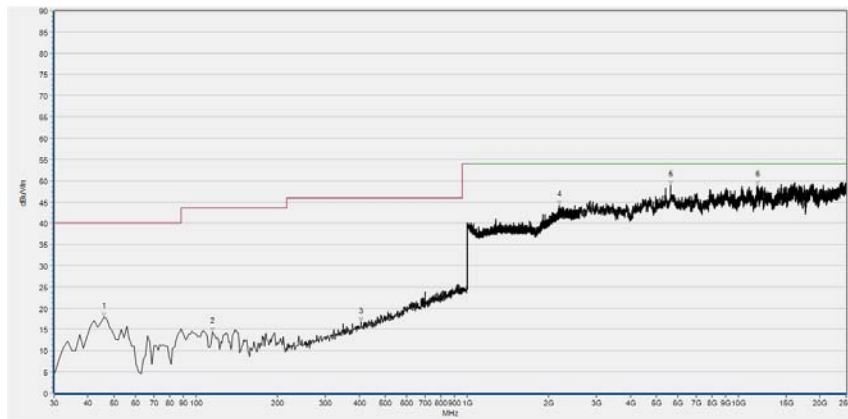

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
45.782	18.02	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
114.981	14.46	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
406.345	16.71	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2192.797	44.24	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5622.513	48.89	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
11761.229	48.92	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal, GFSK, channel 39)

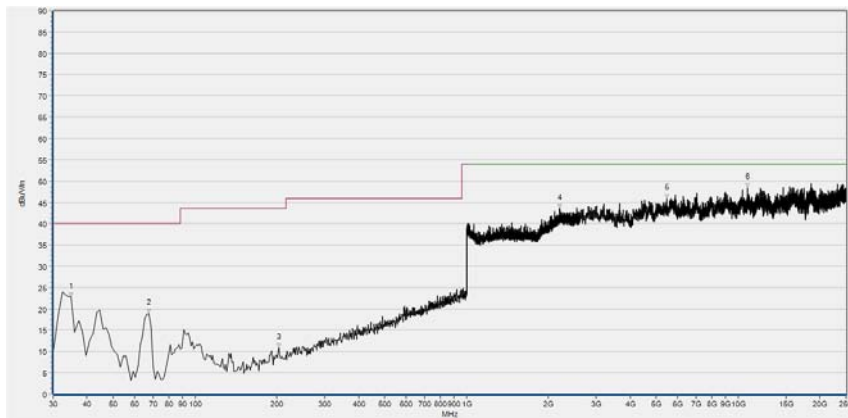


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
34.856	22.83	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
67.635	18.92	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
203.605	10.95	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2201.120	43.53	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5467.721	45.99	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10852.846	48.49	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical, GFSK, channel 39)




Plot for Channel = 78

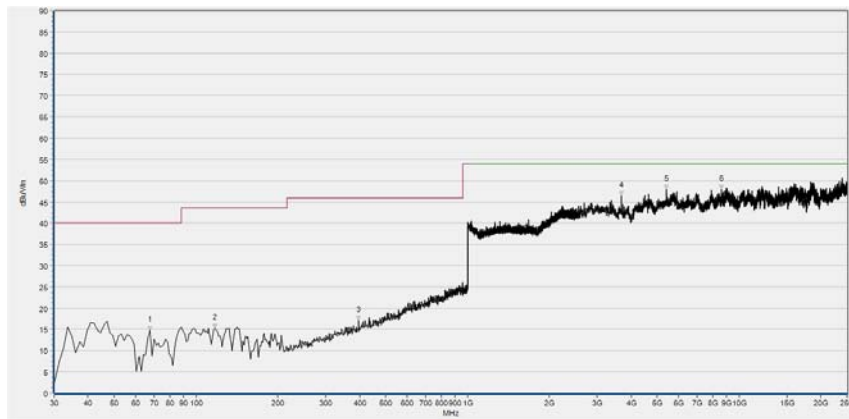

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
67.635	14.71	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
117.409	15.26	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
396.633	17.10	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
3691.689	46.38	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5402.546	47.90	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8600.218	47.93	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal, GFSK, channel 78)

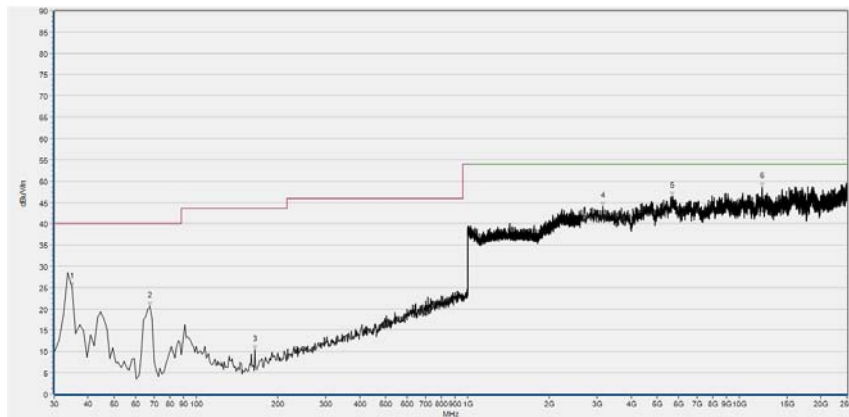


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
34.856	25.21	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
67.635	20.56	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
164.756	10.44	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
3153.992	44.08	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5679.542	46.36	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12193.017	48.56	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(30MHz to 25GHz, Antenna Vertical, GFSK, channel 78)

 **$\pi/4$ -DQPSK Mode:**

Plots for Channel = 0

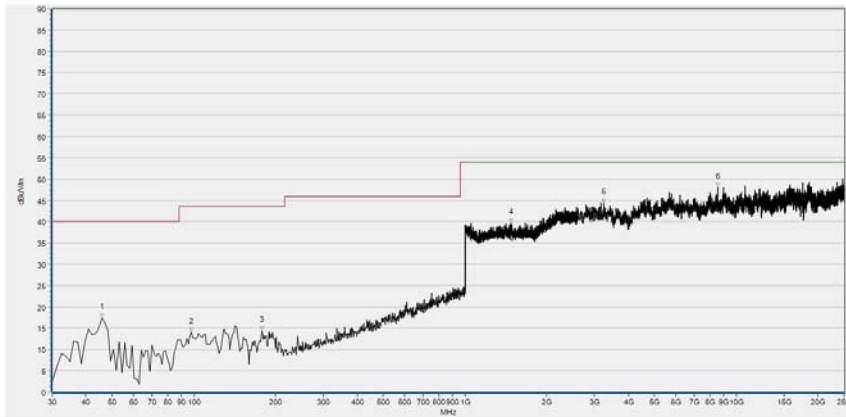

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
45.782	17.40	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
97.985	14.06	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
178.110	14.35	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1476.991	39.64	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3243.608	44.39	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8575.777	48.12	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

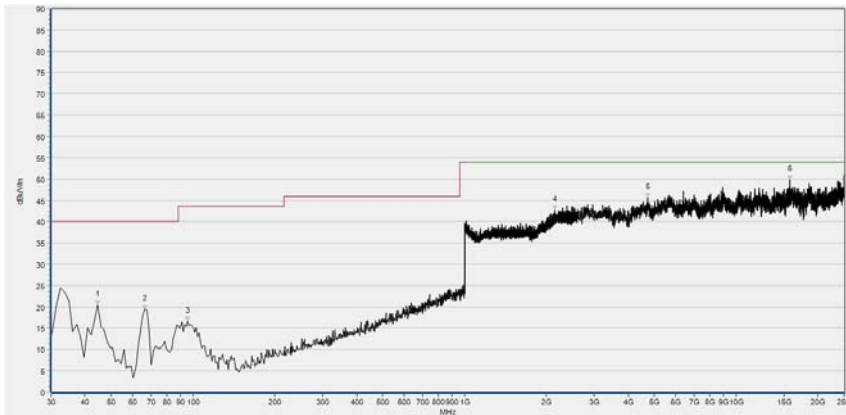
(30MHz to 25GHz, Antenna Horizontal @ $\pi/4$ -DQPSK, channel 0)

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
44.568	20.40	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
66.421	19.36	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
95.557	16.61	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2142.857	42.82	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4730.424	45.61	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
15757.301	49.77	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(30MHz to 25GHz, Antenna Vertical @ $\pi/4$ -DQPSK, channel 0)



Plot for Channel = 39

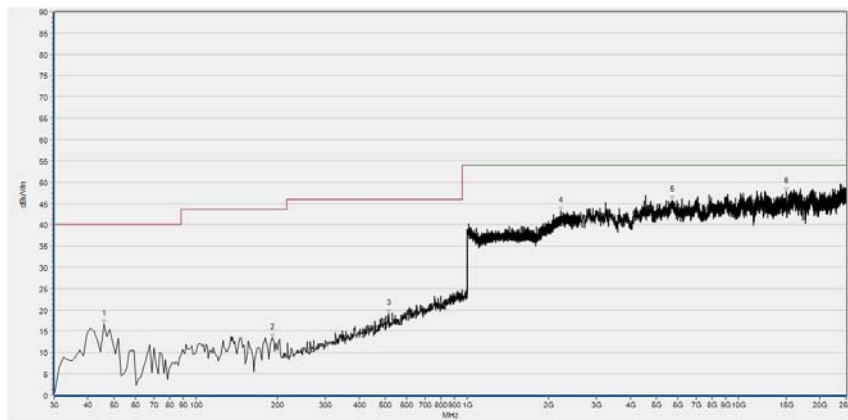

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
45.782	16.53	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
191.464	13.33	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
515.607	19.15	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2220.328	43.21	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5695.836	45.70	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
15011.857	47.69	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

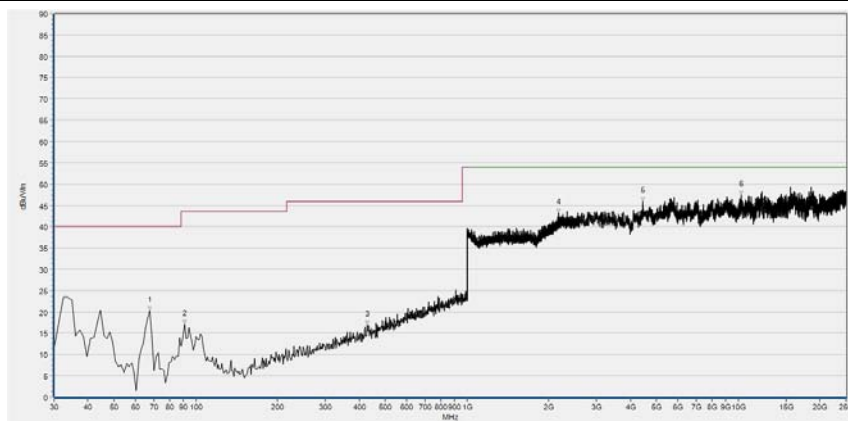
(30MHz to 25GHz, Antenna Horizontal @ $\pi/4$ -DQPSK, channel 39)

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
67.635	20.35	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
90.701	17.12	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
428.198	16.95	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2171.669	43.23	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4433.061	45.85	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10282.560	47.35	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(30MHz to 25GHz, Antenna Vertical @ $\pi/4$ -DQPSK, channel 39)



Plot for Channel = 78

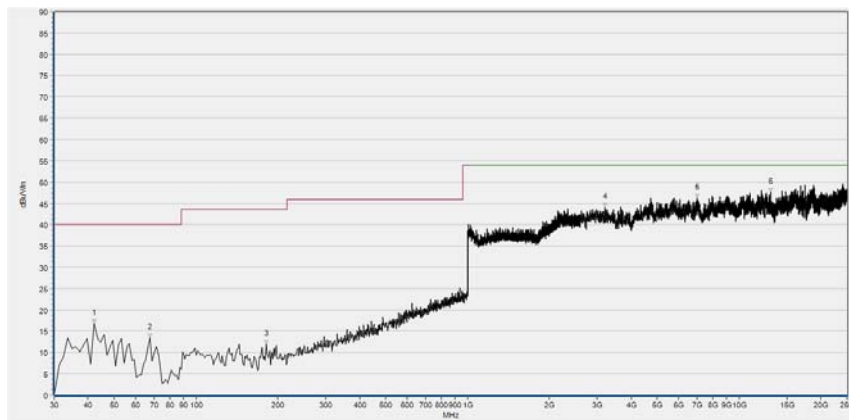

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
42.140	16.70	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
67.635	13.40	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
181.752	11.86	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
3211.020	44.08	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7007.492	46.29	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
13085.106	47.53	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

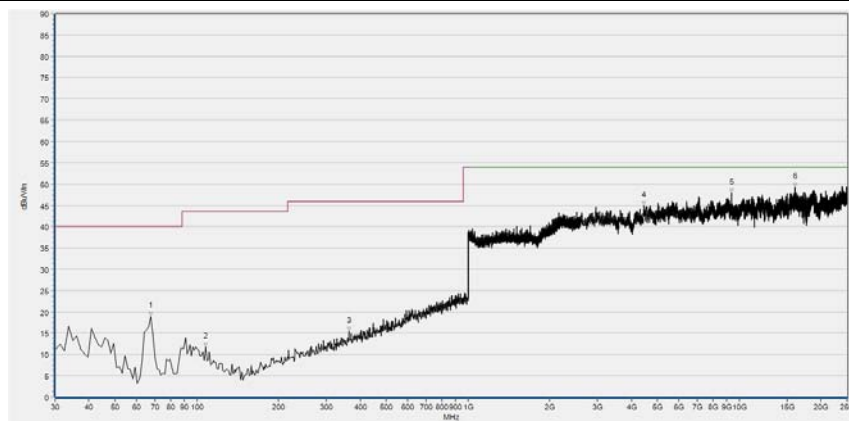
(30MHz to 25GHz, Antenna Horizontal @ $\pi/4$ -DQPSK, channel 78)

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
67.635	18.98	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
107.697	11.74	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
363.855	15.35	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
4457.501	44.86	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
9366.030	47.87	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
16038.371	49.21	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @ $\pi/4$ -DQPSK, channel 78)


**8-DPSK Mode:**

Plots for Channel = 0

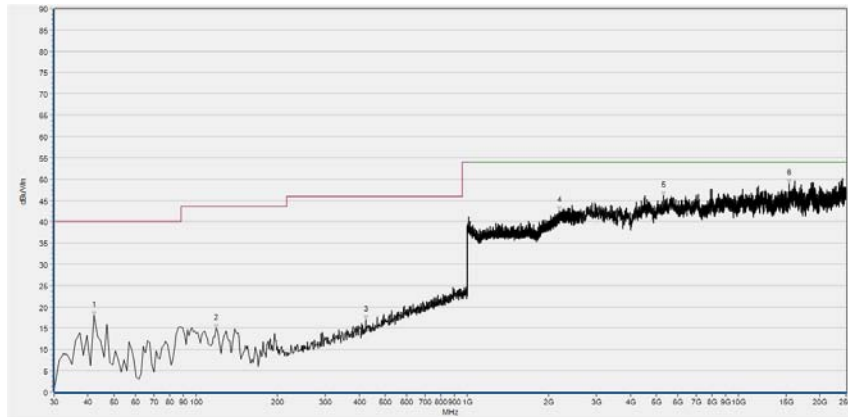


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
42.140	17.86	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
118.623	14.87	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
423.342	16.92	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2187.035	42.61	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5292.562	46.09	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
15439.571	48.91	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @ 8-DPSK, channel 0)

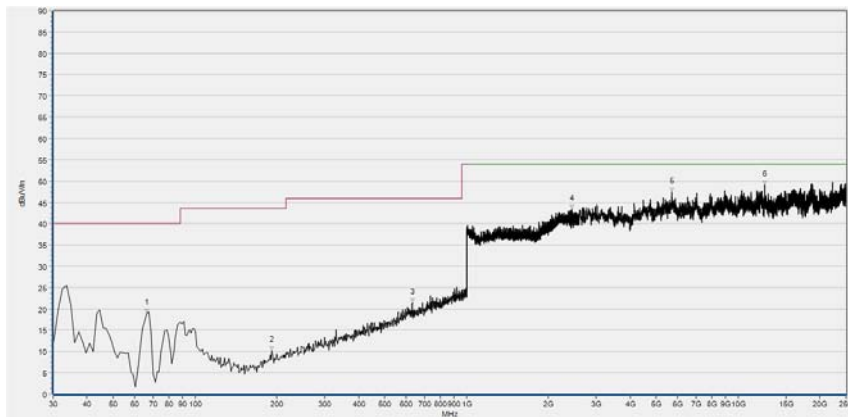


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
66.421	18.91	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
191.464	10.17	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
630.939	21.42	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2445.058	43.40	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5703.983	47.41	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12514.821	49.07	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @ 8-DPSK, channel 0)

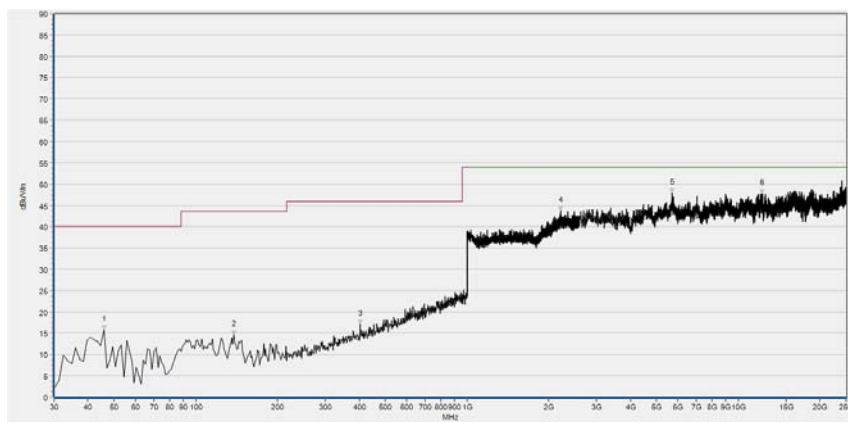Plot for Channel = 39

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
45.782	15.76	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
138.048	14.57	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
402.703	17.11	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2218.407	43.76	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5712.129	48.01	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12197.090	47.73	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(30MHz to 25GHz, Antenna Horizontal @ 8-DPSK, channel 39)

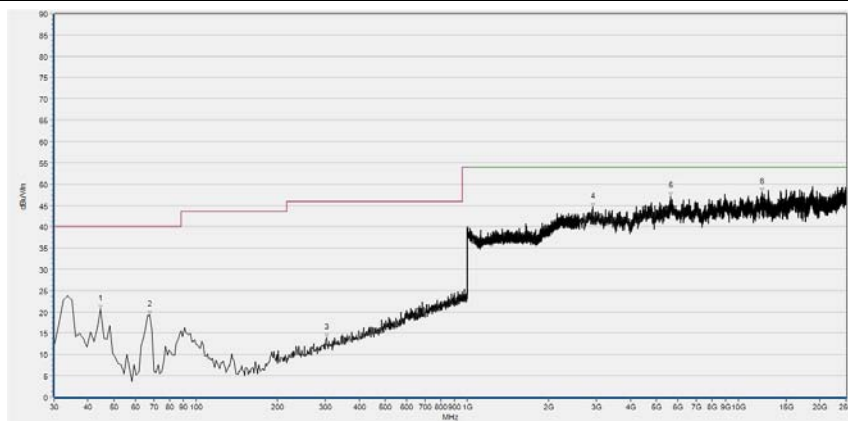

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
44.568	20.68	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
67.635	19.24	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
303.154	13.88	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2905.510	44.51	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5642.881	47.04	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12221.531	48.04	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(30MHz to 25GHz, Antenna Vertical @ 8-DPSK, channel 39)

Plot for Channel = 78

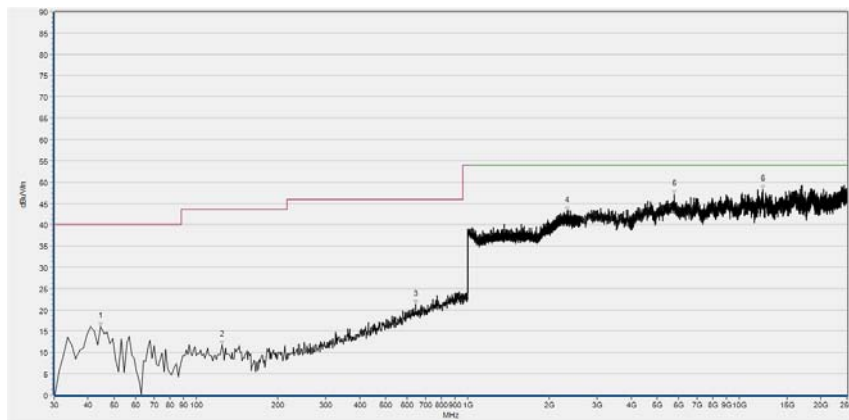

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
44.568	16.08	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
124.693	11.67	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
643.079	21.30	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2327.251	43.21	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5756.938	47.13	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12201.164	48.21	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @ 8-DPSK, channel 78)

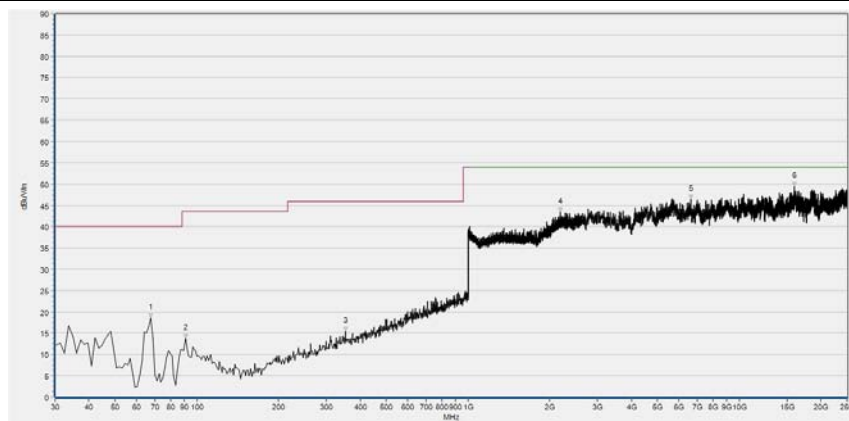

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
67.635	18.68	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
90.701	13.77	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
352.929	15.45	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2189.596	43.34	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
6636.807	46.35	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
15973.195	49.39	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @ 8-DPSK, channel 78)

Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Number of Hopping Frequency	±5%
Peak Output Power	±2.22dB
20dB Bandwidth	±5%
Carrier Frequency Separation	±5%
Time of Occupancy (Dwell time)	±5%
Conducted Spurious Emission	±2.77 dB
Restricted Frequency Bands	±5%
Radiated Emission	±2.95dB
Conducted Emission	±2.44dB

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2



Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Department:	Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China
Responsible Test Lab Manager:	Mr. Su Feng
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China

3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.



4. Test Equipments Utilized

4.1 Conducted Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Bluetooth Base Station	6K00006210	MT8852B	Anritsu	2018.04.17	2019.04.16
Power Splitter	NW521	1506A	Weinschel	2018.04.17	2019.04.16
Attenuator 1	(N/A.)	10dB	Resnet	2018.04.17	2019.04.16
Attenuator 2	(N/A.)	3dB	Resnet	2018.04.17	2019.04.16
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2017.12.03	2018.12.02
RF cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial cable	CB02	RF02	Morlab	N/A	N/A
SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

4.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Receiver	MY56400093	N9038A	KEYSIGHT	2018.05.08	2019.05.07
LISN	812744	NSLK 8127	Schwarzbeck	2018.05.08	2019.05.07
Pulse Limiter (20dB)	9391	VTSD 9561-D	Schwarzbeck	2018.05.08	2019.05.07
Coaxial cable(BNC) (30MHz-26GHz)	CB01	EMC01	Morlab	N/A	N/A

4.3 Auxiliary Test Equipment

Equipment Name	Model No.	Brand Name	Manufacturer	Cal.Date	Cal. Due
Computer	T430i	Think Pad	Lenovo	N/A	N/A

4.4 List of Software Used

Description	Manufacturer	Software Version
Test system	Tonscend	V2.6
Power Panel	Agilent	V3.8
MORLAB EMCR V1.2	MORLAB	V 1.0

**4.5 Radiated Test Equipments**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Receiver	MY54130016	N9038A	Agilent	2018.05.08	2019.05.07
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2018.05.08	2019.05.07
Test Antenna - Horn	9170C-531	BBHA9170	Schwarzbeck	2017.09.13	2018.09.12
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2018.03.03	2019.03.02
Test Antenna - Horn	01774	BBHA 9120D	Schwarzbeck	2017.09.13	2018.09.12
Coaxial cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
1-18GHz pre-Amplifier	MA02	TS-PR18	Rohde& Schwarz	2018.05.08	2019.05.07
18-26.5GHz pre-Amplifier	MA03	TS-PR18	Rohde& Schwarz	2018.05.08	2019.05.07
Anechoic Chamber	N/A	9m*6m*6m	CRT	2017.11.19	2020.11.18

_____ END OF REPORT _____