



TESTING LABORATORY
CERTIFICATE #4820.01



FCC PART 15.247 TEST REPORT

For

George Patton Associates, Inc

81 Commerce Drive, Fall River, Massachusetts, United States

FCC ID: 2ASCB-DGFS43IN

Report Type: Original Report	Product Name: 43" Indoor Floor Standing Digital Signage
Report Number:	<u>RS190201050-00A</u>
Report Date:	<u>2019-04-24</u>
Reviewed By:	Dean Lau <i>Dean Lau</i> RF Supervisor
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “**”.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	7
SUPPORT EQUIPMENT LIST AND DETAILS	7
SUPPORT CABLE LIST AND DETAILS	7
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS	9
FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	10
APPLICABLE STANDARD	10
FCC §15.203 - ANTENNA REQUIREMENT.....	11
APPLICABLE STANDARD	11
ANTENNA CONNECTOR CONSTRUCTION	11
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	12
APPLICABLE STANDARD	12
EUT SETUP	12
EMI TEST RECEIVER SETUP.....	12
TEST PROCEDURE	12
CORRECTED AMPLITUDE & MARGIN CALCULATION	13
TEST EQUIPMENT LIST AND DETAILS.....	13
TEST DATA	13
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	22
APPLICABLE STANDARD	22
EUT SETUP.....	22
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	23
TEST PROCEDURE	23
TEST EQUIPMENT LIST AND DETAILS.....	23
CORRECTED AMPLITUDE & MARGIN CALCULATION	24
TEST DATA	24
FCC §15.247(a) (1) - CHANNEL SEPARATION TEST	36
APPLICABLE STANDARD	36
TEST EQUIPMENT LIST AND DETAILS.....	36
TEST PROCEDURE	36
TEST DATA	36
FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING.....	42
APPLICABLE STANDARD	42
TEST PROCEDURE	42
TEST EQUIPMENT LIST AND DETAILS.....	42

TEST DATA42

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST48

 APPLICABLE STANDARD48

 TEST PROCEDURE48

 TEST EQUIPMENT LIST AND DETAILS.....48

 TEST DATA48

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....52

 APPLICABLE STANDARD52

 TEST PROCEDURE52

 TEST EQUIPMENT LIST AND DETAILS.....52

 TEST DATA52

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT58

 APPLICABLE STANDARD58

 TEST PROCEDURE58

 TEST EQUIPMENT LIST AND DETAILS.....58

 TEST DATA58

FCC §15.247(d) - BAND EDGES TESTING60

 APPLICABLE STANDARD60

 TEST PROCEDURE60

 TEST EQUIPMENT LIST AND DETAILS.....60

 TEST DATA61

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:	43" Indoor Floor Standing Digital Signage
EUT Model:	DGFSTCH43
Multiple Models:	DGFSNT43
Rated Input Voltage:	100-240VAC 50/60Hz
External Dimension:	640mm(L)* 50mm(W)* 1760 mm(H)
Serial Number:	190201050
EUT Received Date:	2019.02.13

Notes: Model DGFSTCH43 was selected for fully testing, the detailed information about the difference between DGFSNT43 and model DGFSTCH43 can be referred to the declaration letter which was stated and guaranteed by the manufacturer.

Objective

This report is prepared on behalf of **George Patton Associates, Inc** in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communications Commission's rules.

The tests were performed in order to determine the Bluetooth BDR and EDR mode of EUT compliance with FCC Rules Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15C DTS submissions with FCC ID: 2ASCB-DGFS43IN.

Test Methodology

All measurements detailed in this test report were performed in accordance with ANSI C63.10-2013 "American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices".

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB,200M~1GHz: 5.92 dB,1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in engineering mode.

EUT Exercise Software

The software “RFTestTool V5.6” was used for testing, which was configured the maximum power level as default setting.

Mode	Packet type	Channel	Frequency (MHz)	Packet length	Power Level
GFSK	DH1	Low	2402	27	0(Specify Power Table Index)
		Middle	2441	27	0(Specify Power Table Index)
		High	2480	27	0(Specify Power Table Index)
	DH3	Low	2402	183	0(Specify Power Table Index)
		Middle	2441	183	0(Specify Power Table Index)
		High	2480	183	0(Specify Power Table Index)
	DH5	Low	2402	339	0(Specify Power Table Index)
		Middle	2441	339	0(Specify Power Table Index)
		High	2480	339	0(Specify Power Table Index)
$\pi/4$ DQPSK	2DH1	Low	2402	54	0(Specify Power Table Index)
		Middle	2441	54	0(Specify Power Table Index)
		High	2480	54	0(Specify Power Table Index)
	2DH3	Low	2402	367	0(Specify Power Table Index)
		Middle	2441	367	0(Specify Power Table Index)
		High	2480	367	0(Specify Power Table Index)
	2DH5	Low	2402	679	0(Specify Power Table Index)
		Middle	2441	679	0(Specify Power Table Index)
		High	2480	679	0(Specify Power Table Index)
8DPSK	3DH1	Low	2402	83	0(Specify Power Table Index)
		Middle	2441	83	0(Specify Power Table Index)
		High	2480	83	0(Specify Power Table Index)
	3DH3	Low	2402	552	0(Specify Power Table Index)
		Middle	2441	552	0(Specify Power Table Index)
		High	2480	552	0(Specify Power Table Index)
	3DH5	Low	2402	1021	0(Specify Power Table Index)
		Middle	2441	1021	0(Specify Power Table Index)
		High	2480	1021	0(Specify Power Table Index)

Equipment Modifications

No modification was made to the EUT.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Sandisk	U-DISK	N/A	N/A
Four-Faith	Router	F7836	N/A
ThinkPad	Notebook	E450	N/A


Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From	To
Power cable	No	Yes	1.5	LISN	EUT
RJ45	No	No	5	EUT	Router
HDMI cable	Yes	Yes	1.4	EUT	Notebook

Block Diagram of Test Setup


Conducted emission:

HDMI Input:

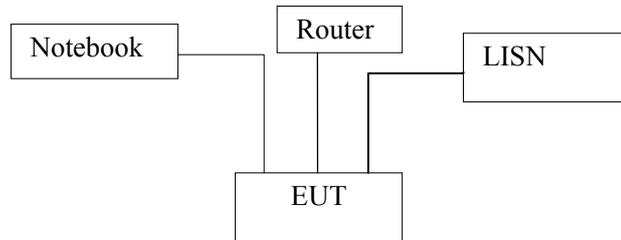

EUT with wheel on the floor

USB Input:

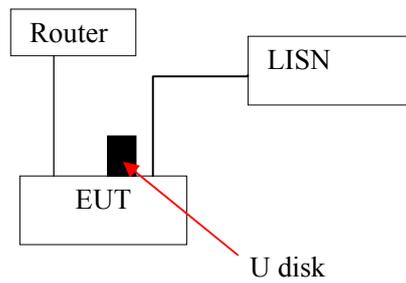

EUT with wheel on the floor

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(1)	20 dB Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band Edges	Compliance

FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247(i) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission’s guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculation formula:

Prediction of power density at the distance of the applicable MPE limit

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Mode	Frequency (MHz)	Antenna Gain		Conducted output power including Tune-up Tolerance		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
Wi-Fi	2412-2462	5	3.16	16	39.81	20	0.025	1.0
Bluetooth LE	2402-2480	5	3.16	-1	0.79	20	0.001	1.0
Bluetooth	2402-2480	5	3.16	3	2.00	20	0.001	1.0

Note: All modes can’t transmit simultaneously.

Result: The device meet FCC MPE at 20 cm distance

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one external antenna arrangement for BT, and the antenna gain is 5 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207(a)

EUT Setup

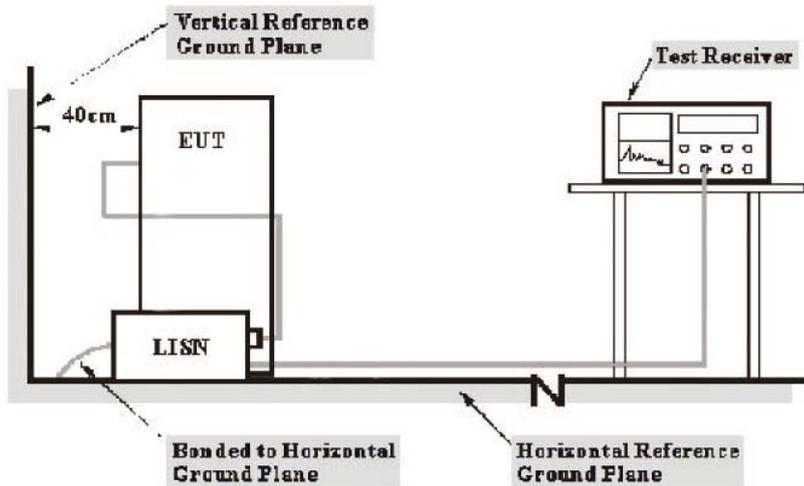

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 30 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main LISN with a 120 V/60 Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Herein,

V_C : corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN or ISN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2018-12-11	2019-12-11
R&S	L.I.S.N	ESH2-Z5	892107/021	2018-09-25	2019-09-25
R&S	Two-line V-network	ENV 216	101614	2018-12-08	2019-12-08
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-01	2018-09-05	2019-09-05

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data


Environmental Conditions

Temperature:	30.5 °C
Relative Humidity:	56 %
ATM Pressure:	101.5 kPa

The testing was performed by Lily Xie on 2019-04-22.

Test Mode: GFSK low channel transmitting was the worst


For Model DGFSTCH43 (HDMI):
AC120V, 60 Hz, Line:

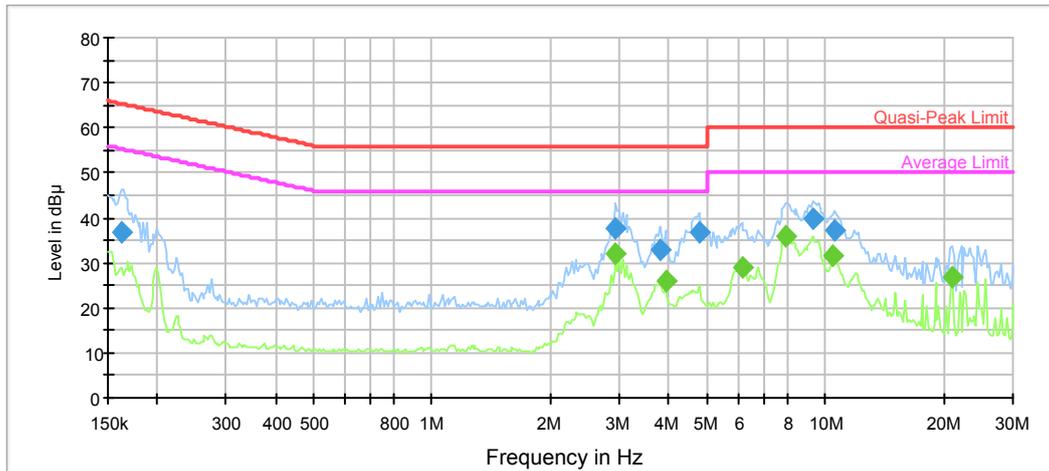

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.162429	36.6	9.000	L1	11.0	28.7	65.3	Compliance
2.938883	37.8	9.000	L1	9.8	18.2	56.0	Compliance
3.806607	33.0	9.000	L1	9.8	23.0	56.0	Compliance
4.785525	36.6	9.000	L1	9.8	19.4	56.0	Compliance
9.320982	39.9	9.000	L1	9.8	20.1	60.0	Compliance
10.608147	37.0	9.000	L1	9.8	23.0	60.0	Compliance

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
2.938883	32.1	9.000	L1	9.8	13.9	46.0	Compliance
3.921951	25.8	9.000	L1	9.8	20.2	46.0	Compliance
6.137111	29.1	9.000	L1	9.8	20.9	50.0	Compliance
7.949132	36.0	9.000	L1	9.8	14.0	50.0	Compliance
10.503116	31.7	9.000	L1	9.8	18.3	50.0	Compliance
21.077268	26.9	9.000	L1	10.1	23.1	50.0	Compliance

AC120V, 60 Hz, Neutral:

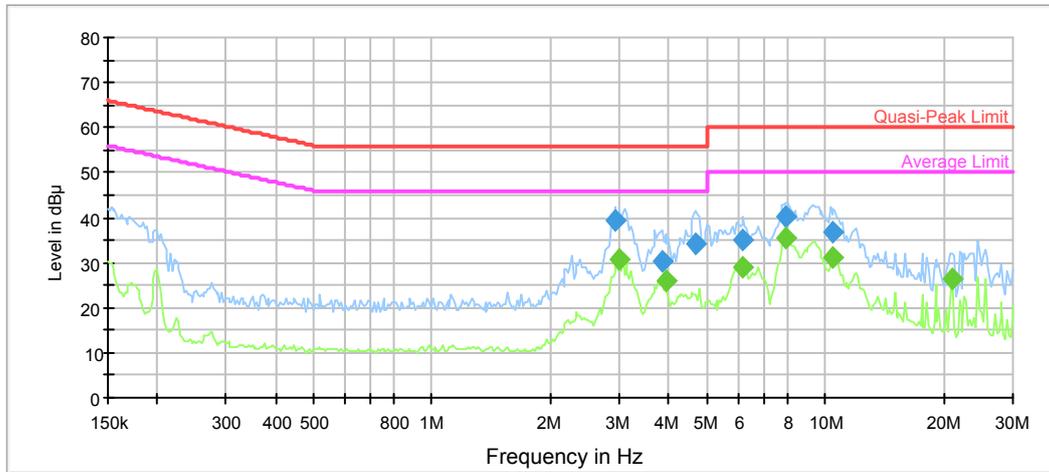


Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
2.938883	39.3	9.000	N	9.8	16.7	56.0	Compliance
3.844673	30.3	9.000	N	9.8	25.7	56.0	Compliance
4.691232	34.2	9.000	N	9.8	21.8	56.0	Compliance
6.198482	35.2	9.000	N	9.8	24.8	60.0	Compliance
7.949132	40.0	9.000	N	9.8	20.0	60.0	Compliance
10.503116	36.7	9.000	N	9.8	23.3	60.0	Compliance

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
2.997955	30.6	9.000	N	9.8	15.4	46.0	Compliance
3.921951	25.8	9.000	N	9.8	20.2	46.0	Compliance
6.198482	28.9	9.000	N	9.8	21.1	50.0	Compliance
7.949132	35.6	9.000	N	9.8	14.4	50.0	Compliance
10.503116	31.2	9.000	N	9.8	18.8	50.0	Compliance
21.077268	26.5	9.000	N	10.0	23.5	50.0	Compliance

For Model DGFSTCH43 (USB):


AC120V, 60 Hz, Line:

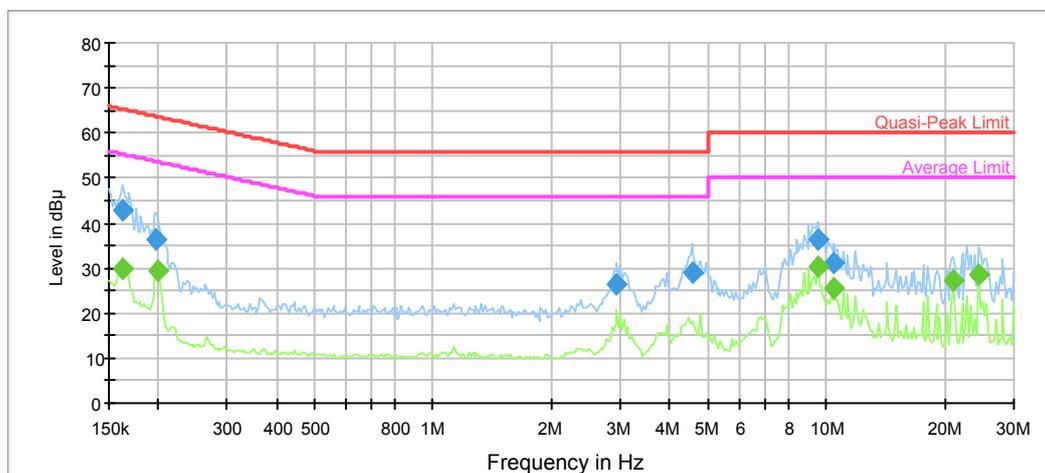

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.162429	43.0	9.000	L1	11.0	22.3	65.3	Compliance
0.198194	36.2	9.000	L1	10.6	27.5	63.7	Compliance
2.938883	26.4	9.000	L1	9.8	29.6	56.0	Compliance
4.553263	28.9	9.000	L1	9.8	27.1	56.0	Compliance
9.508334	36.3	9.000	L1	9.8	23.7	60.0	Compliance
10.503116	31.0	9.000	L1	9.8	29.0	60.0	Compliance

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.162429	29.8	9.000	L1	11.0	25.5	55.3	Compliance
0.200176	29.3	9.000	L1	10.6	24.3	53.6	Compliance
9.508334	30.3	9.000	L1	9.8	19.7	50.0	Compliance
10.503116	25.6	9.000	L1	9.8	24.4	50.0	Compliance
21.077268	27.3	9.000	L1	10.1	22.7	50.0	Compliance
24.470054	28.6	9.000	L1	10.1	21.4	50.0	Compliance


AC120V, 60 Hz, Neutral:

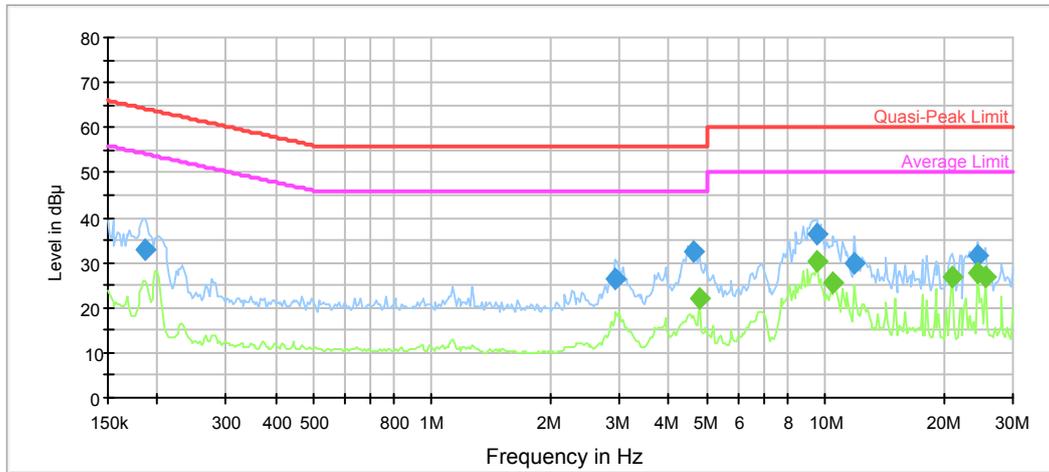

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.186708	32.8	9.000	N	10.7	31.4	64.2	Compliance
2.909785	26.2	9.000	N	9.8	29.8	56.0	Compliance
4.644784	32.4	9.000	N	9.8	23.6	56.0	Compliance
9.508334	36.3	9.000	N	9.8	23.7	60.0	Compliance
11.835174	29.8	9.000	N	9.8	30.2	60.0	Compliance
24.470054	31.6	9.000	N	10.1	28.4	60.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
4.785525	22.2	9.000	N	9.8	23.8	46.0	Compliance
9.508334	30.1	9.000	N	9.8	19.9	50.0	Compliance
10.503116	25.7	9.000	N	9.8	24.3	50.0	Compliance
21.077268	26.8	9.000	N	10.0	23.2	50.0	Compliance
24.470054	27.5	9.000	N	10.1	22.5	50.0	Compliance
25.463636	26.7	9.000	N	10.1	23.3	50.0	Compliance


For Model DGFSNT43 (HDMI):
AC120V, 60 Hz, Line:

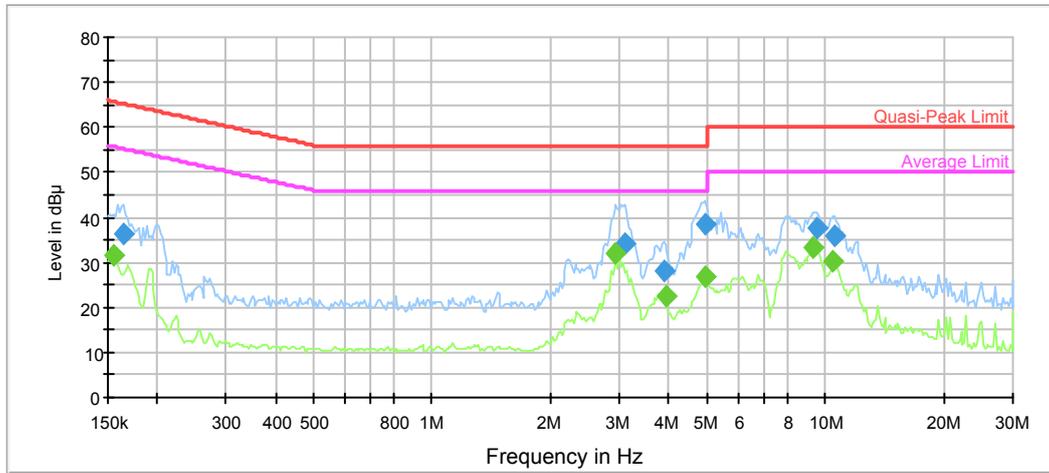

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.164053	36.1	9.000	L1	11.0	29.2	65.3	Compliance
3.088796	34.3	9.000	L1	9.8	21.7	56.0	Compliance
3.883120	28.1	9.000	L1	9.8	27.9	56.0	Compliance
4.930532	38.3	9.000	L1	9.8	17.7	56.0	Compliance
9.508334	37.8	9.000	L1	9.8	22.2	60.0	Compliance
10.608147	35.9	9.000	L1	9.8	24.1	60.0	Compliance

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.154545	31.6	9.000	L1	11.1	24.2	55.8	Compliance
2.938883	32.0	9.000	L1	9.8	14.0	46.0	Compliance
3.921951	22.5	9.000	L1	9.8	23.5	46.0	Compliance
4.930532	26.7	9.000	L1	9.8	19.3	46.0	Compliance
9.320982	33.1	9.000	L1	9.8	16.9	50.0	Compliance
10.503116	30.3	9.000	L1	9.8	19.7	50.0	Compliance


AC120V, 60 Hz, Neutral:

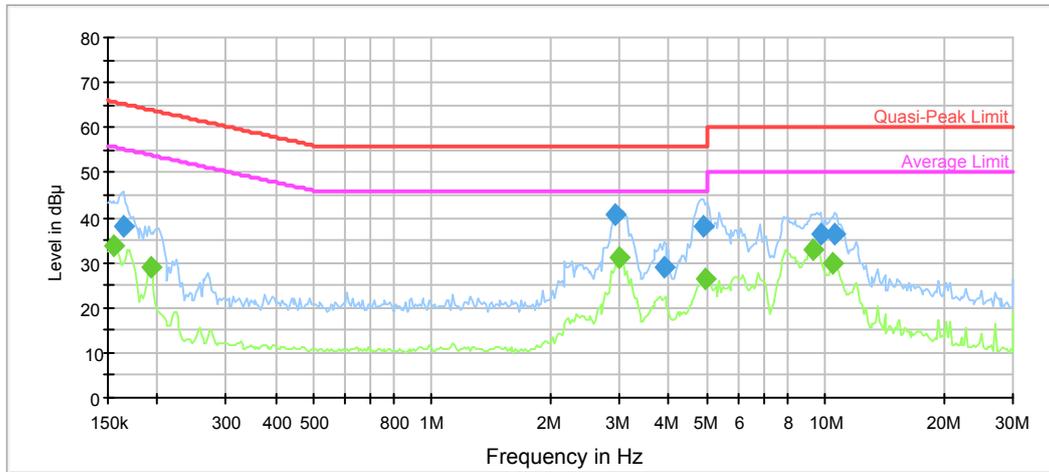

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.164053	38.0	9.000	N	11.0	27.3	65.3	Compliance
2.938883	40.7	9.000	N	9.8	15.3	56.0	Compliance
3.883120	28.8	9.000	N	9.8	27.2	56.0	Compliance
4.881714	37.9	9.000	N	9.8	18.1	56.0	Compliance
9.699451	36.5	9.000	N	9.8	23.5	60.0	Compliance
10.608147	36.3	9.000	N	9.8	23.7	60.0	Compliance

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.154545	33.7	9.000	N	11.1	22.1	55.8	Compliance
0.192365	29.0	9.000	N	10.7	24.9	53.9	Compliance
2.997955	31.3	9.000	N	9.8	14.7	46.0	Compliance
4.930532	26.2	9.000	N	9.8	19.8	46.0	Compliance
9.320982	33.0	9.000	N	9.8	17.0	50.0	Compliance
10.503116	29.7	9.000	N	9.8	20.3	50.0	Compliance


For Model DGFSNT43 (USB):
AC120V, 60 Hz, Line:

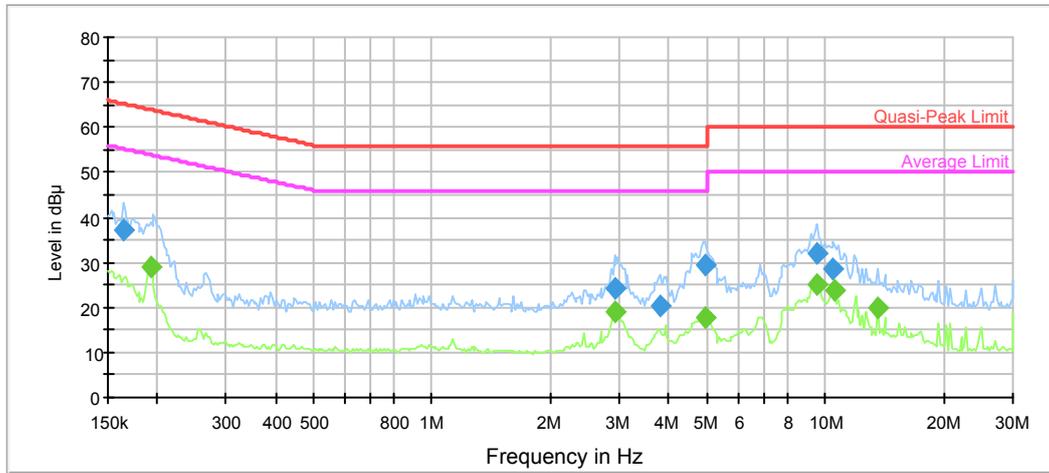

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.164053	37.1	9.000	L1	11.0	28.2	65.3	Compliance
2.909785	24.0	9.000	L1	9.8	32.0	56.0	Compliance
3.806607	20.4	9.000	L1	9.8	35.6	56.0	Compliance
4.930532	29.6	9.000	L1	9.8	26.4	56.0	Compliance
9.508334	32.2	9.000	L1	9.8	27.8	60.0	Compliance
10.503116	28.6	9.000	L1	9.8	31.4	60.0	Compliance

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.192365	28.9	9.000	L1	10.7	25.0	53.9	Compliance
2.938883	19.1	9.000	L1	9.8	26.9	46.0	Compliance
4.930532	17.9	9.000	L1	9.8	28.1	46.0	Compliance
9.508334	25.2	9.000	L1	9.8	24.8	50.0	Compliance
10.608147	23.6	9.000	L1	9.8	26.4	50.0	Compliance
13.604227	20.1	9.000	L1	9.9	29.9	50.0	Compliance

AC120V, 60 Hz, Neutral:

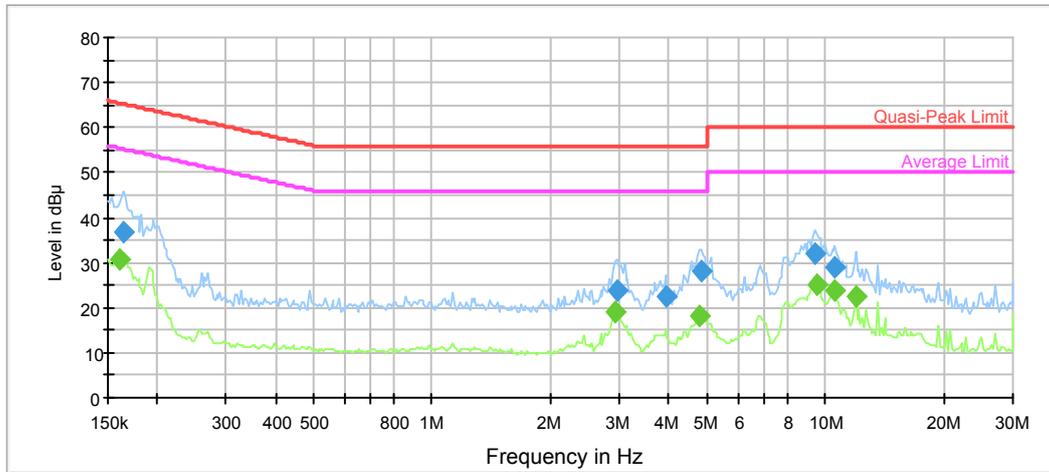

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.164053	36.9	9.000	N	11.0	28.4	65.3	Compliance
2.968272	23.9	9.000	N	9.8	32.1	56.0	Compliance
3.921951	22.5	9.000	N	9.8	33.5	56.0	Compliance
4.833381	27.9	9.000	N	9.8	28.1	56.0	Compliance
9.414192	32.1	9.000	N	9.8	27.9	60.0	Compliance
10.608147	29.0	9.000	N	9.8	31.0	60.0	Compliance

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.160820	30.7	9.000	N	11.0	24.7	55.4	Compliance
2.938883	18.8	9.000	N	9.8	27.2	46.0	Compliance
4.785525	18.0	9.000	N	9.8	28.0	46.0	Compliance
9.508334	25.0	9.000	N	9.8	25.0	50.0	Compliance
10.608147	23.9	9.000	N	9.8	26.1	50.0	Compliance
11.953526	22.6	9.000	N	9.8	27.4	50.0	Compliance


FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1GHz:

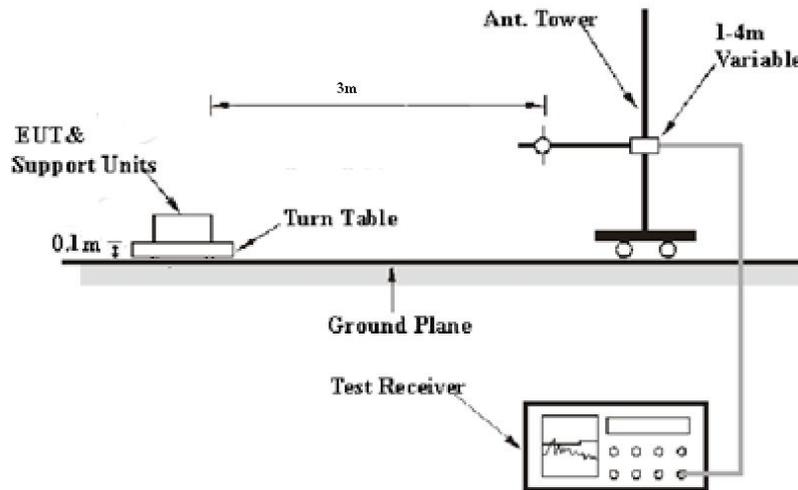

Above 1GHz:

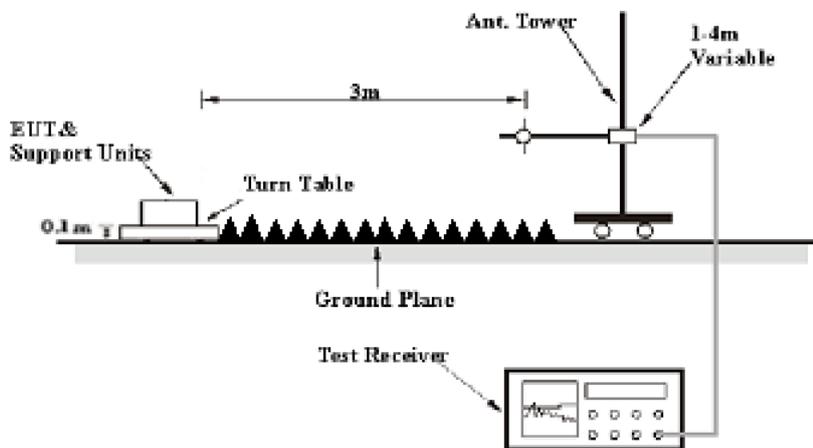

The radiated emission below 1GHz tests were performed in the 3 meters chamber test site A, above 1GHz tests were performed in the 3 meters chamber test site B, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

According to FCC public notice: DA-00-705, During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations :

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	AV

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz, peak and average detection modes for frequencies above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2018-12-11	2019-12-11
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
HP	Amplifier	8447D	2727A05902	2018-09-05	2019-09-05
Agilent	Spectrum Analyzer	E4440A	SG43360054	2019-01-04	2020-01-04
ETS-Lindgren	Horn Antenna	3115	000 527 35	2019-01-05	2021-01-04
MITEQ	Amplifier	AFS42-00101800-25-S-42	2001271	2018-09-05	2019-09-05
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2018-06-27	2019-06-27
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2016-11-18	2019-11-18
E-Microwave	Band-stop Filters	OBSF-2400-2483.5-S	OE01601525	2018-06-16	2019-06-16
Micro-tronics	High Pass Filter	HPM50111	S/N-G217	2018-06-16	2019-06-16
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-2.4J2.4J-50	C-0700-02	2018-06-27	2019-06-27
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Data

Environmental Conditions

Temperature:	26.5 °C
Relative Humidity:	42 %
ATM Pressure:	101.4 kPa


* The testing was performed by Tyler Pan & Vem Shen on 2019-04-22.

Test Mode: Transmitting

1) 30MHz-1GHz (8-DPSK Low channel was the worst)


For Model DGFSNT43 (USB Input):

Horizontal:

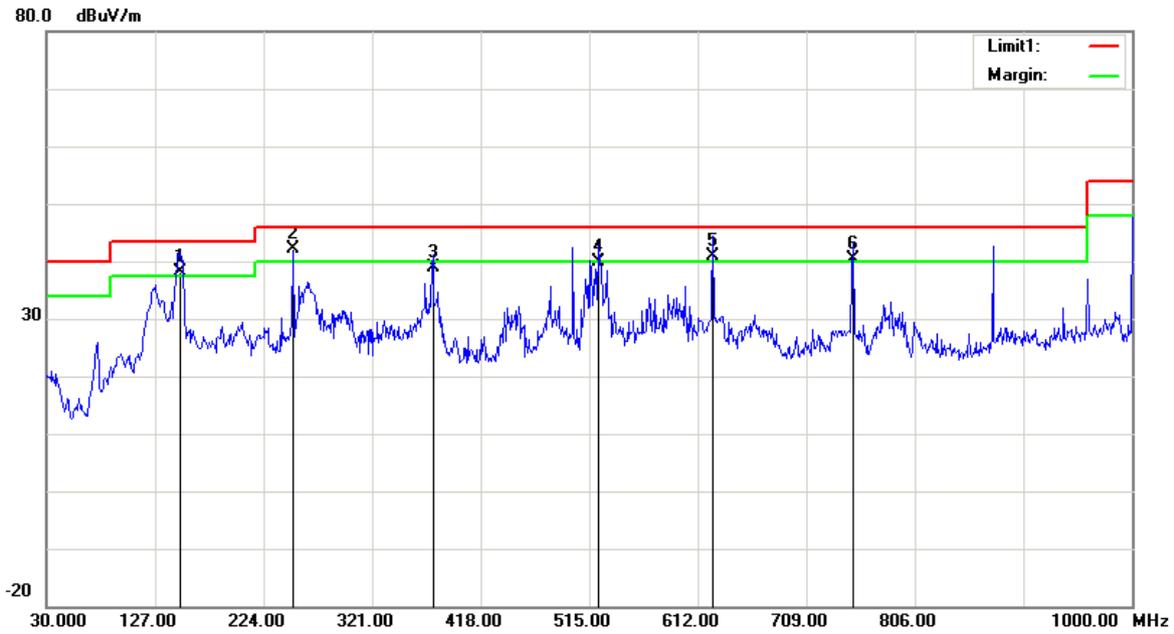

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
149.3100	51.00	QP	-12.80	38.20	43.50	5.30
250.1900	55.53	QP	-13.33	42.20	46.00	3.80
375.3200	47.50	QP	-8.70	38.80	46.00	7.20
522.7600	45.21	QP	-5.31	39.90	46.00	6.10
625.5800	44.09	QP	-3.09	41.00	46.00	5.00
750.7100	41.47	QP	-1.17	40.30	46.00	5.70


Vertical:

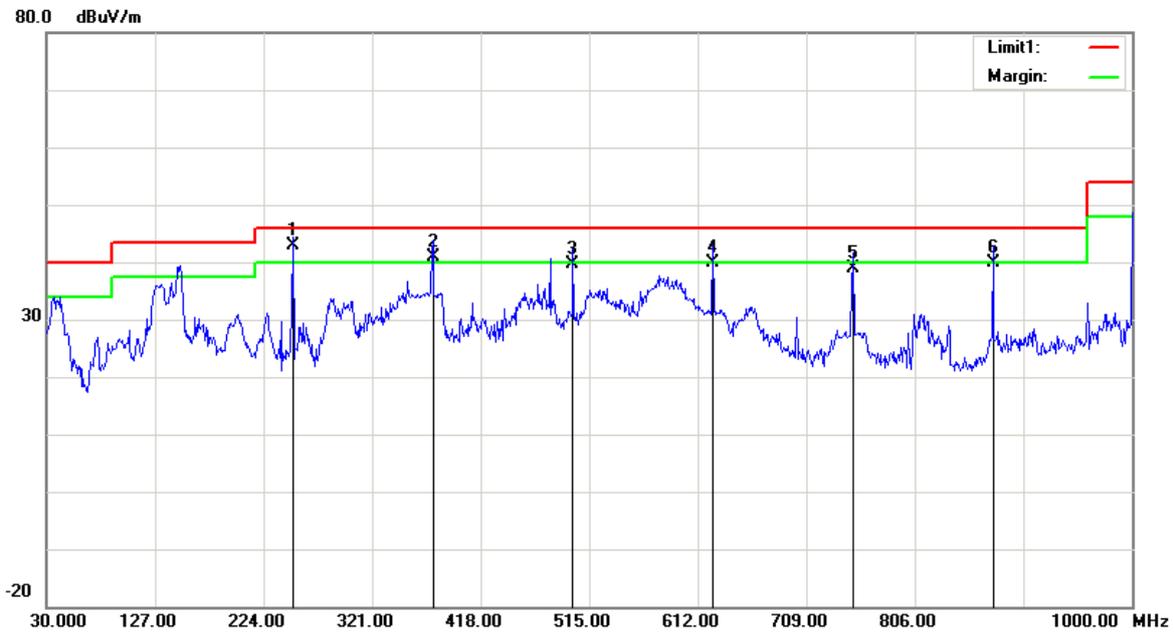

Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
250.1900	56.13	QP	-13.33	42.80	46.00	3.20
375.3200	49.60	QP	-8.70	40.90	46.00	5.10
500.4500	45.68	QP	-6.08	39.60	46.00	6.40
625.5800	43.09	QP	-3.09	40.00	46.00	6.00
750.7100	39.97	QP	-1.17	38.80	46.00	7.20
875.8400	39.21	QP	0.69	39.90	46.00	6.10


For Model DGFSNT43 (HDMI Input):

Horizontal:

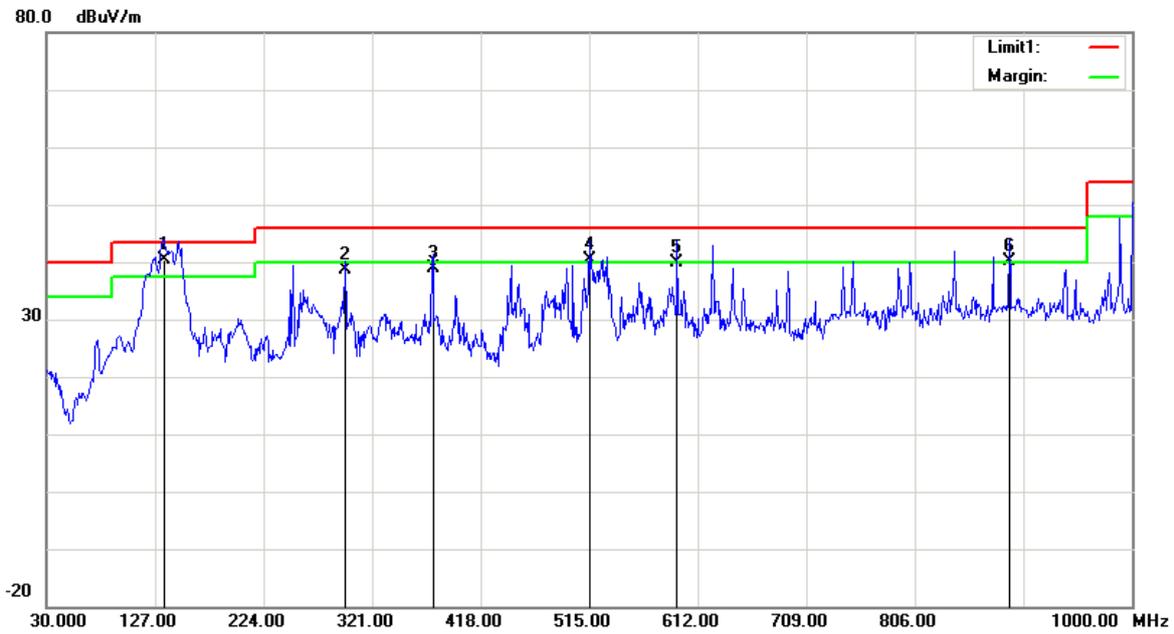

Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
134.7600	53.37	QP	-13.07	40.30	43.50	3.20
296.7500	49.63	QP	-11.03	38.60	46.00	7.40
375.3200	47.50	QP	-8.70	38.80	46.00	7.20
515.0000	45.91	QP	-5.61	40.30	46.00	5.70
593.5700	43.40	QP	-3.40	40.00	46.00	6.00
890.3900	39.17	QP	1.03	40.20	46.00	5.80

Vertical:

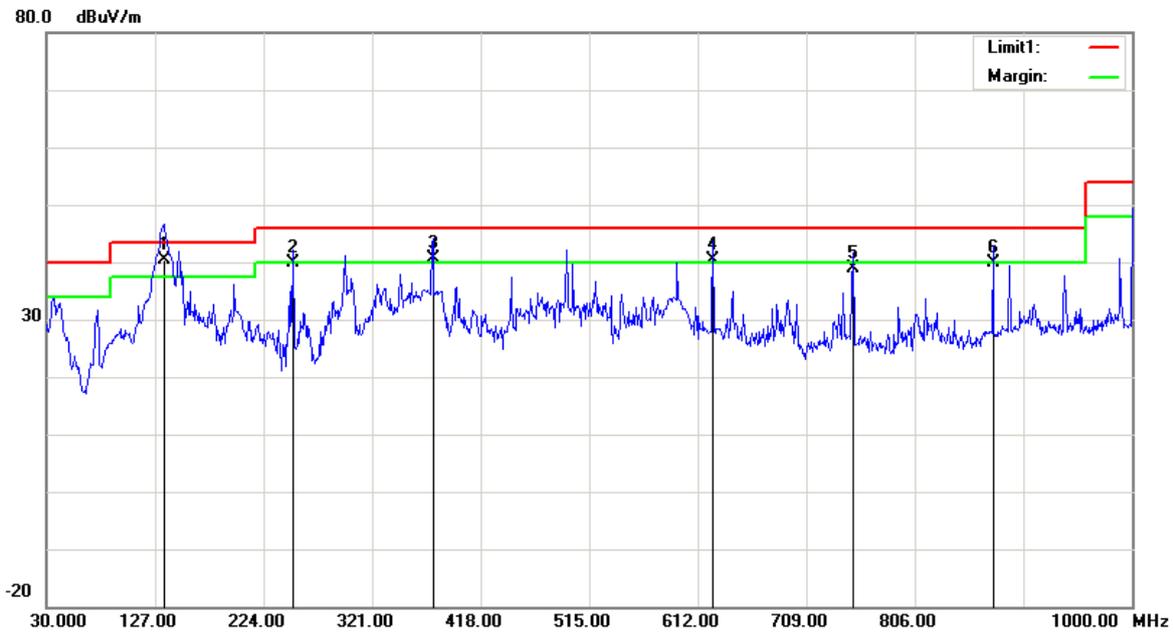

Frequency (MHz)	Receiver Reading (dBµV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)
134.7600	53.57	QP	-13.07	40.50	43.50	3.00
250.1900	53.13	QP	-13.33	39.80	46.00	6.20
375.3200	49.30	QP	-8.70	40.60	46.00	5.40
625.5800	43.59	QP	-3.09	40.50	46.00	5.50
750.7100	40.07	QP	-1.17	38.90	46.00	7.10
875.8400	39.21	QP	0.69	39.90	46.00	6.10


For Model DGFSTCH43 (USB Input):

Horizontal:



Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
133.7900	53.33	QP	-13.13	40.20	43.50	3.30
200.7200	52.90	QP	-12.90	40.00	43.50	3.50
262.8000	51.11	QP	-12.51	38.60	46.00	7.40
326.8200	48.39	QP	-10.09	38.30	46.00	7.70
529.5500	44.85	peak	-5.06	39.79	46.00	6.21
750.7100	40.77	QP	-1.17	39.60	46.00	6.40


Vertical:

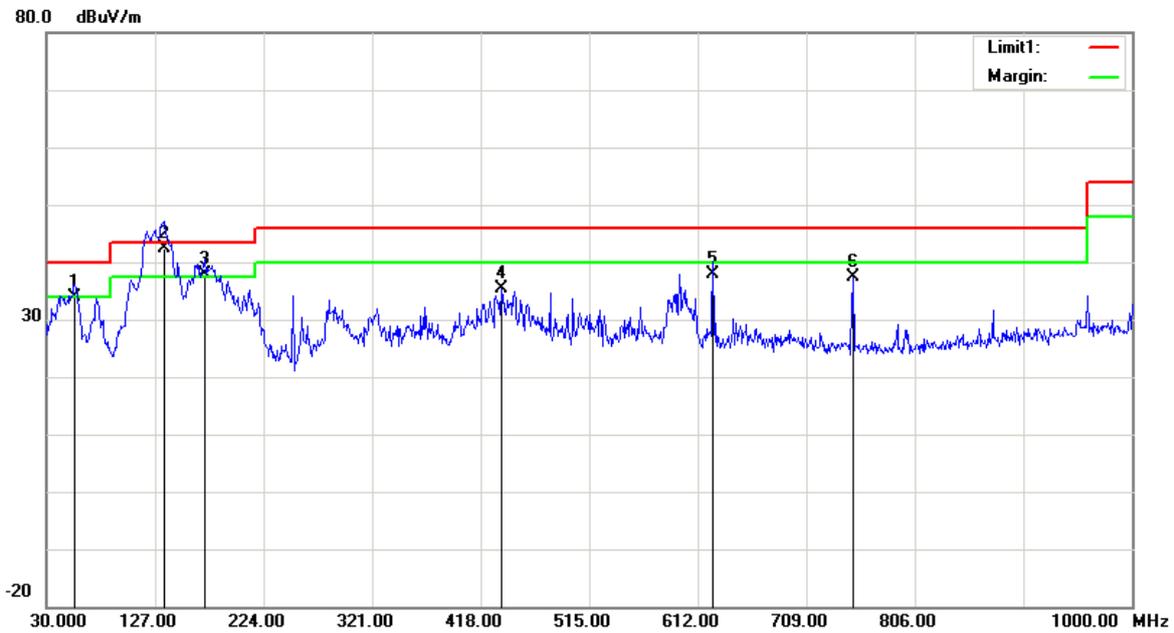

Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
55.2200	53.93	QP	-20.03	33.90	40.00	6.10
134.7600	55.47	QP	-13.07	42.40	43.50	1.10
171.6200	50.95	QP	-12.95	38.00	43.50	5.50
436.4300	43.19	peak	-7.70	35.49	46.00	10.51
625.5800	41.09	QP	-3.09	38.00	46.00	8.00
750.7100	38.45	peak	-1.17	37.28	46.00	8.72


For Model DGFSTCH43 (HDMIInput):

Horizontal:

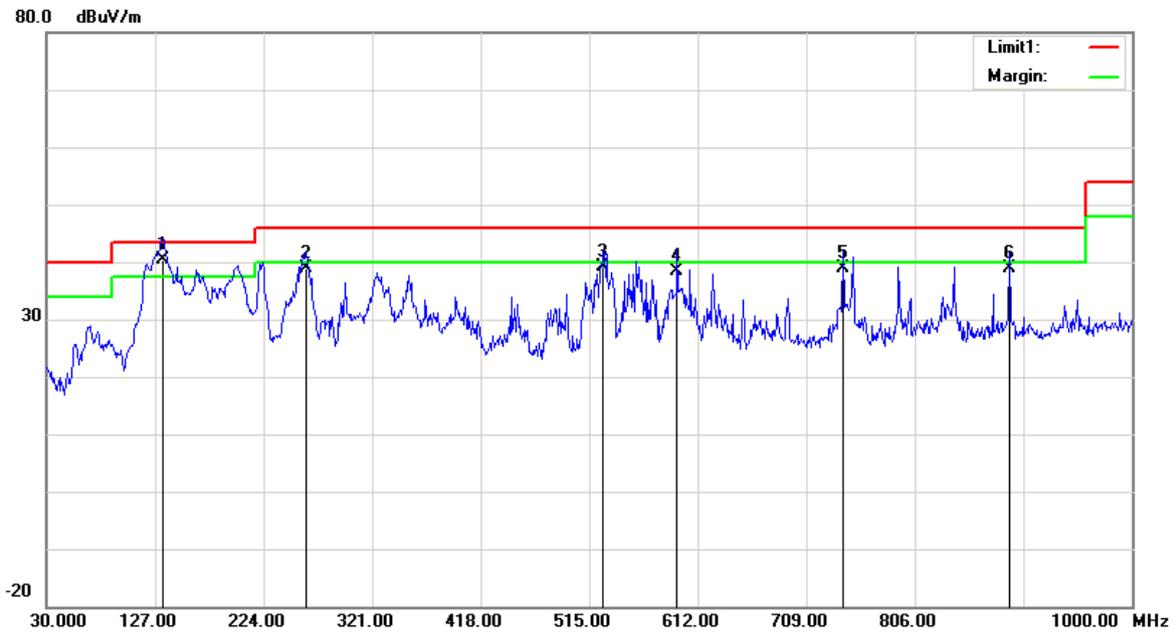

Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
133.7900	53.43	QP	-13.13	40.30	43.50	3.20
261.8300	51.49	QP	-12.59	38.90	46.00	7.10
527.6100	44.33	QP	-5.13	39.20	46.00	6.80
593.5700	41.90	QP	-3.40	38.50	46.00	7.50
741.9800	40.24	QP	-1.34	38.90	46.00	7.10
890.3900	37.97	QP	1.03	39.00	46.00	7.00

Vertical:

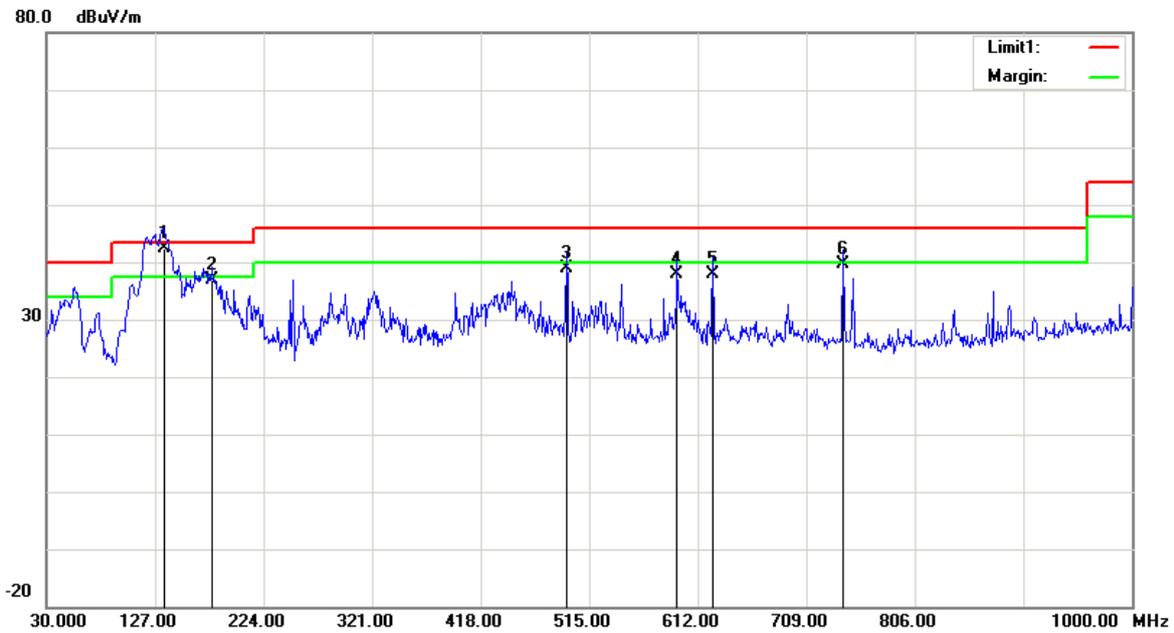




Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
134.7600	55.37	QP	-13.07	42.30	43.50	1.20
178.4100	50.17	QP	-13.27	36.90	43.50	6.60
494.6300	45.21	QP	-6.21	39.00	46.00	7.00
593.5700	41.40	QP	-3.40	38.00	46.00	8.00
625.5800	40.99	QP	-3.09	37.90	46.00	8.10
741.9800	40.94	QP	-1.34	39.60	46.00	6.40

2) 1GHz-25GHz:*BDR Mode (GFSK):*

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2402 MHz									
2402.00	60.86	PK	H	24.82	3.34	0.00	89.02	N/A	N/A
2402.00	50.03	AV	H	24.82	3.34	0.00	78.19	N/A	N/A
2402.00	69.64	PK	V	24.82	3.34	0.00	97.80	N/A	N/A
2402.00	58.30	AV	V	24.82	3.34	0.00	86.46	N/A	N/A
2390.00	23.37	PK	V	24.80	3.33	0.00	51.50	74.00	22.50
2390.00	12.29	AV	V	24.80	3.33	0.00	40.42	54.00	13.58
4804.00	36.11	PK	V	29.71	4.58	27.36	43.04	74.00	30.96
4804.00	22.76	AV	V	29.71	4.58	27.36	29.69	54.00	24.31
7206.00	37.96	PK	V	33.93	5.59	27.19	50.29	74.00	23.71
7206.00	24.50	AV	V	33.93	5.59	27.19	36.83	54.00	17.17
Middle Channel: 2441 MHz									
2441.00	60.55	PK	H	24.89	3.36	0.00	88.80	N/A	N/A
2441.00	49.45	AV	H	24.89	3.36	0.00	77.70	N/A	N/A
2441.00	69.34	PK	V	24.89	3.36	0.00	97.59	N/A	N/A
2441.00	58.14	AV	V	24.89	3.36	0.00	86.39	N/A	N/A
4882.00	36.22	PK	V	29.86	4.56	27.56	43.08	74.00	30.92
4882.00	22.99	AV	V	29.86	4.56	27.56	29.85	54.00	24.15
7323.00	38.05	PK	V	34.12	5.69	27.26	50.60	74.00	23.40
7323.00	24.36	AV	V	34.12	5.69	27.26	36.91	54.00	17.09
High Channel: 2480 MHz									
2480.00	60.94	PK	H	24.96	3.38	0.00	89.28	N/A	N/A
2480.00	49.68	AV	H	24.96	3.38	0.00	78.02	N/A	N/A
2480.00	69.79	PK	V	24.96	3.38	0.00	98.13	N/A	N/A
2480.00	58.16	AV	V	24.96	3.38	0.00	86.50	N/A	N/A
2483.50	25.75	PK	V	24.97	3.38	0.00	54.10	74.00	19.90
2483.50	15.52	AV	V	24.97	3.38	0.00	43.87	54.00	10.13
4960.00	36.74	PK	V	30.02	4.58	27.37	43.97	74.00	30.03
4960.00	23.57	AV	V	30.02	4.58	27.37	30.80	54.00	23.20
7440.00	38.19	PK	V	34.30	5.79	27.22	51.06	74.00	22.94
7440.00	25.12	AV	V	34.30	5.79	27.22	37.99	54.00	16.01




Worst plots (GFSK High channel)
Horizontal

Fundamental
Test with Band
Rejection Filter

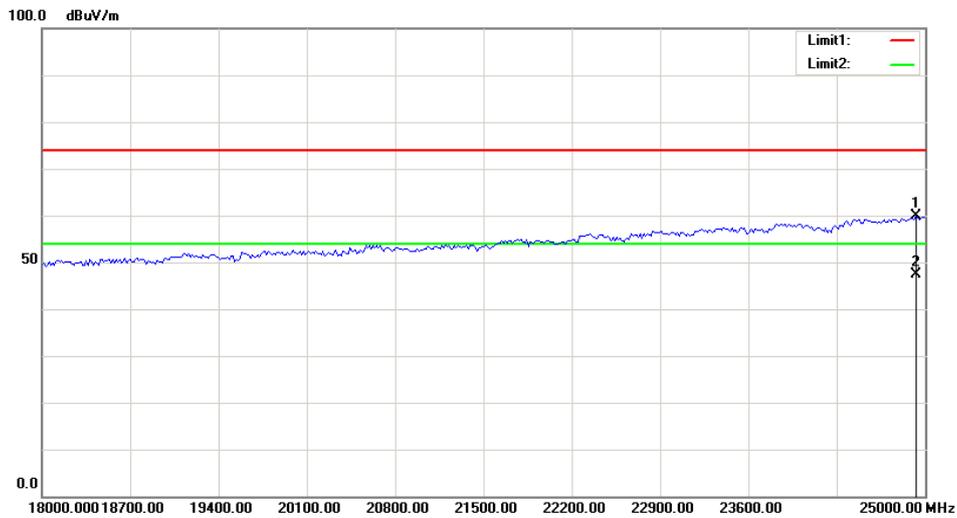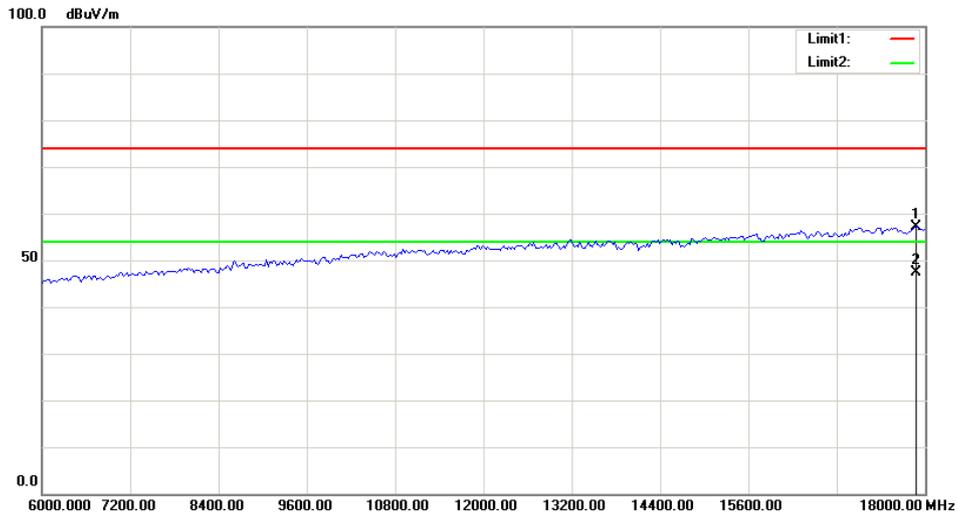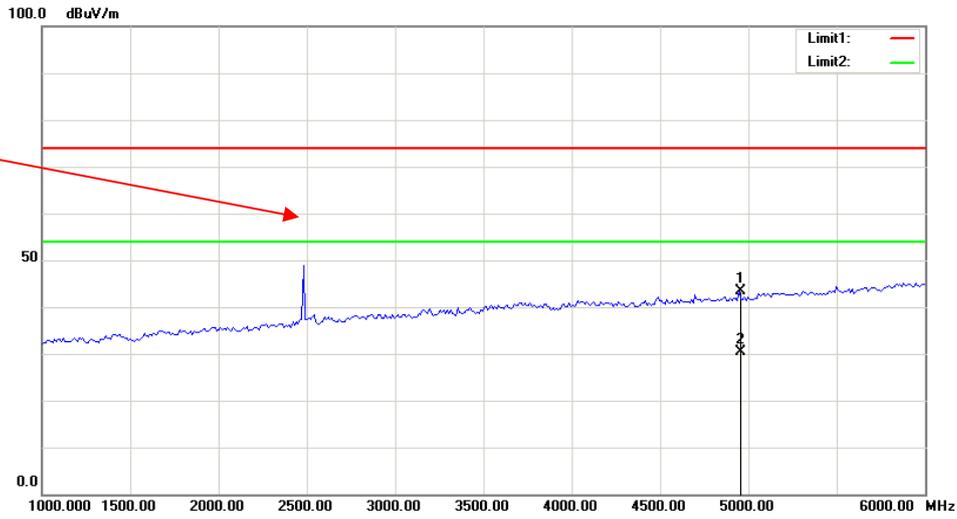

Vertical

Fundamental Test with Band Rejection Filter

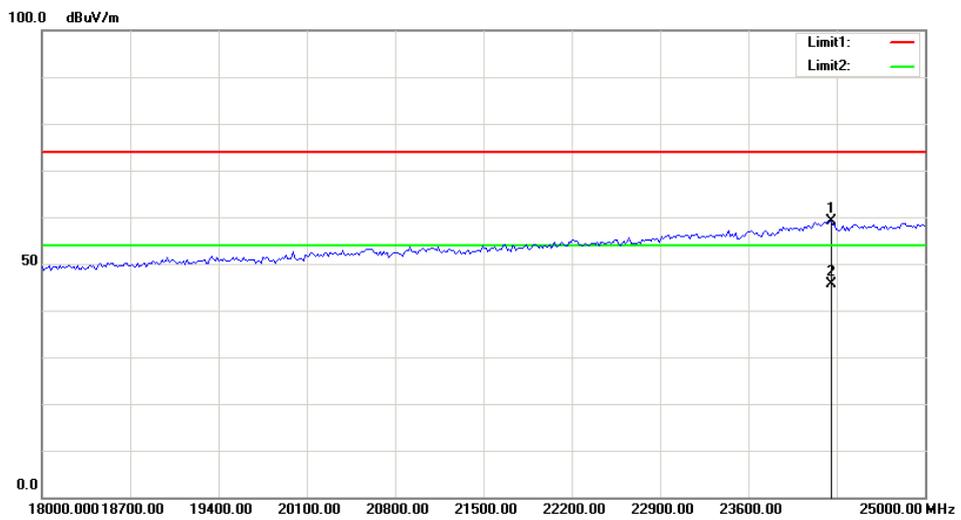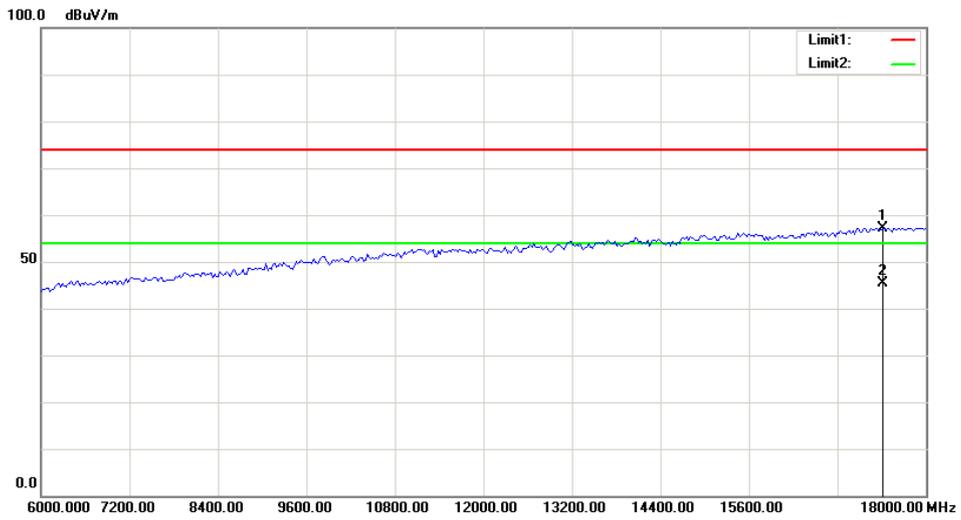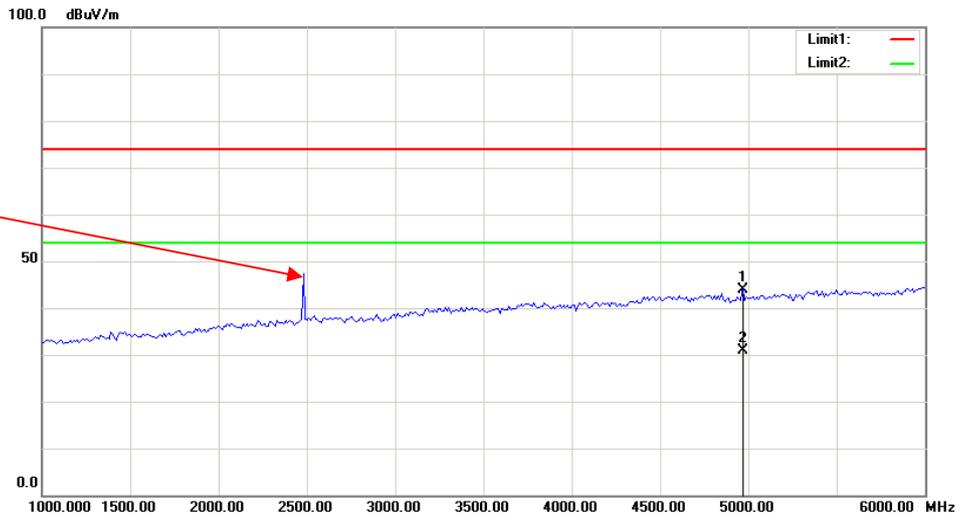

FCC §15.247(a) (1) - CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.50 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2018-08-03	2019-08-03
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 30 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace.
3. Measure the channel separation.

Test Data

Environmental Conditions

Temperature:	28.7 °C
Relative Humidity:	53 %
ATM Pressure:	101 kPa

* The testing was performed by Andy Huang on 2019-03-11.

Test Result: Compliance.

Please refer to following tables and plots


Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)
BDR (GFSK)	Low	2402	0.998	0.69
	Middle	2441	0.998	0.68
	High	2480	0.998	0.68
EDR (π/4-DQPSK)	Low	2402	1.002	0.89
	Middle	2441	0.998	0.90
	High	2480	1.002	0.90
EDR (8-DPSK)	Low	2402	1.002	0.85
	Middle	2441	1.006	0.86
	High	2480	1.002	0.85

Note: Limit = (2/3) × 20dB bandwidth


BDR Mode (GFSK):

Low Channel

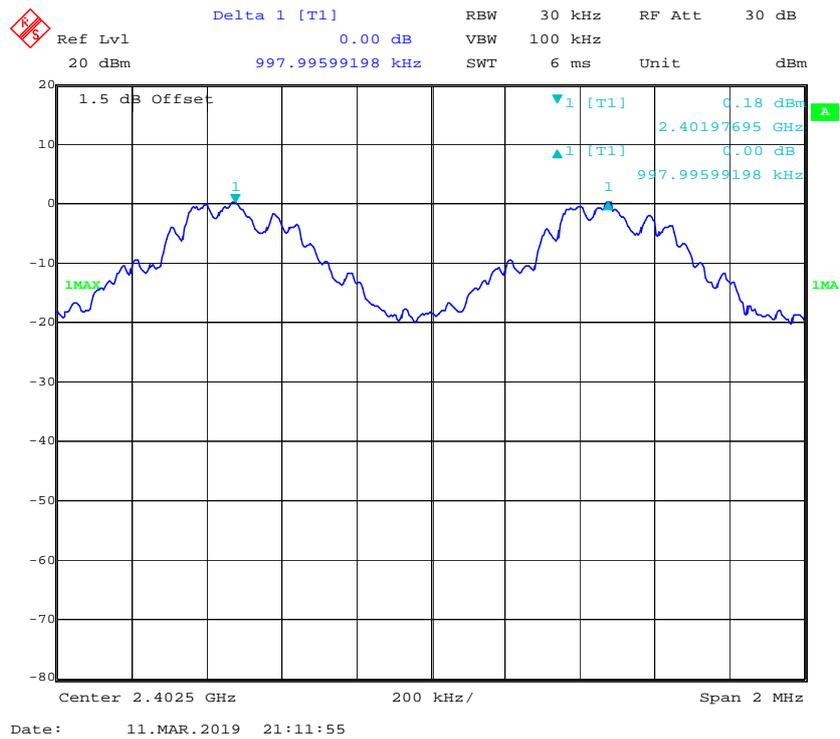


EDR Mode ($\pi/4$ -DQPSK):


Low Channel

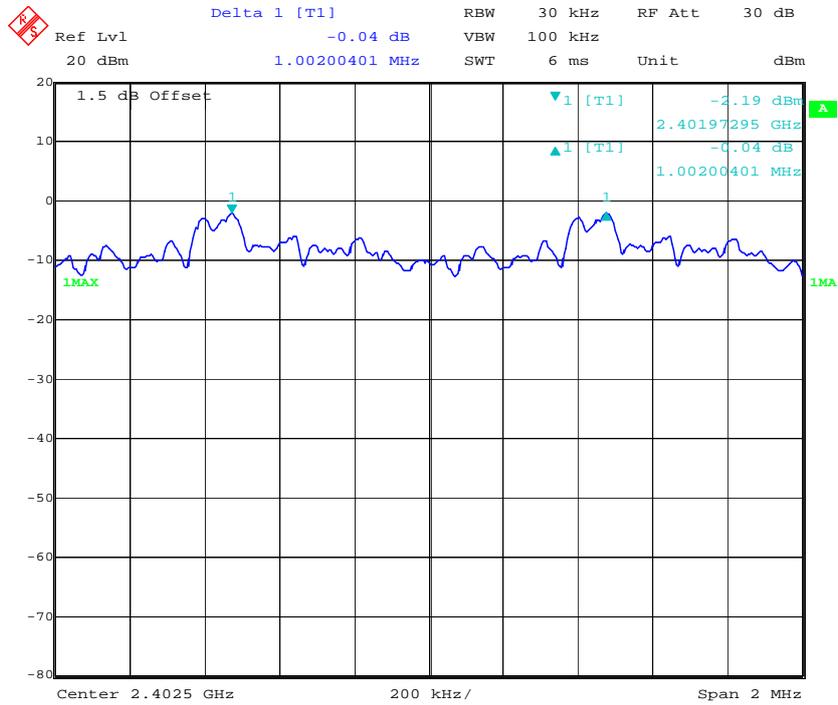

Middle Channel

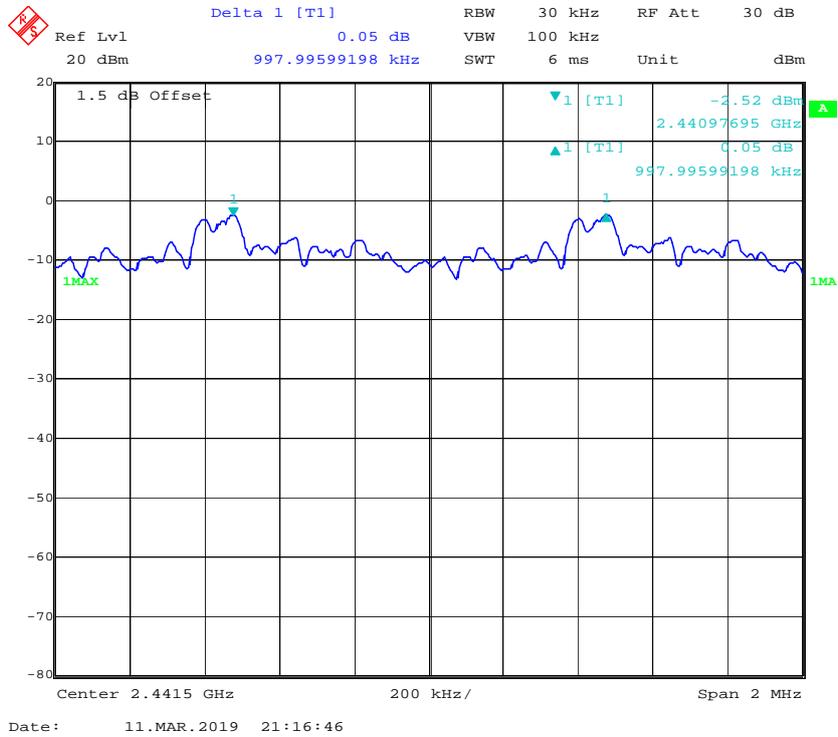


High Channel

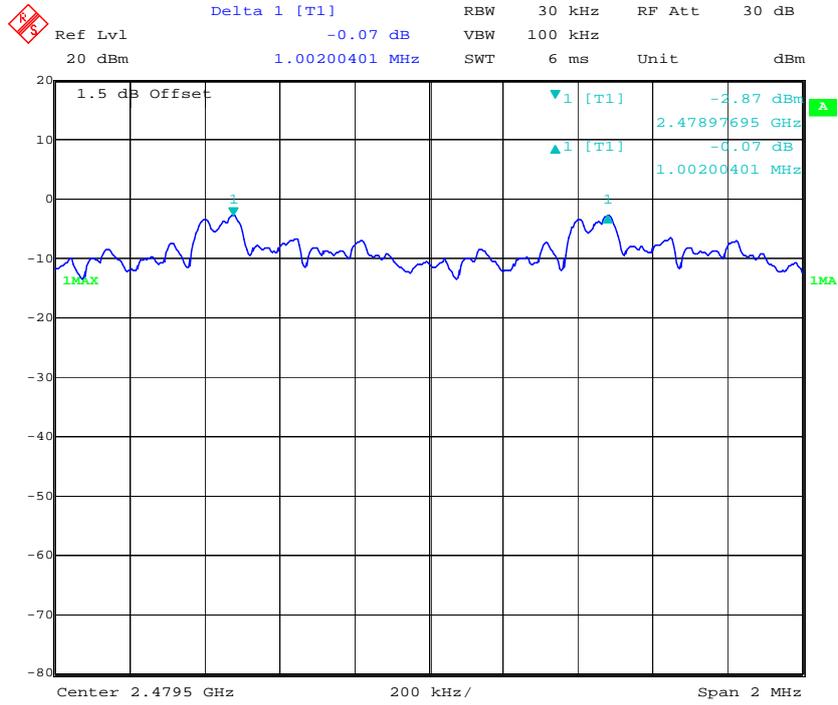

Date: 11.MAR.2019 21:18:35


EDR Mode (8-DPSK):

Low Channel

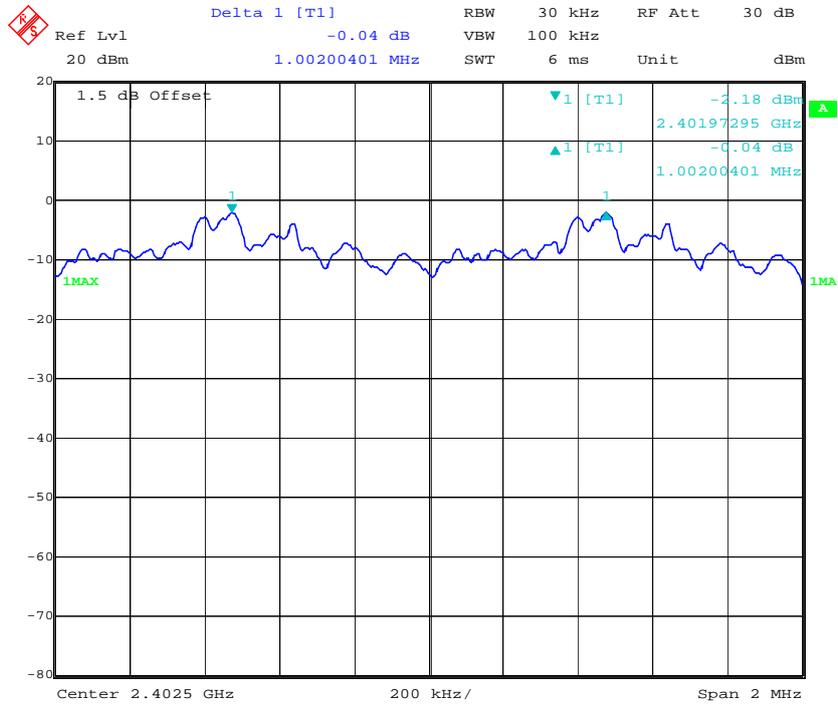


Date: 11.MAR.2019 21:20:09

Middle Channel

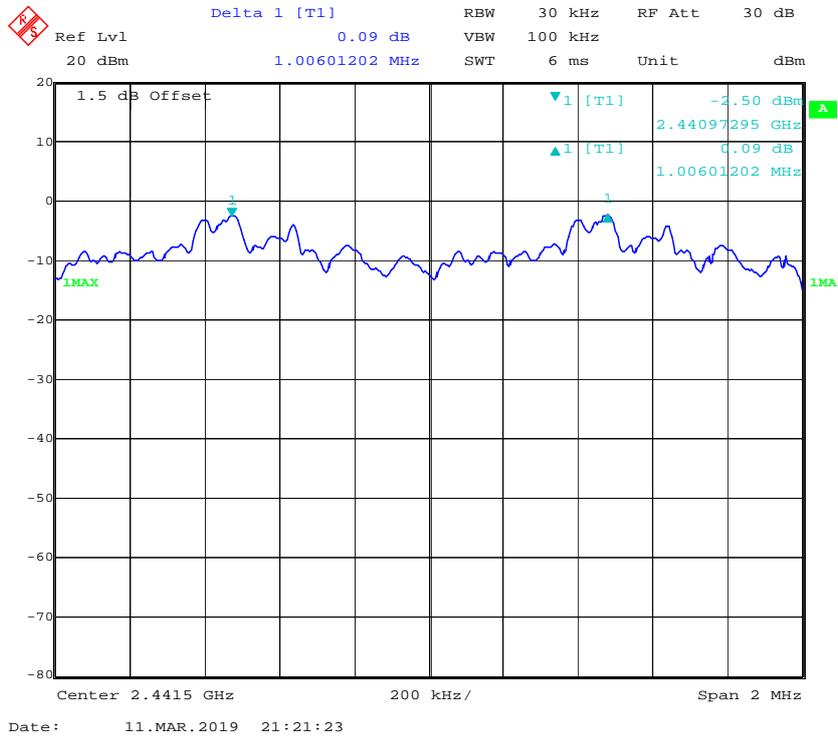

High Channel

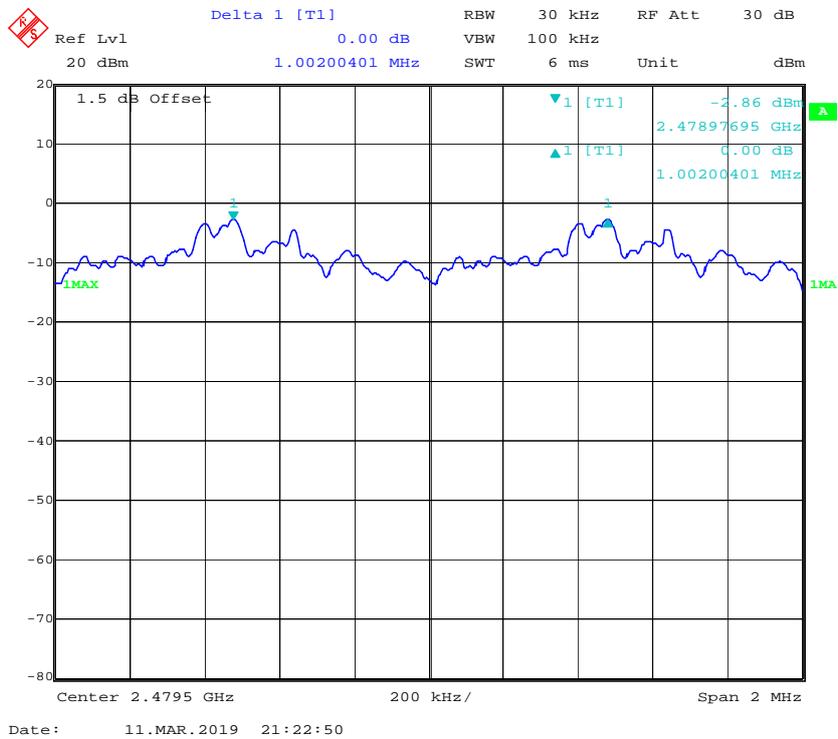

FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2018-08-03	2019-08-03
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	28.7 °C
Relative Humidity:	53 %
ATM Pressure:	101 kPa

* *The testing was performed by Andy Huang on 2019-03-11.*

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting


Mode	Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
BDR Mode (GFSK)	Low	2402	1.034
	Middle	2441	1.014
	High	2480	1.026
EDR Mode ($\pi/4$ -DQPSK)	Low	2402	1.335
	Middle	2441	1.343
	High	2480	1.347
EDR Mode (8-DPSK)	Low	2402	1.279
	Middle	2441	1.291
	High	2480	1.275

BDR Mode (GFSK):


Low Channel

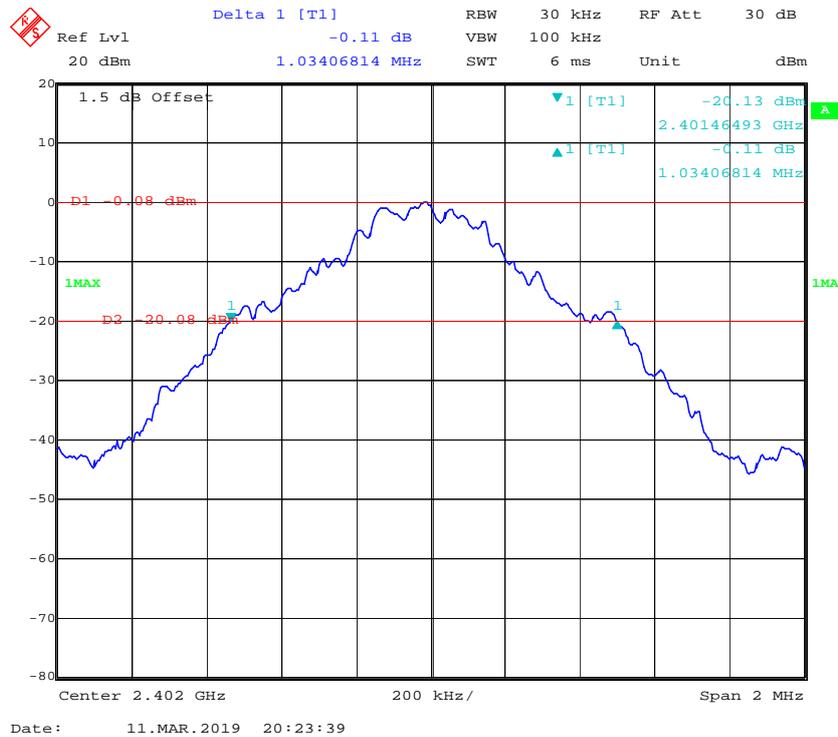

Middle Channel

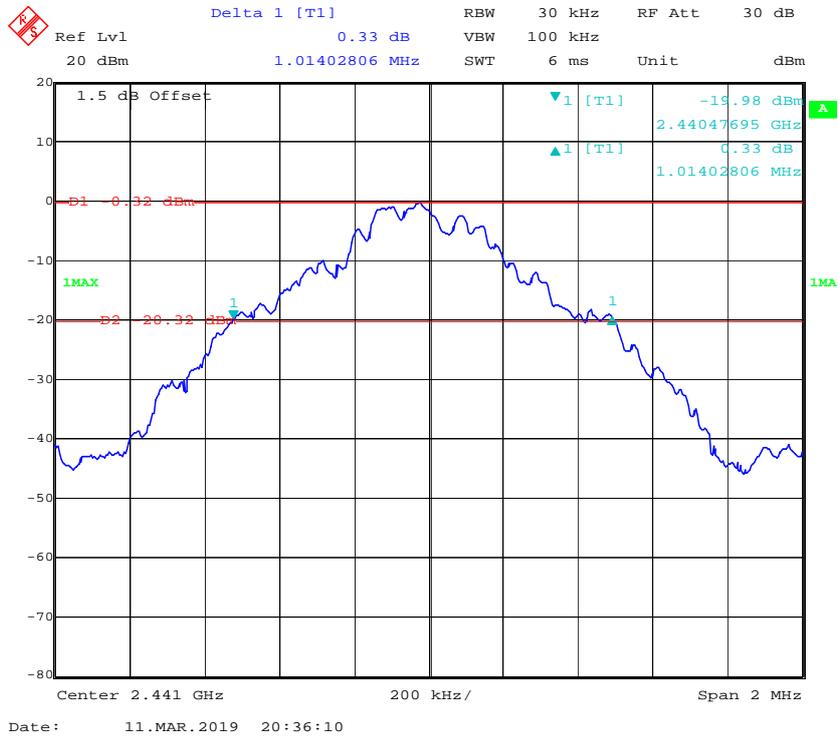


High Channel

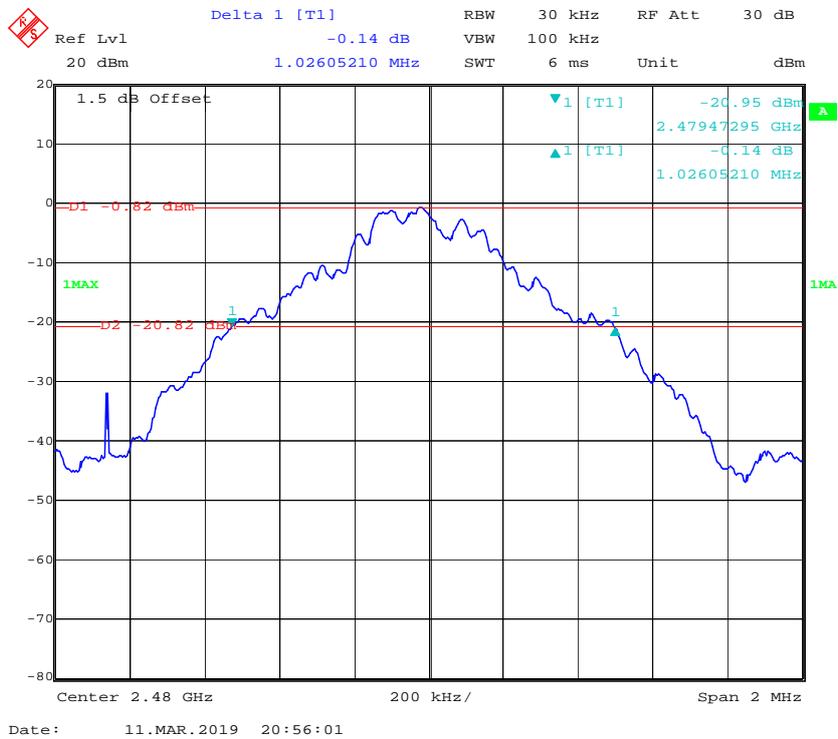


EDR Mode ($\pi/4$ -DQPSK):

Low Channel

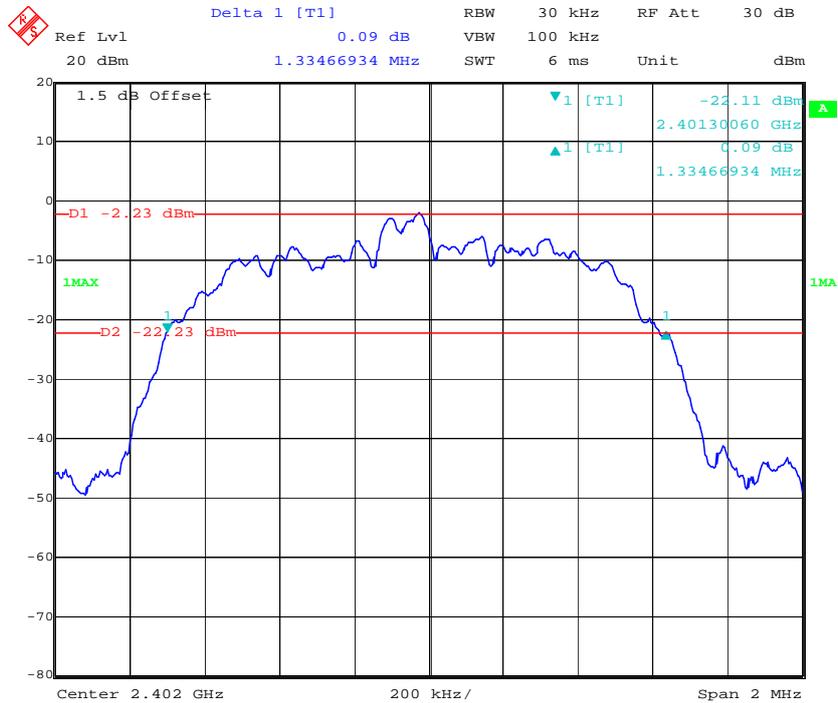


Date: 11.MAR.2019 20:39:47

Middle Channel

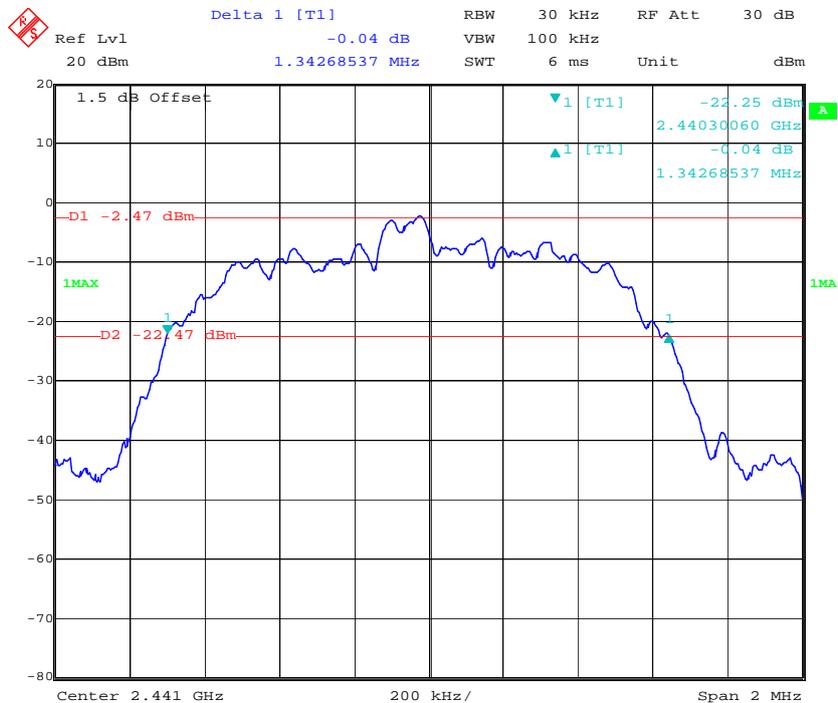


Date: 11.MAR.2019 20:56:39

High Channel

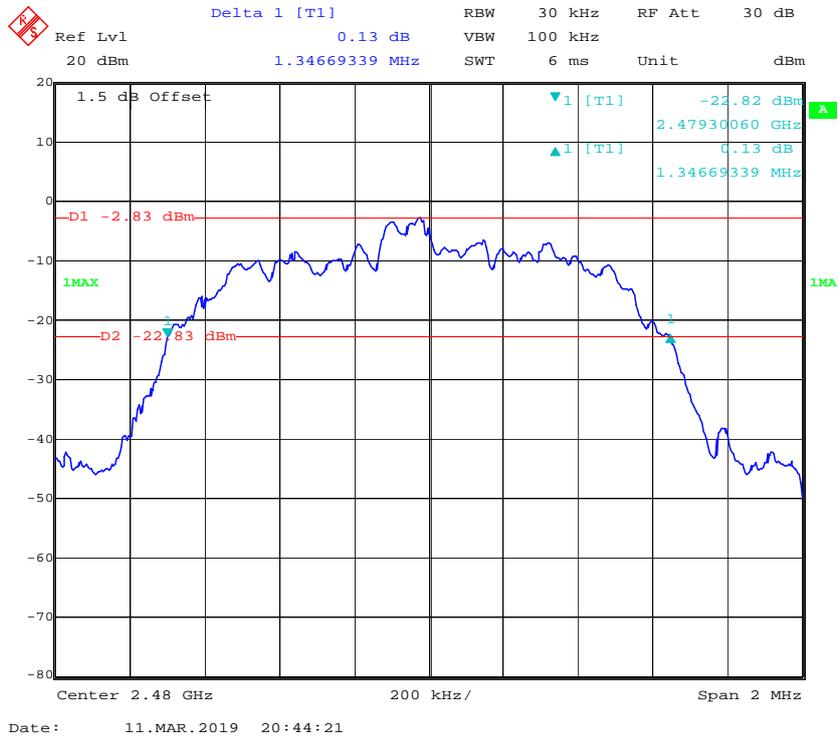


EDR Mode (8-DPSK):


Low Channel

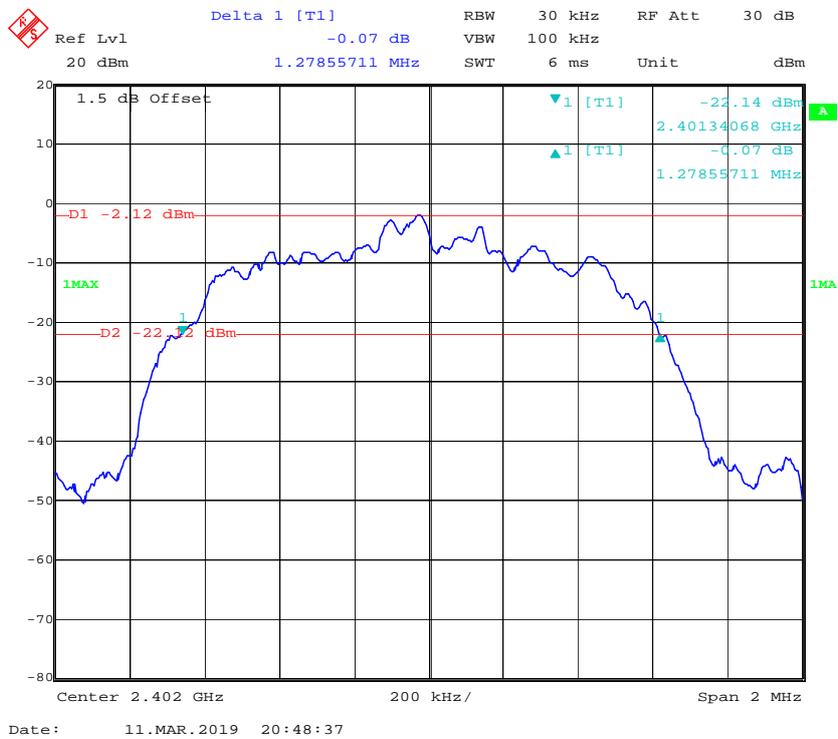

Middle Channel

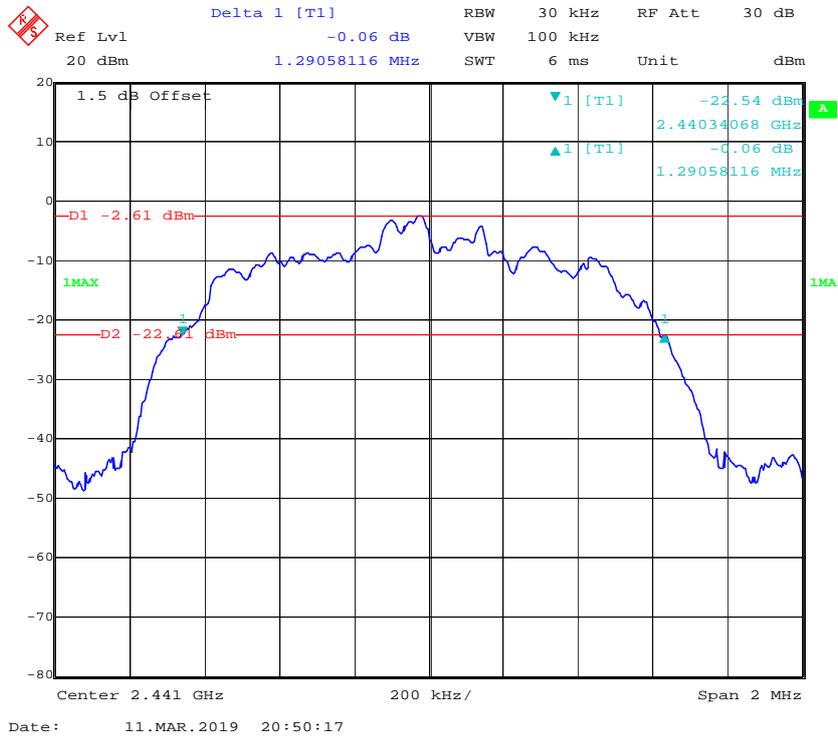

High Channel

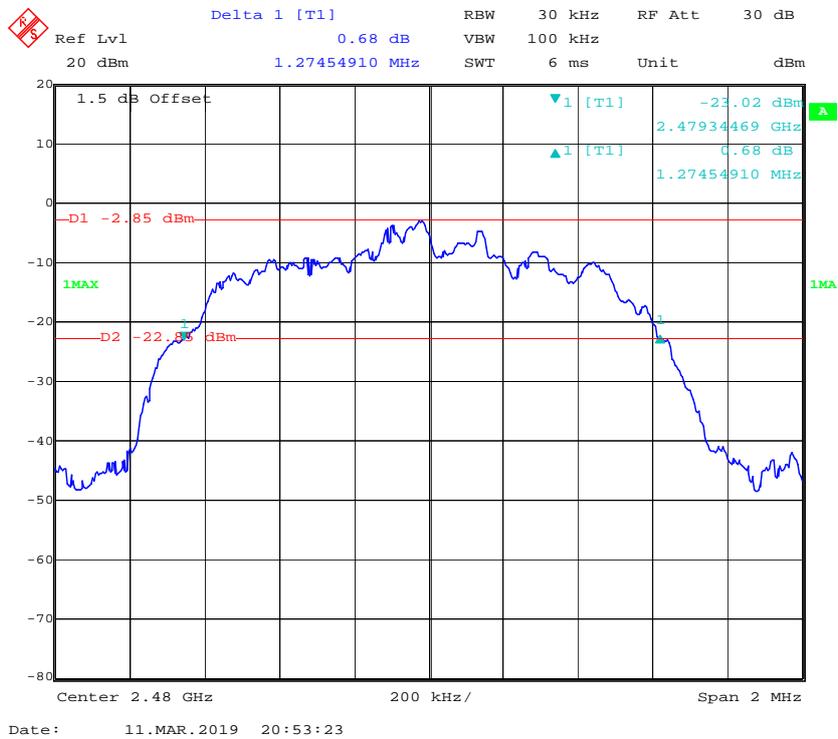

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2018-08-03	2019-08-03
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	28.7 °C
Relative Humidity:	53 %
ATM Pressure:	101 kPa

* The testing was performed by Andy Huang on 2019-03-11 and 2019-03-12.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

BDR Mode (GFSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥15


Number of Hopping Channels

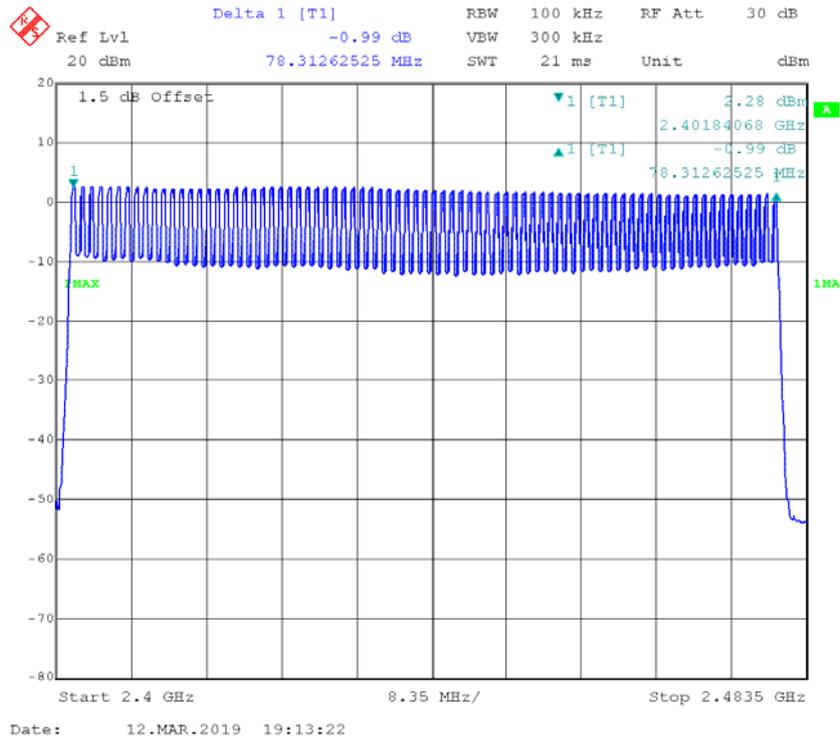

EDR Mode ($\pi/4$ -DQPSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥ 15


Number of Hopping Channels

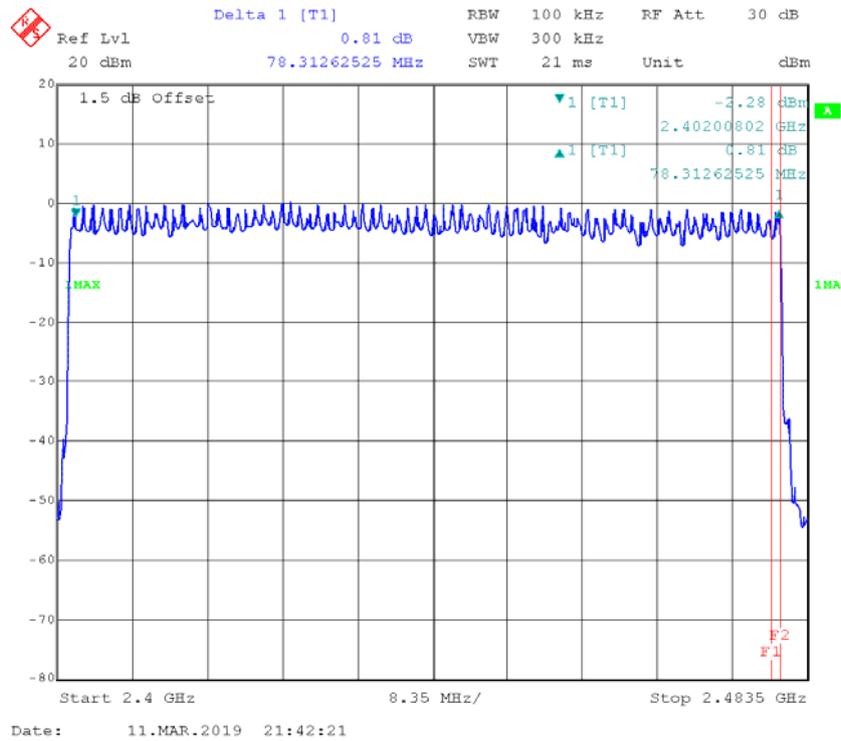

EDR Mode (8-DPSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥15

Number of Hopping Channels

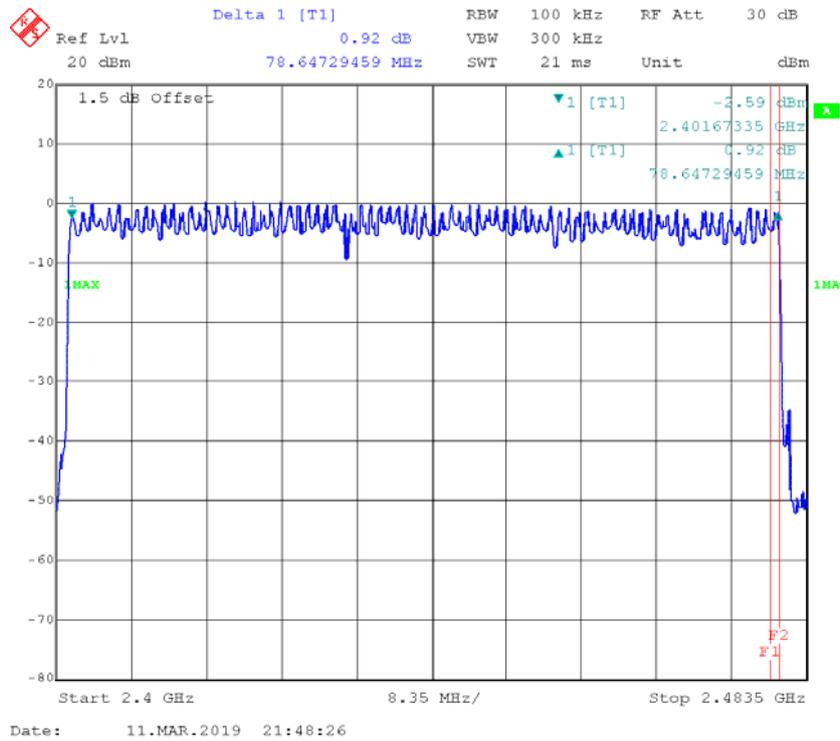

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; the time of single pulses was tested.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2018-08-03	2019-08-03
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	28.7 °C
Relative Humidity:	53 %
ATM Pressure:	101 kPa

* *The testing was performed by Andy Huang on 2019-03-11.*

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

BDR Mode (GFSK):


Mode	Packet type	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
GFSK	DH1	Middle	0.397	0.127	0.4	Compliance
	DH3	Middle	1.667	0.267	0.4	Compliance
	DH5	Middle	2.920	0.311	0.4	Compliance
Note: Dwell time=Pulse time (ms) × (1600/2/79) ×31.6 s						
π/4 DQPSK	DH1	Middle	0.407	0.130	0.4	Compliance
	DH3	Middle	1.691	0.271	0.4	Compliance
	DH5	Middle	2.920	0.311	0.4	Compliance
Note: Dwell time=Pulse time (ms) × (1600/4/79) ×31.6 s						
8DPSK	DH1	Middle	0.405	0.130	0.4	Compliance
	DH3	Middle	1.667	0.267	0.4	Compliance
	DH5	Middle	2.920	0.311	0.4	Compliance
Note: Dwell time=Pulse time (ms) × (1600/6/79) ×31.6 s						

DH1: Middle Channel

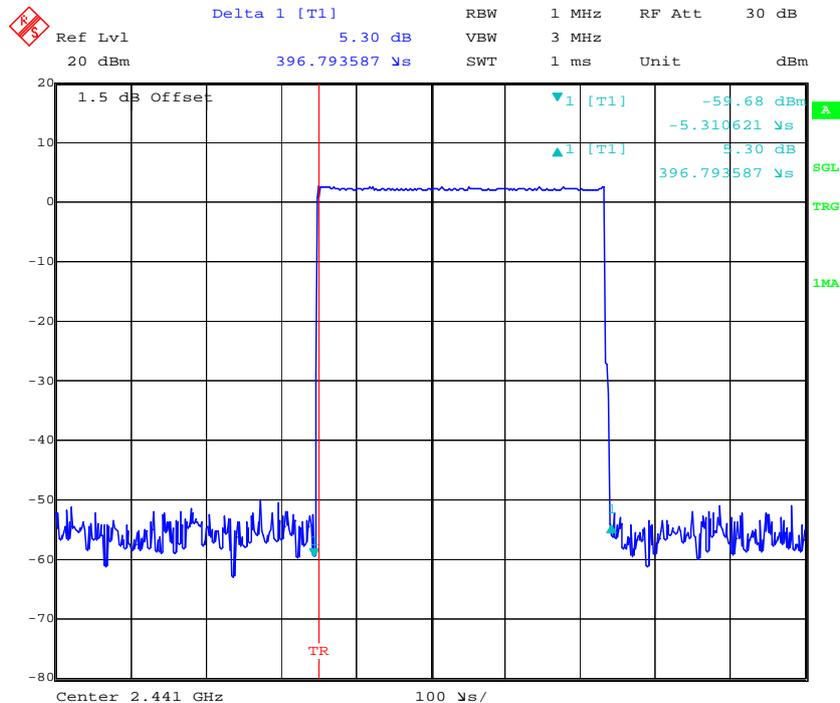


Date: 11.MAR.2019 20:59:41


DH3: Middle Channel

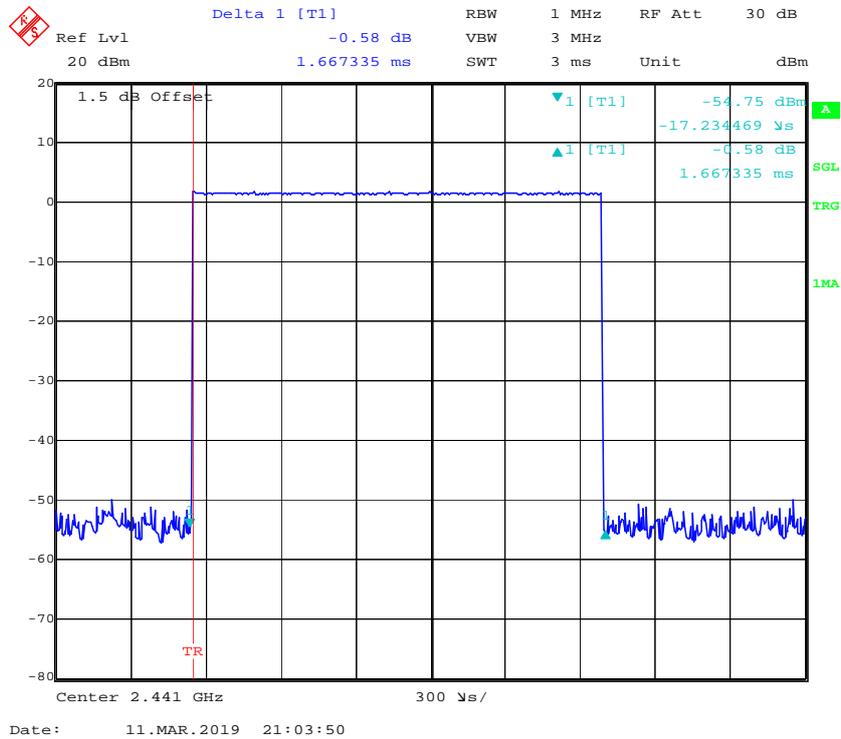

DH5: Middle Channel

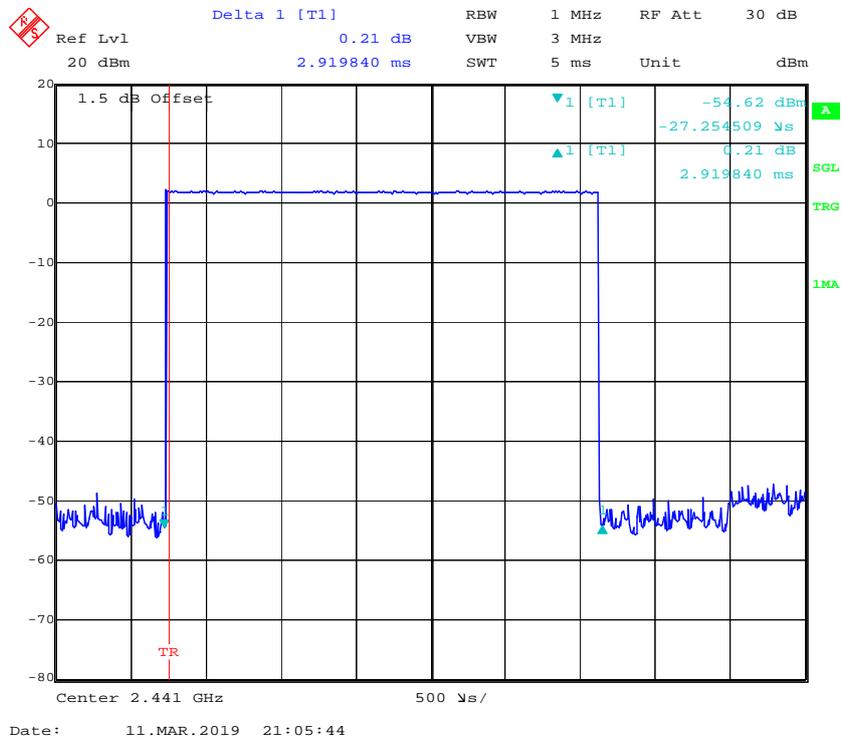


2DH1: Middle Channel

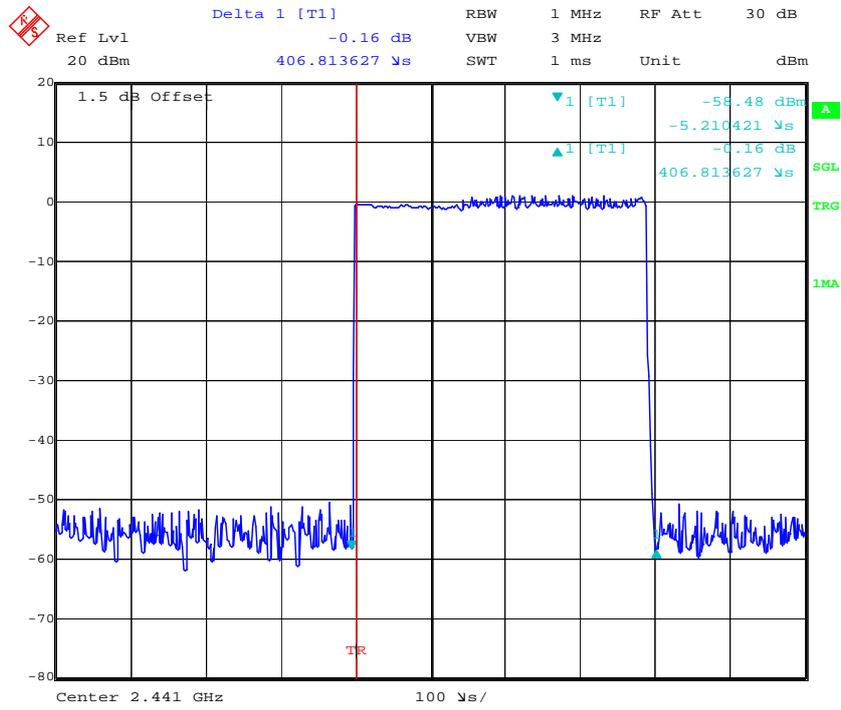


Date: 11.MAR.2019 21:02:34

2DH3: Middle Channel

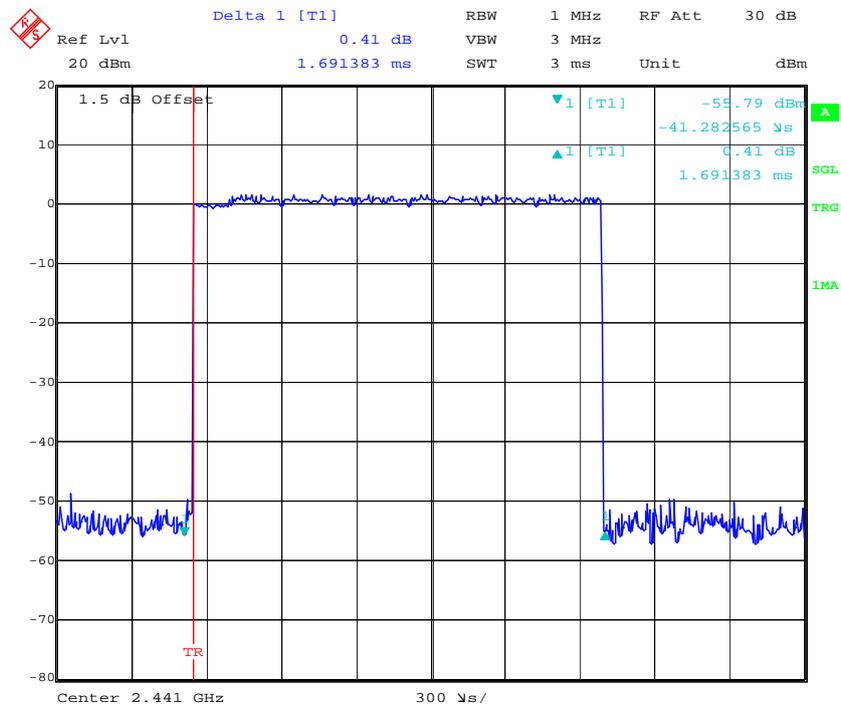


Date: 11.MAR.2019 21:04:40

2DH5: Middle Channel

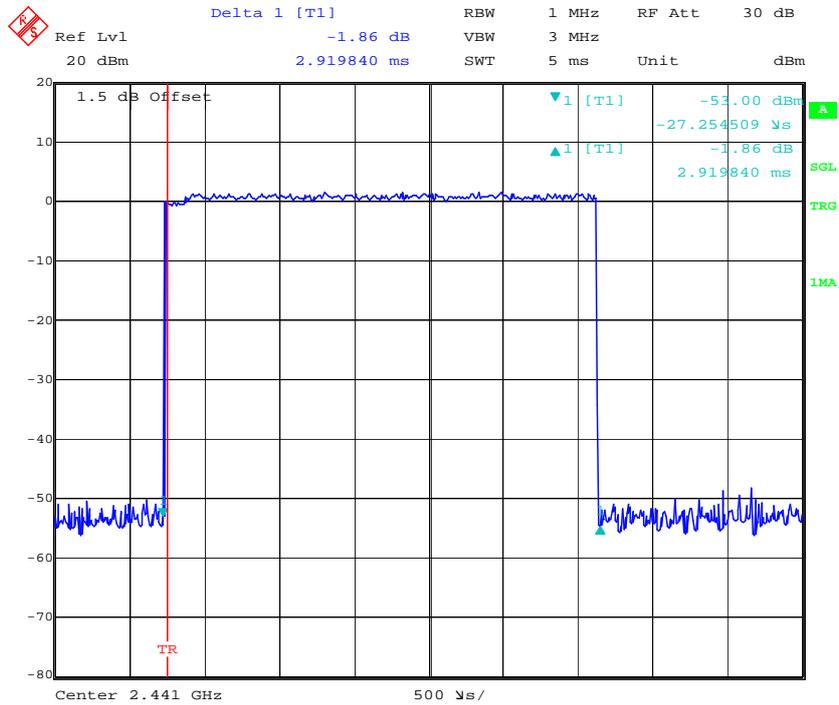


Date: 11.MAR.2019 21:06:09

3DH1: Middle Channel

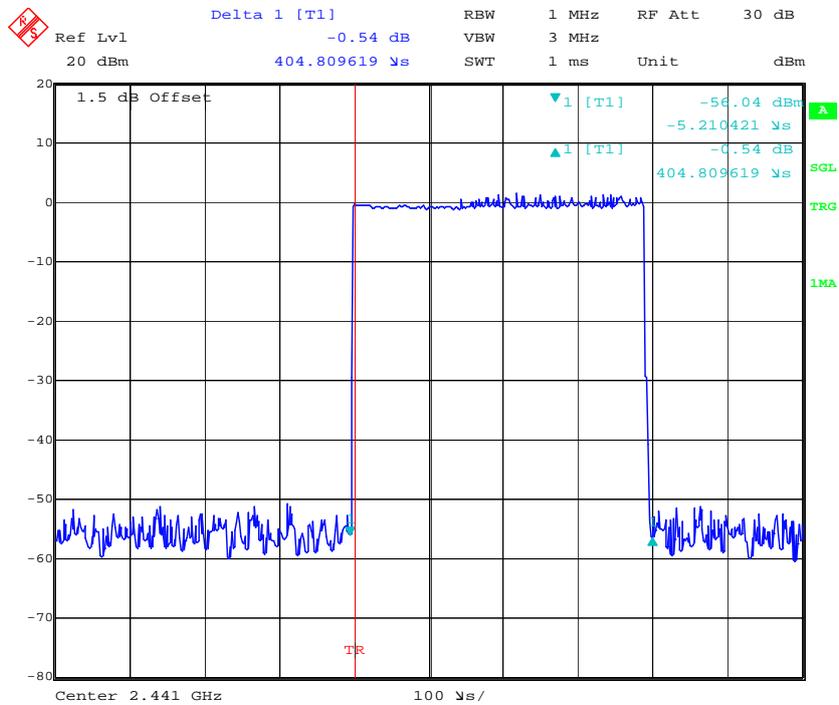


Date: 11.MAR.2019 21:02:57

3DH3: Middle Channel

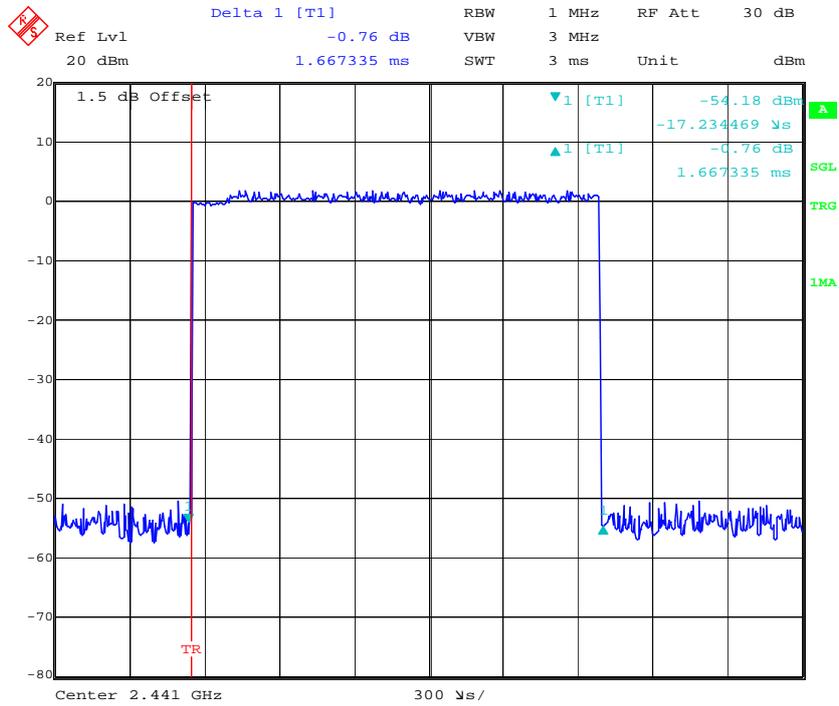

Date: 11.MAR.2019 21:04:59

3DH5: Middle Channel

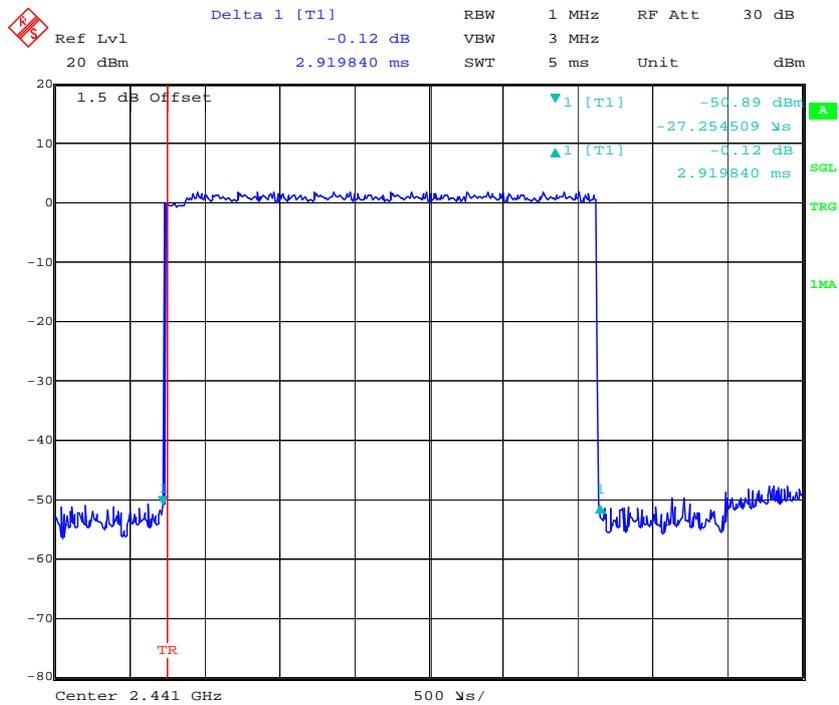

Date: 11.MAR.2019 21:06:24

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	USB Wideband Power Sensor	U2022XA	MY5417006	2018-12-11	2019-12-11
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	28.7 °C
Relative Humidity:	53 %
ATM Pressure:	101 kPa

* *The testing was performed by Andy Huang on 2019-03-11.*

Test Result: Compliance.

Test Mode: Transmitting

Mode	Frequency (MHz)	Peak Conducted Output power (dBm)	Limit (dBm)
BDR Mode (GFSK)	2402	2.52	21
	2441	2.28	21
	2480	1.79	21
EDR Mode ($\pi/4$ -DQPSK)	2402	2.28	21
	2441	1.91	21
	2480	1.41	21
EDR Mode (8-DPSK)	2402	2.52	21
	2441	2.40	21
	2480	1.79	21

Note: The data above was tested in conducted mode.

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW/ VBW of spectrum analyzer to 100/300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2018-08-03	2019-08-03
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	/


* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Band Edge, Right Side

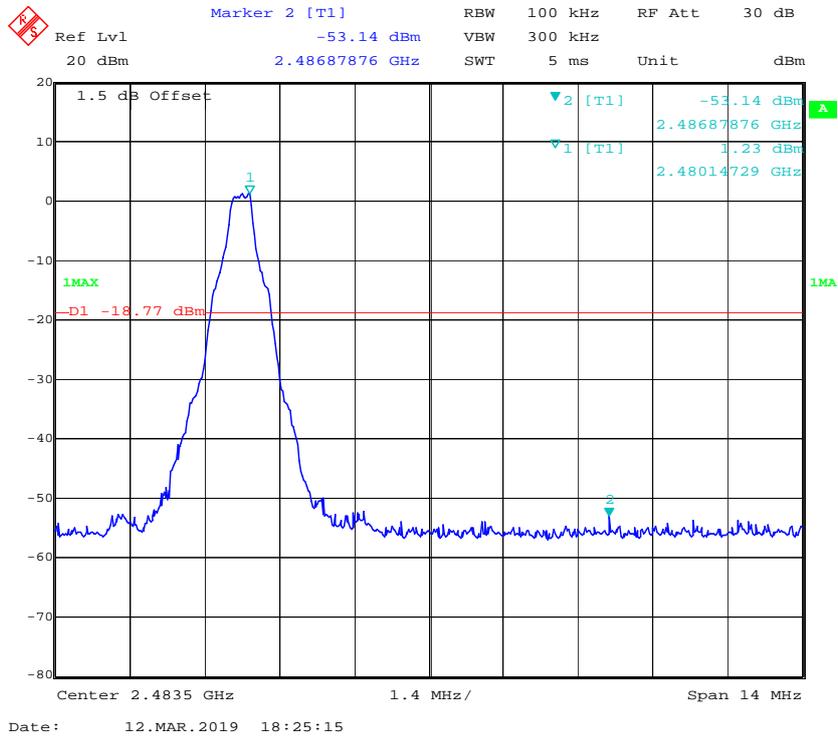


EDR Mode ($\pi/4$ -DQPSK):

Band Edge, Left Side

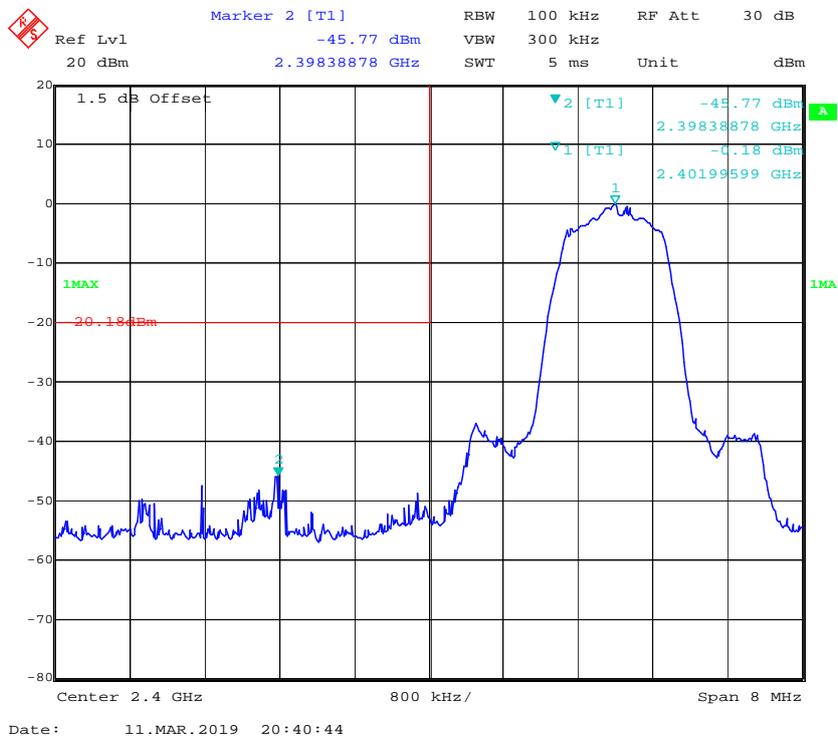


Band Edge, Right Side

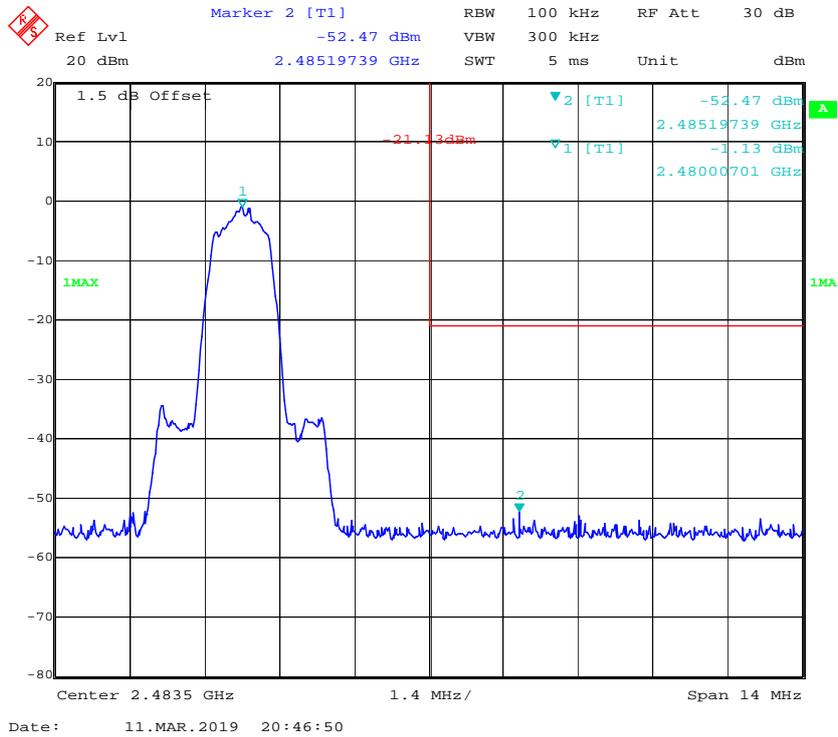


EDR Mode (8-DPSK):

Band Edge, Left Side

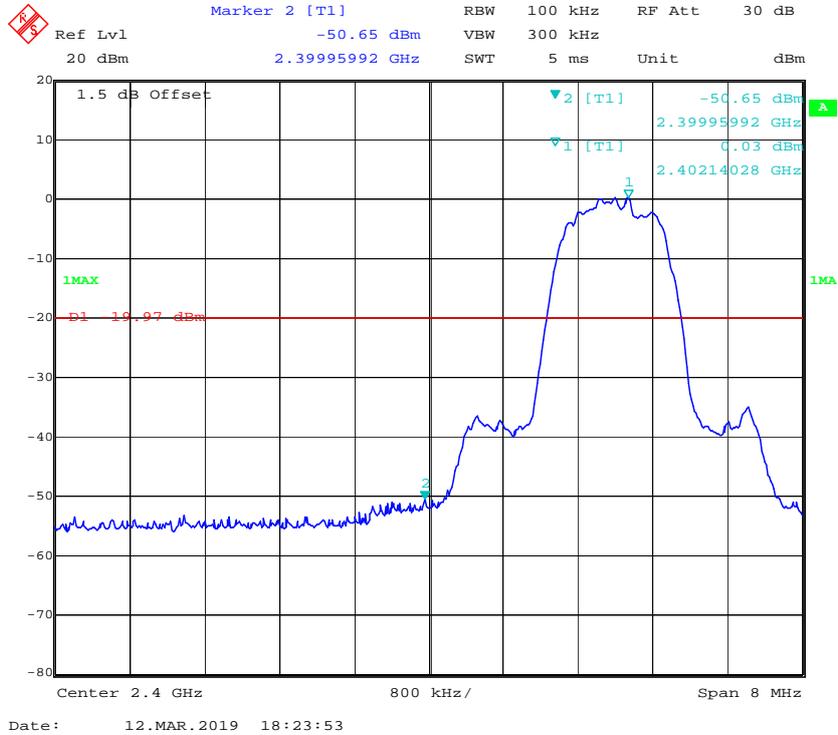


Band Edge, Right Side

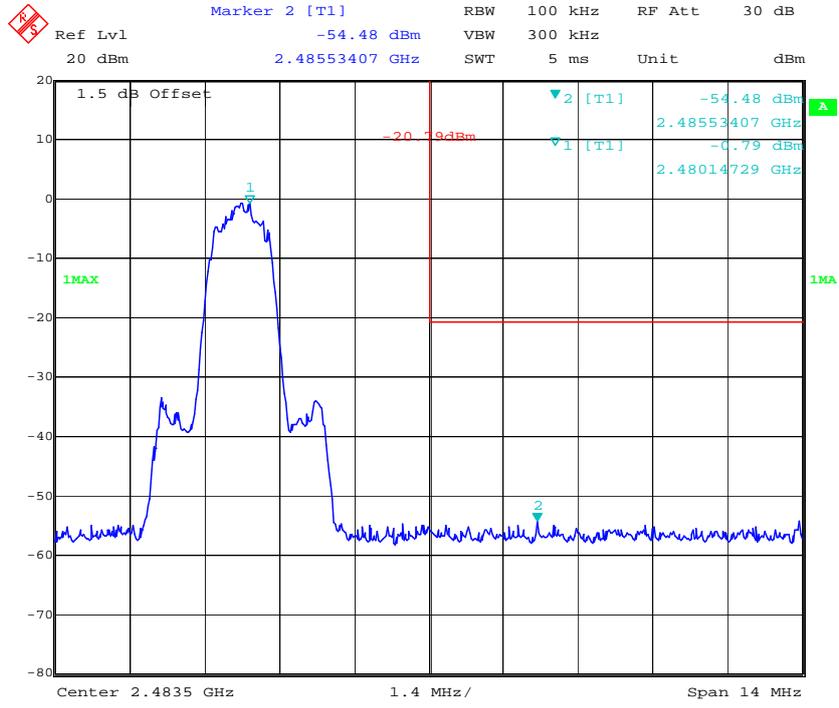

Date: 11.MAR.2019 20:54:39


Hopping mode:
BDR Mode (GFSK):

Band Edge, Left Side

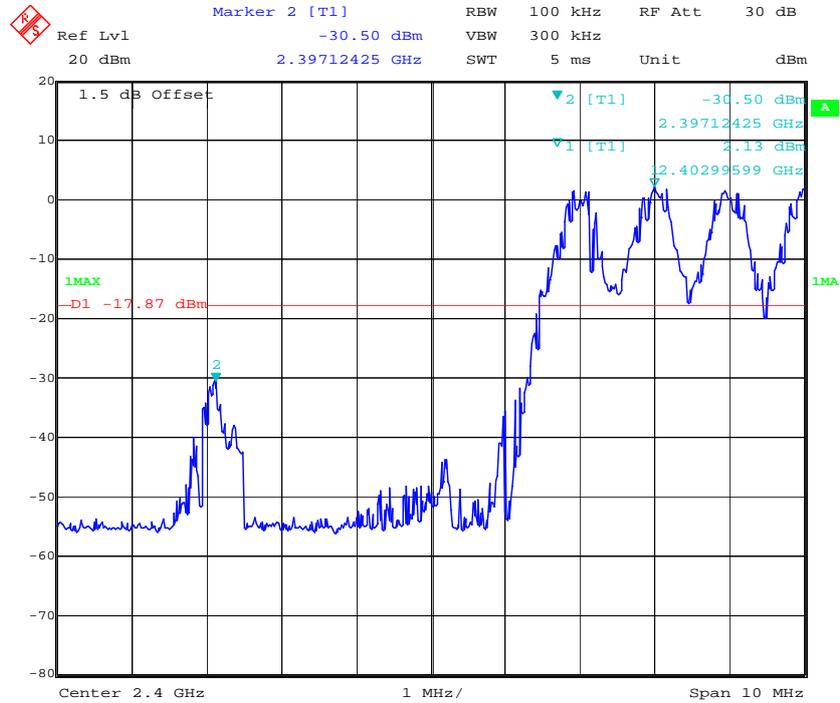

Date: 11.MAR.2019 21:52:48


Band Edge, Right Side

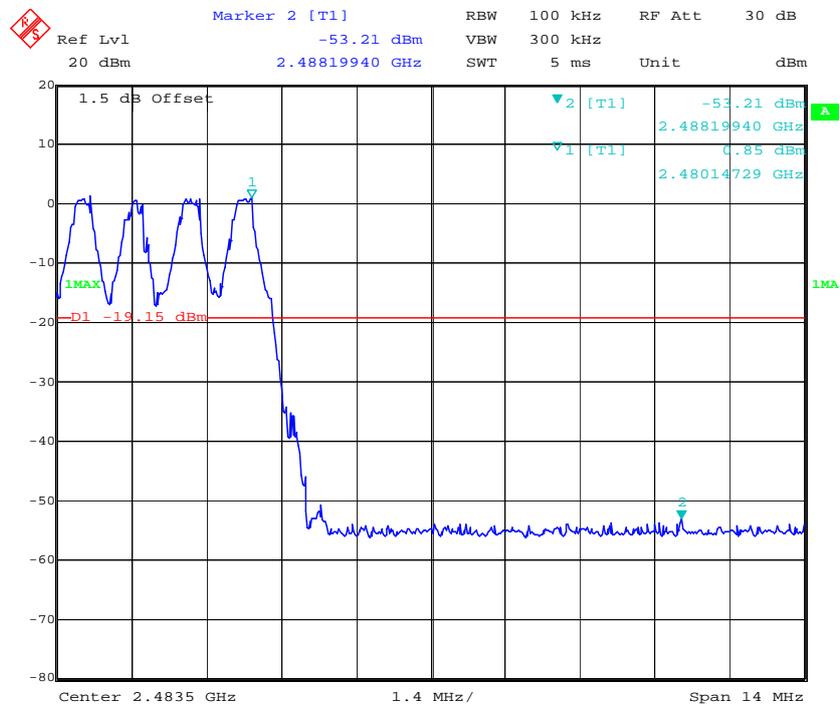

Date: 12.MAR.2019 18:07:40


EDR Mode ($\pi/4$ -DQPSK):

Band Edge, Left Side

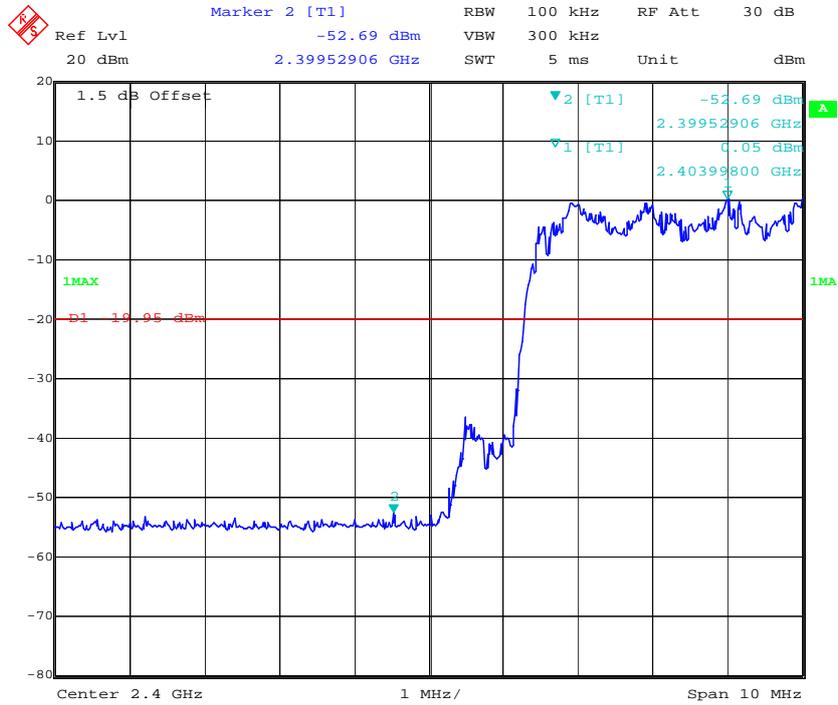

Date: 12.MAR.2019 18:12:05


Band Edge, Right Side

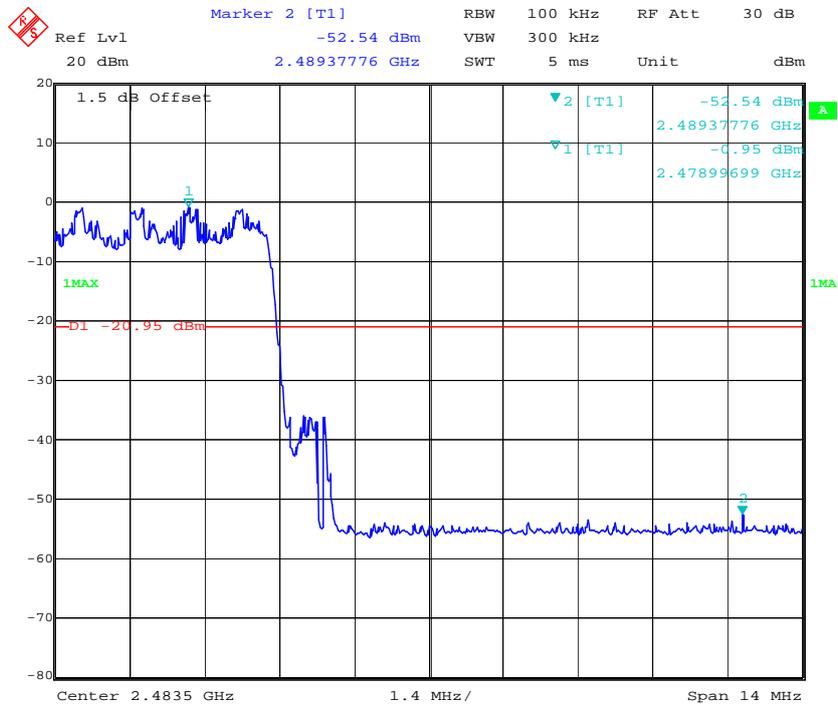


Date: 12.MAR.2019 18:14:21

EDR Mode (8-DPSK):

Band Edge, Left Side

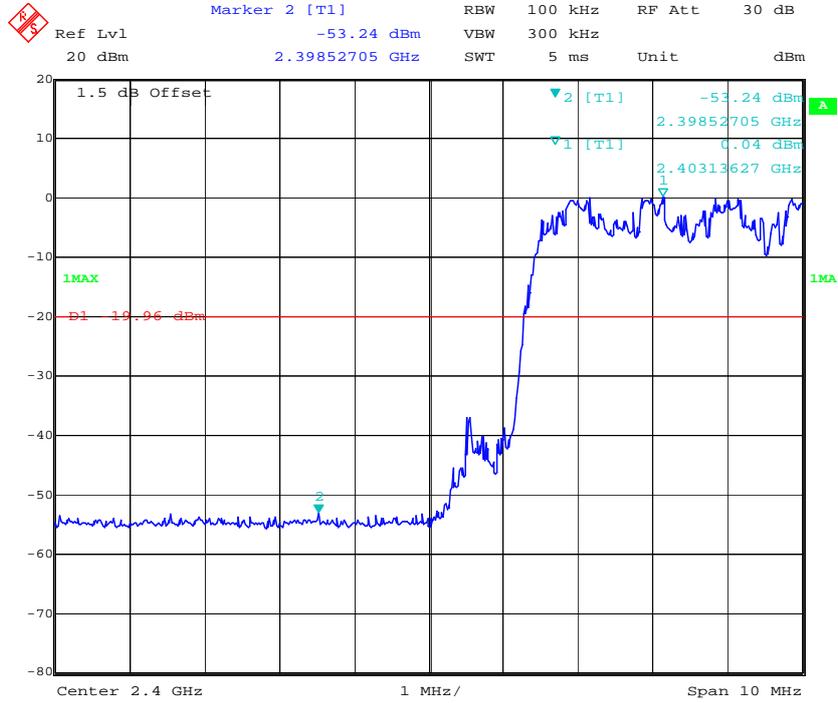

Band Edge, Right Side

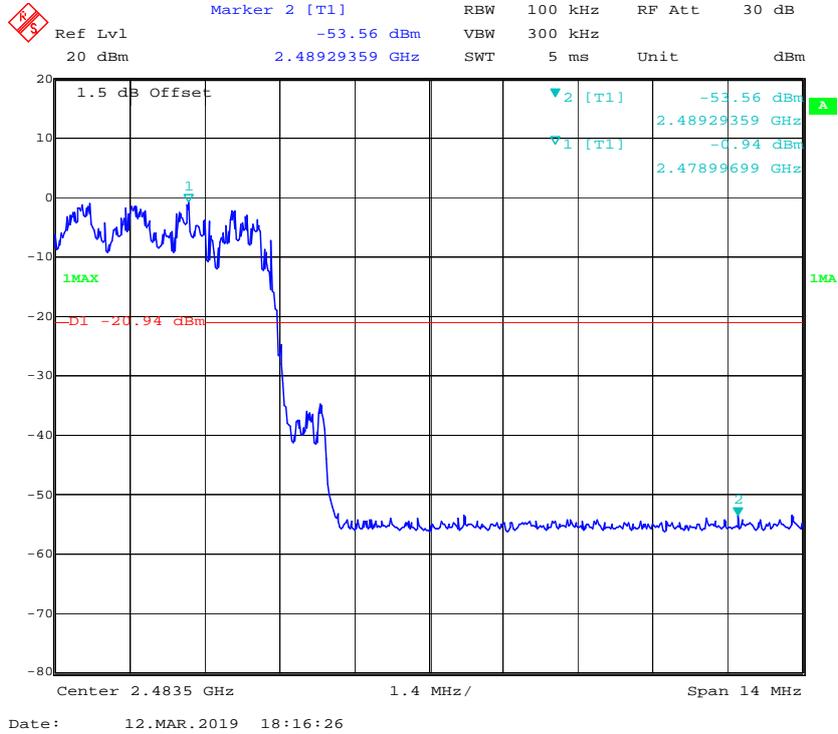

***** END OF REPORT *****