

Test Site	SIP-AC2	Test Engineer	Mero Zhou
Test Date	2024-04-21	Test Mode	802.11n-HT20
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	4825.0	46.1	-7.3	38.8	74.0	-35.2	Peak	Horizontal
	8310.0	43.5	0.0	43.5	74.0	-30.5	Peak	Horizontal
	10698.5	43.1	4.5	47.6	74.0	-26.4	Peak	Horizontal
	4825.0	51.5	-7.3	44.2	74.0	-29.8	Peak	Vertical
	8225.0	43.7	0.6	44.3	74.0	-29.7	Peak	Vertical
	10996.0	42.0	4.8	46.8	74.0	-27.2	Peak	Vertical
06	7315.5	47.8	-0.7	47.1	74.0	-26.9	Peak	Horizontal
	11217.0	41.2	5.7	46.9	74.0	-27.1	Peak	Horizontal
	15917.5	41.3	5.8	47.1	74.0	-26.9	Peak	Horizontal
	4876.0	52.4	-6.8	45.6	74.0	-28.4	Peak	Vertical
	7307.0	45.1	-0.7	44.4	74.0	-29.6	Peak	Vertical
	11718.5	41.0	5.1	46.1	74.0	-27.9	Peak	Vertical
11	7375.0	48.6	-0.6	48.0	74.0	-26.0	Peak	Horizontal
	11319.0	40.8	5.4	46.2	74.0	-27.8	Peak	Horizontal
	15458.5	40.2	7.1	47.3	74.0	-26.7	Peak	Horizontal
	4910.0	49.9	-7.2	42.7	74.0	-31.3	Peak	Vertical
	7383.5	46.7	-0.6	46.1	74.0	-27.9	Peak	Vertical
	11650.5	41.2	5.1	46.3	74.0	-27.7	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Mero Zhou
Test Date	2024-04-21	Test Mode	802.11n-HT40
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		


Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
03	8216.5	42.9	0.6	43.5	74.0	-30.5	Peak	Horizontal
	11684.5	42.0	5.1	47.1	74.0	-26.9	Peak	Horizontal
	15705.0	39.3	5.7	45.0	74.0	-29.0	Peak	Horizontal
	7511.0	44.0	-0.5	43.5	74.0	-30.5	Peak	Vertical
	11319.0	42.6	5.4	48.0	74.0	-26.0	Peak	Vertical
	15424.5	39.0	6.8	45.8	74.0	-28.2	Peak	Vertical
06	7315.5	46.0	-0.7	45.3	74.0	-28.7	Peak	Horizontal
	11982.0	41.6	5.1	46.7	74.0	-27.3	Peak	Horizontal
	15373.5	40.9	7.3	48.2	74.0	-25.8	Peak	Horizontal
	3958.0	53.6	-9.4	44.2	74.0	-29.8	Peak	Vertical
	11115.0	41.6	5.2	46.8	74.0	-27.2	Peak	Vertical
	15467.0	41.3	7.2	48.5	74.0	-25.5	Peak	Vertical
09	7349.5	43.3	-0.7	42.6	74.0	-31.4	Peak	Horizontal
	11021.5	41.4	5.0	46.4	74.0	-27.6	Peak	Horizontal
	15866.5	41.3	6.0	47.3	74.0	-26.7	Peak	Horizontal
	3958.0	48.1	-9.4	38.7	74.0	-35.3	Peak	Vertical
	8293.0	43.2	0.4	43.6	74.0	-30.4	Peak	Vertical
	11030.0	41.9	5.2	47.1	74.0	-26.9	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission below 1GHz:

Site: SIP-AC2	Test Date: 2024-04-26
Limit: FCC_Part15.209_RSE(3m)	Engineer: Mero Zhou
Probe: VULB 9168_00999_25-2000MHz	Polarity: Horizontal
EUT: Intelligent Battery Charger	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2452MHz	

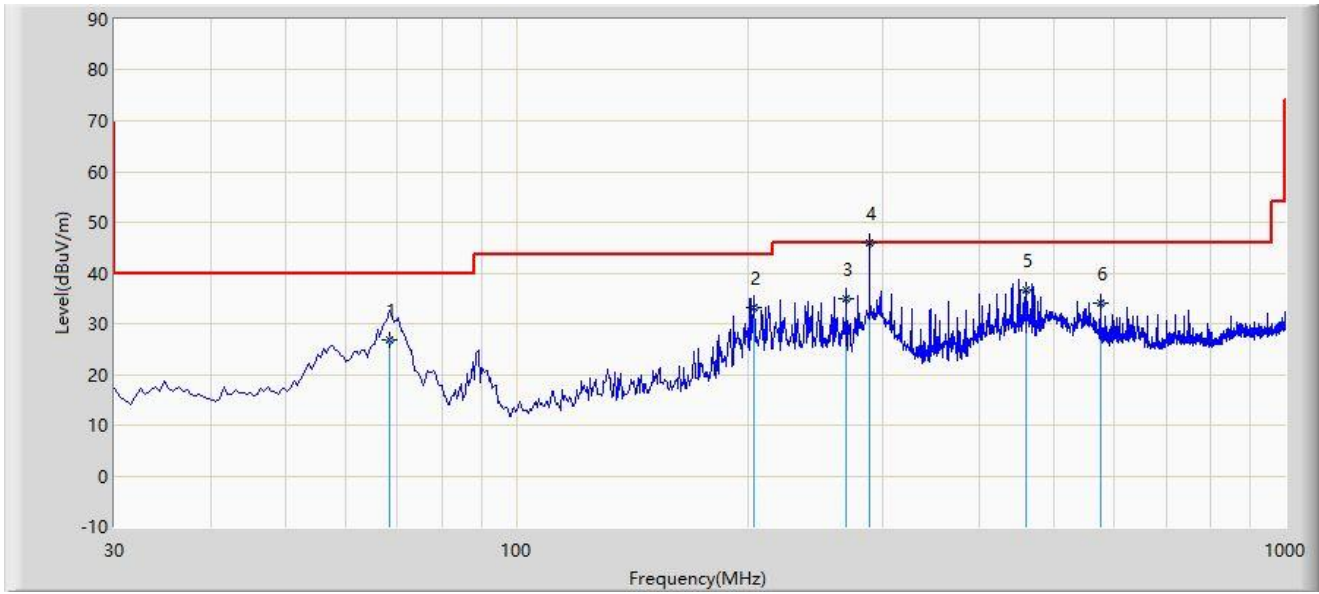

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		68.315	26.931	10.500	-13.069	40.000	16.430	QP
2		204.115	33.333	18.200	-10.167	43.500	15.134	QP
3		268.620	35.000	17.300	-11.000	46.000	17.700	QP
4	*	288.020	45.839	27.300	-0.161	46.000	18.539	QP
5		460.980	36.729	13.800	-9.271	46.000	22.929	QP
6		576.110	34.202	9.400	-11.798	46.000	24.802	QP

Note 1: " * ", means this data is the worst emission level.


Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

Site: SIP-AC2	Test Date: 2024-04-26
Limit: FCC_Part15.209_RSE(3m)	Engineer: Mero Zhou
Probe: VULB 9168_00999_25-2000MHz	Polarity: Vertical
EUT: Intelligent Battery Charger	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2452MHz	

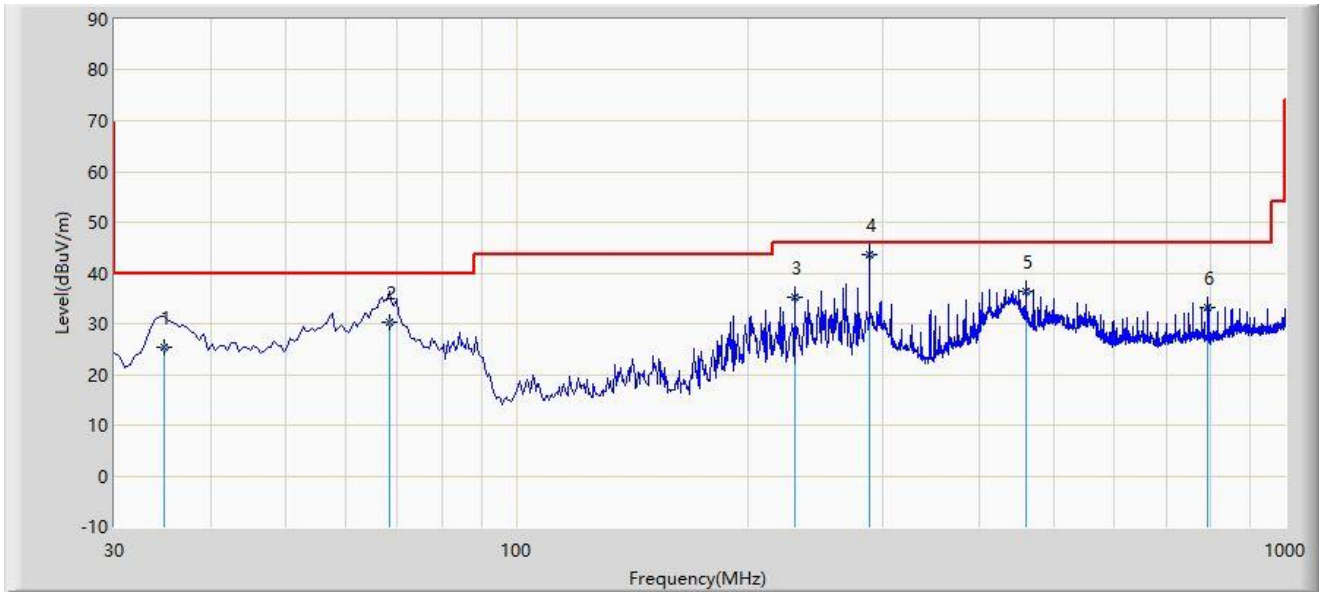

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		34.850	25.279	8.200	-14.721	40.000	17.079	QP
2		68.315	30.231	13.800	-9.769	40.000	16.430	QP
3		230.305	35.084	19.500	-10.916	46.000	15.584	QP
4	*	288.020	43.639	25.100	-2.361	46.000	18.539	QP
5		460.680	36.424	13.500	-9.576	46.000	22.924	QP
6		791.935	33.264	4.800	-12.736	46.000	28.464	QP

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).


Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

A.7 Radiated Restricted Band Edge Test Result

Site: SIP-AC2	Test Date: 2024-04-19
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: Intelligent Battery Charger	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2412MHz	

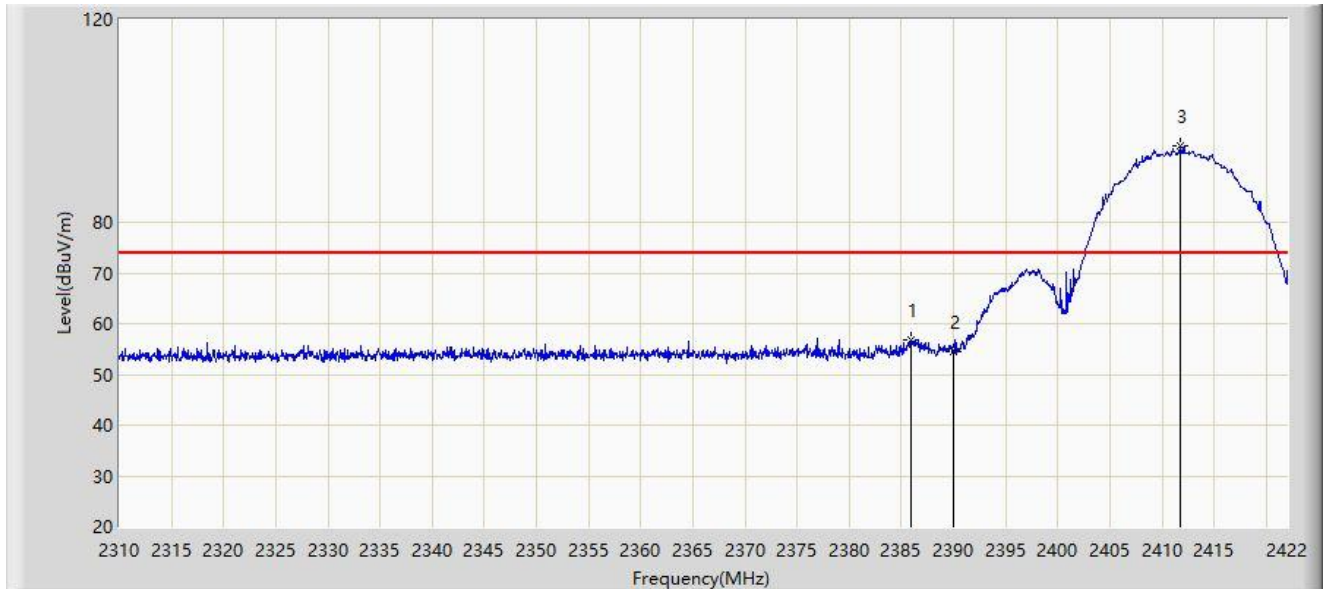


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2385.936	56.916	25.135	-17.084	74.000	31.782	PK
2		2390.000	54.535	22.782	-19.465	74.000	31.753	PK
3		2411.696	95.001	63.294	N/A	N/A	31.707	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2024-04-19
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: Intelligent Battery Charger	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2412MHz	

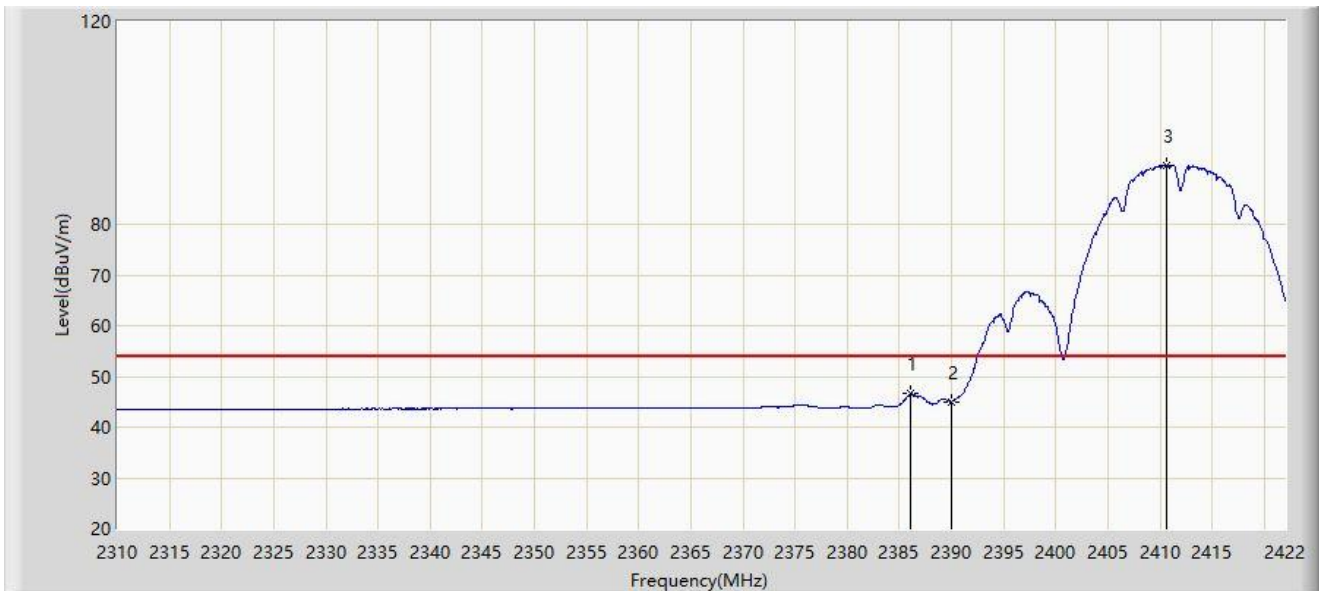

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2386.048	46.600	14.820	-7.400	54.000	31.780	AV
2		2390.000	45.051	13.298	-8.949	54.000	31.753	AV
3		2410.576	91.615	59.906	N/A	N/A	31.709	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2024-04-19
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: Intelligent Battery Charger	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2412MHz	



No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.968	63.122	31.369	-10.878	74.000	31.753	PK
2		2390.000	62.982	31.229	-11.018	74.000	31.753	PK
3		2411.528	102.837	71.130	N/A	N/A	31.707	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2024-04-19
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: Intelligent Battery Charger	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2412MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2386.104	51.849	20.069	-2.151	54.000	31.780	AV
2		2390.000	48.935	17.182	-5.065	54.000	31.753	AV
3		2410.184	99.369	67.660	N/A	N/A	31.709	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2024-04-19
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: Intelligent Battery Charger	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2462MHz	

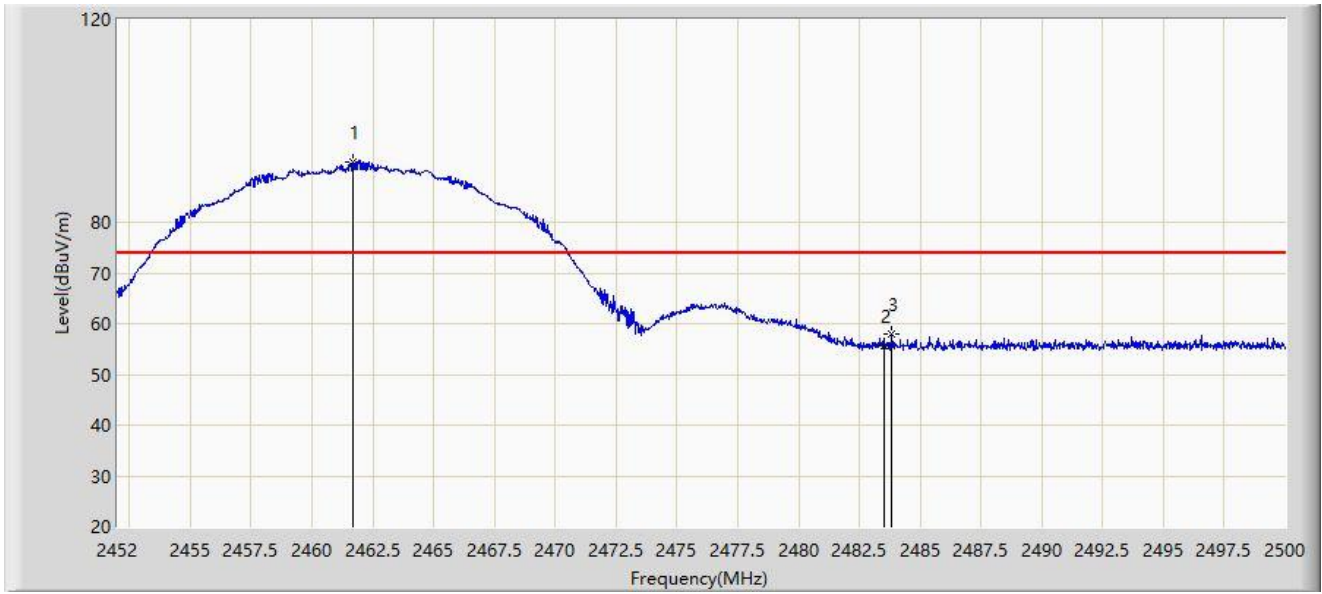

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2461.672	91.990	60.216	N/A	N/A	31.773	PK
2		2483.500	55.659	23.894	-18.341	74.000	31.765	PK
3	*	2483.848	57.885	26.117	-16.115	74.000	31.768	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2024-04-19
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: Intelligent Battery Charger	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2462MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2461.120	87.899	56.130	N/A	N/A	31.769	AV
2	*	2483.500	44.528	12.763	-9.472	54.000	31.765	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2024-04-19
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: Intelligent Battery Charger	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2462MHz	

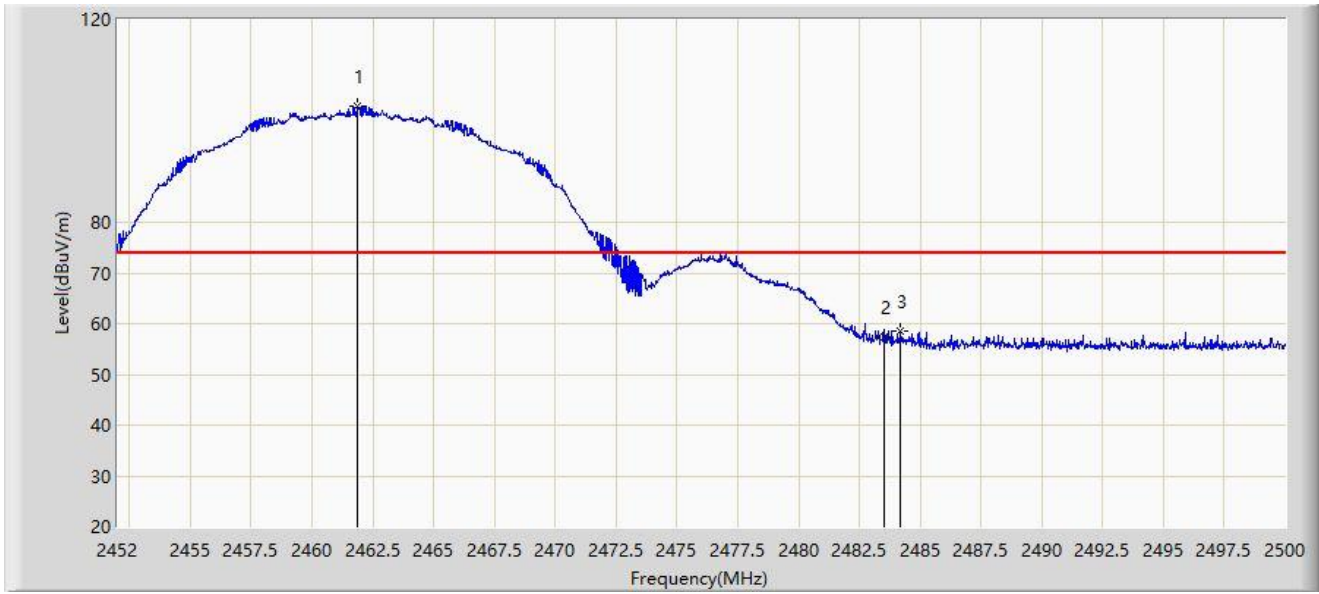

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2461.888	102.880	71.105	N/A	N/A	31.775	PK
2		2483.500	57.258	25.493	-16.742	74.000	31.765	PK
3	*	2484.208	58.591	26.820	-15.409	74.000	31.771	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2024-04-19
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: Intelligent Battery Charger	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2462MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2461.048	98.752	66.984	N/A	N/A	31.768	AV
2	*	2483.500	46.805	15.040	-7.195	54.000	31.765	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2024-04-19
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: Intelligent Battery Charger	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2412MHz	

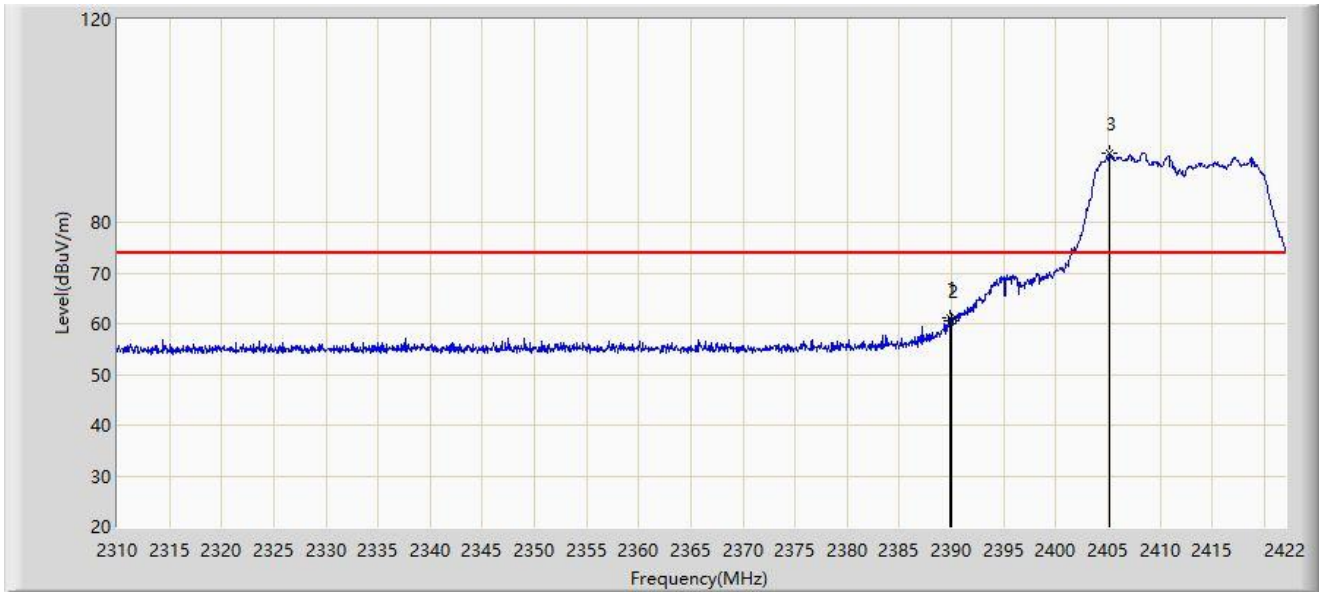


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.856	61.151	29.397	-12.849	74.000	31.754	PK
2		2390.000	60.536	28.783	-13.464	74.000	31.753	PK
3		2405.088	93.540	61.826	N/A	N/A	31.714	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2024-04-19
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: Intelligent Battery Charger	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2412MHz	

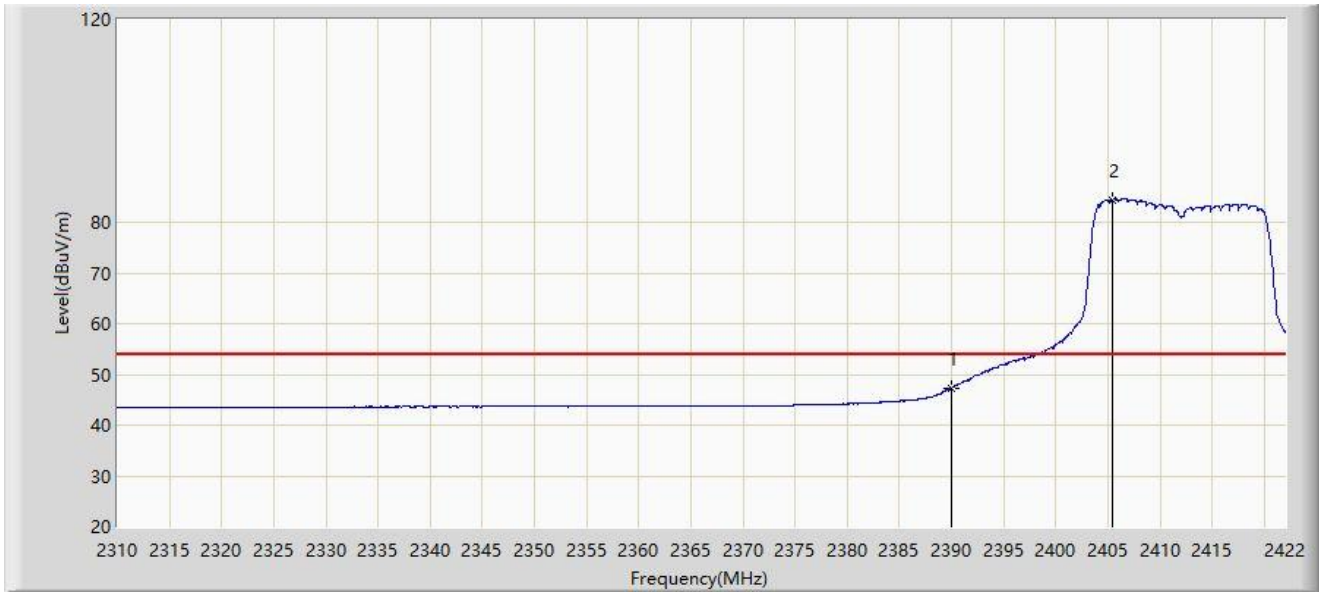

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	47.299	15.546	-6.701	54.000	31.753	AV
2		2405.480	84.463	52.749	N/A	N/A	31.714	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2024-04-19
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: Intelligent Battery Charger	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2412MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.856	68.132	36.378	-5.868	74.000	31.754	PK
2		2390.000	67.924	36.171	-6.076	74.000	31.753	PK
3		2408.504	101.452	69.741	N/A	N/A	31.711	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2024-04-19
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: Intelligent Battery Charger	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2412MHz	

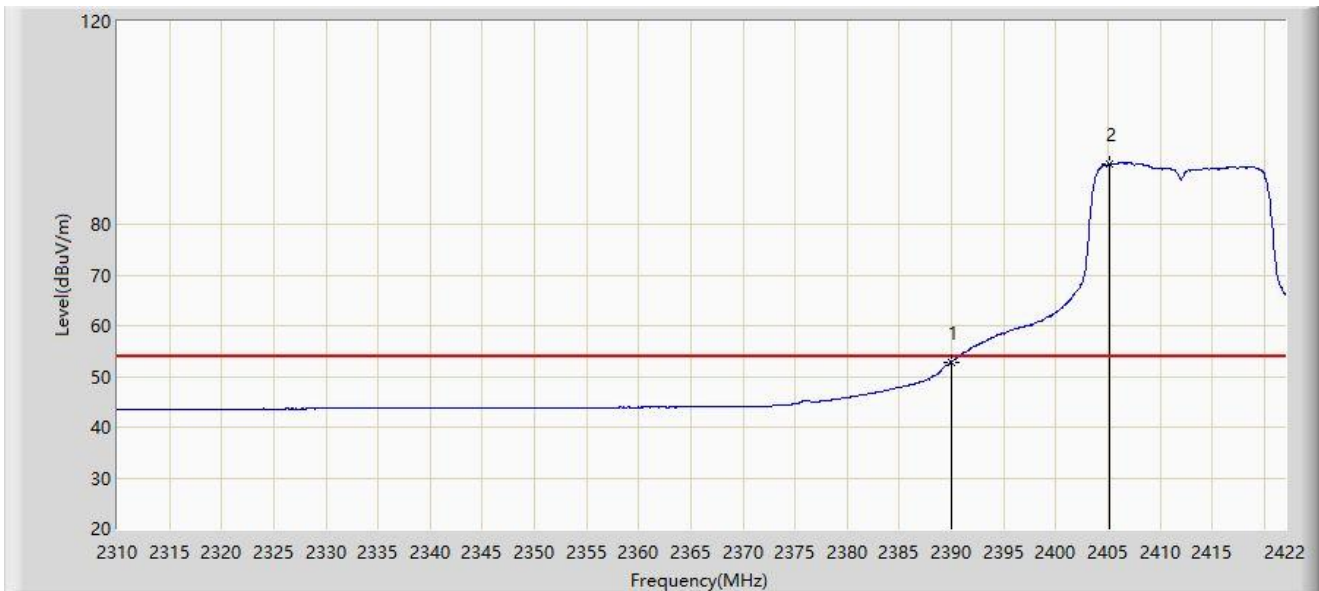


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	52.872	21.119	-1.128	54.000	31.753	AV
2		2405.144	91.897	60.183	N/A	N/A	31.714	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2024-04-19
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: Intelligent Battery Charger	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2462MHz	

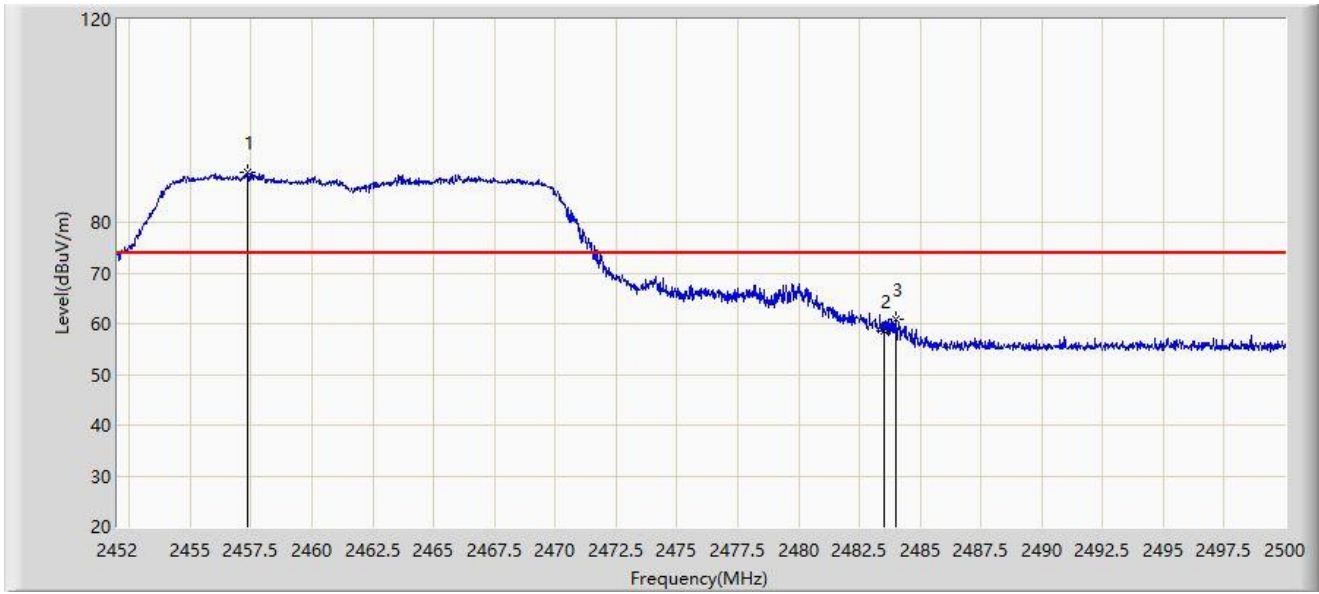


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2457.376	89.837	58.100	N/A	N/A	31.737	PK
2		2483.500	58.537	26.772	-15.463	74.000	31.765	PK
3	*	2483.992	60.928	29.159	-13.072	74.000	31.769	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2024-04-19
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: Intelligent Battery Charger	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2462MHz	

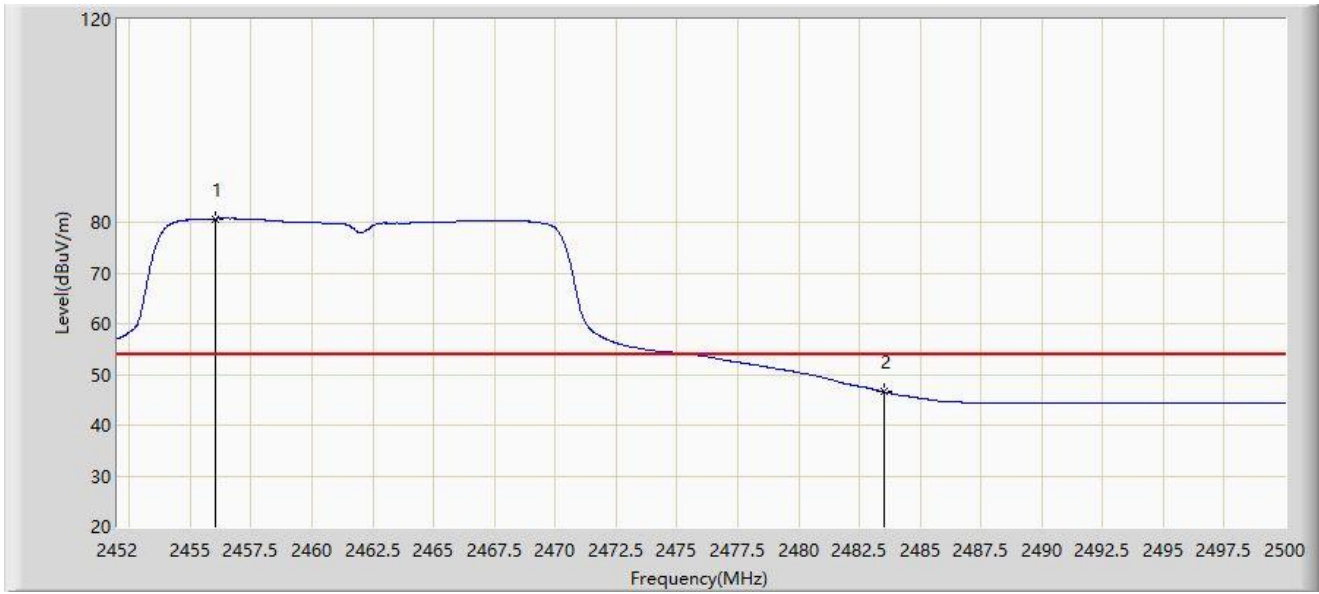


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2456.056	80.720	48.994	N/A	N/A	31.725	AV
2	*	2483.500	46.563	14.798	-7.437	54.000	31.765	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2024-04-19
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: Intelligent Battery Charger	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2462MHz	

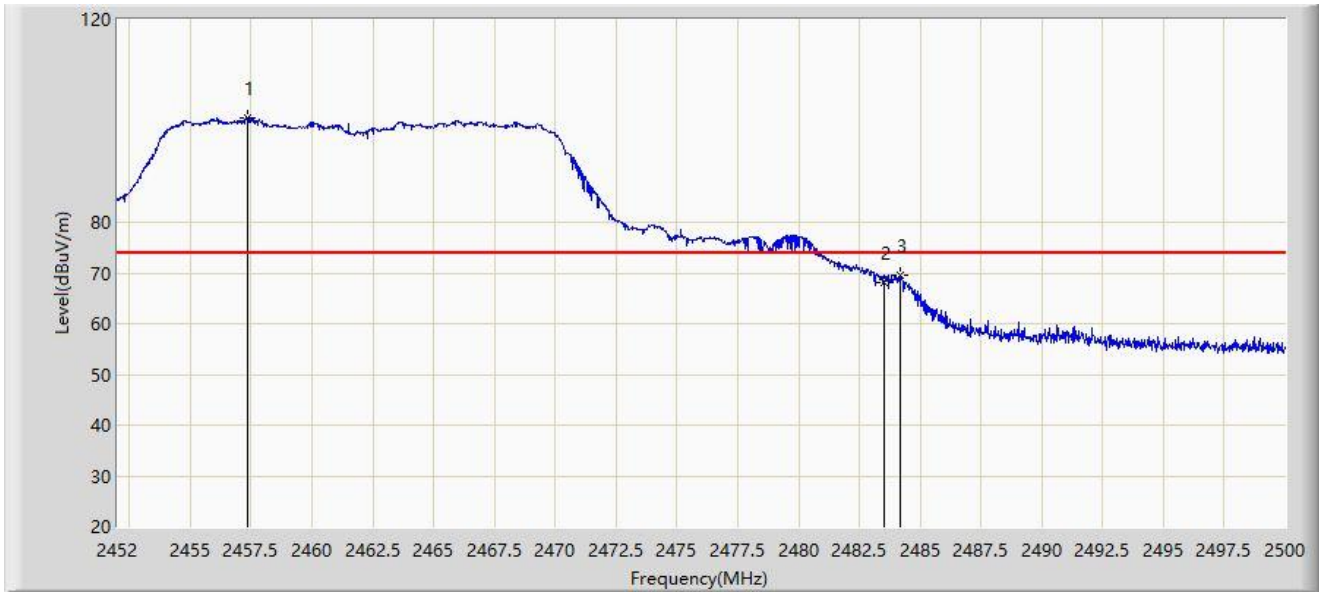


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2457.376	100.626	68.889	N/A	N/A	31.737	PK
2		2483.500	68.180	36.415	-5.820	74.000	31.765	PK
3	*	2484.160	69.601	37.830	-4.399	74.000	31.771	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2024-04-19
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: Intelligent Battery Charger	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2462MHz	

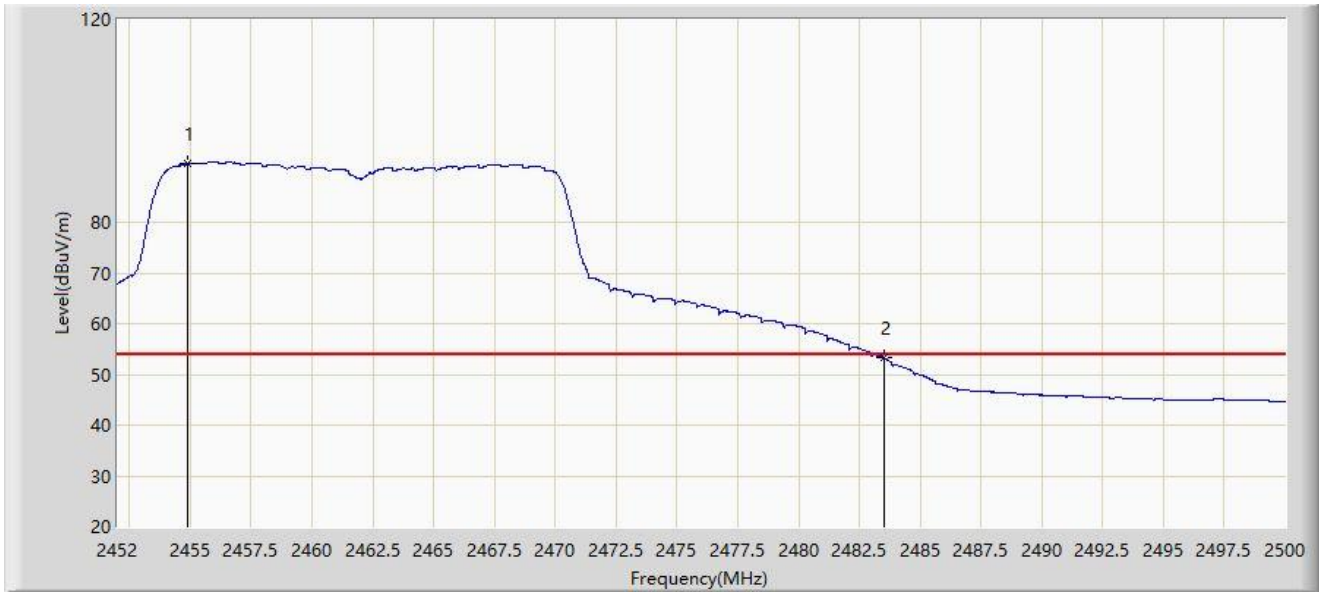


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2454.880	91.587	59.871	N/A	N/A	31.716	AV
2	*	2483.500	53.245	21.480	-0.755	54.000	31.765	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2024-04-21
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: Intelligent Battery Charger	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2412MHz	

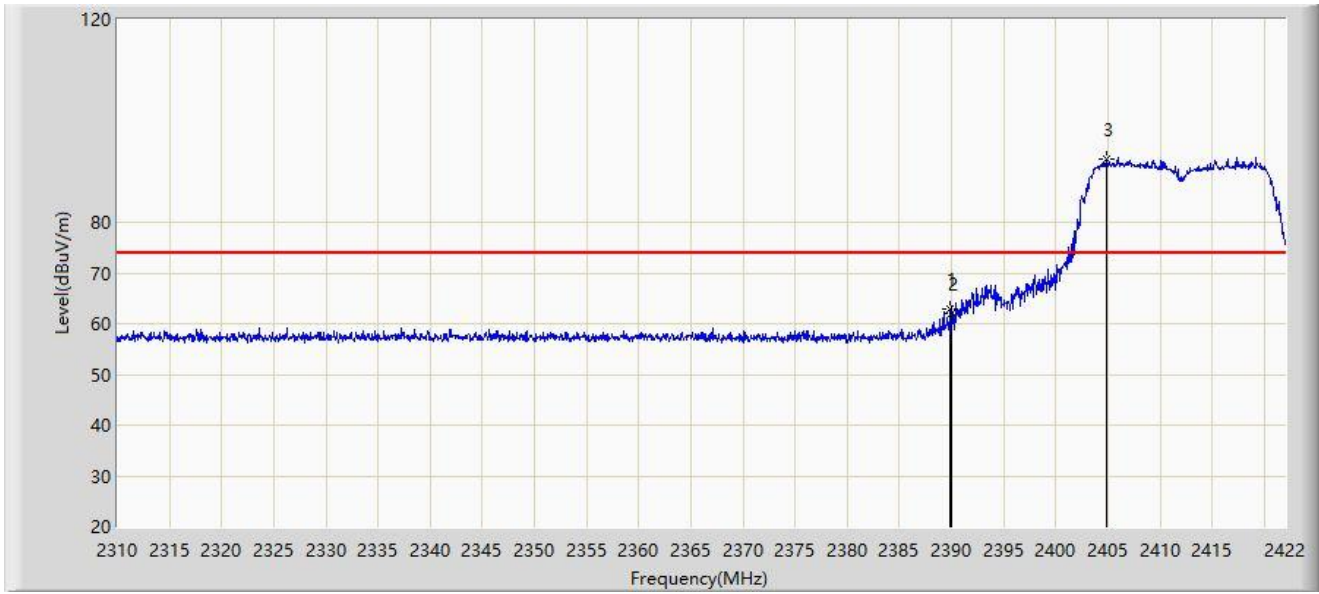


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.912	62.818	31.065	-11.182	74.000	31.753	PK
2		2390.000	62.009	30.256	-11.991	74.000	31.753	PK
3		2404.808	92.599	60.885	N/A	N/A	31.714	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2024-04-21
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: Intelligent Battery Charger	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2412MHz	

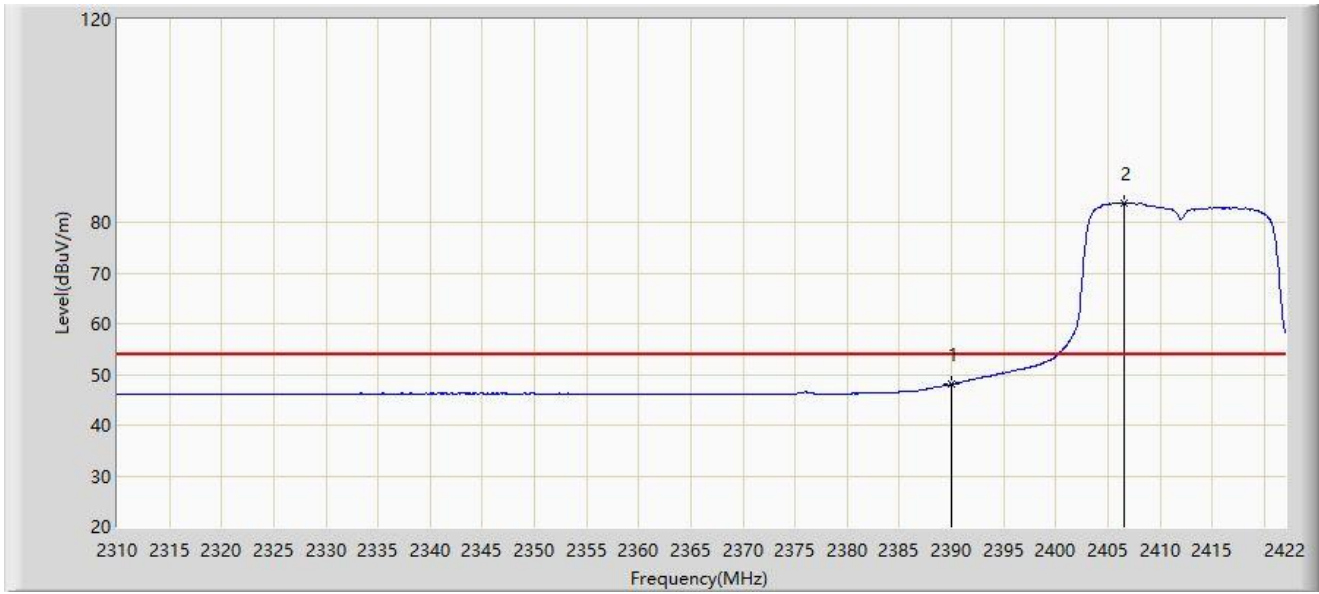


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	48.038	16.285	-5.962	54.000	31.753	AV
2		2406.600	83.833	52.120	N/A	N/A	31.713	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2024-04-21
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: Intelligent Battery Charger	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2412MHz	

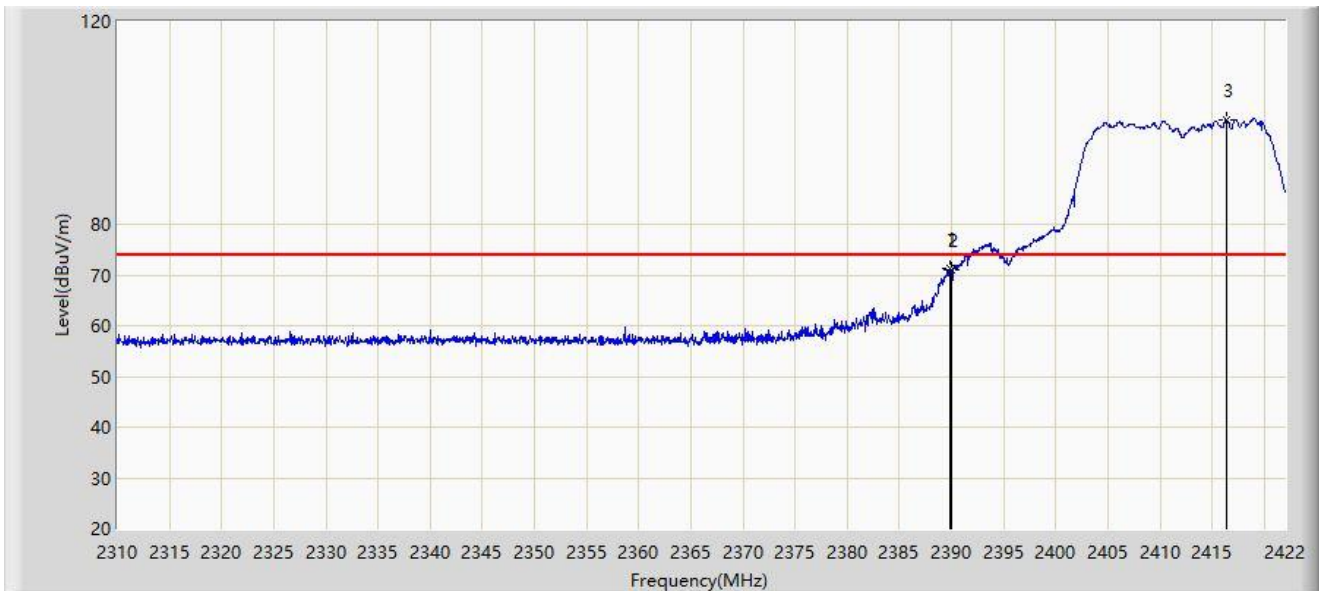


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.800	71.185	39.431	-2.815	74.000	31.754	PK
2		2390.000	71.085	39.332	-2.915	74.000	31.753	PK
3		2416.344	100.655	68.959	N/A	N/A	31.696	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2024-04-21
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: Intelligent Battery Charger	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2412MHz	

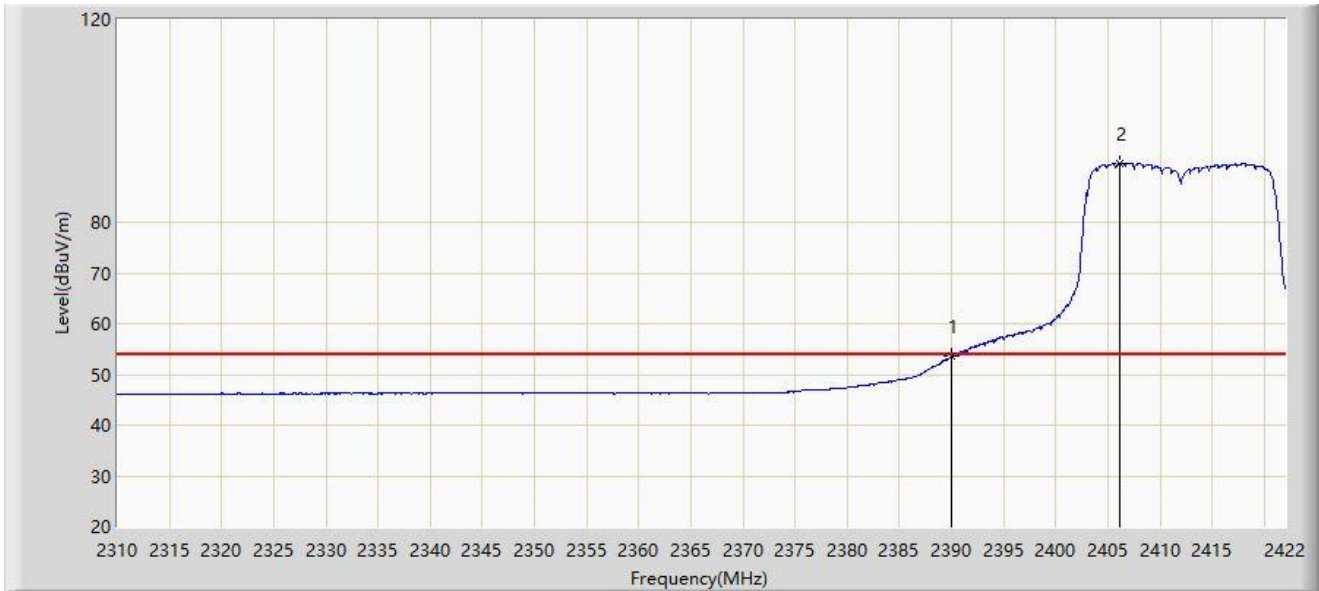


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	53.532	21.779	-0.468	54.000	31.753	AV
2		2406.152	91.590	59.877	N/A	N/A	31.713	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2024-04-21
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: Intelligent Battery Charger	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2462MHz	

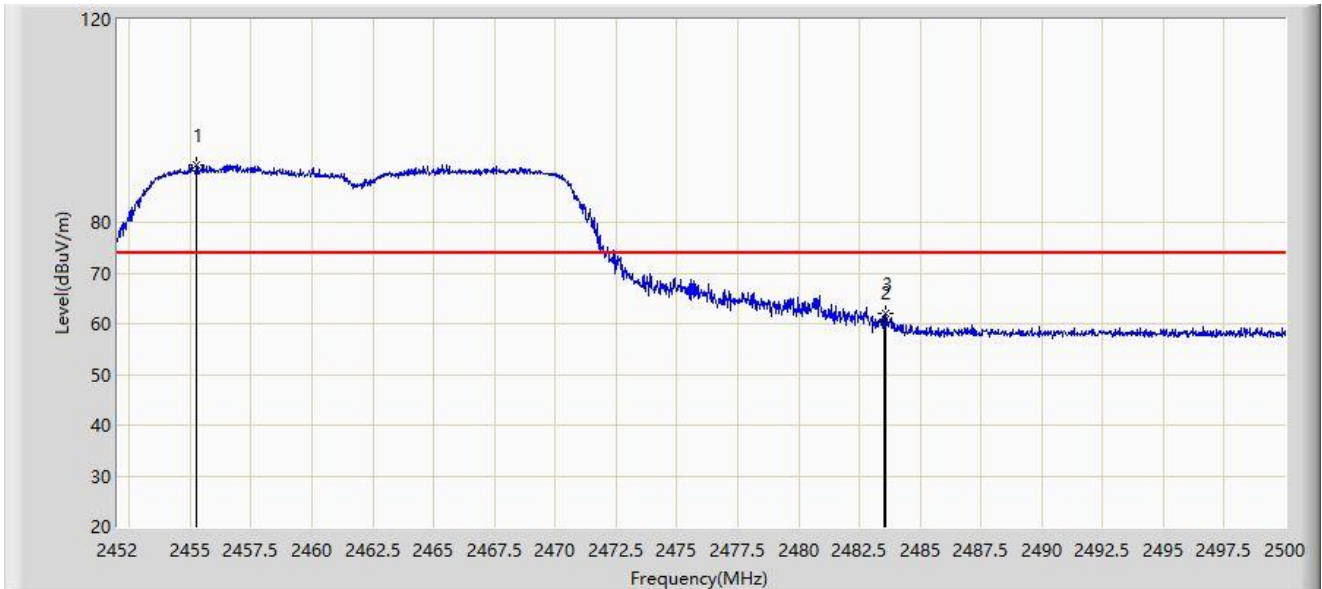


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2455.264	91.387	59.668	N/A	N/A	31.720	PK
2		2483.500	60.357	28.592	-13.643	74.000	31.765	PK
3	*	2483.560	61.916	30.150	-12.084	74.000	31.765	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2024-04-21
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: Intelligent Battery Charger	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2462MHz	

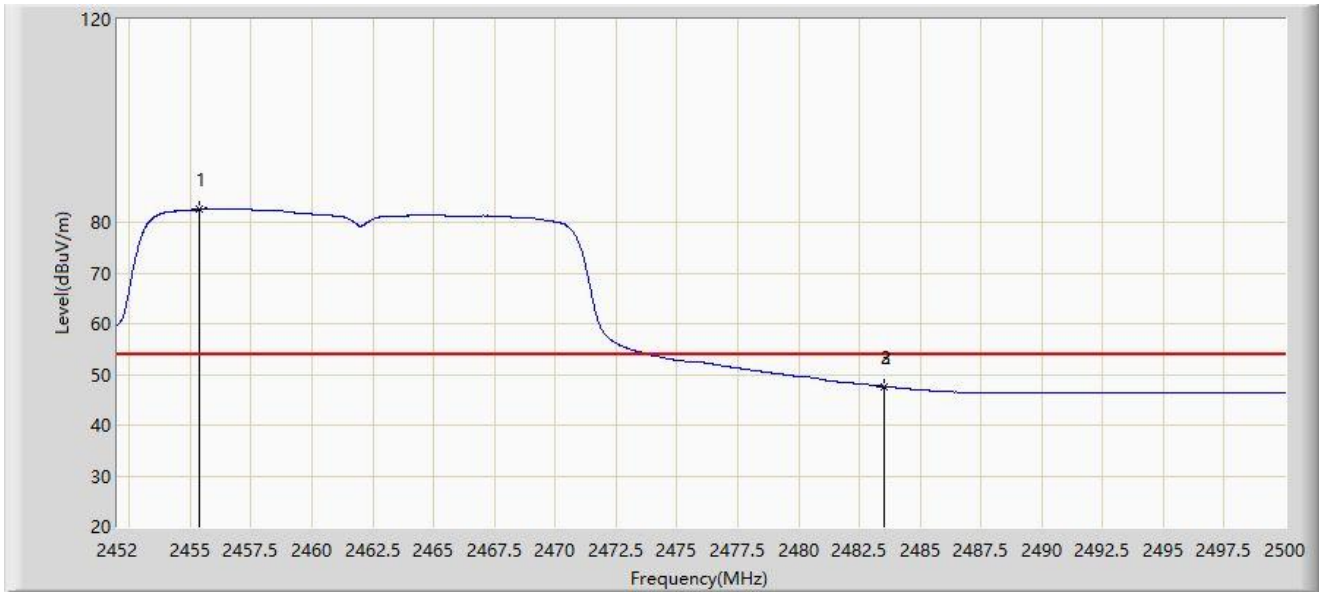


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2455.384	82.594	50.874	N/A	N/A	31.720	AV
2		2483.500	47.644	15.879	-6.356	54.000	31.765	AV
3	*	2483.512	47.652	15.887	-6.348	54.000	31.765	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2024-04-21
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: Intelligent Battery Charger	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2462MHz	

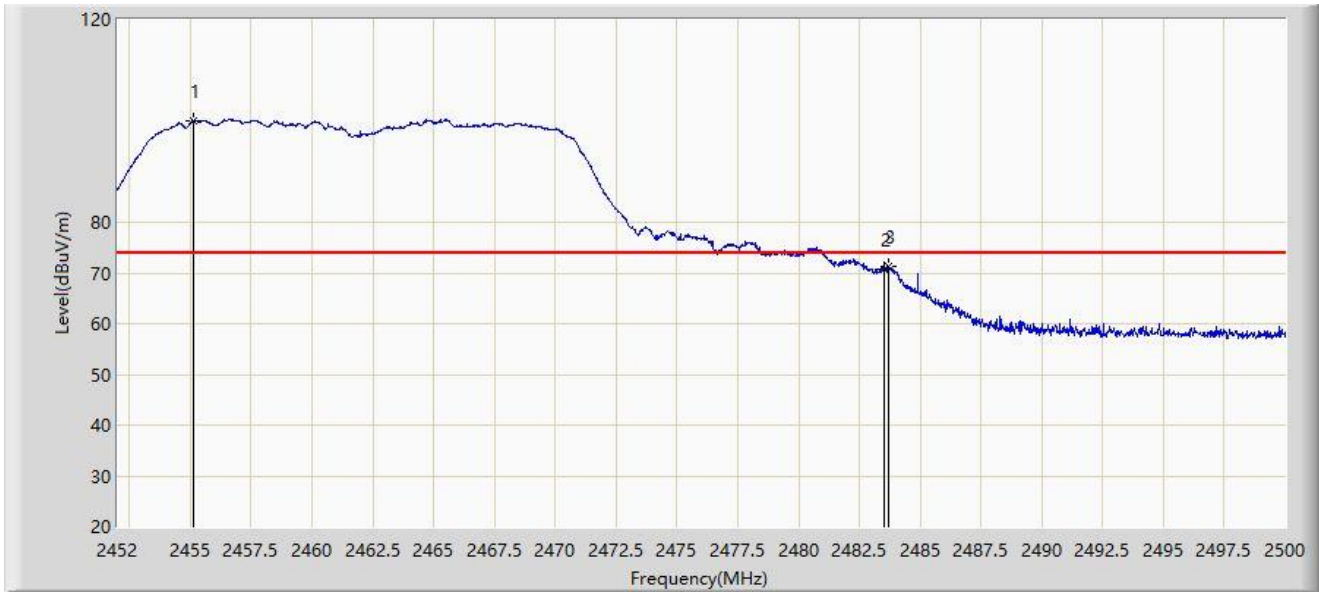


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2455.120	100.030	68.312	N/A	N/A	31.718	PK
2		2483.500	70.780	39.015	-3.220	74.000	31.765	PK
3	*	2483.704	71.422	39.655	-2.578	74.000	31.767	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2024-04-21
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: Intelligent Battery Charger	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2462MHz	

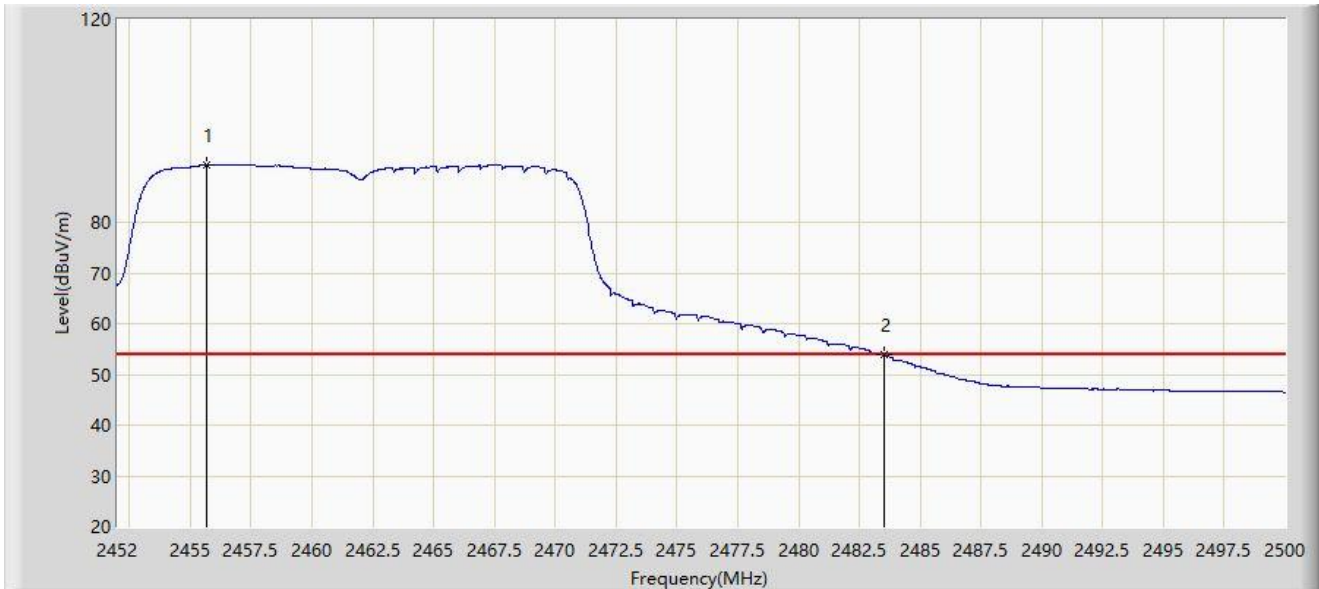


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2455.696	91.278	59.555	N/A	N/A	31.723	AV
2	*	2483.500	53.841	22.076	-0.159	54.000	31.765	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2024-04-21
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: Intelligent Battery Charger	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2422MHz	

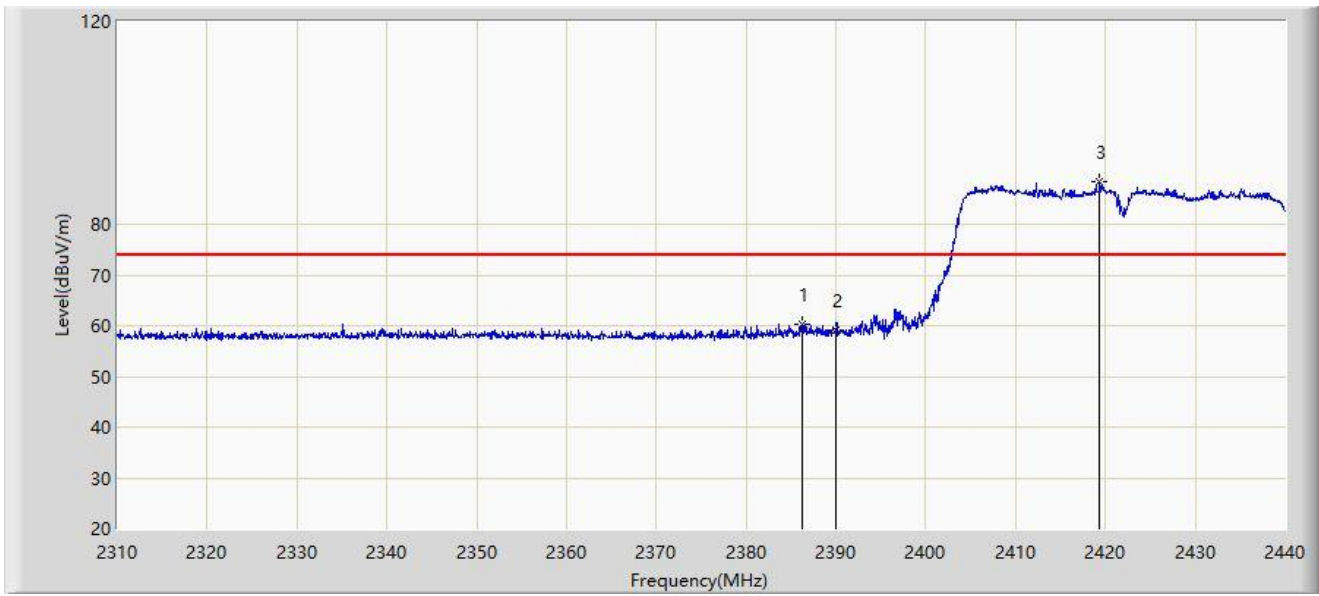


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2386.245	60.252	28.473	-13.748	74.000	31.779	PK
2		2390.000	59.002	27.249	-14.998	74.000	31.753	PK
3		2419.330	88.278	56.589	N/A	N/A	31.688	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2024-04-21
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: Intelligent Battery Charger	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2422MHz	

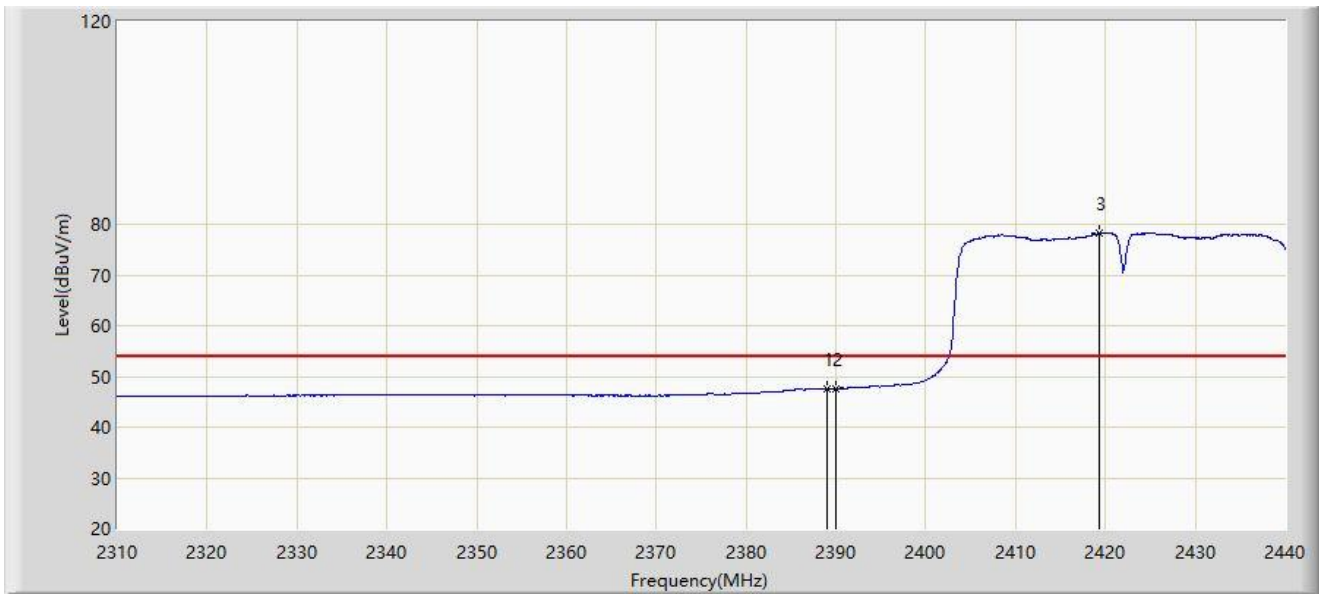


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2388.975	47.632	15.872	-6.368	54.000	31.760	AV
2		2390.000	47.603	15.850	-6.397	54.000	31.753	AV
3		2419.265	78.247	46.558	N/A	N/A	31.688	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2024-04-21
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: Intelligent Battery Charger	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2422MHz	

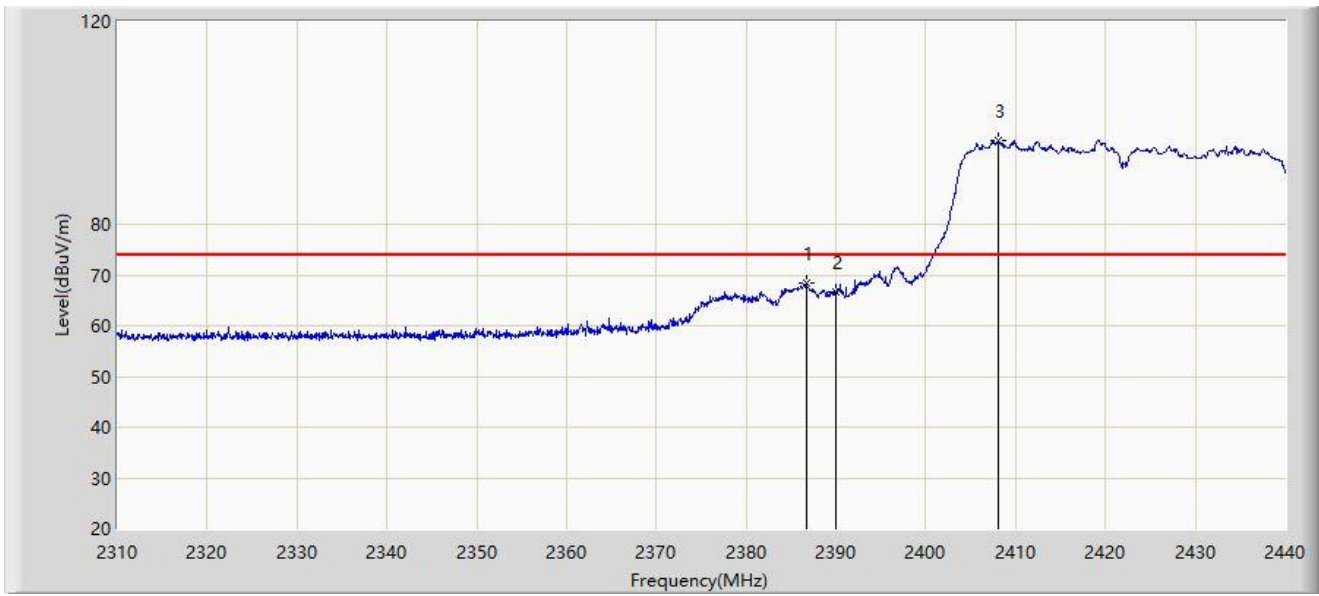


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2386.700	68.291	36.515	-5.709	74.000	31.776	PK
2		2390.000	66.704	34.951	-7.296	74.000	31.753	PK
3		2408.085	96.592	64.881	N/A	N/A	31.712	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2024-04-21
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: Intelligent Battery Charger	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2422MHz	

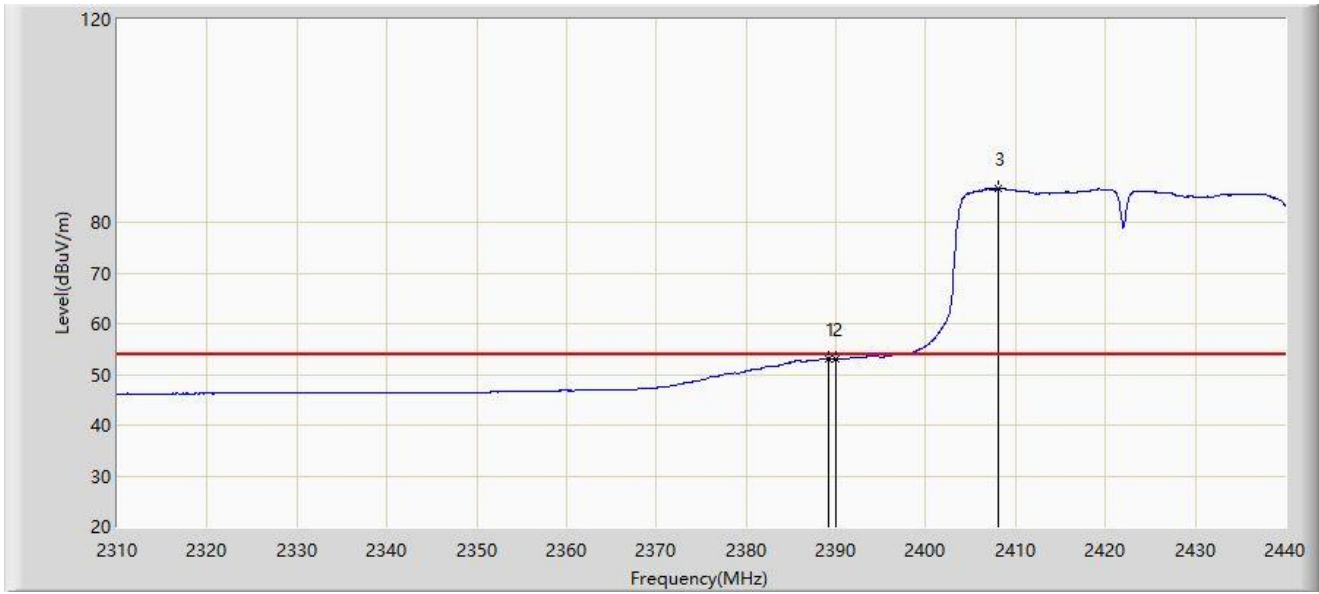


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.170	53.186	21.427	-0.814	54.000	31.758	AV
2		2390.000	53.033	21.280	-0.967	54.000	31.753	AV
3		2408.020	86.623	54.912	N/A	N/A	31.712	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2024-04-24
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: Intelligent Battery Charger	Power: AC 230V/50Hz
Test Mode: Transmit by 802.11n-HT40 at 2427MHz	

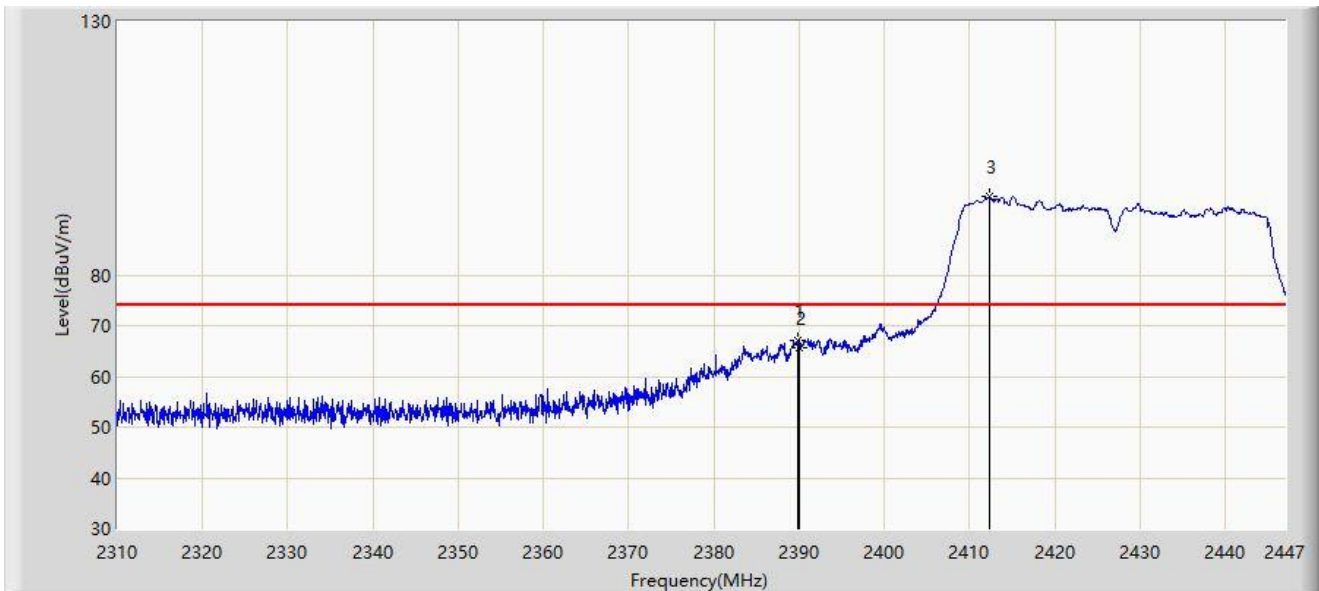


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.802	66.968	35.214	-7.032	74.000	31.754	PK
2		2390.000	65.673	33.920	-8.327	74.000	31.753	PK
3		2412.339	95.583	63.878	N/A	N/A	31.705	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2024-04-24
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: Intelligent Battery Charger	Power: AC 230V/50Hz
Test Mode: Transmit by 802.11n-HT40 at 2427MHz	

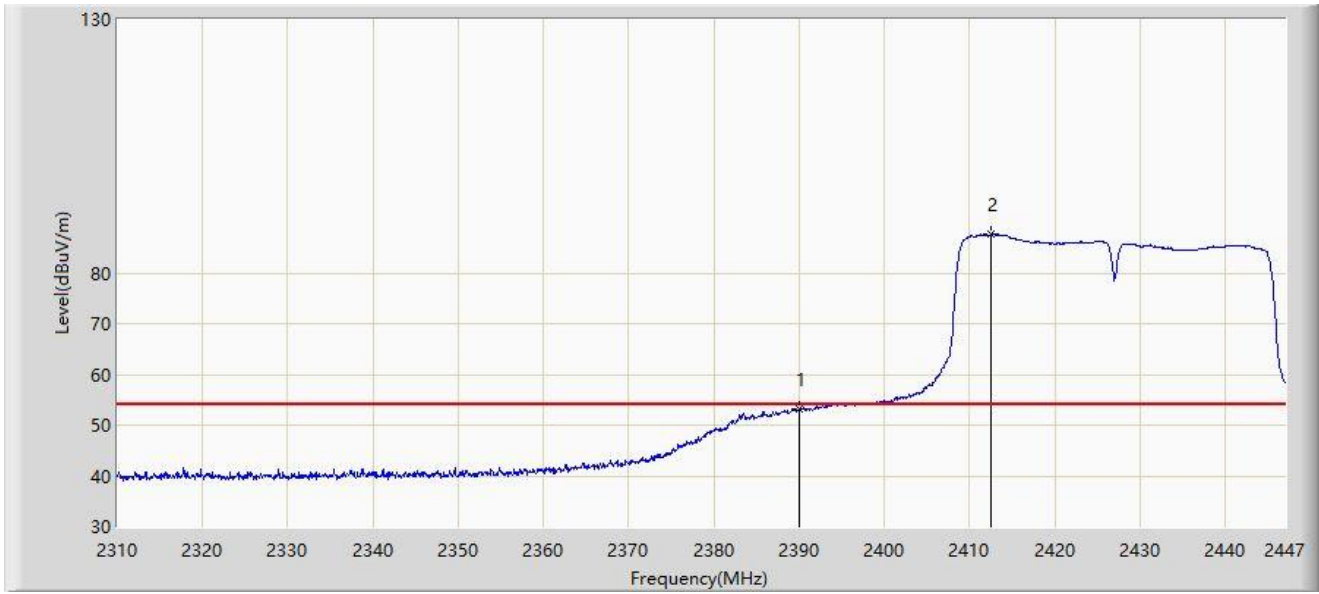


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	53.117	21.364	-0.883	54.000	31.753	AV
2		2412.544	87.639	55.934	N/A	N/A	31.705	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2024-04-24
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: Intelligent Battery Charger	Power: AC 230V/50Hz
Test Mode: Transmit by 802.11n-HT40 at 2437MHz	

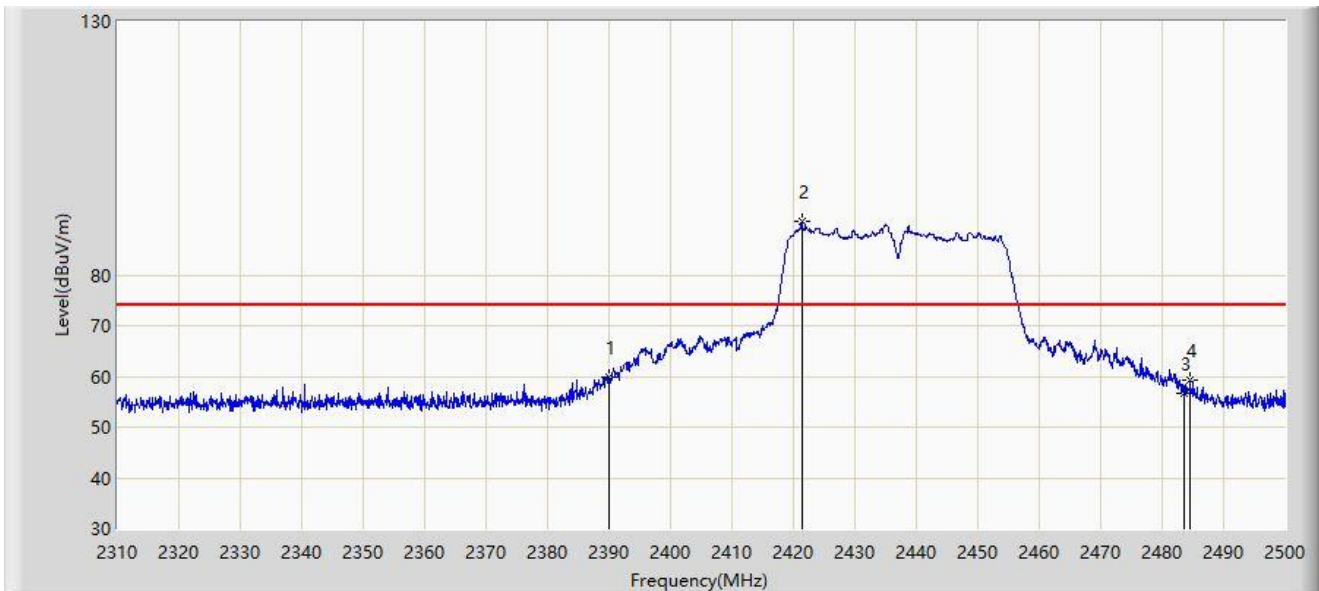


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	59.836	28.083	-14.164	74.000	31.753	PK
2		2421.435	90.457	58.773	N/A	N/A	31.684	PK
3		2483.500	56.553	24.788	-17.447	74.000	31.765	PK
4		2484.515	59.357	27.583	-14.643	74.000	31.774	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2024-04-24
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: Intelligent Battery Charger	Power: AC 230V/50Hz
Test Mode: Transmit by 802.11n-HT40 at 2437MHz	

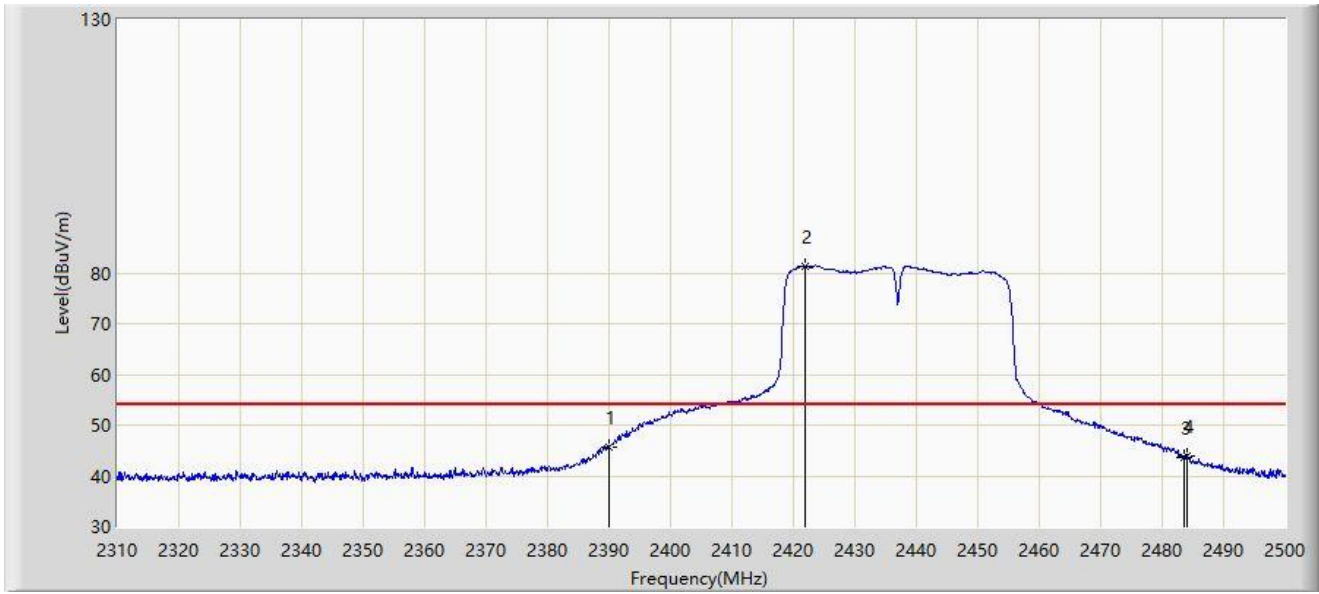


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	45.762	14.009	-8.238	54.000	31.753	AV
2		2421.815	81.420	49.737	N/A	N/A	31.683	AV
3		2483.500	43.749	11.984	-10.251	54.000	31.765	AV
4		2483.945	43.989	12.220	-10.011	54.000	31.769	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2024-04-24
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: Intelligent Battery Charger	Power: AC 230V/50Hz
Test Mode: Transmit by 802.11n-HT40 at 2437MHz	

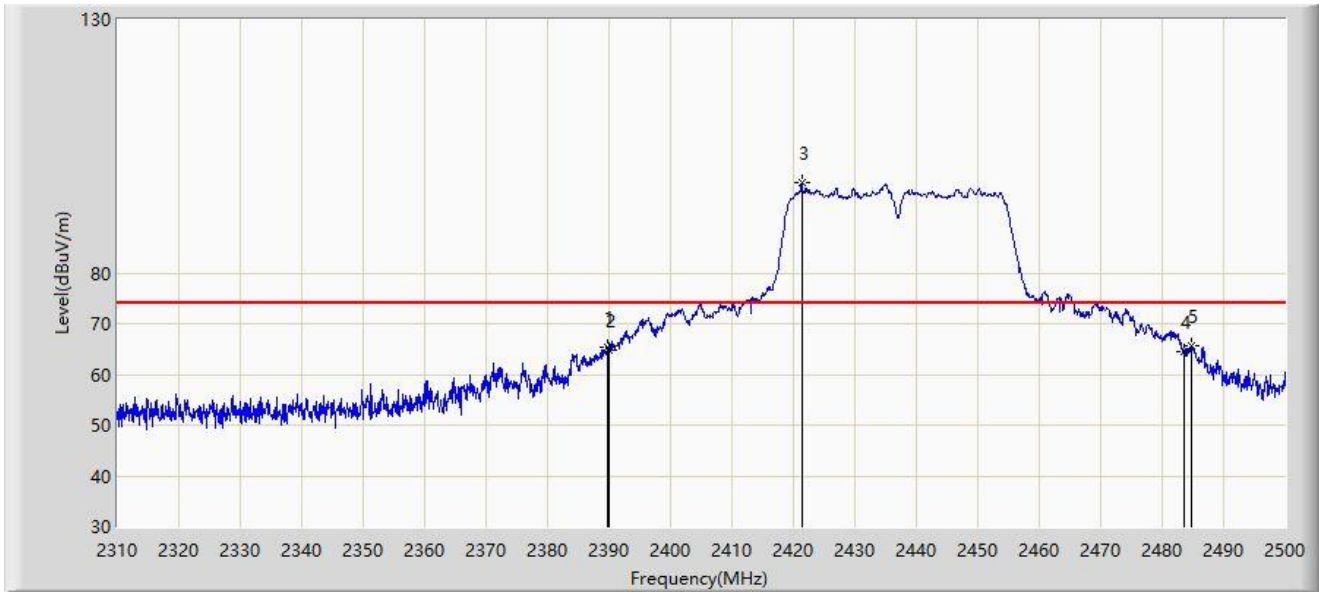


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2389.705	65.431	33.676	-8.569	74.000	31.755	PK
2		2390.000	64.673	32.920	-9.327	74.000	31.753	PK
3		2421.340	97.913	66.229	N/A	N/A	31.684	PK
4		2483.500	64.498	32.733	-9.502	74.000	31.765	PK
5	*	2484.800	65.533	33.757	-8.467	74.000	31.776	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2024-04-24
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: Intelligent Battery Charger	Power: AC 230V/50Hz
Test Mode: Transmit by 802.11n-HT40 at 2437MHz	

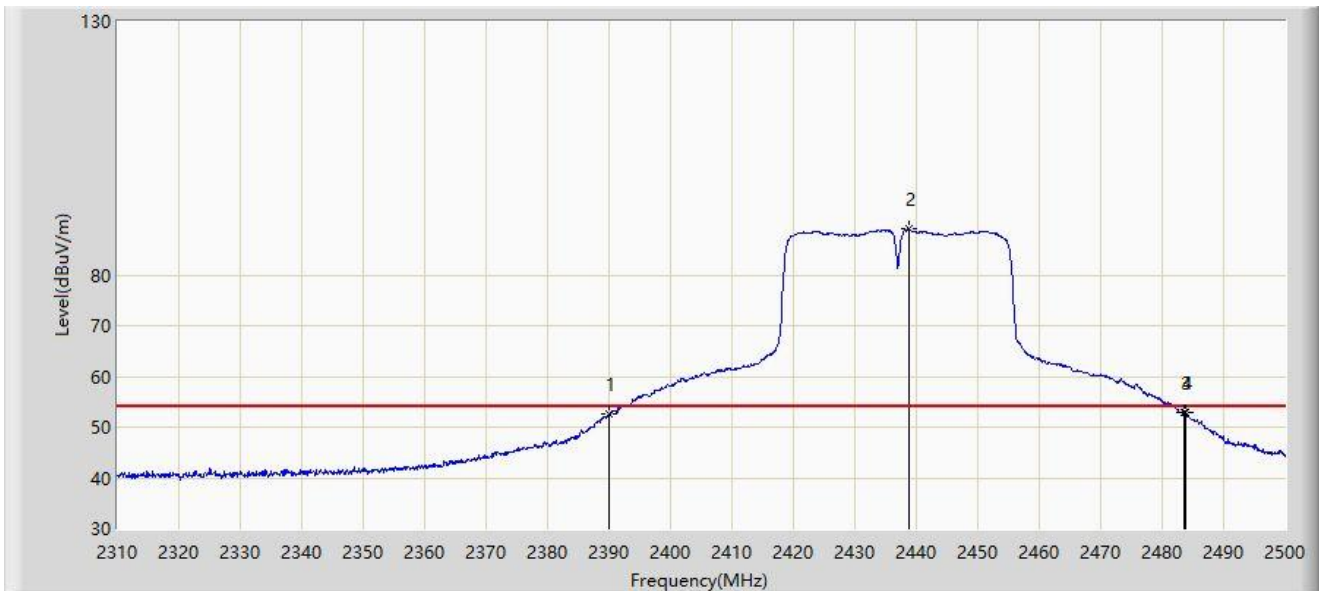


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2390.000	52.643	20.890	-1.357	54.000	31.753	AV
2		2438.725	89.052	57.407	N/A	N/A	31.646	AV
3		2483.500	52.861	21.096	-1.139	54.000	31.765	AV
4	*	2483.755	53.018	21.251	-0.982	54.000	31.767	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2024-04-21
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: Intelligent Battery Charger	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2452MHz	

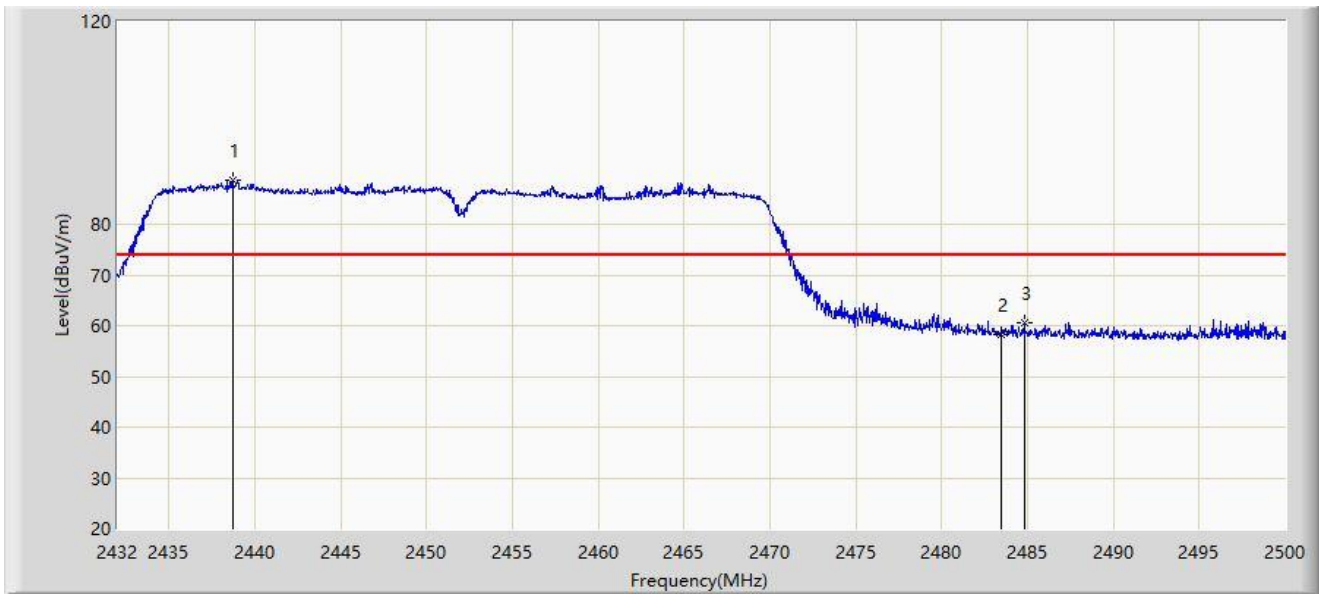


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2438.698	88.626	56.981	N/A	N/A	31.646	PK
2		2483.500	58.392	26.627	-15.608	74.000	31.765	PK
3	*	2484.802	60.607	28.831	-13.393	74.000	31.776	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2024-04-21
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: Intelligent Battery Charger	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2452MHz	

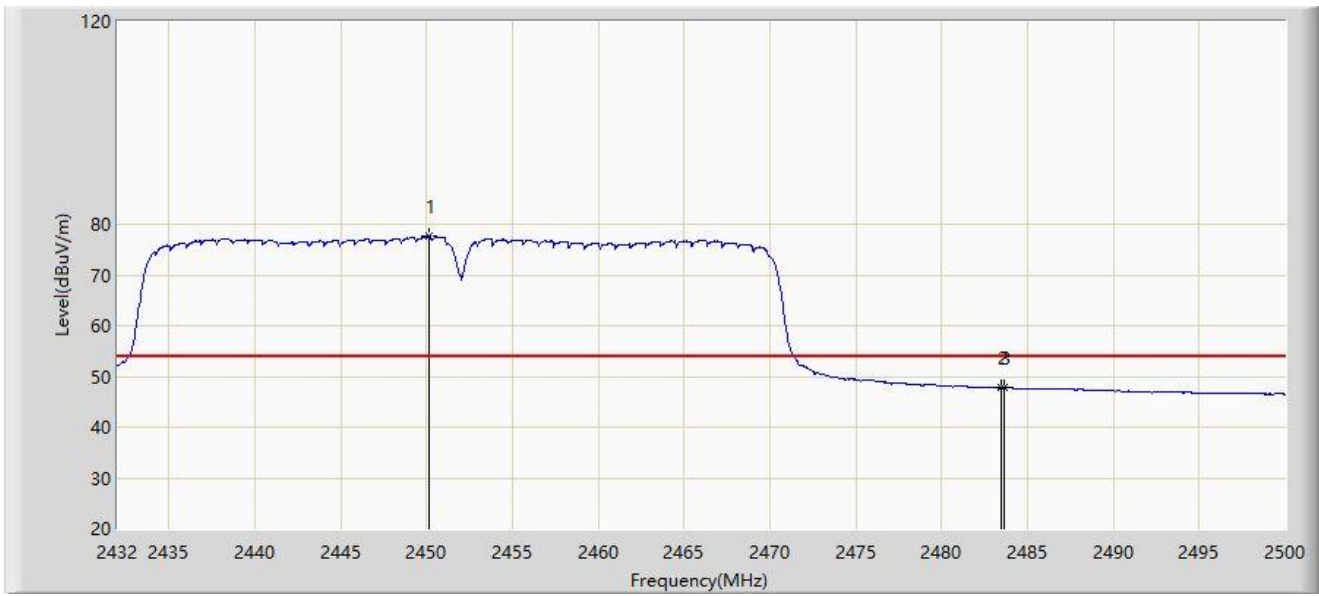

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2450.190	77.611	45.935	N/A	N/A	31.676	AV
2		2483.500	47.769	16.004	-6.231	54.000	31.765	AV
3	*	2483.646	47.821	16.055	-6.179	54.000	31.766	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2024-04-21
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: Intelligent Battery Charger	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2452MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2464.606	96.883	65.114	N/A	N/A	31.769	PK
2		2483.500	67.692	35.927	-6.308	74.000	31.765	PK
3	*	2483.578	68.842	37.076	-5.158	74.000	31.766	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2024-04-21
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: Intelligent Battery Charger	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2452MHz	

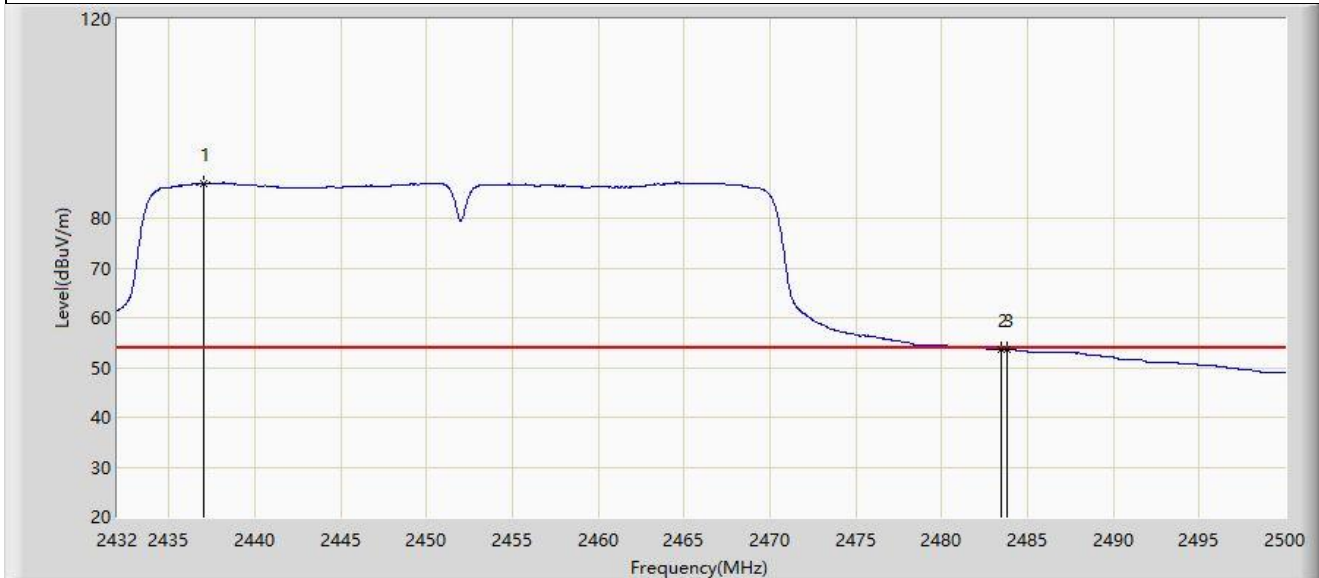

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2436.998	86.934	55.285	N/A	N/A	31.649	AV
2		2483.500	53.586	21.821	-0.414	54.000	31.765	AV
3	*	2483.782	53.631	21.863	-0.369	54.000	31.767	AV


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

A.8 AC Conducted Emissions Test Result

Site: SIP-SR2	Test Date: 2024-04-28
Temperature: 23.9°C	Humidity: 68.6%
Limit: FCC_Part15.207_CE_AC Power	Engineer: Miron Ding
Probe: SIP-SR2-ENV216_101684_C	Polarity: Line
EUT: Intelligent Battery Charger	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2452MHz	

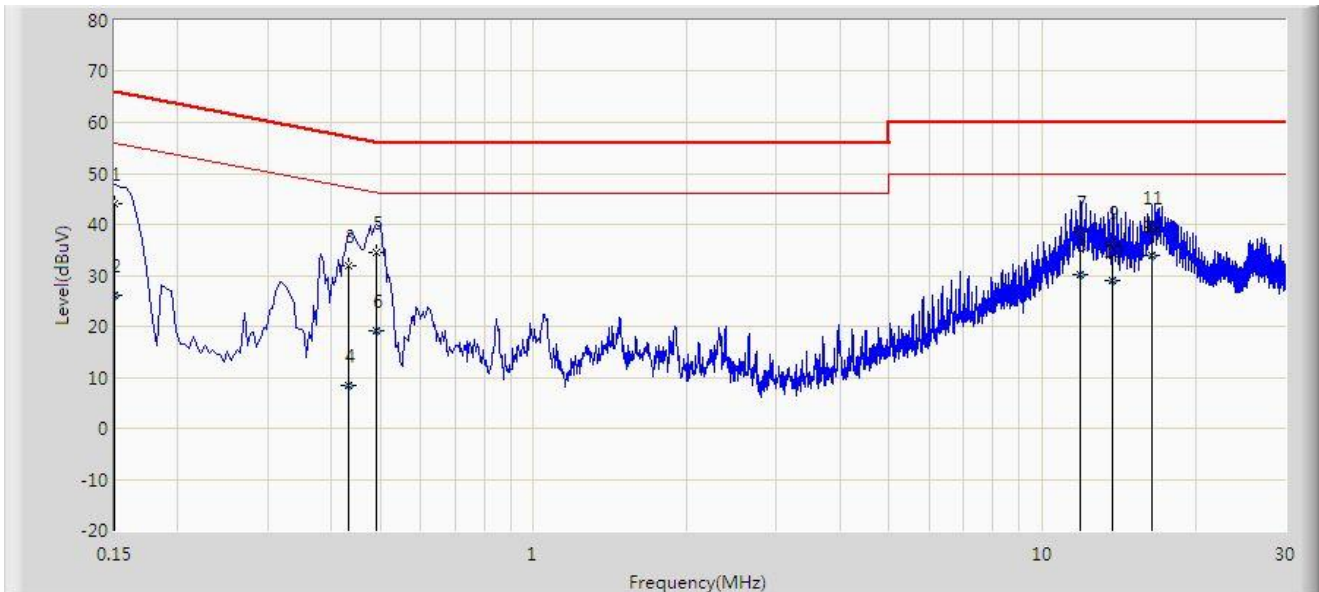


No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		0.150	44.107	34.201	-21.893	66.000	9.906	QP
2		0.150	25.987	16.081	-30.013	56.000	9.906	AV
3		0.434	31.812	22.082	-25.364	57.176	9.730	QP
4		0.434	8.528	-1.202	-38.648	47.176	9.730	AV
5		0.490	34.628	24.897	-21.540	56.168	9.730	QP
6		0.490	19.052	9.322	-27.116	46.168	9.730	AV
7		11.902	38.646	28.502	-21.354	60.000	10.144	QP
8		11.902	30.210	20.066	-19.790	50.000	10.144	AV
9		13.758	36.626	26.434	-23.374	60.000	10.192	QP
10		13.758	28.884	18.692	-21.116	50.000	10.192	AV
11		16.386	39.496	29.211	-20.504	60.000	10.285	QP
12	*	16.386	33.818	23.533	-16.182	50.000	10.285	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: SIP-SR2	Test Date: 2024-04-28
Temperature: 23.9°C	Humidity: 68.6%
Limit: FCC_Part15.207_CE_AC Power	Engineer: Miron Ding
Probe: SIP-SR2-ENV216_101684_C	Polarity: Neutral
EUT: Intelligent Battery Charger	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2452MHz	

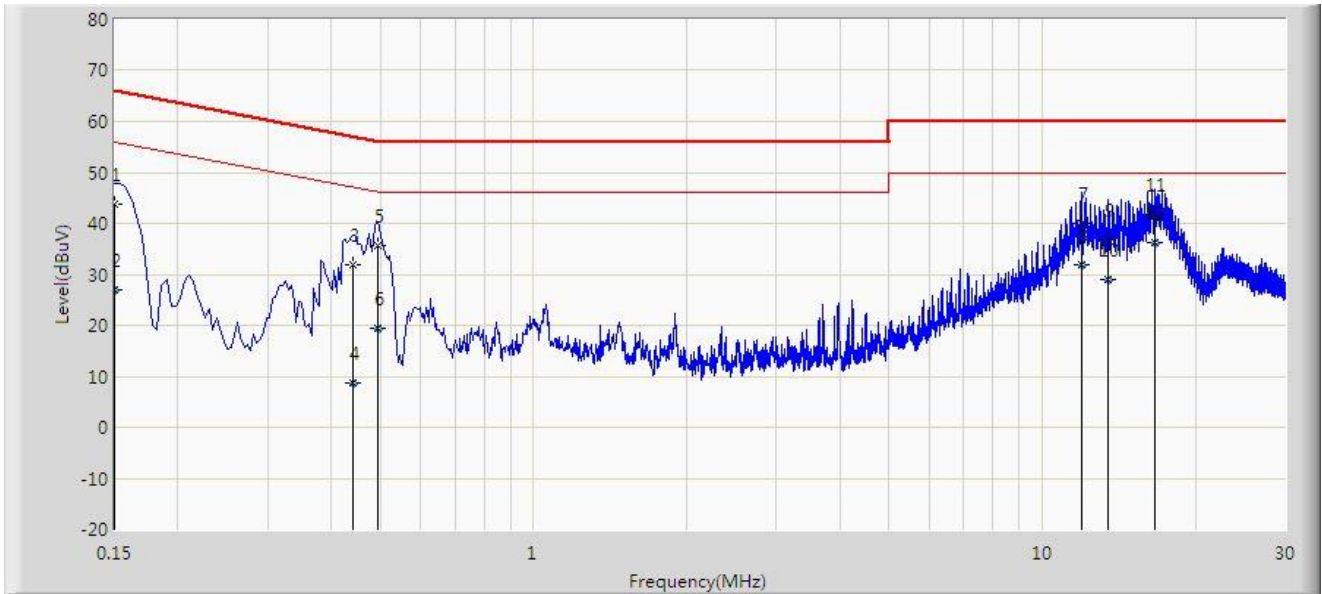

No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		0.150	43.780	34.137	-22.220	66.000	9.642	QP
2		0.150	26.908	17.266	-29.092	56.000	9.642	AV
3		0.442	31.854	22.144	-25.170	57.024	9.710	QP
4		0.442	8.655	-1.055	-38.369	47.024	9.710	AV
5		0.494	35.562	25.852	-20.538	56.100	9.710	QP
6		0.494	19.492	9.782	-26.609	46.100	9.710	AV
7		11.910	40.021	29.901	-19.979	60.000	10.121	QP
8		11.910	31.939	21.819	-18.061	50.000	10.121	AV
9		13.482	36.918	26.756	-23.082	60.000	10.162	QP
10		13.482	28.943	18.781	-21.057	50.000	10.162	AV
11		16.654	41.831	31.568	-18.169	60.000	10.263	QP
12	*	16.654	36.171	25.908	-13.829	50.000	10.263	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Appendix B – Test Setup Photograph

Refer to “2404RSU029-UT” file.

Appendix C – EUT Photograph

Refer to “2404RSU029-UE” file.

The End
