


802.11a



802.11n(HT20)




CH36

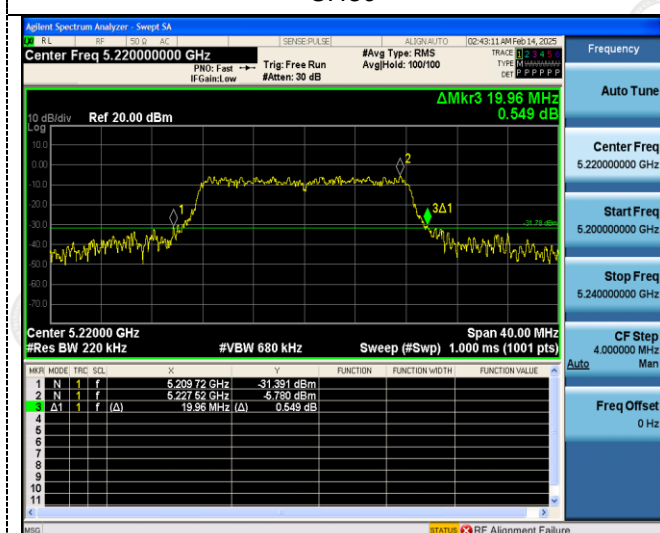

CH36




CH40

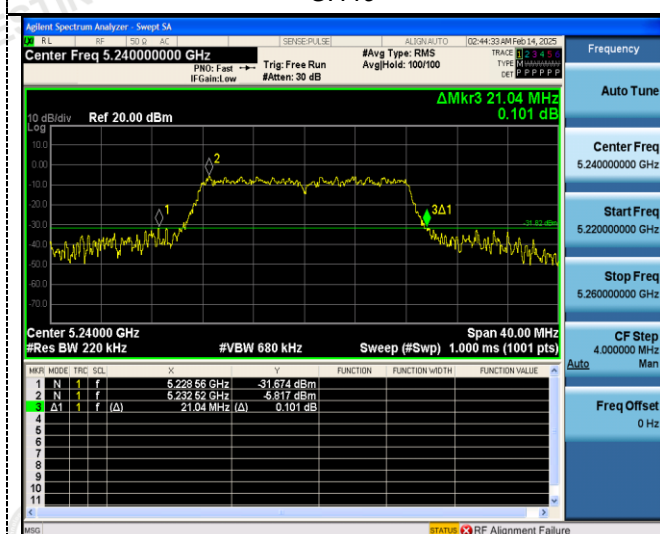

CH40




CH48




CH48




802.11n(HT40)

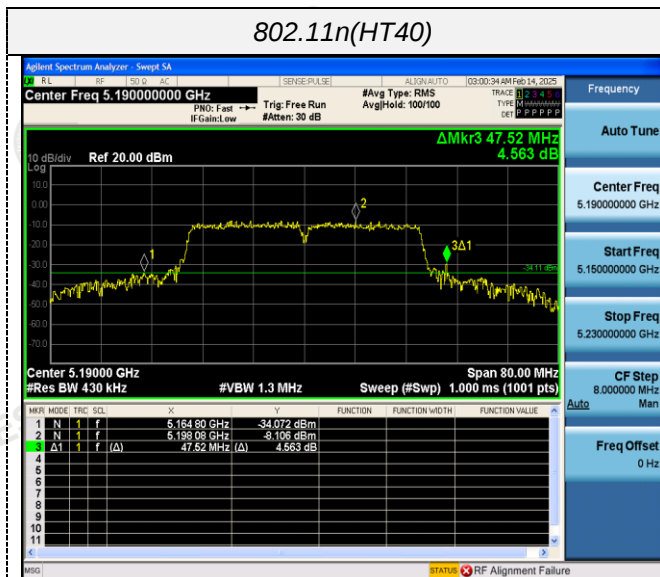


802.11ac(HT20)

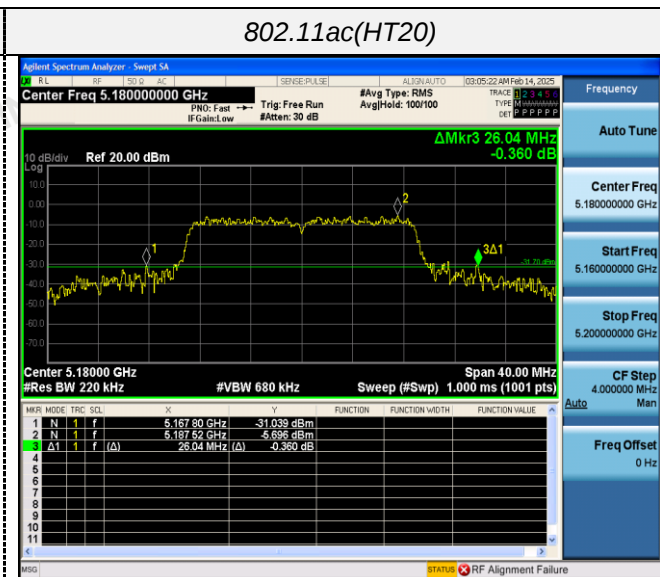


CH38

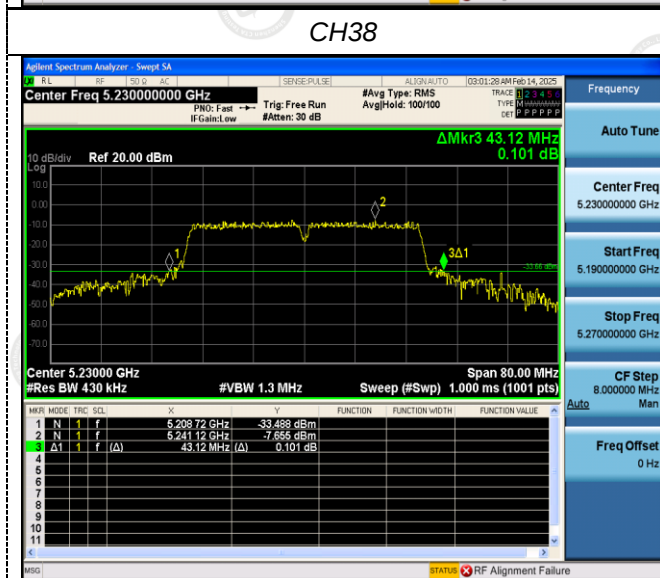


CH36

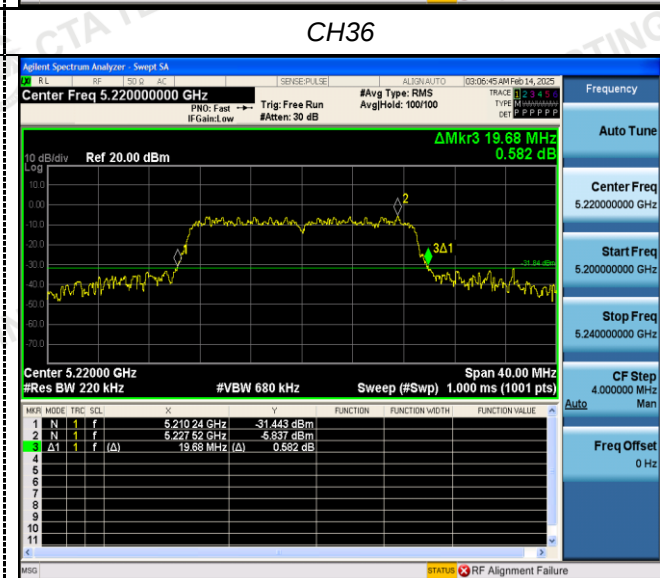

CH46

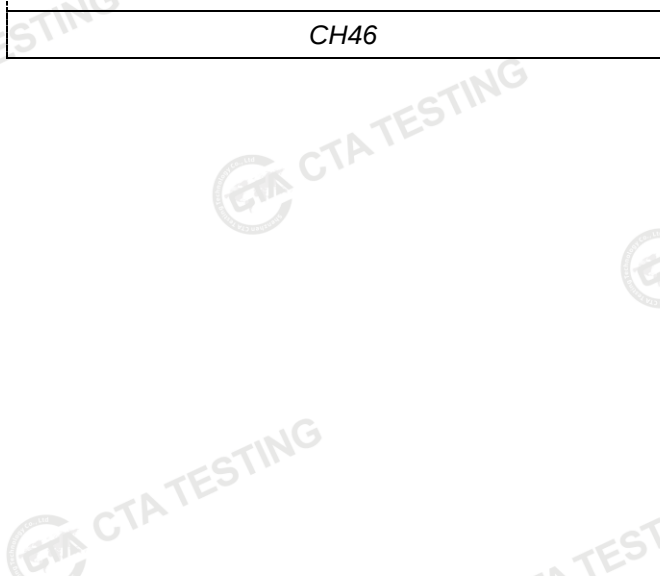


CH40

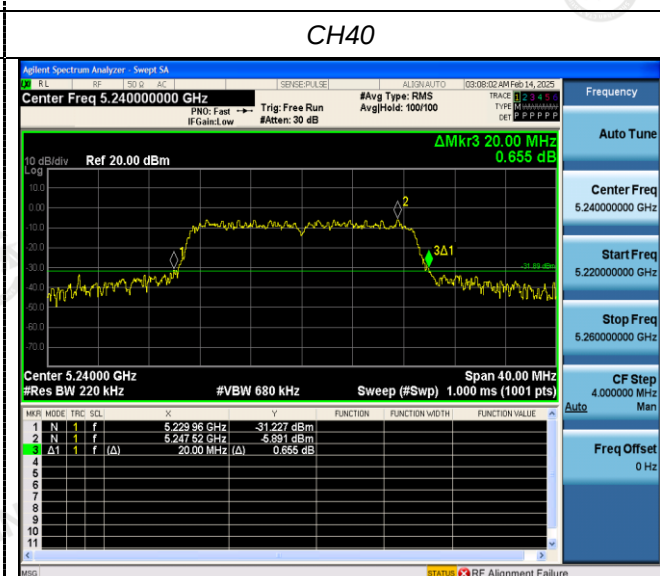

CH48


802.11ac(HT40)

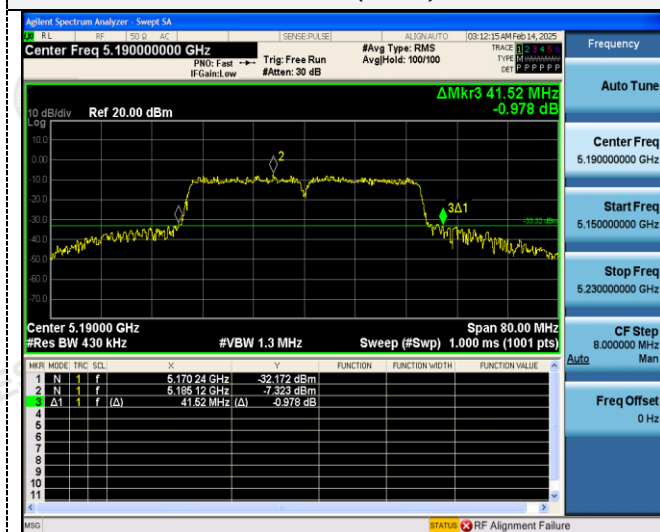

802.11ac(HT80)



CH38

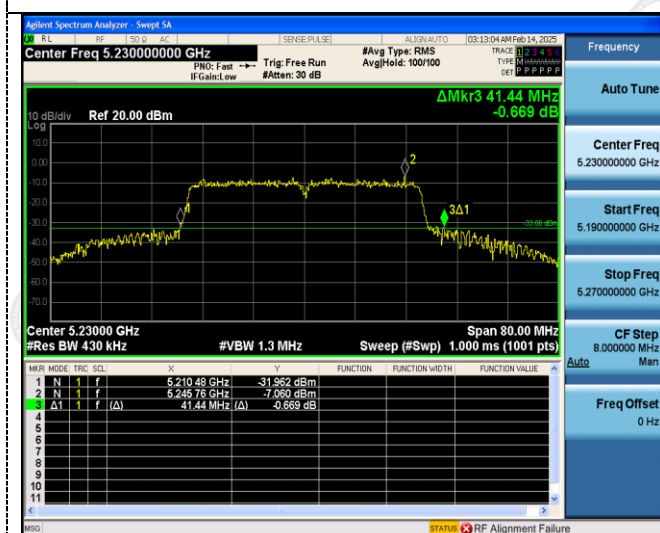

CH42



CH46



4.6 Minimum Emission Bandwidth (6dB Bandwidth)

Limit

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure

1. Set resolution bandwidth (RBW) = 100 kHz
2. Set the video bandwidth 3 x RBW.
3. Detector = Peak.
4. Trace mode = Max hold.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Test Configuration




Test Results


Type	Bands	Channel	6dB Bandwidth (MHz)	Limit (KHz)	Result
802.11a	U-NII 3	149	16.280	≥500KHz	Pass
		157	16.320		
		165	16.320		
802.11n(HT20)	U-NII 3	149	16.960		
		157	16.800		
		165	17.000		
802.11n(HT40)	U-NII 3	151	35.920		
		159	35.680		
802.11ac(HT20)	U-NII 3	149	16.920		
		157	16.680		
		165	17.120		
802.11ac(HT40)	U-NII 3	151	35.920		
		159	36.080		
802.11ac(HT80)	U-NII 3	155	75.200		

Test plot as follows:


802.11a

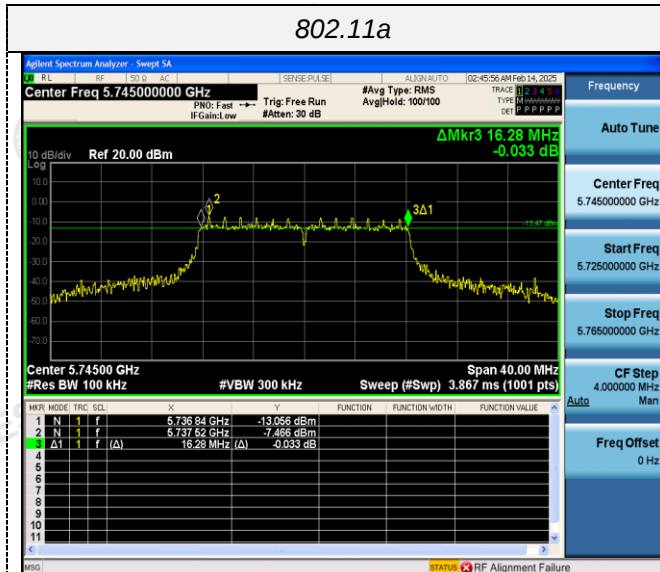


802.11n(HT20)

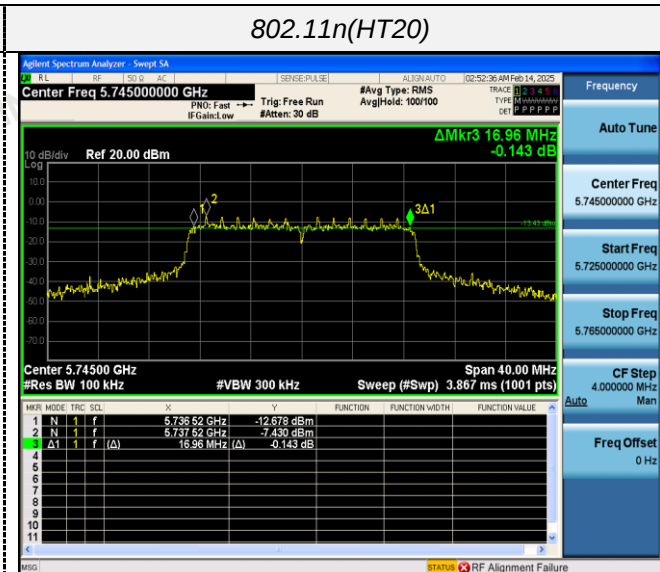


CH149

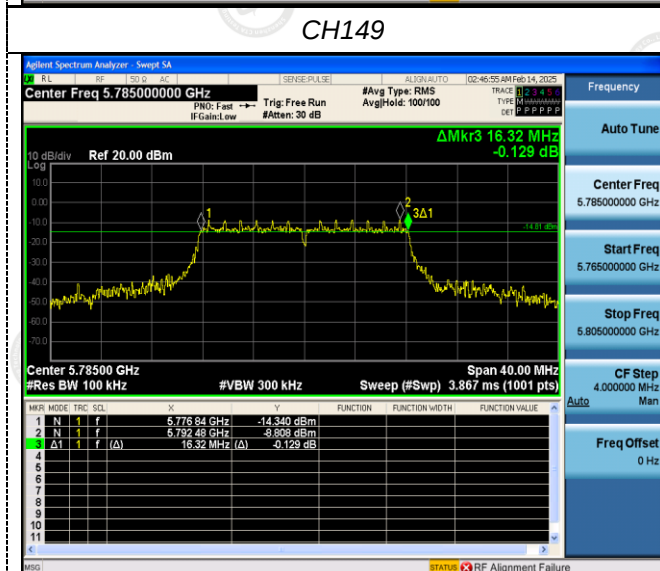


CH149

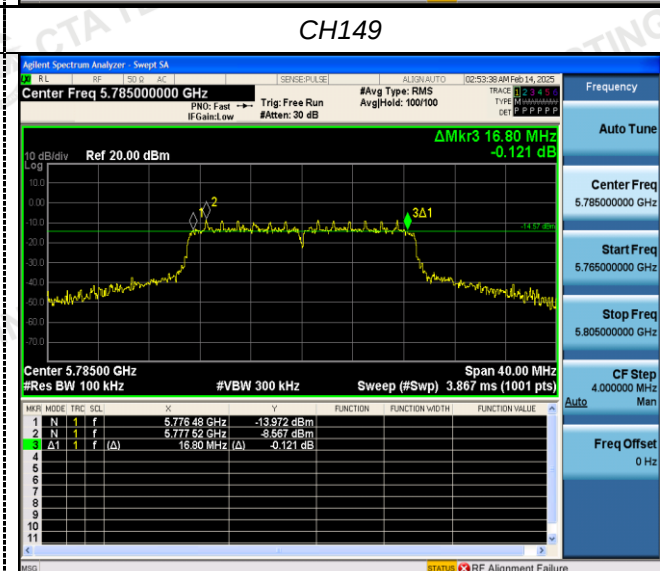


CH157

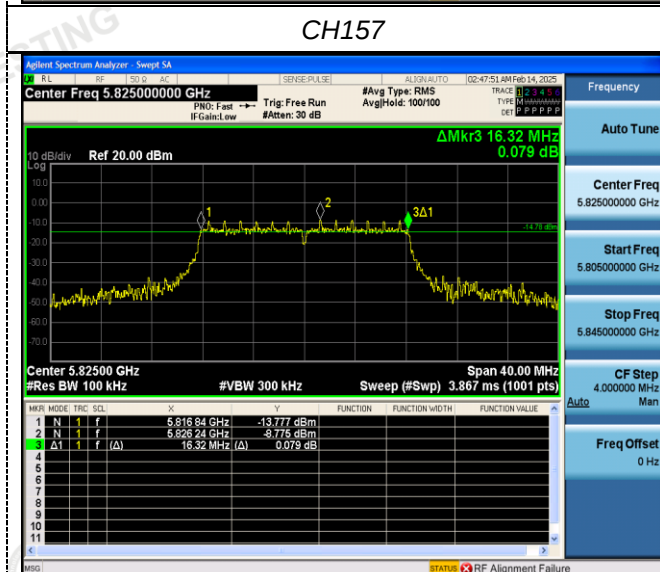


CH157

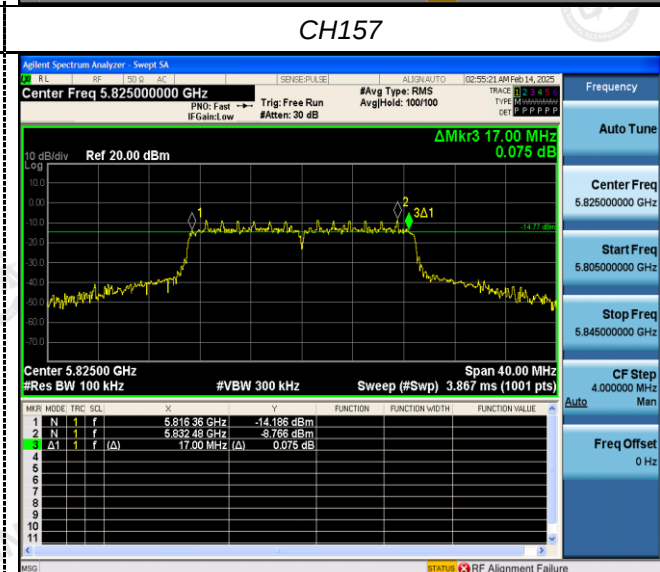


CH165




CH165




802.11n(HT40)

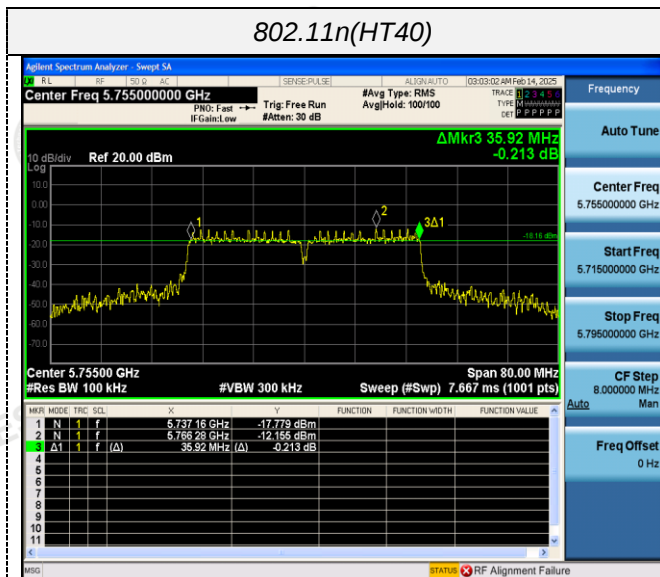


802.11ac(HT20)

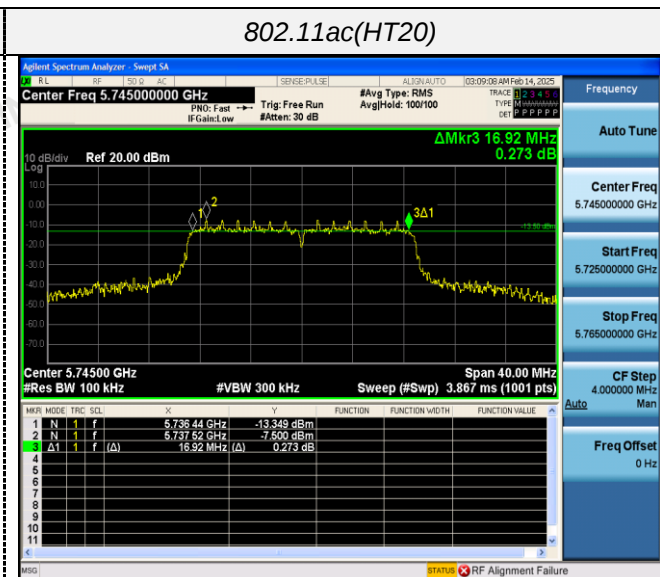


CH151

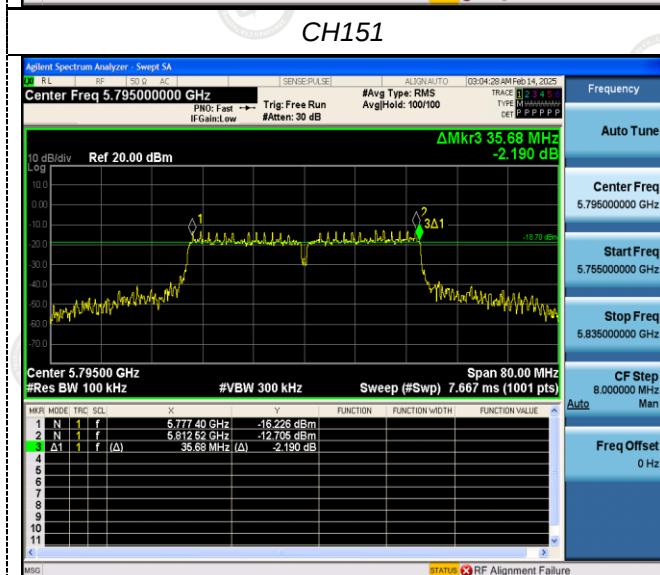


CH149

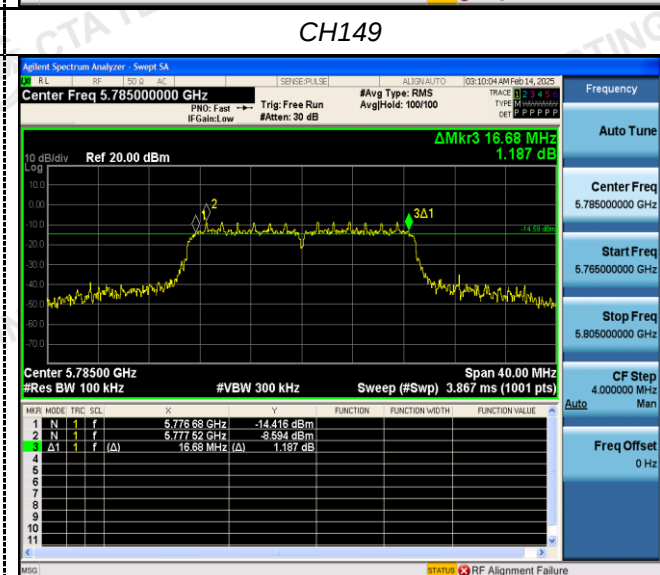

CH159

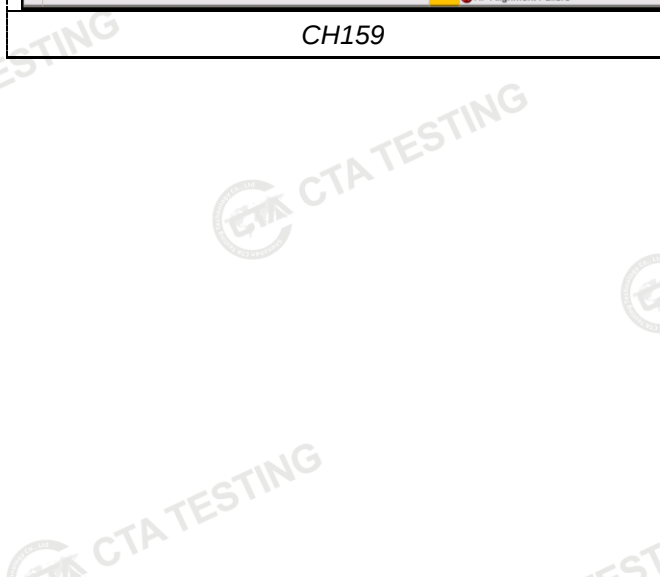


CH157

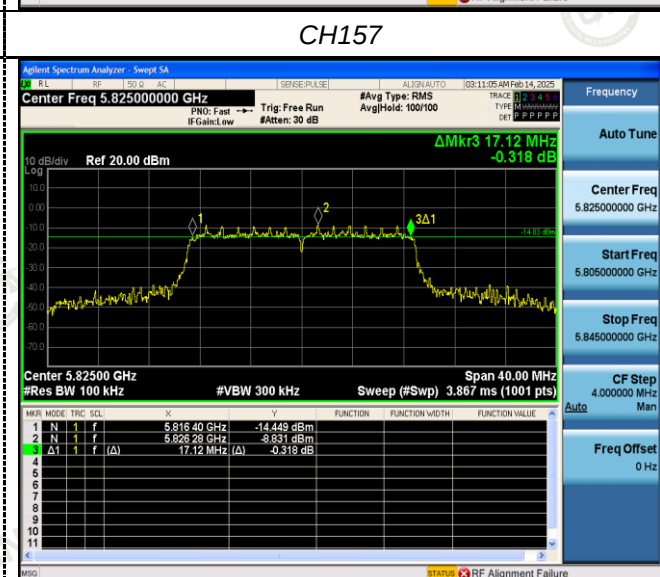


CH165


802.11ac(HT40)

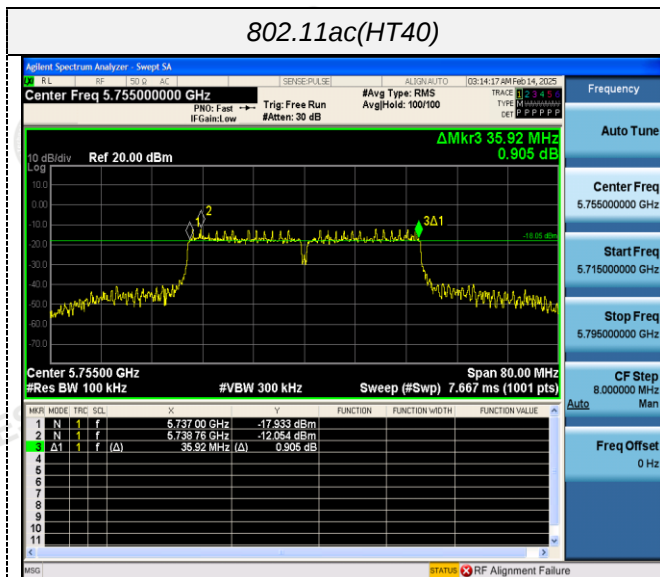


802.11ac(HT80)

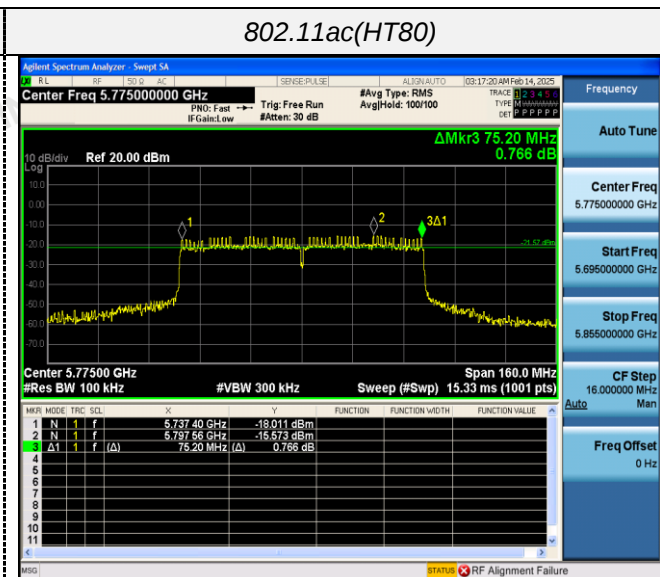

CH151

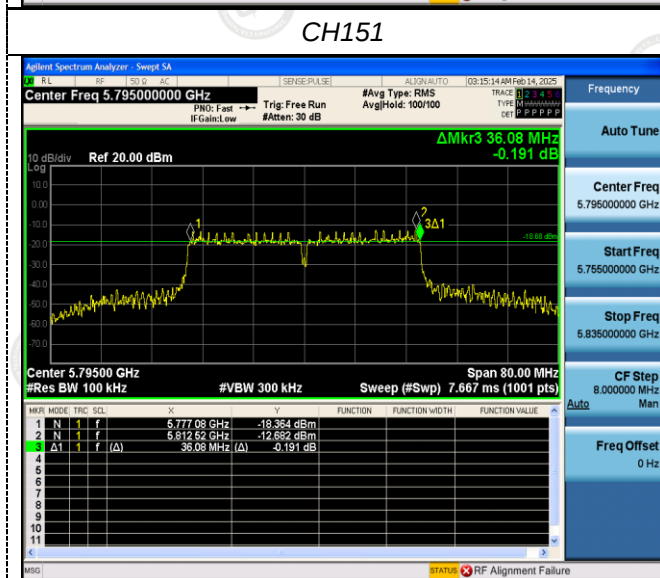

CH155

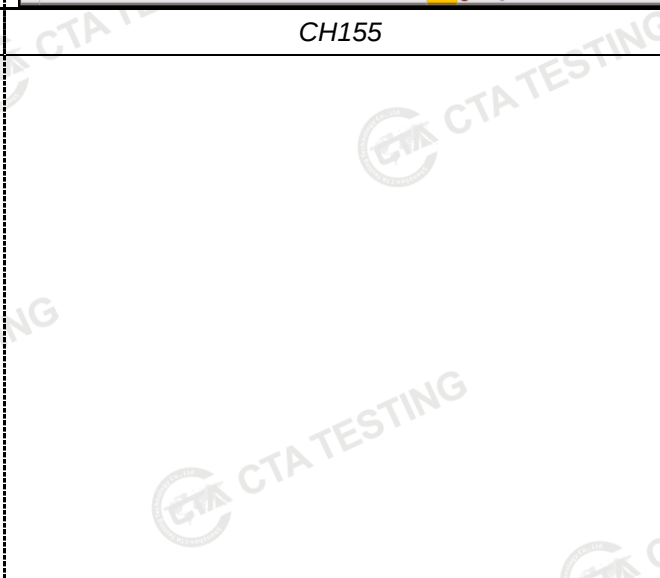

CH159




4.7 Frequency Stability

LIMIT

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

TEST CONFIGURATION

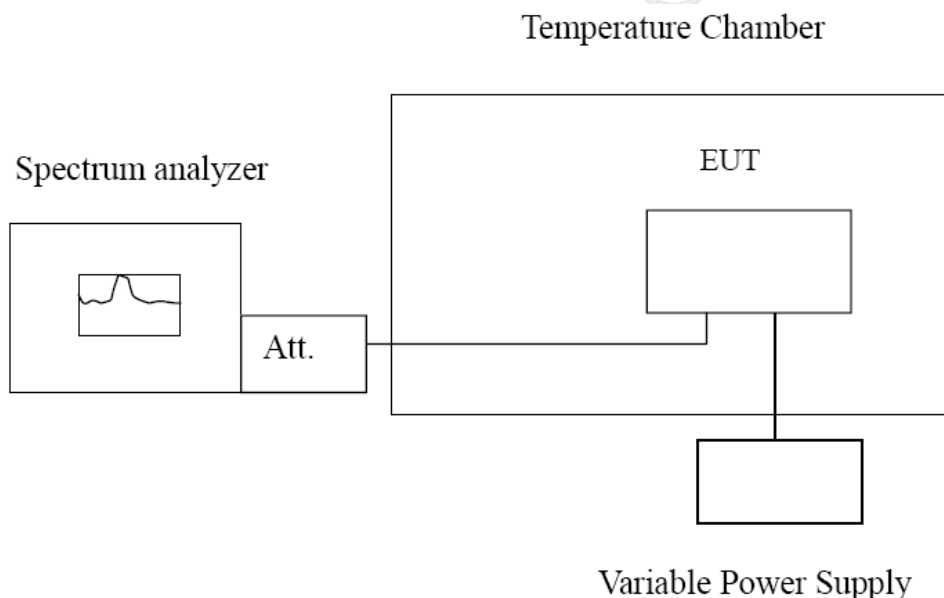

TEST PROCEDURE

Frequency Stability under Temperature Variations:

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

Frequency Stability under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

TEST RESULTS

Record worst case as below:

Reference Frequency: 802.11ac channel=36 frequency=5180MHz					
Voltage (V)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
DC 3.85	-30	110.58	0.021347	Within the band of operation	Pass
	-20	174.57	0.033701		
	-10	145.32	0.028054		
	0	146.43	0.028268		
	10	145.79	0.028145		
	20	99.77	0.019261		
	30	167.56	0.032347		
	40	129.20	0.024942		
	50	128.32	0.024772		
DC 4.20	25	195.68	0.037776	Within the band of operation	Pass
DC 3.40	25	118.44	0.022865		

Reference Frequency: 802.11ac channel=149 frequency=5745MHz					
Voltage (V)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
DC 3.85	-30	135.80	0.023638	Within the band of operation	Pass
	-20	129.30	0.022507		
	-10	167.33	0.029126		
	0	169.64	0.029528		
	10	136.74	0.023802		
	20	144.56	0.025163		
	30	116.86	0.020341		
	40	168.51	0.029332		
	50	160.68	0.027969		
DC 4.20	25	150.55	0.026205	Within the band of operation	Pass
DC 3.40	25	129.58	0.022555		

5 Test Setup Photos of the EUT



Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China
Tel: +86-755 2322 5875 E-mail: cta@cta-test.cn Web: <http://www.cta-test.cn>

6 Photos of the EUT

Reference to the test report No. CTA25020801001.

***** End of Report *****