

# FCC Test Report

# Report No.: AGC15705230874FR01

FCC ID	:	2AIKSPUCK4
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	PUCK 4
BRAND NAME	:	MARES
MODEL NAME	:	PUCK4
APPLICANT	:	MARES SPA
DATE OF ISSUE	:	Sep. 22, 2023
STANDARD(S)	:	FCC Part 15 Subpart C §15.247
REPORT VERSION	:	V1.0







# **Report Revise Record**

Report Version	Revise Time	Issued Date	Valid Version	Notes	
V1.0	/	Sep. 22, 2023	Valid	Initial Release	



# **Table of Contents**

1. General Information	5
2. Product Information	
2.1 Product Technical Description	
2.2 Test Frequency List	
2.3 Related Submittal(S) / Grant (S)	7
2.4 Test Methodology	7
2.5 Special Accessories	7
2.6 Equipment Modifications	7
2.7 Antenna Requirement	7
3. Test Environment	
3.1 Address of the Test Laboratory	
3.2 Test Facility	
3.3 Environmental Conditions	9
3.4 Measurement Uncertainty	9
3.5 List of Equipment Use	
4.System Test Configuration	
4.1 EUT Configuration	
4.2 EUT Exercise	
4.3 Configuration of Tested System	
4.4 Equipment Used In Tested System	
4.5 Summary of Test Results	
5. Description of Test Modes	14
6. Duty Cycle Measurement	15
7. RF Output Power Measurement	16
7.1 Provisions Applicable	
7.2 Measurement Procedure	
7.3 Measurement Setup (Block Diagram of Configuration)	
7.4 Measurement Result	
8. 6dB Bandwidth Measurement	
8.1 Provisions Applicable	
8.2 Measurement Procedure	
8.3 Measurement Setup (Block Diagram of Configuration)	
8.4 Measurement Results	
9. Power Spectral Density Measurement	
9.1 Provisions Applicable	
9.2 Measurement Procedure	
9.3 Measurement Setup (Block Diagram of Configuration)	
9.4 Measurement Results	
10. Conducted Band Edge And Out-of-Band Emissions.	
10.1 Provisions Applicable	34



## Report No.: AGC15705230874FR01 Page 4 of 68

10.2 Measurement Procedure	
10.3 Measurement Setup (Block Diagram of Configuration)	
10.4 Measurement Results	
11. Radiated Spurious Emission	
11.1 Measurement Limits	
11.2 Measurement Procedure	
11.3 Measurement Setup (Block Diagram of Configuration)	
11.4 Measurement Result	
12. AC Power Line Conducted Emission Test	
12.1 Measurement Limits	
12.2 Measurement Setup (Block Diagram of Configuration)	
12.3 Preliminary Procedure of Line Conducted Emission Test	67
12.4 Final Procedure of Line Conducted Emission Test	67
12.5 Measurement Results	67
Appendix I: Photographs of Test Setup	
Appendix II: Photographs of Test EUT	



# **1. General Information**

MARES SPA
VIA SALITA BONSEN, 4 16035 RAPALLO (GE) ITALY
MARES SPA
VIA SALITA BONSEN, 4 16035 RAPALLO (GE) ITALY
MARES SPA
VIA SALITA BONSEN, 4 16035 RAPALLO (GE) ITALY
PUCK 4
MARES
PUCK4
N/A
N/A
Aug. 23, 2023
Aug. 23, 2023~Sep. 22, 2023
No any deviation from the test method
Normal
Pass
AGCER-FCC-BLE-V1

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By

Alan Duan

Alan Duan (Project Engineer)

Sep. 22, 2023

Reviewed By

in I

Calvin Liu (Reviewer)

Sep. 22, 2023

Approved By

ax 2ra

Max Zhang Authorized Officer

Sep. 22, 2023



## 2. Product Information

## 2.1 Product Technical Description

Frequency Band	2400MHz-2483.5MHz
Operation Frequency Range	2402MHz-2480MHz
Bluetooth Version	V5.3
Modulation Type	BLE GFSK 1Mbps GFSK 2Mbps
Number of channels	40
Carrier Frequency of Each Channel	40 Channels (37 hopping + 3 advertising channel)
Channel Separation	2 MHz
Maximum Transmitter Power	Bluetooth LE (1Mbps): 6.376dBm (0.0043 W) Bluetooth LE (2Mbps): 6.433dBm (0.0044 W)
Hardware Version	V1.0
Software Version	V1.0
Antenna Designation	Chip antenna
Antenna Gain	1.48dBi
Power Supply	DC 3.0V by battery

## 2.2 Test Frequency List

Frequency Band	Channel Number	Frequency		
	0	2402 MHz		
	1	2404 MHz		
2400~2483.5MHz	:	:		
	19	2440MHz		
	:	:		
	38	2478 MHz		
	39	2480 MHz		
Note: $f = 2402 + 2*k$ MHz, $k = 0,, 39$ f is the operating frequency (MHz) k is the operating channel.				



## 2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: **2AIKSPUCK4**, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

## 2.4 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title		
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations		
2	FCC 47 CFR Part 15	Radio Frequency Devices		
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices		
4	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules		

## 2.5 Special Accessories

Not available for this EUT intended for grant.

## **2.6 Equipment Modifications**

Not available for this EUT intended for grant.

## 2.7 Antenna Requirement

Standard Requirement

## 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

## 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

#### EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is 1.48dBi.



## 3. Test Environment

## 3.1 Address of the Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

## 3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

## CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories).

#### A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

## FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

## IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



## **3.3 Environmental Conditions**

	Normal Conditions
Temperature range (°C)	15 - 35
Relative humidity range	20 % - 75 %
Pressure range (kPa)	86 - 106
Power supply	DC 3.0V

## **3.4 Measurement Uncertainty**

The reported uncertainty of measurement y  $\pm$ U, where expended uncertainty U is based on a standard

uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	U <sub>c</sub> = ±2 %
Uncertainty of Occupied Channel Bandwidth	U <sub>c</sub> = ±2 %



## 3.5 List of Equipment Use

• R	RF Conducted Test System							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
$\boxtimes$	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2023-06-01	2024-05-31	
$\boxtimes$	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2023-03-03	2024-03-02	
$\boxtimes$	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2023-03-03	2024-03-02	
$\boxtimes$	AGC-EM-A152	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08	
	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2023-06-01	2024-05-31	
$\boxtimes$	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A	
$\boxtimes$	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A	

• F	Radiated Spurious Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2023-02-18	2024-02-17	
$\boxtimes$	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2023-06-03	2024-06-02	
$\square$	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2023-06-01	2024-05-31	
$\boxtimes$	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2022-03-12	2024-03-11	
$\boxtimes$	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10	
$\boxtimes$	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2023-03-23	2024-03-22	
	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2021-10-31	2023-10-30	
$\square$	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2022-08-04	2024-08-03	
$\boxtimes$	AGC-EM-A119	2.4G Filter	SongYi	N/A	N/A	2023-06-01	2024-05-31	
$\boxtimes$	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08	
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08	

• A	AC Power Line Conducted Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
$\boxtimes$	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2023-06-03	2024-06-02	
$\boxtimes$	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2023-06-09	2024-06-08	
$\boxtimes$	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2023-06-03	2024/06/02	



• Te:	Test Software							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information			
$\boxtimes$	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71			
$\boxtimes$	AGC-EM-S003	RE Test System	FARA	EZ-EMC	VRA-03A			
$\square$	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0			



# **4.System Test Configuration**

## **4.1 EUT Configuration**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

## 4.2 EUT Exercise


The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

## 4.3 Configuration of Tested System

Radiated Emission Configure:



Conducted Emission Configure:



## 4.4 Equipment Used In Tested System

The following peripheral devices and interface cables were connected during the measurement:

- Test Accessories Come From The Laboratory
- ☑ Test Accessories Come From The Manufacturer

No.	Equipment	Model No.	Manufacturer	Specification Information	Cable
1	Battery	CR2450 (coin cell)	Panasonic Corporation	DC 3.0V 620mAh	



## 4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.203&15.247(b)(4)	Antenna Equipment	Pass
2	§15.247 (b)(1)	RF Output Power	Pass
3	§15.247 (a)(1)	6 dB Bandwidth	Pass
4	§15.247 (e)	Power Spectral Density	Pass
4	§15.247 (d)	Conducted Band Edge and Out-of-Band Emissions	Pass
5	§15.209	Radiated Emission& Band Edge	Pass
6	§15.207	AC Power Line Conducted Emission	Not applicable

Note: The conducted emission tests at AC port are not required for devices which only employ battery power for operation.



# 5. Description of Test Modes

Summary Table of Test Cases					
Test Item	Data Rate / Modulation				
lest tiem	Bluetooth – LE / GFSK				
Radiated&Conducted Test Cases	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps(Battery powered) Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps(Battery powered) Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps(Battery powered) Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps(Battery powered) Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps(Battery powered) Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps(Battery powered)				
AC Conducted Emission	N/A				
Note: 1. Only the result of the worst case was recorded in the report, if no other cases. 2. The battery is full-charged during the test.					

- 3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 4. For Conducted Test method, a temporary antenna connector is provided by the manufacture.
- 5. The EUT adjusts the frequency through the button.



# 6. Duty Cycle Measurement


The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = Peak. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Operating mode	T(µs)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/ T Minimum VBW (kHz)
BLE_1Mbps	383	61.00	2.15	2.61
BLE_2Mbps	216	34.00	4.69	4.63

Remark:

2. The duty cycle of each frequency band mode reflects the determination requirements of the low channel measurement value

The test plots as follows:

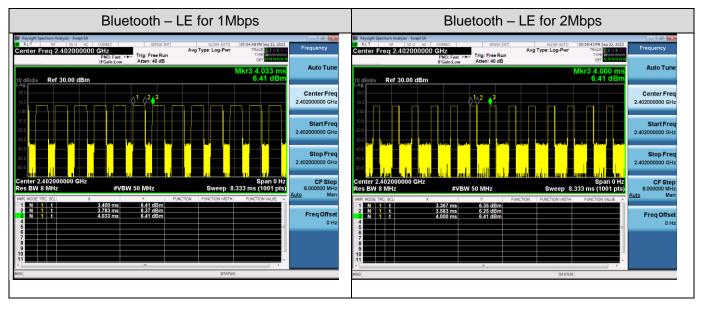

<sup>1.</sup> Duty Cycle factor = 10 \* log (1/ Duty cycle)



## 7. RF Output Power Measurement

## 7.1 Provisions Applicable

For DTSs employing digital modulation techniques operating in the bands 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W.


## 7.2 Measurement Procedure

For Peak Power, the testing follows ANSI C63.10 Section 11.9.1.2 Method Integrated band power:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. RBW≥DTS bandwidth
- 3. VBW≥3\*RBW.
- 4. SPAN≥VBW.
- 5. Sweep: Auto.
- 6. Detector Function: Peak.
- 7. Trace: Max hold.
- 8. Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.
- For Average power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G:
- 1. The RF output of EUT was connected to the power meter by RF cable and attenuator.
- 2. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Measure the conducted output power and record the results in the test report.


## 7.3 Measurement Setup (Block Diagram of Configuration)

⊠For Average power test setup

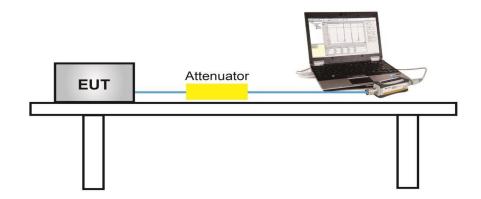



## $\boxtimes$ For peak power test setup

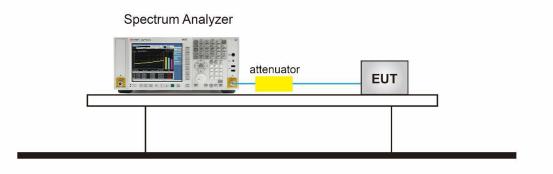


## 7.4 Measurement Result

Test Data of Conducted Output Power							
Test Mode	Test Frequency (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail			
GFSK_1Mbps	2402	5.434	≪30	Pass			
	2440	6.376	≪30	Pass			
	2480	6.208	≪30	Pass			
	2402	6.021	≪30	Pass			
GFSK_2Mbps	2440	6.433	≪30	Pass			
	2480	6.226	≤30	Pass			

## Test Result of Average Output Power (Reporting Only)


Test Data of Conducted Output Power							
Test Mode	Test Frequency (MHz)	Average Power (dBm)	Limits (dBm)	Pass or Fail			
	2402	3.434	≪30	Pass			
GFSK_1Mbps	2440	4.376	≪30	Pass			
	2480	4.208	≪30	Pass			
	2402	4.021	≪30	Pass			
GFSK_2Mbps	2440	4.433	≪30	Pass			
	2480	4.226	≪30	Pass			



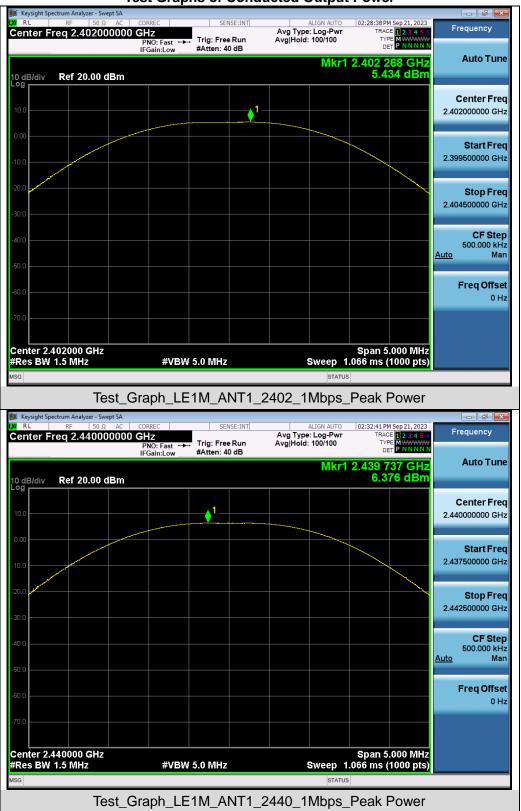


#### **Test Graphs of Conducted Output Power**



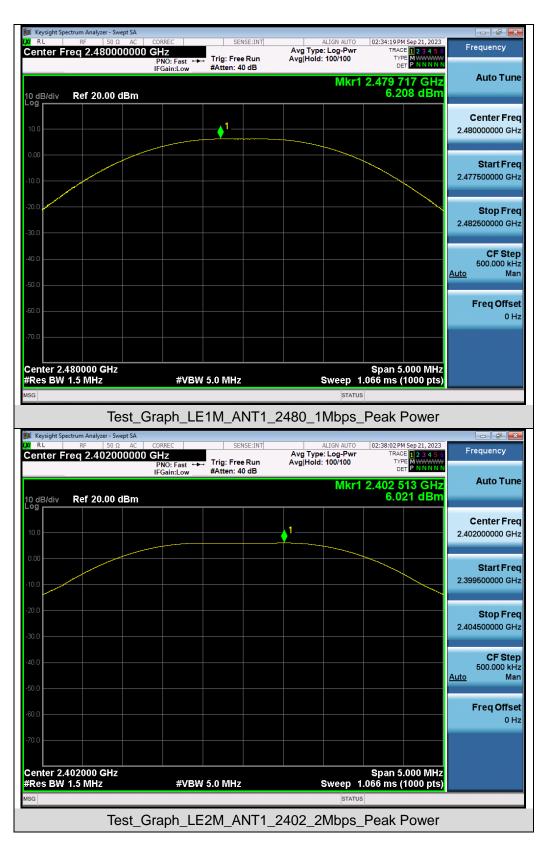



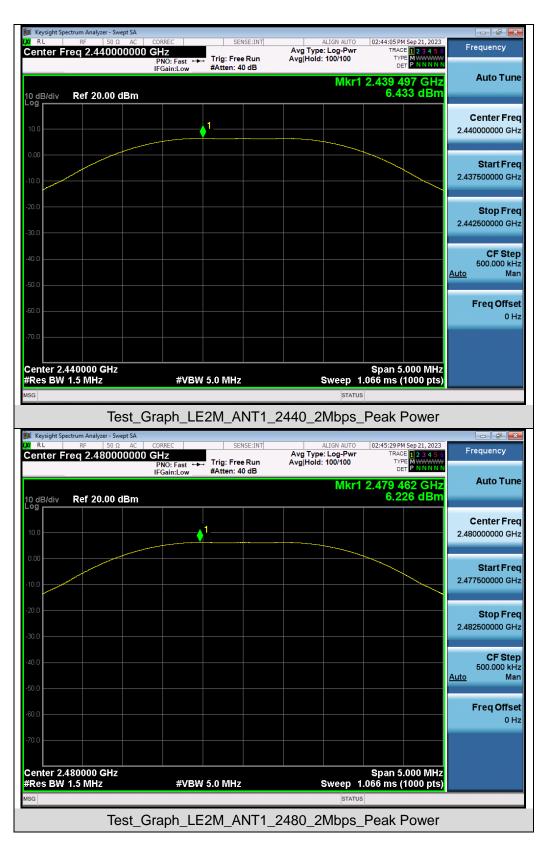



## 8. 6dB Bandwidth Measurement


## 8.1 Provisions Applicable

The minimum 6 dB bandwidth shall be 500 kHz.

## 8.2 Measurement Procedure

- 1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
- 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
- 5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) ≥ 3 \* RBW.
- 6. Measure and record the results in the test report.

## 8.3 Measurement Setup (Block Diagram of Configuration)

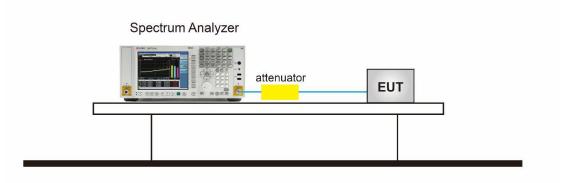




#### **8.4 Measurement Results**

Test Data of Occupied Bandwidth and DTS Bandwidth							
Test Mode	Test Frequency (MHz)	Occupied Bandwidth (MHz)	DTS BW (MHz)	DTS BW Limits	Pass or Fail		
GFSK_1Mbps	2402	1.046	0.717	≥0.5	Pass		
	2440	1.044	0.712	≥0.5	Pass		
	2480	1.044	0.705	≥0.5	Pass		
GFSK_2Mbps	2402	2.059	1.215	≥0.5	Pass		
	2440	2.061	1.212	≥0.5	Pass		
	2480	2.057	1.211	≥0.5	Pass		

#### **Test Graphs of Occupied Bandwidth**

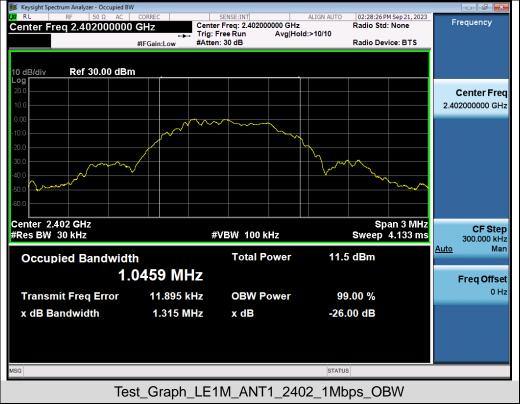













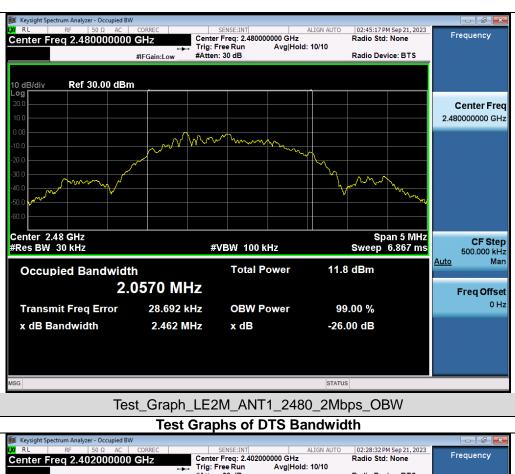

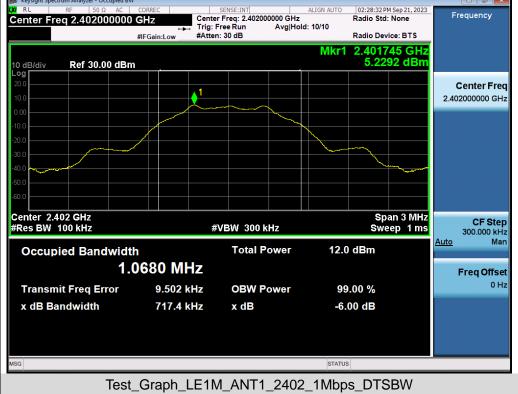












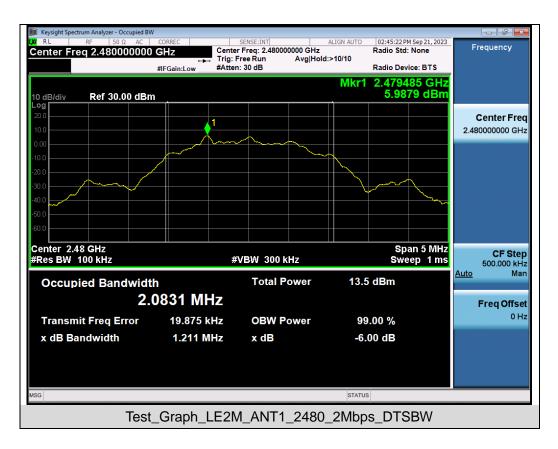



## 9. Power Spectral Density Measurement


#### 9.1 Provisions Applicable

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

## 9.2 Measurement Procedure

- 1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
- 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz in order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
- 5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
- 6. Measure and record the results in the test report.
- The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

## 9.3 Measurement Setup (Block Diagram of Configuration)

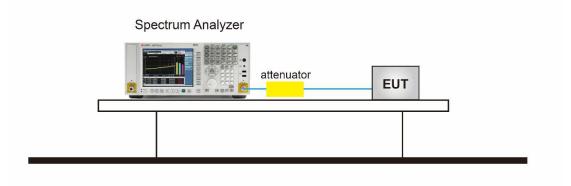




#### 9.4 Measurement Results

Test Data of Conducted Output Power Spectral Density							
Test Mode	Test Frequency (MHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail			
	2402	-10.116	≪8	Pass			
GFSK_1Mbps	2440	-9.123	≪8	Pass			
	2480	-9.218	≪8	Pass			
	2402	-12.995	≪8	Pass			
GFSK_2Mbps	2440	-12.650	≪8	Pass			
	2480	-12.810	≪8	Pass			


## Test Graphs of Conducted Output Power Spectral Density






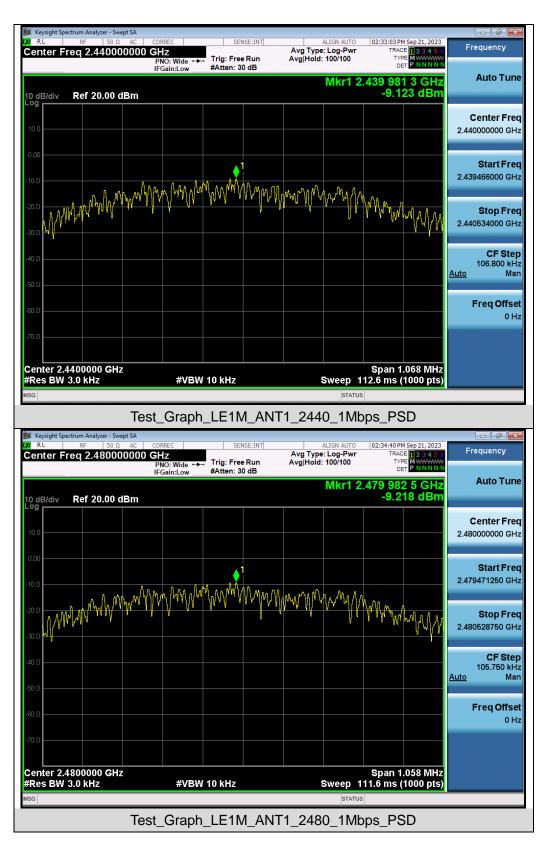



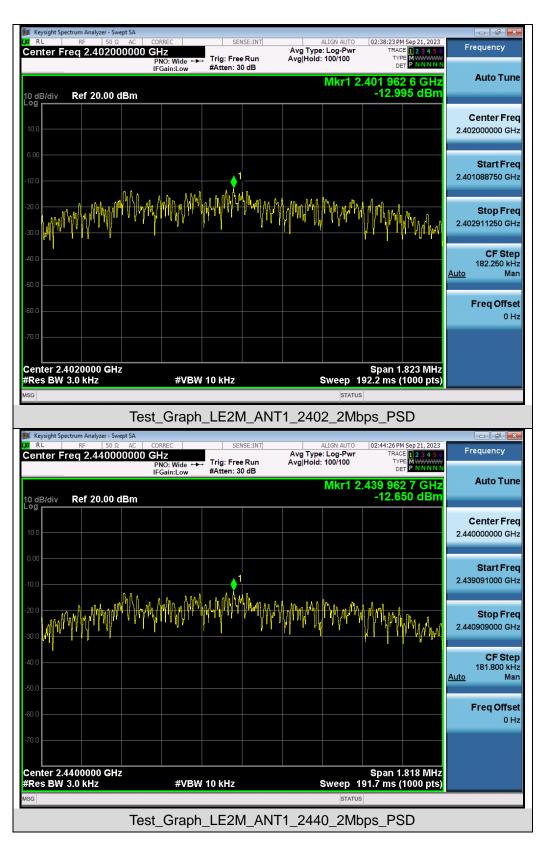



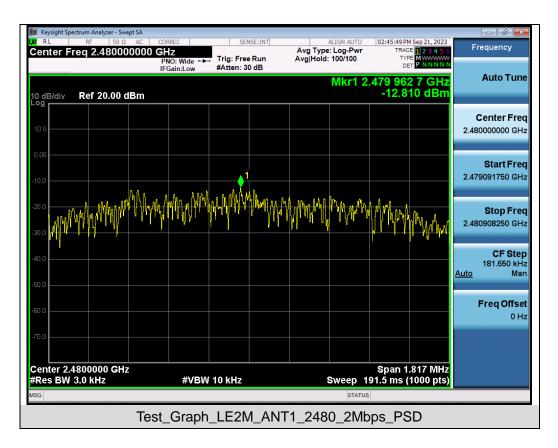



# 10. Conducted Band Edge And Out-of-Band Emissions


## **10.1 Provisions Applicable**

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure.

#### **10.2 Measurement Procedure**

- Reference level measurement
- 1. Set instrument center frequency to DTS channel center frequency
- 2. Set the span to  $\geq$  1.5 times the DTS bandwidth
- 3. Set the RBW = 100 kHz
- 4. Set the VBW  $\geq$  3 x RBW
- 5. Detector = peak
- 6. Sweep time = auto couple
- 7. Trace mode = max hold
- 8. Allow trace to fully stabilize
- Emission level measurement
- 1. Set the center frequency and span to encompass frequency range to be measured
- 2. RBW = 100kHz
- 3. VBW = 300kHz
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep time = auto couple
- 7. The trace was allowed to stabilize

## 10.3 Measurement Setup (Block Diagram of Configuration)

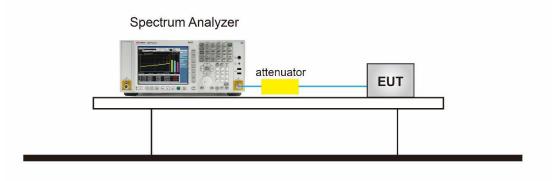




#### **10.4 Measurement Results**




#### Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands




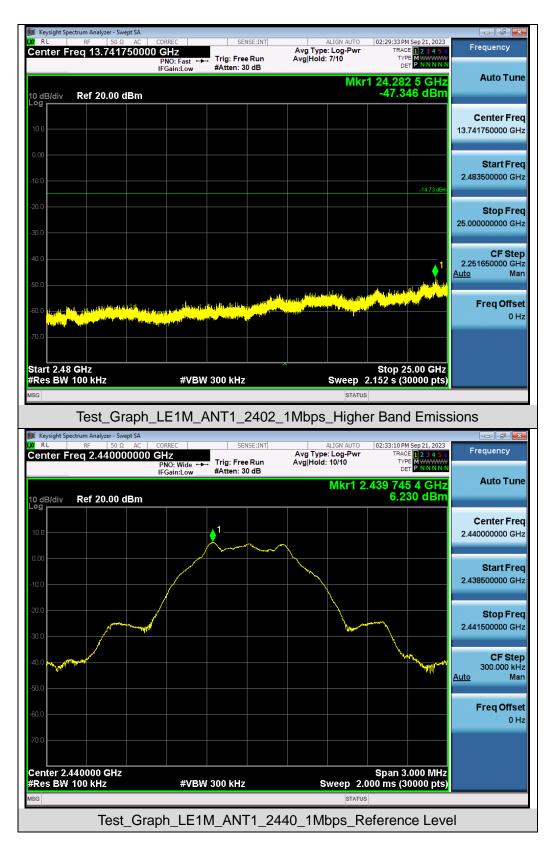




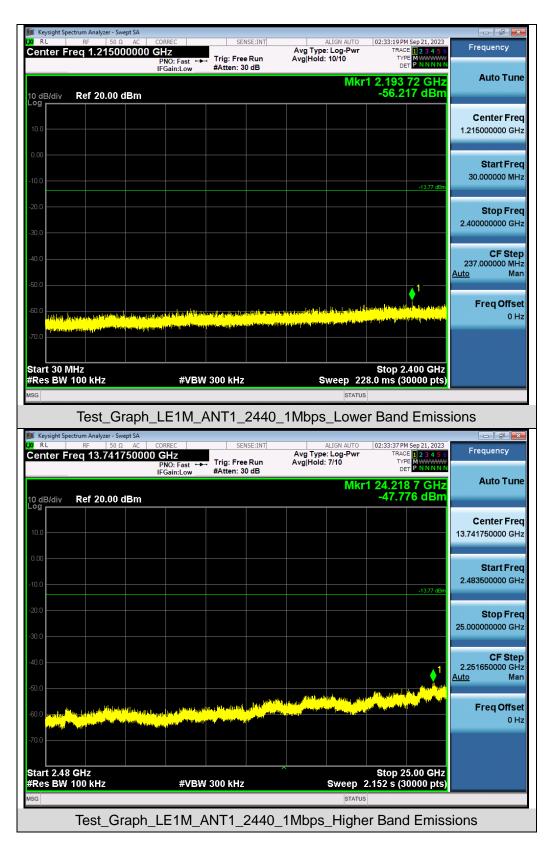




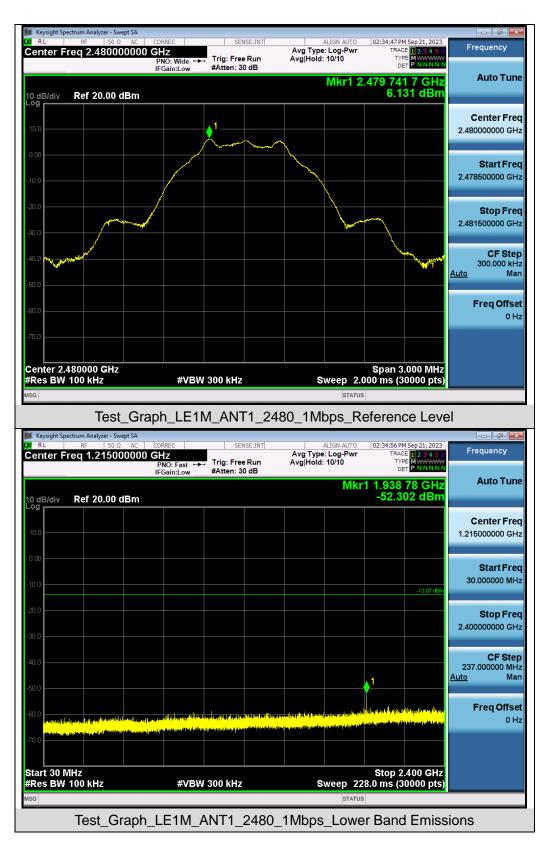




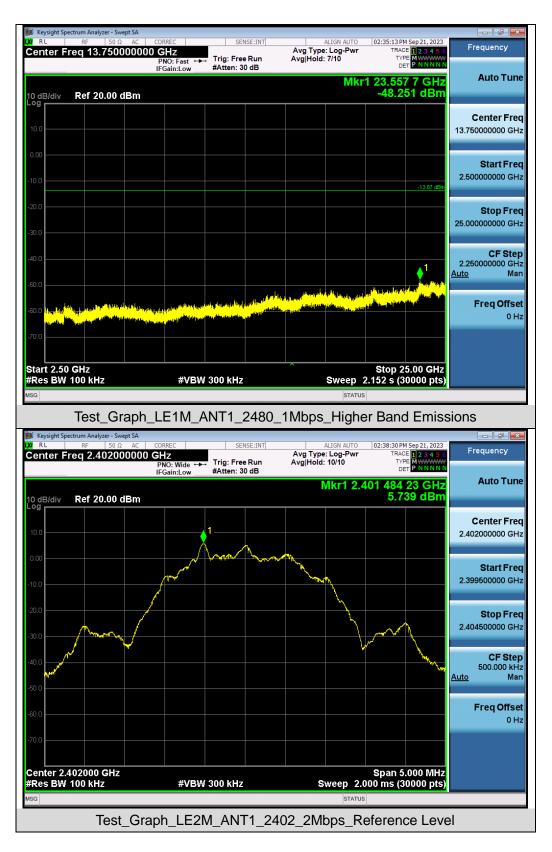




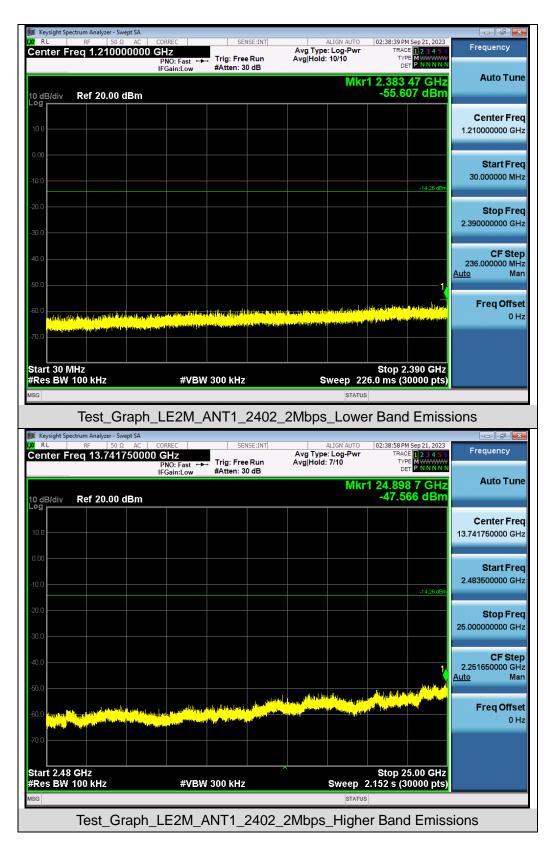




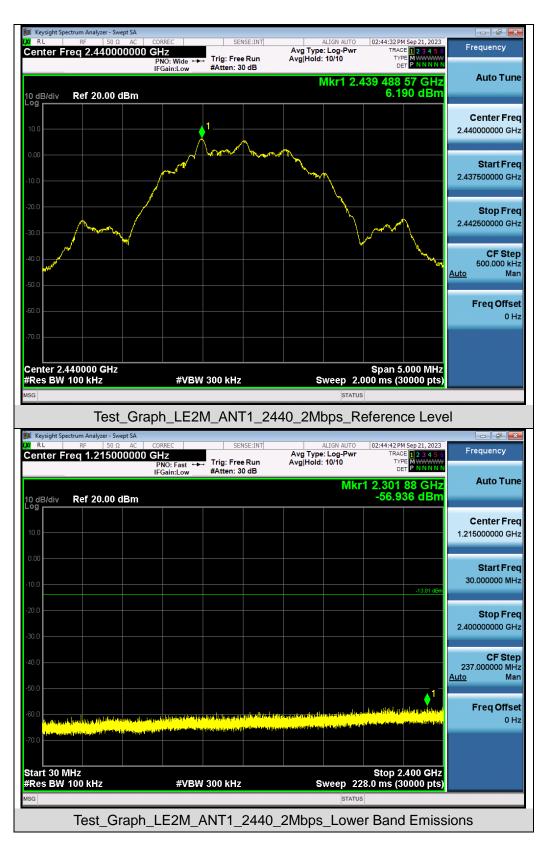




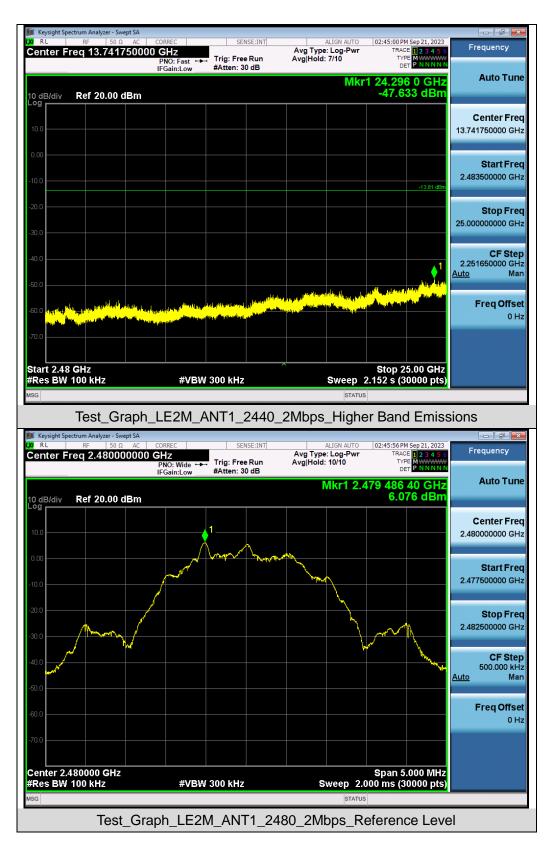



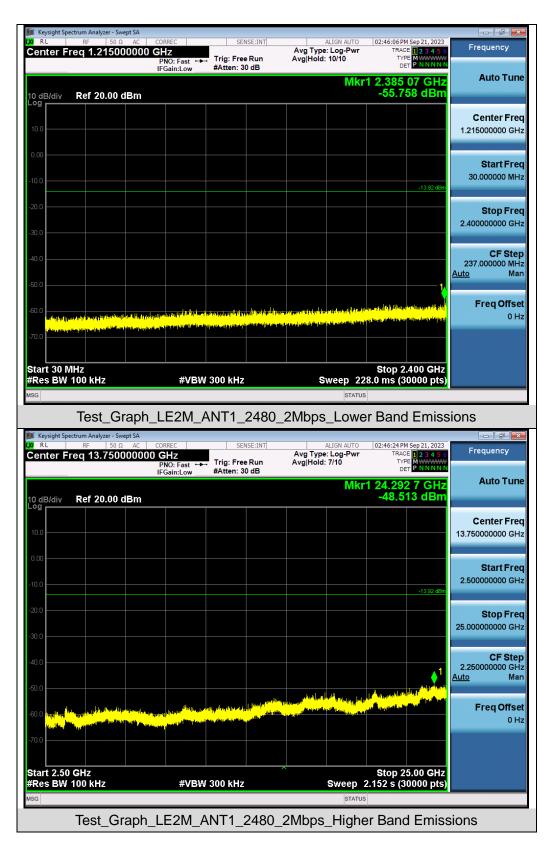



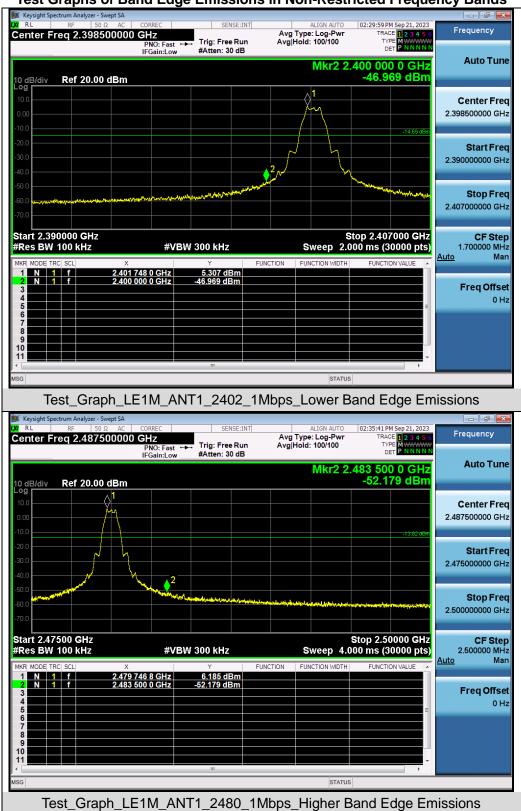

#### Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands







# **11. Radiated Spurious Emission**

## **11.1 Measurement Limits**

FCC Part 15.209 Limit in the below table to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

#### **11.2 Measurement Procedure**

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. Any report aving or particulation of the transmitter operates for longer than 0.1 seconds) or in cases where the transmitter operates for longer than 0.1 seconds.

Stamp<sup>1</sup> is deemed to be invalid. Copying or excepting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

10.In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.

Spectrum ParameterSettingStart ~Stop Frequency9KHz~150KHz/RB 200Hz for QPStart ~Stop Frequency150KHz~30MHz/RB 9KHz for QPStart ~Stop Frequency30MHz~1000MHz/RB 120KHz for QPStart ~Stop Frequency1GHz~26.5GHzStart ~Stop Frequency1MHz/3MHz for Peak, 1MHz/3MHz for Average

The following table is the setting of spectrum analyzer and receiver.

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP



#### • Quasi-Peak Measurements below 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

#### Peak Measurements above 1GHz


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize

#### • Average Measurements above 1GHz (Method VB)


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW setting requirements are as follows:
- 4. If the EUT is configured to transmit with duty cycle  $\ge$  98%, set VBW = 10 Hz.
- 5. If the EUT duty cycle is < 98%, set VBW  $\ge$  1/T. T is the minimum transmission duration.
- 6. Detector = Peak
- 7. Sweep time = auto
- 8. Trace mode = max hold
- 8. Trace was allowed to stabilize




#### 11.3 Measurement Setup (Block Diagram of Configuration)

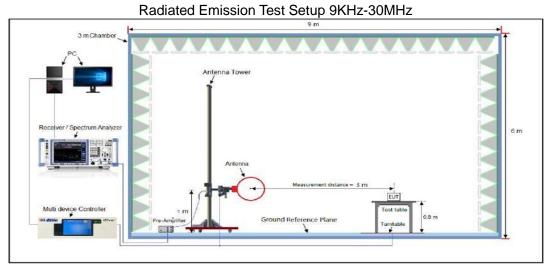

Radiated Emission Test Setup 30MHz-1000MHz

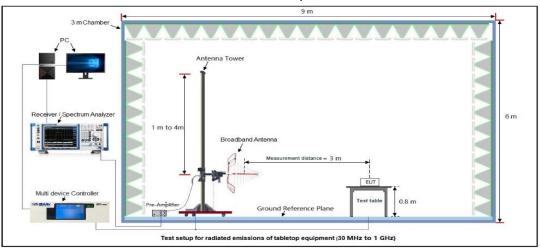

Radiated Emission Test Setup Above 1000MHz

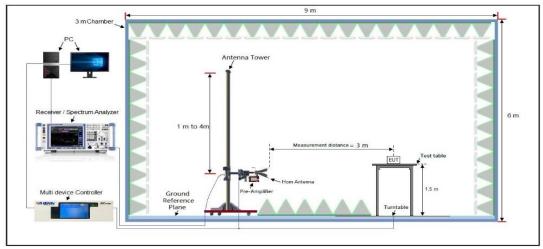

#### **11.4 Measurement Result**

Any report having not been signed by authorized approver, **Radiated Emission**, **Below**, **30MHz** ot been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd


 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com

 Web: http://www.agccert.com/



The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

			Radiat	ed Emiss	ion Test Res	ults at 30MH	z-1GHz			
	lame	PUC	K 4			Model Na	ime	PUCK4		
Tempe	erature	24.3	°C			Relative	Humidity	59.4%		
Press	ure	960hPa     Test Voltage     Normal Voltage						oltage		
Test M	lode	Mod	ode 1 Polarity: Horizontal						l	
					500 B-145 Subr					
	130 120				FCC Part 15 Subp	art C				
	110									
	100 90									
	80									
	70 60 50									
	[편] 60 [편] 80 80 50									
	40							<b></b> 5		
	30 20		, , , , , , , , , , , , , , , , , , ,	Jul March	$\wedge \wedge$	Kummer man	Man Man work and a start and and and	and the second states and		
	10				· Communities	man man				
	0									
				100M					1G	
	-10	- QP Limit	Horizontal PK	100M	Frequency[Hz				1G	
	-10	- QP Limit QP Detector		100M	Frequency[Hz	]			16	
Final	-10	QP Detector		100M	Frequency[Hz	3			16	
Final NO.	Data List	QP Detector	Level	Factor	Limit	Margin	Height	Angle	1G Polarity	
	o -10 30M * Data List	QP Detector	r			-	Height [cm] 100			
NO.	Data List	QP Detector [. 2] 7	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	[cm]	[°]	Polarity	
NO. 1	Data List Freq [MHz 69.7	QP Detector [. z] 7 3	Level [dBµV/m] 23.48	Factor [dB] 11.36	Limit [dBµV/m] 40.00	Margin [dB] 16.52	[cm] 100	[°] 230	Polarity Horizontal	
NO. 1 2	Data List Freq [MHz 69.7 96.9	QP Detector           [.           z]           7           3           64	Level [dBµV/m] 23.48 27.32	Factor [dB] 11.36 19.67	Limit [dBµV/m] 40.00 43.50	Margin [dB] 16.52 16.18	[cm] 100 100	[°] 230 230	Polarity Horizontal Horizontal	
NO. 1 2 3	Data List Freq [MHz 69.7 96.9 332.6	QP Detector           [.           z]           7           3           64           38	Level [dBµV/m] 23.48 27.32 25.73	Factor [dB] 11.36 19.67 21.04	Limit [dBµV/m] 40.00 43.50 46.00	Margin [dB] 16.52 16.18 20.27	[cm] 100 100 100	[°] 230 230 260	Polarity Horizontal Horizontal Horizontal	





				Radiat	ted Emiss	ion Test Res	ults at 30MH	z-1GHz		
EUT Na	ame	PUCK 4					Model Na	ime	PUCK4	
Tempe	rature	24.3° C			Relative	Relative Humidity		59.4%		
Pressu	ire	960hPa				Test Volta	Test Voltage		Normal Voltage	
Test Mo	ode	Moc	le 1				Polarity:		Vertical	
I avail (FR) Virri	130 120 110 100 90 80 70 60 50 40 30 20 10 0 10	~*	1	× <sup>2</sup>		FCC Part 15 Sub	part C			
	30M	QP Limit QP Detecto	Verti or	cal PK	100M	Frequency[H	z]			16
Final D	)ata List									
NO.	Freq [MHz		Lev [dBµ\		Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	41.64	1	30.9		11.99	40.00	9.02	100	110	Vertical
2	62.98	3	29.2	29	14.50	40.00	10.71	100	160	Vertical
3	100.8	1	30.5	57	13.06	43.50	12.93	100	150	Vertical

4 5

6

156.1

704.15

846.74

Note: 1. Factor=Antenna Factor + Cable loss, Margin= Limit-Measurement.

21.54

28.72

32.33

27.01

33.76

37.57

2. All test modes had been pre-tested. The mode 1 is the worst case and recorded in the report.

43.50

46.00

46.00

16.49

12.24

8.43

100

100

100

340

350

190

Vertical

Vertical

Vertical



EUT	Name	PUCK 4	PUCK 4			el Name		PUCK4		
Tem	perature	25° C	25° C			Relative Humidity		55.4%		
Pres	ssure	960hPa Test Voltage Norma		Normal	Voltage					
Test	t Mode	Mode 1	Mode 1		Ante	Antenna Polarity		Horizontal		
1	Frequency	Meter Reading	Factor Emission		n Level	Limits		Margin	Value Type	7
	(MHz)	(dBµV)	(dB)	(dBµ∖	//m)	(dBµV/m)		(dB)	value Type	
	4804.000	50.26	0.08	50.3	34	74.00		-23.66	peak	
	4804.000	43.33	0.08	43.4	41	54.00		-10.59	AVG	
	7206.000	48.74	2.21	50.9	95	74.00		-23.05	peak	
	7206.000	41.22	2.21	43.4	13	54.00		-10.57	AVG	
	Remark:									-
		na Factor + Cab	le Loss – Pre-a	mplifier.						_
	• • • • • • • •	DUOK 4				- 1 - 1		DUOKA		
EUI	Name	PUCK 4			Model Name			PUCK4		
Tem	perature	25°C			Relative Humidity		у	55.4%		
Pres	ssure	960hPa			Test	Voltage	ge Normal Voltage		Voltage	
Test	t Mode	Node Mode 1			Antenna Polarity			Vertical		
	Frequency	Meter Reading	Factor	Emissio	n Level	Limits		Margin	Value Type	
	(MHz)	(dBµV)	(dB)	(dBµ∖	//m)	(dBµV/m)		(dB)		
	4804.000	50.96	0.08	51.0	04	74.00		-22.96	peak	
	4804.000	41.74	0.08	41.8	32	54.00		-12.18	AVG	
	7206.000	48.28	2.21	50.4	19	74.00		-23.51	peak	_
				1			1			

43.33

54.00

-10.67

AVG

#### Radiated Emissions Test Results for Above 1 GHz

Remark:

7206.000

## **RESULT: Pass**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

2.21

41.12

Factor = Antenna Factor + Cable Loss – Pre-amplifier.



<b>Radiated Emissions</b>	Test Results for Above 1GHz
---------------------------	-----------------------------

EUT Name	PUCK 4		Mo	odel Name		PUCK	4
Temperature	25° C		Re	Relative Humidity		55.4%	
Pressure 960hPa			Те	st Voltage		Norma	I Voltage
Test Mode	Mode 2	Mode 2				Horizontal	
	·		·				
Frequency	Meter Reading	Factor	Emission Lev		Ν	/largin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)		(dB)	value Type
4880.000	51.02	0.14	51.16	74.00	-	22.84	peak
4880.000	38.74	0.14	38.88	54.00	-	15.12	AVG
7320.000	51.15	2.36	53.51	74.00		20.49	peak
7320.000	37.84	2.36	40.20	54.00	-	13.80	AVG
	<u> </u>			+ +			
Remark:	-		•				
Factor = Anter	nna Factor + Cable	Loss Dro	omplifior				
		EUSS - FIE-	ampiller.				
EUT Name	PUCK 4	2033 - 116-		odel Name		PUCK	4
			M	odel Name elative Humidity		PUCK4 55.4%	4
EUT Name	PUCK 4		Re			55.4%	4 I Voltage
EUT Name Temperature	PUCK 4 25°C		Ma Re Te	elative Humidity		55.4%	I Voltage
EUT Name Temperature Pressure Test Mode	PUCK 4 25°C 960hPa Mode 2		Ma Re Te Ar	elative Humidity st Voltage htenna Polarity		55.4% Norma Vertica	I Voltage
EUT Name Temperature Pressure Test Mode	PUCK 4 25°C 960hPa Mode 2 Meter Reading	Factor	Ma Re Te Ar Emission Lev	elative Humidity st Voltage ntenna Polarity		55.4% Norma Vertica <sup>I</sup> argin	l Voltage
EUT Name Temperature Pressure Test Mode Frequency (MHz)	PUCK 4 25°C 960hPa Mode 2 Meter Reading (dBµV)	Factor (dB)	Ma Re Te Ar Emission Lev (dBµV/m)	elative Humidity st Voltage ntenna Polarity el Limits (dBµV/m)	N	55.4% Norma Vertica <sup>/</sup> argin (dB)	I Voltage I Value Type
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4880.000	PUCK 4           25° C           960hPa           Mode 2           Meter Reading           (dBµV)           53.26	Factor (dB) 0.14	 Ма Пе Те Аг Етіззіоп Lev (dBµV/m) 53.40	elative Humidity st Voltage ntenna Polarity el Limits (dBµV/m) 74.00	N	55.4% Norma Vertica <sup>(dB)</sup> 20.60	I Voltage I Value Type peak
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4880.000 4880.000	PUCK 4           25° C           960hPa           Mode 2           Meter Reading           (dBμV)           53.26           39.44	Factor (dB) 0.14 0.14	Μα           Re           Te           Ar           Emission Lev           (dBµV/m)           53.40           39.58	elative Humidity st Voltage ntenna Polarity el Limits (dBµV/m) 74.00 54.00	N 	55.4% Norma Vertica Aargin (dB) 20.60 14.42	I Voltage I Value Type peak AVG
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4880.000	PUCK 4           25° C           960hPa           Mode 2           Meter Reading           (dBµV)           53.26	Factor (dB) 0.14	 Ма Пе Те Аг Етіззіоп Lev (dBµV/m) 53.40	elative Humidity st Voltage ntenna Polarity el Limits (dBµV/m) 74.00	N 	55.4% Norma Vertica <sup>(dB)</sup> 20.60	I Voltage I Value Typ peak
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4880.000 4880.000	PUCK 4           25° C           960hPa           Mode 2           Meter Reading           (dBμV)           53.26           39.44	Factor (dB) 0.14 0.14	Μα           Re           Te           Ar           Emission Lev           (dBµV/m)           53.40           39.58	elative Humidity st Voltage ntenna Polarity el Limits (dBµV/m) 74.00 54.00	 	55.4% Norma Vertica Aargin (dB) 20.60 14.42	I Voltage I Value Type peak AVG
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4880.000 4880.000 7320.000	PUCK 4           25° C           960hPa           Mode 2           Meter Reading           (dBμV)           53.26           39.44           50.63	Factor (dB) 0.14 0.14 2.36	Μα           Re           Te           Ar           Emission Lev           (dBµV/m)           53.40           39.58           52.99	elative Humidity st Voltage ntenna Polarity el Limits (dBµV/m) 74.00 54.00 74.00	 	55.4% Norma Vertica /argin (dB) 20.60 14.42 21.01	I Voltage I Value Type peak AVG peak



Radiated Emissions	Test Results for Above 1GHz
--------------------	-----------------------------

EUT Name					l Name	PUCK4		
Temperature				Relative Humidity Test Voltage		55.4%	55.4%Normal VoltageHorizontal	
Pressure 960hPa						Normal		
Test Mode	Mode 3	Mode 3			Antenna Polarity			
	·							
Frequency	Meter Reading	Factor	actor Emissio		Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµ'	V/m)	(dBµV/m)	(dB)	value Type	
4960.000	52.45	0.22	52.	.67	74.00	-21.33	peak	
4960.000	40.79	0.22	41.	.01	54.00	-12.99	AVG	
7440.000	46.33	2.64	48.	.97	74.00	-25.03	peak	
7440.000	39.12	2.64	41.	.76	54.00	-12.24	AVG	
Remark:								
Factor = Ante	nna Factor + Cable	loss Dro	amplifior					
		- LUSS - FIE-	ampiller.					
		- 2033 - 116-						
	PUCK 4		ampiner.	Mode	I Name	PUCK4		
EUT Name					l Name ve Humidity	PUCK4 55.4%		
EUT Name	PUCK 4			Relati				
EUT Name Temperature Pressure	PUCK 4 25° C			Relati Test V	ve Humidity	55.4%		
EUT Name Temperature Pressure Test Mode	PUCK 4 25°C 960hPa Mode 3			Relati Test V Anten	ve Humidity /oltage na Polarity	55.4% Normal Vertical		
EUT Name Temperature Pressure Test Mode	PUCK 4 25°C 960hPa Mode 3 Meter Reading	Factor	Emissid	Relati Test V Anten	ve Humidity /oltage na Polarity Limits	55.4% Normal Vertical Margin		
EUT Name Temperature Pressure Test Mode Frequency (MHz)	PUCK 4 25°C 960hPa Mode 3 Meter Reading (dBµV)	Factor (dB)	Emissic (dBµ	Relati Test V Anten on Level V/m)	ve Humidity /oltage ma Polarity Limits (dBµV/m)	55.4% Normal Vertical Margin (dB)	Voltage Value Type	
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000	PUCK 4           25° C           960hPa           Mode 3           Meter Reading           (dBμV)           52.61	Factor (dB) 0.22	Emissic (dBµ 52.	Relati Test V Anten on Level V/m) 83	ve Humidity /oltage ma Polarity Limits (dBµV/m) 74.00	55.4% Normal Vertical Margin (dB) -21.17	Voltage Value Type peak	
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000 4960.000	PUCK 4           25° C           960hPa           Mode 3           Meter Reading           (dBμV)           52.61           41.78	Factor (dB) 0.22 0.22	Emissic (dBµ 52. 42.	Relati Test V Anten	ve Humidity /oltage ma Polarity Limits (dBµV/m) 74.00 54.00	55.4% Normal Vertical Margin (dB) -21.17 -12.00	Voltage Value Type peak AVG	
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000 4960.000 7440.000	PUCK 4           25° C           960hPa           Mode 3           Meter Reading           (dBμV)           52.61           41.78           49.81	Factor (dB) 0.22 0.22 2.64	Emissic (dBµ 52. 42. 52.	Relati Test V Anten on Level V/m) 83 .00 .45	<b>ve Humidity</b> /oltage na Polarity Limits (dBμV/m) 74.00 54.00 74.00	55.4% Normal Vertical Margin (dB) -21.17 -12.00 -21.55	Voltage Value Type peak AVG peak	
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000 4960.000	PUCK 4           25° C           960hPa           Mode 3           Meter Reading           (dBμV)           52.61           41.78	Factor (dB) 0.22 0.22	Emissic (dBµ 52. 42.	Relati Test V Anten on Level V/m) 83 .00 .45	ve Humidity /oltage ma Polarity Limits (dBµV/m) 74.00 54.00	55.4% Normal Vertical Margin (dB) -21.17 -12.00	Voltage Value Type peak AVG	
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000 4960.000 7440.000	PUCK 4           25° C           960hPa           Mode 3           Meter Reading           (dBμV)           52.61           41.78           49.81	Factor (dB) 0.22 0.22 2.64	Emissic (dBµ 52. 42. 52.	Relati Test V Anten on Level V/m) 83 .00 .45	<b>ve Humidity</b> /oltage na Polarity Limits (dBμV/m) 74.00 54.00 74.00	55.4% Normal Vertical Margin (dB) -21.17 -12.00 -21.55	Voltage Value Type peak AVG peak	
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000 4960.000 7440.000 7440.000	PUCK 4           25° C           960hPa           Mode 3           Meter Reading           (dBμV)           52.61           41.78           49.81	Factor (dB) 0.22 0.22 2.64 2.64	Emissic (dBµ 52. 42. 52. 41.	Relati Test V Anten on Level V/m) 83 .00 .45	<b>ve Humidity</b> /oltage na Polarity Limits (dBμV/m) 74.00 54.00 74.00	55.4% Normal Vertical Margin (dB) -21.17 -12.00 -21.55	Voltage Value Type peak AVG peak	



Radiated Emissions	Test Results for Above 1GHz
--------------------	-----------------------------

			Mc	del Name	PUC	PUCK 4 55.4% Normal Voltage	
			Re	lative Humidity	55.4%		
Pressure	960hPa	960hPa			Norm		
Test Mode	Mode 4		An	tenna Polarity	Horiz	Horizontal	
Frequency	Meter Reading	Factor	Emission Lev	el Limits	Margin		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type	
4804.000	50.63	0.22	50.85	74.00	-23.15	peak	
4804.000	42.85	0.22	43.07	54.00	-10.93	AVG	
7206.000	47.19	2.64	49.83	74.00	-24.17	peak	
7206.000	38.41	2.64	41.05	54.00	-12.95	AVG	
				_			
Domorta							
Remark:							
	ma Faster + Oct		a man lifi a "				
Factor = Anter	nna Factor + Cable	e Loss – Pre-	amplifier.				
Factor = Anter	PUCK 4	e Loss – Pre-		del Name	PUCI	(4	
		e Loss – Pre-	Mc	del Name lative Humidity	PUCi 55.4%		
EUT Name	PUCK 4	e Loss – Pre-	Mc Re		55.4%		
EUT Name Temperature	PUCK 4 25° C	e Loss – Pre-	Mc Re Tes	lative Humidity	55.4%	al Voltage	
EUT Name Temperature Pressure Test Mode	PUCK 4 25° C 960hPa Mode 4		Mc Re Tes	lative Humidity st Voltage tenna Polarity	55.49 Norm Vertic	al Voltage	
EUT Name Temperature Pressure Test Mode	PUCK 4 25°C 960hPa Mode 4 Meter Reading	Factor	Mc Re Tes An Emission Leve	Iative Humidity         st Voltage         tenna Polarity         el       Limits	55.49 Norm Vertic	al Voltage	
EUT Name Temperature Pressure Test Mode Frequency (MHz)	PUCK 4 25° C 960hPa Mode 4 Meter Reading (dBµV)	Factor (dB)	Mc Re Tes An Emission Lew (dBµV/m)	lative Humidity st Voltage tenna Polarity el Limits (dBμV/m)	55.4% Norm Vertic Margin (dB)	6 al Voltage al Value Type	
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000	PUCK 4 25° C 960hPa Mode 4 Meter Reading (dBµV) 50.89	Factor (dB) 0.22		lative Humidity st Voltage tenna Polarity el Limits (dBµV/m) 74.00	55.4% Norm Vertic Margin (dB) -22.89	6 al Voltage al Value Type peak	
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000 4804.000	PUCK 4 25° C 960hPa Mode 4 Meter Reading (dBµV) 50.89 41.22	Factor (dB) 0.22 0.22	Μc           Re           Tes           An           Emission Lew           (dBμV/m)           51.11           41.44	lative Humidity st Voltage tenna Polarity el Limits (dBµV/m) 74.00 54.00	55.49 Norm Vertic Margin (dB) -22.89 -12.56	6 al Voltage al Value Type peak AVG	
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000 4804.000 7206.000	PUCK 4           25° C           960hPa           Mode 4           Meter Reading           (dBμV)           50.89           41.22           49.77	Factor (dB) 0.22 0.22 2.64	Μc           Re           Tes           An           Emission Lew           (dBµV/m)           51.11           41.44           52.41	lative Humidity st Voltage tenna Polarity el Limits (dBµV/m) 74.00 54.00 74.00	55.49 Norm Vertic Margin (dB) -22.89 -12.56 -21.59	6 al Voltage al Value Type peak AVG peak	
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000 4804.000	PUCK 4 25° C 960hPa Mode 4 Meter Reading (dBµV) 50.89 41.22	Factor (dB) 0.22 0.22	Μc           Re           Tes           An           Emission Lew           (dBμV/m)           51.11           41.44	lative Humidity st Voltage tenna Polarity el Limits (dBµV/m) 74.00 54.00	55.49 Norm Vertic Margin (dB) -22.89 -12.56	6 al Voltage al Value Type peak AVG	
EUT Name Temperature Pressure Test Mode  Frequency (MHz) 4804.000 4804.000 7206.000 7206.000	PUCK 4           25° C           960hPa           Mode 4           Meter Reading           (dBμV)           50.89           41.22           49.77	Factor (dB) 0.22 0.22 2.64	Μc           Re           Tes           An           Emission Lew           (dBµV/m)           51.11           41.44           52.41	lative Humidity st Voltage tenna Polarity el Limits (dBµV/m) 74.00 54.00 74.00	55.49 Norm Vertic Margin (dB) -22.89 -12.56 -21.59	6 al Voltage al Value Type peak AVG peak	
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000 4804.000 7206.000 7206.000	PUCK 4           25° C           960hPa           Mode 4           Meter Reading           (dBμV)           50.89           41.22           49.77	Factor (dB) 0.22 0.22 2.64 2.64	Μc           Re           Tes           An           Emission Lew           (dBμV/m)           51.11           41.44           52.41           41.55	lative Humidity st Voltage tenna Polarity el Limits (dBµV/m) 74.00 54.00 74.00	55.49 Norm Vertic Margin (dB) -22.89 -12.56 -21.59	6 al Voltage al Value Type peak AVG peak	



Radiated Emissions	Test Results for Above 1GHz
--------------------	-----------------------------

EUT Name	PUCK 4	PUCK 4			PUC	K4	
Temperature	25° C		Rel	Relative Humidity		55.4%	
Pressure	960hPa			Test Voltage		Normal Voltage	
Test Mode	Mode 5		Ant	enna Polarity	Hori	zontal	
Frequency	Meter Reading	Factor	Emission Leve	I Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
4880.000	49.74	0.22	49.96	74.00	-24.04	peak	
4880.000	40.52	0.22	40.74	54.00	-13.26	AVG	
7320.000	46.85	2.64	49.49	74.00	-24.51	peak	
7320.000	39.14	2.64	41.78	54.00	-12.22	AVG	
				<u> </u>			
Remark:							
Contor - Anto	ana Eastan I Oslala						
Factor - Ante	nna Factor + Cable	e Loss – Pre-	amplifier.				
	PUCK 4	e Loss – Pre-		del Name	PUC	:К4	
EUT Name		Eloss – Pre-	Мо	del Name ative Humidity	PUC 55.4		
EUT Name Temperature	PUCK 4	Loss – Pre-	Mo		55.4		
EUT Name Temperature Pressure	PUCK 4 25° C	≥Loss – Pre-	Mo Rel Tes	ative Humidity	55.4	% nal Voltage	
EUT Name Temperature Pressure Test Mode	PUCK 4 25°C 960hPa Mode 5		Mo Rel Tes Ant	ative Humidity t Voltage enna Polarity	55.4 Norr Verti	% nal Voltage	
EUT Name Femperature Pressure Fest Mode	PUCK 4 25°C 960hPa Mode 5 Meter Reading	Factor	Mo Rel Tes Ant Emission Leve	ative Humidity t Voltage enna Polarity	55.4 Norr Verti	% nal Voltage	
EUT Name Temperature Pressure Test Mode Frequency (MHz)	PUCK 4 25°C 960hPa Mode 5 Meter Reading (dBµV)	Factor (dB)	Mo Rel Tes Ant Emission Leve (dBµV/m)	ative Humidity t Voltage enna Polarity	55.4 Norr Verti Margin (dB)	% nal Voltage cal Value Type	
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4880.000	PUCK 4           25° C           960hPa           Mode 5           Meter Reading           (dBµV)           48.91	Factor (dB) 0.22	Emission Leve (dBµV/m) 49.13	ative Humidity t Voltage enna Polarity	55.4 Norr Verti Margin (dB) -24.87	% nal Voltage cal Value Type peak	
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4880.000 4880.000	PUCK 4           25° C           960hPa           Mode 5           Meter Reading           (dBμV)           48.91           41.37	Factor (dB) 0.22 0.22	Mo           Rel           Tes           Ant           Emission Leve           (dBμV/m)           49.13           41.59	ative Humidity t Voltage enna Polarity Limits (dBµV/m) 74.00 54.00	55.4 Norr Verti Margin (dB) -24.87 -12.41	% nal Voltage cal Value Type peak AVG	
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4880.000 4880.000 7320.000	PUCK 4           25° C           960hPa           Mode 5           Meter Reading           (dBμV)           48.91           41.37           45.93	Factor (dB) 0.22 0.22 2.64	Мо Rel Тез Апт Еmission Leve (dBµV/m) 49.13 41.59 48.57	ative Humidity t Voltage enna Polarity I Limits (dBµV/m) 74.00 54.00 74.00	55.4 Norr Verti Margin (dB) -24.87 -12.41 -25.43	% nal Voltage cal Value Type peak AVG peak	
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4880.000 4880.000	PUCK 4           25° C           960hPa           Mode 5           Meter Reading           (dBμV)           48.91           41.37	Factor (dB) 0.22 0.22	Mo           Rel           Tes           Ant           Emission Leve           (dBμV/m)           49.13           41.59	ative Humidity t Voltage enna Polarity Limits (dBµV/m) 74.00 54.00	55.4 Norr Verti Margin (dB) -24.87 -12.41	% nal Voltage cal Value Type peak AVG	
EUT Name Temperature Pressure Test Mode  Frequency (MHz) 4880.000 4880.000 7320.000 7320.000	PUCK 4           25° C           960hPa           Mode 5           Meter Reading           (dBμV)           48.91           41.37           45.93	Factor (dB) 0.22 0.22 2.64	Мо Rel Тез Апт Еmission Leve (dBµV/m) 49.13 41.59 48.57	ative Humidity t Voltage enna Polarity I Limits (dBµV/m) 74.00 54.00 74.00	55.4 Norr Verti Margin (dB) -24.87 -12.41 -25.43	% nal Voltage cal Value Type peak AVG peak	
UT Name remperature ressure rest Mode Frequency (MHz) 4880.000 4880.000 7320.000 7320.000 7320.000	PUCK 4           25° C           960hPa           Mode 5           Meter Reading           (dBμV)           48.91           41.37           45.93	Factor (dB) 0.22 0.22 2.64 2.64	Мо Rel Tes Ant Emission Leve (dBµV/m) 49.13 41.59 48.57 42.64	ative Humidity t Voltage enna Polarity I Limits (dBµV/m) 74.00 54.00 74.00	55.4 Norr Verti Margin (dB) -24.87 -12.41 -25.43	% nal Voltage cal Value Type peak AVG peak	



Radiated Emissions	Test Results for Above 1GHz
--------------------	-----------------------------

EUT Name		PUCK 4			Mode	I Name	PUCK4	
Temperature		25° C		Relative Humidity		55.4%	55.4% Normal Voltage	
Pressure	ssure 960hPa			Test Voltage		Normal		
Test Mode		Mode 6			Anten	na Polarity	Horizon	tal
Frequer	псу	Meter Reading	Factor	Emissio	on Level	Limits	Margin	
(MHz	)	(dBµV)	(dB)	(dBµ	V/m)	(dBµV/m)	(dB)	- Value Type
4960.0	00	52.06	0.22	52.	.28	74.00	-21.72	peak
4960.0	00	39.74	0.22	39.	.96	54.00	-14.04	AVG
7440.0	00	49.18	2.64	51.	.82	74.00	-22.18	peak
7440.0	00	40.90	2.64	43.	.54	54.00	-10.46	AVG
Remark: Factor = /	Anten	na Factor + Cable	e Loss – Pre-	amplifier.				
	Anten	na Factor + Cable PUCK 4	e Loss – Pre-	amplifier.	Mode	I Name	PUCK4	
Factor = <i>p</i>	Anten	-	e Loss – Pre-	amplifier.		l Name ve Humidity	PUCK4 55.4%	
Factor = / EUT Name Temperature	Anten	PUCK 4	e Loss – Pre-	amplifier.	Relati			Voltage
Factor = 7 EUT Name Temperature Pressure	Anten	PUCK 4 25° C	e Loss – Pre-	amplifier.	Relati Test V	ve Humidity	55.4%	Voltage
Factor = / EUT Name Temperature Pressure Test Mode		PUCK 4 25° C 960hPa Mode 6			Relati Test V Anten	ve Humidity /oltage ina Polarity	55.4% Normal Vertical	Voltage
Factor = 7 EUT Name Temperature Pressure Test Mode	псу	PUCK 4 25°C 960hPa Mode 6 Meter Reading	Factor	Emissio	Relati Test V Anten	ve Humidity /oltage ina Polarity	55.4% Normal Vertical	
Factor = / EUT Name Temperature Pressure Test Mode	ncy )	PUCK 4 25°C 960hPa Mode 6 Meter Reading (dBµV)	Factor (dB)	Emissic	Relati Test V Anten	Ve Humidity /oltage ina Polarity Limits (dBµV/m)	55.4% Normal Vertical Margin (dB)	Value Type
Factor = / EUT Name Temperature Pressure Test Mode	ncy ) 00	PUCK 4           25° C           960hPa           Mode 6           Meter Reading (dBμV)           50.33	Factor (dB) 0.22	Emissic (dBµ 50.	Relati Test V Anten on Level V/m) .55	ve Humidity /oltage na Polarity Limits (dBµV/m) 74.00	55.4% Normal Vertical Margin (dB) -23.45	Value Type
Factor = / EUT Name Temperature Pressure Test Mode Frequer (MHz 4960.00 4960.00	ncy ) 00 00	PUCK 4           25° C           960hPa           Mode 6           Meter Reading           (dBμV)           50.33           41.74	Factor (dB) 0.22 0.22	Emissic (dBµ 50. 41.	Relati Test V Anten	ve Humidity /oltage ma Polarity Limits (dBµV/m) 74.00 54.00	55.4% Normal Vertical Margin (dB) -23.45 -12.04	Value Type peak AVG
Factor = 7 EUT Name Temperature Pressure Test Mode Frequer (MHz 4960.00 4960.00 7440.00	ncy ) 00 00	PUCK 4           25° C           960hPa           Mode 6           Meter Reading           (dBμV)           50.33           41.74           48.61	Factor (dB) 0.22 0.22 2.64	Етізsіс (dВµ 50. 41. 51.	Relati Test V Anten On Level V/m) .55 .96 .25	ve Humidity /oltage ma Polarity Limits (dBµV/m) 74.00 54.00 74.00	55.4% Normal Vertical Margin (dB) -23.45 -12.04 -22.75	Value Type peak AVG peak
Factor = / EUT Name Temperature Pressure Test Mode Frequer (MHz 4960.00 4960.00	ncy ) 00 00	PUCK 4           25° C           960hPa           Mode 6           Meter Reading           (dBμV)           50.33           41.74	Factor (dB) 0.22 0.22	Emissic (dBµ 50. 41.	Relati Test V Anten On Level V/m) .55 .96 .25	ve Humidity /oltage ma Polarity Limits (dBµV/m) 74.00 54.00	55.4% Normal Vertical Margin (dB) -23.45 -12.04	Value Type peak AVG
Factor = /           EUT Name           Temperature           Pressure           Test Mode           Frequer           (MHz           4960.00           7440.00	ncy ) 00 00	PUCK 4           25° C           960hPa           Mode 6           Meter Reading           (dBμV)           50.33           41.74           48.61	Factor (dB) 0.22 0.22 2.64	Emissic (dBµ 50. 41. 51.	Relati Test V Anten On Level V/m) .55 .96 .25	ve Humidity /oltage ma Polarity Limits (dBµV/m) 74.00 54.00 74.00	55.4% Normal Vertical Margin (dB) -23.45 -12.04 -22.75	Value Type peak AVG peak

#### Note:


- 1. The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.




Band Edge Emission	Test Results for Restricted Bands
--------------------	-----------------------------------

EUT Name	PUCK 4	Model Name	PUCK4
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Horizontal



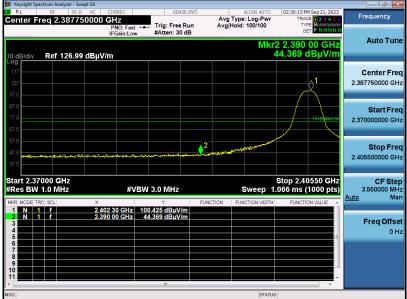

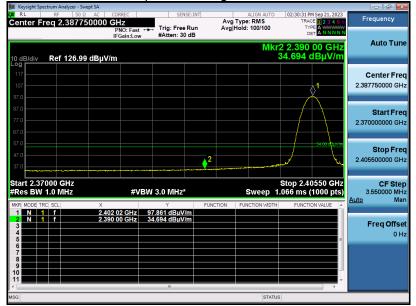


## **RESULT: Pass**




Band Edge Emission	Test Results for Restricted Bands
--------------------	-----------------------------------

EUT Name	PUCK 4	Model Name	PUCK4
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Vertical



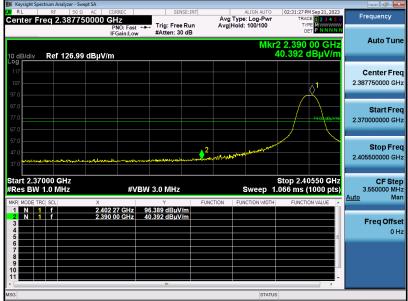

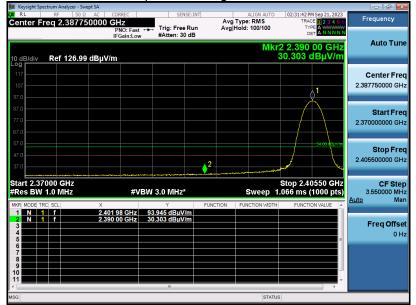


## **RESULT: Pass**




Band Edge Emission	Test Results for Restricted Bands
--------------------	-----------------------------------

EUT Name	PUCK 4	Model Name	PUCK4
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Horizontal



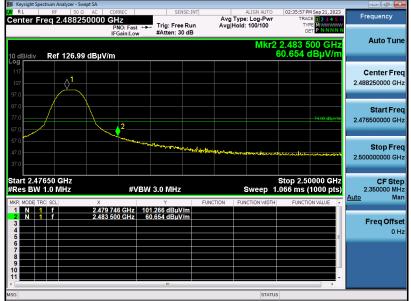

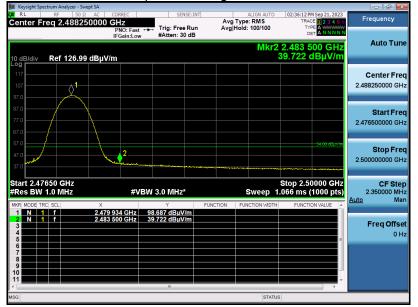


## **RESULT: Pass**




EUT Name	PUCK 4	Model Name	PUCK4
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Vertical

Test Graph for Peak Measurement

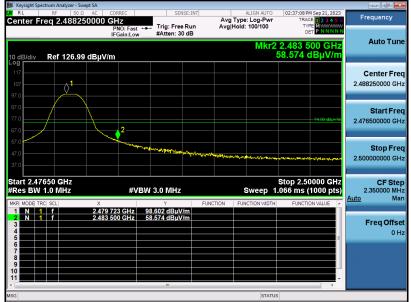

Test Graph for Average Measurement

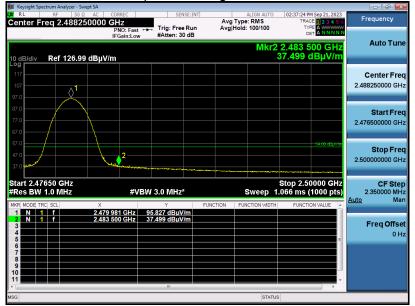



## **RESULT: Pass**



EUT Name	PUCK 4	Model Name	PUCK4
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna Polarity	Horizontal



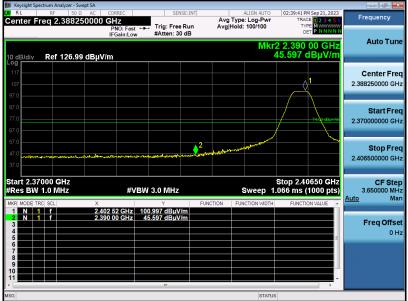

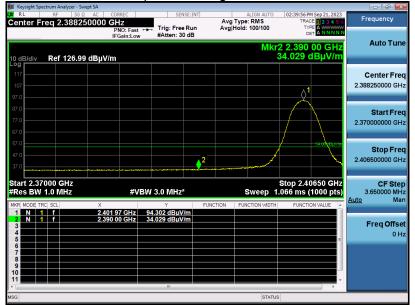


## **RESULT: Pass**




Band Edge Emission	Test Results for Restricted Bands
--------------------	-----------------------------------

EUT Name	PUCK 4	Model Name	PUCK4
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna Polarity	Vertical



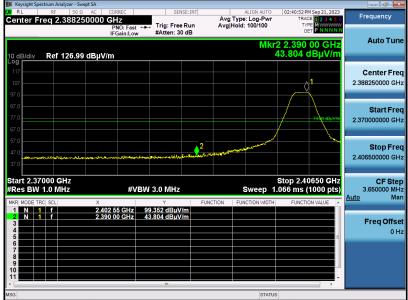

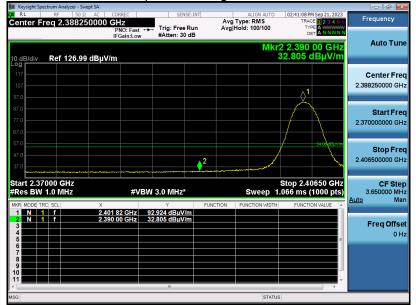



# **RESULT: Pass**



Band Edge Emission	Test Results for Restricted Bands
--------------------	-----------------------------------

EUT Name	PUCK 4	Model Name	PUCK4
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna Polarity	Horizontal

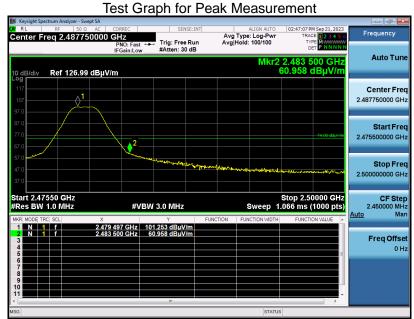

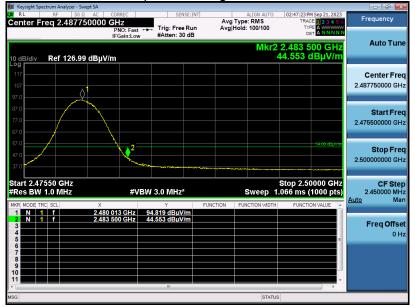


## **RESULT: Pass**




EUT Name	PUCK 4	Model Name	PUCK4
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna Polarity	Vertical

#### Band Edge Emission Test Results for Restricted Bands

Test Graph for Peak Measurement

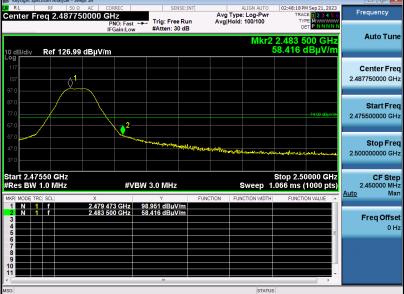

Test Graph for Average Measurement

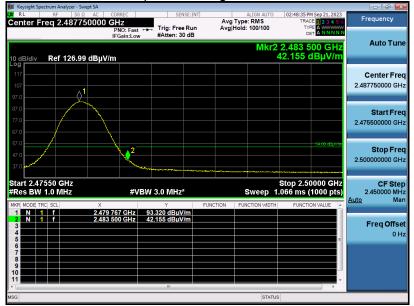

## **RESULT: Pass**

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.



# **12. AC Power Line Conducted Emission Test**

# **12.1 Measurement Limits**


En anna an	Maximum RF Line Voltage		
Frequency	Q.P. (dBµV)	Average (dBµV)	
150kHz~500kHz	66-56	56-46	
500kHz~5MHz	56	46	
5MHz~30MHz	60	50	

Note:

1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

#### 12.2 Measurement Setup (Block Diagram of Configuration)

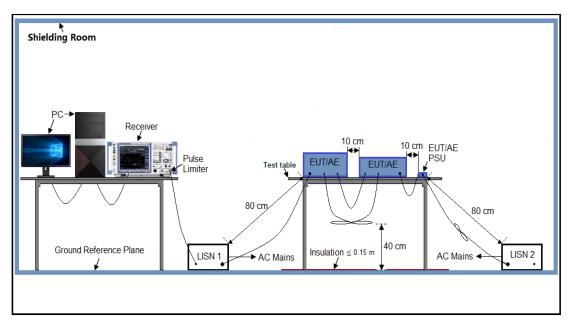



# 12.3 Preliminary Procedure of Line Conducted Emission Test

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

## 12.4 Final Procedure of Line Conducted Emission Test

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

#### **12.5 Measurement Results**

Not applicable



Report No.: AGC15705230874FR01 Page 68 of 68

# Appendix I: Photographs of Test Setup Refer to the Report No.: AGC15705230874AP01 Appendix II: Photographs of Test EUT Refer to the Report No.: AGC15705230874AP02

-----End of Report-----



# Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.