

FCC TEST REPORT

for

47 CFR Part 24E

Equipment : **GSM/GPRS Mobile Phone**

Trade (Model) Name : **XG (XG966)**
Compal (TG9D)
Capitel (C8988)
TOP (U80)
Distar (D991C)

FCC ID : **CKRTG9D**

Filing Type : **Certification**

Applicant : **Compal Electronics, Inc.**
7F, No.500, Juikuang Rd., Neihsu, Taipei 114, Taiwan R.O.C.

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.
- **Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by NVLAP or any agency of U.S. government.**

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

The applicant has been cautioned as to the following:

15.21 Information to User.

The users manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a) Special Accessories.

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

Table of Contents

Rule	Description	Page
	Test Report	4
2.1033(c)	General Information Required	5
2.1033(c)(14)	Rule Summary	8
	General Information	9
	Standard Test Conditions and Engineering Practices	10
2.1046(a)	EIRP Carrier Power (Radiated)	11
2.1051, 2.1049(c), 24, 24.238(b)	Transmitter Conducted Measurements	20
2.1053(a)	Field Strength of Spurious Radiation	26
2.1055(a)(1)	Frequency Stability (Temperature Variation)	42
2.1055(b)(1)	Frequency Stability (Voltage Variation)	45
	Antenna Factor & Cable Loss	46
	List of Measuring Equipments	47
	Uncertainty of Test Site	48
Appendix A	External Product Photograph	
Appendix B	Internal Photograph	
Appendix C	Set up Photograph	

FCC TEST REPORT

Report No. : F440211

Required information per ISO/IEC Guide 25-1990, paragraph 13.2:

a) **Test Report**

b) Laboratory: Sporton International Inc.
No.52, Hwa-Ya 1st RD., Hwa Ya Technology Park, Kwei-Shan Hsiang,
TaoYuan Hsien, Taiwan, R.O.C.

c) Report Number: F440211

d) Client: Compal Electronics, Inc.
7F, No.500, Juikuang Rd., Neihu, Taipei 114, Taiwan R.O.C.

e) Identification: Model Name: SG966, TG9D, C8988, U80, D991C
FCC ID : GKRTG9D
Description: GSM 1900 Radio

f) EUT Condition: Not required unless specified in individual tests.

g) Report Date: Apr.15, 2004
EUT Received: Apr.09, 2004

h, j, k): As indicated in individual tests.

i) Sampling method: No sampling procedure used.

l) Uncertainty: In accordance with Sporton internal quality manual.

m) Supervised by:



Daniel Lee

n) Results: The results presented in this report relate only to the item tested.

o) Reproduction: This report must not be reproduced, except in full, without written permission from this laboratory.

Accessories Used During Testing:

Type	Model
EUT	XG966, TG9D, C8988, U80, D991C
Earpiece	N/A

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

FCC ID CKRTG9D

Page No. 4 of 49

Issued Date Apr.15, 2004

List of General Information Required for Certification

In Accordance with FCC Rules and Regulations,
Volume II, Part 2 and
24E, Confidentiality

Sub-Part 2.1033**(c)(1): Name and Address of Applicant:**

Compal Electronics, Inc.
7F, No.500, Juikuang Rd., Neihu, Taipei 114, Taiwan
R.O.C.

Manufacturer

As above

(c)(2): FCC ID: GKRTG9D

Model Number: XG966, TG9D, C8988, U80, D991C

(c)(3): Instruction Manual(s):

Please See Attached Exhibits

(c)(4): Type of Emission: 300KGXW

(c)(5): FREQUENCY RANGE, MHz: 1850.3 to 1909.8

(c)(6): Power Rating, Watts: 0.977 (conducted); 0.603 (EIRP)

Switchable x Variable N/A

(c)(7): Maximum Power Rating, Watts: 1

Subpart 2.1033 (continued)

(c)(8): Voltages & Currents in All Elements in Final RF Stage, Including Final Transistor or Solid State Device:

Collector Current, A = 0.5
Collector Voltage, Vdc = 3.8
Supply Voltage, Vdc = 3.8

(c)(9): **Tune-Up Procedure:**

Please See Attached Exhibits

(c)(10): **Circuit Diagram/Circuit Description:**

Please See Attached Exhibits

(c)(11): **Label Information:**

Please See Attached Exhibits

(c)(12): **Photographs:**

Please See Attached Exhibits

(c)(13): **Digital Modulation Description:**

 x Attached Exhibits
 N/A

(c)(14): **Test and Measurement Data:**

Follows

Certificate of NVLAP Accreditation

United States Department of Commerce
National Institute of Standards and Technology

NVLAP[®]

ISO/IEC 17025:1999
ISO 9002:1994

Certificate of Accreditation


SPORTON INTERNATIONAL, INC.
TAIPEI HSIEN 221
TAIWAN

*is recognized by the National Voluntary Laboratory Accreditation Program
for satisfactory compliance with criteria set forth in NIST Handbook 150:2001,
all requirements of ISO/IEC 17025:1999, and relevant requirements of ISO 9002:1994.
Accreditation is awarded for specific services, listed on the Scope of Accreditation, for:*

ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS

December 31, 2004
Effective through


For the National Institute of Standards and Technology
NVLAP Lab Code: 200079-0



NVLAP-01C (06-01)

Sub-part

2.1033(c)(14): Test and Measurement Data

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II; Part 2, Sub-part J, Sections 2.947, 2.1033(c), 2.1041, 2.1046, 2.1047, 2.1079, 2.1051, 2.1053, 2.1055, 2.1057 and the following individual Parts:

- 21 – Domestic Public Fixed Radio Services
- 22 – Public Mobile Services
- 22 Subpart H - Cellular Radiotelephone Service
- 22.901(d) - Alternative technologies and auxiliary services
- 23 – International Fixed Public Radiocommunication services
- x 24 – Personal Communications Services
- 74 Subpart H - Low Power Auxiliary Stations
- 80 – Stations in the Maritime Services
- 80 Subpart E - General Technical Standards
- 80 Subpart F - Equipment Authorization for Compulsory Ships
- 80 Subpart K - Private Coast Stations and Marine Utility Stations
- 80 Subpart S - Compulsory Radiotelephone Installations for Small Passenger Boats
- 80 Subpart T - Radiotelephone Installation Required for Vessels on the Great Lakes
- 80 Subpart U - Radiotelephone Installations Required by the Bridge-to-Bridge Act
- 80 Subpart V - Emergency Position Indicating Radiobeacons (EPIRB'S)
- 80 Subpart W - Global Maritime Distress and Safety System (GMDSS)
- 80 Subpart X - Voluntary Radio Installations
- 87 – Aviation Services
- 90 – Private Land Mobile Radio Services
- 94 – Private Operational-Fixed Microwave Service
- 95 Subpart A - General Mobile Radio Service (GMRS)
- 95 Subpart C - Radio Control (R/C) Radio Service
- 95 Subpart D - Citizens Band (CB) Radio Service
- 95 Subpart E - Family Radio Service
- 95 Subpart F - Interactive Video and Data Service (IVDS)
- 97 - Amateur Radio Service
- 101 – Fixed Microwave Services

General Information

Product Feature & Specification	
1. Host/Radio Interface	GSM/GPRS Mobile Phone
2. Type of Modulation	GMSK
3. Number of Channels	GSM 1900 : 512 to 810
4. Frequency Band , MHz	Tx: 1850~1910 Rx: 1930~1990
5. Bandwidth of each channel	200 KHz
6. Maximum Output Power to Antenna	30 dBm
7. IMEI Code	102321650009333
8. Antenna Type	Fixed External
9. Antenna Size	19.5 mm
10. Power Rating (DC/AC , Voltage)	DC 3.8V

Standard Test Conditions**and****Engineering Practices**

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with TIA603, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104 °F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Prior to testing, the EUT was tuned up in accordance with the manufacturer's alignment procedures. All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

Measurement results, unless otherwise noted, are worst-case measurements.


Name of Test: EIRP Carrier Power (Radiated)

Specification: TIA/EIA 603A (Substitution Method)

Definition: The average radiated power of device is the equivalent power required, when delivered to a substitution antenna, to produce at a distant point the same average received power as produced by the licensed device.

Method Of Measurement:

a) Connect the equipment as illustrated. Place the transmitter to be tested on the turntable in the standard test site.

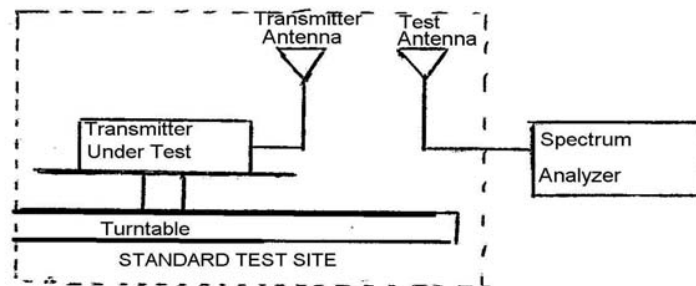

b) Raise and lower the test antenna from 1m to 4m and rotate turntable from 0° to 360°. Record the highest received signal showed in spectrum analyzer as R_t . Calculate electric field strength in receive antenna as E_t .

$$E_t = R_t + AF$$

AF (dB/m): Receive Antenna Factor

c) Replace the transmitter under test with a substitution antenna. The center of the antenna should be at the same location as the transmitter under test. Connect the antenna to a signal generator with a known output power level P_s . Raise and lower the test antenna like in step b) and record the highest received signal showed in spectrum analyzer as R_s . Calculate electric field strength in receive antenna as E_s .

$$E_s = R_s + AF$$

AF (dB/m): Receive Antenna Factor

d) Calculate radiated power as following:

$$EIRP = P_s + E_t - E_s + G_s$$

P_s (dBm): Input Power to Substitution Antenna

G_s (dBi) : Substitution Antenna Gain

Results Attached

FCC TEST REPORTReport No. : F440211

Test Results For: EIRP Carrier Power (Radiated)**Conducted Power**

Bands	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (Watts)
GSM 1900	512	1850.2 (Low)	29.9	0.977
	661	1880.0 (Mid)	29.9	0.977
	810	1909.8 (High)	29.6	0.912


EIRP

Freq MHz	Pol	Substitution Antenna Input Power dBm	Substitution Antenna Gain dBi	Et	Es	Et - Es dB	Radiated P Out dBm	Radiated P Out Watts
1850.30	H	-3.76	6.64	120.59	101.70	18.89	21.78	0.151
1879.98	H	-3.78	6.65	124.46	101.64	22.82	25.69	0.371
1909.86	H	-3.81	6.66	124.41	101.58	22.83	25.68	0.370
1850.22	V	-3.76	6.64	125.15	101.70	23.45	26.34	0.430
1879.91	V	-3.78	6.65	126.57	101.64	24.93	27.80	0.603
1909.83	V	-3.81	6.66	125.38	101.58	23.80	26.65	0.463

FCC TEST REPORT

Report No. : F440211

GSM 1900 CH512 Vertical Polarization

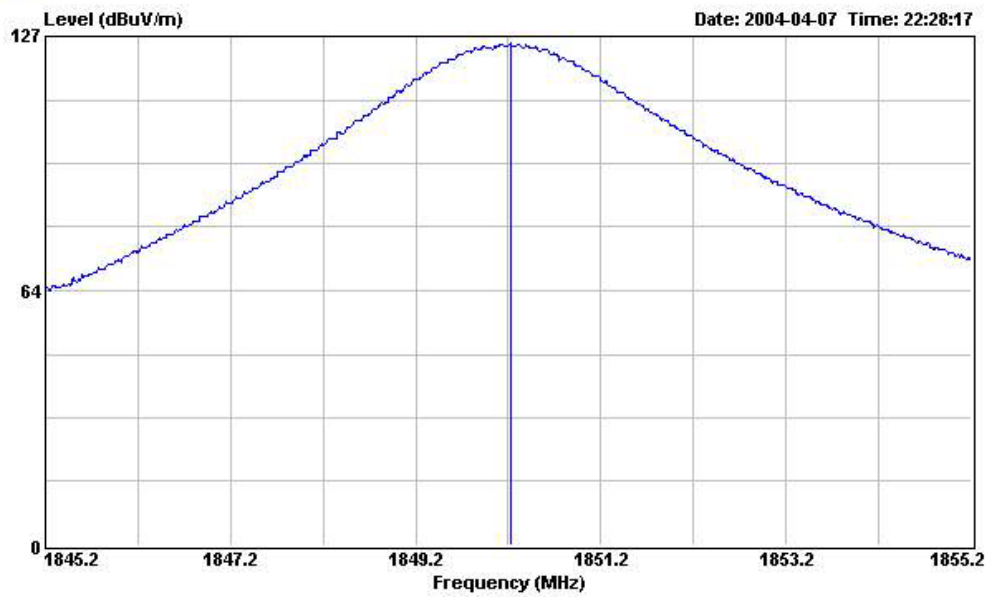

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 VERTICAL
 EUT : GSM/GPRS Dual Bad Handset
 Model : TG9D
 Power : 110Vac/60Hz
 Memo : PCS CH512 Link Mode

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1850.220	125.15	-----	-----	96.73	26.77	1.65	0.00	Peak	---	---

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

FCC ID CKRTG9D


Page No. 14 of 49

Issued Date Apr.15, 2004

FCC TEST REPORT

Report No. : F440211

GSM 1900 CH512 Horizontal Polarization

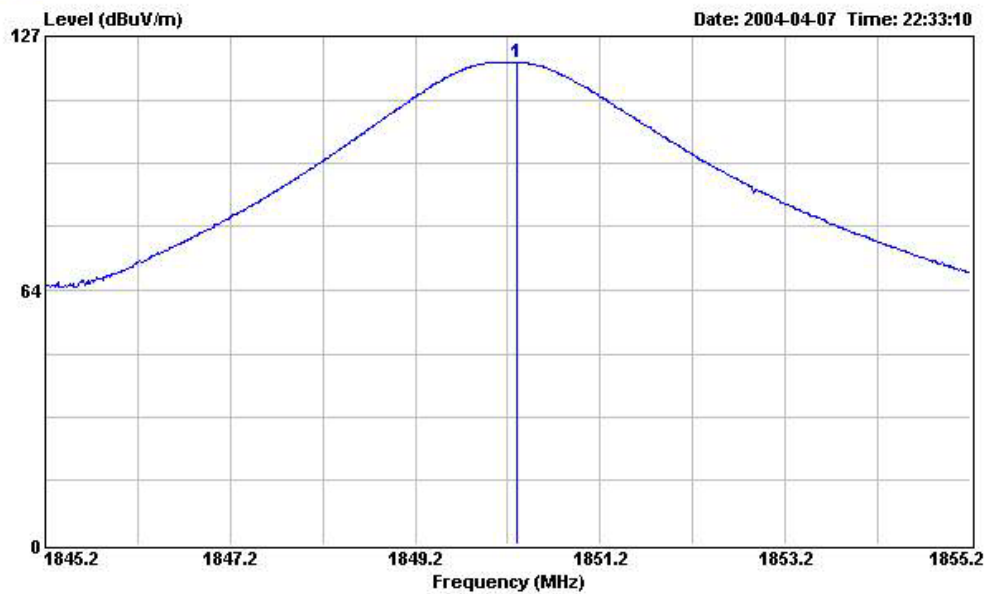

Site : 03CH03-HY
Condition : 3m HORN-ANT-6741 HORIZONTAL
EUT : GSM/GPRS Dual Bad Handset
Model : TG9D
Power : 110Vac/60Hz
Memo : PCS CH512 Link Mode

	Freq	Level	Over	Limit	Read	Probe	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
			dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1850.300	120.59	-----	-----	92.17	26.77	1.65	0.00	Peak	---	---

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

FCC ID CKRTG9D


Page No. 15 of 49

Issued Date Apr.15, 2004

FCC TEST REPORT

Report No. : F440211

GSM 1900 CH661 Vertical Polarization

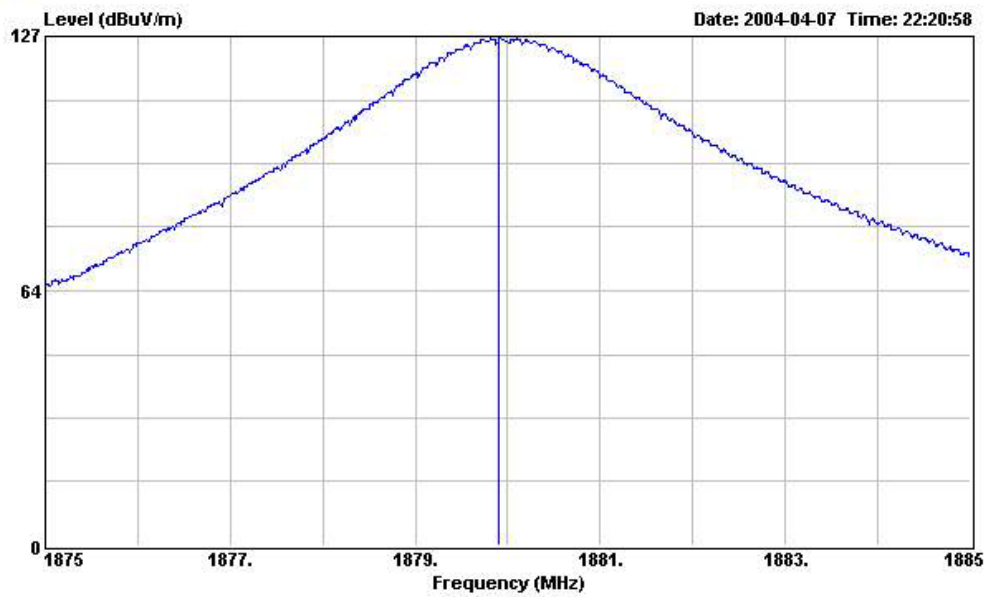

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 VERTICAL
 EUT : GSM/GPRS Dual Bad Handset
 Model : TG9D
 Power : 110Vac/60Hz
 Memo : PCS CH661 Link Mode

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1879.910	126.57	-----	-----	98.07	26.91	1.59	0.00	Peak	---	---

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

FCC ID CKRTG9D


Page No. 16 of 49

Issued Date Apr.15, 2004

FCC TEST REPORT

Report No. : F440211

GSM 1900 CH661 Horizontal Polarization

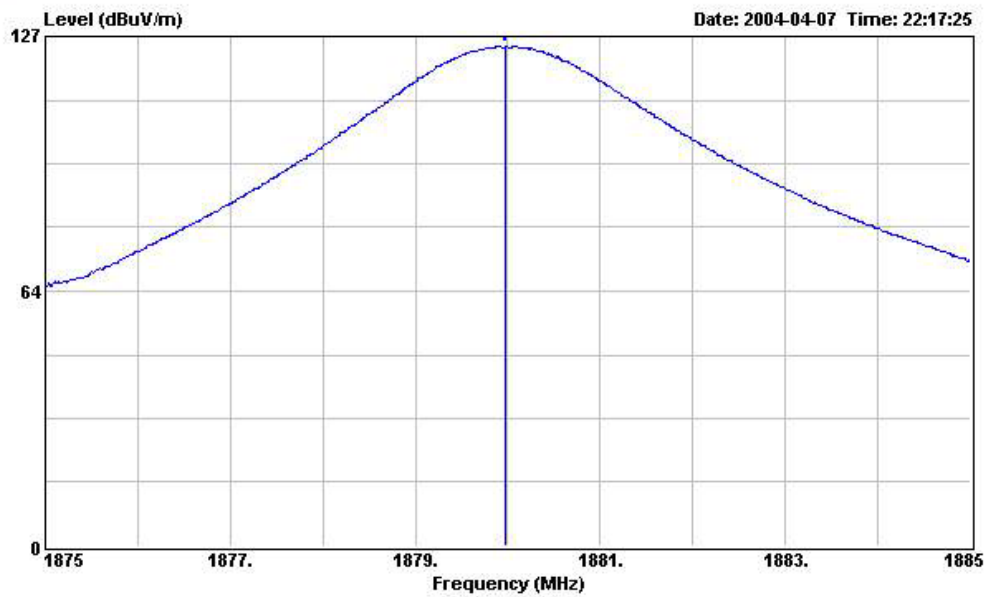

Site : 03CH03-HY
Condition : 3m HORN-ANT-6741 HORIZONTAL
EUT : GSM/GPRS Dual Bad Handset
Model : TG9D
Power : 110Vac/60Hz
Memo : PCS CH661 Link Mode

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1879.980	124.46	-----	-----	95.96	26.91	1.59	0.00	Peak	---	---


SPORTON International Inc.
TEL : 886-2-2696-2468
FAX : 886-2-2696-2255

FCC ID : CKRTG9D
Page No. : 17 of 49
Issued Date : Apr.15, 2004

FCC TEST REPORT

Report No. : F440211

GSM 1900 CH810 Vertical Polarization

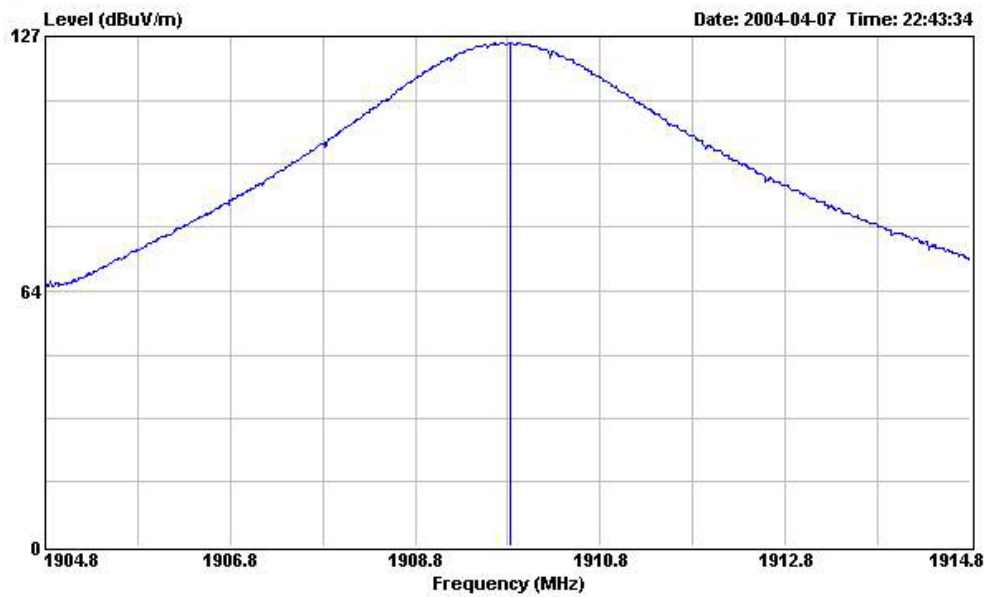

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 VERTICAL
 EUT : GSM/GPRS Dual Bad Handset
 Model : TG9D
 Power : 110Vac/60Hz
 Memo : PCS CH810 Link Mode

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1909.830	125.38	-----	-----	96.74	27.05	1.59	0.00	Peak	---	---


SPORTON International Inc.
 TEL : 886-2-2696-2468
 FAX : 886-2-2696-2255

FCC ID : CKRTG9D
 Page No. : 18 of 49
 Issued Date : Apr.15, 2004

FCC TEST REPORT

Report No. : F440211

GSM 1900 CH810 Horizontal Polarization

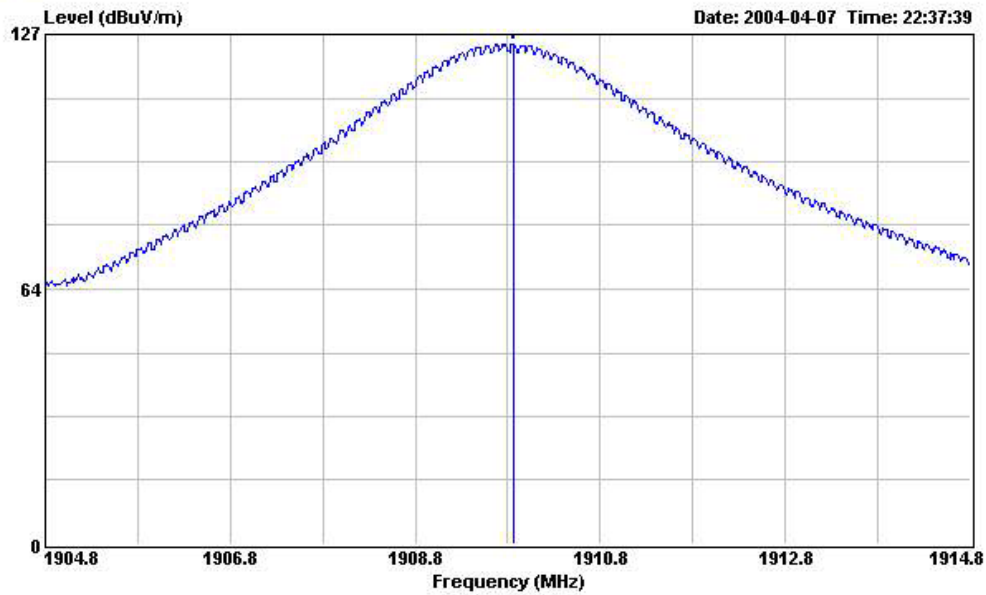

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 HORIZONTAL
 EUT : GSM/GPRS Dual Bad Handset
 Model : TG9D
 Power : 110Vac/60Hz
 Memo : PCS CH810 Link Mode

	Over	Limit	Read	Probe	Cable	Preamp			Ant	Table
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1 1909.860	124.41	-----	-----	95.77	27.05	1.59	0.00	Peak	---	---

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

FCC ID CKRTG9D

Page No. 19 of 49

Issued Date Apr.15, 2004


Name of Test: Transmitter Conducted Measurements

Specification: 47 CFR 2.1051: Unwanted (spurious) Emissions
2.1049(c), 24.238(b): Occupied Bandwidth
24: Emissions at Band Edges

Test Equipment: As per attached page

Measurement Procedure

1. The EUT and test equipment were set up as shown on the following page with the Spectrum Analyzer connected.
2. The low and high channels for all RF powers within the transmitting frequency band were measured.
3. Measurement Results: Attached

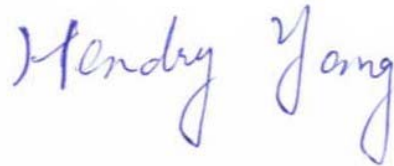


Performed By:

Hendry Yang

Transmitter Spurious Emission

Test A. Occupied Bandwidth (In-Band Spurious)

Test B. Out-of-Band Spurious

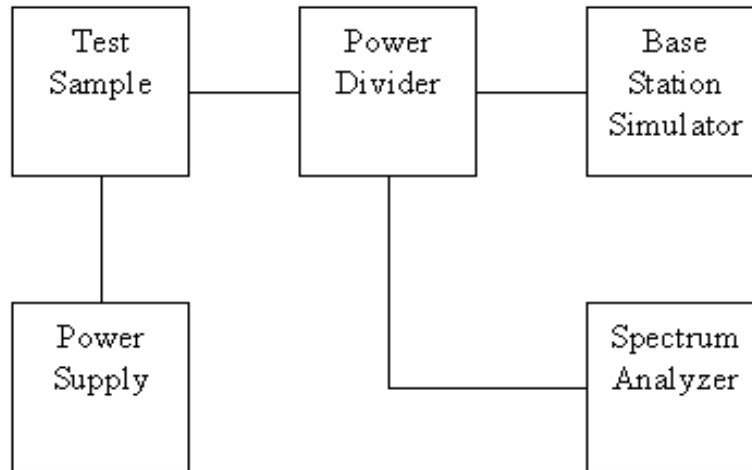


Asset	Model Name	S/N
Base Station Simulator	CMU200	102278
Spectrum Analyzer	FSP30	838858/014
AC/DC Power Source	HPA-500W	HPA0100024

FCC TEST REPORT

Report No. : F440211

Name of Test: Emission Masks (Occupied Bandwidth)
State 2:High Power

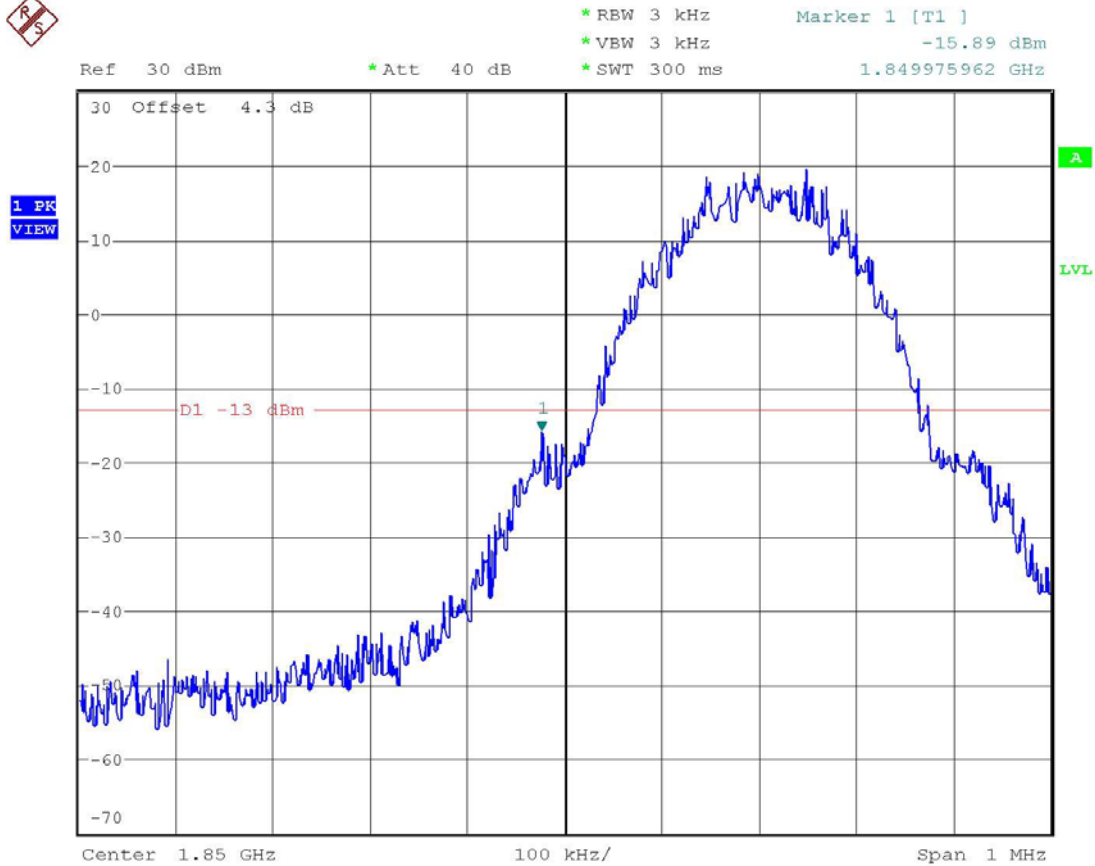

Power: HIGH
Modulation: GSM 1900
LOWER BAND EDGE

Hendry Yang

Performed By:

Hendry Yang

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

FCC ID

CKRTG9D

Page No.

22 of 49


Issued Date

Apr.15, 2004

FCC TEST REPORT

Report No. : F440211

Name of Test: Emission Masks (Occupied Bandwidth)
State 1:Low Power

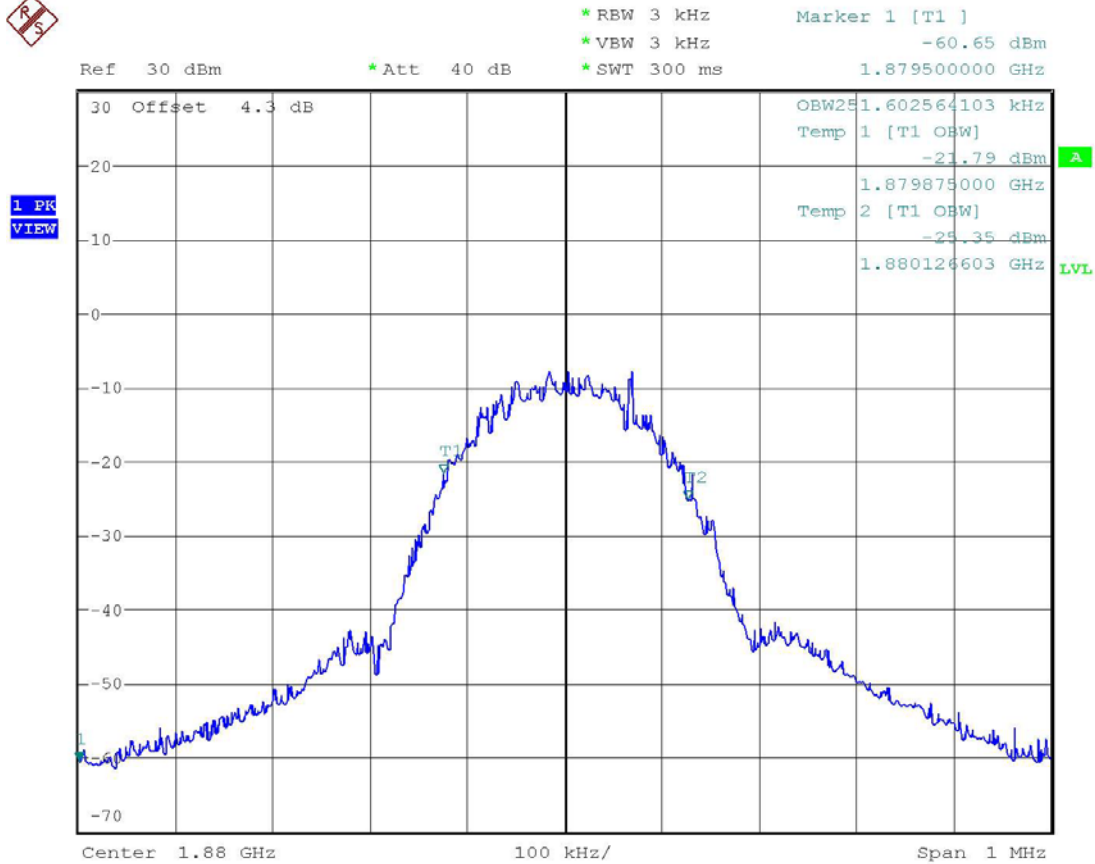

Power: LOW
 Modulation: GSM 1900
 99% BANDWIDTH

Hendry Yang

Performed By: Hendry Yang


SPORTON International Inc.
 TEL : 886-2-2696-2468
 FAX : 886-2-2696-2255

FCC ID CKRTG9D
 Page No. 23 of 49
 Issued Date Apr.15, 2004

FCC TEST REPORT

Report No. : F440211

Name of Test: Emission Masks (Occupied Bandwidth)
State 2:High Power

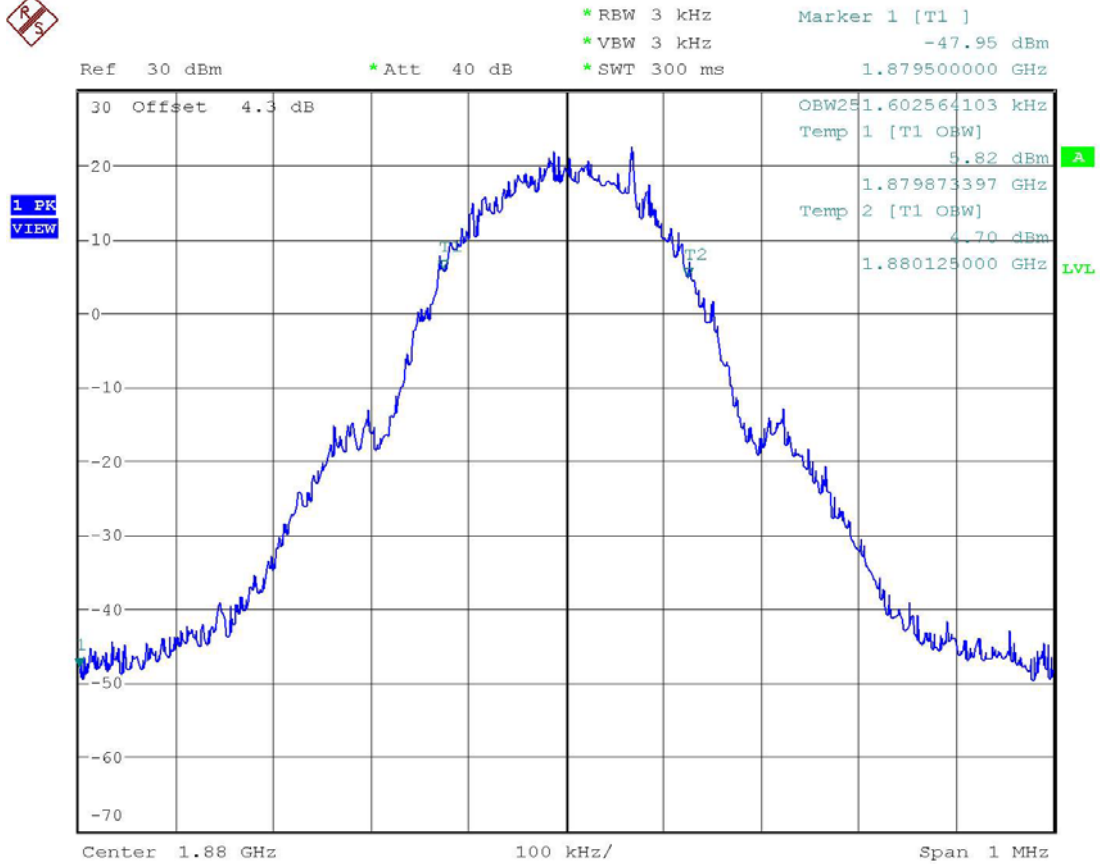

Power: HIGH
 Modulation: GSM 1900
 99% BANDWIDTH

Hendry Yang

Performed By:

Hendry Yang

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

FCC ID CKRTG9D


Page No. 24 of 49

Issued Date Apr.15, 2004

FCC TEST REPORT

Report No. : F440211

Name of Test: Emission Masks (Occupied Bandwidth)
State 2:High Power

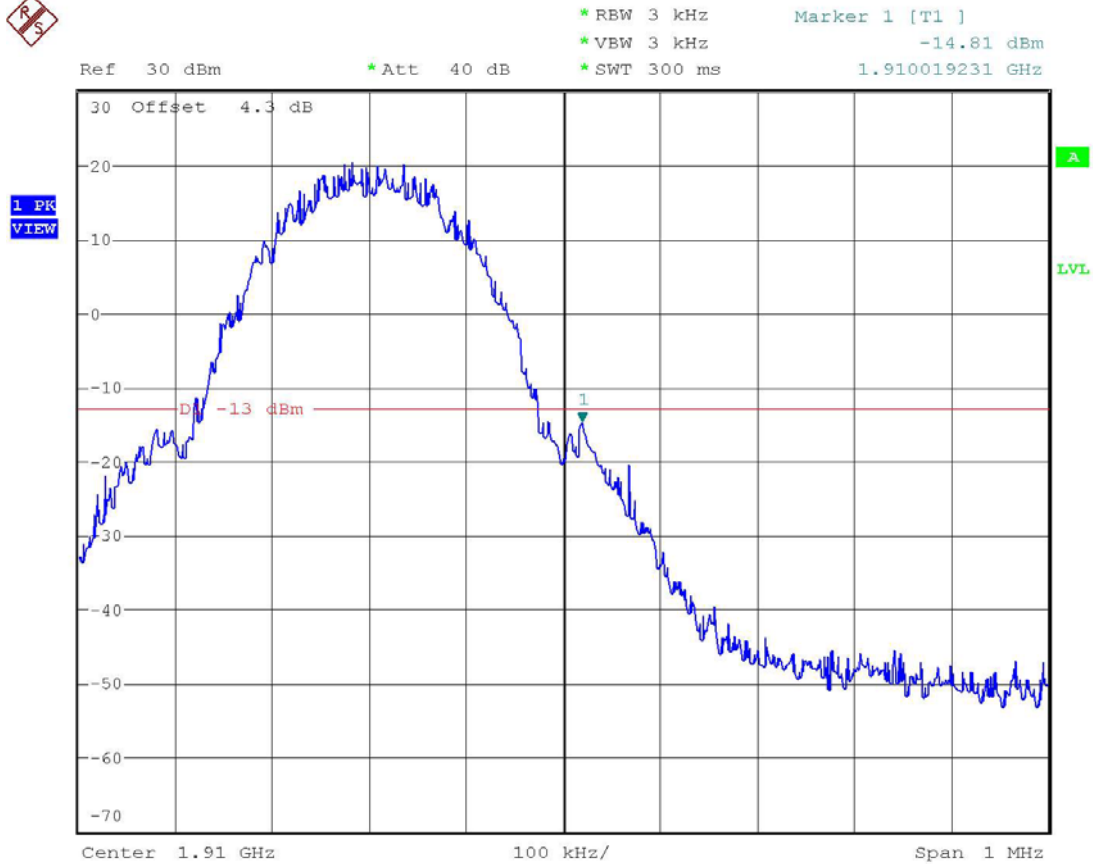

Power: HIGH
Modulation: GSM 1900
UPPER BAND EDGE

Hendry Yang

Performed By: Hendry Yang

SPORTON International Inc.
TEL : 886-2-2696-2468
FAX : 886-2-2696-2255

FCC ID CKRTG9D
Page No. 25 of 49
Issued Date Apr.15, 2004

Name of Test: Field Strength of Spurious Radiation

Specification: 47 CFR 2.1053(a)

Guide: ANSI/TIA/EIA-603-1992/2001, Paragraph 1.2.12 and Table 16

Measurement Procedure

1.2.12.1 Definition: Radiated spurious emissions are emissions from the equipment when transmitting into a non-radiating load on a frequency or frequencies which are outside an occupied band sufficient to ensure transmission of information of required quality for the class of communications desired.


1.2.12.2 Method of Measurement

A) Connect the equipment as illustrated

B) Adjust the spectrum analyzer for the following settings:


- 1) Resolution Bandwidth 100 kHz (<1 GHz), 1 MHz (> 1GHz).
- 2) Video Bandwidth ≥ 3 times Resolution Bandwidth
- 3) Sweep Speed ≤ 2000 Hz/second
- 4) Detector Mode = Mean or Average Power

C) Place the transmitter to be tested on the turntable in the standard test site. If the antenna is detachable, The transmitter is transmitting into a non-radiating load which is placed on the turntable. The RF cable to this load should be of minimum length.

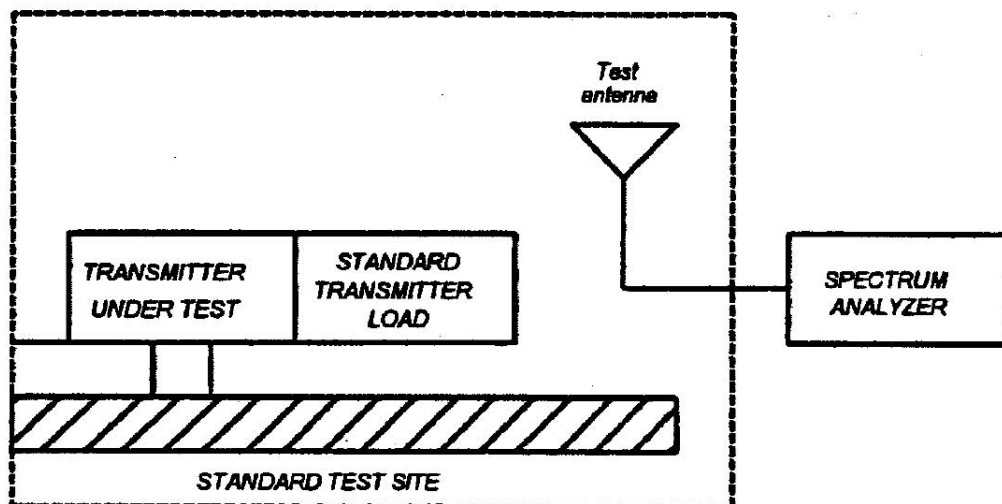

Name of Test: Field Strength of Spurious Radiation (Cont.)

- D) For each spurious measurement the test antenna should cover the measured frequency. Measurements shall be made from the lowest radio frequency generated in the equipment to the tenth harmonic of the carrier, except for the region close to the carrier equal to \pm the test bandwidth (see section 1.3.4.4).
- E) For each spurious frequency, raise and lower the test antenna from 1 m to 4 m to obtain a maximum reading on the spectrum analyzer with the test antenna at horizontal polarity. Repeat this procedure to obtain the highest possible reading. Record this maximum reading.
- F) Repeat step E) for each spurious frequency with the test antenna polarized vertically.

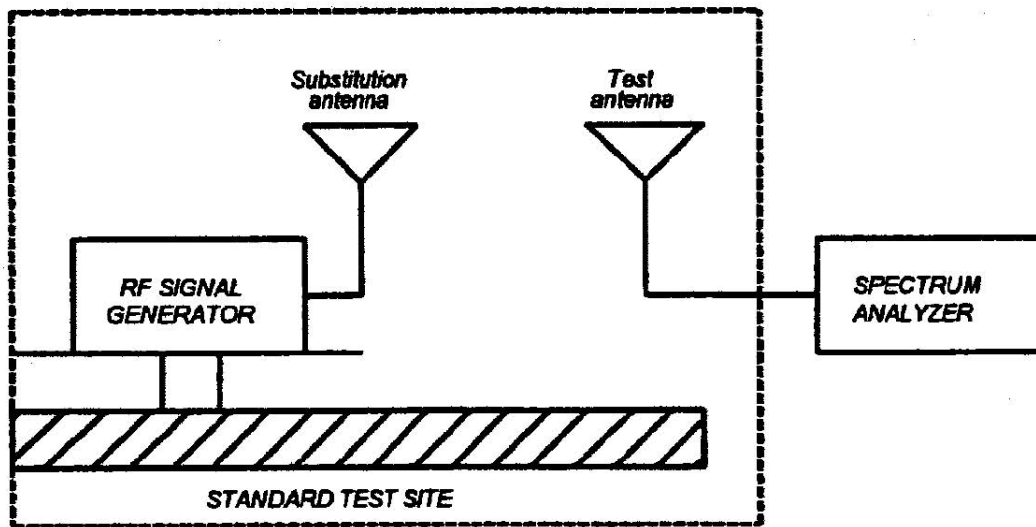

- G) Reconnect the equipment as illustrated.
- H) Keep the spectrum analyzer adjusted as in step B).
- I) Remove the transmitter and replace it with a substitution antenna. The center of the substitution antenna should be approximately at the same location as the center of the transmitter. At lower frequencies, where the substitution antenna is very long, this will be impossible to achieve when the antenna is polarized vertically. In such case the lower end of the antenna should be 0.3 m above the ground.

Name of Test: Field Strength of Spurious Radiation (Cont.)

- J) Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a non-radiating cable. With the antennas at both ends horizontally polarized and with the signal generator tuned to a particular spurious frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output.
- K) Repeat step J) with both antennas vertically polarized for each spurious frequency.
- L) Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps J) and K) by the power loss in the cable between the generator and the antenna and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna.

NOTE: It is permissible that other antennas provided can be referenced to a dipole.

FCC TEST REPORT

Report No. : F440211

Name of Test: Field Strength of Spurious Radiation

GSM 1900

Freq MHz	Pol	Substitution Antenna Input Power dBm	Substitution Antenna Gain dBi	Et	Es	Et - Es dB	EIRP, dBm	Limit (dBm)	Margin (dB)
179.43	H	-1.09	1.72	18.26	90.30	-72.04	-71.42	-13.0	-58.42
912.00	H	-2.67	0.93	26.45	92.93	-66.48	-68.22	-13.0	-55.22
1450.00	H	-3.36	6.29	50.50	101.92	-51.42	-48.49	-13.0	-35.49
1873.00	H	-3.78	6.65	52.45	101.65	-49.20	-46.33	-13.0	-33.33
3757.00	H	-5.25	7.45	73.51	99.07	-25.56	-23.36	-13.0	-10.36
5638.00	H	-6.67	8.44	62.97	98.79	-35.82	-34.05	-13.0	-21.05
7513.00	H	-8.44	8.51	63.23	94.66	-31.43	-31.36	-13.0	-18.36
9397.00	H	-9.78	8.94	68.05	95.76	-27.71	-28.55	-13.0	-15.55
11278.00	H	-11.60	9.71	52.12	94.43	-42.31	-44.19	-13.0	-31.19
193.54	V	-1.24	1.33	17.93	90.46	-72.53	-72.44	-13.0	-59.44
957.60	V	-2.58	0.67	27.48	93.29	-65.81	-67.72	-13.0	-54.72
1450.00	V	-3.36	6.29	55.28	101.92	-46.64	-43.71	-13.0	-30.71
1873.00	V	-3.78	6.65	60.58	101.65	-41.07	-38.20	-13.0	-25.20
3757.00	V	-5.25	7.45	77.46	99.07	-21.61	-19.41	-13.0	-6.41
5641.00	V	-6.68	8.44	65.46	98.79	-33.33	-31.56	-13.0	-18.56
7513.00	V	-8.44	8.51	62.71	94.66	-31.95	-31.88	-13.0	-18.88
9397.00	V	-9.78	8.94	67.69	95.76	-28.07	-28.91	-13.0	-15.91
11278.00	V	-11.60	9.71	55.92	94.43	-38.51	-40.39	-13.0	-27.39

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

FCC ID CKRTG9D

Page No. 29 of 49


Issued Date Apr.15, 2004

FCC TEST REPORT

Report No. : F440211

Radiated Scanned Data

GSM1900, Vertical Polarization

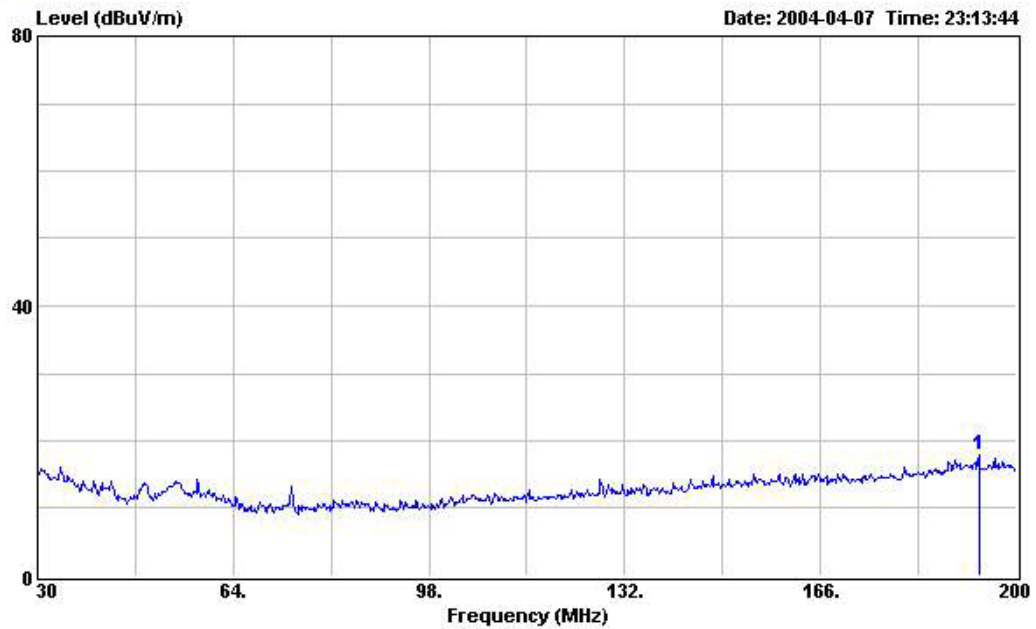

Site : 03CH03-HY
Condition : 3m BIC-9124--301 VERTICAL
EUT : GSM/GPRS Dual Bad Handset
Model : TG9D
Power : 110Vac/60Hz
Memo : PCS CH661 Link Mode

Freq	Level	Over	Limit	Read	Probe	Cable	Preamp	Remark	Ant	Table
		Limit	Line						Pos	Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1 193.540	17.93	-----	-----	28.49	14.65	2.50	27.71	Peak	---	---

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255


FCC ID CKRTG9D

Page No. 30 of 49

Issued Date Apr.15, 2004

FCC TEST REPORT

Report No. : F440211

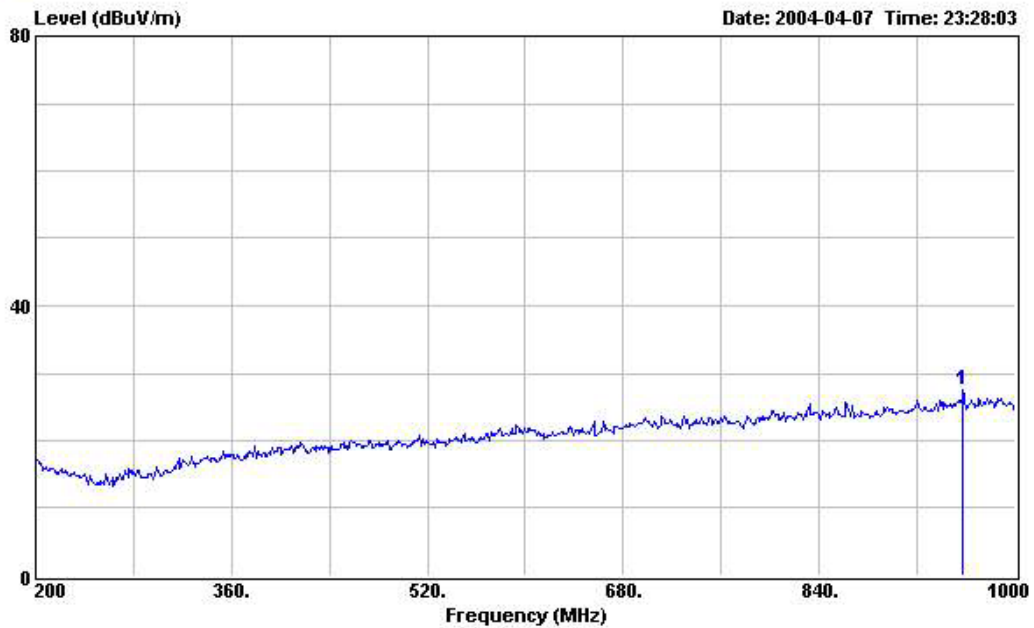


Site : 03CH03-HY
 Condition : 3m LOG-9111-221 VERTICAL
 EUT : GSM/GPRS Dual Bad Handset
 Model : TG9D
 Power : 110Vac/60Hz
 Memo : PCS CH661 Link Mode

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	957.600	27.48	-----	-----	28.17	21.90	5.65	28.24	Peak	---	---

FCC TEST REPORT

Report No. : F440211

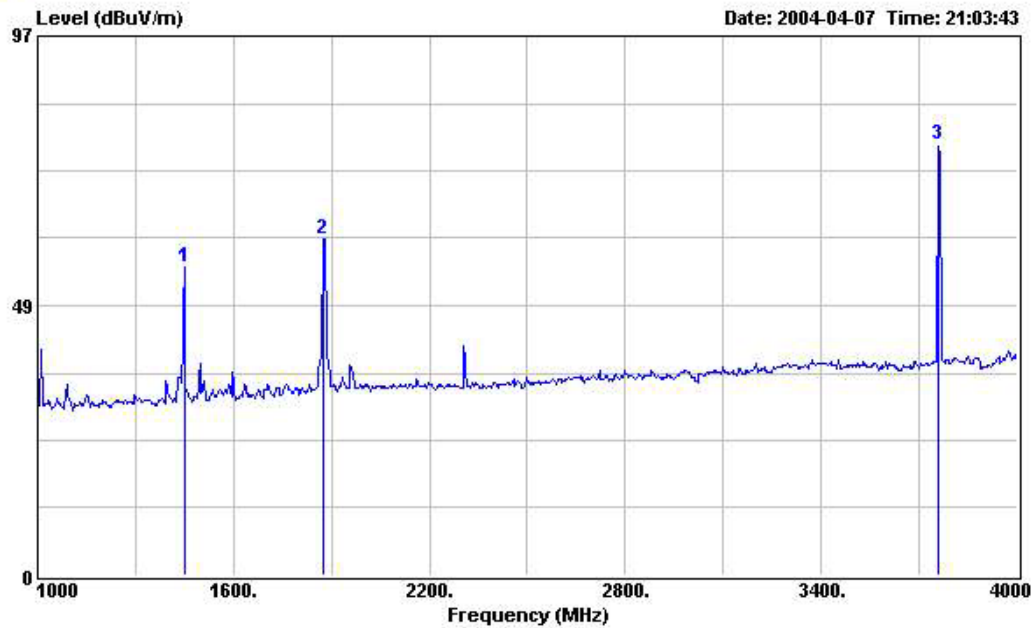

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 VERTICAL
 EUT : GSM/GPRS Dual Bad Handset
 Model : TG9D
 Power : 110Vac/60Hz
 Memo : PCS CH661 Link Mode

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m			dBuV	dB	dB	dB		cm	deg
1	1450.000	55.28	-----	-----	69.17	25.21	1.46	40.56	Peak	---	---
2	1873.000	60.58	-----	-----	72.91	26.90	1.60	40.83	Peak	---	---
3	3757.000	77.46	-----	-----	85.11	31.95	1.81	41.41	Peak	100	287

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255


FCC ID CKRTG9D

Page No. 32 of 49

Issued Date Apr.15, 2004

FCC TEST REPORT

Report No. : F440211

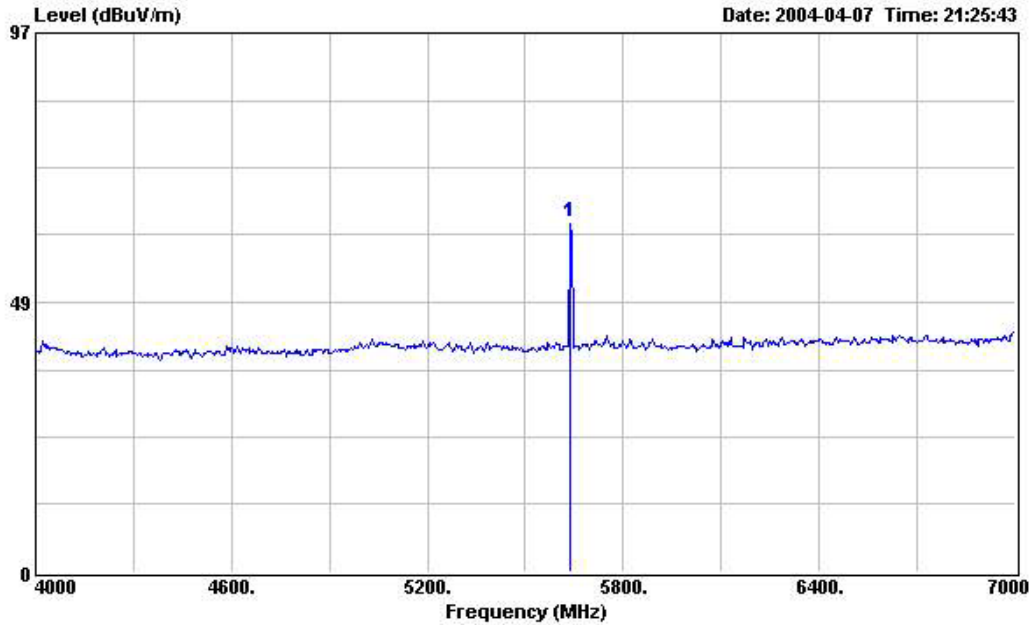

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 HORIZONTAL
 EUT : GSM/GPRS Dual Band Handset
 Model : TG9D
 Power : 110Vac/60Hz
 Memo : PCS CH661 Link Mode

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	5638.000	62.97	-----	-----	69.54	34.06	2.53	43.16	Peak	127	244

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255


FCC ID CKRTG9D

Page No. 33 of 49

Issued Date Apr.15, 2004

FCC TEST REPORT

Report No. : F440211

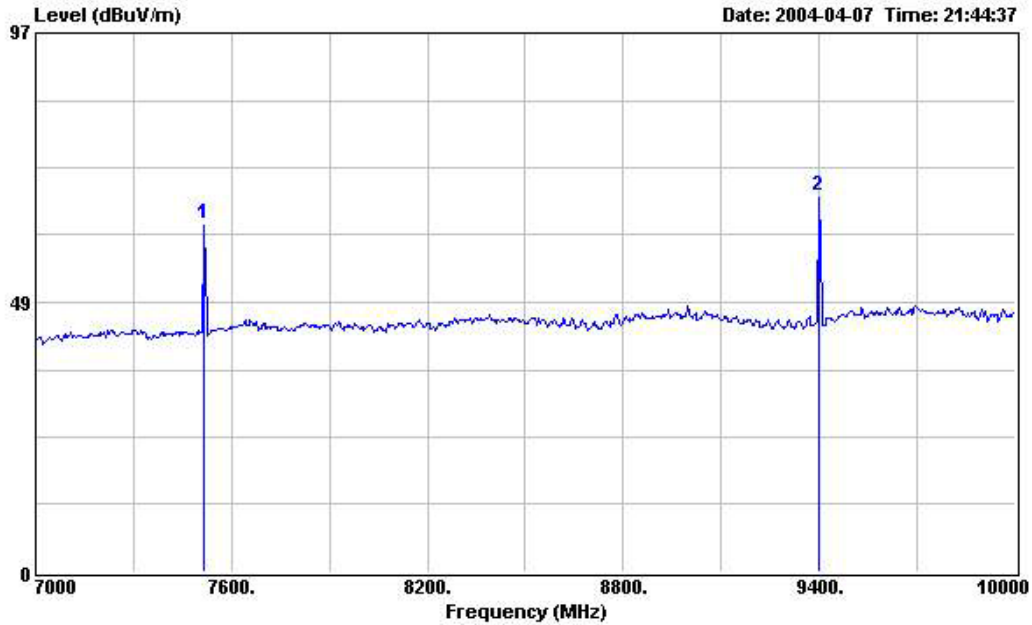

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 VERTICAL
 EUT : GSM/GPRS Dual Bad Handset
 Model : TG9D
 Power : 110Vac/60Hz
 Memo : PCS CH661 Link Mode

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	7513.000	62.71	-----	-----	65.87	36.52	2.70	42.38	Peak	184	250
2	9397.000	67.69	-----	-----	66.18	37.94	3.74	40.17	Peak	100	250

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255


FCC ID CKRTG9D

Page No. 34 of 49

Issued Date Apr.15, 2004

FCC TEST REPORT

Report No. : F440211

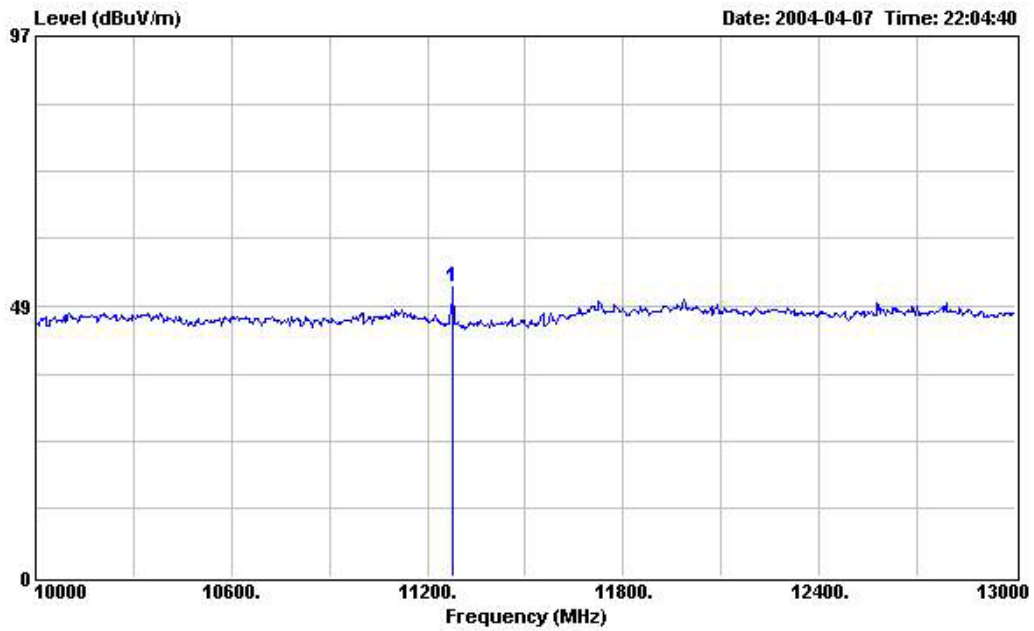

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 HORIZONTAL
 EUT : GSM/GPRS Dual Band Handset
 Model : TG9D
 Power : 110Vac/60Hz
 Memo : PCS CH661 Link Mode

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m		dB	dBuV	dB	dB	dB		cm	deg
1	11278.000	52.12	-----	-----	48.69	38.94	4.43	39.94	Peak	113	132

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

FCC ID CKRTG9D


Page No. 35 of 49

Issued Date Apr.15, 2004

FCC TEST REPORT

Report No. : F440211

GSM1900, Horizontal Polarization

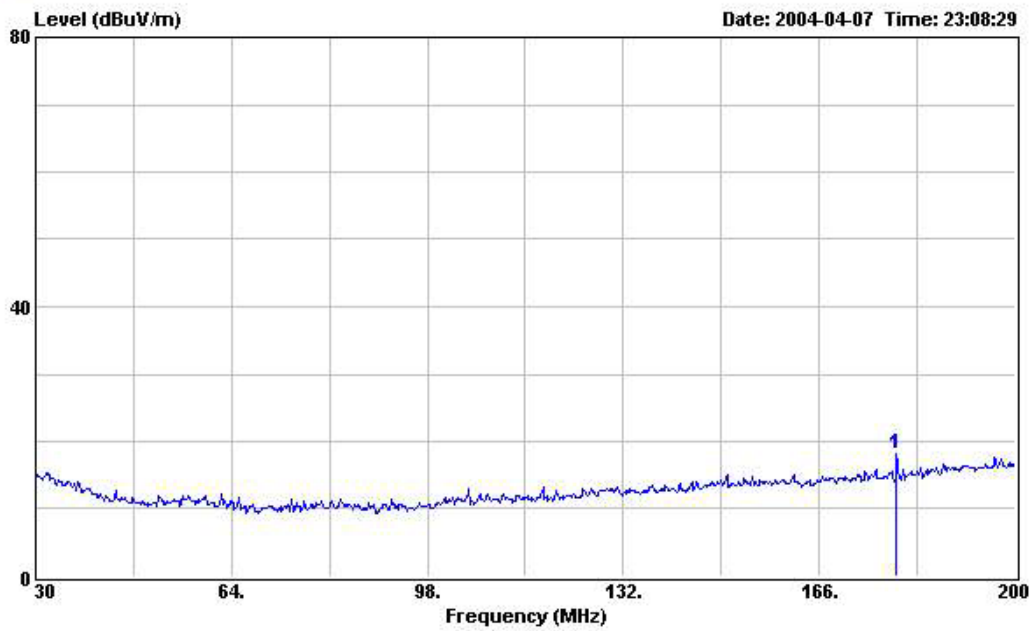

Site : 03CH03-HY
 Condition : 3m BIC-9124--301 HORIZONTAL
 EUT : GSM/GPRS Dual Band Handset
 Model : TG9D
 Power : 110Vac/60Hz
 Memo : PCS CH661 Link Mode


	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	179.430	18.26	-----	-----	30.03	13.54	2.43	27.74	Peak	---	---

SPORTON International Inc.
 TEL : 886-2-2696-2468
 FAX : 886-2-2696-2255

FCC ID : CKRTG9D
 Page No. : 36 of 49
 Issued Date : Apr.15, 2004

FCC TEST REPORT

Report No. : F440211

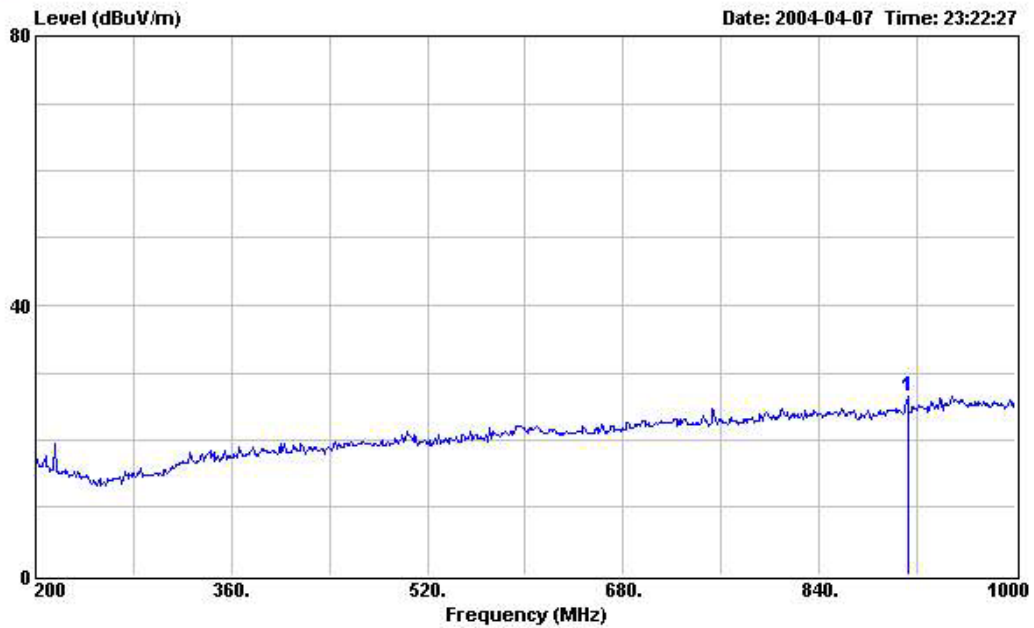


Site : 03CH03-HY
 Condition : 3m LOG-9111-221 HORIZONTAL
 EUT : GSM/GPRS Dual Band Handset
 Model : TG9D
 Power : 110Vac/60Hz
 Memo : PCS CH661 Link Mode

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	912.000	26.45	-----	-----	28.10	21.26	5.38	28.29	Peak	---	---

FCC TEST REPORT

Report No. : F440211

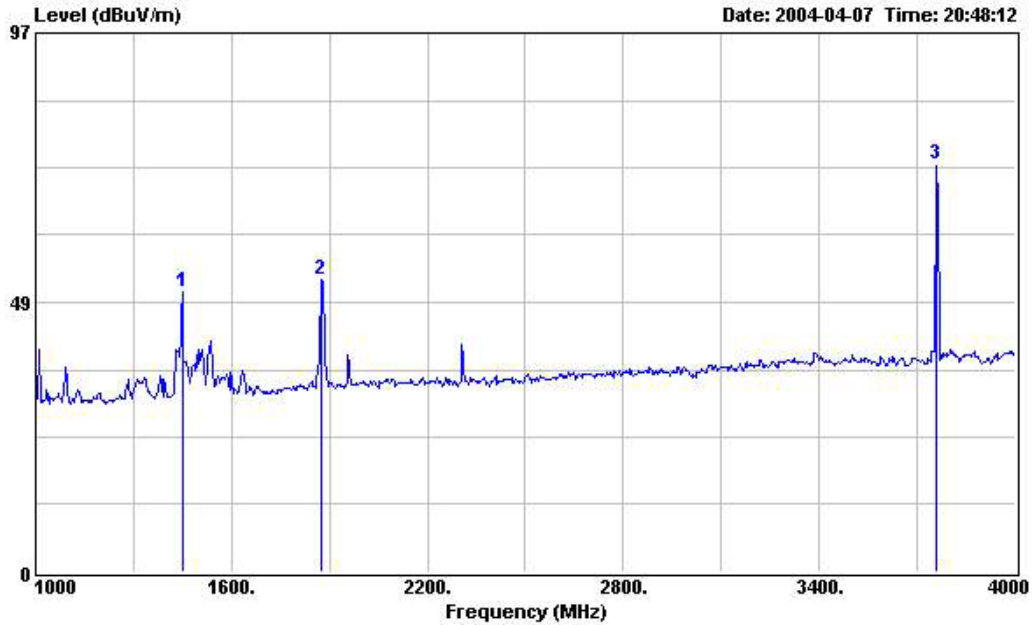

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 HORIZONTAL
 EUT : GSM/GPRS Dual Band Handset
 Model : TG9D
 Power : 110Vac/60Hz
 Memo : PCS CH661 Link Mode

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1450.000	50.50	-----	-----	64.39	25.21	1.46	40.56	Peak	---	---
2	1873.000	52.45	-----	-----	64.78	26.90	1.60	40.83	Peak	---	---
3	3757.000	73.51	-----	-----	81.16	31.95	1.81	41.41	Peak	108	290

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255


FCC ID CKRTG9D

Page No. 38 of 49

Issued Date Apr.15, 2004

FCC TEST REPORT

Report No. : F440211

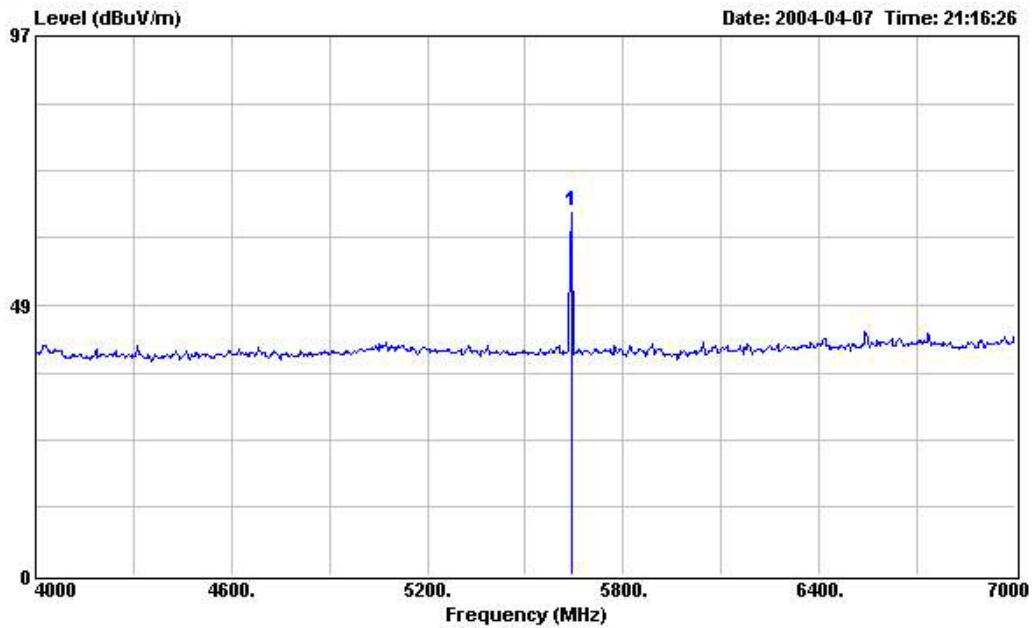

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 VERTICAL
 EUT : GSM/GPRS Dual Bad Handset
 Model : TG9D
 Power : 110Vac/60Hz
 Memo : PCS CH661 Link Mode

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	5641.000	65.46	-----	-----	72.03	34.06	2.53	43.16	Peak	138	41

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255


FCC ID CKRTG9D

Page No. 39 of 49

Issued Date Apr.15, 2004

FCC TEST REPORT

Report No. : F440211

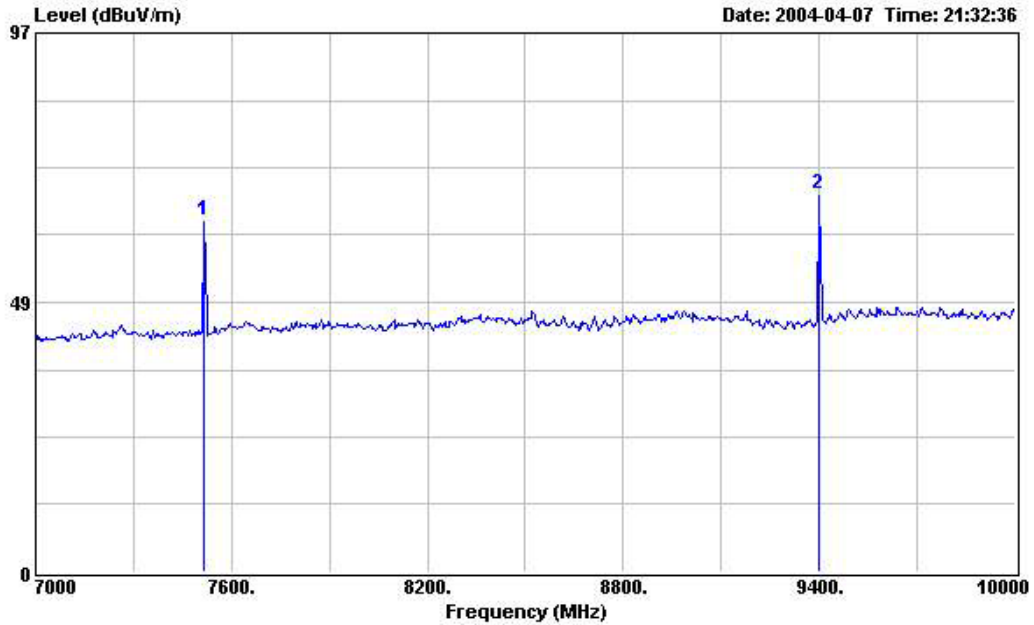

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 HORIZONTAL
 EUT : GSM/GPRS Dual Bad Handset
 Model : TG9D
 Power : 110Vac/60Hz
 Memo : PCS CH661 Link Mode

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	7513.000	63.23	-----	-----	66.39	36.52	2.70	42.38	Peak	100	5
2	9397.000	68.05	-----	-----	66.54	37.94	3.74	40.17	Peak	140	302

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255


FCC ID CKRTG9D

Page No. 40 of 49

Issued Date Apr.15, 2004

FCC TEST REPORT

Report No. : F440211

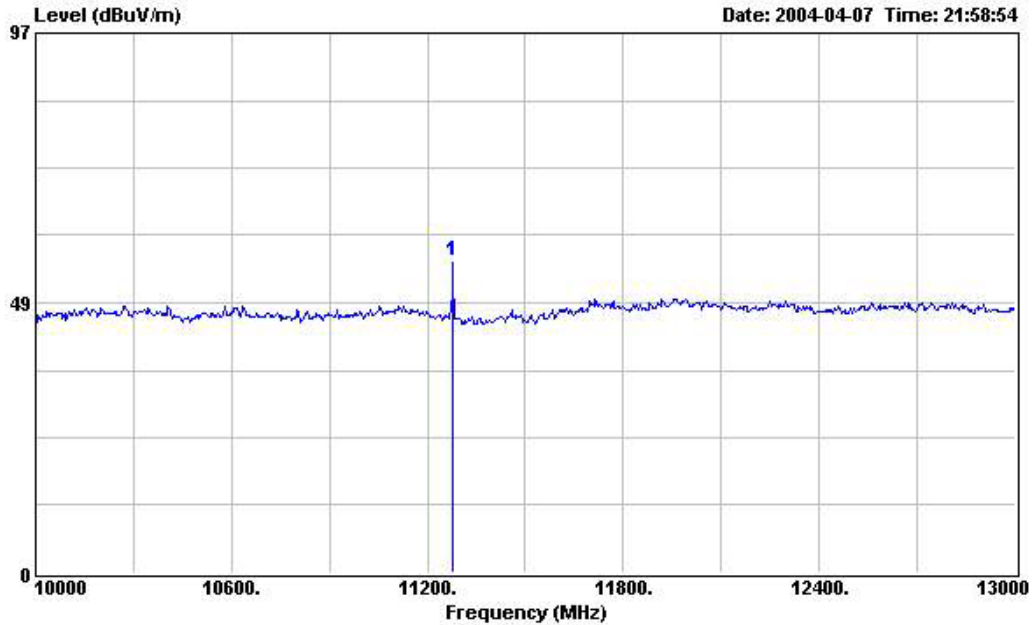

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 VERTICAL
 EUT : GSM/GPRS Dual Bad Handset
 Model : TG9D
 Power : 110Vac/60Hz
 Memo : PCS CH661 Link Mode

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m		dB	dBuV/m	dB	dB	dB		cm	deg
1	11278.000	55.92	-----	-----	52.49	38.94	4.43	39.94	Peak	104	129

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

FCC ID CKRTG9D

Page No. 41 of 49

Issued Date Apr.15, 2004

Name of Test: Frequency Stability (Temperature Variation)

Specification: 47 CFR 2.1055(a)(1)

Test Conditions: As Indicated


Test Equipment: As per previous page

Measurement Procedure

1. The EUT and test equipment were set up as shown on the following page.
2. With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
3. With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
4. The temperature tests were performed for the worst case.
5. Measurement Results: Attached

Transmitter Test Set-Up

Frequency Stability: Temperature Variation
Frequency Stability: Voltage Variation

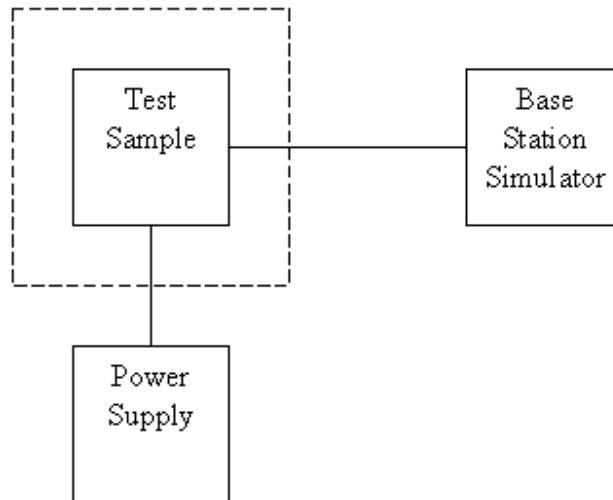

Asset	Model Name	S/N
Temperature & Humidity Controller	P-9000	612
AC/DC Power Source	HPA-500W	HPA0100024
Base Station Simulator	CMU200	102278

FCC TEST REPORTReport No. : F440211

Name of Test: Frequency Stability (Temperature Variation)

GSM 1900

Temperature(°C)	Change, Hz	Change, ppm
-30	47	0.02
-20	66	0.03
-10	76	0.04
0	58	0.03
10	65	0.03
20	-36	-0.02
30	-24	-0.01
40	40	0.02
50	49	0.03

FCC TEST REPORT

Report No. : F440211

Name of Test: Frequency Stability (Voltage Variation)

Specification: 47 CFR 2.1055 (b)(1)

Test Equipment: As per previous page

Measurement Procedure


1. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected as for "Frequency Stability - Temperature Variation" test.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

Results: Frequency Stability (Voltage Variation)

Nominal Value (Voltage) = 3.8 for channel 661

Voltage(Volt)	Change, Hz	Change, ppm
3.8	47	0.02
3.23	47	0.02
4.37	38	0.02

Limit: Must remain within authorized frequency block.

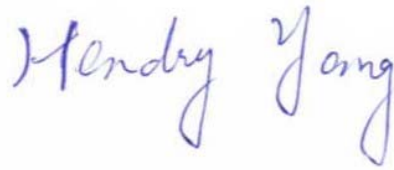

Performed By:

Hendry Yang

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

FCC ID

CKRTG9D

Page No.

45 of 49

Issued Date

Apr.15, 2004

FCC TEST REPORT

Report No. : F440211

Antenna Factor & Cable Loss

Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)	Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)
30	15.35	4.50	1000	24.10	3.92
35	13.63	1.13	2000	27.40	5.66
40	11.11	1.18	3000	30.00	7.20
45	10.59	1.26	4000	32.60	9.36
50	6.47	1.31	5000	33.40	9.16
55	5.83	1.34	6000	34.20	10.70
60	5.18	1.43	7000	35.30	12.16
65	4.81	1.52	8000	36.90	13.12
70	4.43	1.56	9000	38.10	13.81
75	5.10	1.57	10000	39.00	14.83
80	5.91	1.60	11000	38.60	15.83
85	7.33	1.66	12000	39.50	17.11
90	8.74	1.75	13000	39.30	17.62
95	9.05	1.76	14000	41.60	18.37
100	9.36	1.83	15000	40.60	19.10
110	9.65	1.86	16000	37.20	19.72
120	9.97	1.92	17000	40.20	21.98
130	10.51	2.00	18000	48.90	21.22
140	10.32	2.11	19000	37.60	23.90
150	9.42	2.18	20000	37.30	24.07
160	8.09	2.22	21000	37.00	25.49
170	7.43	2.26	22000	38.00	24.92
180	7.60	2.31	23000	38.70	25.60
190	7.43	2.37	24000	38.60	25.70
200	7.26	2.43	25000	24.10	3.92
220	9.11	2.56	14000	27.40	5.66
240	10.88	2.70	15000	30.00	7.20
260	11.75	2.83	16000	32.60	9.36
280	11.55	2.93	17000	33.40	9.16
300	11.36	3.03	18000	34.20	10.70
320	12.03	3.13	19000	35.30	12.16
340	12.69	3.23	20000	36.90	13.12
360	13.33	3.32	21000	38.10	13.81
380	14.00	3.41	22000	39.00	14.83
400	14.63	3.48	23000	38.60	15.83
450	15.33	3.71	24000	39.50	17.11
500	16.03	3.85	25000	39.30	17.62
550	16.65	4.03			
600	17.29	4.32			
650	17.64	4.51			
700	18.00	4.54			
750	18.39	4.90			
800	18.79	5.04			
850	19.10	5.04			
900	19.42	5.20			
950	19.58	5.28			
1000	19.75	5.58			

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

FCC ID CKRTG9D
Page No. 46 of 49
Issued Date Apr.15, 2004

List of Measuring Equipments

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz~1GHz 3m	Jun. 21, 2003	Radiation (03CH03-HY)
Spectrum analyzer	R&S	FSP40	100004	9KHZ~40GHz	Aug. 23, 2003	Radiation (03CH03-HY)
Amplifier	HP	8447D	2944A09072	100KHz – 1.3GHz	Nov. 05, 2003	Radiation (03CH03-HY)
Biconical Antenna	SCHWARZBECK	VHBB 9124	301	30MHz –200MHz	Jul. 24, 2003	Radiation (03CH03-HY)
Log Antenna	SCHWARZBECK	VUSLP 9111	221	200MHz -1GHz	Jul. 24, 2003	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz~1GHz	Dec. 03, 2003	Radiation (03CH03-HY)
Amplifier	MITEQ	AFS44	879981	100MHz~26.5GHz	Jul. 23, 2003	Radiation (03CH03-HY)
Horn Antenna	COM-POWER	3115	6741	1GHz – 18GHz	Apr. 08, 2003	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 ~ 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	154	15GHz~40GHz	Jun. 02, 2003	Radiation (03CH03-HY)
RF Cable-HIGH	Jye Bao	RG142	CB030-HIGH	1GHz~29.5GHz	Dec. 05, 2003	Radiation (03CH03-HY)

- ※ Calibration Interval of instruments listed above is one year, except for Horn Antenna, BBHA9170.
※ Calibration Interval of Horn Antenna, BBHA9170, is three years.

Uncertainty of Test Site

Uncertainty of Radiated Emission Measurement (30MHz ~ 1000MHz)

Contribution	Uncertainty of x_i		$u(x_i)$
	dB	Probability Distribution	
Receiver reading	0.41	Normal(k=2)	0.21
Antenna factor calibration	0.83	Normal(k=2)	0.42
Cable loss calibration	0.25	Normal(k=2)	0.13
Pre Amplifier Gain calibration	0.27	Normal(k=2)	0.14
RCV/SPA specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site imperfection	1.43	Rectangular	0.83
Mismatch Receiver VSWR $\Gamma_1 = 0.20$ Antenna VSWR $\Gamma_2 = 0.23$ Uncertainty = $20\log(1 - \Gamma_1 \Gamma_2)$	+0.39/-0.41	U-shaped	0.28
combined standard uncertainty Uc(y)	1.27		
Measuring uncertainty for a level of confidence of 95% U=2Uc(y)	2.54		

Uncertainty of Radiated Emission Measurement (1GHz ~ 40GHz)

Contribution	Uncertainty of x_i		$u(x_i)$	C_i	$C_i * u(x_i)$
	dB	Probability Distribution			
Receiver reading	± 0.10	Normal(k=1)	0.10	1	0.10
Antenna factor calibration	± 1.70	Normal(k=2)	0.85	1	0.85
Cable loss calibration	± 0.50	Normal(k=2)	0.25	1	0.25
Receiver Correction	± 2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	± 1.50	Rectangular	0.87	1	0.87
Site imperfection	± 2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20\log(1 - \Gamma_1 \Gamma_2 \Gamma_3)$	+0.34/-0.35	U-shaped	0.244	1	0.244
Combined standard uncertainty Uc(y)	2.36				
Measuring uncertainty for a level of confidence of 95% U=2Ue(y)	4.72				

$$U = \sqrt{\{(1/2)^2 + (0.3/2)^2 + (2^2 + 0.5^2 + 2^2 + 0.25^2 + 2^2)/3 + (0.54)^2/2\}} = 2.2 \text{ for 10m test distance}$$

$$U = \sqrt{\{(1/2)^2 + (0.3/2)^2 + (2^2 + 3^2 + 2^2 + 0.25^2 + 2^2)/3 + (0.54)^2/2\}} = 2.7 \text{ for 3m test distance}$$

END OF TEST REPORT

**Testimonial
and
Statement of Certification**

This is to certify that:

1. **That** the application was prepared either by, or under the direct supervision of, the undersigned.
2. **That** the technical data supplied with the application was taken under my direction and supervision.
3. **That** the data was obtained on representative units, randomly selected.
4. **That**, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct.

Certified by:



Daniel Lee