

CANADA TEST REPORT

REPORT NO.: IC131022E03F

MODEL NO.: WD105

IC: 5005A-WD105

RECEIVED: Mar. 03, 2014

TESTED: Mar. 07 to 18, 2014

ISSUED: May 29, 2014

APPLICANT: CyberTAN Technology, Inc.

ADDRESS: No.99, Park Avenue III, Science-based Industrial Park,
Hsinchu, Taiwan 308,R.O.C.

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch Hsin Chu Laboratory

LAB ADDRESS : No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

TEST LOCATION (1): No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

TEST LOCATION (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

This report should not be used by the client to claim
product certification, approval, or endorsement by TAF
or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification



A D T

Table of Contents

RELEASE CONTROL RECORD	4
1. CERTIFICATION	5
2. SUMMARY OF TEST RESULTS	6
2.1 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	10
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	11
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	14
3.4 DUTY CYCLE OF TEST SIGNAL	15
3.5 DESCRIPTION OF SUPPORT UNITS	16
3.6 CONFIGURATION OF SYSTEM UNDER TEST	16
4. TEST TYPES AND RESULTS	17
4.1 CONDUCTED EMISSION MEASUREMENT	17
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	17
4.1.2 TEST INSTRUMENTS	17
4.1.3 TEST PROCEDURES	18
4.1.4 DEVIATION FROM TEST STANDARD	18
4.1.5 TEST SETUP	18
4.1.6 EUT OPERATING CONDITIONS	19
4.1.7 TEST RESULTS	20
4.2 UNWANTED EMISSION MEASUREMENT (RADIATED VERSUS CONDUCTED)	22
4.2.1 LIMITS OF UNWANTED EMISSION MEASUREMENT	22
4.2.2 TEST INSTRUMENTS	23
4.2.3 TEST PROCEDURES	24
4.2.4 DEVIATION FROM TEST STANDARD	25
4.2.5 TEST SETUP	26
4.2.6 EUT OPERATING CONDITIONS	27
4.2.7 TEST RESULTS (RADIATED MEASUREMENT)	27
4.2.8 TEST RESULTS (CONDUCTED MEASUREMENT)	41
4.3 6dB BANDWIDTH MEASUREMENT	55
4.3.1 LIMITS OF 6DB BANDWIDTH MEASUREMENT	55
4.3.2 TEST INSTRUMENTS	55
4.3.3 TEST PROCEDURE	55
4.3.4 DEVIATION FROM TEST STANDARD	55
4.3.5 TEST SETUP	56
4.3.6 EUT OPERATING CONDITIONS	56
4.3.7 TEST RESULTS	57
4.4 OCCUPIED BANDWIDTH MEASUREMENT	59
4.4.1 TEST INSTRUMENTS	59
4.4.2 TEST PROCEDURE	59
4.4.3 DEVIATION FROM TEST STANDARD	59
4.4.4 TEST SETUP	59
4.4.5 EUT OPERATING CONDITIONS	59
4.4.6 TEST RESULTS	60
4.5 CONDUCTED OUTPUT POWER MEASUREMENT	62
4.5.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	62
4.5.2 INSTRUMENTS	62
4.5.3 TEST PROCEDURES	62
4.5.4 DEVIATION FROM TEST STANDARD	62
4.5.5 TEST SETUP	62



A D T

4.5.6	EUT OPERATING CONDITIONS	62
4.5.7	TEST RESULTS	63
4.6	AVERAGE OUTPUT POWER.....	64
4.6.1	FOR REFERENCE	64
4.6.2	TEST INSTRUMENTS.....	64
4.6.3	TEST PROCEDURES	64
4.6.4	TEST SETUP	64
4.6.5	EUT OPERATING CONDITIONS	64
4.6.6	TEST RESULTS	65
4.7	POWER SPECTRAL DENSITY MEASUREMENT.....	66
4.7.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	66
4.7.2	TEST INSTRUMENTS.....	66
4.7.3	TEST PROCEDURE.....	66
4.7.4	DEVIATION FROM TEST STANDARD	66
4.7.5	TEST SETUP	66
4.7.6	EUT OPERATING CONDITION.....	66
4.7.7	TEST RESULTS	67
4.8	CONDUCTED OUT-BAND EMISSION MEASUREMENT	69
4.8.1	LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT.....	69
4.8.2	TEST INSTRUMENTS.....	69
4.8.3	TEST PROCEDURE.....	69
4.8.4	DEVIATION FROM TEST STANDARD	70
4.8.5	TEST SETUP	70
4.8.6	EUT OPERATING CONDITION.....	70
4.8.7	TEST RESULTS	70
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	75
6.	INFORMATION ON THE TESTING LABORATORIES	76
7.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	77



RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
IC131022E03F	Original release	May 29, 2014



A D T

1. CERTIFICATION

PRODUCT: 1x1 802.11b/g/n module
BRAND NAME: CyberTAN
MODEL NO.: WD105
TEST SAMPLE: ENGINEERING SAMPLE
APPLICANT: CyberTAN Technology, Inc.
TESTED: Mar. 07 to 18, 2014
STANDARDS: **Canada RSS-210 Issue 8 (2010-12)**
Canada RSS-Gen Issue 3 (2010-12)
ANSI C63.10-2009

The above equipment (Model: WD105) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Midoli Peng , **DATE:** May 29, 2014
(Midoli Peng, Specialist)

APPROVED BY : May Chen , **DATE:** May 29, 2014
(May Chen, Manager)

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

STANDARD SECTION	TEST TYPE	RESULT	REMARK
RSS-Gen 7.2.4	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -26.89dB at 2.52728MHz
RSS-Gen 4.6	Occupied Bandwidth Measurement	-	Meet the requirement
RSS-210 A8.5	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -3.3dB at 160.80MHz
RSS-210 A8.5	Band Edge Measurement	PASS	Meet the requirement of limit.
RSS-210 A8.2 (a)	6dB bandwidth	PASS	Meet the requirement of limit.
RSS-210 A8.2 (4)	Maximum Peak Output Power	PASS	Meet the requirement of limit.
RSS-210 A8.2 (b)	Power Spectral Density	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions	2.86 dB
Radiated emissions (30MHz-1GHz)	5.37 dB
Radiated emissions (1GHz -6GHz)	3.65 dB
Radiated emissions (6GHz -18GHz)	3.88 dB
Radiated emissions (18GHz -40GHz)	4.11 dB

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	1x1 802.11b/g/n module
MODEL NO.	WD105
POWER SUPPLY	DC 3.3V from host equipment
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS,OFDM
TRANSFER RATE	802.11b: up to 11Mbps 802.11g: up to 54Mbps 802.11n: up to 150Mbps
OPERATING FREQUENCY	2.412 ~ 2.462GHz
NUMBER OF CHANNEL	11 for 802.11b, 802.11g, 802.11n (HT20) 7 for 802.11n (HT40)
MAXIMUM OUTPUT POWER	802.11b: 178.238mW 802.11g: 439.542mW 802.11n (HT20): 433.511mW 802.11n (HT40): 155.239mW
ANTENNA TYPE	Please see NOTE
DATA CABLE	NA
I/O PORTS	Refer to user's manual
ASSOCIATED DEVICES	NA

NOTE:

- The antennas provided to the EUT, please refer to the following table:

Ant. No.	Brand	Model	Ant. Gain (include cable lose) (dBi)	Frequency range (MHz to MHz)	Ant. Type	Connector Type	Cable Loss (dBi)	Cable Length (mm)
1	QCA	NA	1	2400~2483.5	PCB	NA	NA	NA
2	WNC	81.EBJ15.005	3.62	2400~2483.5	PIFA	IPEX	1.15	300

The EUT incorporates a SISO function.

MODULATION MODE	TX/RX FUNCTION
802.11b	1TX/1RX
802.11g	1TX/1RX
802.11n (HT20)	1TX/1RX
802.11n (HT40)	1TX/1RX

2. When the EUT operating in 802.11n, the software operation, which is defined by manufacturer, MCS (Modulation and Coding Schemes) from 0 to 7.
3. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

11 channels are provided for 802.11b, 802.11g, 802.11n (HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO					DESCRIPTION
	PLC	UE < 1G	UE ≥ 1G	APCM	OB	
-	√	√	√	√	√	-

Where **PLC**: Power Line Conducted Emission **UE < 1G**: Unwanted Emission below 1GHz
UE ≥ 1G: Unwanted Emission above 1GHz **APCM**: Antenna Port Conducted Measurement
OB: Conducted Out-Band Emission Measurement

POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	6	OFDM	BPSK	6

UNWANTED EMISSION TEST (BELOW 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	6	OFDM	BPSK	6

UNWANTED EMISSION TEST (ABOVE 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

CONDUCTED OUT-BAND EMISSION MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5



A D T

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (SYSTEM)	TESTED BY
PLC	23deg. C, 69%RH	120Vac, 60Hz	Gavin Peng
UE<1G	23deg. C, 65%RH	120Vac, 60Hz	Robert Cheng
UE≥1G	23deg. C, 65%RH	120Vac, 60Hz	Robert Cheng
APCM	25deg. C, 60%RH	120Vac, 60Hz	Chilin Lee
OB	25deg. C, 60%RH	120Vac, 60Hz	Chilin Lee

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Canada RSS-210 Issue 8 (2010-12)

Canada RSS-Gen Issue 3 (2010-12)

558074 D01 DTS Meas Guidance v03r01

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

3.4 DUTY CYCLE OF TEST SIGNAL


If duty cycle of test signal is $\geq 98\%$, duty factor is not required.

802.11b: Duty cycle = 12.188 ms/12.238 ms = 0.996

802.11g: Duty cycle = 5.36 ms/5.412 ms = 0.99

802.11n (HT20): Duty cycle = 4.965 ms/5.02 ms = 0.989

802.11n (HT40): Duty cycle = 2.399 ms/2.446 ms = 0.981

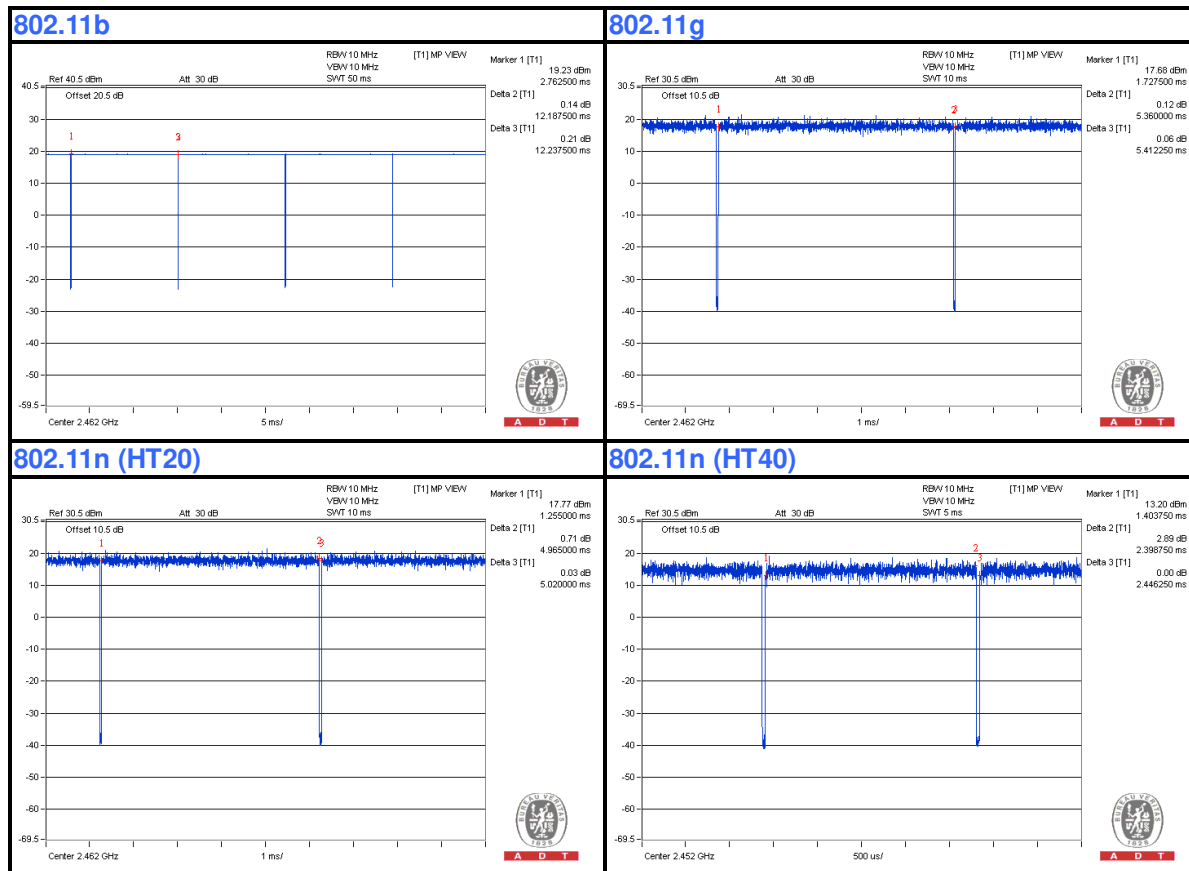

3.5 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP32LA	FSLB32S	FCC DoC
2	TEST TOOL	Qualcomm Atheros	NA	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	USB Cable, 1.3m
2	NA

NOTE: All power cords of the above support units are non shielded (1.8m).

3.6 CONFIGURATION OF SYSTEM UNDER TEST

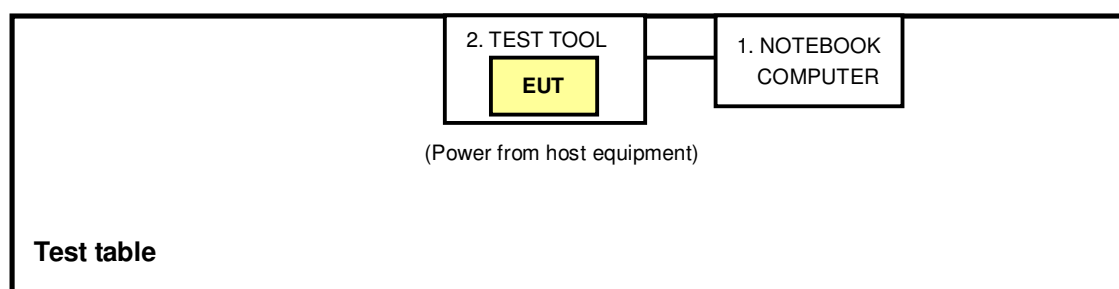

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver LIG NEX1	ER-265	L09068005	July 22, 2013	July 21, 2014
Pulse Limiter	VTSD 9561F	NA	NA	NA
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK8127	8127-522	Sep. 05, 2013	Sep. 04, 2014
Line-Impedance Stabilization Network (for Peripheral)	ENV216	100072	June 06, 2013	June 05, 2014
RF Cable (JYEBAO)	5DFB	COCCAB-001	Mar. 10, 2014	Mar. 09, 2015
50 ohms Terminator	50	EMC-03	Sep. 24, 2013	Sep. 23, 2014
Software ADT	BV ADT_Cond_V7.3.7. 3	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.
4. Tested Date: Mar. 18, 2014

4.1.3 TEST PROCEDURES

- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN.
- The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.


NOTE:

- The resolution bandwidth of test receiver is 9kHz for Quasi-peak detection (QP) & Average detection (AV).

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

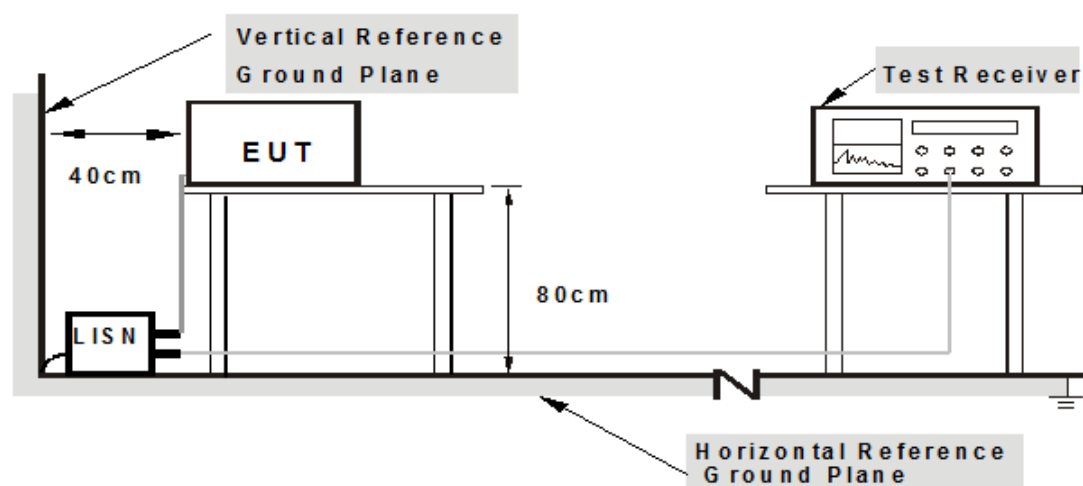

Note: 1. Support units were connected to second LISN.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

1. Connect the EUT with the support unit 1 (Notebook Computer) which is placed on a testing table.
2. The communication partner run test program “artgui.exe [ver2.3]” to enable EUT under transmission/receiving condition continuously at specific channel frequency.


4.1.7 TEST RESULTS

PHASE	Line (L)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor [dB]	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.21041	9.96	12.97	8.84	22.93	18.80	63.19	53.19	-40.26	-34.39
2	1.75310	10.02	11.54	4.89	21.56	14.91	56.00	46.00	-34.44	-31.09
3	2.52728	10.05	16.79	9.06	26.84	19.11	56.00	46.00	-29.16	-26.89
4	11.81353	10.34	13.43	5.82	23.77	16.16	60.00	50.00	-36.23	-33.84
5	20.63449	10.58	15.94	9.34	26.52	19.92	60.00	50.00	-33.48	-30.08
6	29.60403	10.87	12.30	6.30	23.17	17.17	60.00	50.00	-36.83	-32.83

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

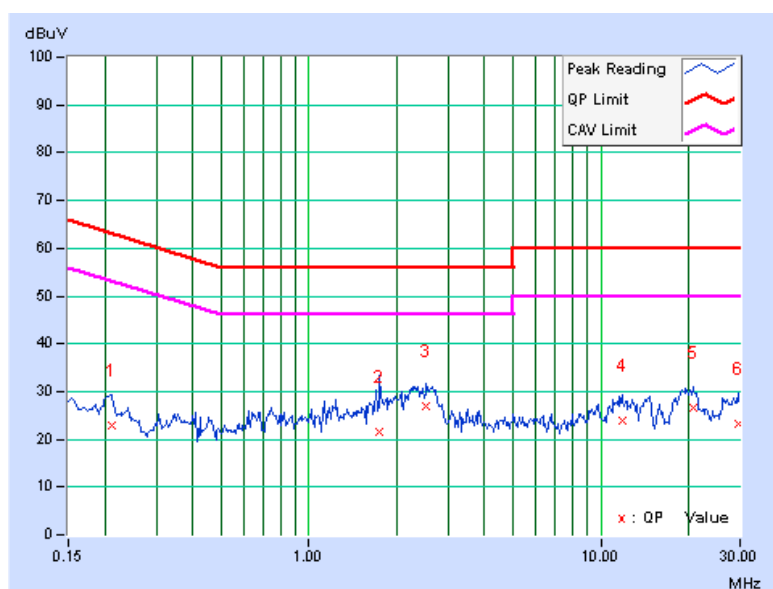


PHASE	Neutral (N)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.41197	9.98	10.73	3.52	20.71	13.50	57.61	47.61	-36.90	-34.11
2	1.74528	10.03	13.45	6.90	23.48	16.93	56.00	46.00	-32.52	-29.07
3	2.31614	10.05	17.44	6.73	27.49	16.78	56.00	46.00	-28.51	-29.22
4	2.60157	10.06	17.40	6.23	27.46	16.29	56.00	46.00	-28.54	-29.71
5	19.05876	10.53	15.62	8.66	26.15	19.19	60.00	50.00	-33.85	-30.81
6	26.19842	10.75	12.58	6.28	23.33	17.03	60.00	50.00	-36.67	-32.97

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

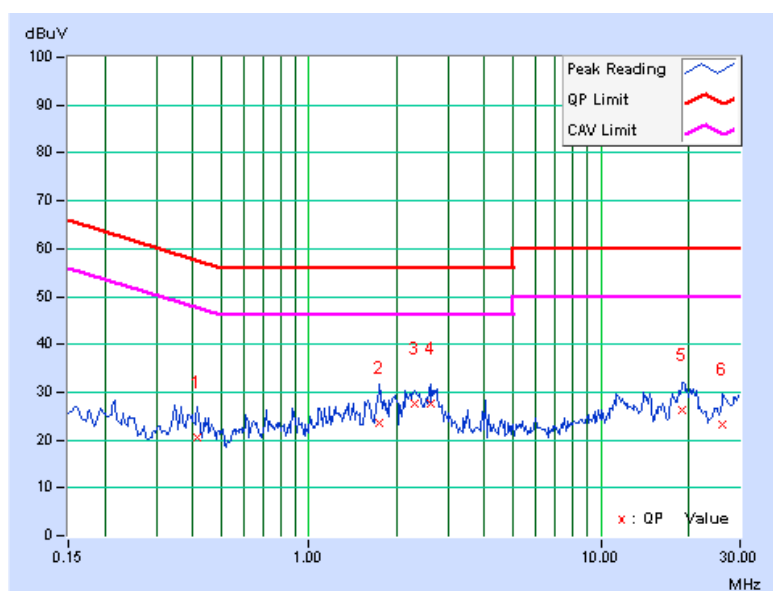

4.2 UNWANTED EMISSION MEASUREMENT (Radiated versus Conducted)

4.2.1 LIMITS OF UNWANTED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
MXE EMI Receiver Agilent	N9038A	MY51210105	Jan. 21, 2014	Jan. 20, 2015
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-03	Nov. 13, 2013	Nov. 12, 2014
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-360	Mar. 19, 2013	Mar. 18, 2014
RF Cable	NA	CHGCAB_001	Oct. 05, 2013	Oct. 04, 2014
Spectrum Analyzer R&S	FSV40	100964	July 15, 2013	July 14, 2014
Horn_Antenna AISI	AIH.8018	0000320091110	Nov. 18, 2013	Nov. 17, 2014
Pre-Amplifier Agilent	8449B	3008A02578	June 25, 2013	June 24, 2014
RF Cable	NA	RF104-201 RF104-203 RF104-204	Dec. 12, 2013	Dec. 11, 2014
Spectrum Analyzer Agilent	E4446A	MY48250253	Aug. 28, 2013	Aug. 27, 2014
Pre-Amplifier SPACEK LABS	SLKKa-48-6	9K16	Nov. 13, 2013	Nov. 12, 2014
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Oct. 08, 2013	Oct. 07, 2014
Software	ADT_Radiated _V8.7.07	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
- 3 The test was performed in 966 Chamber No. G.
4. The FCC Site Registration No. is 966073.
- 5 The VCCI Site Registration No. is G-137.
- 6 The CANADA Site Registration No. is IC 7450H-2.
- 7 Tested Date: Mar. 08, 2014

4.2.3 TEST PROCEDURES

Following FCC KDB 558074 D01 DTS Meas. Guidance :

Radiated versus Conducted Measurements.

The unwanted emission limits in both the restricted and non-restricted bands are based on antenna-port conducted measurements in conjunction with cabinet emissions tests are permitted to demonstrate compliance.

The following steps was performed:

- a. Cabinet emissions measurements. Radiated measurement was performed to ensure that cabinet emissions are below the emission limits. For the cabinet-emission measurements the antenna was replaced by a termination matching the nominal impedance of the antenna.
- b. Conducted tests was performed using equipment that matches the nominal impedance of the antenna assembly used with the EUT
- c. EIRP calculation. A value representative of an upper bound on out-of-band antenna gain (in dBi) shall be added to the measured antenna-port conducted emission power to compute EIRP within the specified measurement bandwidth. (For emissions in the restricted bands, additional calculations are required to convert EIRP to field strength at the specified distance.) The upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands or 2 dBi, whichever is greater
- d. For all of Radiation emission test
 - d-1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
 - d-2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
 - d-3. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
 - d-4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
 - d-5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
 - d-6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.


4.2.4 DEVIATION FROM TEST STANDARD

No deviation


4.2.5 TEST SETUP

For radiated configuration:


<Frequency Range below 1GHz>

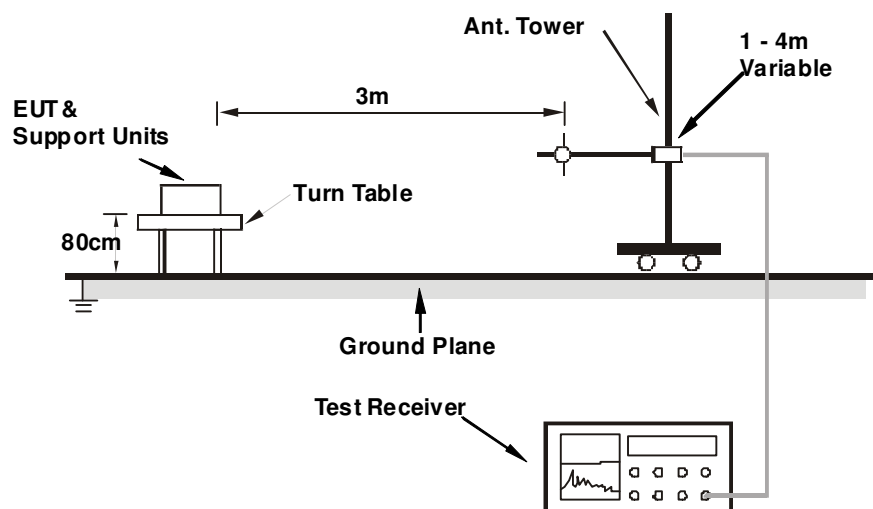

<Frequency Range above 1GHz>

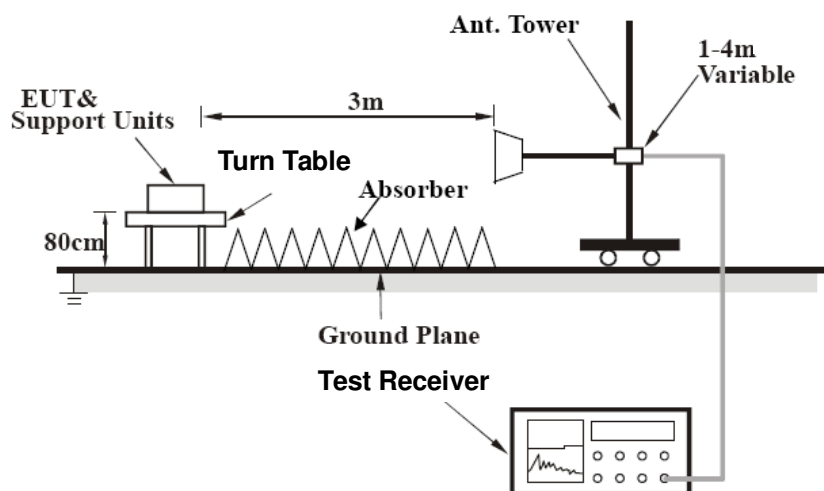

For conducted configuration:



For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

4.2.7 TEST RESULTS (RADIATED MEASUREMENT)

Radiated versus Conducted Measurement	
☐ Conducted measurement	☒ Radiated measurement
<u>For Radiated measurement:</u> The level of unwanted emissions was measured when radiated by the cabinet or structure of the equipment with the antenna connector(s) terminated by a specified load (cabinet radiation) <u>For Conducted measurement:</u> The level of unwanted emissions was measured as their power in a specified load (conducted spurious emissions).	

Radiated test was done with 50ohm terminator on antenna port

BELOW 1GHz WORST-CASE DATA

802.11g

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	149.60	36.2 QP	43.5	-7.3	2.00 H	236	49.58	-13.40
2	160.80	40.2 QP	43.5	-3.3	1.50 H	34	53.26	-13.09
3	248.40	35.4 QP	46.0	-10.6	2.00 H	82	49.82	-14.40
4	282.83	42.5 QP	46.0	-3.5	1.00 H	104	55.55	-13.03
5	334.68	39.3 QP	46.0	-6.7	1.00 H	0	50.83	-11.52
6	609.09	38.1 QP	46.0	-7.9	1.00 H	287	42.80	-4.71
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	31.02	30.3 QP	40.0	-9.7	1.00 V	360	44.95	-14.68
2	49.74	29.0 QP	40.0	-11.1	1.00 V	360	42.69	-13.74
3	152.85	32.7 QP	43.5	-10.8	1.00 V	278	45.61	-12.94
4	242.53	29.6 QP	46.0	-16.4	2.00 V	358	44.26	-14.65
5	289.96	32.2 QP	46.0	-13.8	1.50 V	280	44.96	-12.80
6	609.09	30.4 QP	46.0	-15.6	1.50 V	240	35.12	-4.71

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

Radiated test was done with 50ohm terminator on antenna port

ABOVE 1GHz DATA

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4824.00	49.8 PK	74.0	-24.2	1.49 H	169	42.60	7.20
2	4824.00	43.1 AV	54.0	-10.9	1.49 H	169	35.90	7.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4824.00	49.9 PK	74.0	-24.1	1.28 V	95	42.70	7.20
2	4824.00	42.4 AV	54.0	-11.6	1.28 V	95	35.20	7.20

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4874.00	50.4 PK	74.0	-23.6	1.52 H	158	43.07	7.33
2	4874.00	43.5 AV	54.0	-10.5	1.52 H	158	36.17	7.33
3	7311.00	53.9 PK	74.0	-20.1	1.02 H	34	38.94	14.96
4	7311.00	41.6 AV	54.0	-12.4	1.02 H	34	26.64	14.96
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4874.00	49.5 PK	74.0	-24.5	1.23 V	81	42.17	7.33
2	4874.00	41.9 AV	54.0	-12.1	1.23 V	81	34.57	7.33
3	7311.00	54.1 PK	74.0	-19.9	1.00 V	261	39.14	14.96
4	7311.00	41.8 AV	54.0	-12.2	1.00 V	261	26.84	14.96

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4924.00	47.5 PK	74.0	-26.5	1.00 H	212	40.03	7.47
2	4924.00	38.2 AV	54.0	-15.8	1.00 H	212	30.73	7.47
3	7386.00	54.1 PK	74.0	-19.9	1.00 H	45	39.21	14.89
4	7386.00	41.9 AV	54.0	-12.1	1.00 H	45	27.01	14.89
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4924.00	47.3 PK	74.0	-26.7	1.00 V	98	39.83	7.47
2	4924.00	38.1 AV	54.0	-15.9	1.00 V	98	30.63	7.47
3	7386.00	54.2 PK	74.0	-19.8	1.00 V	254	39.31	14.89
4	7386.00	42.1 AV	54.0	-11.9	1.00 V	254	27.21	14.89

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4824.00	47.2 PK	74.0	-26.8	1.00 H	208	40.00	7.20
2	4824.00	34.2 AV	54.0	-19.8	1.00 H	208	27.00	7.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4824.00	47.4 PK	74.0	-26.6	1.00 V	127	40.20	7.20
2	4824.00	34.4 AV	54.0	-19.6	1.00 V	127	27.20	7.20

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4874.00	47.0 PK	74.0	-27.0	1.03 H	202	39.67	7.33
2	4874.00	34.2 AV	54.0	-19.8	1.03 H	202	26.87	7.33
3	7311.00	54.3 PK	74.0	-19.7	1.04 H	58	39.34	14.96
4	7311.00	42.1 AV	54.0	-11.9	1.04 H	58	27.14	14.96
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4874.00	47.6 PK	74.0	-26.4	1.00 V	132	40.27	7.33
2	4874.00	34.6 AV	54.0	-19.4	1.00 V	132	27.27	7.33
3	7311.00	54.6 PK	74.0	-19.4	1.00 V	253	39.64	14.96
4	7311.00	42.6 AV	54.0	-11.4	1.00 V	253	27.64	14.96

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4924.00	47.7 PK	74.0	-26.3	1.05 H	197	40.23	7.47
2	4924.00	34.6 AV	54.0	-19.4	1.05 H	197	27.13	7.47
3	7386.00	54.6 PK	74.0	-19.4	1.05 H	57	39.71	14.89
4	7386.00	42.4 AV	54.0	-11.6	1.05 H	57	27.51	14.89
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4924.00	47.9 PK	74.0	-26.1	1.00 V	146	40.43	7.47
2	4924.00	34.7 AV	54.0	-19.3	1.00 V	146	27.23	7.47
3	7386.00	54.1 PK	74.0	-19.9	1.02 V	249	39.21	14.89
4	7386.00	41.7 AV	54.0	-12.3	1.02 V	249	26.81	14.89

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

802.11n (HT20)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4824.00	47.5 PK	74.0	-26.5	1.06 H	197	40.30	7.20
2	4824.00	34.5 AV	54.0	-19.5	1.06 H	197	27.30	7.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4824.00	47.4 PK	74.0	-26.6	1.00 V	124	40.20	7.20
2	4824.00	34.2 AV	54.0	-19.8	1.00 V	124	27.00	7.20

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4874.00	47.4 PK	74.0	-26.6	1.02 H	194	40.07	7.33
2	4874.00	34.5 AV	54.0	-19.5	1.02 H	194	27.17	7.33
3	7311.00	54.0 PK	74.0	-20.0	1.02 H	60	39.04	14.96
4	7311.00	41.5 AV	54.0	-12.5	1.02 H	60	26.54	14.96
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4874.00	48.1 PK	74.0	-25.9	1.00 V	131	40.77	7.33
2	4874.00	34.9 AV	54.0	-19.1	1.00 V	131	27.57	7.33
3	7311.00	54.4 PK	74.0	-19.6	1.00 V	252	39.44	14.96
4	7311.00	42.1 AV	54.0	-11.9	1.00 V	252	27.14	14.96

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4924.00	47.3 PK	74.0	-26.7	1.03 H	223	39.83	7.47
2	4924.00	34.2 AV	54.0	-19.8	1.03 H	223	26.73	7.47
3	7386.00	54.1 PK	74.0	-19.9	1.04 H	43	39.21	14.89
4	7386.00	42.2 AV	54.0	-11.8	1.04 H	43	27.31	14.89
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4924.00	47.6 PK	74.0	-26.4	1.00 V	143	40.13	7.47
2	4924.00	34.9 AV	54.0	-19.1	1.00 V	143	27.43	7.47
3	7386.00	53.6 PK	74.0	-20.4	1.00 V	245	38.71	14.89
4	7386.00	41.6 AV	54.0	-12.4	1.00 V	245	26.71	14.89

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

802.11n (HT40)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4844.00	47.1 PK	74.0	-26.9	1.02 H	210	39.86	7.24
2	4844.00	33.9 AV	54.0	-20.1	1.02 H	210	26.66	7.24
3	7266.00	53.9 PK	74.0	-20.1	1.00 H	33	38.88	15.02
4	7266.00	41.7 AV	54.0	-12.3	1.00 H	33	26.68	15.02
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4844.00	47.3 PK	74.0	-26.7	1.06 V	132	40.06	7.24
2	4844.00	34.3 AV	54.0	-19.7	1.06 V	132	27.06	7.24
3	7266.00	53.9 PK	74.0	-20.1	1.06 V	264	38.88	15.02
4	7266.00	42.1 AV	54.0	-11.9	1.06 V	264	27.08	15.02

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4874.00	47.5 PK	74.0	-26.5	1.05 H	194	40.17	7.33
2	4874.00	34.4 AV	54.0	-19.6	1.05 H	194	27.07	7.33
3	7311.00	54.3 PK	74.0	-19.7	1.00 H	58	39.34	14.96
4	7311.00	41.8 AV	54.0	-12.2	1.00 H	58	26.84	14.96
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4874.00	47.5 PK	74.0	-26.5	1.04 V	130	40.17	7.33
2	4874.00	34.6 AV	54.0	-19.4	1.04 V	130	27.27	7.33
3	7311.00	54.6 PK	74.0	-19.4	1.00 V	263	39.64	14.96
4	7311.00	42.5 AV	54.0	-11.5	1.00 V	263	27.54	14.96

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4904.00	47.7 PK	74.0	-26.3	1.05 H	219	40.29	7.41
2	4904.00	34.6 AV	54.0	-19.4	1.05 H	219	27.19	7.41
3	7356.00	53.8 PK	74.0	-20.2	1.01 H	61	38.89	14.91
4	7356.00	41.7 AV	54.0	-12.3	1.01 H	61	26.79	14.91
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4904.00	48.0 PK	74.0	-26.0	1.00 V	131	40.59	7.41
2	4904.00	35.0 AV	54.0	-19.0	1.00 V	131	27.59	7.41
3	7356.00	54.2 PK	74.0	-19.8	1.00 V	239	39.29	14.91
4	7356.00	42.4 AV	54.0	-11.6	1.00 V	239	27.49	14.91

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2.8 TEST RESULTS (CONDUCTED MEASUREMENT)

Radiated versus Conducted Measurement	
☒ Conducted measurement	☐ Radiated measurement
<u>For Radiated measurement:</u> The level of unwanted emissions was measured when radiated by the cabinet or structure of the equipment with the antenna connector(s) terminated by a specified load (cabinet radiation) <u>For Conducted measurement:</u> The level of unwanted emissions was measured as their power in a specified load (conducted spurious emissions).	

Conducted Measurement Factor
a. For the out of band spurious the gain for the specific band may have been used rather than the highest gain across all bands. b. For the band edge the gain for the specific band may have been used. c. In restricted bands below 1000 MHz, add upper bound on ground plane reflection: For $f = 30 - 1000$ MHz, add 4.7 dB. Note: The conducted emission test was considered some factor to compute test result.

The declared antenna gain is 3.62dBi, this antenna gain was used for conducted spurious/bandedge calculations.

BELOW 1GHz DATA

802.11g - Channel 6

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	79.955 QP	31.23	40	-8.77	-67.65	3.62	-64.03
2	129.91 QP	24.25	43.5	-19.25	-74.63	3.62	-71.01
3	259.89 QP	24.93	46	-21.07	-73.95	3.62	-70.33
4	569.805 QP	24.36	46	-21.64	-74.52	3.62	-70.9
5	796.0575 QP	32.58	46	-13.42	-66.3	3.62	-62.68
6	827.34 QP	32.66	46	-13.34	-66.22	3.62	-62.6

Note 1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Note 2. The raw value was include the ground plane reflection (4.7dB)

Note 3. These frequencies in test report was the highest value below 1 GHz emission even restricted and non-restricted band

802.11b - Channel 6

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4871.875 PK	52.48	74	-21.52	-46.4	3.62	-42.78
2	4871.875 AV	46.86	54	-7.14	-52.02	3.62	-48.4
3	7303.125 PK	51.4	74	-22.6	-47.48	3.62	-43.86
4	7306.25 AV	39.8	54	-14.2	-59.08	3.62	-55.46

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2354.84 PK	56.81	74	-17.19	-42.07	3.62	-38.45
2	2358.64 AV	49.37	54	-4.63	-49.51	3.62	-45.89
3	2484.42 PK	53.75	74	-20.25	-45.13	3.62	-41.51
4	2484.04 AV	42.57	54	-11.43	-56.31	3.62	-52.69

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

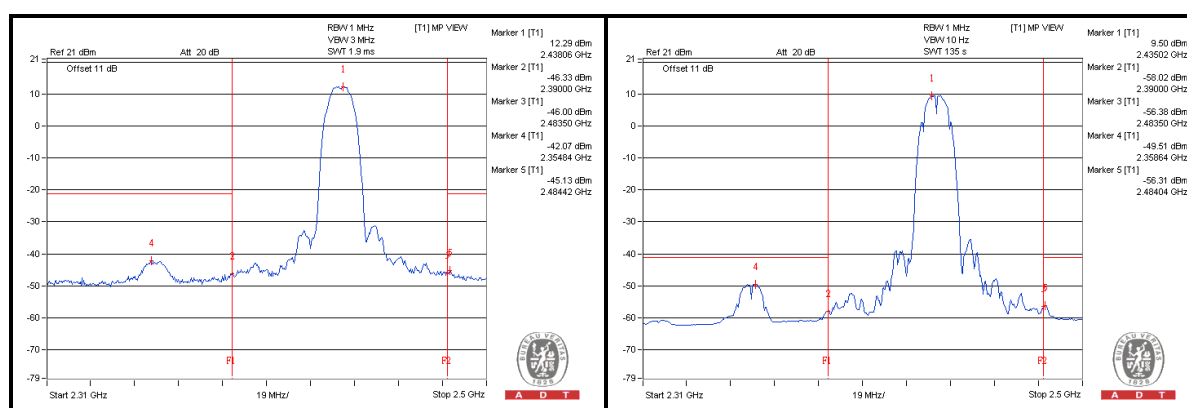

802.11b - Channel 11

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4928.125 PK	51.67	74	-22.33	-47.21	3.62	-43.59
2	4921.875 AV	40.93	54	-13.07	-57.95	3.62	-54.33
3	7403.125 PK	52.36	74	-21.64	-46.52	3.62	-42.9
4	7368.75 AV	39.52	54	-14.48	-59.36	3.62	-55.74

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2381.44 PK	56.31	74	-17.69	-42.57	3.62	-38.95
2	2379.92 AV	48.46	54	-5.54	-50.42	3.62	-46.8
3	2487.46 PK	56.79	74	-17.21	-42.09	3.62	-38.47
4	2487.46 AV	49.29	54	-4.71	-49.59	3.62	-45.97

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

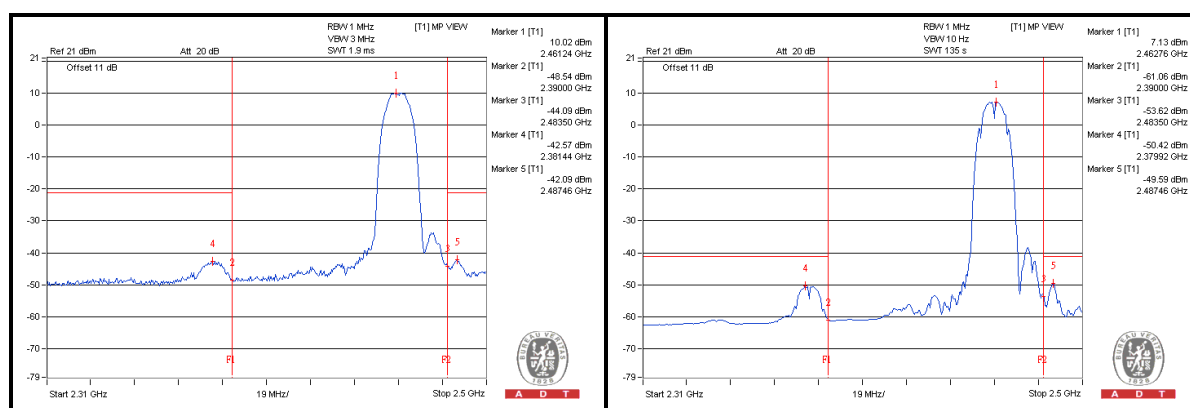

802.11g - Channel 1

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4818.75 PK	50.81	74	-23.19	-48.07	3.62	-44.45
2	4821.875 AV	38.81	54	-15.19	-60.07	3.62	-56.45

Note :

$$\text{Emission Level (dBuV/m)} = \text{EIRP Level (dBm)} - 20\log(d) + 104.8$$

d = measurement distance in 3 meters.


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2390 PK	67.32	74	-6.68	-31.19	3.62	-27.94
2	2390 AV	47.79	54	-6.21	-50.69	3.62	-47.47
3	2493.92 PK	54.26	74	-19.74	-44.62	3.62	-41
4	2494.3 AV	40.88	54	-13.12	-58	3.62	-54.38

Note :

$$\text{Emission Level (dBuV/m)} = \text{EIRP Level (dBm)} - 20\log(d) + 104.8$$

d = measurement distance in 3 meters.

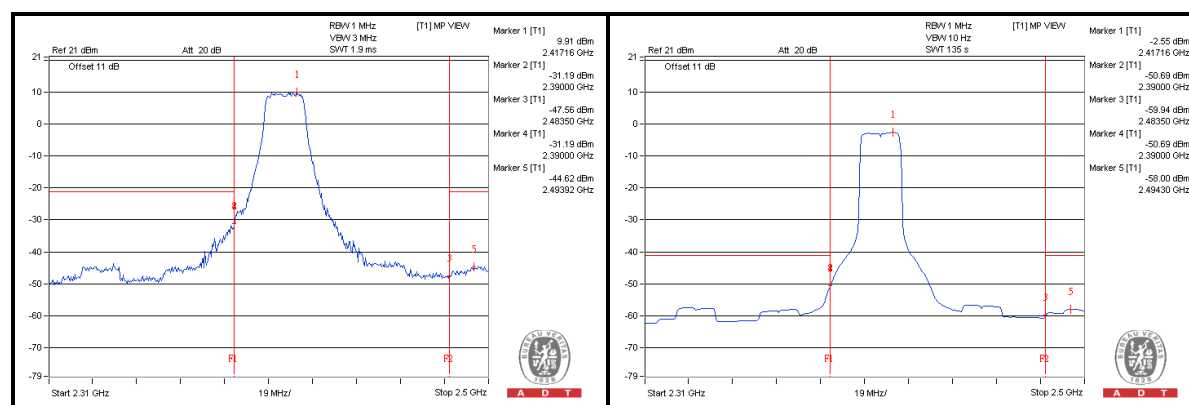

802.11g - Channel 6

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4878.125 PK	51.49	74	-22.51	-47.39	3.62	-43.77
2	4871.875 AV	39.58	54	-14.42	-59.3	3.62	-55.68
3	7325 PK	51.85	74	-22.15	-47.03	3.62	-43.41
4	7306.25 AV	39.87	54	-14.13	-59.01	3.62	-55.39

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2389.42 PK	65.48	74	-8.52	-33.4	3.62	-29.78
2	2390 AV	46.25	54	-7.75	-52.54	3.62	-49.01
3	2485.94 PK	70.21	74	-3.79	-28.67	3.62	-25.05
4	2483.5 AV	46.05	54	-7.95	-52.77	3.62	-49.21

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

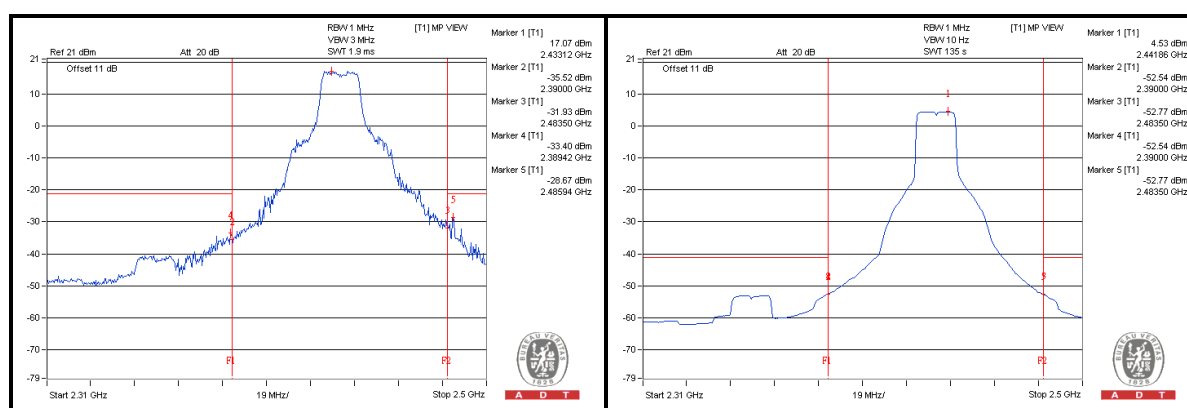

802.11g - Channel 11

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4943.75 PK	51.14	74	-22.86	-47.74	3.62	-44.12
2	4925 AV	38.87	54	-15.13	-60.01	3.62	-56.39
3	7400 PK	51.68	74	-22.32	-47.2	3.62	-43.58
4	7400 AV	39.57	54	-14.43	-59.31	3.62	-55.69

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2379.92 PK	54.29	74	-19.71	-44.59	3.62	-40.97
2	2377.64 AV	41.25	54	-12.75	-57.63	3.62	-54.01
3	2483.66 PK	65.46	74	-8.54	-33.42	3.62	-29.8
4	2483.5 AV	46.35	54	-7.65	-52.27	3.62	-48.91

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

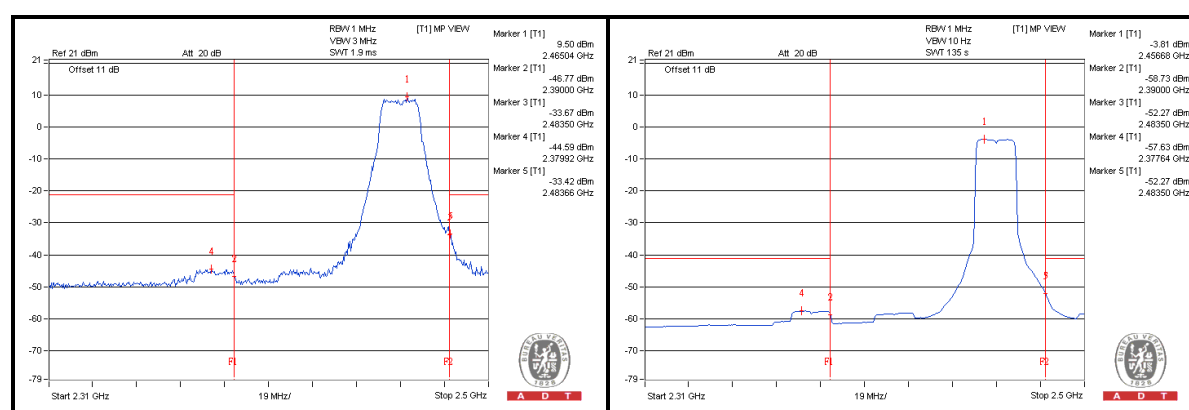

802.11n (HT20) - Channel 1

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4828.125 PK	50.78	74	-23.22	-48.1	3.62	-44.48
2	4818.75 AV	38.88	54	-15.12	-60	3.62	-56.38

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2390 PK	67.99	74	-6.01	-31	3.62	-27.27
2	2390 AV	48.66	54	-5.34	-49.94	3.62	-46.6
3	2490.88 PK	54.58	74	-19.42	-44.3	3.62	-40.68
4	2493.92 AV	40.51	54	-13.49	-58.37	3.62	-54.75

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

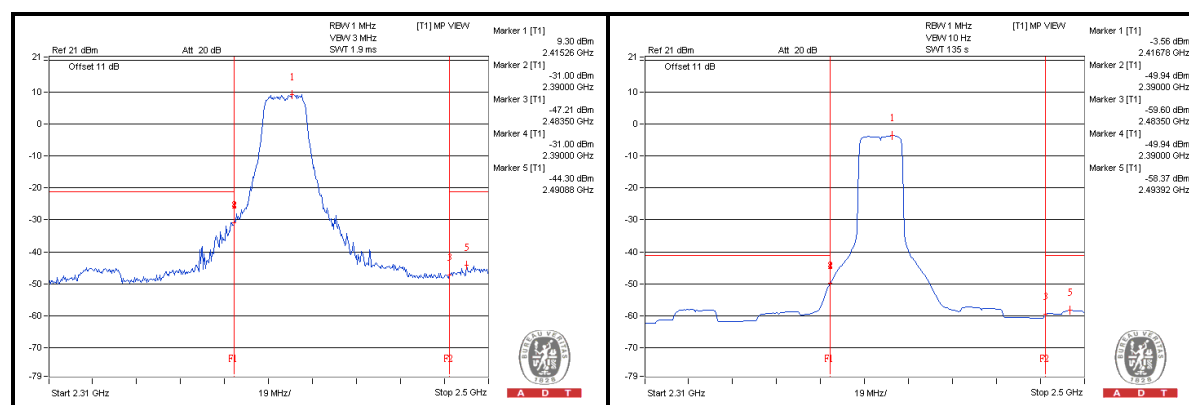

802.11n (HT20) - Channel 6

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4890.625 PK	51.72	74	-22.28	-47.16	3.62	-43.54
2	4871.875 AV	39.24	54	-14.76	-59.64	3.62	-56.02
3	7325 PK	51.94	74	-22.06	-46.94	3.62	-43.32
4	7300 AV	39.77	54	-14.23	-59.11	3.62	-55.49

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2386.76 PK	64.3	74	-9.7	-34.58	3.62	-30.96
2	2390 AV	45.73	54	-8.27	-53.02	3.62	-49.53
3	2485.56 PK	71.88	74	-2.12	-27	3.62	-23.38
4	2483.5 AV	45.68	54	-8.32	-53.13	3.62	-49.58

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

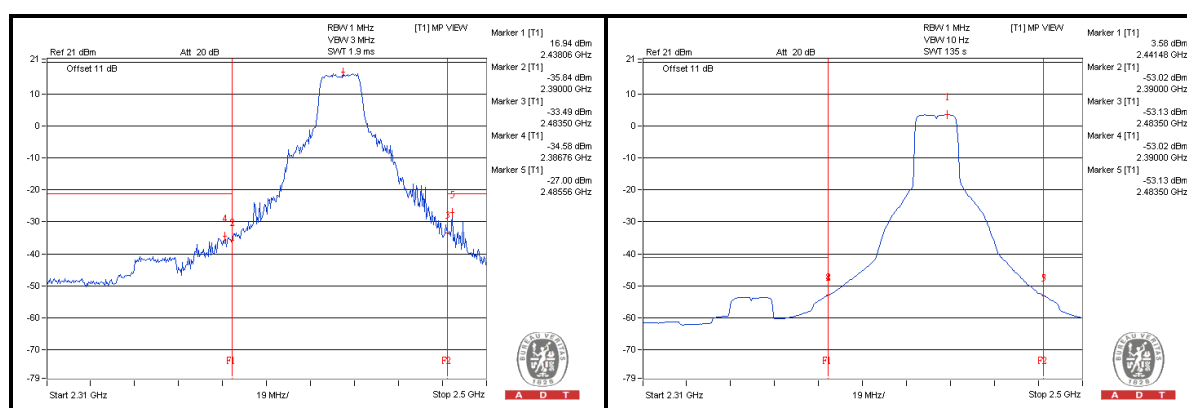

802.11n (HT20) - Channel 11

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4921.875 PK	50.47	74	-23.53	-48.41	3.62	-44.79
2	4940.625 AV	38.94	54	-15.06	-59.94	3.62	-56.32
3	7403.125 PK	51.38	74	-22.62	-47.5	3.62	-43.88
4	7381.25 AV	39.58	54	-14.42	-59.3	3.62	-55.68

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2376.5 PK	54.04	74	-19.96	-44.84	3.62	-41.22
2	2377.64 AV	40.79	54	-13.21	-58.09	3.62	-54.47
3	2483.5 PK	64.23	74	-9.77	-34.54	3.62	-31.03
4	2483.5 AV	47.3	54	-6.7	-51.39	3.62	-47.96

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

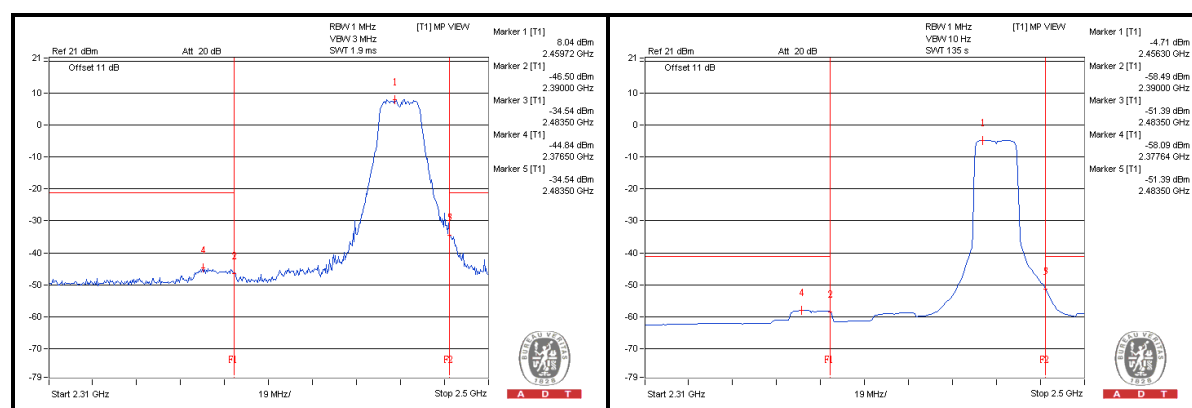

802.11n (HT40) - Channel 3

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4818.75 PK	51.06	74	-22.94	-47.82	3.62	-44.2
2	4837.5 AV	38.82	54	-15.18	-60.06	3.62	-56.44

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2390 PK	66.78	74	-7.22	-32.14	3.62	-28.48
2	2390 AV	48.7	54	-5.3	-50.05	3.62	-46.56
3	2488.22 PK	53.7	74	-20.3	-45.18	3.62	-41.56
4	2484.8 AV	39.29	54	-14.71	-59.59	3.62	-55.97

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

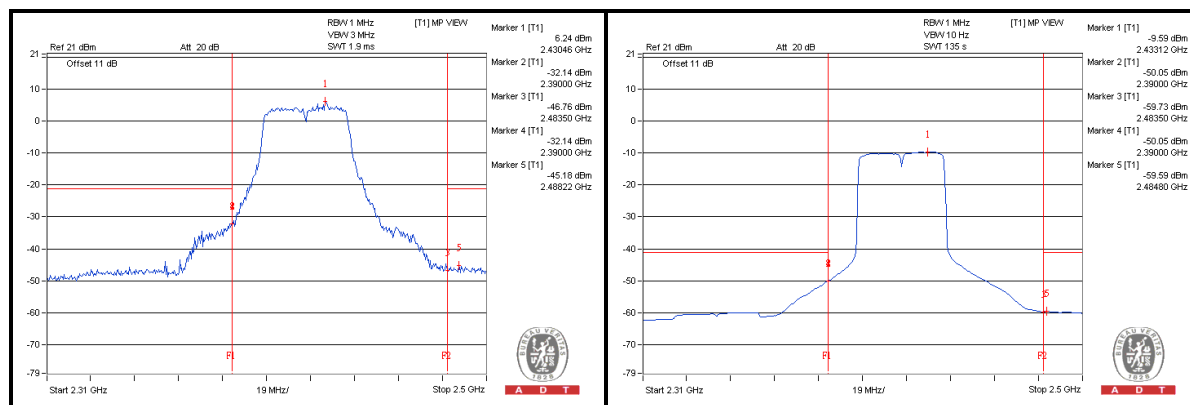

802.11n (HT40) - Channel 6

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4868.75 PK	50.65	74	-23.35	-48.23	3.62	-44.61
2	4893.75 AV	38.62	54	-15.38	-60.26	3.62	-56.64
3	7300 PK	51.95	74	-22.05	-46.93	3.62	-43.31
4	7293.75 AV	39.85	54	-14.15	-59.03	3.62	-55.41

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2390 PK	62.19	74	-11.81	-36.47	3.62	-33.07
2	2390 AV	43.02	54	-10.98	-55.71	3.62	-52.24
3	2485.94 PK	64.09	74	-9.91	-34.79	3.62	-31.17
4	2483.5 AV	45.71	54	-8.29	-53.06	3.62	-49.55

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

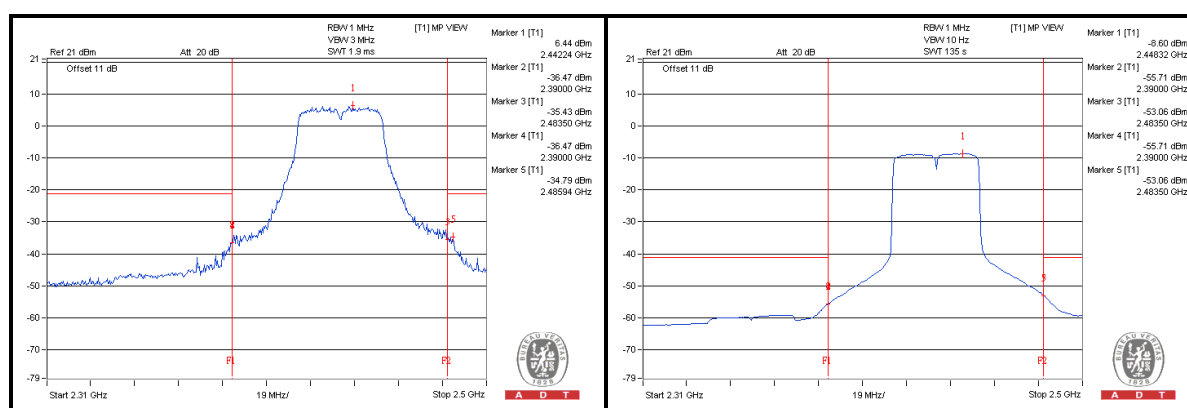

802.11n (HT40) - Channel 9

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4915.625 PK	51.59	74	-22.41	-47.29	3.62	-43.67
2	4937.5 AV	38.98	54	-15.02	-59.9	3.62	-56.28
3	7368.75 PK	52.1	74	-21.9	-46.78	3.62	-43.16
4	7375 AV	39.67	54	-14.33	-59.21	3.62	-55.59

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2387.52 PK	53.19	74	-20.81	-45.69	3.62	-42.07
2	2380.68 AV	38.93	54	-15.07	-59.95	3.62	-56.33
3	2484.04 PK	66.41	74	-7.59	-32.47	3.62	-28.85
4	2483.5 AV	49.68	54	-4.32	-49.13	3.62	-45.58

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

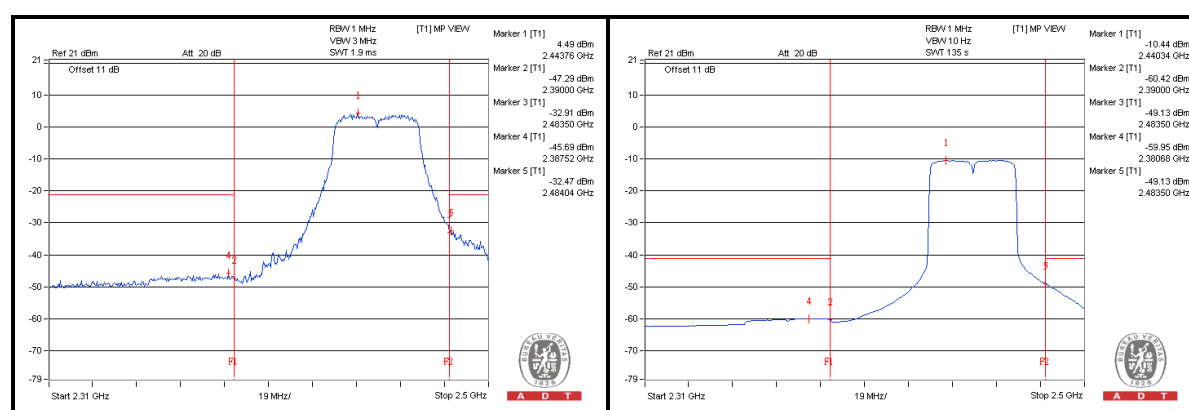

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSV 40	100964	July 15, 2013	July 14, 2014

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Mar. 07, 2014


4.3.3 TEST PROCEDURE

1. Set resolution bandwidth (RBW) = 100kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
3. Trace mode = max hold.
4. Sweep = auto couple.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 TEST RESULTS

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	10.12	0.5	PASS
6	2437	10.13	0.5	PASS
11	2462	10.13	0.5	PASS

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.40	0.5	PASS
6	2437	16.39	0.5	PASS
11	2462	16.39	0.5	PASS

802.11n (HT20)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	17.62	0.5	PASS
6	2437	17.60	0.5	PASS
11	2462	17.59	0.5	PASS

802.11n (HT40)


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
3	2422	36.19	0.5	PASS
6	2437	36.43	0.5	PASS
9	2452	36.38	0.5	PASS




A D T

SPECTRUM PLOT OF WORST VALUE


802.11b / CH1

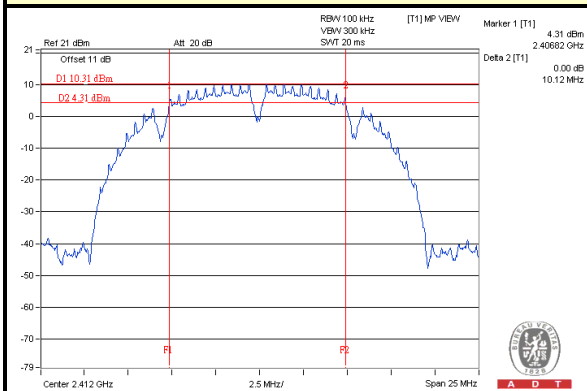


802.11g / CH6

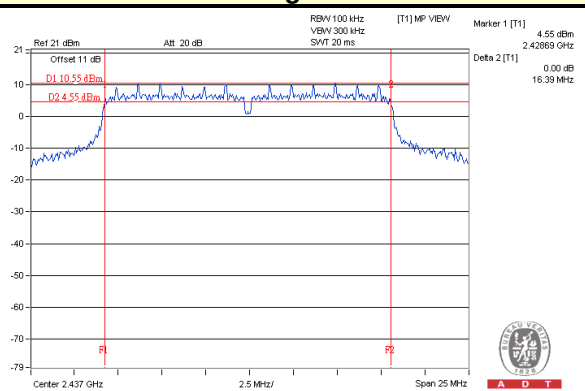

802.11n (HT20) / CH11

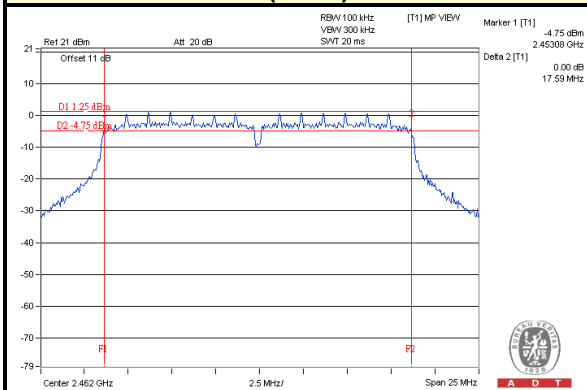

802.11n (HT40) / CH3

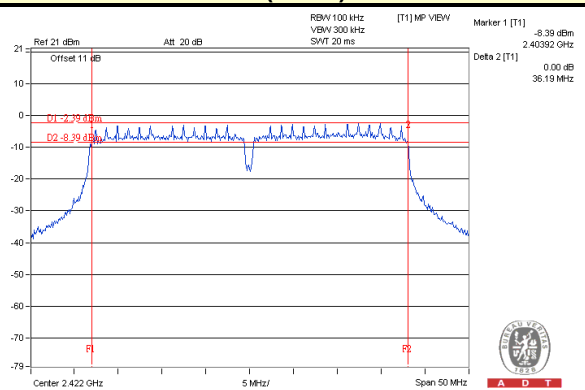

4.4 OCCUPIED BANDWIDTH MEASUREMENT

4.4.1 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSV 40	100964	July 15, 2013	July 14, 2014

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Mar. 07, 2014


4.4.2 TEST PROCEDURE

1. Set RBW $\geq 1\%$ of the emission bandwidth.
2. Set the VBW $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Record the 99% emission bandwidth.

4.4.3 DEVIATION FROM TEST STANDARD

No deviation

4.4.4 TEST SETUP



4.4.5 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.4.6 TEST RESULTS

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	OCCUPIED BANDWIDTH (MHz)
1	2412	13.91
6	2437	13.92
11	2462	13.92

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	OCCUPIED BANDWIDTH (MHz)
1	2412	17.04
6	2437	19.80
11	2462	17.04

802.11n (HT20)

CHANNEL	CHANNEL FREQUENCY (MHz)	OCCUPIED BANDWIDTH (MHz)
1	2412	18.24
6	2437	19.92
11	2462	18.12

802.11n (HT40)


CHANNEL	CHANNEL FREQUENCY (MHz)	OCCUPIED BANDWIDTH (MHz)
3	2422	37.60
6	2437	37.60
9	2452	37.60




A D T

SPECTRUM PLOT OF WORST VALUE


802.11b / CH6

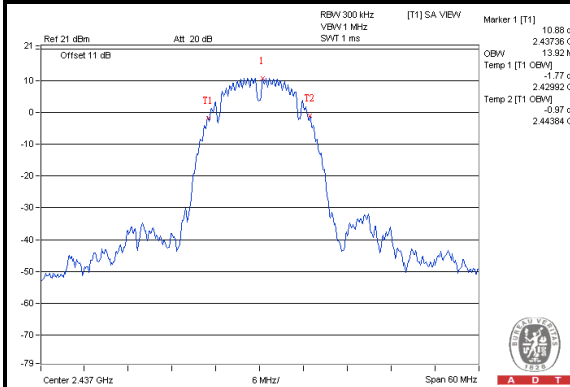


802.11g / CH6

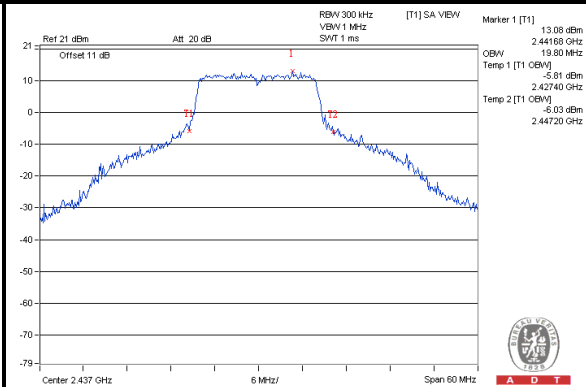

802.11n (HT20) : CH6

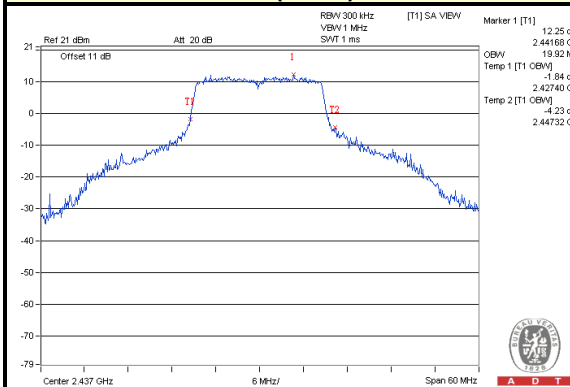

802.11n (HT40) : CH6

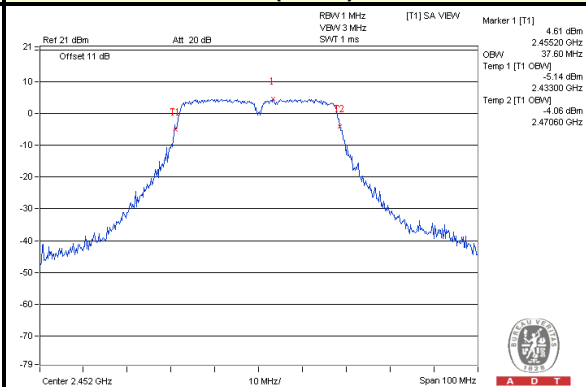

4.5 CONDUCTED OUTPUT POWER MEASUREMENT

4.5.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm)

4.5.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Power meter Anritsu	ML2495A	0824006	May 20, 2013	May 19, 2014
Power sensor Anritsu	MA2411B	0738172	May 20, 2013	May 19, 2014

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Mar. 07, 2014


4.5.3 TEST PROCEDURES

The peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the peak power level.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation.

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6

4.5.7 TEST RESULTS

802.11b

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
1	2412	174.985	22.43	30	PASS
6	2437	178.238	22.51	30	PASS
11	2462	109.901	20.41	30	PASS

802.11g

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
1	2412	229.615	23.61	30	PASS
6	2437	439.542	26.43	30	PASS
11	2462	164.059	22.15	30	PASS

802.11n (HT20)

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
1	2412	206.063	23.14	30	PASS
6	2437	433.511	26.37	30	PASS
11	2462	152.405	21.83	30	PASS

802.11n (HT40)

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
3	2422	118.032	20.72	30	PASS
6	2437	155.239	21.91	30	PASS
9	2452	107.895	20.33	30	PASS

4.6 AVERAGE OUTPUT POWER

4.6.1 FOR REFERENCE

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Power meter Anritsu	ML2495A	0824006	May 20, 2013	May 19, 2014
Power sensor Anritsu	MA2411B	0738172	May 20, 2013	May 19, 2014


Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Mar. 07, 2014

4.6.3 TEST PROCEDURES

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.6.4 TEST SETUP



4.6.5 EUT OPERATING CONDITIONS

Same as Item 4.3.6

4.6.6 TEST RESULTS

802.11b

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)
1	2412	108.643	20.36
6	2437	106.414	20.27
11	2462	64.714	18.11

802.11g

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)
1	2412	28.445	14.54
6	2437	163.305	22.13
11	2462	21.038	13.23

802.11n (HT20)

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)
1	2412	25.177	14.01
6	2437	127.057	21.04
11	2462	19.634	12.93

802.11n (HT40)

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)
3	2422	14.894	11.73
6	2437	19.770	12.96
9	2452	13.305	11.24

4.7 POWER SPECTRAL DENSITY MEASUREMENT

4.7.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.7.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSV 40	100964	July 15, 2013	July 14, 2014

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Mar. 07, 2014


4.7.3 TEST PROCEDURE

1. Set the RBW = 3 kHz, VBW = 10 kHz, Detector = peak.
2. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
3. Use the peak marker function to determine the maximum amplitude level.

4.7.4 DEVIATION FROM TEST STANDARD

No deviation

4.7.5 TEST SETUP



4.7.6 EUT OPERATING CONDITION

Same as Item 4.3.6

4.7.7 TEST RESULTS

802.11b

Channel	FREQUENCY (MHz)	PSD (dBm)	Limit (dBm)	PASS /FAIL
1	2412	-2.19	8	PASS
6	2437	-2.54	8	PASS
11	2462	-4.96	8	PASS

802.11g

Channel	FREQUENCY (MHz)	PSD (dBm)	Limit (dBm)	PASS /FAIL
1	2412	-9.06	8	PASS
6	2437	-1.59	8	PASS
11	2462	-10.18	8	PASS

802.11n (HT20)

Channel	FREQUENCY (MHz)	PSD (dBm)	Limit (dBm)	PASS /FAIL
1	2412	-11.12	8	PASS
6	2437	-2.53	8	PASS
11	2462	-10.98	8	PASS

802.11n (HT40)


Channel	FREQUENCY (MHz)	PSD (dBm)	Limit (dBm)	PASS /FAIL
3	2422	-15.57	8	PASS
6	2437	-14.41	8	PASS
9	2452	-16.40	8	PASS




A D T

SPECTRUM PLOT OF WORST VALUE


802.11b / CH1

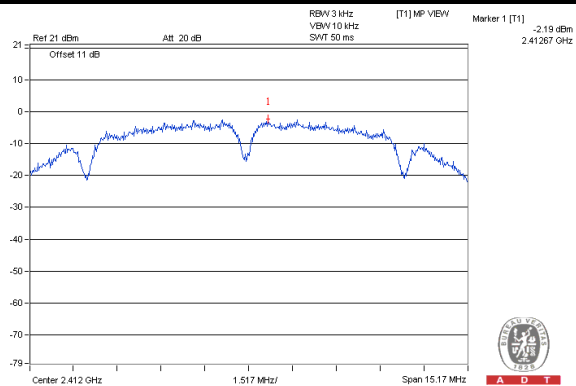


802.11g / CH6

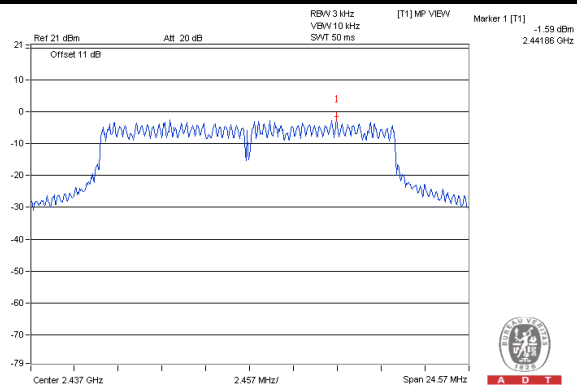

802.11n (HT20) / CH6

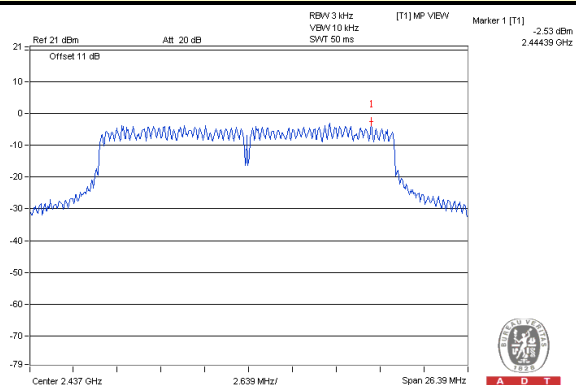

802.11n (HT40) / CH6

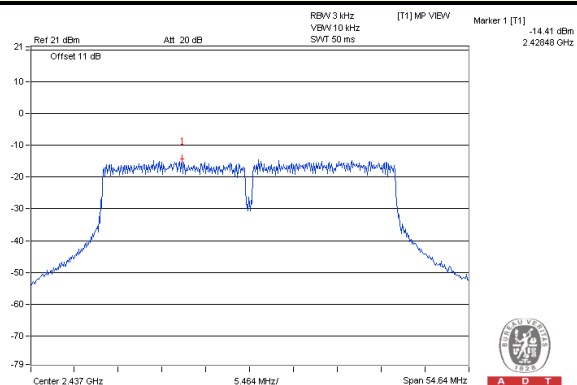

4.8 CONDUCTED OUT-BAND EMISSION MEASUREMENT

4.8.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below 20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.8.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSV 40	100964	July 15, 2013	July 14, 2014

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Mar. 07, 2014

4.8.3 TEST PROCEDURE

Measurement Procedure - Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.


Measurement Procedure –Unwanted Emission Level

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

4.8.4 DEVIATION FROM TEST STANDARD

No deviation

4.8.5 TEST SETUP



4.8.6 EUT OPERATING CONDITION

Same as Item 4.3.6

4.8.7 TEST RESULTS


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.




A D T

802.11b


CH 1

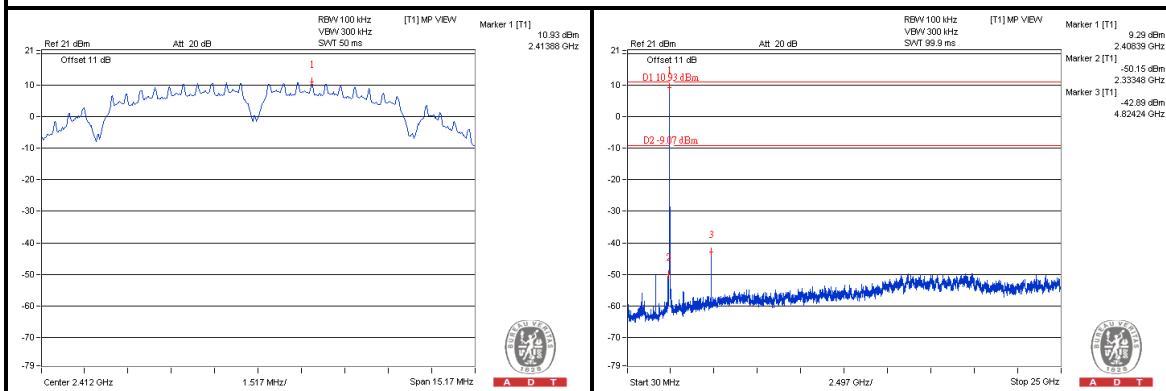


CH 6

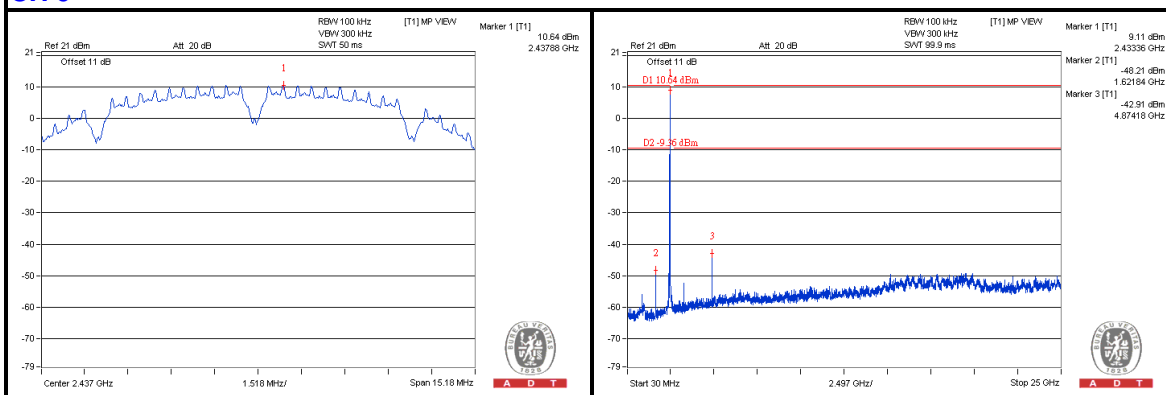


CH 11

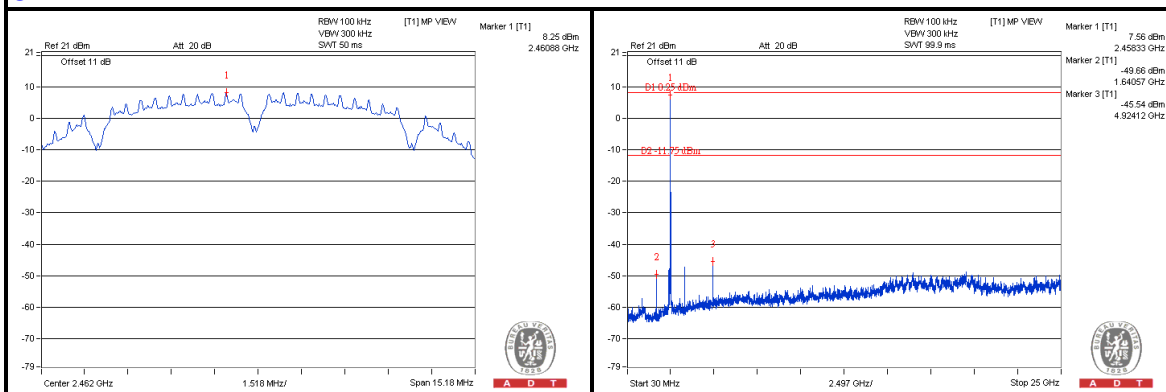

CH 1 Band edge

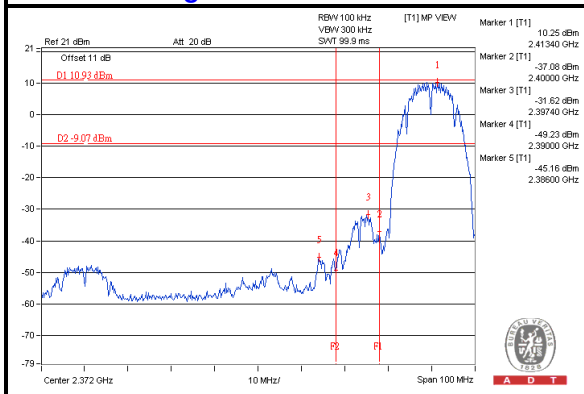

CH 11 Band edge


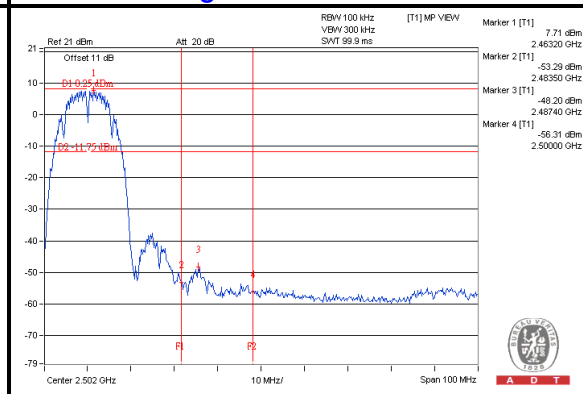






A D T

802.11g



CH 1

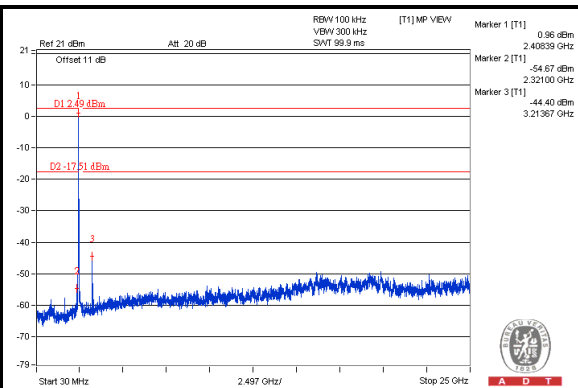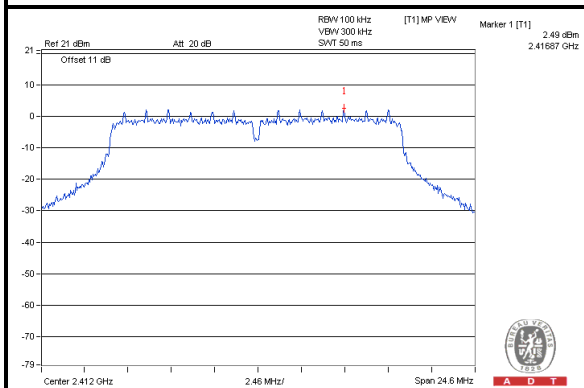


CH 6

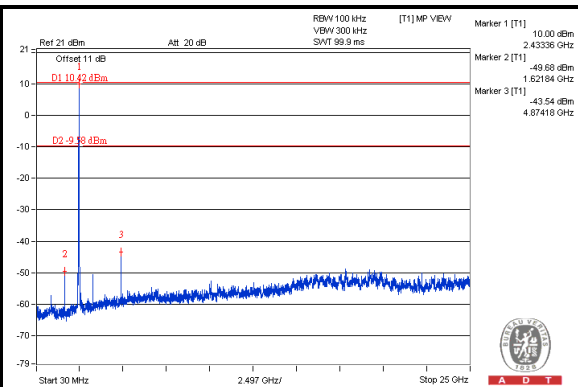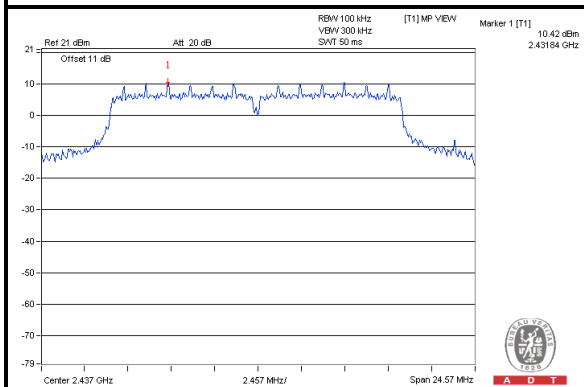


CH 11

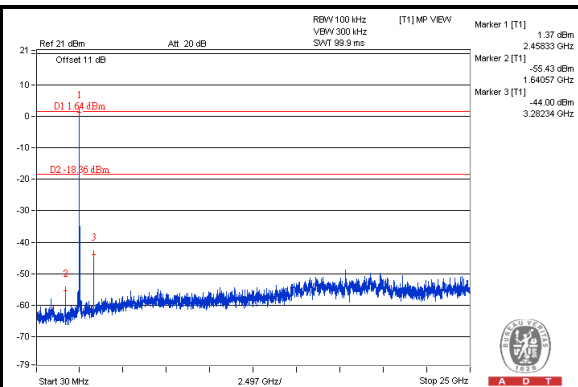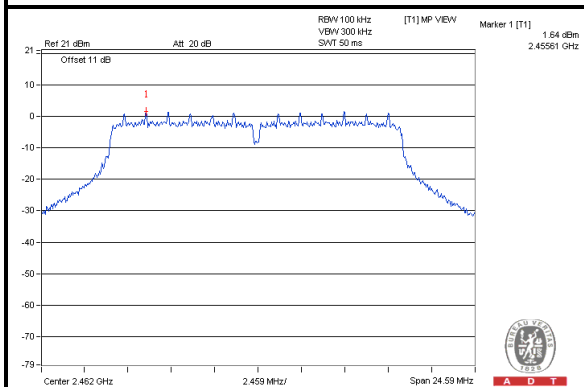

CH 1 Band edge

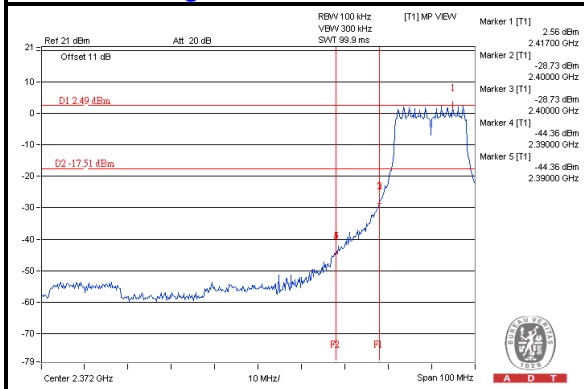

CH 11 Band edge


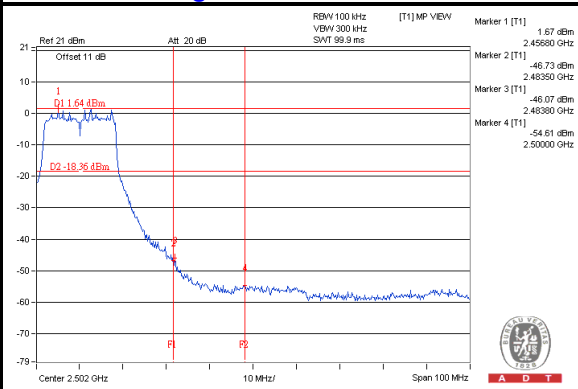






A D T

802.11n (HT20)



CH 1

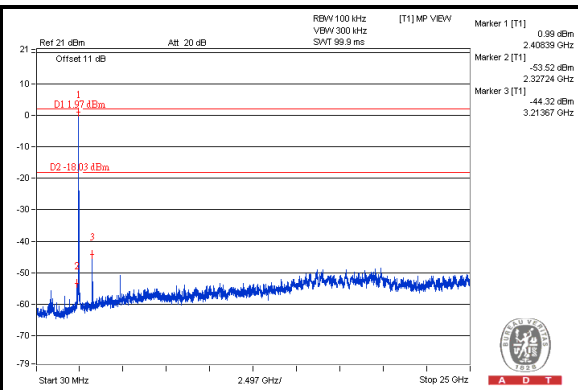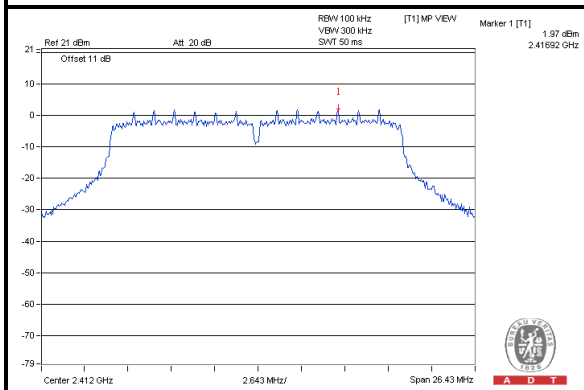


CH 6

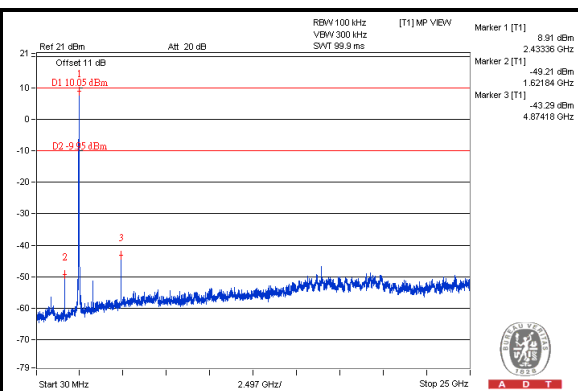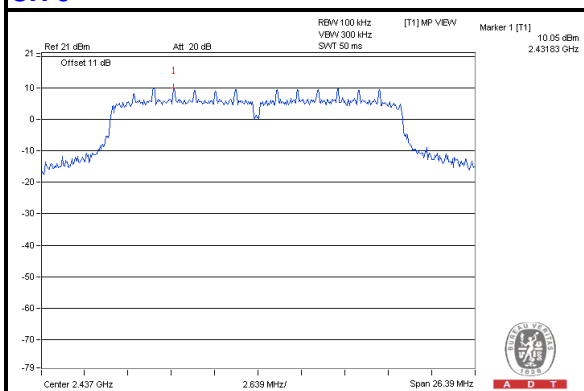


CH 11

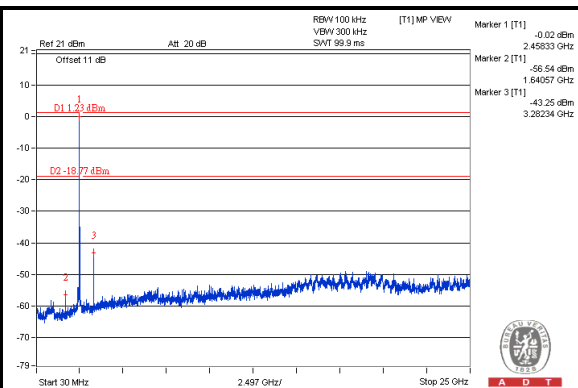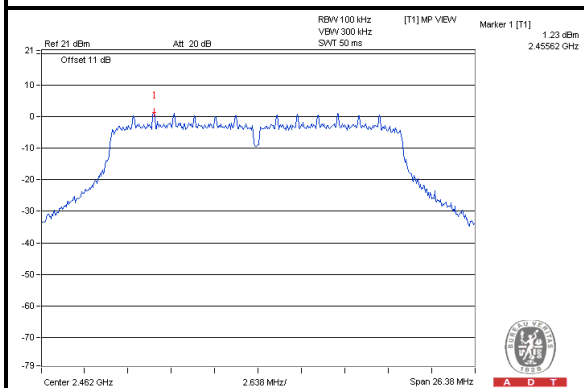

CH 1 Band edge

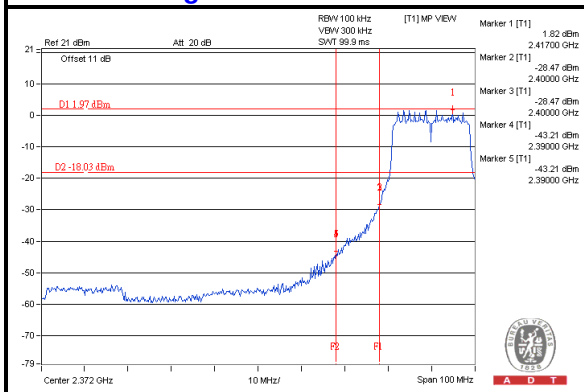

CH 11 Band edge

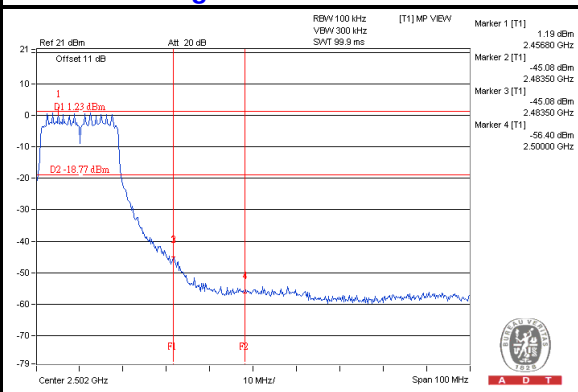





A D T

802.11n (HT40)


CH 3

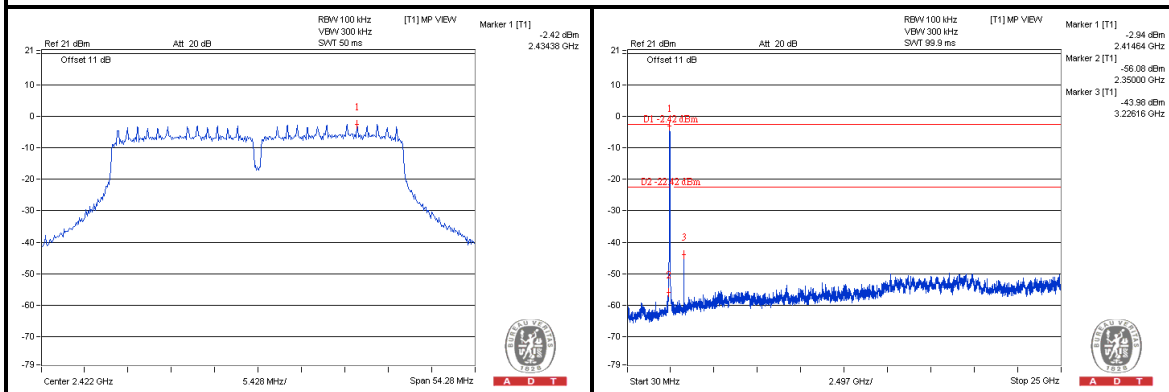


CH 6

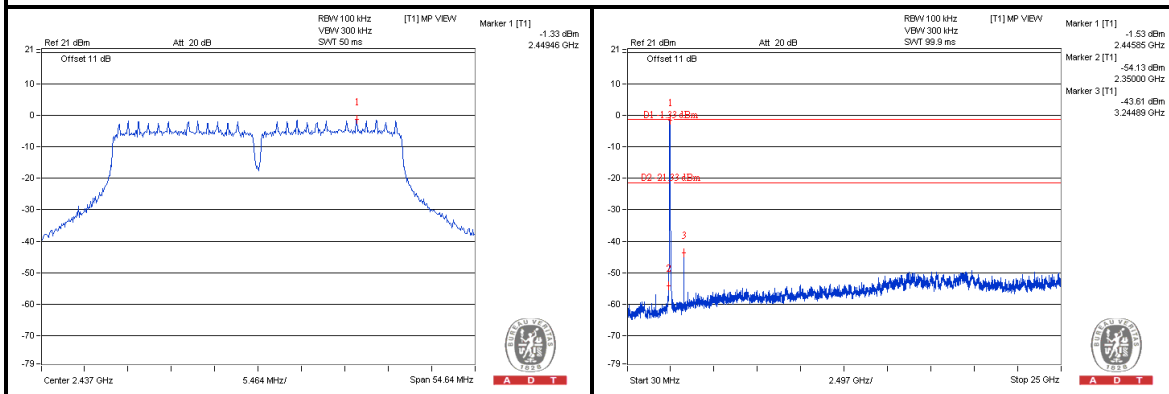


CH 9

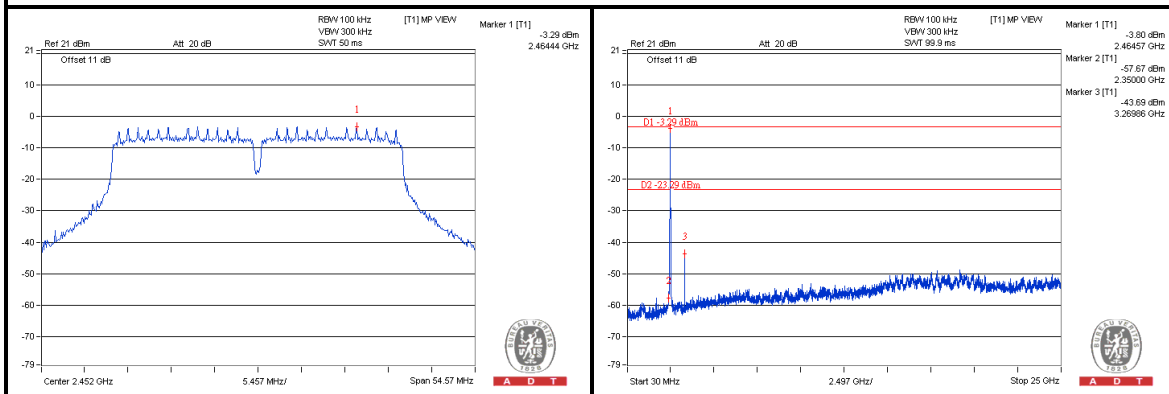

CH 3 Band edge

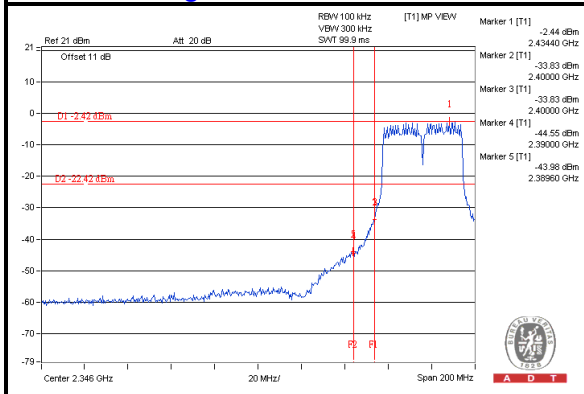

CH 9 Band edge

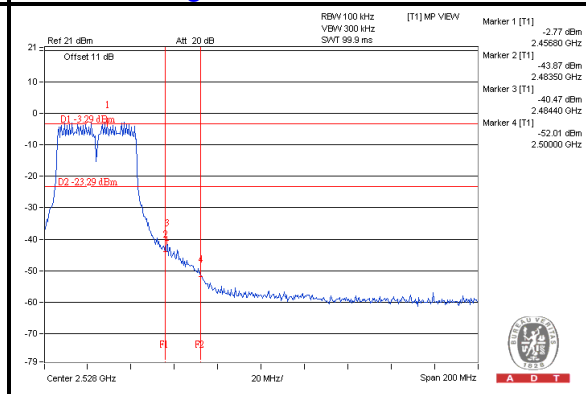



A D T

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.



A D T

7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

--- END ---