




FCC RADIO TEST REPORT

FCC ID : PU5-TP00139A
Equipment : Notebook Computer
Brand Name : Lenovo
Model Name : TP00139A
Applicant : Wistron Corporation
21F, No. 88, Sec. 1, Hsin Tai Wu Rd., Hsichih
Dist, New Taipei City 221, Taiwan
Manufacturer : Lenovo PC HK Limited.
23/F, Lincoln House, Taikoo Place, 979
King's Road, Quarry Bay, Hong Kong, China
Standard : FCC Part 15 Subpart C §15.247

Equipment: Murata LBEE5QG2CX tested inside of Lenovo Notebook Computer.

The product was received on Jan. 06, 2022 and testing was performed from Jan. 08, 2022 to Feb. 17, 2022. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.



Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	6
1.3 Modification of EUT	6
1.4 Testing Location	6
1.5 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	7
2.3 Connection Diagram of Test System.....	8
2.4 Support Unit used in test configuration and system	8
2.5 EUT Operation Test Setup	8
3 Test Result	9
3.1 Output Power Measurement.....	9
3.2 Radiated Band Edges and Spurious Emission Measurement	10
3.3 Antenna Requirements.....	13
4 List of Measuring Equipment.....	14
5 Uncertainty of Evaluation	15
Appendix A. Conducted Test Results	
Appendix B. Radiated Spurious Emission	
Appendix C. Radiated Spurious Emission Plots	
Appendix D. Duty Cycle Plots	
Appendix E. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR1N0803C	01	Initial issue of report	Mar. 01, 2022
FR1N0803C	02	1. Revise section 1.2 Maximum (Average) Output Power to antenna 2. Revise appendix A.	Mar. 03, 2022

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
-	15.247(a)(2)	6dB Bandwidth	Not Required	-
-	2.1049	99% Occupied Bandwidth	Not Required	-
3.1	15.247(b)	Power Output Measurement	Pass	-
-	15.247(e)	Power Spectral Density	Not Required	-
-	15.247(d)	Conducted Band Edges	Not Required	-
		Conducted Spurious Emission	Not Required	-
3.2	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	0.85 dB under the limit at 2483.520 MHz
-	15.207	AC Conducted Emission	Not Required	-
3.3	15.203 & 15.247(b)	Antenna Requirement	Pass	-

Note:

1. Not required means after assessing, test items are not necessary to carry out.
2. This is a variant report by removing WWAN function. All the test cases were performed on original report which can be referred to Sporton Report Number FR1D1645-01C. Based on the original report, the test cases were verified.

Declaration of Conformity:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
2. The measurement uncertainty please refer to this report "Uncertainty of Evaluation".

Comments and Explanations:

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sheng Kuo

Report Producer: Clio Lo

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Notebook Computer
Brand Name	Lenovo
Model Name	TP00139A
FCC ID	PU5-TP00139A
Sample 1	EUT with INPAQ Antenna
Sample 2	EUT with WNC Antenna
EUT supports Radios application	WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80/VHT160 WLAN 11ax HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE
EUT Stage	Production Unit

Remark:

1. The above EUT's information was declared by manufacturer.
2. Equipment: Murata LBEE5QG2CX tested inside of Lenovo Notebook Computer.

Antenna Information			
Antenna 1	Manufacturer	INPAQ	
	Antenna Type	PIFA Antenna	PIFA Antenna
	Part number	025.901YK.0011	025.901YL.0011
	Peak gain (dbi)	Main Antenna : WLAN (2.4G): 2.48 dBi	Aux Antenna : WLAN (2.4G): 2.45 dBi
Antenna 2	Manufacturer	WNC	
	Antenna Type	PIFA Antenna	PIFA Antenna
	Part number	025.901YK.0001	025.901YL.0001
	Peak gain (dbi)	Main Antenna : WLAN (2.4G): 2.62 dBi	Aux Antenna : WLAN (2.4G): 2.54 dBi

Remark: The EUT's information above is declared by manufacturer. Please refer to Comments and Explanations in report summary.

1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard			
Tx/Rx Channel Frequency Range	2412 MHz ~ 2472 MHz		
Maximum (Average) Output Power to antenna	MIMO <Chain 1+2> 802.11b : 16.81 dBm (0.048 W)		
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) 802.11ax : OFDMA (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)		
Antenna Function for Transmitter		Chain 1	Chain 2
	802.11b MIMO	V	V

Remark: MIMO Chain 1+2 is a calculated result from sum of the power MIMO Chain 1 and MIMO Chain 2.

1.3 Modification of EUT

No modifications made to the EUT during the testing.

1.4 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No.
	TH05-HY, 03CH20-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786

1.5 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r02
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.

2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		

2.2 Test Mode

The final test modes consider the modulation and the worst data rates as shown in the table below.

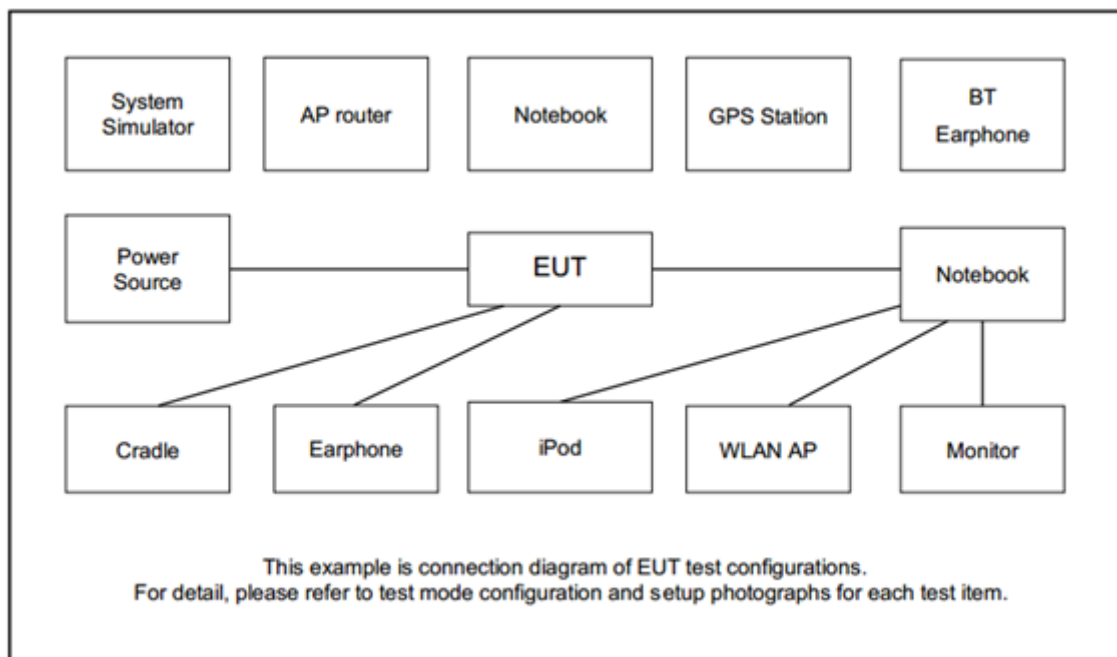
MIMO Antenna

Modulation	Data Rate
802.11ax HE40	MCS0

Ch. #	2400-2483.5 MHz
	802.11ax HE40
Low	-
Middle	-
High	11

Remark: For Radiated Test Cases, the tests were performed with Sample 2.

2.3 Connection Diagram of Test System



2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0 m	N/A

2.5 EUT Operation Test Setup

The RF test items, utility “QRCT v4.0.00154.0” was installed in EUT which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

3 Test Result

3.1 Output Power Measurement

3.1.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna with directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

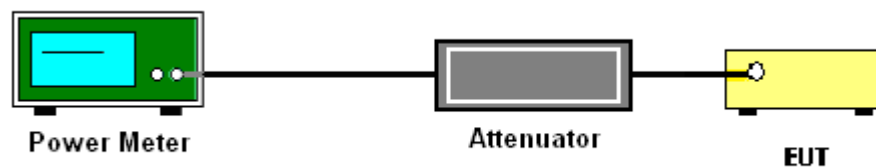
3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Measure the conducted output power and record the results in the test report.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

3.1.4 Test Setup



3.1.5 Test Result of Average Output Power

Please refer to Appendix A.

3.2 Radiated Band Edges and Spurious Emission Measurement

3.2.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device is measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2 Measuring Instruments

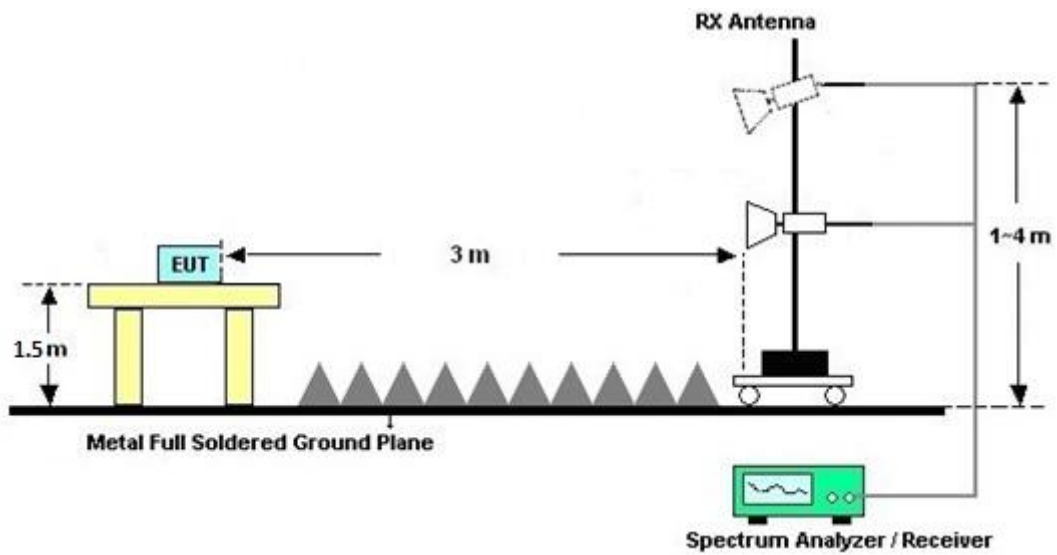
Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

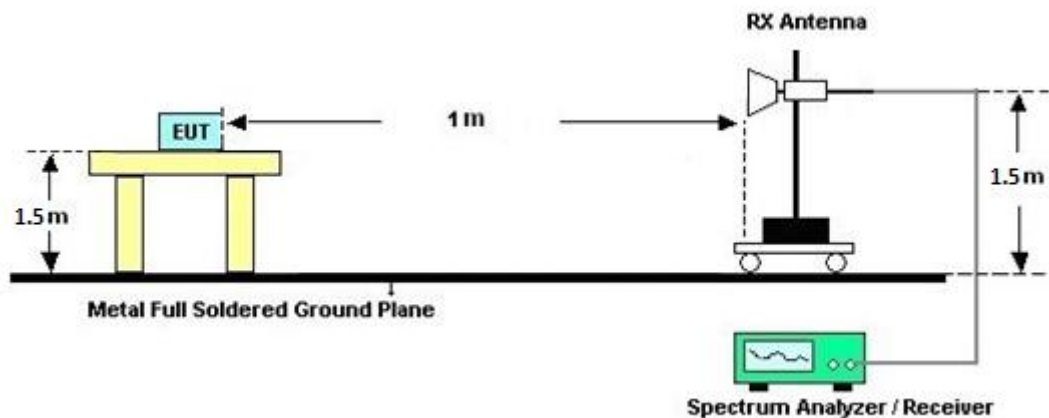
1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, $VBW = 3$ MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.2.4 Test Setup

For radiated test from 1GHz to 18GHz



For radiated test above 18GHz



3.2.5 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B and C.

3.2.6 Duty Cycle

Please refer to Appendix D.

3.2.7 Test Result of Radiated Spurious Emission

Please refer to Appendix B and C.

3.3 Antenna Requirements

3.3.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.3.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.3.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9010B	MY60241055	10Hz~44GHz	Jul. 12, 2021	Feb. 14, 2022~ Feb. 17, 2022	Jul. 11, 2022	Radiation (03CH20-HY)
Amplifier	EMCI	EMC118A45S E	980792	N/A	Nov. 15, 2021	Feb. 14, 2022~ Feb. 17, 2022	Nov. 14, 2022	Radiation (03CH20-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	Jun. 22, 2021	Feb. 14, 2022~ Feb. 17, 2022	Jun. 21, 2022	Radiation (03CH20-HY)
Horn Antenna	SCHWARZB ECK	BBHA 9120 D	9120D-02294	1GHz~18GHz	Jun. 23, 2021	Feb. 14, 2022~ Feb. 17, 2022	Jun. 22, 2022	Radiation (03CH20-HY)
SHF-EHF Horn Antenna	SCHWARZB ECK	BBHA9170	00991	18GHz-40GHz	May 12, 2021	Feb. 14, 2022~ Feb. 17, 2022	May 11, 2022	Radiation (03CH20-HY)
Hygrometer	TECEPEL	DTM-303B	TP200728	N/A	Mar. 09, 2021	Feb. 14, 2022~ Feb. 17, 2022	Mar. 08, 2022	Radiation (03CH20-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	519229/2,804 015/2,804027 /2	N/A	Jan. 19, 2022	Feb. 14, 2022~ Feb. 17, 2022	Jan. 18, 2023	Radiation (03CH20-HY)
1.53GHz Low Pass Filter	Wainwright	WLK4-1000-15 30-8000-40SS	SN27	N/A	May 25, 2021	Feb. 14, 2022~ Feb. 17, 2022	May 24, 2022	Radiation (03CH20-HY)
Filter	Wainwright	WHKX12-2700 -3000-18000-6 OST	SN8	N/A	Mar. 26, 2021	Feb. 14, 2022~ Feb. 17, 2022	Mar. 25, 2022	Radiation (03CH20-HY)
Software	Audix	E3 6.2009-8-24	RK-002156	N/A	N/A	Feb. 14, 2022~ Feb. 17, 2022	N/A	Radiation (03CH20-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Feb. 14, 2022~ Feb. 17, 2022	N/A	Radiation (03CH20-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Feb. 14, 2022~ Feb. 17, 2022	N/A	Radiation (03CH20-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Feb. 14, 2022~ Feb. 17, 2022	N/A	Radiation (03CH20-HY)
Hygrometer	TECEPEL	DTM-303A	TP201996	N/A	Nov. 16, 2021	Jan. 08, 2022 ~ Feb. 13, 2022	Nov. 15, 2022	Conducted (TH05-HY)
Power Meter	DARE	RPR3006W	16I00054SN O12 (NO:113)	10MHz~6GHz	Dec. 16, 2021	Jan. 08, 2022 ~ Feb. 13, 2022	Dec. 15, 2022	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100057	9kHz-40GHz	Dec. 30, 2021	Jan. 08, 2022 ~ Feb. 13, 2022	Dec. 29, 2022	Conducted (TH05-HY)
Switch Control Manframe	E-IUSTRUM ENT	ETF-1405-0	EC1900067 (BOX7)	N/A	Aug. 12, 2021	Jan. 08, 2022 ~ Feb. 13, 2022	Aug. 11, 2022	Conducted (TH05-HY)

5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2 dB
--	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.7 dB
--	--------

Appendix A. Test Results of Conducted Test Items

Test Engineer:	Benny Ku/Junyu Jhou	Temperature:	19.3~22.4	°C
Test Date:	2022/1/8~2022/2/13	Relative Humidity:	49.5~67.2	%

Remark: For Conducted Test Items, Ant. 1 means Chain 1 (Aux.) and Ant. 2 means Chain 2 (Main).

TEST RESULTS DATA
Average Output Power

2.4GHz Band MIMO																
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant1	Ant2	SUM	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	
11b	1Mbps	2	6	2437	13.80	13.80	16.81	30.00		2.62		19.43		36.00		Pass

Note: Measured power (dBm) has offset with cable loss.



Appendix B. Radiated Spurious Emission

Test Engineer :	Bill Chang and JC Liang	Temperature :	20~25°C
		Relative Humidity :	50~60%

Remark: For Radiated Spurious Emission Test Items, Ant. 1 means Chain 1 (Aux.) and Ant. 2 means Chain 2 (Main).

2.4GHz 2400~2483.5MHz

WIFI 802.1111ax HE40 Partial RU484/65 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11 ax HE40 Partial RU484 65 CH 11 2462MHz		2353.68	48.9	-25.1	74	39.43	27.11	18.62	36.26	400	232	P	H
		2389.52	37.84	-16.16	54	28.17	27.26	18.68	36.27	400	232	A	H
	*	2462	96.22	-	-	86.15	27.55	18.82	36.3	400	232	P	H
	*	2462	86.91	-	-	76.84	27.55	18.82	36.3	400	232	A	H
		2483.52	68.57	-5.43	74	58.39	27.63	18.86	36.31	400	232	P	H
		2483.52	47.76	-6.24	54	37.58	27.63	18.86	36.31	400	232	A	H
		2372.88	49.44	-24.56	74	39.86	27.19	18.65	36.26	299	206	P	V
		2389.2	37.88	-16.12	54	28.21	27.26	18.68	36.27	299	206	A	V
	*	2462	98.37	-	-	88.3	27.55	18.82	36.3	299	206	P	V
	*	2462	89.21	-	-	79.14	27.55	18.82	36.3	299	206	A	V
		2483.52	73.15	-0.85	74	62.97	27.63	18.86	36.31	299	206	P	V
		2483.52	51.63	-2.37	54	41.45	27.63	18.86	36.31	299	206	A	V
Remark		1. No other spurious found. 2. All results are PASS against Peak and Average limit line.											

2.4GHz 2400~2483.5MHz

WIFI 802.11 ax HE40 Partial RU484/65 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11 ax HE40 Partial RU 484/65 CH 11 2462MHz		4924	43.47	-30.53	74	35.29	32.84	12.97	37.63	-	-	P	H
		7386	47.58	-26.42	74	33.75	36.41	16.01	38.59	-	-	P	H
		12690	52.52	-21.48	74	35.05	39.48	21.21	43.22	-	-	P	H
		12690	41.58	-12.42	54	24.11	39.48	21.21	43.22	-	-	A	H
		13335	52.92	-21.08	74	34.36	39.87	21.85	43.16	-	-	P	H
		13335	42.9	-11.1	54	24.34	39.87	21.85	43.16	-	-	A	H
		17985	54.84	-19.16	74	33.73	41.69	24.88	45.46	-	-	P	H
		17985	46.39	-7.61	54	25.28	41.69	24.88	45.46	-	-	A	H
													H
													H
													H
													H
		4924	44	-30	74	35.82	32.84	12.97	37.63	-	-	P	V
		7386	47.14	-26.86	74	33.31	36.41	16.01	38.59	-	-	P	V
		12695	52.29	-21.71	74	34.8	39.49	21.22	43.22	-	-	P	V
		12695	41.73	-12.27	54	24.24	39.49	21.22	43.22	-	-	A	V
		13365	52.89	-21.11	74	34.26	39.93	21.87	43.17	-	-	P	V
		13365	42.96	-11.04	54	24.33	39.93	21.87	43.17	-	-	A	V
		17895	55.54	-18.46	74	35.05	41.06	24.82	45.39	-	-	P	V
		17895	45.82	-8.18	54	25.33	41.06	24.82	45.39	-	-	A	V
													V
													V
													V
												V	
Remark	1. No other spurious found.												
	2. All results are PASS against Peak and Average limit line.												
	3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												
	4. The emission level close to 18GHz is checked that the average emission level is noise floor only.												

**Note symbol**

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical

A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix C. Radiated Spurious Emission Plots

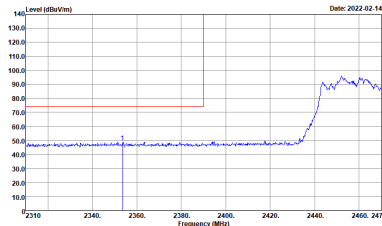
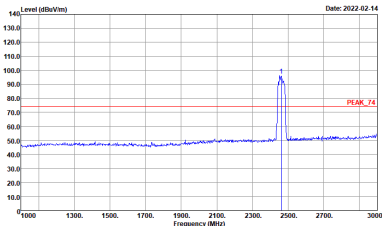
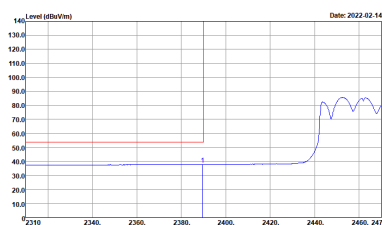
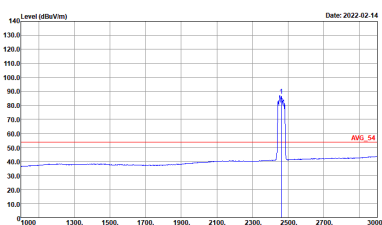
Test Engineer :	Bill Chang and JC Liang	Temperature :	20~25°C
		Relative Humidity :	50~60%

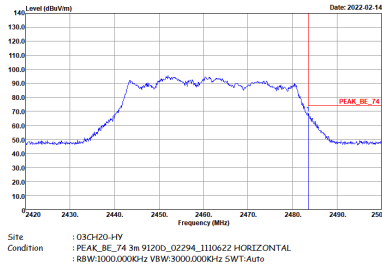
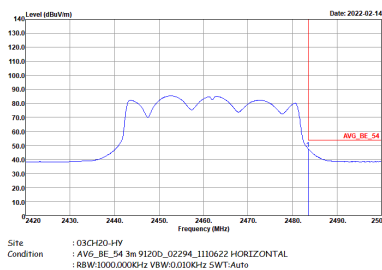
Remark: For Radiated Spurious Emission Plots Test Items, Ant. 1 means Chain 1 (Aux.) and Ant. 2 means Chain 2 (Main).

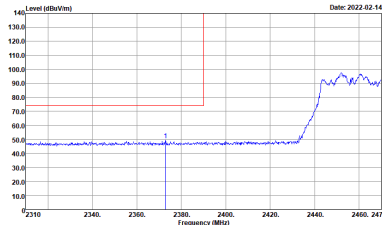
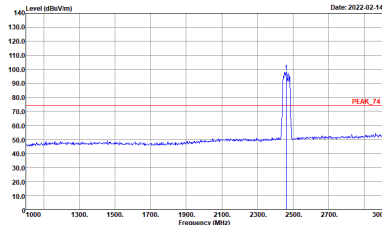
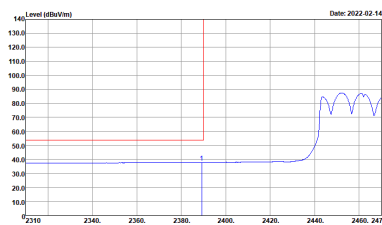
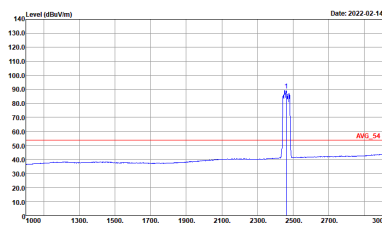
Note symbol

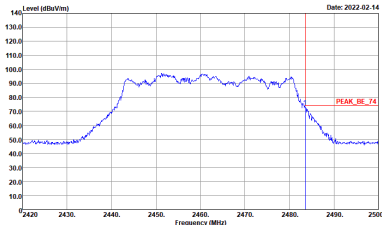
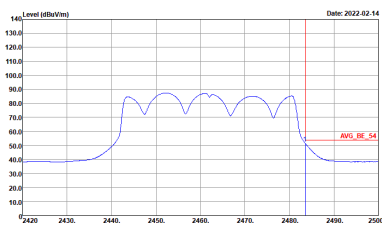
-L	Low channel location
-R	High channel location

2.4GHz 2400~2483.5MHz
WIFI 802.11ax HE40 Partial RU484/65 (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ax HE40 Partial RU484/65 CH11 2462MHz - L	
1+2	Horizontal	Fundamental
Peak	 Site Condition : 03CH20-HV : PEAK_BE_74 3m 91200_02294_1110622 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site Condition : 03CH20-HV : PEAK_74 3m 91200_02294_1110622 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
	 Site Condition : 03CH20-HV : AVG_BE_54 3m 91200_02294_1110622 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	 Site Condition : 03CH20-HV : AVG_54 3m 91200_02294_1110622 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto
Avg.		

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ax HE40 Partial RU484/65 CH11 2462MHz - R	
1+2	Horizontal	Fundamental
Peak		Left blank
Avg.		Left blank

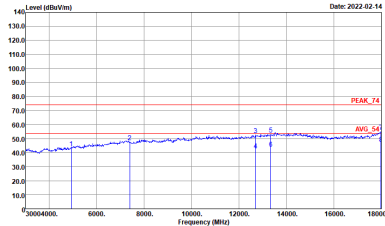
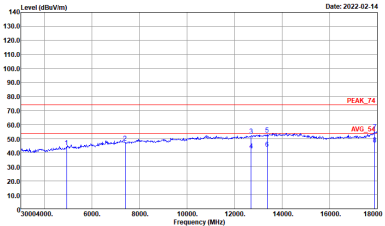
WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ax HE40 Partial RU484/65 CH11 2462MHz - L	
1+2	Vertical	Fundamental
Peak	 Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02294_1110622 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH20-HY Condition : PEAK_74 3m 91200_02294_1110622 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	 Site : 03CH20-HY Condition : AVG_BE_74 3m 91200_02294_1110622 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	 Site : 03CH20-HY Condition : AVG_74 3m 91200_02294_1110622 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ax HE40 Partial RU484/65 CH11 2462MHz - R	
1+2	Vertical	Fundamental
Peak	 Site : 03CH20-HV Condition : PEAK_BE_74 3m 91200_02294_1110622 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank
Avg.	 Site : 03CH20-HV Condition : AVG_BE_54 3m 91200_02294_1110622 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	Left blank



2.4GHz 2400~2483.5MHz

WIFI 802.11 ax HE40 Partial RU484 65 (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11ax HE40 Partial RU484/65 CH11 2462MHz	
1+2	Horizontal	Vertical
Peak Avg.	 Site : 03CH20-4V Condition : PEAK_74 3m 91200_02294_1110622 HORIZONTAL	 Site : 03CH20-4V Condition : PEAK_74 3m 91200_02294_1110622 VERTICAL

Appendix D. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
1+2	2.4GHz 802.11ax HE40 484 RU	98.81	-	-	10Hz

MIMO <Ant. 1+2>

