



FCC PART 20.21


TEST REPORT

For

Signifi Mobile Inc

1001 Rue Lenoir Suite A-414 Montreal Quebec, H4C 2Z6 Canada

FCC ID: 2AJAN5035CPAL

Report Type: Original Report	Product Type: Uniden Cellular Signal Booster
Report Number: RSZ210105002-00	
Report Date: 2021-01-30	
Jimmy Xiao 	
Reviewed By: RF Engineer	
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
SPECIAL ACCESSORIES	6
EQUIPMENT MODIFICATIONS	7
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE	7
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
TEST EQUIPMENT LIST	9
§ 20.21(E)(3) – AUTHORIZED FREQUENCY BAND VERIFICATION	11
APPLICABLE STANDARD	11
TEST PROCEDURE	11
TEST DATA	12
§ 20.21(e)(8)(i)(D), § 20.21(e)(8)(i)(B)& §20.21(e)(4)– MAXIMUM POWER MEASUREMENT	18
APPLICABLE STANDARD	18
TEST PROCEDURE	18
TEST DATA	19
§ 20.21(e)(8)(i)(C)(2), § 20.21(e)(8)(i)(B)&§20.21(e)(4) – MAXIMUM BOOSTER GAIN COMPUTATION	21
APPLICABLE STANDARDS	21
TEST PROCEDURE	21
TEST DATA	21
§ 20.21(e)(8)(i)(F)- INTERMODULATION PRODUCT	23
APPLICABLE STANDARDS	23
TEST PROCEDURE	23
TEST DATA	24
§ 20.21(e)(8)(i)(E)- OUT OF BAND EMISSIONS	35
APPLICABLE STANDARDS	35
TEST PROCEDURE	35
TEST DATA	36
§ 20.21(e)(8)(i)(A), § 20.21(e)(8)(i)(H) &§20.21(e)(4) - NOISE LIMITS	97
APPLICABLE STANDARDS	97
TEST PROCEDURE	97
TEST DATA	98
§ 20.21(e)(8)(i)(I) &§20.21(e)(4) - UPLINK INACTIVITY	109
APPLICABLE STANDARDS	109
TEST PROCEDURE	109

TEST DATA	110
§ 20.21(e)(8)(i)(C)(1) & § 20.21(e)(8)(i)(H) - VARIABLE BOOSTER GAIN.....	113
APPLICABLE STANDARDS.....	113
TEST PROCEDURE	113
TEST DATA	114
§ 2.1049 - OCCUPIED BANDWIDTH	119
APPLICABLE STANDARDS.....	119
TEST PROCEDURE	119
TEST DATA	120
§ 20.21(e)(8)(ii)(A) & §20.21(e)(4) - OSCILLATION DETECTION	151
APPLICABLE STANDARDS.....	151
TEST PROCEDURE	151
TEST DATA	151
§2.1051- SPURIOUS EMISSIONS AT ANTENNA TERMINALS	166
APPLICABLE STANDARDS.....	166
TEST PROCEDURE	166
TEST DATA	167
§ 2.1053 - RADIATED SPURIOUS EMISSIONS	187
APPLICABLE STANDARDS.....	187
TEST PROCEDURE	187
TEST DATA	188

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	Uniden Cellular Signal Booster
Tested Model	5035CPAL
Multiple Model	5025CPAL, 5015CPAL
Model Differences	Refer to the DoS letter
Voltage Range	DC 12V from adapter
Date of Test	2021-01-19 to 2021-01-28
Sample serial number	RSZ210105002-RF-S1 (Assigned by BACL, Shenzhen)
Received date	2021-01-05
Sample/EUT Status	Good condition
Adapter information	Model: GM50-120300-F Input: AC 100-240V, 50/60Hz, 1.5A Output: DC 12V, 3.0A

This device is a fixed wideband consumer and the Booster Operating frequency bands list below:

Electrical specification	Uplink	Downlink
Frequency Range	698 ~ 716MHz	728 ~ 746MHz
	776 ~ 787MHz	746 ~ 757MHz
	824 ~ 849 MHz	869 ~ 894 MHz
	1850 ~ 1915MHz	1930 ~ 1995MHz
	1710 ~ 1755MHz	2110 ~ 2155MHz

Objective

This test report is in accordance with Part 2, Part 20.21 and Part 22, Part 24, Part 27 of the Federal Communication Commissions rules.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of federal Regulations Title 47 Part 2, Sub-part J as well as the following individual parts:

Applicable Standards: KDB 935210 D03 Signal Booster Measurements v04r04.
ANSI C63.26-2015: American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
RF conducted test with spectrum		$\pm 0.9\text{dB}$
Radiated emission	30MHz~1GHz	$\pm 5.91\text{dB}$
	Above 1G	$\pm 4.92\text{dB}$
Occupied Bandwidth		$\pm 0.5\text{kHz}$
Temperature		$\pm 1.0^{\circ}\text{C}$
Humidity		$\pm 6\%$

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 342867, the FCC Designation No. : CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a test mode which has been done in the factory.

Antenna kitting requirement: EUT has some antennas kitting for marketing, the antenna gain and cable loss for varier band were listed below, fulfill the requirement of FCC Part 20.21(e)(8)(i)(G), more detail information please refer to the user manuals.

Outdoor antenna:

Frequency Range (MHz)	Antenna Gain (dBi)		Cable loss (dB)
	Yagi antenna	Panel antenna	
698-716	8	7	4.97
776-787	8	7	4.97
824-849	8	7	5.17
1850-1915	9	7	7.51
1710-1755	9	7	7.51

Indoor antenna:

Frequency Range (MHz)	Antenna Gain (dBi)		Cable loss (dB)
	Panel antenna	Omni antenna	
728-746	5	3	4.97
746-757	5	3	4.97
869-894	5	3	5.17
1930-1995	7	3	7.51
2110-2155	7	3	7.51

Note: the antenna gain and cable loss list above was provided by manufacturer.

EUT Exercise Software

No exercise software was used.

Special Accessories

No special accessory was used.

Equipment Modifications

No modification was made to the EUT tested.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Unknown	50ΩLoad	Unknown	BACLoad002
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	1201.002K50-146520-wh

External I/O Cable

Cable Description	Length (m)	From/Port	To
Un-shielded Un-detachable DC cable	1.2	Adapter	EUT
Shielded Detachable RF cable	1.0	CMW500	EUT

Block Diagram of Test Setup

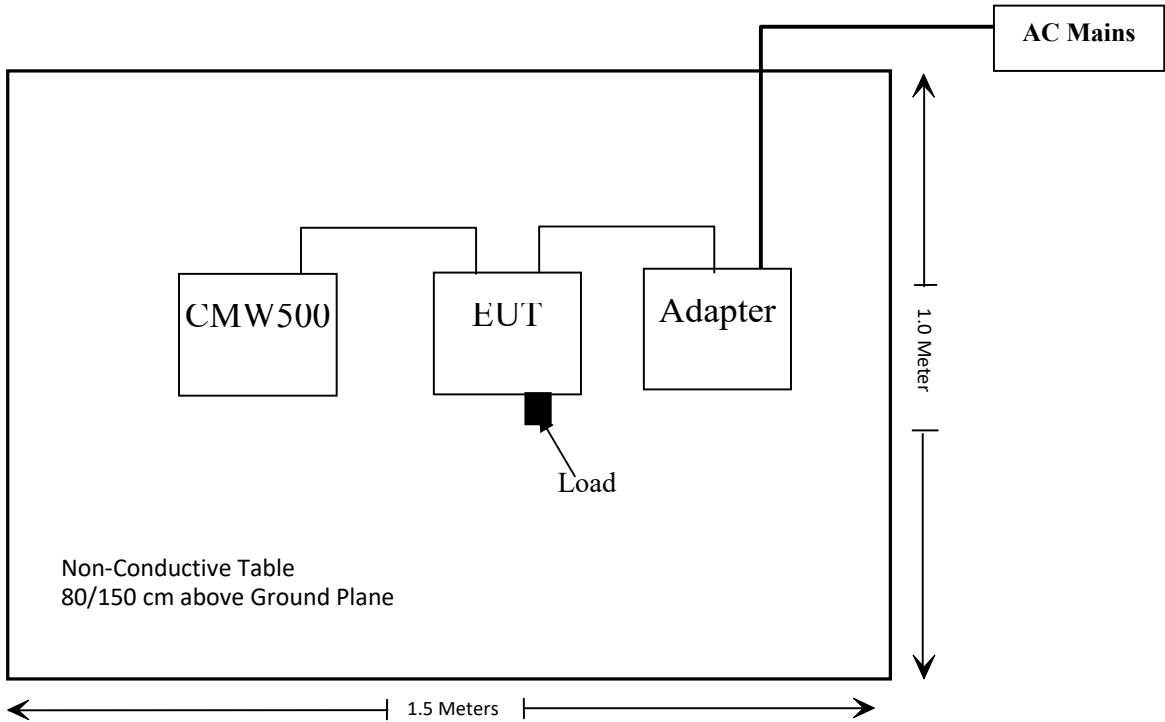

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§20.21(e)(3)	7.1 Authorized Frequency Band Verification	Compliance
§ 20.21(e)(8)(i)(D) § 20.21(e)(8)(i)(B) & §20.21(e)(4)	7.2 Maximum Power Measurement	Compliance
§ 20.21(e)(8)(i)(C)(2) § 20.21(e)(8)(i)(B) & §20.21(e)(4)	7.3 Maximum Booster Gain Computation	Compliance
§ 20.21(e)(8)(i)(B) § 20.21(e)(3)	7.13 Spectrum block filtering test procedure	Not applicable
§ 20.21(e)(8)(i)(F)	7.4 Intermodulation Product	Compliance
§ 20.21(e)(8)(i)(E)	7.5 Out Of Band Emissions	Compliance
§ 20.21(e)(8)(i)(A) § 20.21(e)(8)(i)(H) &§20.21(e)(4)	7.7 Noise Limits	Compliance
§ 20.21(e)(8)(i)(I) &§20.21(e)(4)	7.8 Uplink Inactivity	Compliance
§ 20.21(e)(8)(i)(C)(1) & § 20.21(e)(8)(i)(H)	7.9 Variable Booster Gain	Compliance
§ 2.1049	7.10 Occupied Bandwidth	Compliance
§ 20.21(e)(8)(ii)(A) &§20.21(e)(4)	7.11 Oscillation Detection	Compliance
§2.1051	7.6 Spurious Emissions At Antenna Terminals	Compliance
§ 2.1053	7.12 Radiated Spurious Emissions	Compliance

Not applicable: This item only for wideband consumer boosters utilizing spectrum block filtering.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test					
R&S	EMI Test Receiver	ESR3	102455	2020/08/04	2021/08/03
Sonoma instrument	Pre-amplifier	310 N	186238	2020/08/04	2021/08/03
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2020/12/22	2023/12/21
COM-POWER	Dipole Antenna	AD-100	721027	NCR	NCR
Unknown	Cable 2	RF Cable 2	F-03-EM197	2020/11/29	2021/11/28
Unknown	Cable	Chamber Cable 1	F-03-EM236	2020/11/29	2021/11/28
Rohde & Schwarz	Spectrum Analyzer	FSV40-N	102259	2020/08/04	2021/08/03
COM-POWER	Pre-amplifier	PA-122	181919	2020/11/29	2021/11/28
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2020/11/29	2021/11/28
Sunol Sciences	Horn Antenna	DRH-118	A052604	2020/12/22	2023/12/21
A.H.System	Horn Antenna	SAS-200/571	135	2018/09/01	2021/08/31
Insulted Wire Inc.	RF Cable	SPS-2503-3150	02222010	2020/11/29	2021/11/28
Unknown	RF Cable	W1101-EQ1 OUT	F-19-EM005	2020/11/29	2021/11/28
Ducommun Technologies	Horn antenna	ARH-4223-02	1007726-02 1304	2020/12/06	2023/12/05
Ducommun Technologies	Horn antenna	ARH-4223-02	1007726-01 1304	2020/12/06	2023/12/05
Agilent	Signal Generator	N5183A	MY51040755	2020/12/04	2021/12/04

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted test					
Rohde & Schwarz	SPECTRUM ANALYZER	FSU26	200120	2020/04/03	2021/04/02
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	1201.002K50-146520-wh	2020/08/04	2021/08/03
Agilent	Signal Generator	N5183A	MY51040755	2020/12/04	2021/12/04
WEINSCHEL	10dB Attenuator	5324	AU3842	2020/11/29	2021/11/28
Unknown	RF Cable	Unknown	2301 276	2020/11/29	2021/11/28
Unknown	RF Cable	Unknown	0501 067	2020/11/29	2021/11/28
Agilent	MXG Vector Signal Generator	N5182B	MY53051503	2020/08/04	2021/08/03
Agilent	Adjustable Attenuator	8494B-001	F-03-EM221	2020/11/29	2021/11/28
Rohde & Schwarz	Spectrum Analyzer	FSV40-N	102259	2020/08/04	2021/08/03

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

§ 20.21(E)(3) – AUTHORIZED FREQUENCY BAND VERIFICATION

Applicable Standard

According to § 20.21(e)(3) Frequency Bands

This test is intended to confirm that the signal booster only operates on the CMRS frequency bands authorized for use by the NPS. In addition, this test will identify the frequency at which the maximum gain is realized within each CMRS operational band, which then serves as a basis for subsequent tests.

Test Procedure

- Connect the EUT to the test equipment as shown in Figure 1. Begin with the uplink output connected to the spectrum analyzer.
- Set the spectrum analyzer RBW for 100 kHz with the VBW $\geq 3 \times$ the RBW using a PEAK detector with the MAX HOLD function.
- Set the center frequency of the spectrum analyzer to the center of the operational band under test with a span of 1 MHz.
- Set the signal generator for CW mode and tune to the center frequency of the operational band under test.
- Set the initial signal generator power to a level that is at least 6 dB below the AGC level specified by the manufacturer.
- Slowly increase the signal generator power level until the output signal reaches the AGC operational level.
- Reduce the signal generator power to a level that is 3 dB below the level noted above and manually reset the EUT.
- Reset the spectrum analyzer span to $2 \times$ the CMRS band under test. Adjust the tuned frequency of the signal generator to sweep $2 \times$ the CMRS band using the sweep function. The AGC must not be activated throughout the entire sweep.
- Using three markers, identify the CMRS band edges and the frequency with the highest power. Affirm that the values of all markers are visible on the display of the spectrum analyzer (e.g., marker table set to on).
- Capture the spectrum analyzer trace for inclusion in the test report.
- Repeat 7.1c) to 7.1j) for all operational uplink and downlink bands.

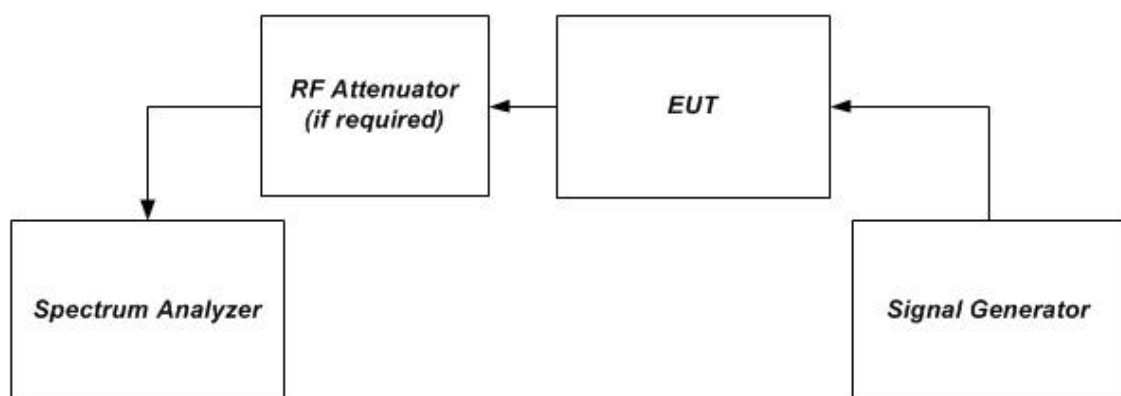


Figure 1 – Band verification test instrumentation setup


Test Data**Environmental Conditions**

Temperature:	23.6 °C
Relative Humidity:	54 %
ATM Pressure:	100.8 kPa

The testing was performed by Coco Liu on 2021-01-09.


Test Result: Pass

Please refer to following plots.

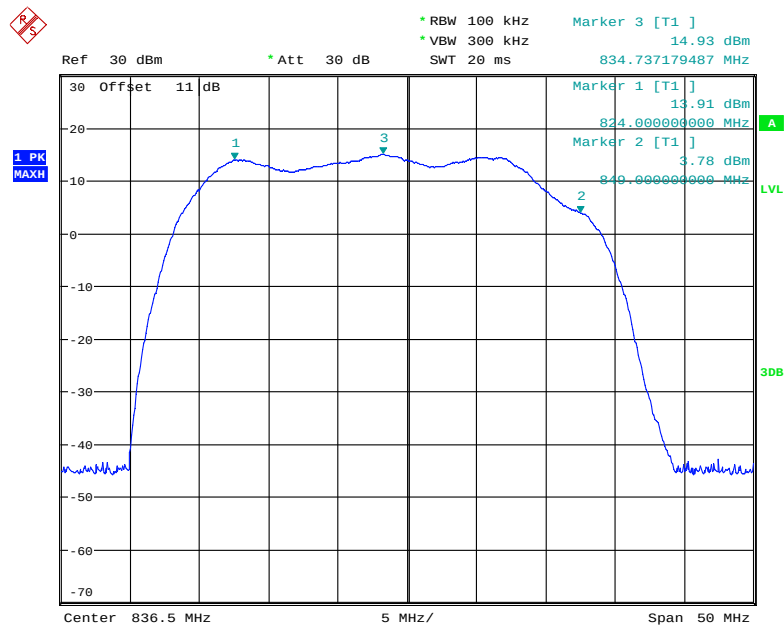Uplink:**Cellular Band**


Date: 9.JAN.2021 13:43:33

PCS Band

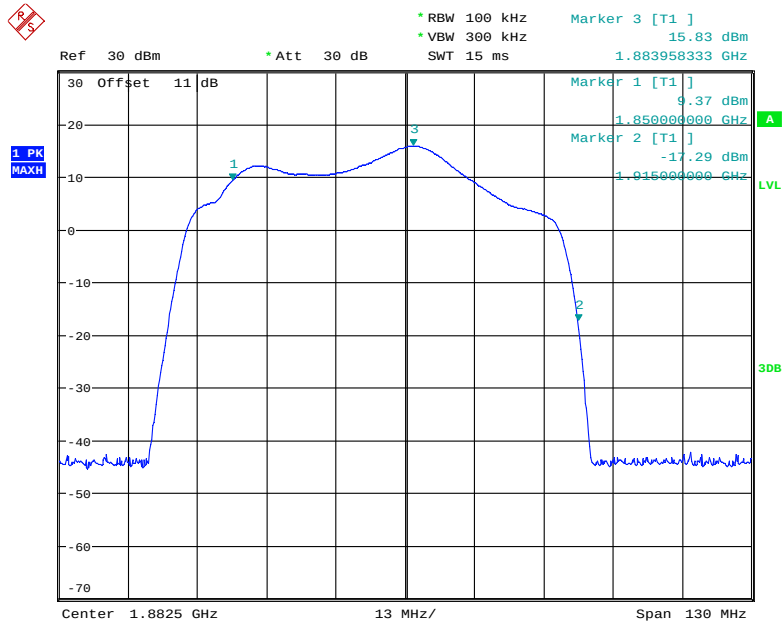


Date: 9.JAN.2021 13:16:55

AWS Band

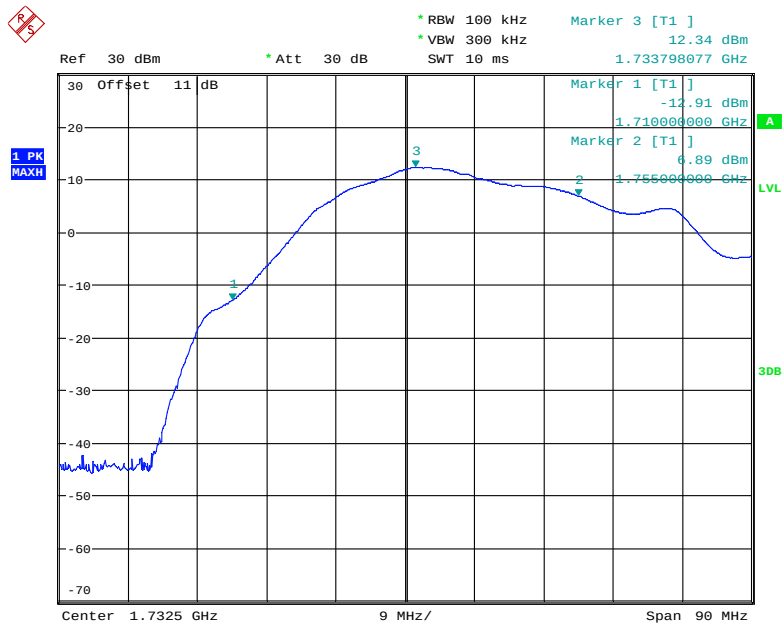


Date: 9.JAN.2021 13:23:30

Lower 700MHz

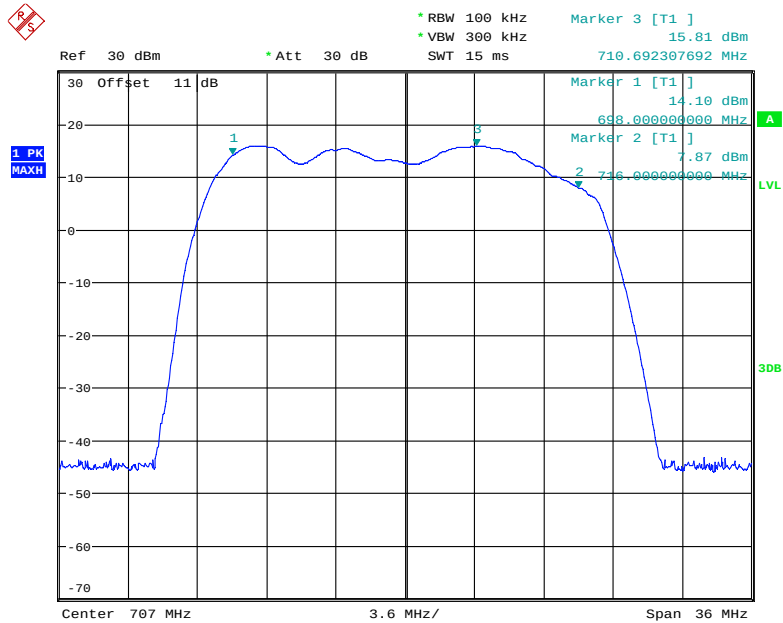

Date: 9.JAN.2021 14:19:50


Upper 700MHz

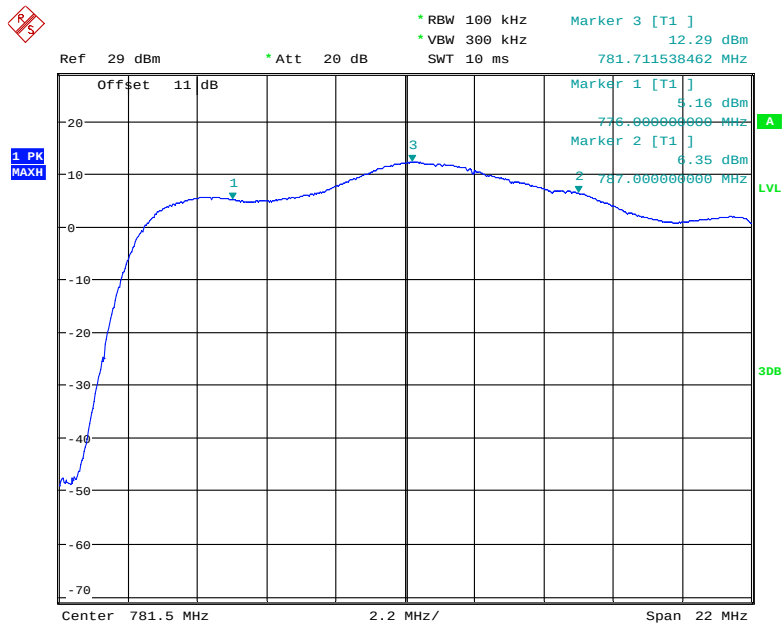

Date: 9.JAN.2021 13:53:39


Downlink:

Cellular Band

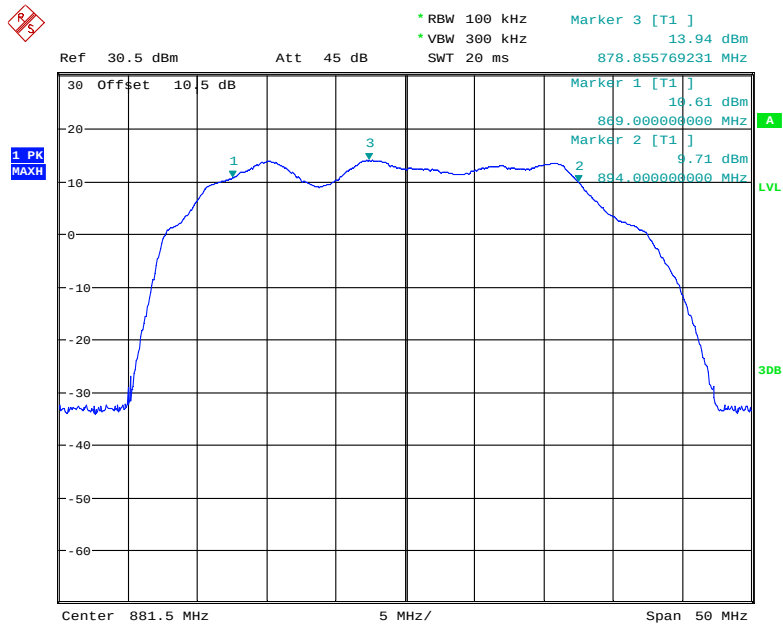


Date: 8.JAN.2021 16:03:01

PCS Band

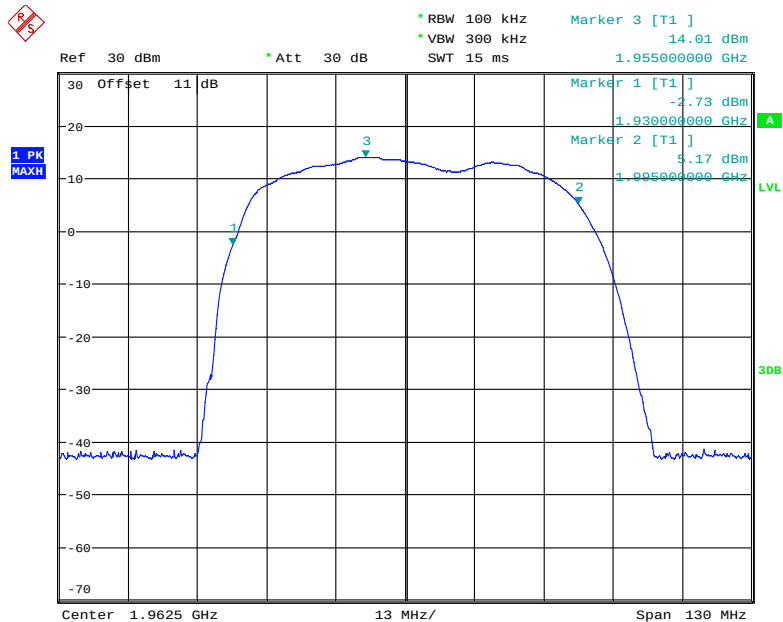


Date: 9.JAN.2021 13:09:04

AWS Band

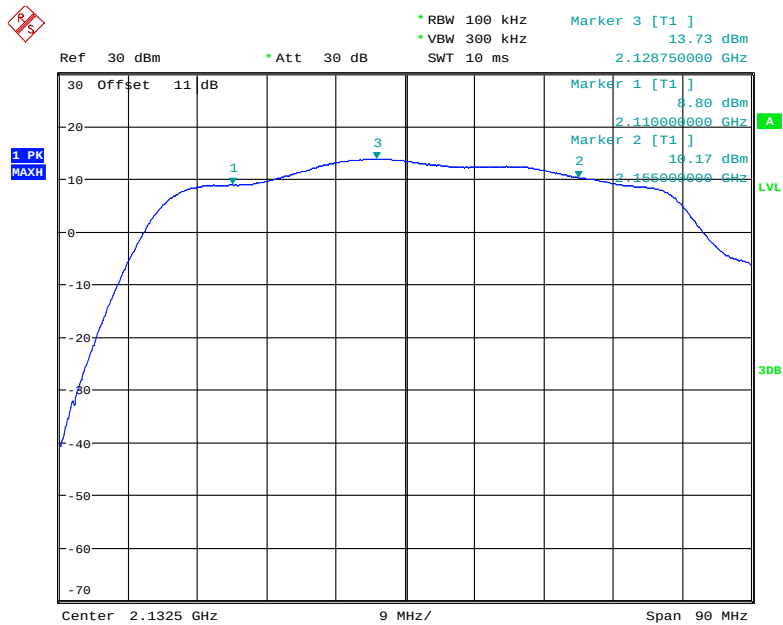


Date: 9.JAN.2021 10:19:29

Lower 700MHz

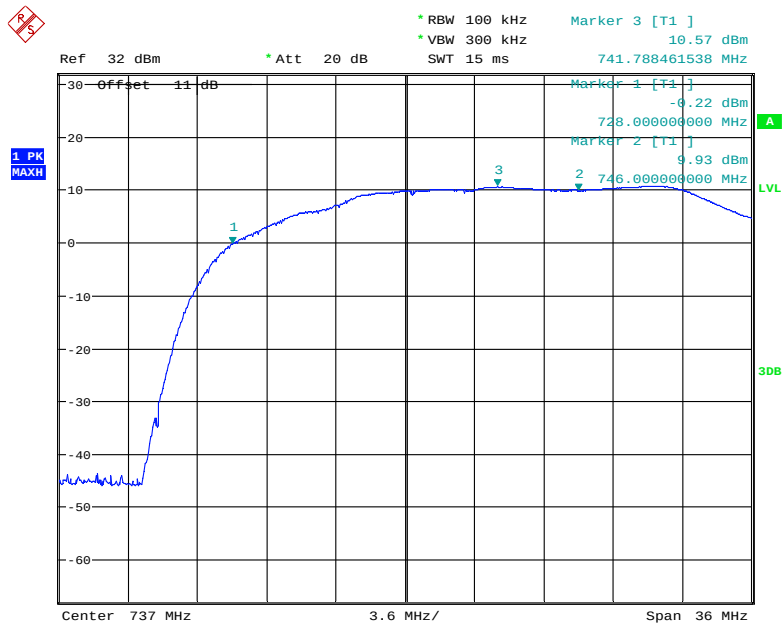

Date: 8.JAN.2021 10:14:30

Upper 700MHz

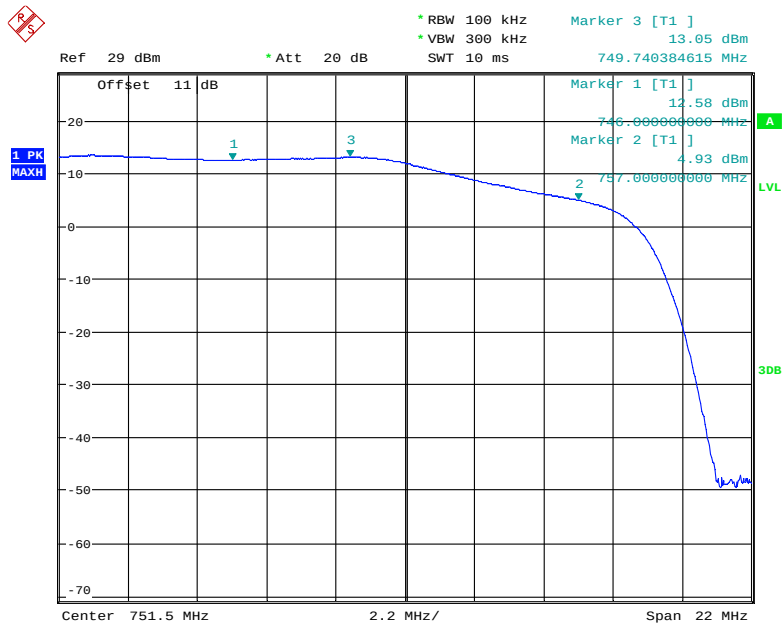

Date: 9.JAN.2021 10:43:47

§ 20.21(e)(8)(i)(D) ,§ 20.21(e)(8)(i)(B)& §20.21(e)(4)– MAXIMUM POWER MEASUREMENT

Applicable Standard

According to § 20.21(e)(8)(i)(D) Power Limits; § 20.21(e)(8)(i)(B) Bidirectional Capability (uplink minimum conducted power output); §20.21(e)(4) Self-monitoring.

This procedure shall be used to demonstrate compliance to the signal booster power limits and requirements as specified in §§ 20.21(e)(8)(i)(D) and 20.21(e)(8)(i)(B) for wideband consumer signal boosters.

- a) Compliance to authorized EIRP limits must be shown using the highest gains from the list of antennas, cabling, and coupling devices declared by the manufacturer for use with the consumer booster.
- b) In addition, the maximum power levels measured in this procedure will be utilized in calculating the maximum gain as described in the next subclause.
- c) The frequency with the highest power level in each operational band as determined in 7.1 is to be measured discretely by applying the following procedure utilizing the stated emission and power detector types independently.
- d) Use a signal generator to create a pulsed CW or GSM signal with a pulse width of 570 μ s and a duty cycle of 12.5% (i.e., one GSM timeslot), then measure utilizing the burst power function of the measuring instrument.
- e) Use a signal generator to create an AWGN signal with a 99% occupied bandwidth of 4.1 MHz, then measure utilizing the channel power or band power function of the measuring instrumentation.
- f) All modes of operation must be verified to maintain operation within authorized limits at the maximum uplink and downlink test levels per device type as defined in 5.4, by increasing the power level in 2 dB steps from the AGC level to the maximum input level specified in 5.5.

Test Procedure

- a) Connect the EUT to the test equipment as shown in Figure 1. Begin with the uplink output (donor port) connected to the spectrum analyzer.
- b) Configure the signal generator and spectrum analyzer for operation on the frequency determined in 7.1 with the highest power level, but with the center frequency of the signal no closer than 2.5 MHz from the band edge. The spectrum analyzer span shall be set to at least 10 MHz.
- c) Set the initial signal generator power to a level well below that which causes AGC control.
- d) Slowly increase the signal generator power level until the output signal reaches the AGC operational limit (from observation of signal behavior on the spectrum analyzer; i.e., no further increase in output power as input power is increased).
- e) Reduce power sufficiently on the signal generator to ensure that the AGC is not controlling the power output.
- f) Slowly increase the signal generator power to a level just below (within 0.5 dB of) the AGC limit without triggering the AGC. Note the signal generator power level as P_{in} .
- g) Measure the output power P_{out} with the spectrum analyzer as follows.
 - 1) Set RBW = 100 kHz for AWGN signal type and 300 kHz for CW or GSM signal type.
 - 2) Set VBW $\geq 3 \times$ RBW.
 - 3) Select either the BURST POWER or CHANNEL POWER measurement tool, as required for each signal type. The channel power integration bandwidth shall be 99% occupied bandwidth (4.1 MHz).
 - 4) Select the RMS (power averaging) detector.
 - 5) Ensure that the number Note: This requirement
 - 6) Set sweep time = auto

- 7) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- h) Record the measured power level as P_{OUT} with one set of results for the GSM or CW input stimulus and another set of results for the AWGN input stimulus.
- i) Repeat step h) while increasing the signal generator amplitude in 2 dB steps until the maximum input level indicated in 5.5 is reached. If the booster has shut down at any point during the input power steps it should be noted and step h) shall be repeated at an input level 1 dB less than that found to cause the shutdown.
- j) Repeat the entire procedure for each operational uplink and downlink frequency band supported by the booster.
- k) Provide tabulated results in the test report.

Test Data

Environmental Conditions

Temperature:	25.2 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Coco Liu on 2021-01-19.

Test Result: Pass

Please refer to the following tables

AGC Level:

Mode	Operation Band	Signal type	AGC level	Mode	Operation Band	Signal type	AGC level
			dBm				dBm
Uplink	Lower 700 MHz	AWGN	-41.2	Downlink	Lower 700 MHz	AWGN	-46.2
		GSM	-40.8			GSM	-46.8
	Upper 700 MHz	AWGN	-40.7		Upper 700 MHz	AWGN	-45.9
		GSM	-42.3			GSM	-46.7
	Cellular	AWGN	-43.9		Cellular	AWGN	-45.8
		GSM	-43.1			GSM	-45.7
	PCS	AWGN	-50.8		PCS	AWGN	-54.3
		GSM	-49.7			GSM	-54.2
	AWS	AWGN	-49.8		AWS	AWGN	-55.2
		GSM	-50.7			GSM	-54.3

Output Power: (worst case using panel antenna for indoor and yagi antenna for outdoor)

Mode	Operation Band	Signal type	Pre AGC Input level	Conducted Output level	Antenna Gain	Cable loss	EIRP	Limit
			dBm	dBm	dB	dB	dBm	dBm
Uplink	Lower 700 MHz	AWGN	-41.5	20.90	8	4.97	23.93	17-30
		GSM	-41.0	22.00			25.03	
	Upper 700 MHz	AWGN	-41.0	19.14	8	4.97	22.17	
		GSM	-42.5	21.50			24.53	
	Cellular	AWGN	-44.0	19.07	8	5.17	21.90	
		GSM	-43.5	20.50			23.33	
	PCS	AWGN	-51.0	19.11	9	7.51	20.60	
		GSM	-50.0	21.20			22.69	
	AWS	AWGN	-50.0	20.00	9	7.51	21.49	
		GSM	-51.0	20.90			22.39	
Downlink	Lower 700 MHz	AWGN	-46.5	16.14	5	4.97	16.17	≤17
		GSM	-47.0	16.23			16.26	
	Upper 700 MHz	AWGN	-46.0	16.62	5	4.97	16.65	
		GSM	-47.0	16.20			16.23	
	Cellular	AWGN	-46.0	16.16	5	5.17	15.99	
		GSM	-46.0	16.77			16.60	
	PCS	AWGN	-54.5	16.38	7	7.51	15.87	
		GSM	-54.5	16.69			16.18	
	AWS	AWGN	-55.5	16.34	7	7.51	15.83	
		GSM	-54.5	16.82			16.31	

Maximum Input level:

Mode	Operation Band	Signal type	Maximum Input level	Maximum Input level Limits	Conducted Output level
			dBm	dBm	dBm
Uplink	Lower 700 MHz	AWGN	-28.0	27.0	20.83
		GSM	-29.0		22.10
	Upper 700 MHz	AWGN	-29.0		19.23
		GSM	-28.0		21.41
	Cellular	AWGN	-30.0		19.12
		GSM	-31.5		20.35
	PCS	AWGN	-39.0		19.22
		GSM	-37.5		21.13
	AWS	AWGN	-38.5		20.10
		GSM	-38.5		20.81
Downlink	Lower 700 MHz	AWGN	-35.5	-20	16.31
		GSM	-36.0		16.35
	Upper 700 MHz	AWGN	-35.5		16.51
		GSM	-36.0		16.25
	Cellular	AWGN	-34.0		16.05
		GSM	-34.0		16.53
	PCS	AWGN	-43.5		16.44
		GSM	-42.5		16.72
	AWS	AWGN	-44.5		16.41
		GSM	-45.0		16.62

§ 20.21(e)(8)(i)(C)(2), § 20.21(e)(8)(i)(B)&§20.21(e)(4) – MAXIMUM BOOSTER GAIN COMPUTATION

Applicable Standards

According to § 20.21(e)(8)(i)(C)(2) (ii) Booster Gain Limits (maximum gain); § 20.21(e)(8)(i)(B) Bidirectional Capability (equivalent uplink and downlink gain); §20.21(e)(4) Self-monitoring.

This subclause provides guidance on the computation of the maximum gain based on the results obtained from previous measurements. The NPS limits on maximum gain for fixed and mobile wideband consumer signal boosters are provided in § 20.21(e)(8)(i)(C)(2). Additionally, § 20.21(e)(8)(i)(B) requires that wideband consumer signal boosters be able to provide equivalent uplink and downlink gain (within 9 dB)

Test Procedure

- Calculate the maximum gain of the booster as follows to demonstrate compliance to the applicable gain limits as specified.
- For both the uplink and downlink in each supported frequency band, use each of the P_{OUT} and P_{IN} result pairs for all signal types used in 7.2 in the following equation to determine the maximum gain (G) of the booster:
$$G \text{ (dB)} = P_{OUT}(\text{dBm}) - P_{IN}(\text{dBm}).$$
- Record the maximum gain of the uplink and downlink paths for each supported frequency band, and verify that the each gain value complies with the applicable limit.
- Provide tabulated results in the test report.

Test Data

Environmental Conditions

Temperature:	25.2 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Coco Liu on 201-01-19.

Test Result: Pass

Please refer to the following tables:

Maximum gain:

Mode	Operation Band	Signal type	Pre AGC Input level	Conducted Output level	Gain	Limit
			dBm	dBm	dB	dB
Uplink	Lower 700 MHz	AWGN	-41.5	20.90	62.40	63.49
		GSM	-41.0	22.00	63.00	
	Upper 700 MHz	AWGN	-41.0	19.14	60.14	64.36
		GSM	-42.5	21.50	64.00	
	Cellular	AWGN	-44.0	19.07	63.07	64.95
		GSM	-43.5	20.50	64.00	
	AWS	AWGN	-51.0	19.11	70.11	71.27
		GSM	-50.0	21.20	71.20	
	PCS	AWGN	-50.0	20.00	70.00	71.99
		GSM	-51.0	20.90	71.90	
Downlink	Lower 700 MHz	AWGN	-46.5	16.14	62.64	63.49
		GSM	-47.0	16.23	63.23	
	Upper 700 MHz	AWGN	-46.0	16.62	62.62	64.36
		GSM	-47.0	16.20	63.20	
	Cellular	AWGN	-46.0	16.16	62.16	64.95
		GSM	-46.0	16.77	62.77	
	AWS	AWGN	-54.5	16.38	70.88	71.27
		GSM	-54.5	16.69	71.19	
	PCS	AWGN	-55.5	16.34	71.84	71.99
		GSM	-54.5	16.82	71.32	

Note: Fixed Booster maximum gain shall not exceed $6.5 \text{ dB} + 20 \text{ Log}_{10}(\text{Frequency})$, Where, Frequency is the uplink mid-band frequency of the supported spectrum bands in MHz.

Equivalent Uplink and downlink gain:

Operating Band	Signal type	Uplink Gain	Downlink Gain	Caculated Value	Limit
MHz		dB	dB	dB	dB
Lower 700 MHz	AWGN	62.40	62.64	0.24	9
	GSM	63.00	63.23	0.23	
Upper 700 MHz	AWGN	60.14	62.62	2.48	
	GSM	64.00	63.20	0.80	
Cellular	AWGN	63.07	62.16	0.91	
	GSM	64.00	62.77	1.23	
PCS	AWGN	70.11	70.88	0.77	
	GSM	71.20	71.19	0.01	
AWS	AWGN	70.00	71.84	1.84	
	GSM	71.90	71.32	0.58	

§ 20.21(e)(8)(i)(F)- INTERMODULATION PRODUCT

Applicable Standards

According to § 20.21(e)(8)(i)(F) Intermodulation Limits.

Test Procedure

The following procedures shall be used to demonstrate compliance to the intermodulation limit specified in § 20.21(e)(8)(i)(F) for wideband consumer signal boosters.

- Connect the signal booster to the test equipment as shown in **Figure 2**. Begin with the uplink output connected to the spectrum analyzer.
- Set the spectrum analyzer RBW = 3 kHz.
- Set the VBW $\geq 3 \times$ RBW.
- Select the RMS detector
- Set the spectrum analyzer center frequency to the center of the supported operational band under test.
- Set the span to 5 MHz. Affirm that the number of measurement points per sweep $\geq (2 \times \text{span})/\text{RBW}$.
- Configure the two signal generators for CW operation with generator 1 tuned 300 kHz below the operational band center frequency and generator 2 tuned 300 kHz above the operational band center frequency.
- Set the signal generator amplitudes so that the power from each into the RF combiner is equivalent, then turn on the RF output.
- Increase the signal generators' amplitudes equally until just before the EUT begins AGC and affirm that all intermodulation products (if any exist) are below the specified limit of -19 dBm.
- Utilize the trace averaging function of the spectrum analyzer and wait for the trace to stabilize. Place a marker at the highest amplitude intermodulation product.
- Record the maximum intermodulation product amplitude level that is observed.
- Capture the spectrum analyzer trace for inclusion in the test report.
- Repeat 7.4e) to 7.4l) for all uplink and downlink operational bands.

Note: If using a single signal generator with dual outputs, affirm that intermodulation products are not the result of the generator.

- Increase the signal generator amplitude in 2 dB steps to 10 dB above the AGC threshold determined in 7.4i), but to not to exceed the maximum input level in 5.5, to affirm that the EUT maintains compliance with the intermodulation limit

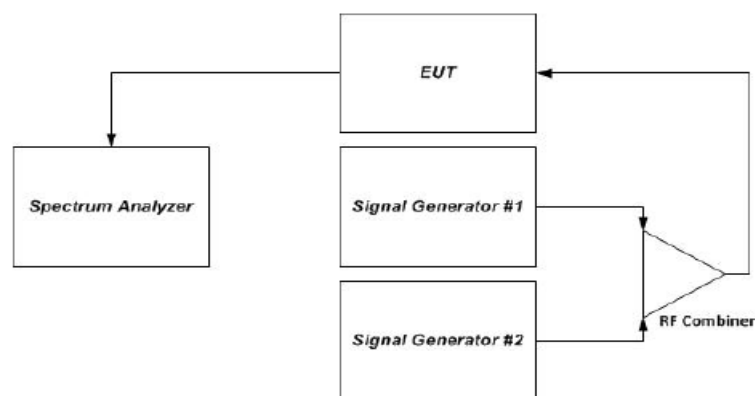


Figure 2 – Intermodulation product instrumentation test setup


Test Data**Environmental Conditions**

Temperature:	25.6 °C
Relative Humidity:	53 %
ATM Pressure:	101.0 kPa

The testing was performed by Coco Liu on 201-01-23.


Test Result: Pass

Please refer to the following tables

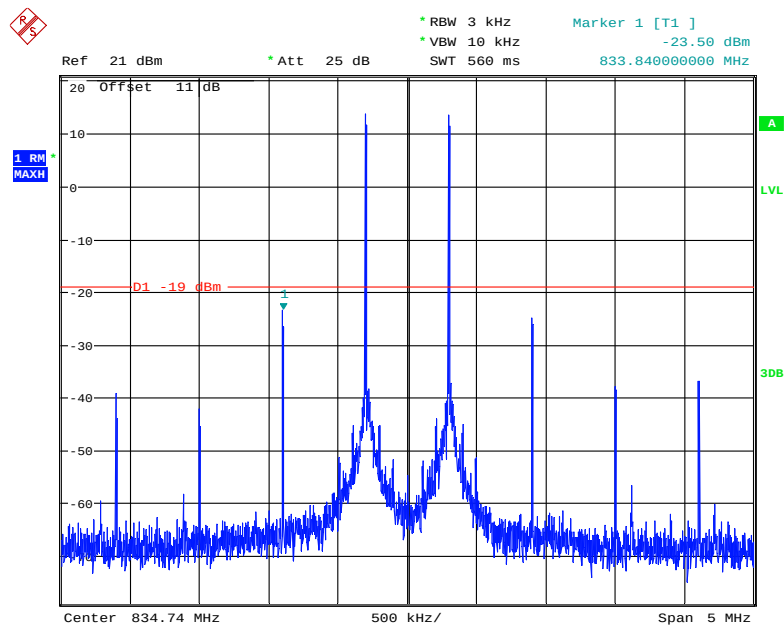Uplink**Cellular Pre-AGC**


Date: 23.JAN.2021 11:40:28

Cellular Above AGC

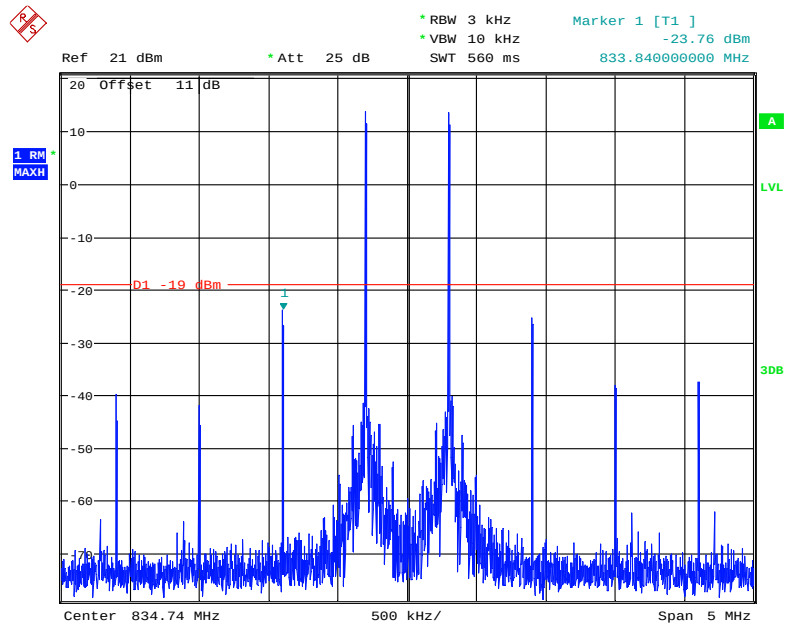


Date: 23.JAN.2021 11:41:00

PCS Pre-AGC

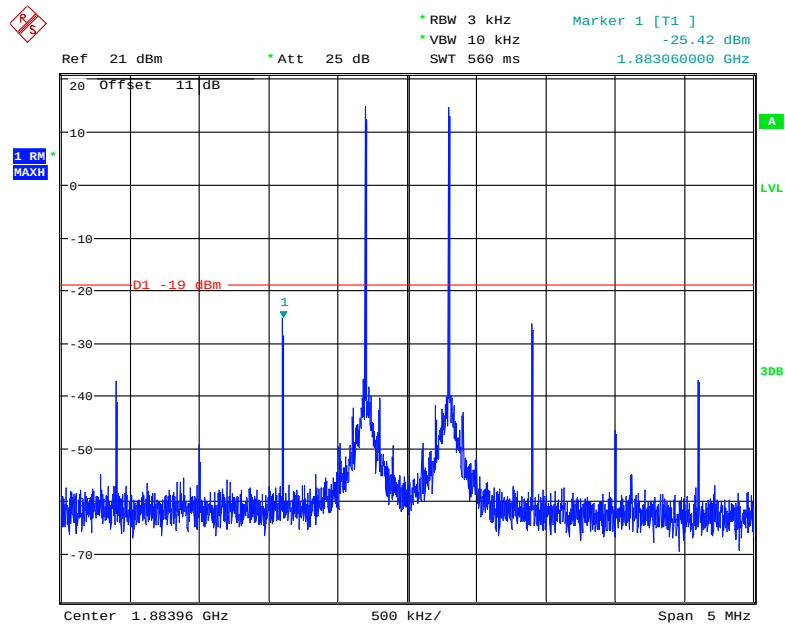


Date: 23.JAN.2021 11:53:22

PCS Above AGC

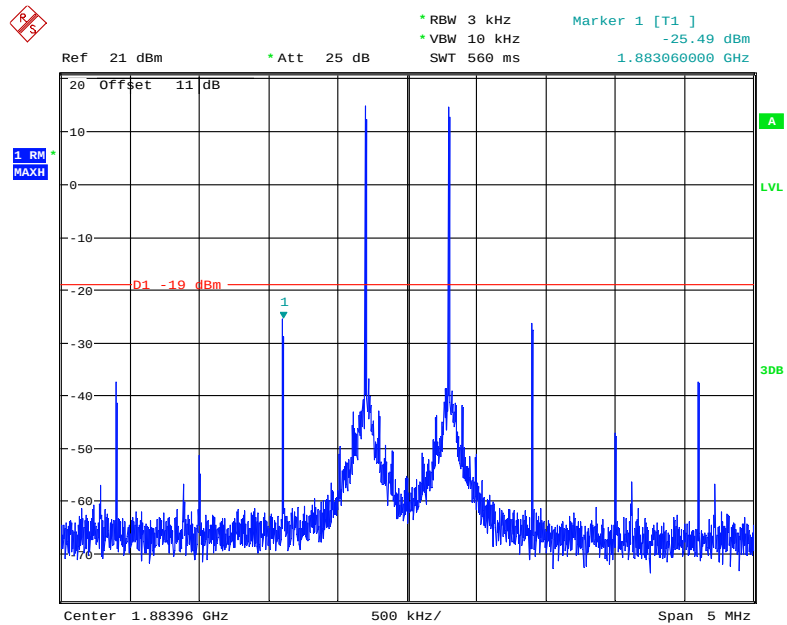


Date: 23.JAN.2021 11:54:10

AWS Pre-AGC

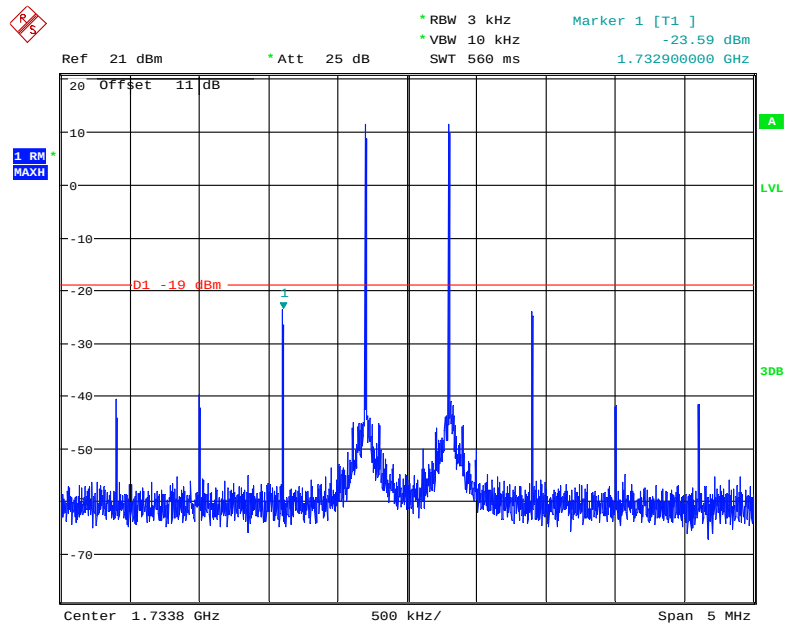


Date: 23.JAN.2021 11:37:57

AWS Above AGC

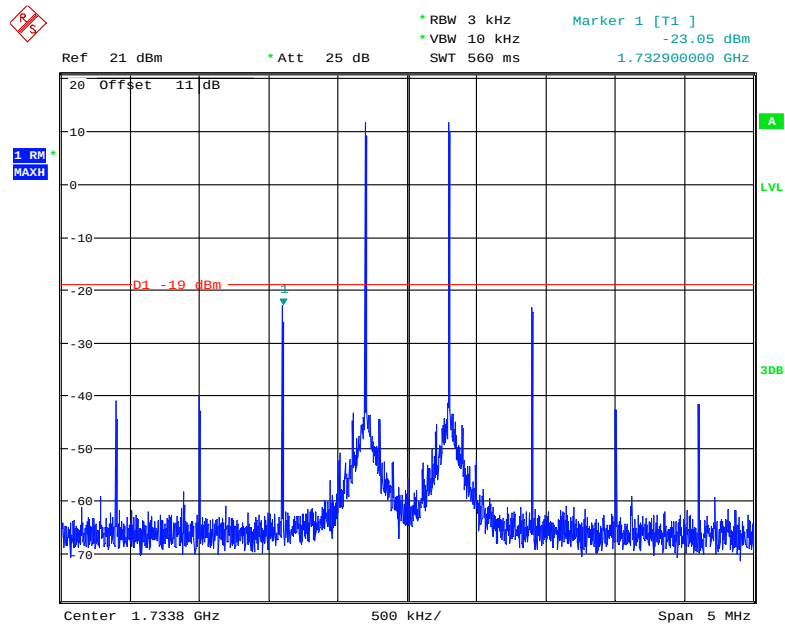


Date: 23.JAN.2021 11:38:30

Lower 700MHz Pre-AGC

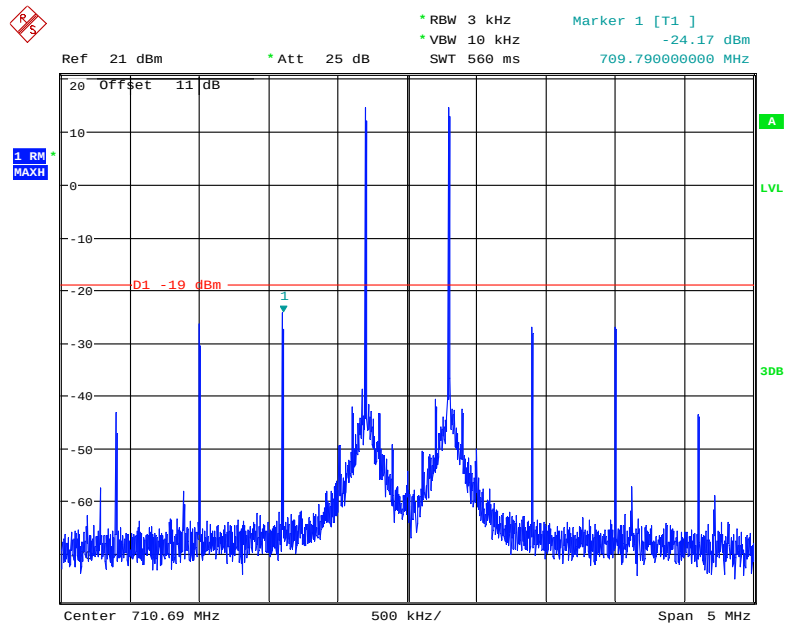


Date: 23.JAN.2021 11:46:52

Lower 700MHz Above AGC

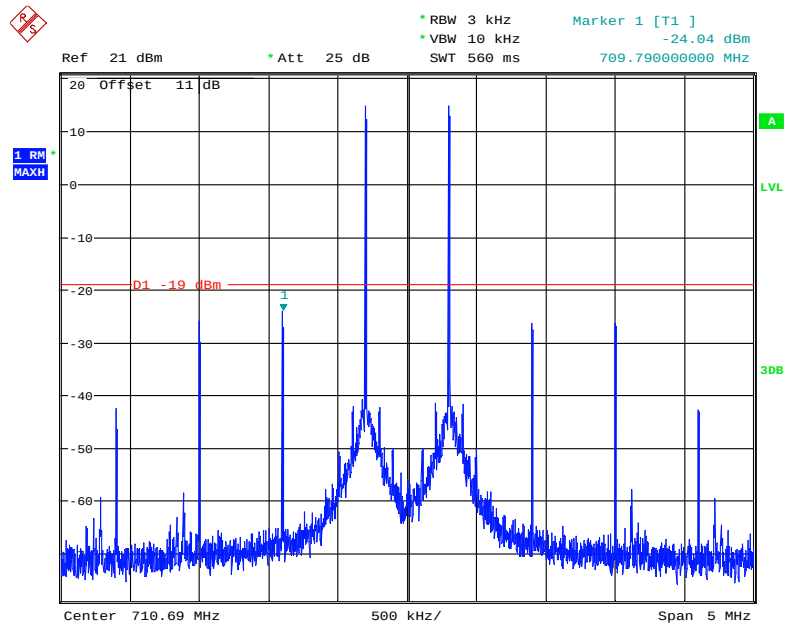


Date: 23.JAN.2021 11:45:28

Upper 700MHz Pre-AGC

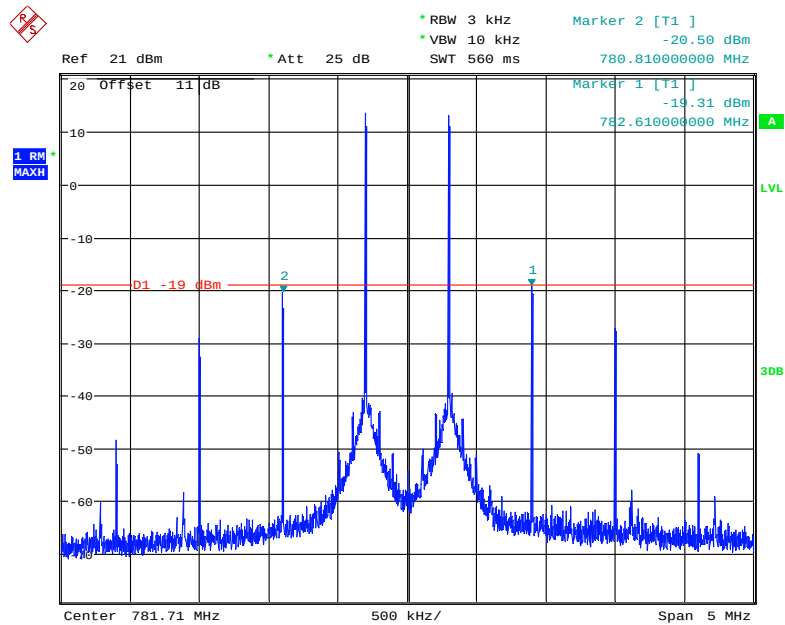

Date: 23.JAN.2021 11:50:14


Upper 700MHz Above AGC

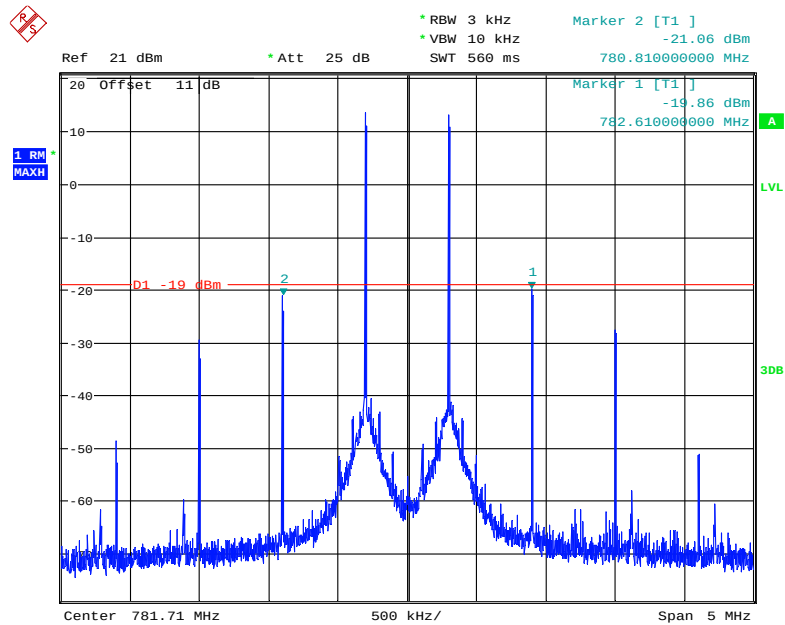

Date: 23.JAN.2021 11:51:17


Downlink

Cellular Pre-AGC

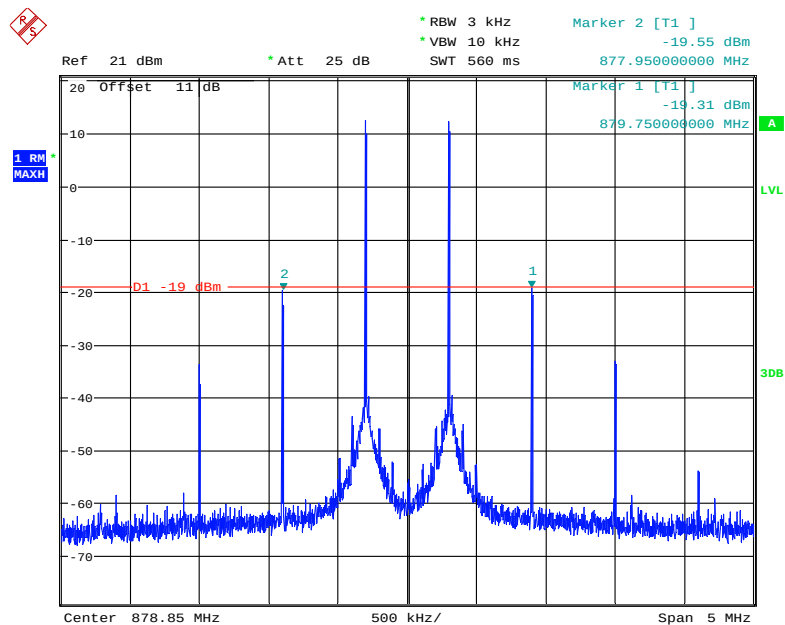


Date: 23.JAN.2021 11:16:34

Cellular Above AGC

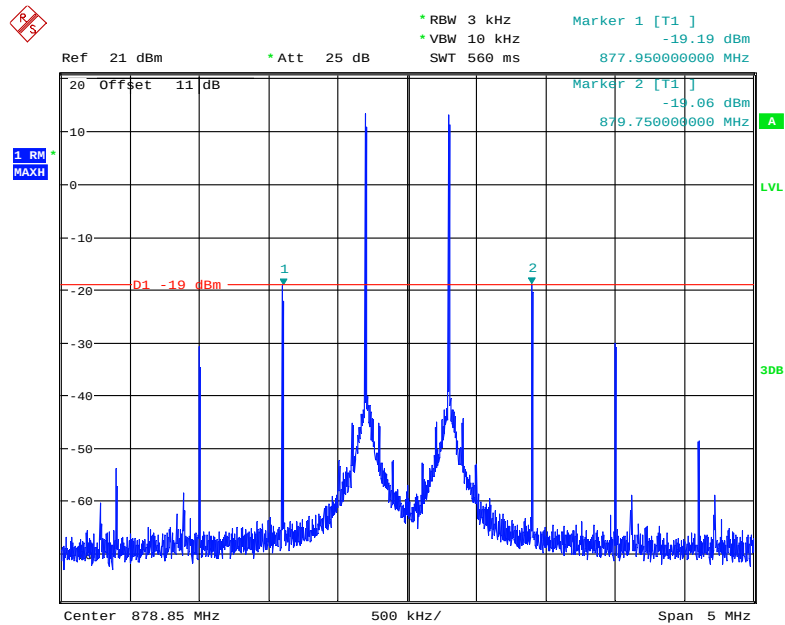


Date: 23.JAN.2021 11:18:28

PCS Pre-AGC

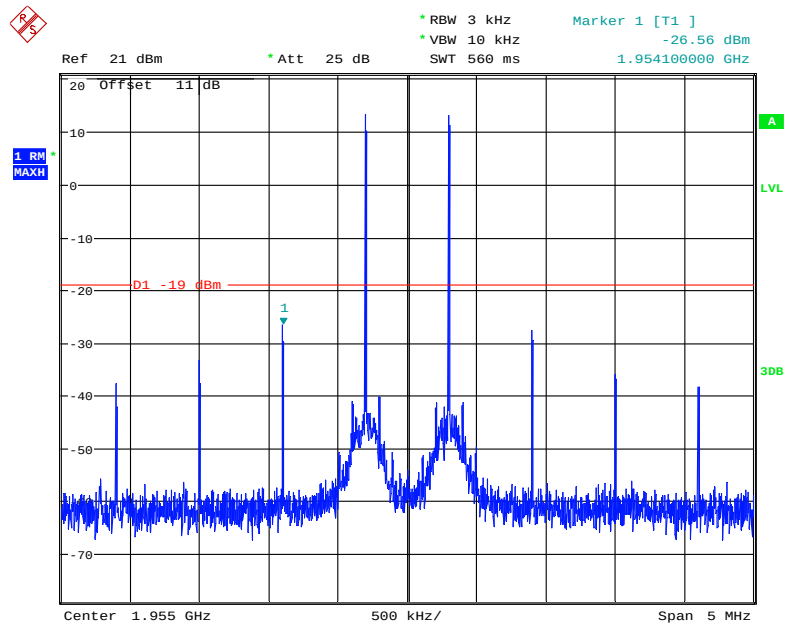


Date: 23.JAN.2021 11:27:40

PCS Above AGC

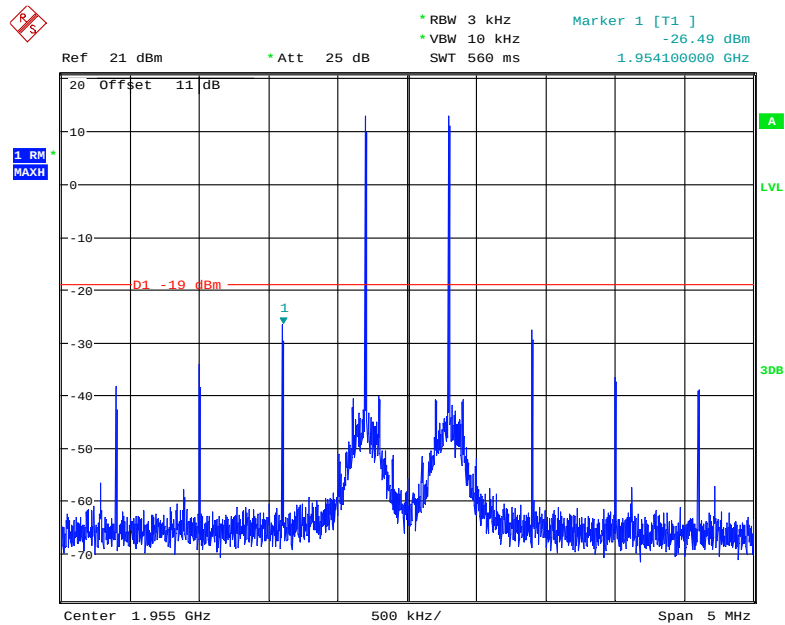


Date: 23.JAN.2021 11:28:16

AWS Pre-AGC

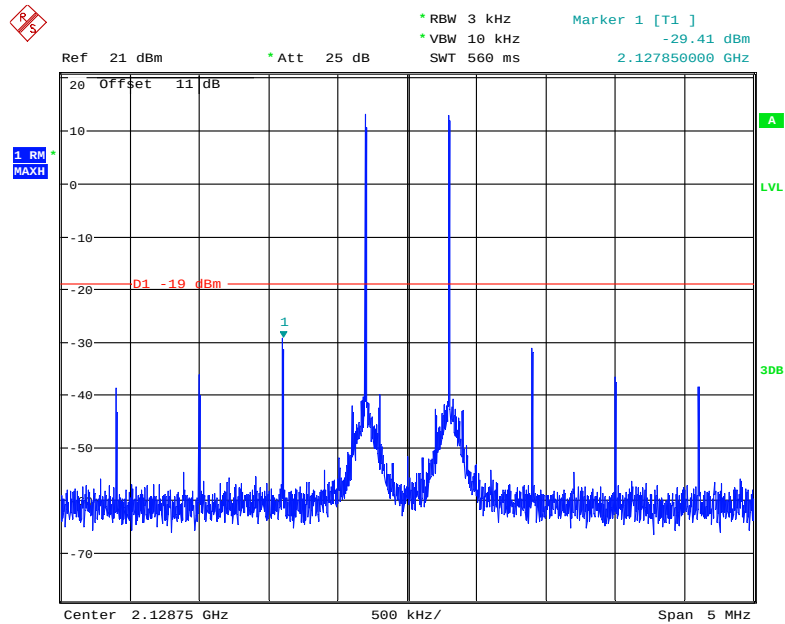


Date: 23.JAN.2021 11:31:05

AWS Above AGC

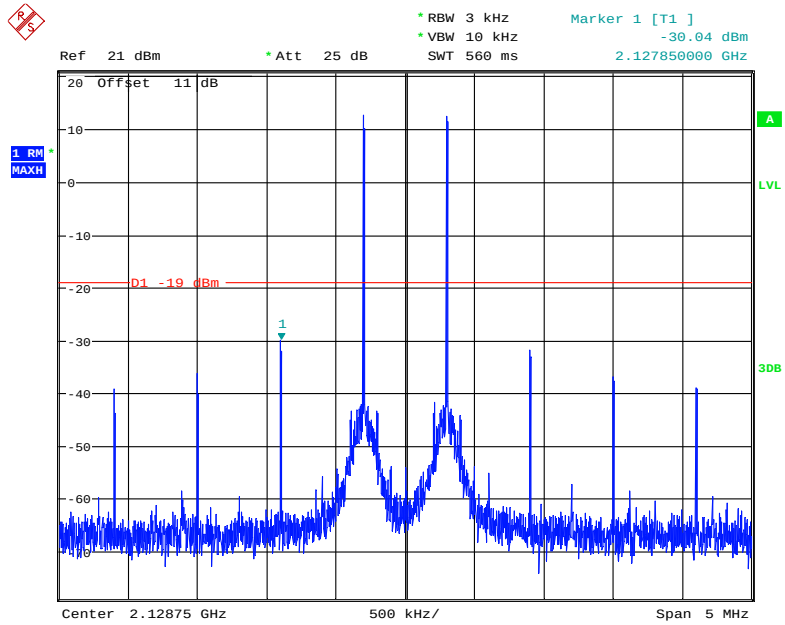


Date: 23.JAN.2021 11:31:27

Lower 700MHz Pre-AGC

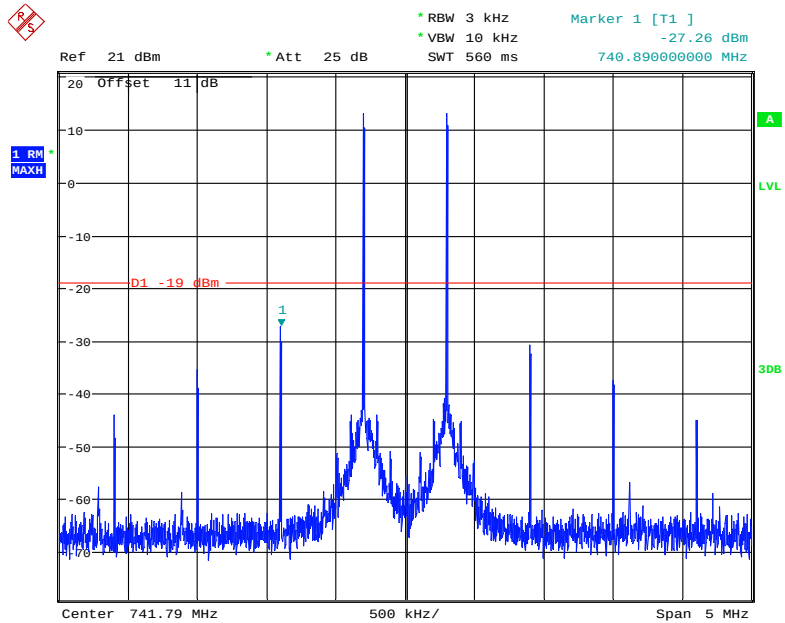


Date: 23.JAN.2021 11:20:15

Lower 700MHz Above AGC

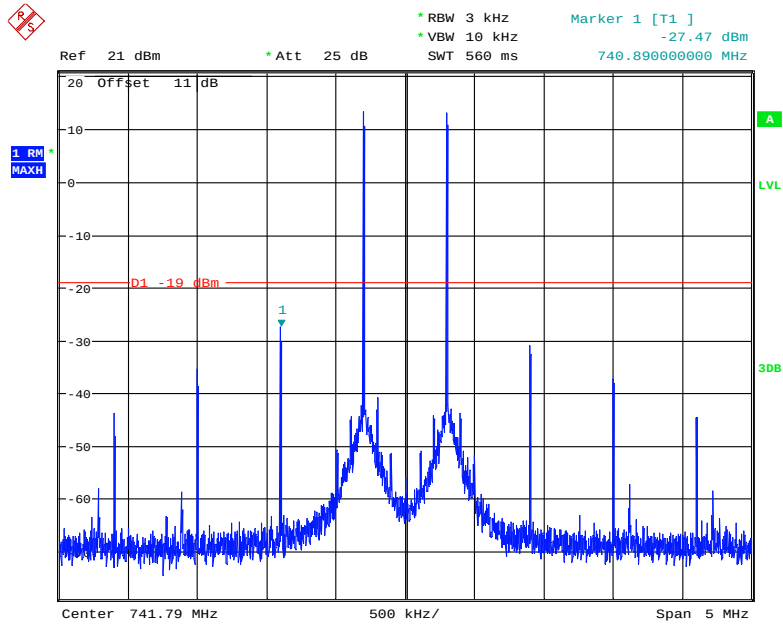


Date: 23.JAN.2021 11:21:43

Upper 700MHz Pre-AGC

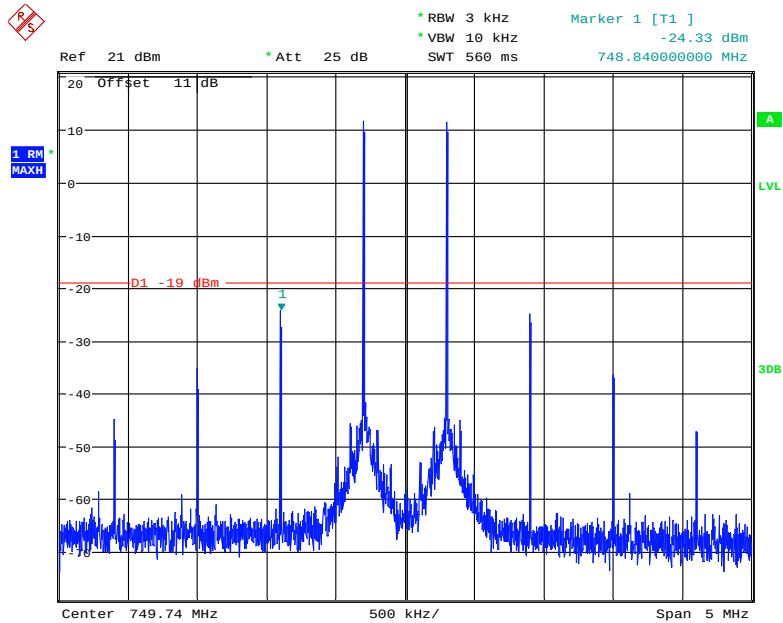

Date: 23.JAN.2021 11:24:24

Upper 700MHz Above AGC

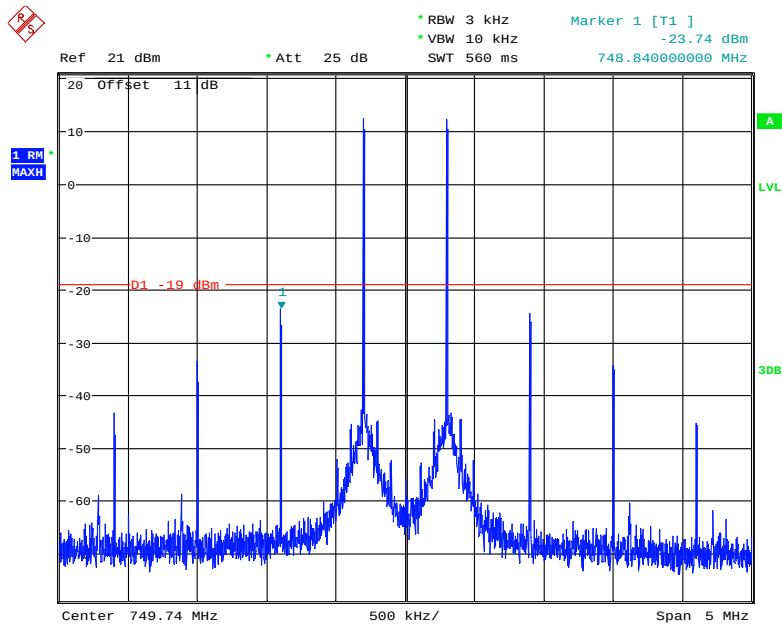

Date: 23.JAN.2021 11:25:26

§ 20.21(e)(8)(i)(E)- OUT OF BAND EMISSIONS

Applicable Standards

According to § 20.21(e)(8)(i)(E) Out of Band Emission Limits.

Test Procedure

This measurement is intended to demonstrate compliance to the limit specified in § 20.21(e)(8)(i)(E). The mobile emission limit applicable to the supported band of operation can be determined from the applicable rule part as listed in Annex A for each authorized operating band.

- a) Connect the EUT to the test equipment as shown in **Figure 1**. Begin with the uplink output connected to the spectrum analyzer.
- b) Configure the signal generator for the appropriate operation for all uplink and downlink bands:
 - i) GSM: 0.2 MHz from upper and lower band edges.
 - ii) LTE (5 MHz): 2.5 MHz from upper and lower band edges.
 - iii) CDMA: 1.25 MHz from upper and lower band edges, except for cellular band as follows (only the upper and lower frequencies need to be tested):

824.88 MHz, 845.73 MHz, 836.52 MHz, 848.10 MHz, 869.88 MHz, 890.73 MHz, 881.52 MHz, 893.10 MHz.

Note 1: *Alternative test modulation types:*

- CDMA (alternative 1.25 MHz AWGN)
- LTE 5 MHz (alternative W-CDMA or 4.1 MHz AWGN)

Note 2: *For LTE, the signal generator should utilize the uplink and downlink signal types for these modulations in uplink and downlink tests, respectively. LTE shall use 5 MHz signal, 25 resource blocks transmitting.*

Note 3: *When using an AWGN test signal, the bandwidth shall be the measured 99% occupied bandwidth.*

- c) Set the signal generator amplitude to the maximum power level prior to AGC similar to the procedures in 7.2.2e) to 7.2.2f) of power measurement procedure for appropriate modulations.
- d) Set RBW = measurement bandwidth specified in the applicable rule section for the supported frequency band (*see Annex A for cross-reference to applicable rule section*).
- e) Set VBW = $3 \times \text{RBW}$.
- f) Select the RMS (power averaging) detector.
- g) Sweep time = auto-couple.
- h) Set the analyzer start frequency to the upper band/block edge frequency and the stop frequency to the upper band/block edge frequency plus 300 kHz (when operational frequency is < 1 GHz) or 3 MHz (when operational frequency is ≥ 1 GHz).
- i) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- j) Use peak marker function to find the maximum power level.
- k) Capture the spectrum analyzer trace of the power level for inclusion in the test report.
- l) Increase the signal generator amplitude in 2 dB steps until the maximum input level indicated in 5.5 is reached. Affirm that the EUT maintains compliance with the OOB limits.
- m) Reset the analyzer start frequency to the lower band/block edge frequency minus 300 kHz (when operational frequency is < 1 GHz) or 3 MHz (when operational frequency is ≥ 1 GHz), and the stop frequency to the lower band/block edge frequency and repeat 7.5j) to 7.5l).
- n) Repeat 7.5b) through 7.5m) for each uplink and downlink operational band.

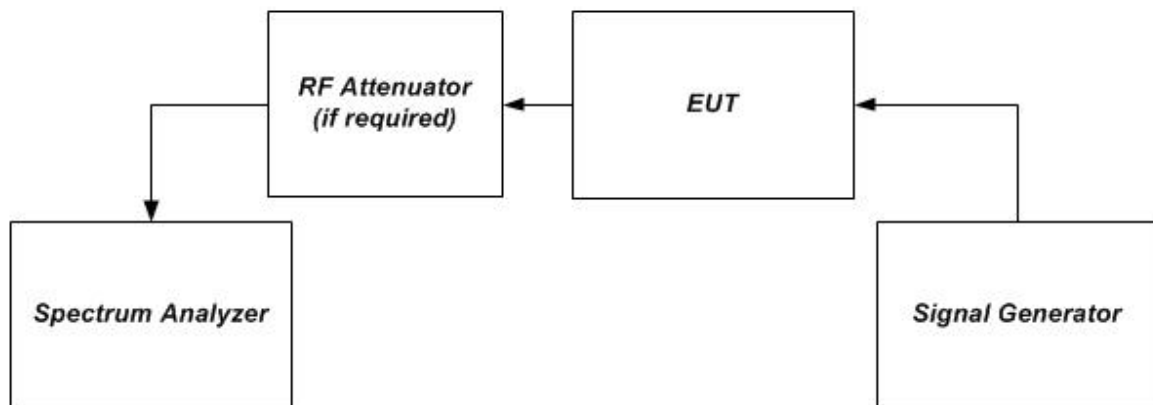


Figure 1 – Band verification test instrumentation setup

Test Data

Environmental Conditions

Temperature:	23.8~26.7 °C
Relative Humidity:	51~56 %
ATM Pressure:	100.9~101.1 kPa


The testing was performed by Coco Liu from 2021-01-23 to 2021-01-29.

Test Result: Pass

Please refer to the following tables


Uplink

Lower 700MHz CDMA Left Side Pre-AGC

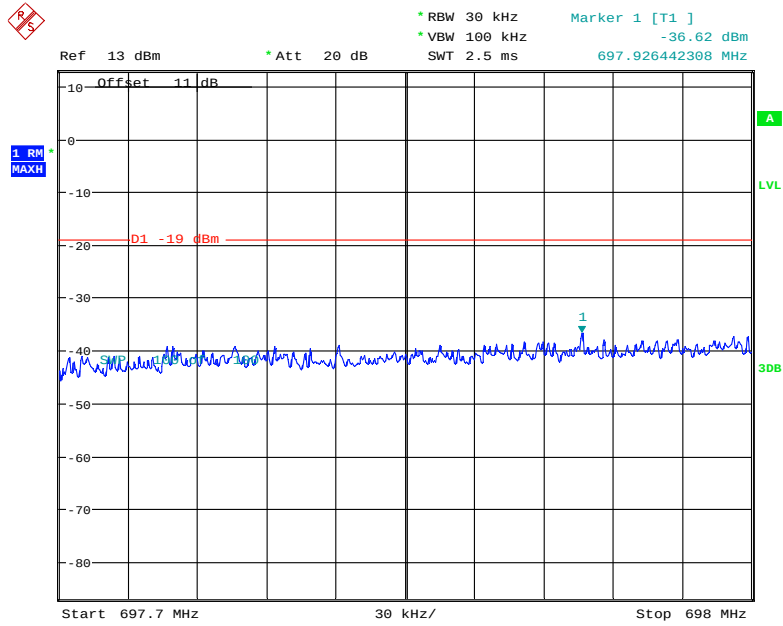


Date: 27.JAN.2021 14:15:51

Lower 700MHz CDMA Left Side Above AGC

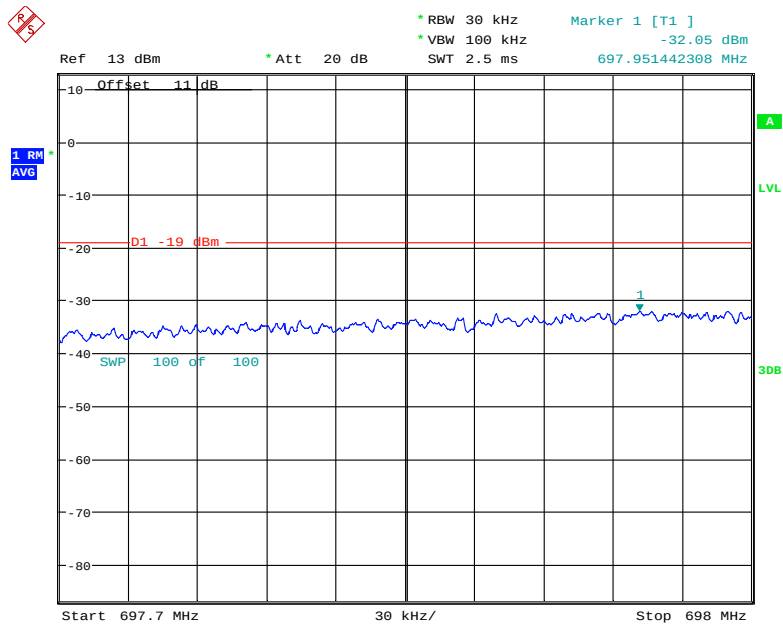


Date: 27.JAN.2021 14:16:10

Lower 700MHz GSM Left Side Pre-AGC

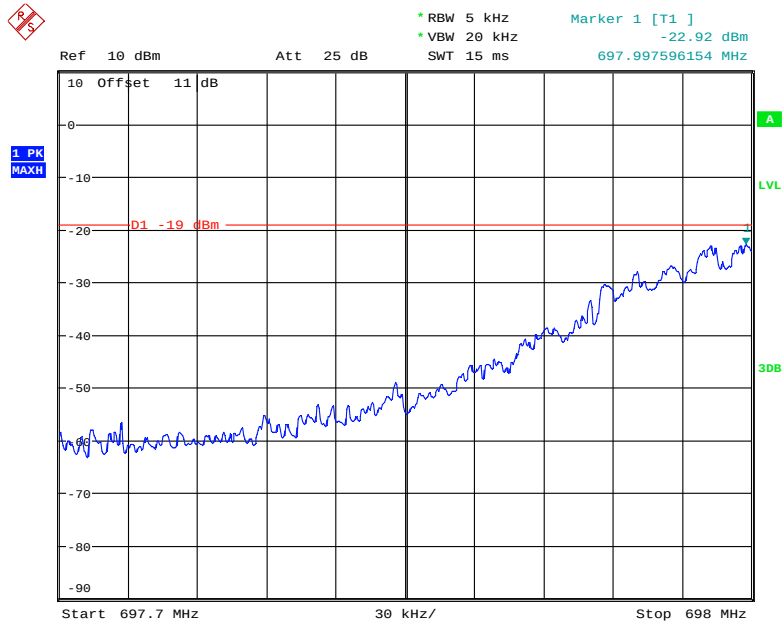


Date: 23.JAN.2021 17:03:14

Lower 700MHz GSM Left Side Above AGC

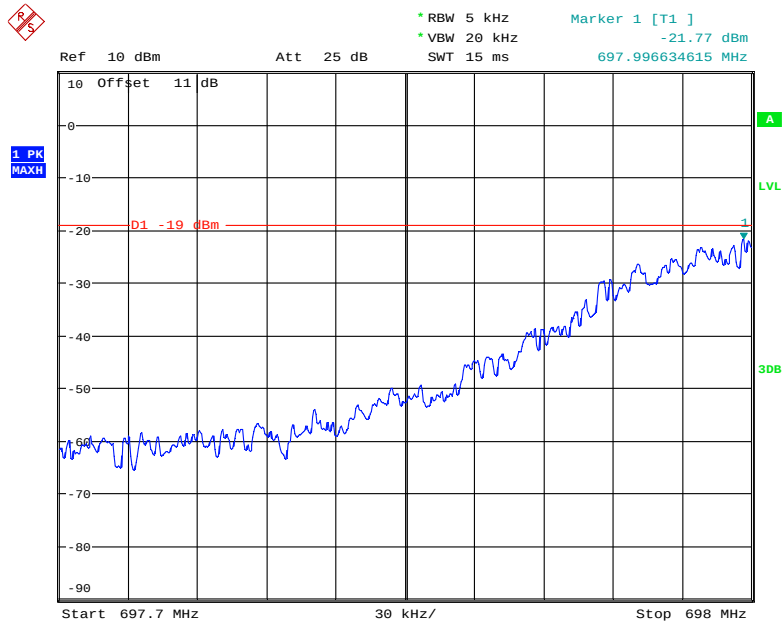


Date: 23.JAN.2021 17:03:35

Lower 700MHz WCDMA Left Side Pre-AGC

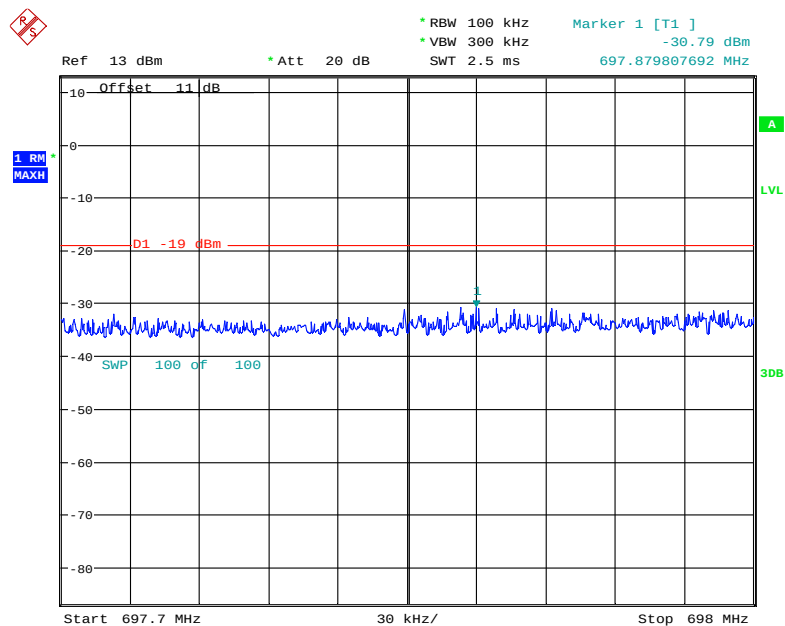


Date: 27.JAN.2021 13:55:58

Lower 700MHz WCDMA Left Side Above AGC

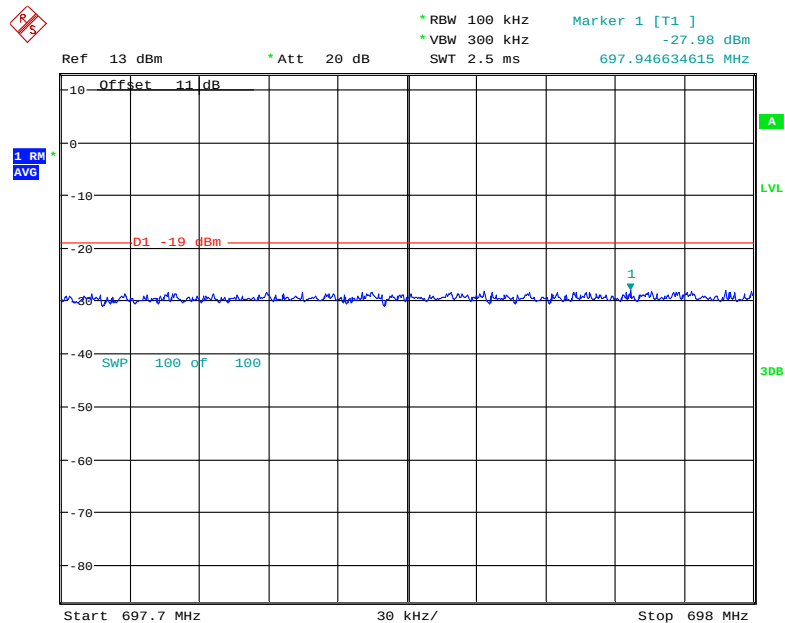


Date: 27.JAN.2021 13:56:17

Lower 700MHz CDMA Right Side Pre-AGC

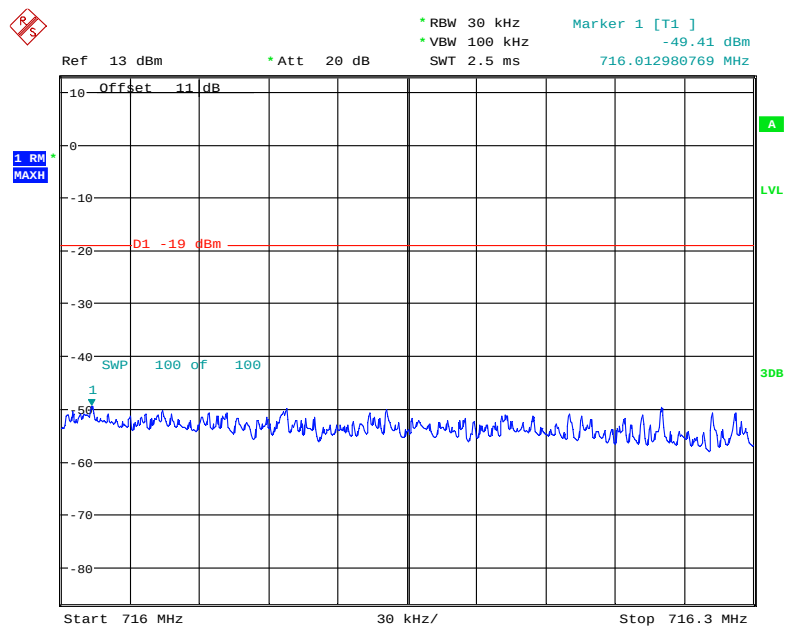


Date: 27.JAN.2021 14:16:47

Lower 700MHz CDMA Right Side Above AGC

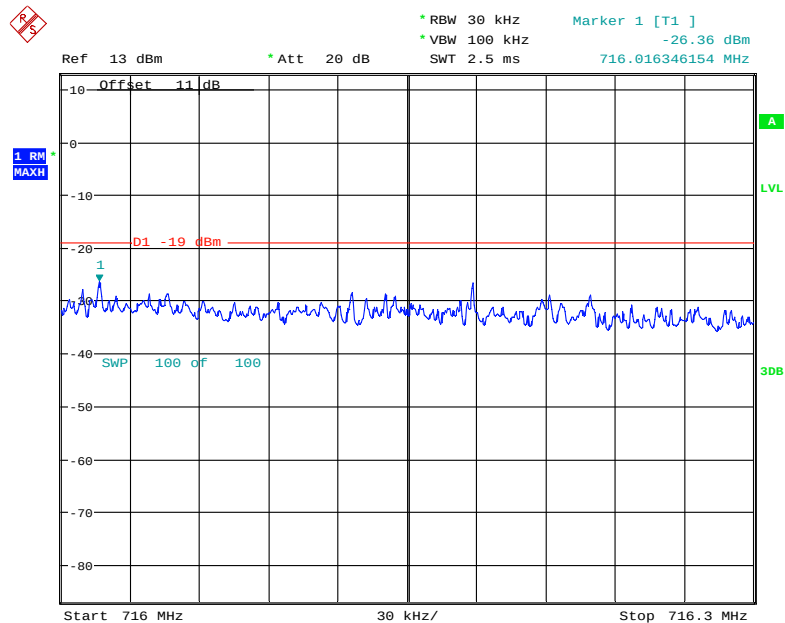


Date: 27.JAN.2021 14:17:02

Lower 700MHz GSM Right Side Pre-AGC

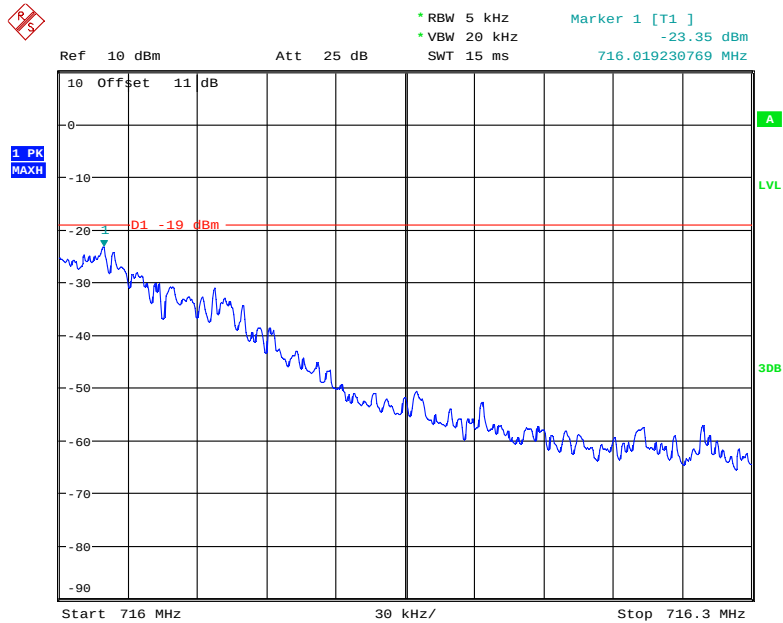


Date: 23.JAN.2021 17:07:30

Lower 700MHz GSM Right Side Above AGC

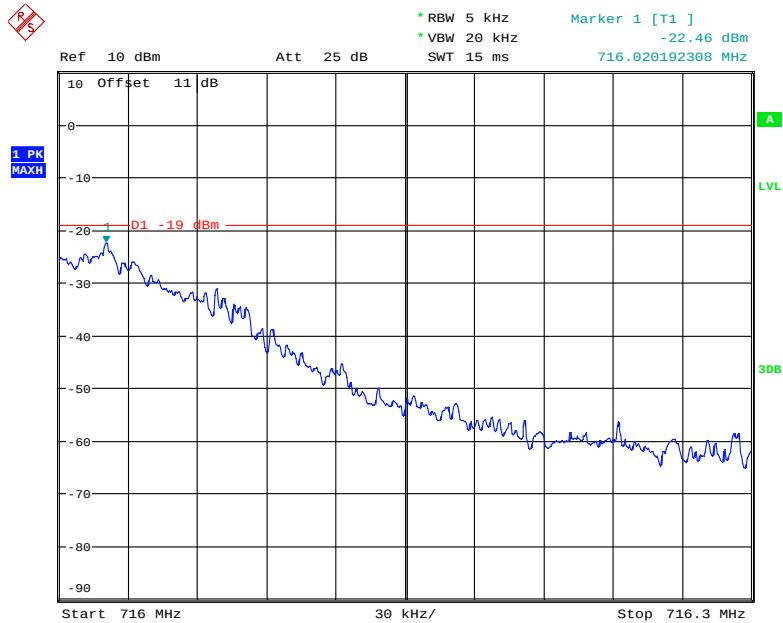


Date: 23.JAN.2021 17:07:53

Lower 700MHz WCDMA Right Side Pre-AGC

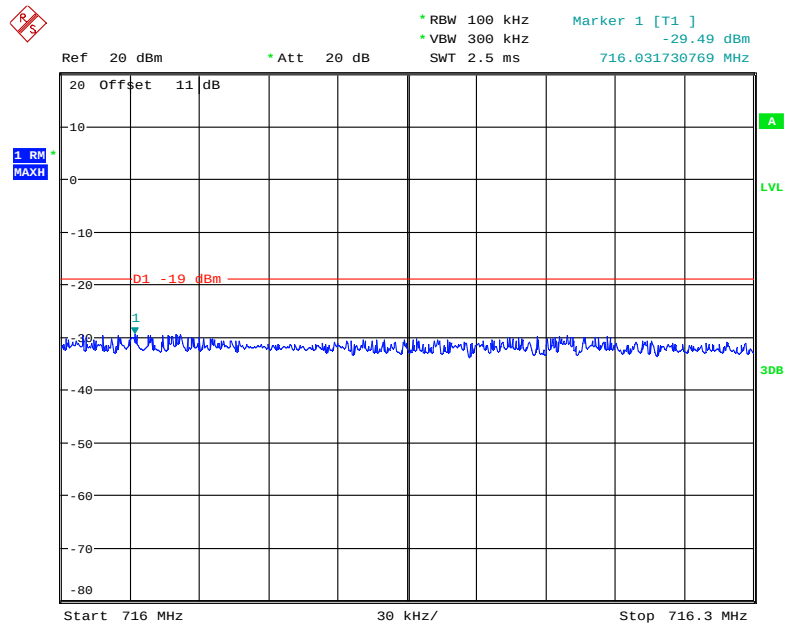


Date: 27.JAN.2021 13:53:19

Lower 700MHz WCDMA Right Side Above AGC

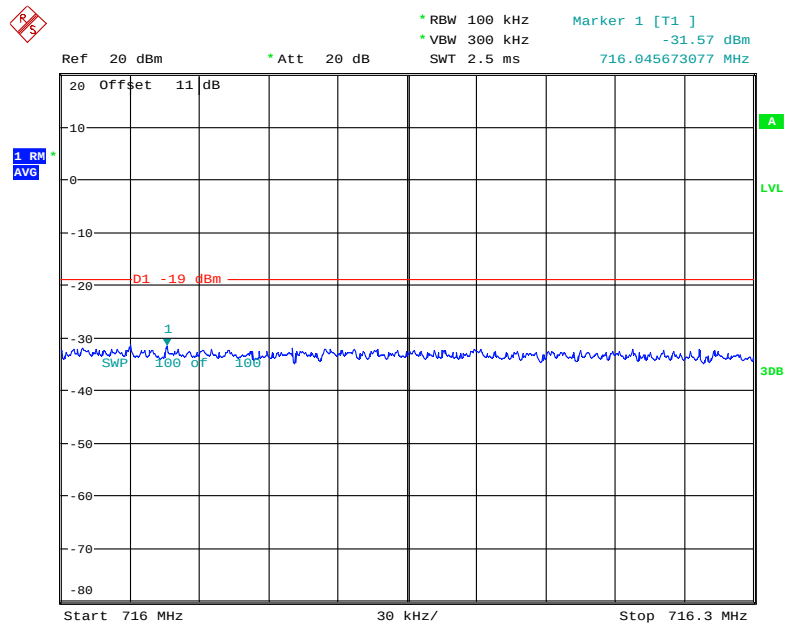


Date: 27.JAN.2021 13:54:31

Upper 700MHz CDMA Left Side Pre-AGC

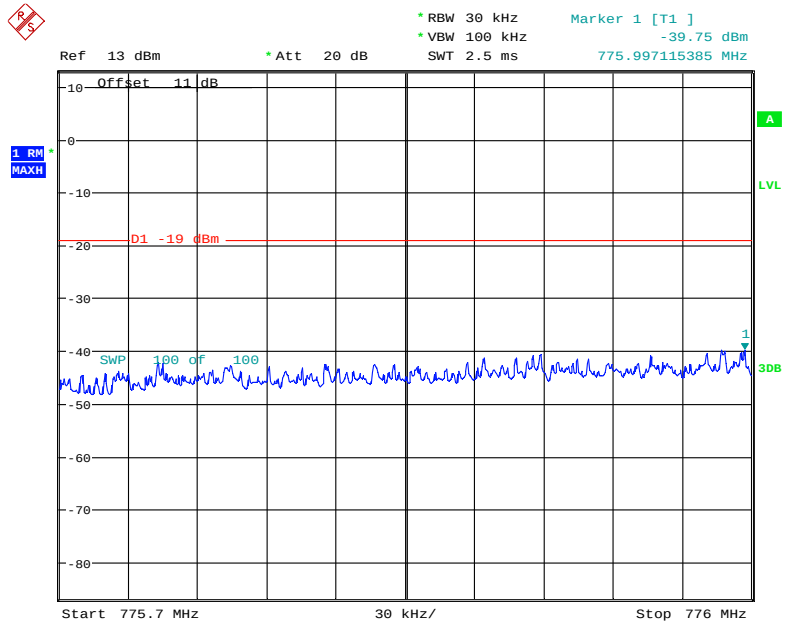


Date: 27.JAN.2021 14:12:59

Upper 700MHz CDMA Left Side Above AGC

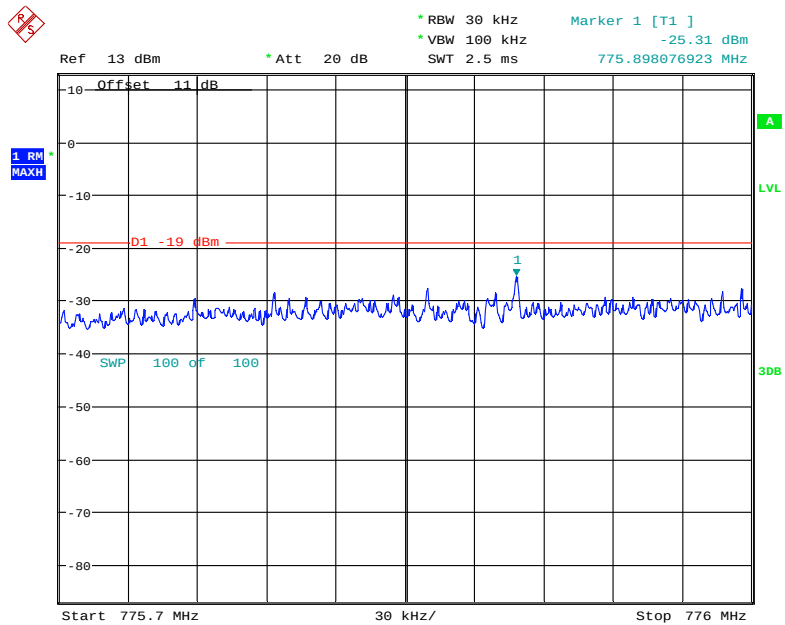


Date: 27.JAN.2021 14:13:26

Upper 700MHz GSM Left Side Pre-AGC

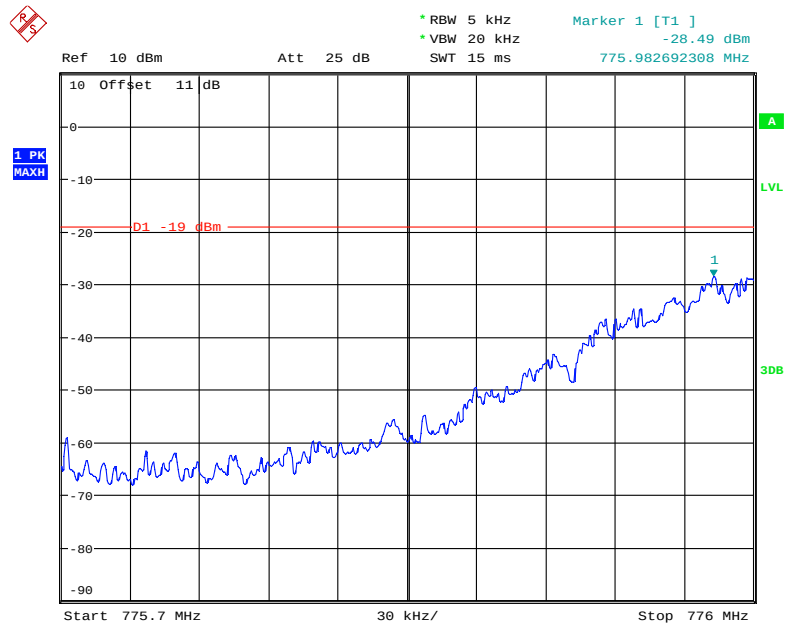


Date: 23.JAN.2021 17:09:58

Upper 700MHz GSM Left Side Above AGC

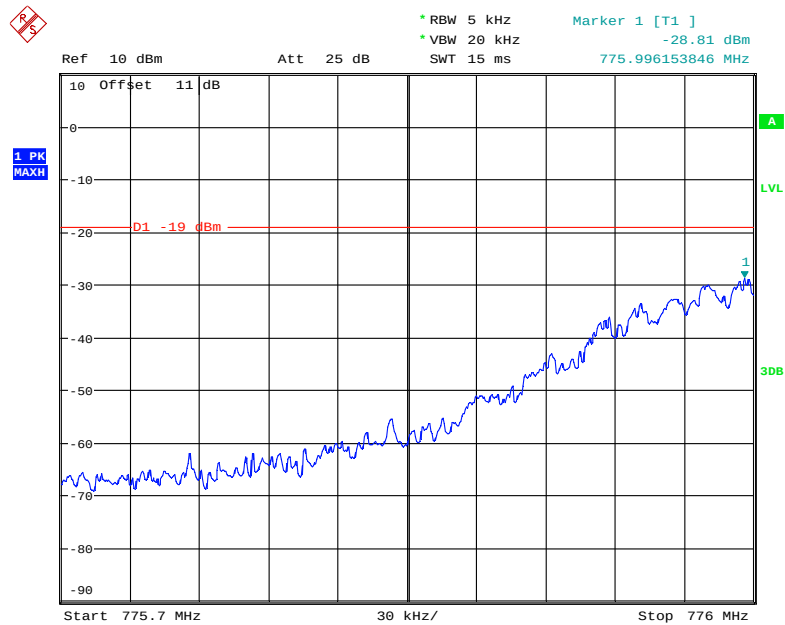


Date: 23.JAN.2021 17:10:17

Upper 700MHz WCDMA Left Side Pre-AGC

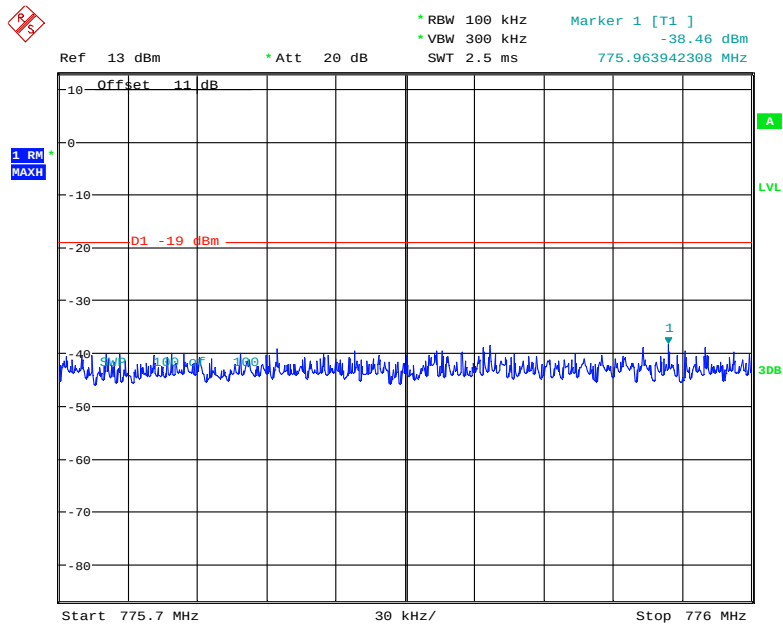


Date: 27.JAN.2021 13:56:58

Upper 700MHz WCDMA Left Side Above AGC

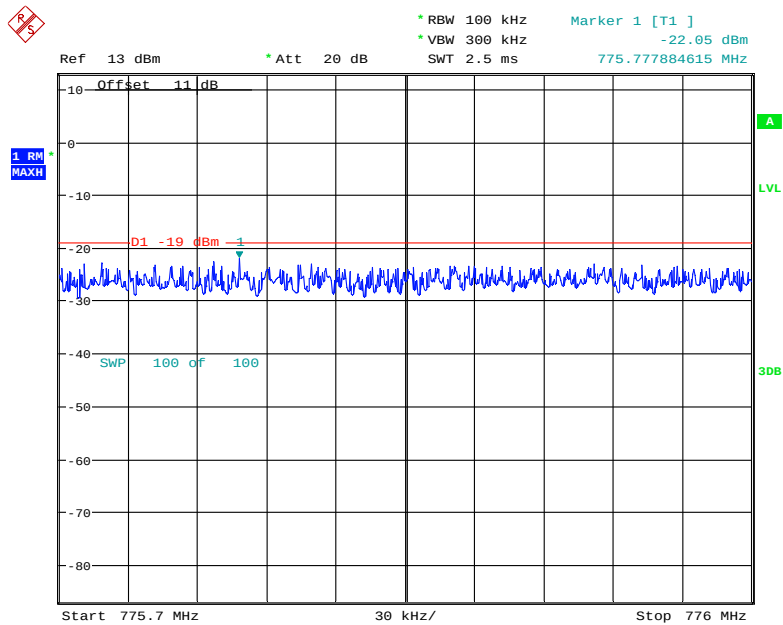


Date: 27.JAN.2021 13:57:42

Upper 700MHz CDMA Right Side Pre-AGC

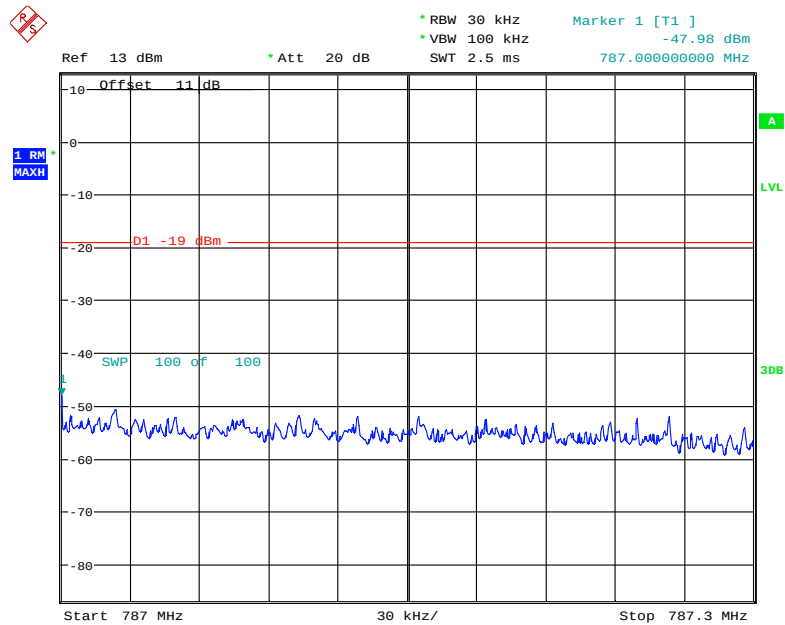


Date: 27.JAN.2021 14:14:36

Upper 700MHz CDMA Right Side Above AGC

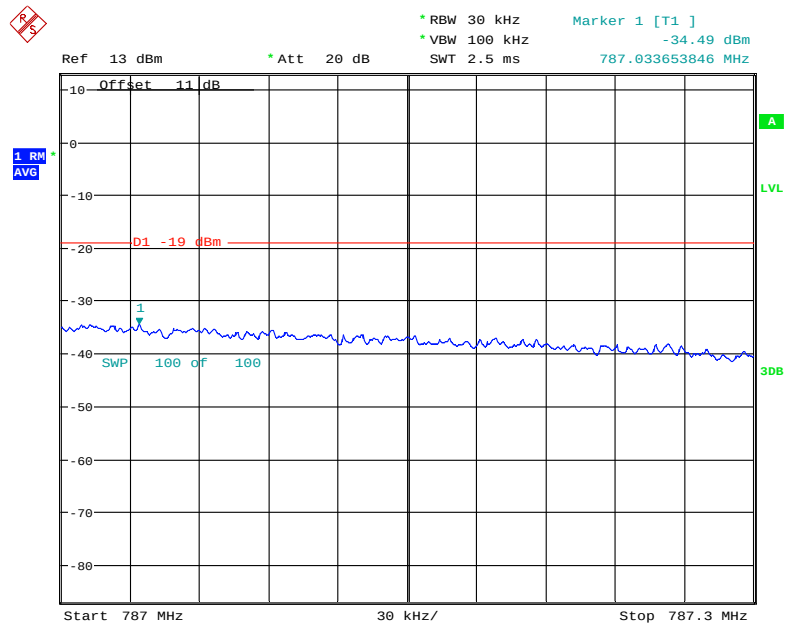


Date: 27.JAN.2021 14:14:54

Upper 700MHz GSM Right Side Pre-AGC

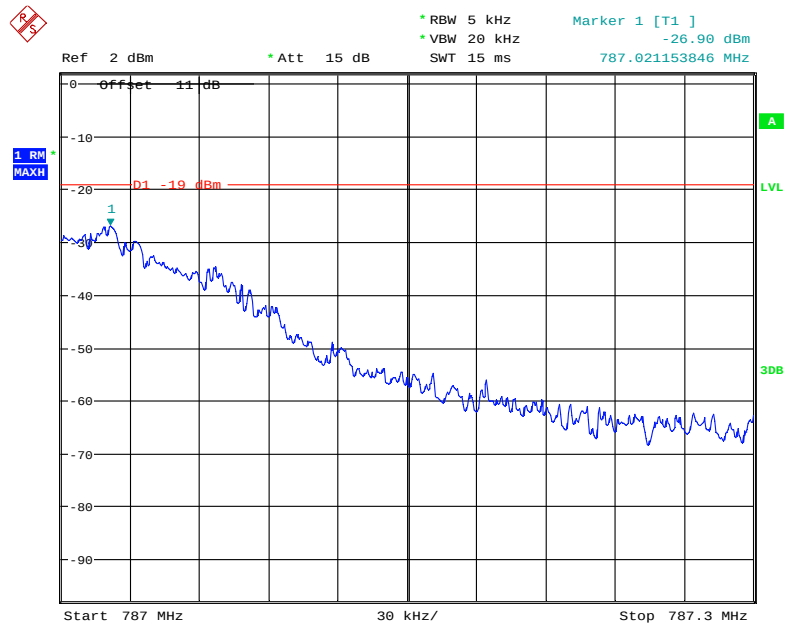


Date: 23.JAN.2021 16:21:19

Upper 700MHz GSM Right Side Above AGC

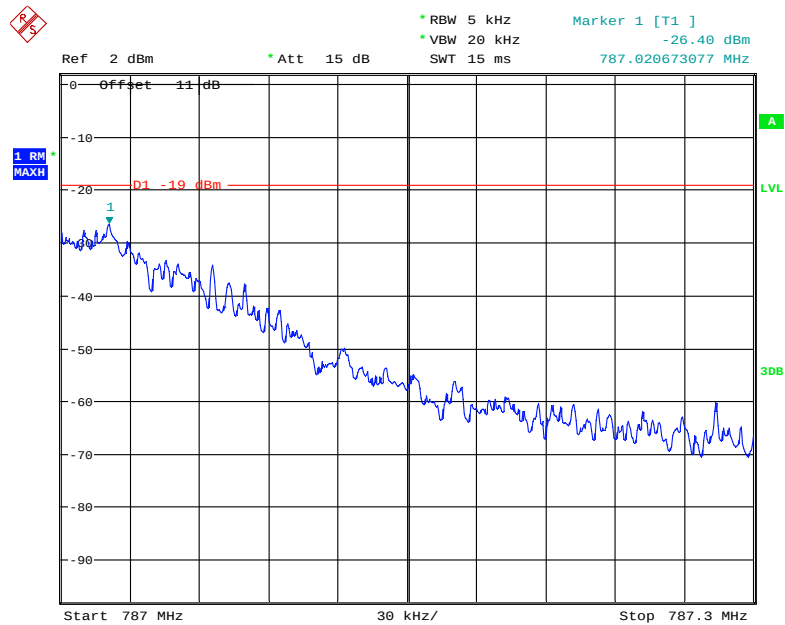


Date: 23.JAN.2021 16:22:26

Upper 700MHz WCDMA Right Side Pre-AGC

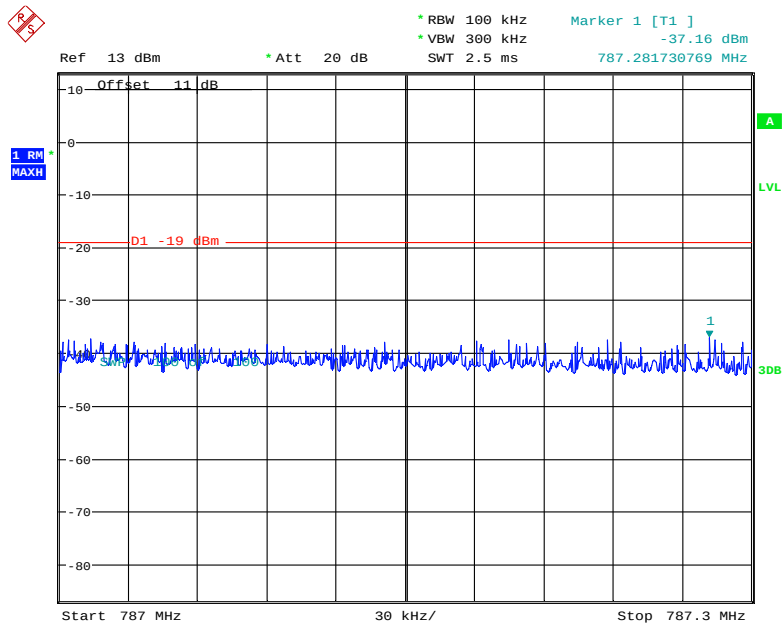


Date: 27.JAN.2021 13:58:19

Upper 700MHz WCDMA Right Side Above AGC

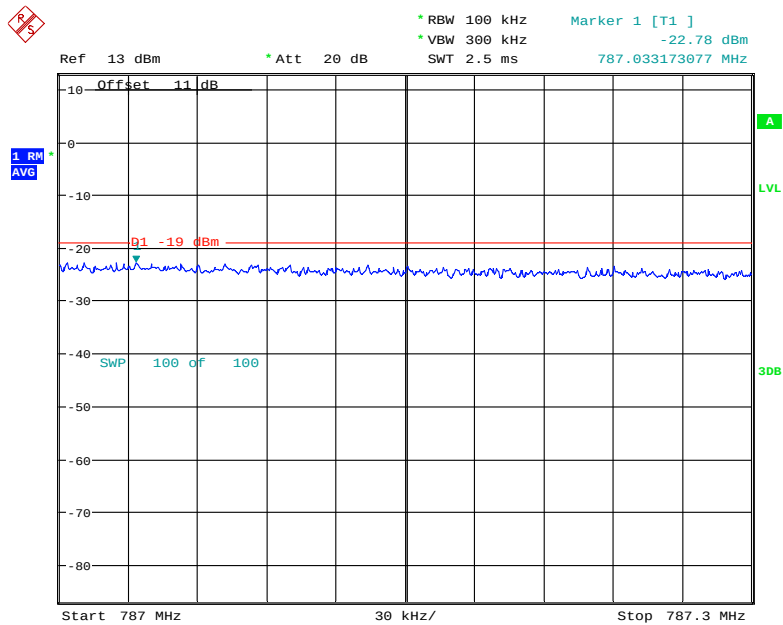


Date: 27.JAN.2021 13:58:40

Cellular Band CDMA Left Side Pre-AGC

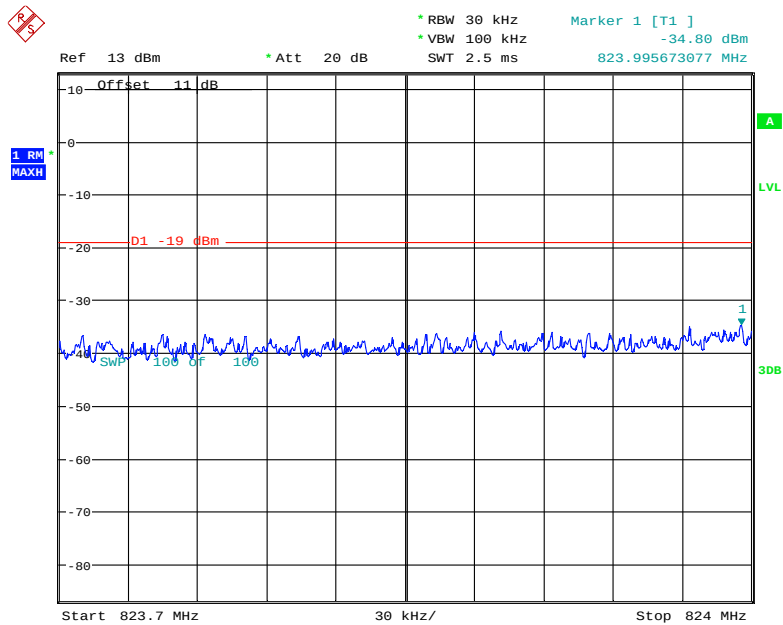


Date: 27.JAN.2021 14:10:30

Cellular Band CDMA Left Side Above AGC

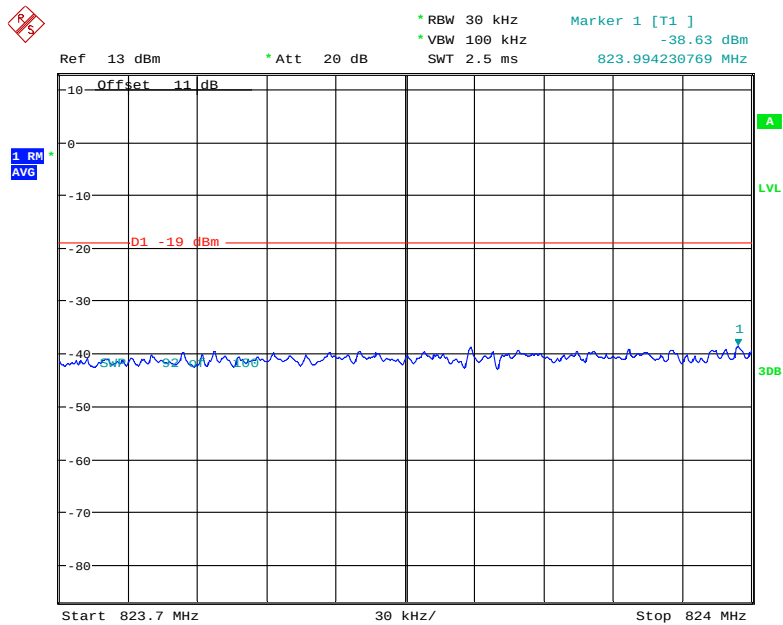


Date: 27.JAN.2021 14:11:13

Cellular Band GSM Left Side Pre-AGC

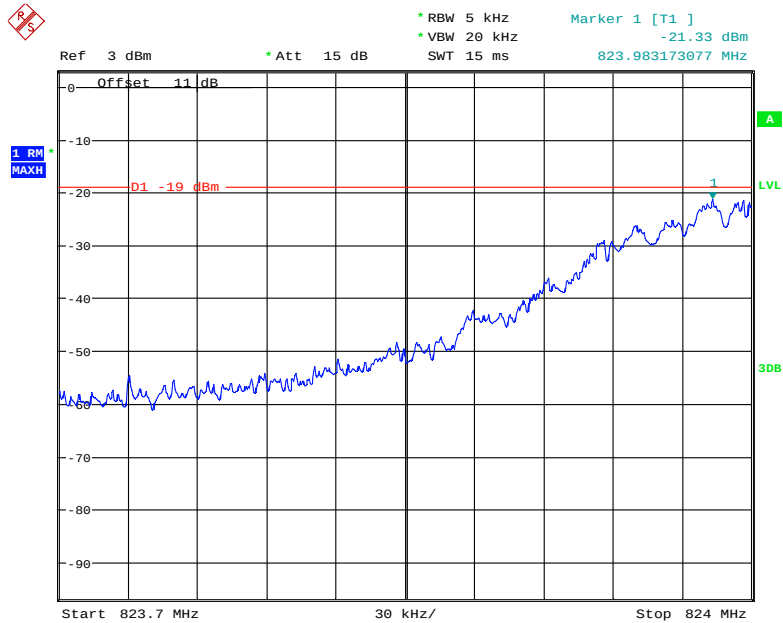


Date: 23.JAN.2021 16:46:39

Cellular Band GSM Left Side Above AGC

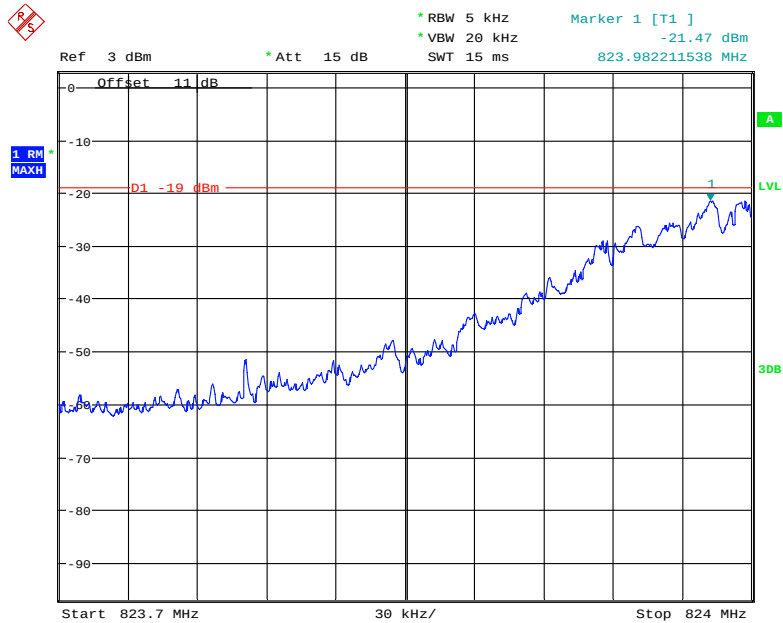


Date: 23.JAN.2021 16:47:24

Cellular Band WCDMA Left Side Pre-AGC

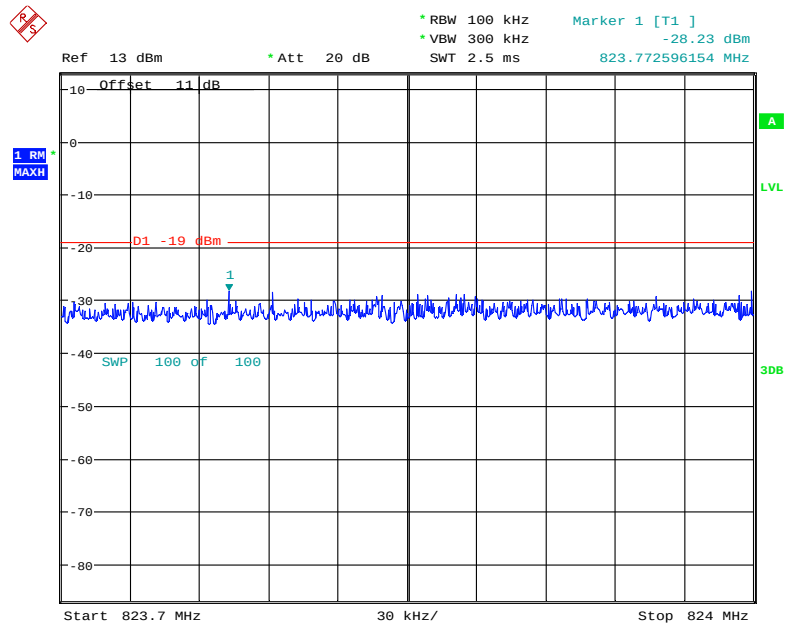


Date: 27.JAN.2021 13:59:50

Cellular Band WCDMA Left Side Above AGC

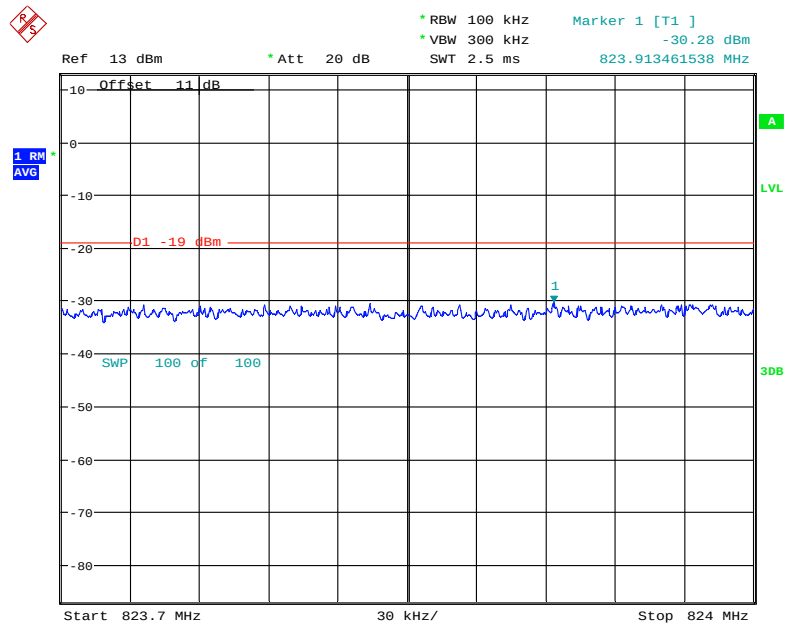


Date: 27.JAN.2021 13:59:59

Cellular Band CDMA Right Side Pre-AGC

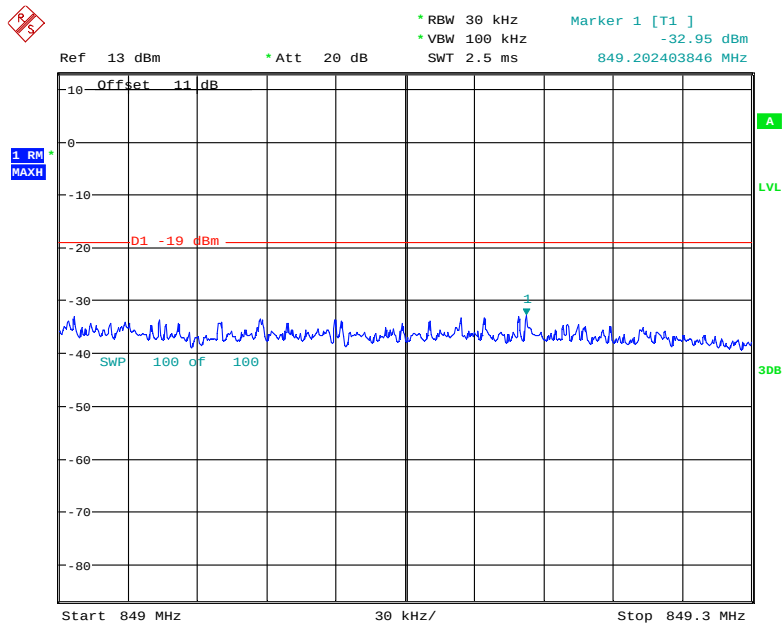


Date: 27.JAN.2021 14:11:50

Cellular Band CDMA Right Side Above AGC

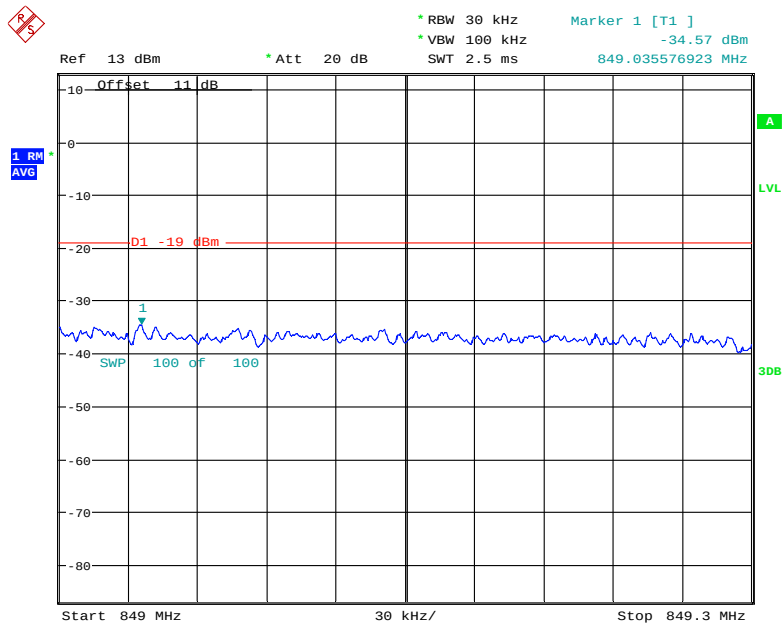


Date: 27.JAN.2021 14:12:10

Cellular Band GSM Right Side Pre-AGC

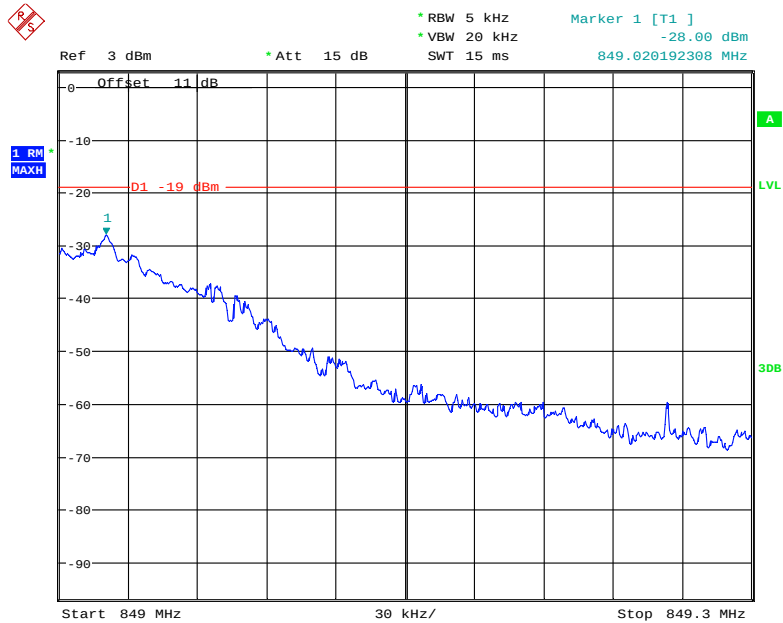


Date: 23.JAN.2021 16:49:31

Cellular Band GSM Right Side Above AGC

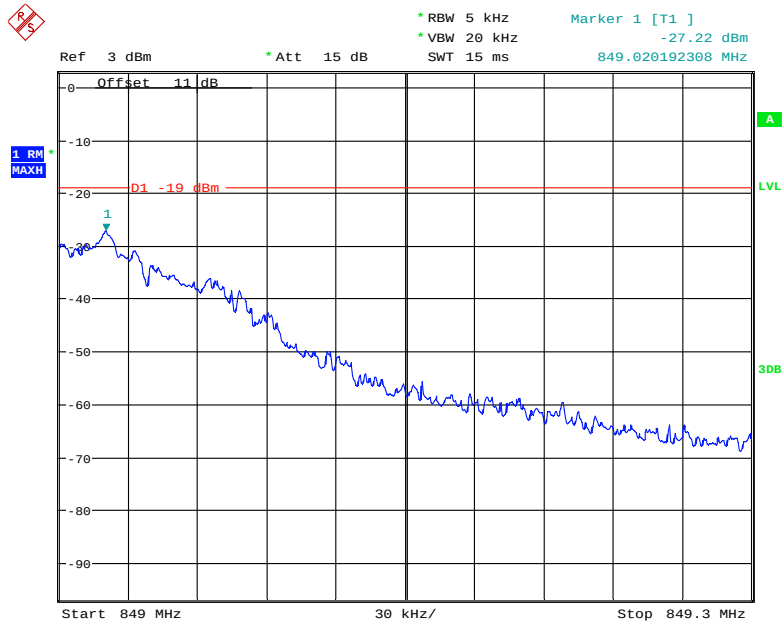


Date: 23.JAN.2021 16:51:47

Cellular Band WCDMA Right Side Pre-AGC

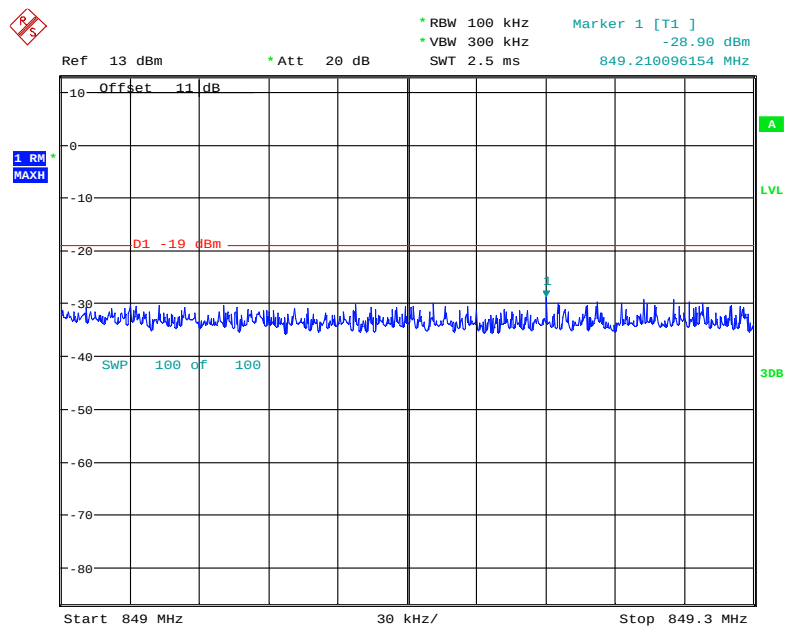


Date: 27.JAN.2021 14:00:29

Cellular Band WCDMA Right Side Above AGC

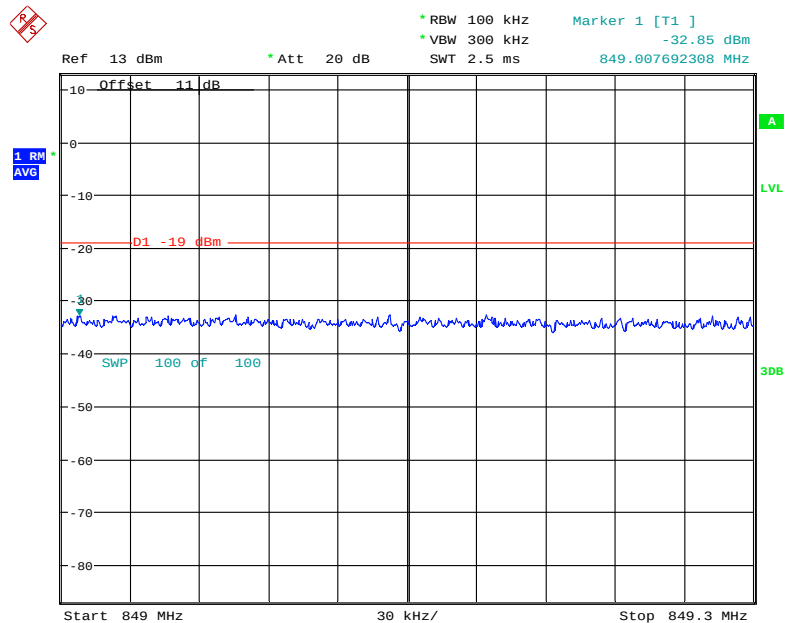


Date: 27.JAN.2021 14:00:48

PCS Band CDMA Left Side Pre-AGC

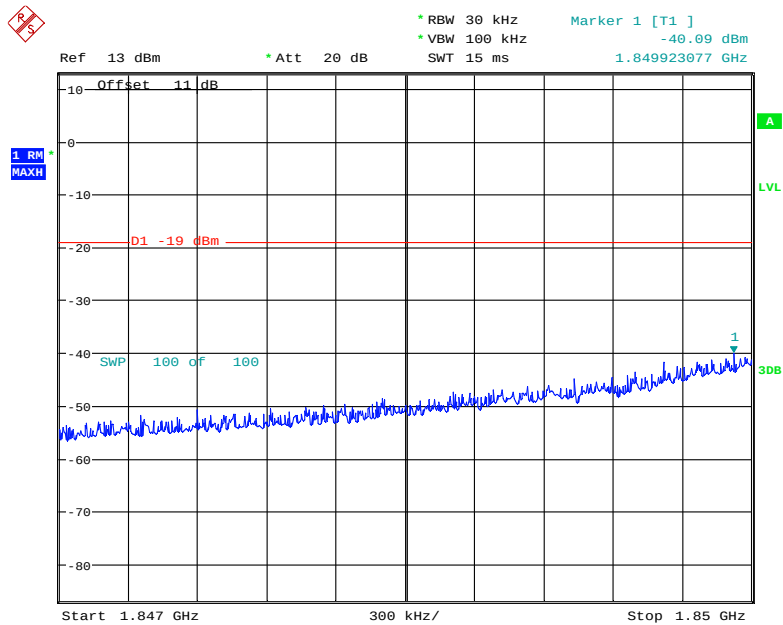


Date: 27.JAN.2021 14:07:01

PCS Band CDMA Left Side Above AGC

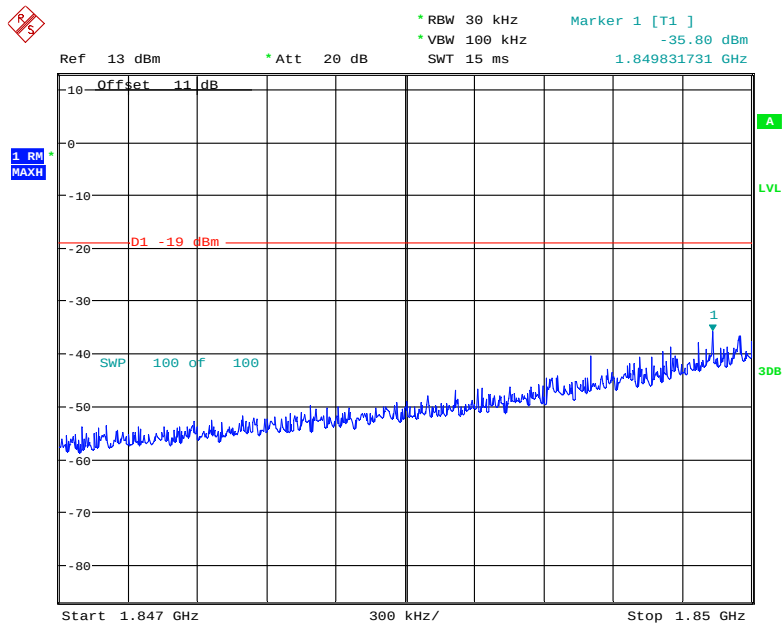


Date: 27.JAN.2021 14:07:27

PCS Band GSM Left Side Pre-AGC

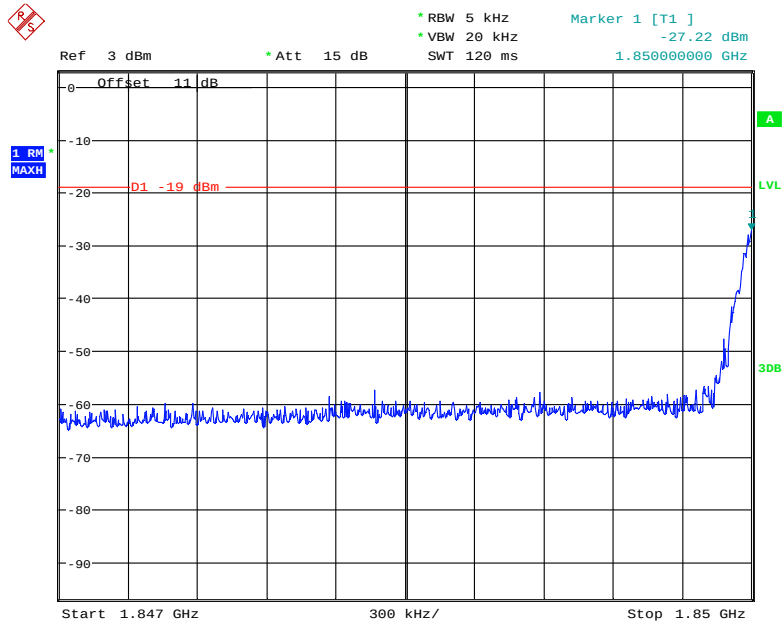


Date: 23.JAN.2021 16:43:27

PCS Band GSM Left Side Above AGC

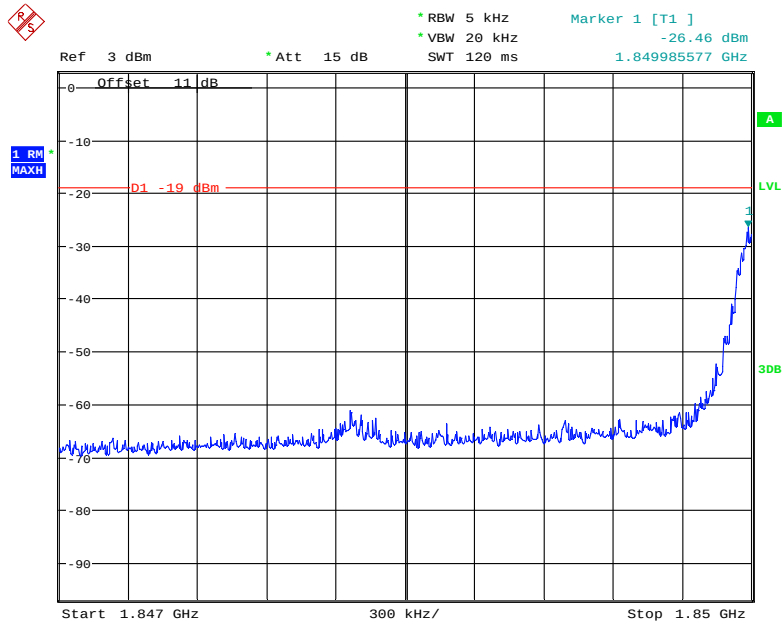


Date: 23.JAN.2021 16:44:26

PCS Band WCDMA Left Side Pre-AGC

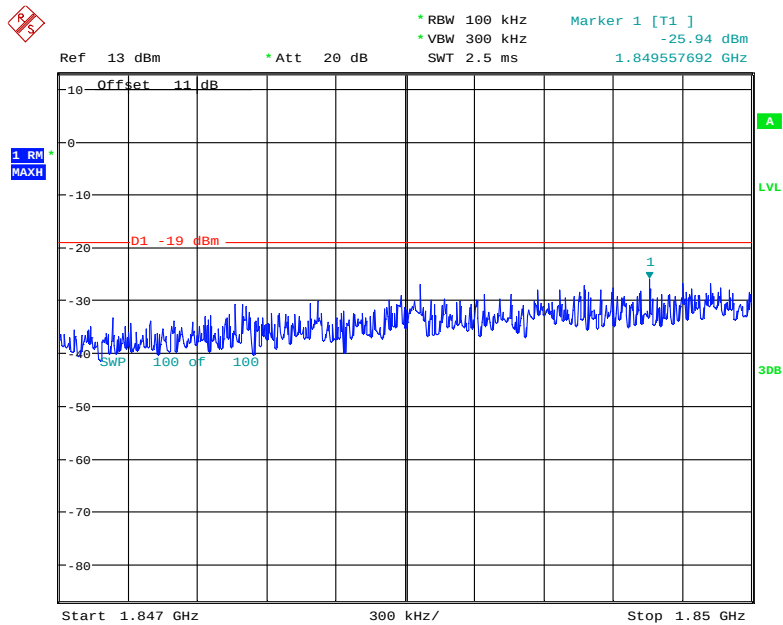


Date: 27.JAN.2021 14:03:57

PCS Band WCDMA Left Side Above AGC

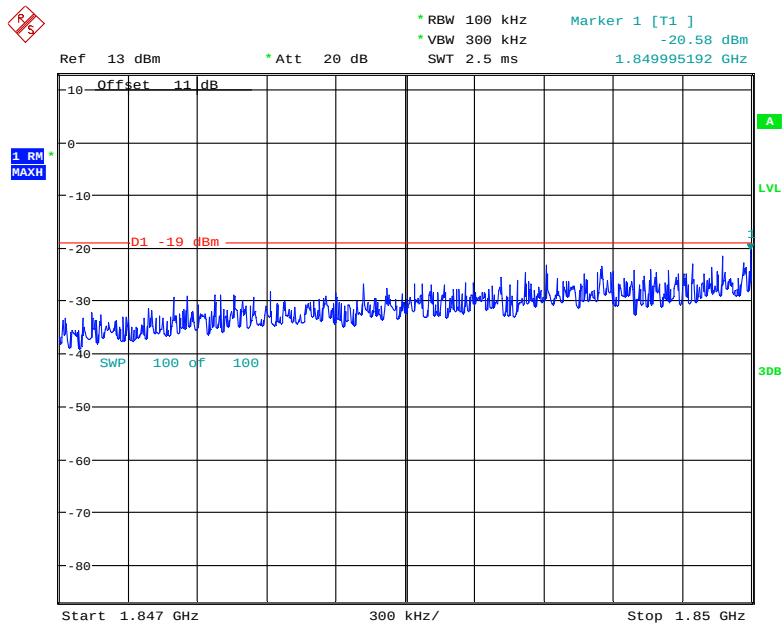


Date: 27.JAN.2021 14:04:25

PCS Band CDMA Right Side Pre-AGC

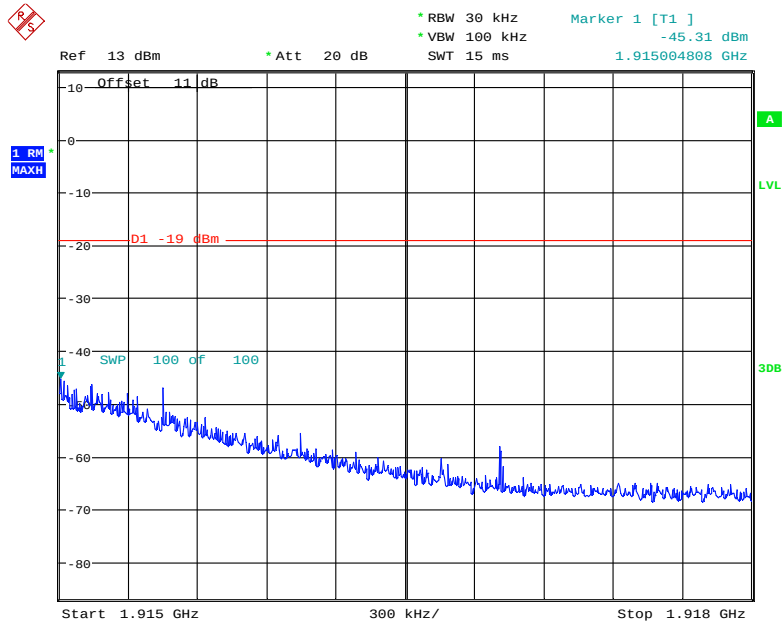


Date: 27.JAN.2021 14:06:10

PCS Band CDMA Right Side Above AGC

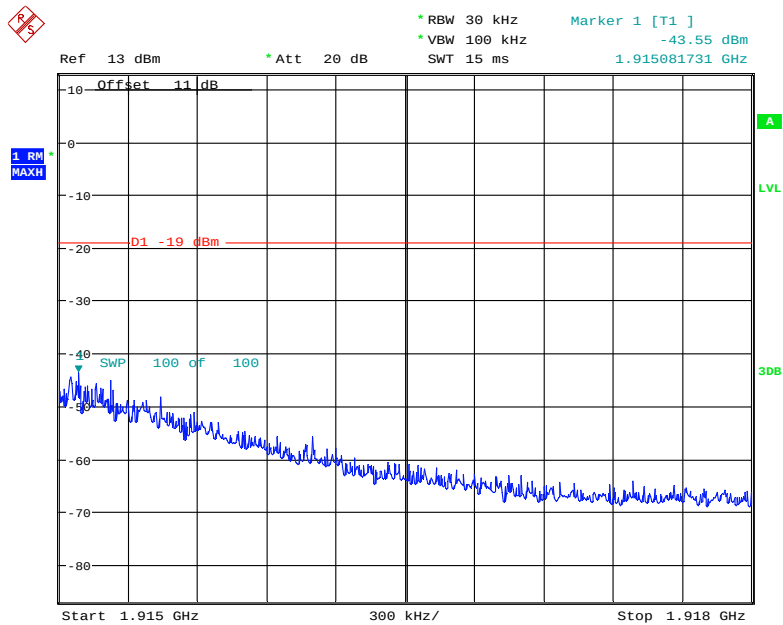


Date: 27.JAN.2021 14:06:27

PCS Band GSM Right Side Pre-AGC

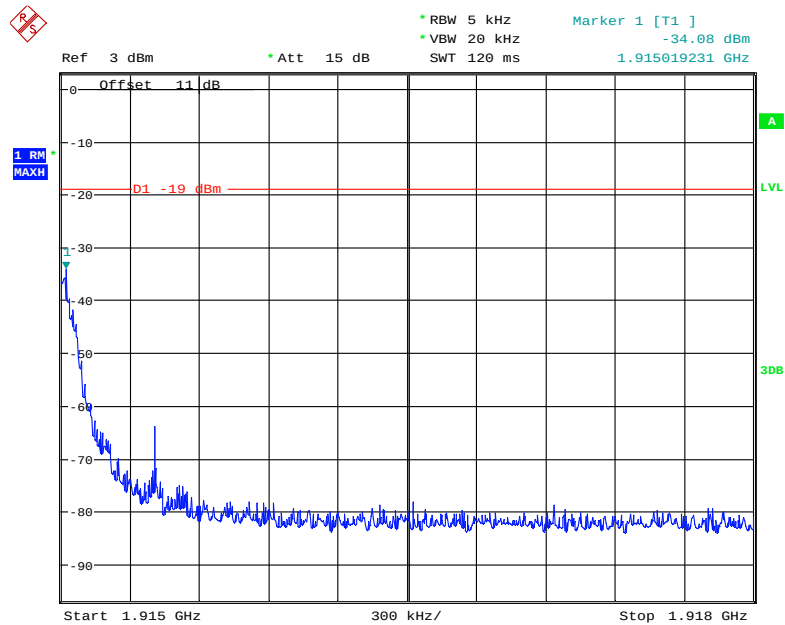


Date: 23.JAN.2021 16:40:05

PCS Band GSM Right Side Above AGC

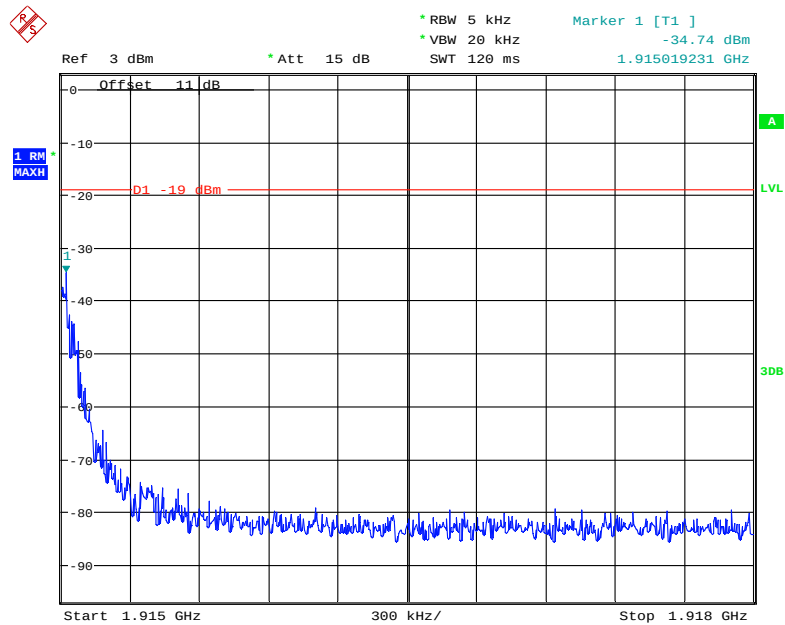


Date: 23.JAN.2021 16:40:36

PCS Band WCDMA Right Side Pre-AGC

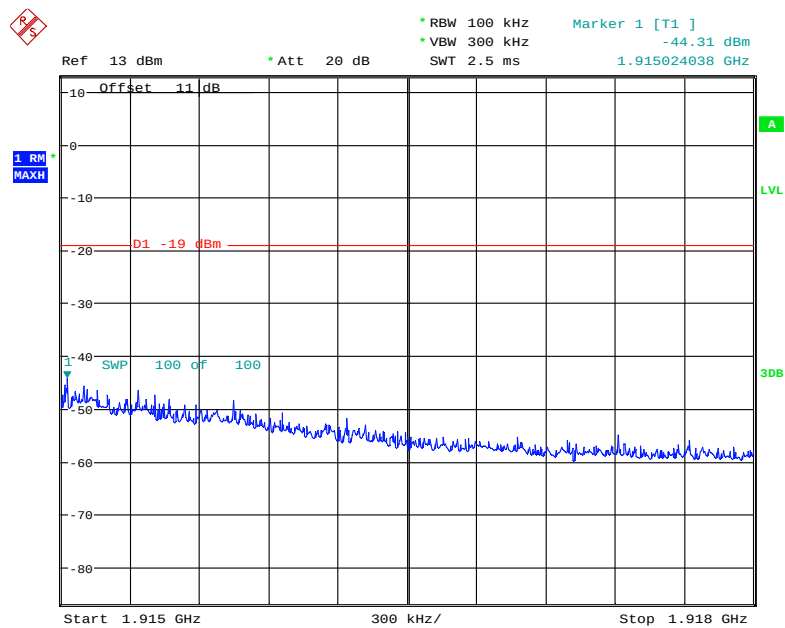


Date: 27.JAN.2021 14:05:03

PCS Band WCDMA Right Side Above AGC

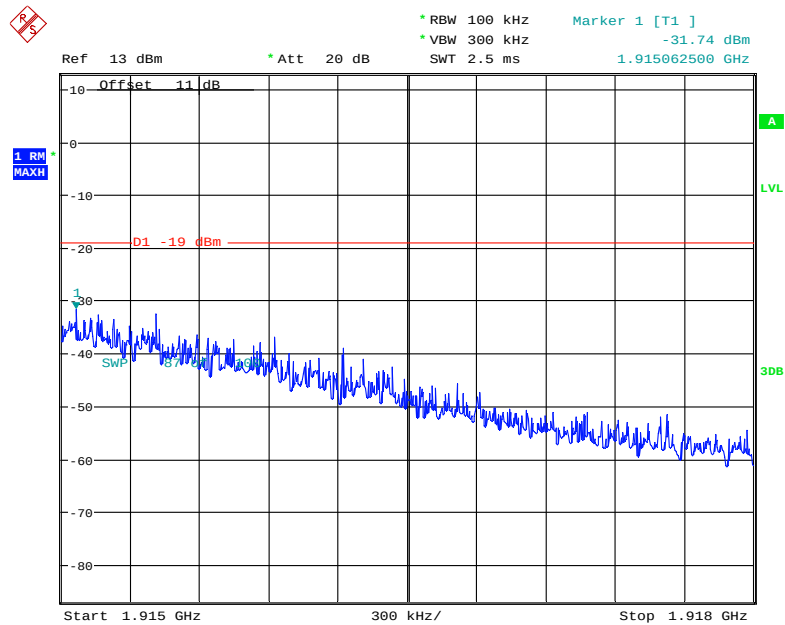


Date: 27.JAN.2021 14:05:16

AWS Band CDMA Left Side Pre-AGC

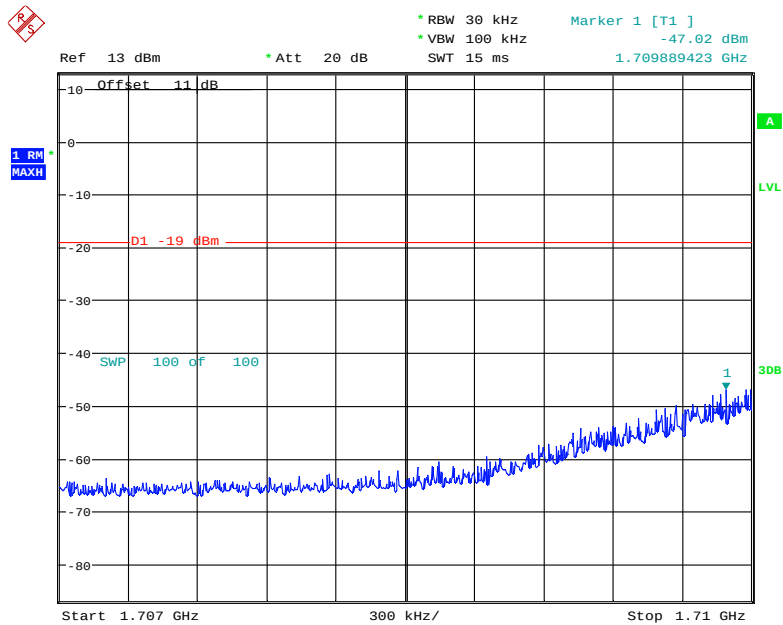


Date: 27.JAN.2021 14:08:02

AWS Band CDMA Left Side Above AGC

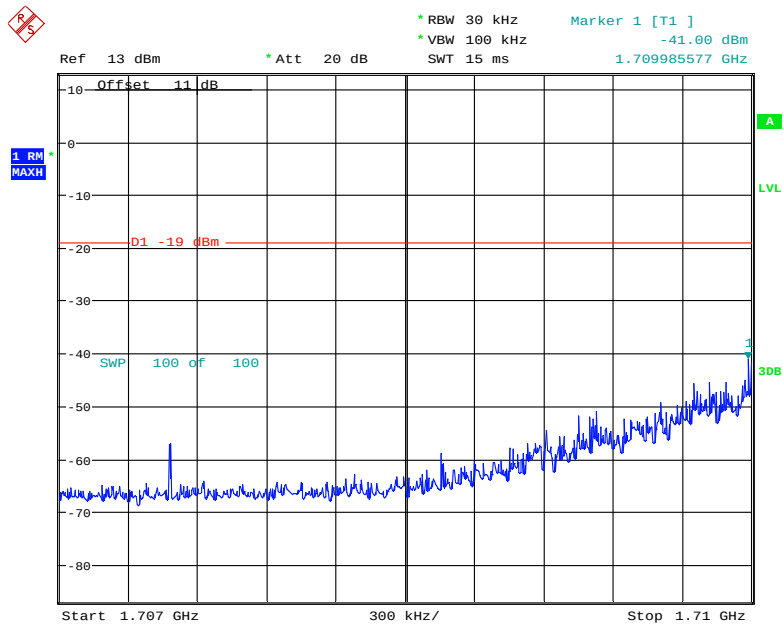


Date: 27.JAN.2021 14:08:48

AWS Band GSM Left Side Pre-AGC

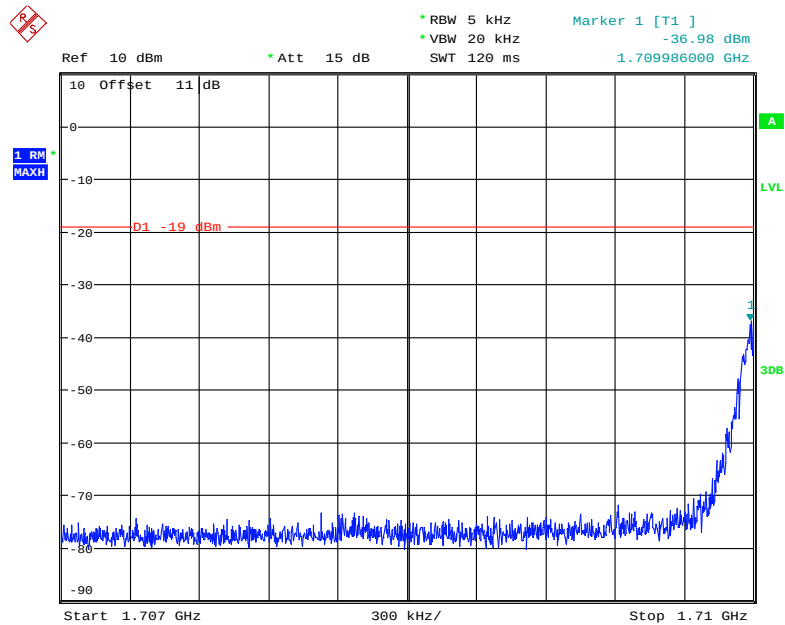


Date: 29.JAN.2021 15:19:59

AWS Band GSM Left Side Above AGC

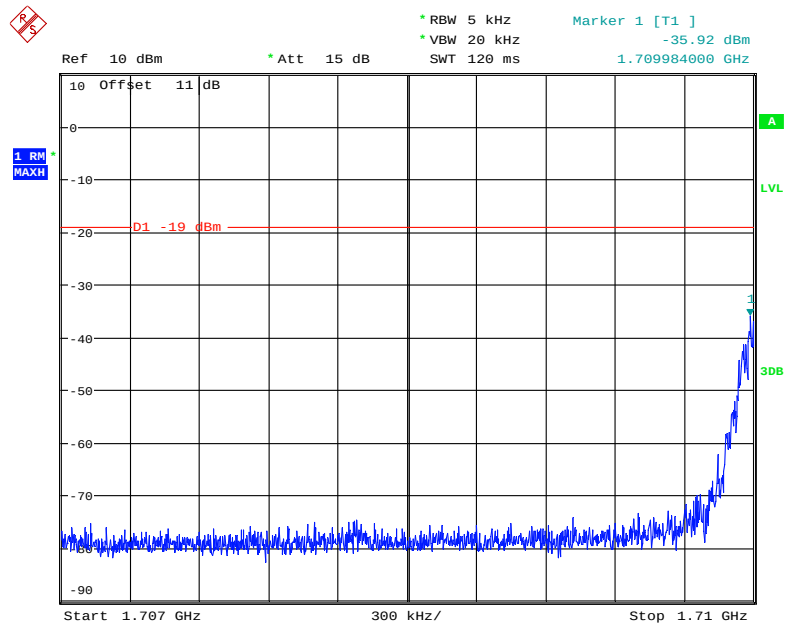


Date: 29.JAN.2021 15:20:35

AWS Band WCDMA Left Side Pre-AGC

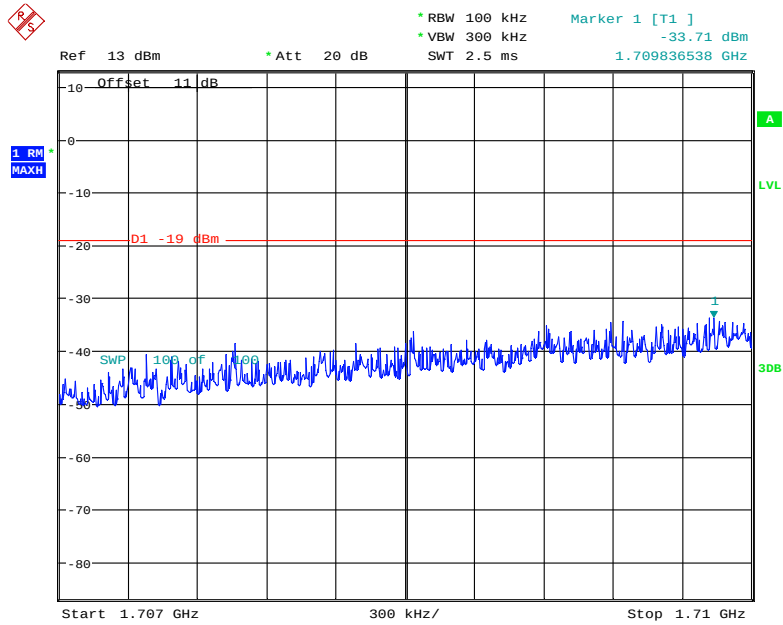


Date: 27.JAN.2021 14:01:49

AWS Band WCDMA Left Side Above AGC

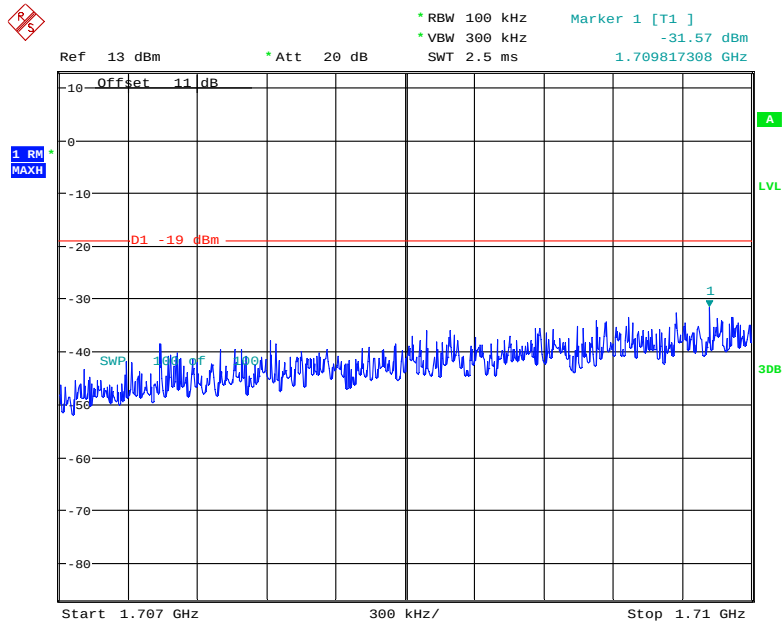


Date: 27.JAN.2021 14:02:19

AWS Band CDMA Right Side Pre-AGC

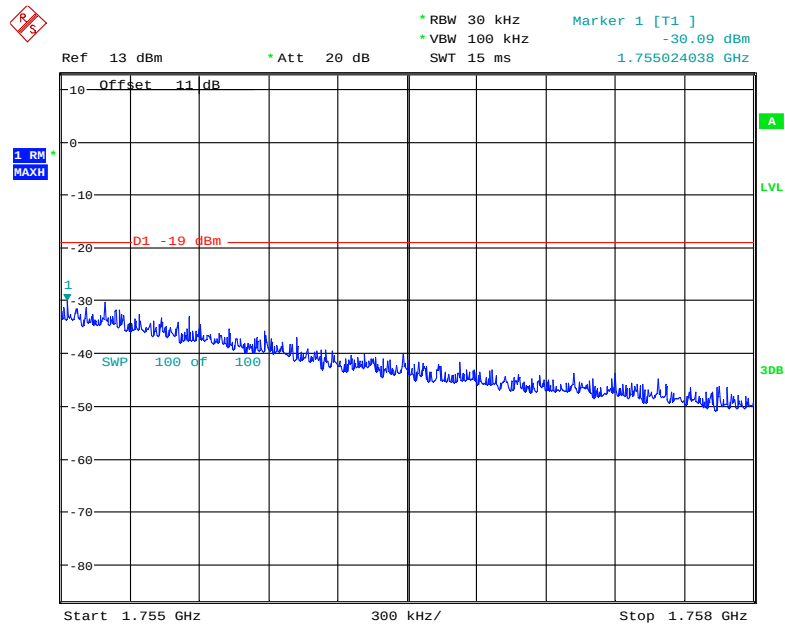


Date: 27.JAN.2021 14:09:24

AWS Band CDMA Right Side Above AGC

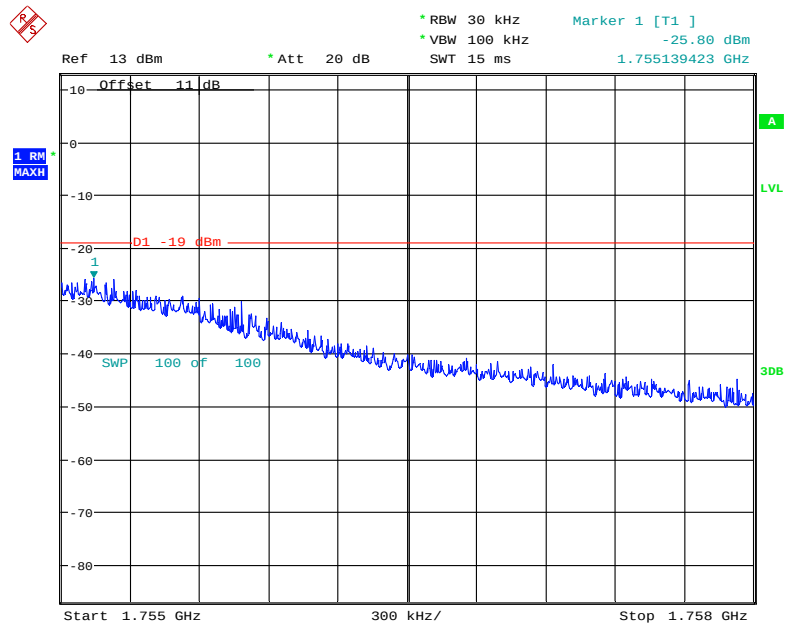


Date: 27.JAN.2021 14:09:40

AWS Band GSM Right Side Pre-AGC

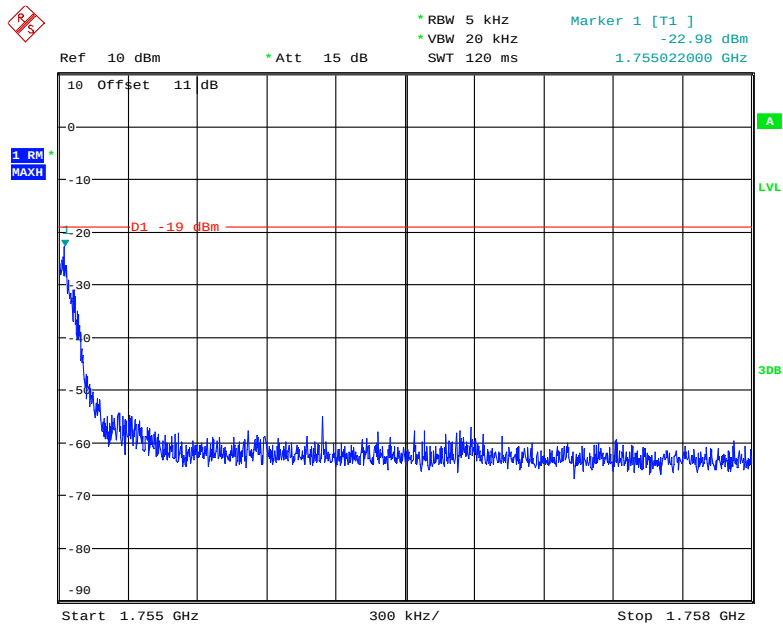


Date: 29.JAN.2021 15:22:27

AWS Band GSM Right Side Above AGC

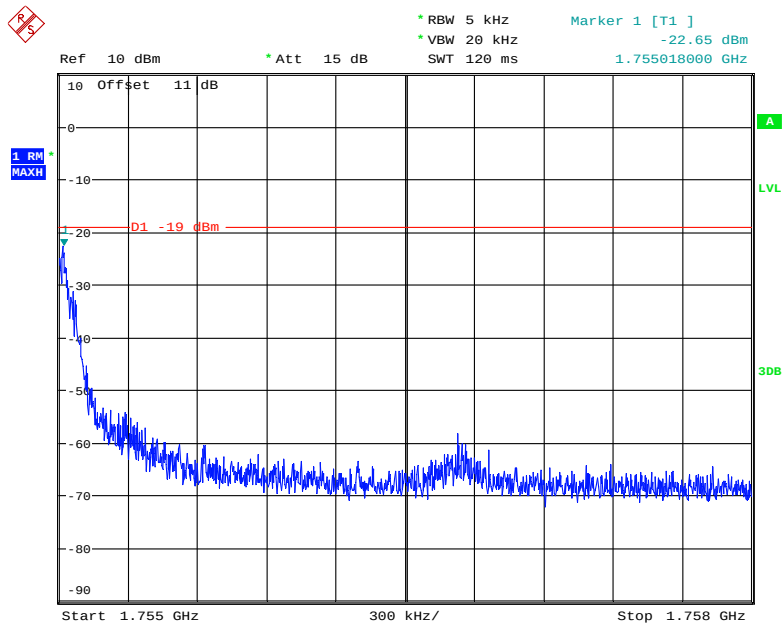


Date: 29.JAN.2021 15:22:52

AWS Band WCDMA Right Side Pre-AGC

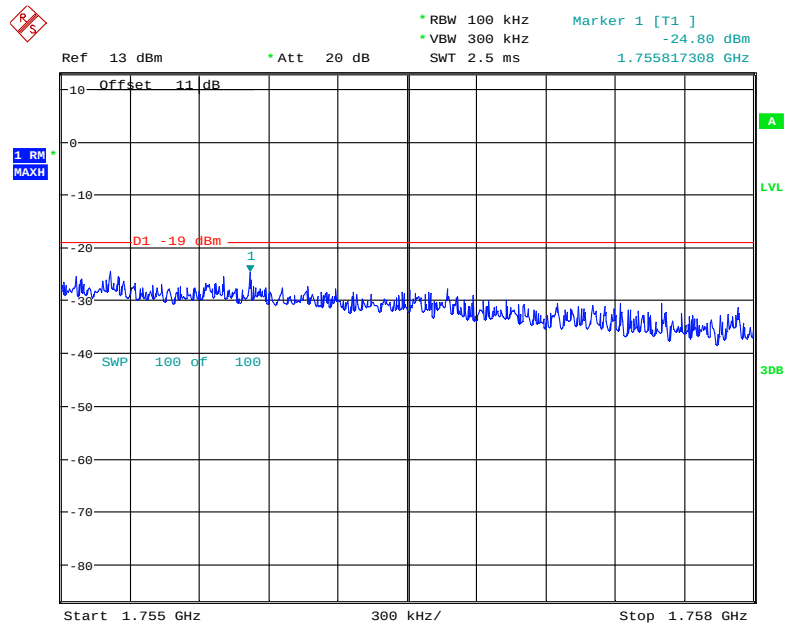

Date: 27.JAN.2021 14:03:13


AWS Band WCDMA Right Side Above AGC

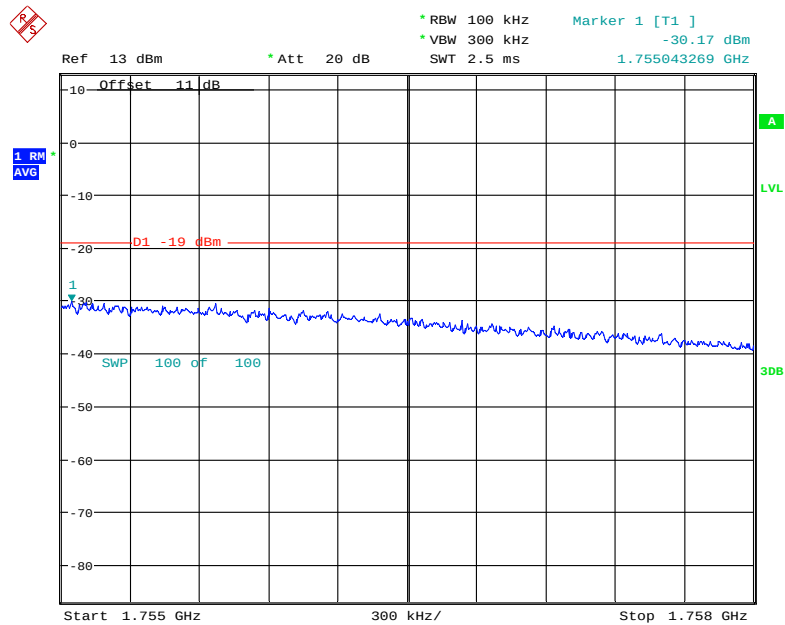

Date: 27.JAN.2021 14:03:27


Downlink

Lower 700MHz CDMA Left Side Pre-AGC

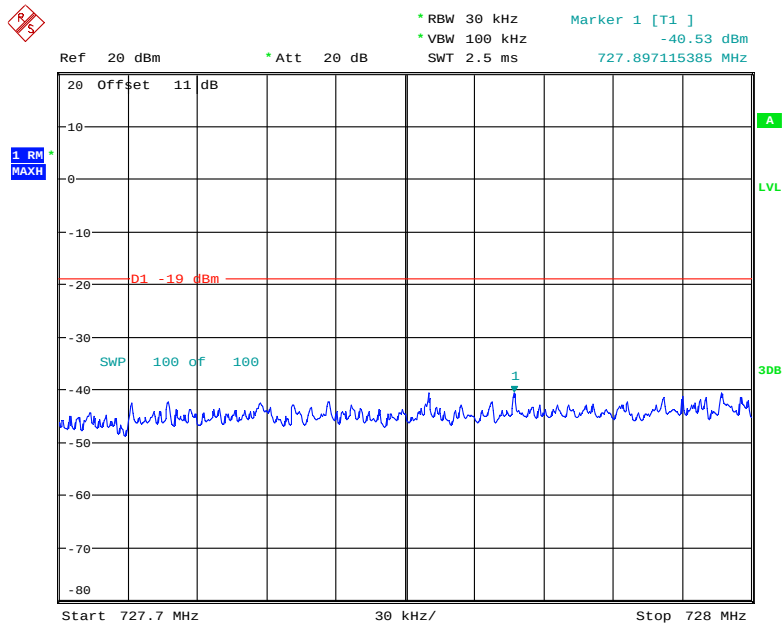


Date: 27.JAN.2021 15:13:17

Lower 700MHz CDMA Left Side Above AGC

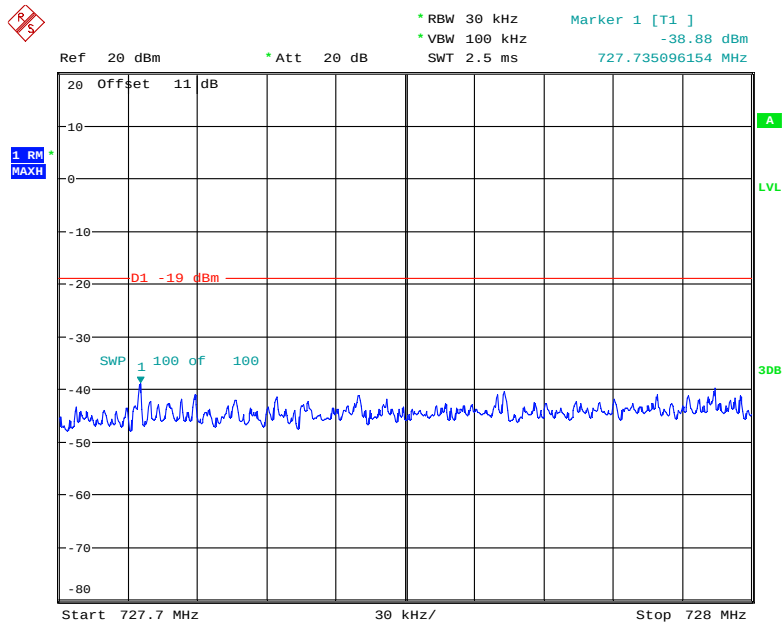


Date: 27.JAN.2021 15:49:43

Lower 700MHz GSM Left Side Pre-AGC

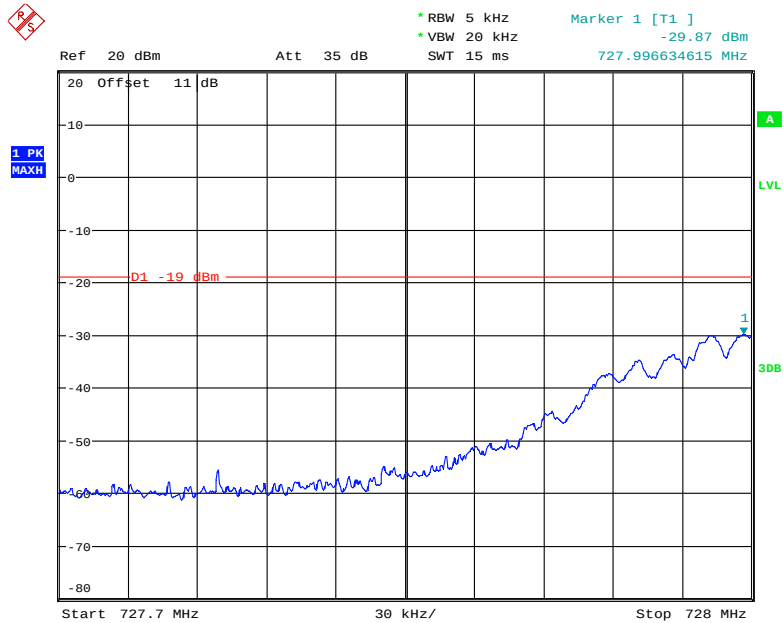

Date: 26.JAN.2021 13:14:07

Lower 700MHz GSM Left Side Above AGC

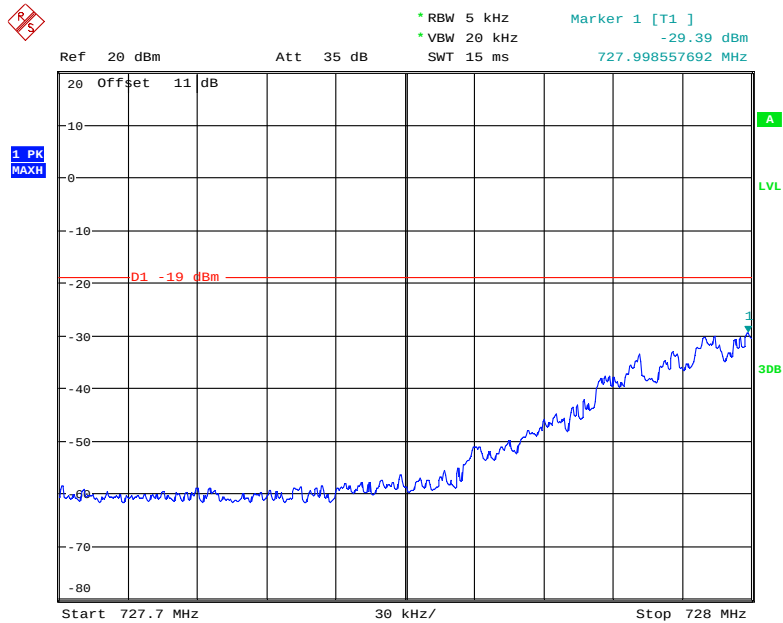

Date: 26.JAN.2021 13:18:17

Ref 20 dBm * Att 20 dB * RBW 100 kHz * VBW 300 kHz Marker 1 [T1] -30.48 dBm
SWT 2.5 ms 727.712019231 MHz

20 Offset 11 dB

10

0

-10

-20 D1 -19 dBm

-30 1

-40 SWP 100 dB 100

-50

-60

-70

-80

Start 727.7 MHz 30 kHz/ Stop 728 MHz


1 RM MAXH

A

LVL


3DB

Lower 700MHz WCDMA Left Side Above AGC

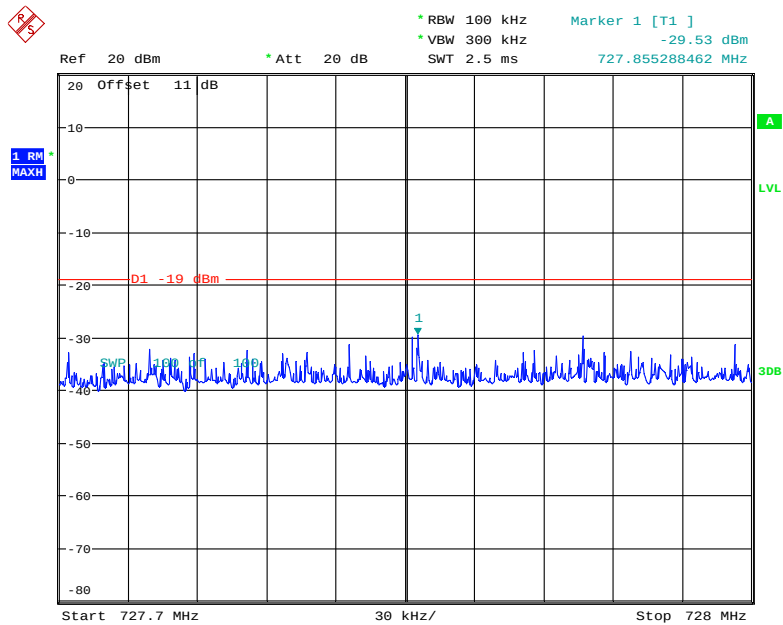


Page 69 of 190

Lower 700MHz CDMA Right Side Pre-AGC

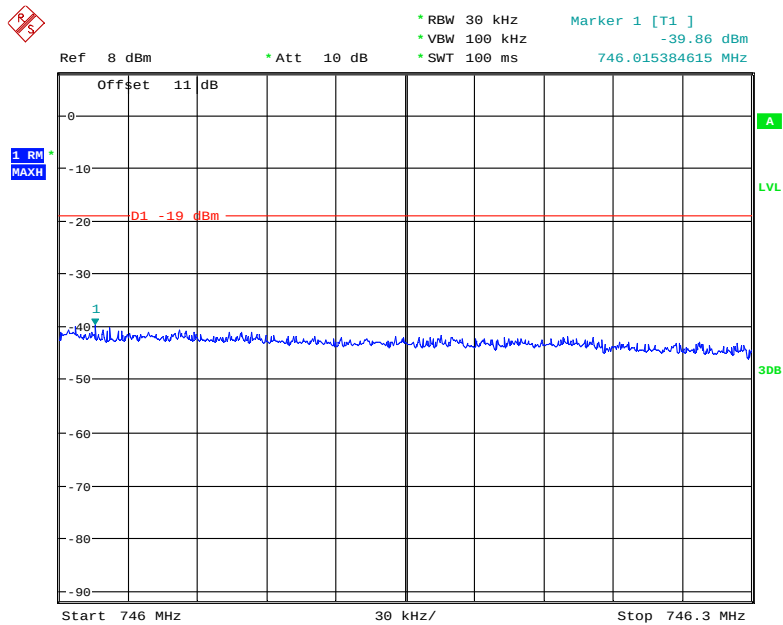


Date: 1.FEB.2021 09:06:16

Lower 700MHz CDMA Right Side Above AGC

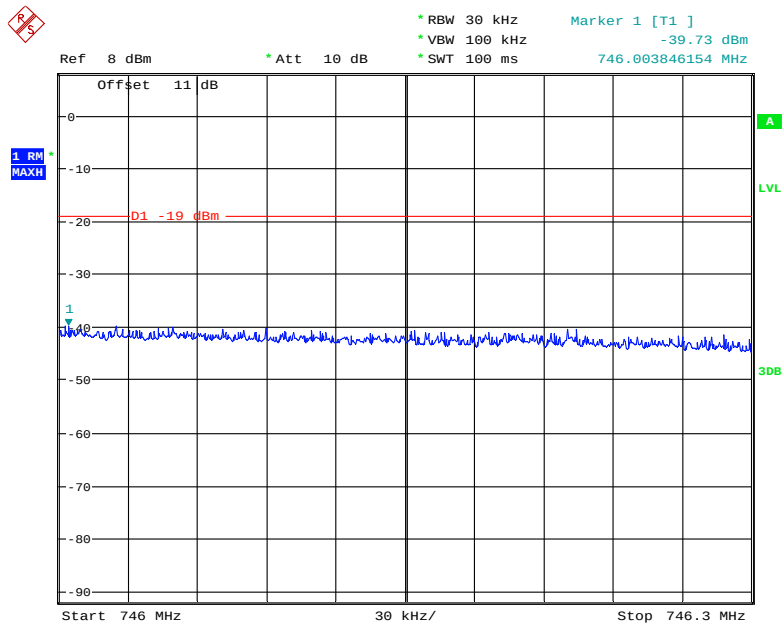


Date: 1.FEB.2021 09:07:03

Lower 700MHz GSM Right Side Pre-AGC

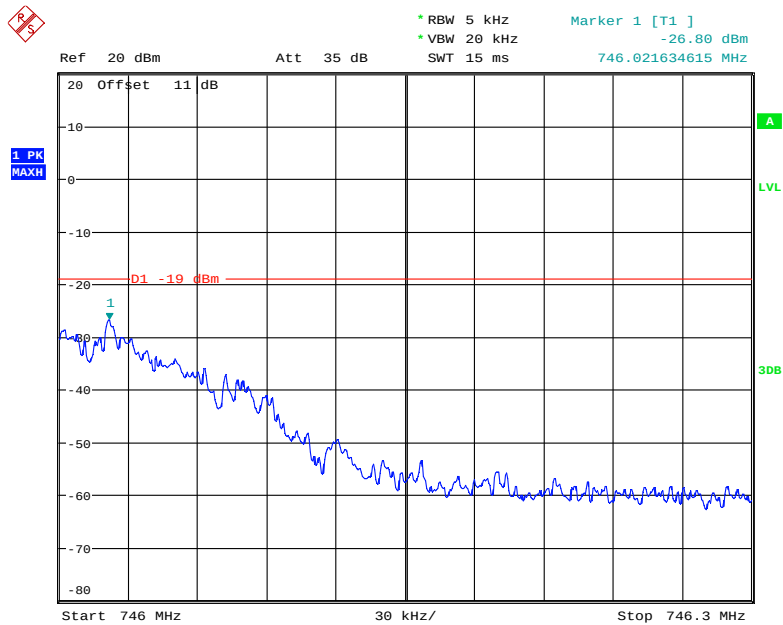


Date: 26.JAN.2021 13:59:49

Lower 700MHz GSM Right Side Above AGC

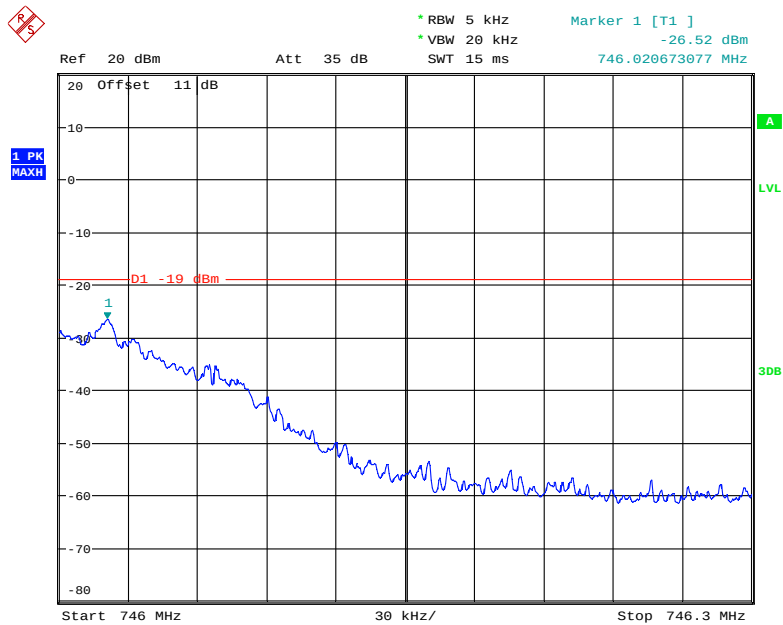


Date: 26.JAN.2021 13:55:23

Lower 700MHz WCDMA Right Side Pre-AGC

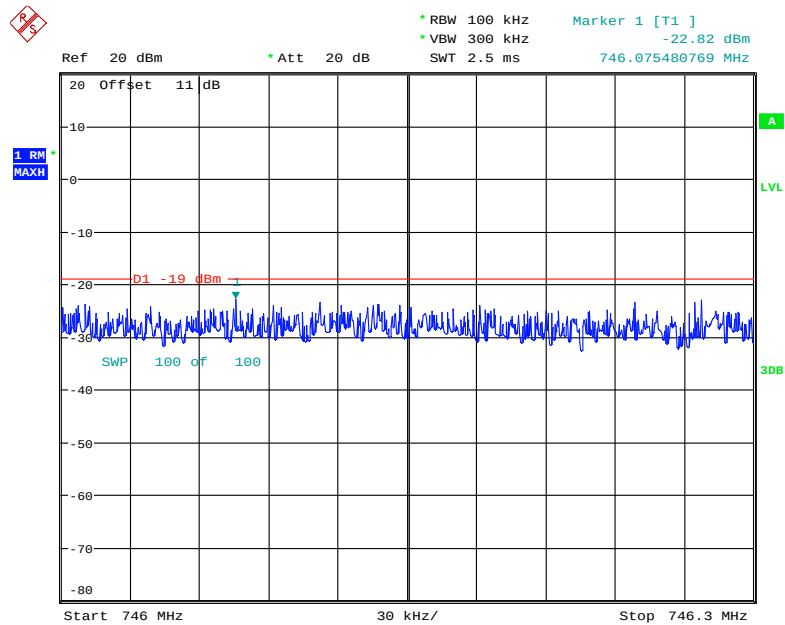


Date: 27.JAN.2021 16:43:08

Lower 700MHz WCDMA Right Side Above AGC

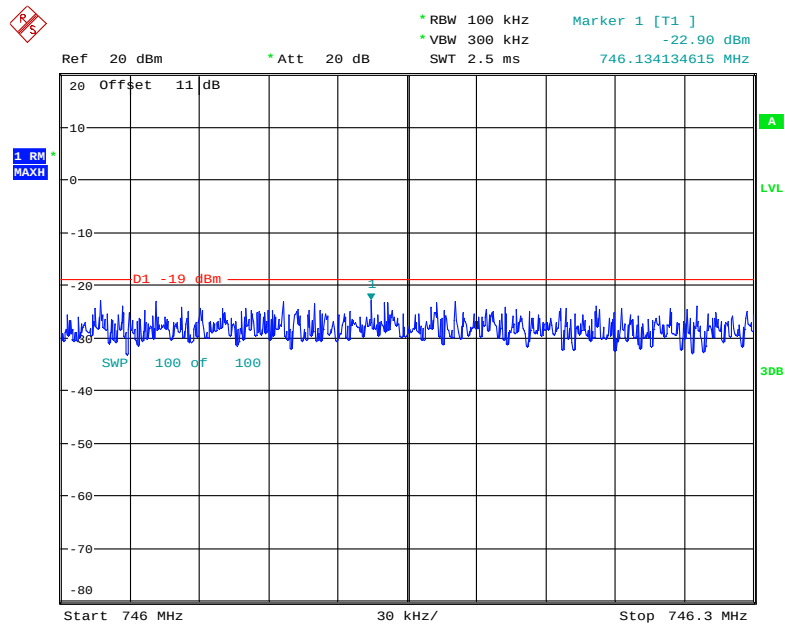


Date: 27.JAN.2021 16:44:46

Upper 700MHz CDMA Left Side Pre-AGC

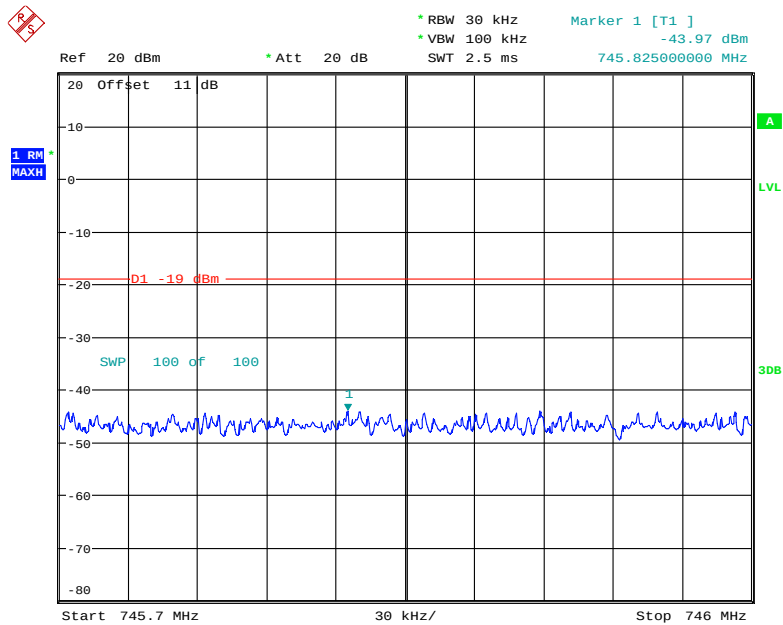


Date: 27.JAN.2021 16:02:06

Upper 700MHz CDMA Left Side Above AGC

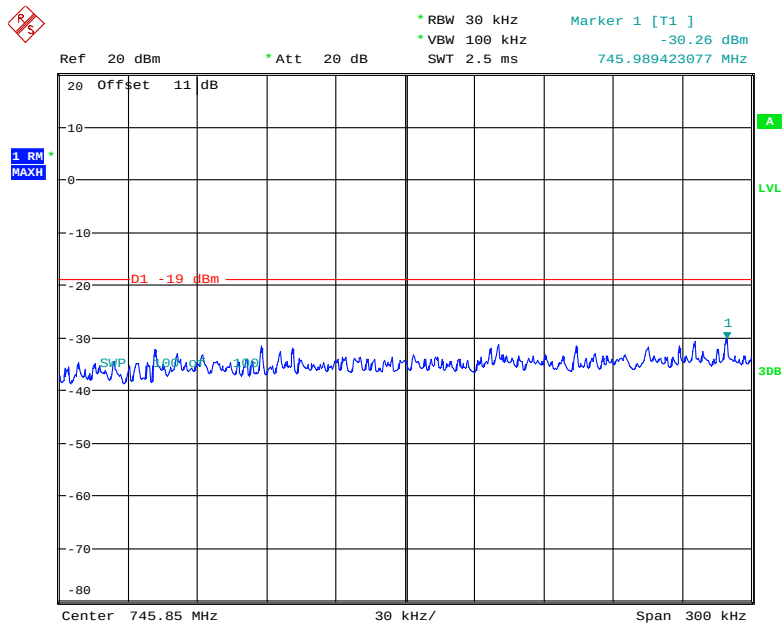


Date: 27.JAN.2021 15:54:18

Upper 700MHz GSM Left Side Pre-AGC

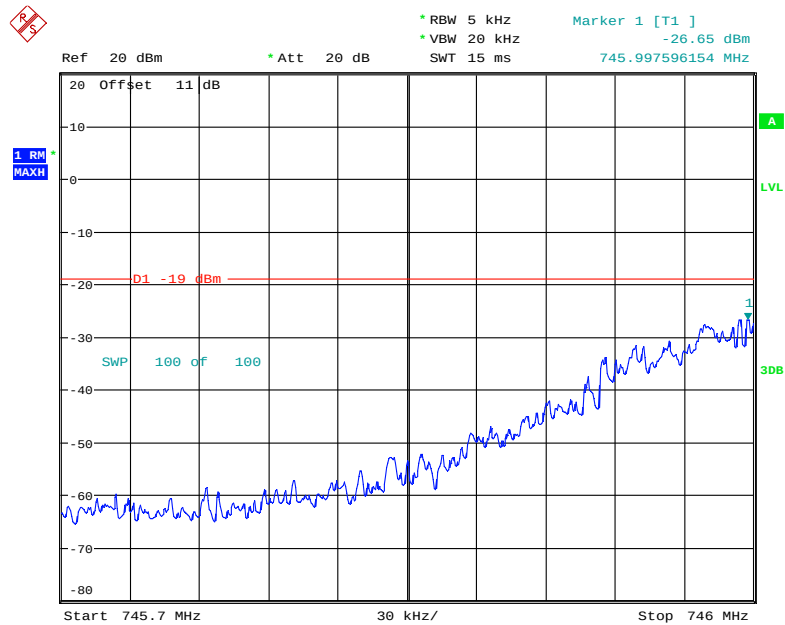


Date: 27.JAN.2021 17:03:34

Upper 700MHz GSM Left Side Above AGC

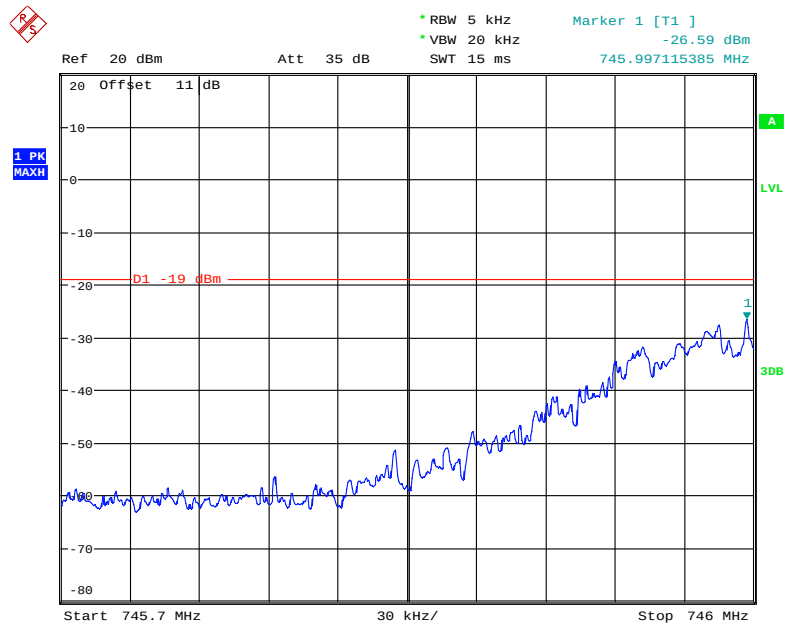


Date: 26.JAN.2021 14:01:35

Upper 700MHz WCDMA Left Side Pre-AGC

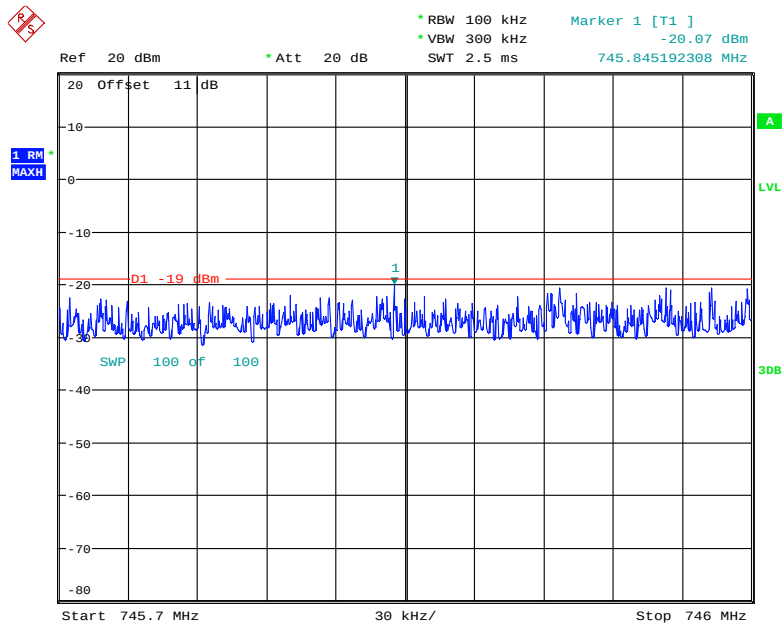


Date: 27.JAN.2021 16:36:13

Upper 700MHz WCDMA Left Side Above AGC

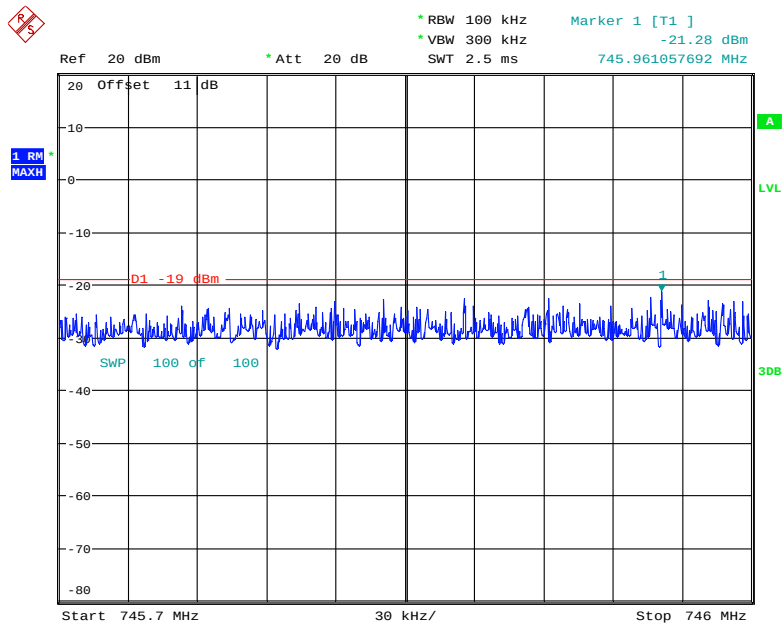


Date: 27.JAN.2021 16:37:25

Upper 700MHz CDMA Right Side Pre-AGC

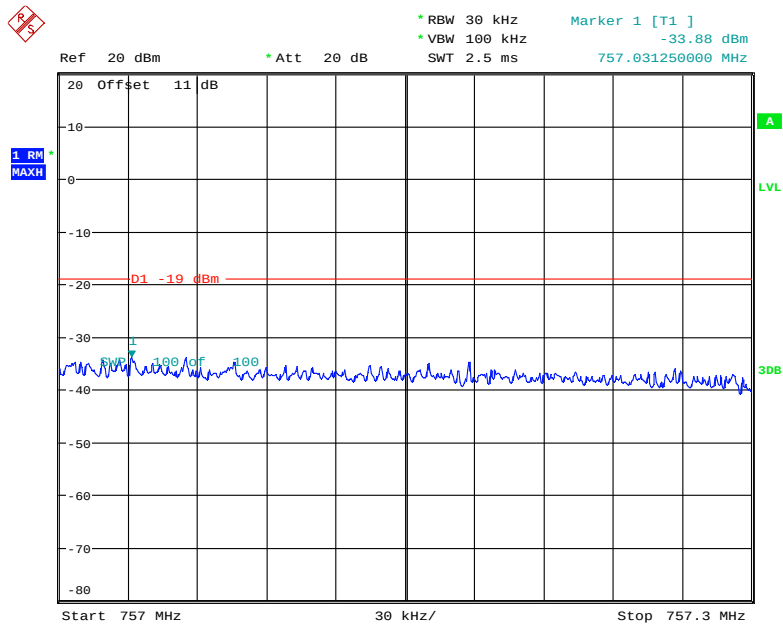


Date: 27.JAN.2021 15:55:34

Upper 700MHz CDMA Right Side Above AGC

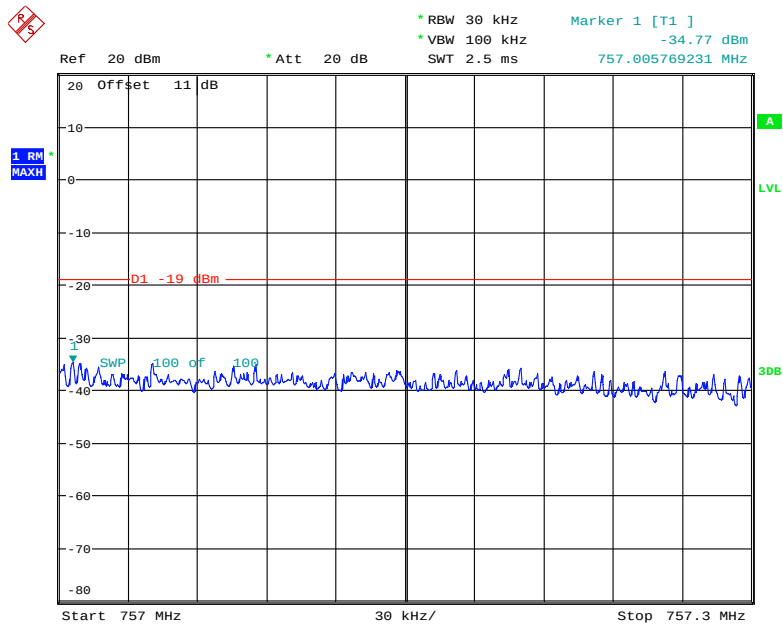


Date: 27.JAN.2021 15:56:31

Upper 700MHz GSM Right Side Pre-AGC

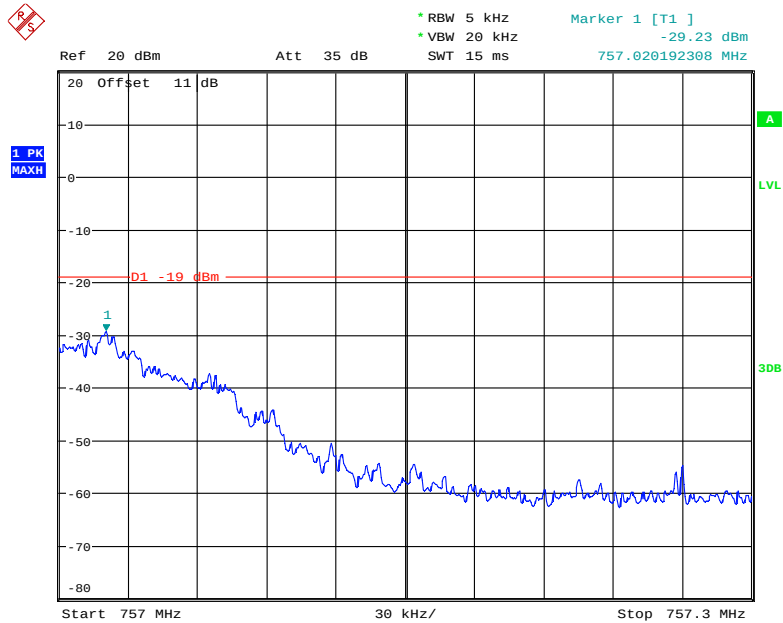


Date: 26.JAN.2021 14:02:57

Upper 700MHz GSM Right Side Above AGC

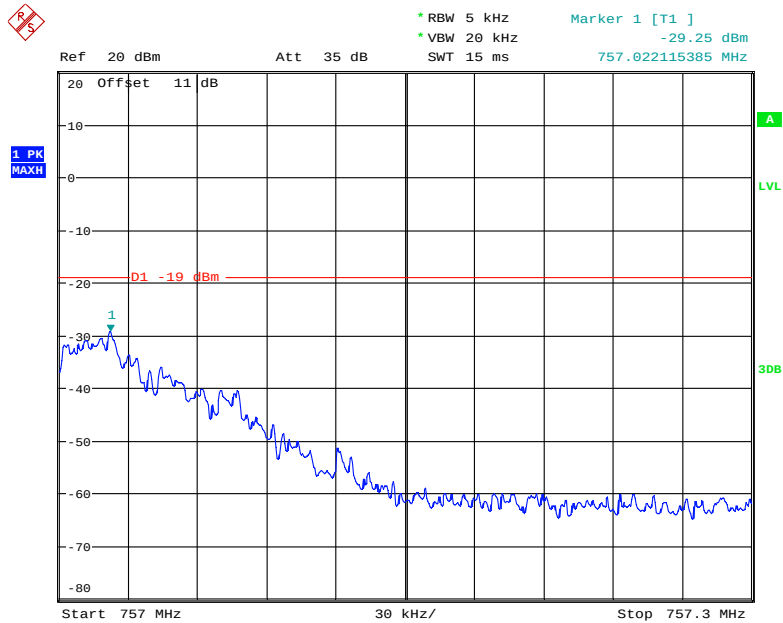


Date: 26.JAN.2021 14:03:15

Upper 700MHz WCDMA Right Side Pre-AGC

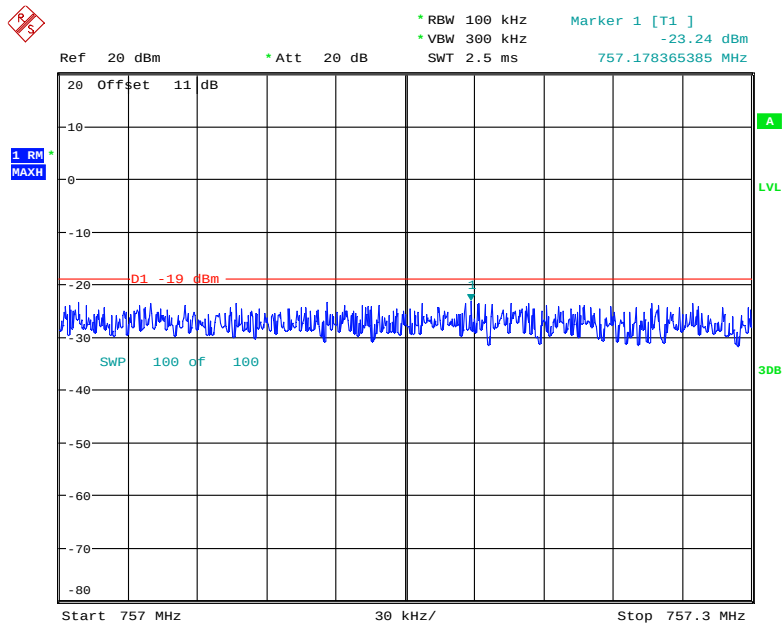


Date: 27.JAN.2021 16:39:51

Upper 700MHz WCDMA Right Side Above AGC

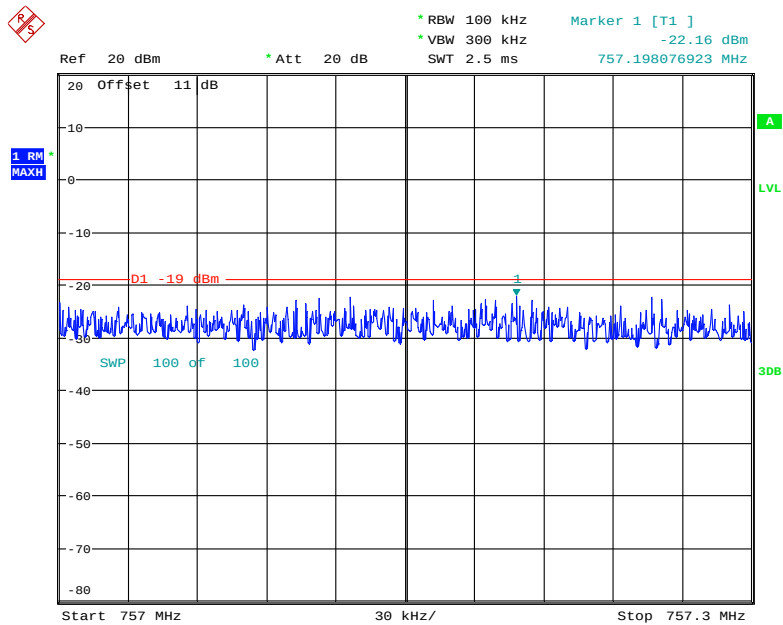


Date: 27.JAN.2021 16:40:29

Cellular Band CDMA Left Side Pre-AGC

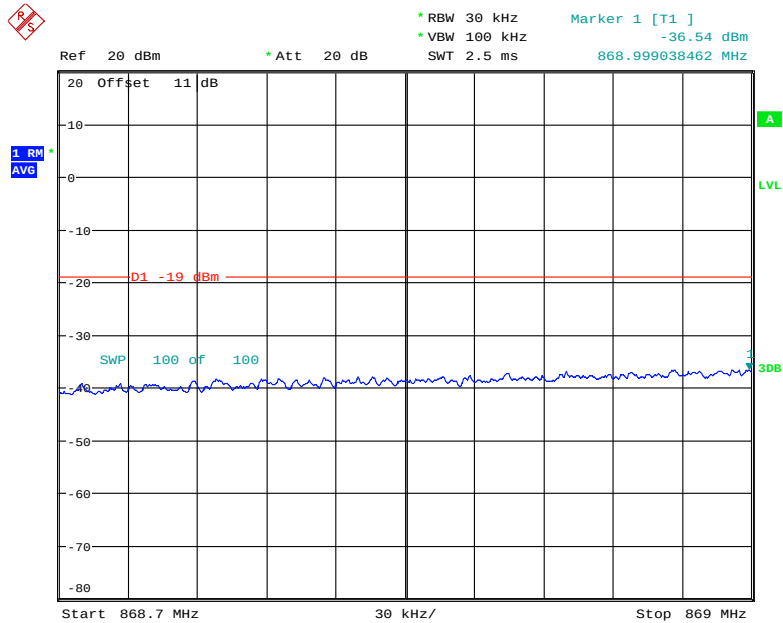


Date: 27.JAN.2021 16:04:18

Cellular Band CDMA Left Side Above AGC

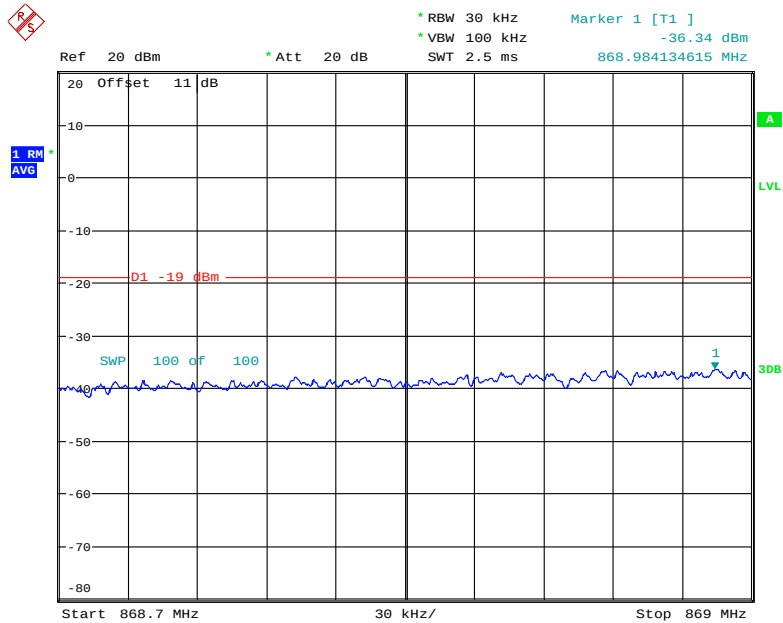


Date: 27.JAN.2021 16:05:37

Cellular Band GSM Left Side Pre-AGC

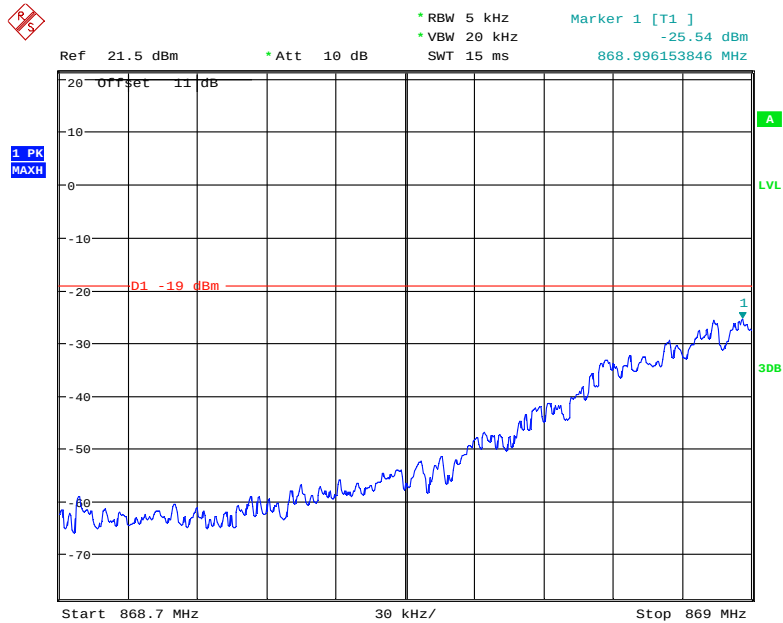


Date: 26.JAN.2021 15:55:43

Cellular Band GSM Left Side Above AGC

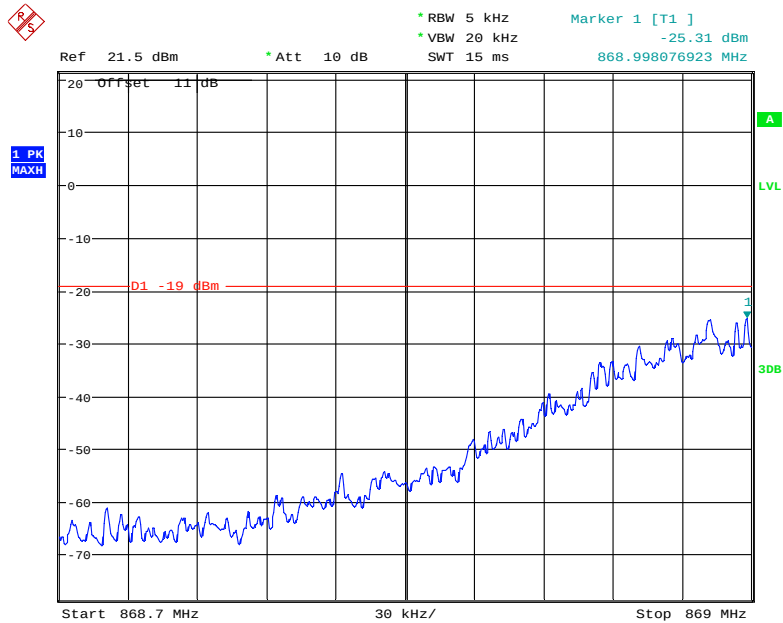


Date: 26.JAN.2021 15:56:07

Cellular Band WCDMA Left Side Pre-AGC

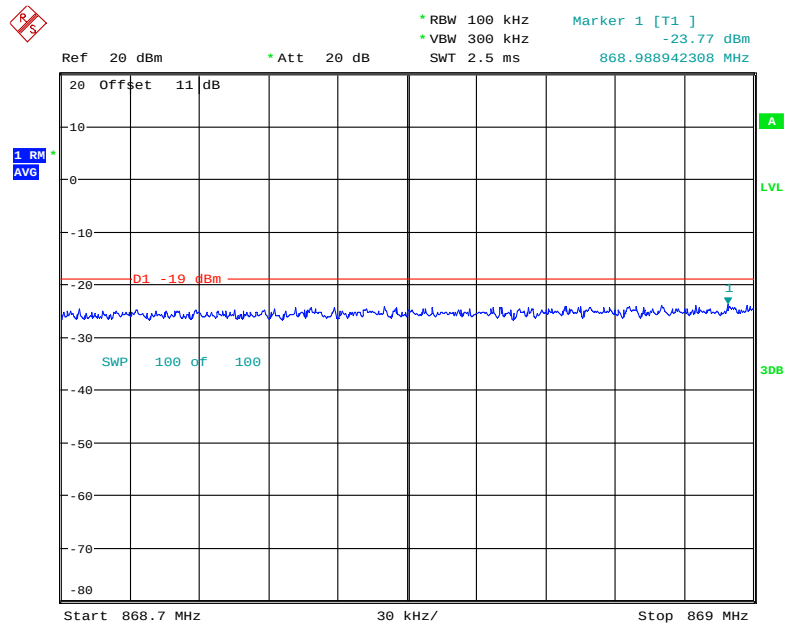


Date: 27.JAN.2021 16:26:09

Cellular Band WCDMA Left Side Above AGC

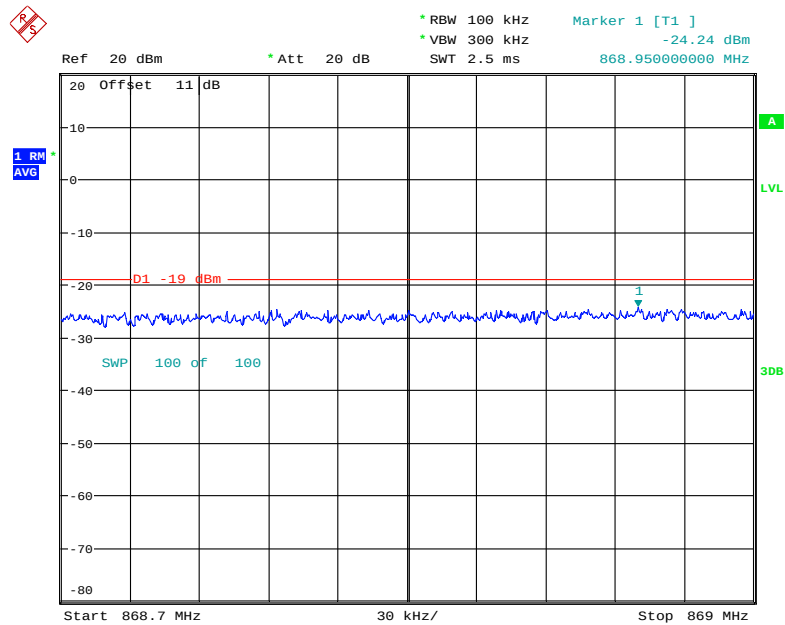


Date: 27.JAN.2021 16:26:41

Cellular Band CDMA Right Side Pre-AGC

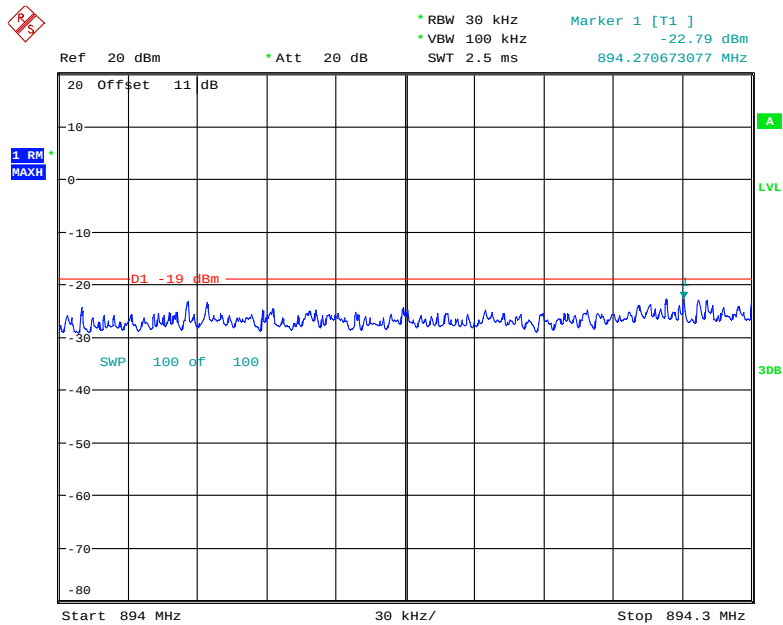


Date: 27.JAN.2021 16:06:38

Cellular Band CDMA Right Side Above AGC

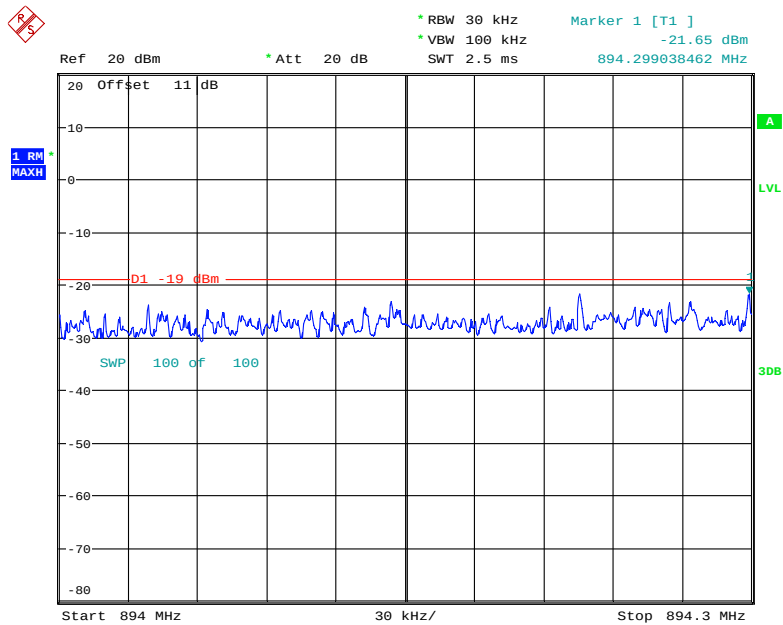


Date: 27.JAN.2021 16:06:53

Cellular Band GSM Right Side Pre-AGC

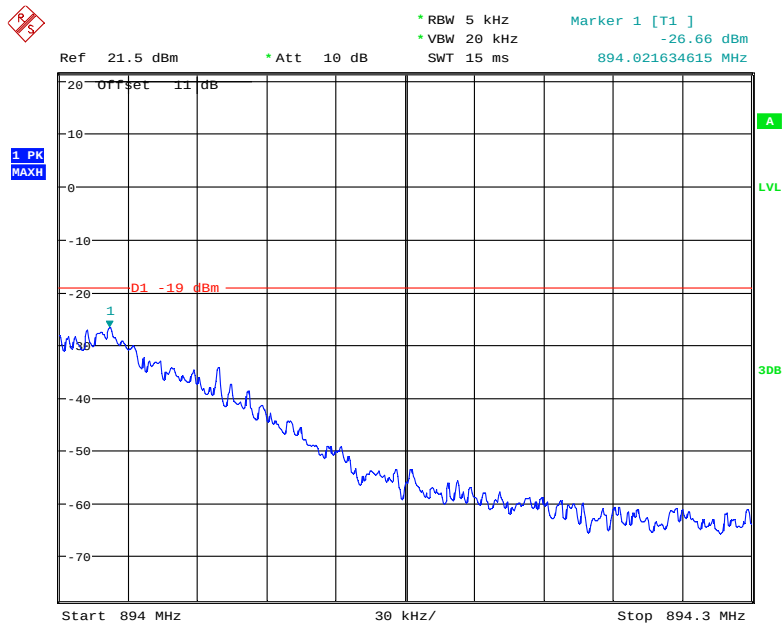


Date: 26.JAN.2021 15:57:16

Cellular Band GSM Right Side Above AGC

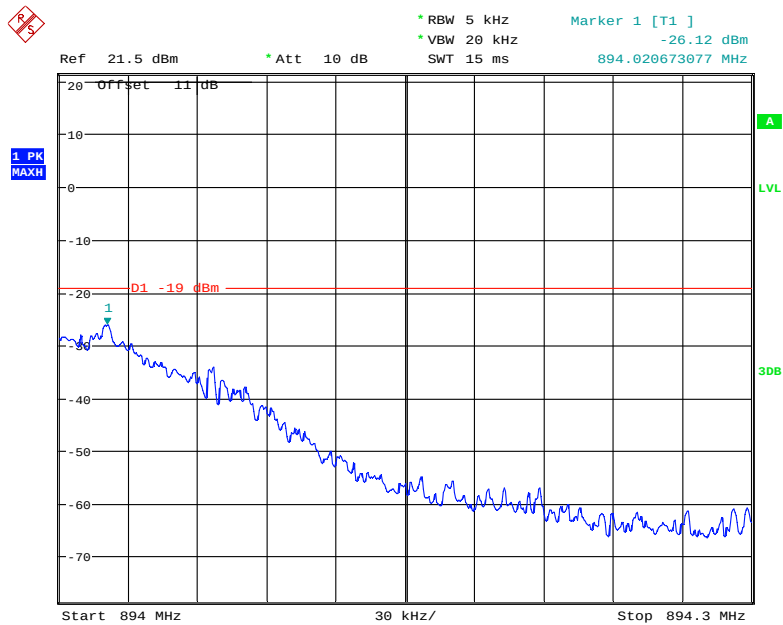


Date: 26.JAN.2021 15:57:38

Cellular Band WCDMA Right Side Pre-AGC

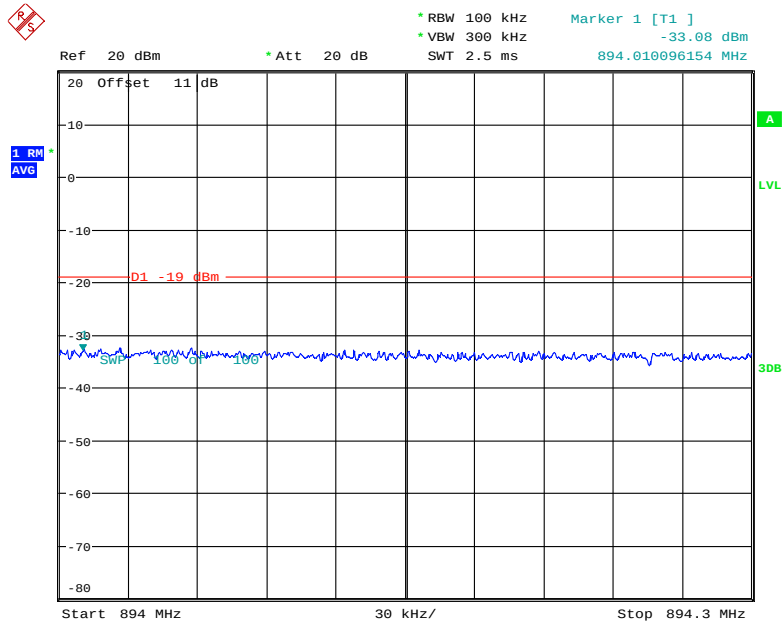


Date: 27.JAN.2021 16:28:18

Cellular Band WCDMA Right Side Above AGC

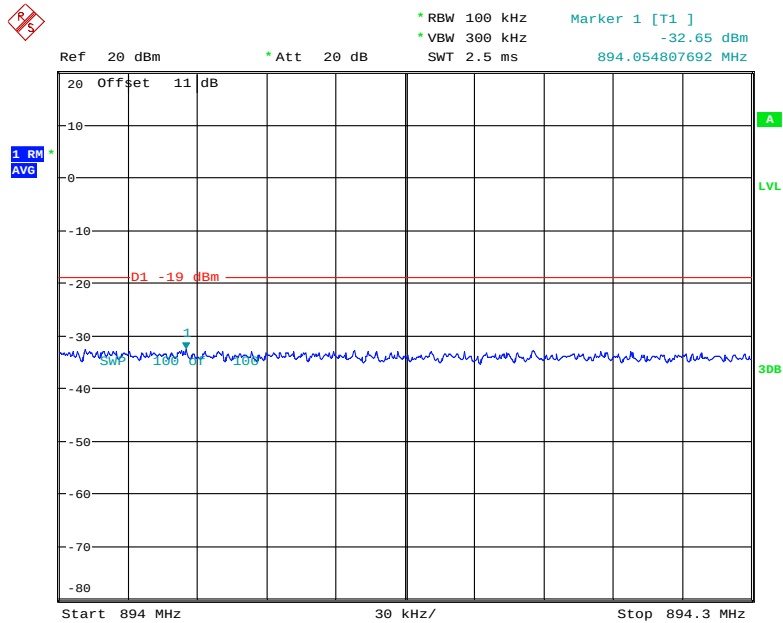


Date: 27.JAN.2021 16:28:40

PCS Band CDMA Left Side Pre-AGC

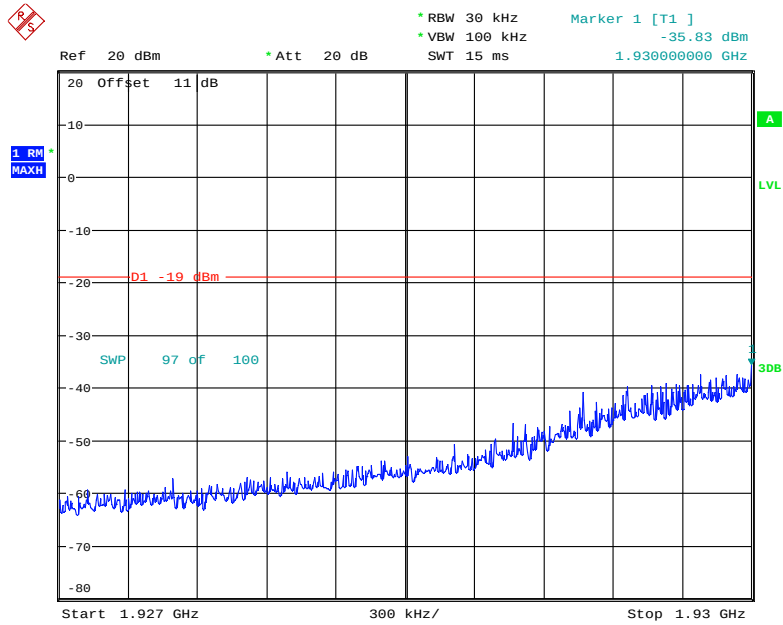


Date: 27.JAN.2021 16:10:35

PCS Band CDMA Left Side Above AGC

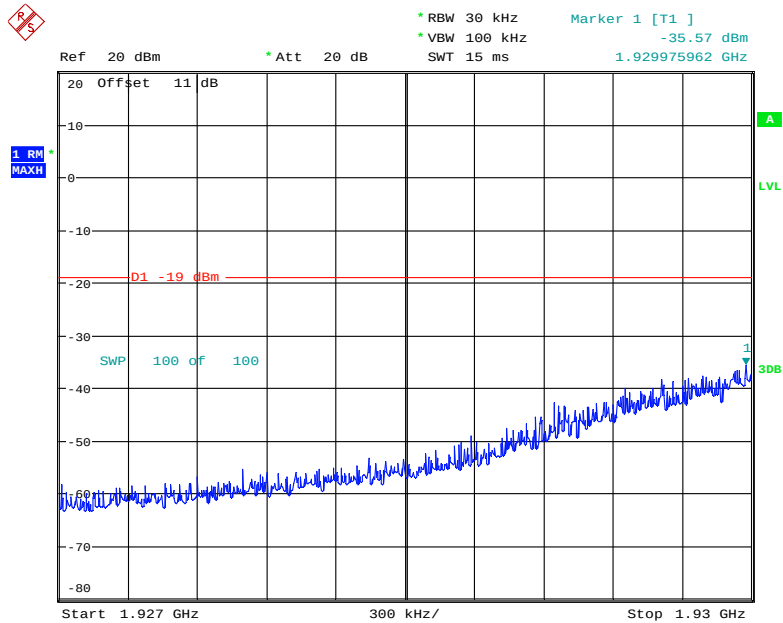


Date: 27.JAN.2021 16:11:43

PCS Band GSM Left Side Pre-AGC

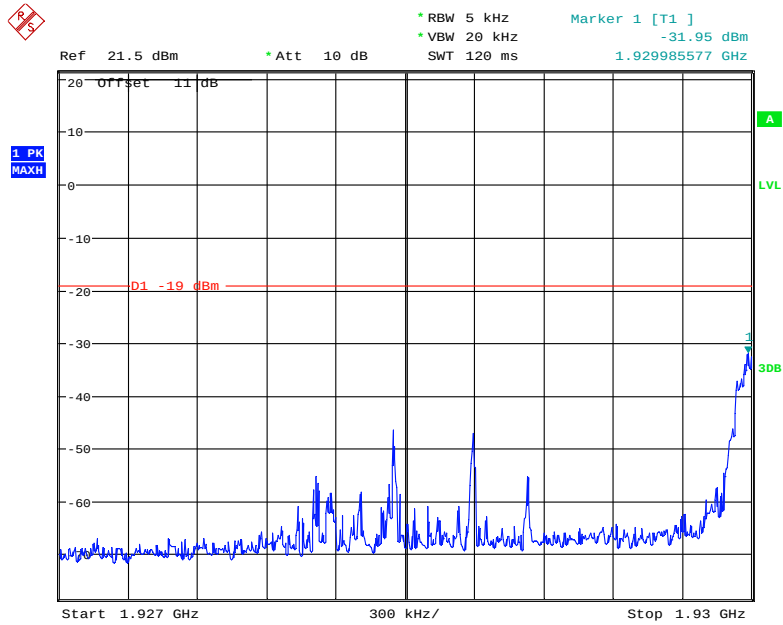


Date: 26.JAN.2021 16:26:08

PCS Band GSM Left Side Above AGC

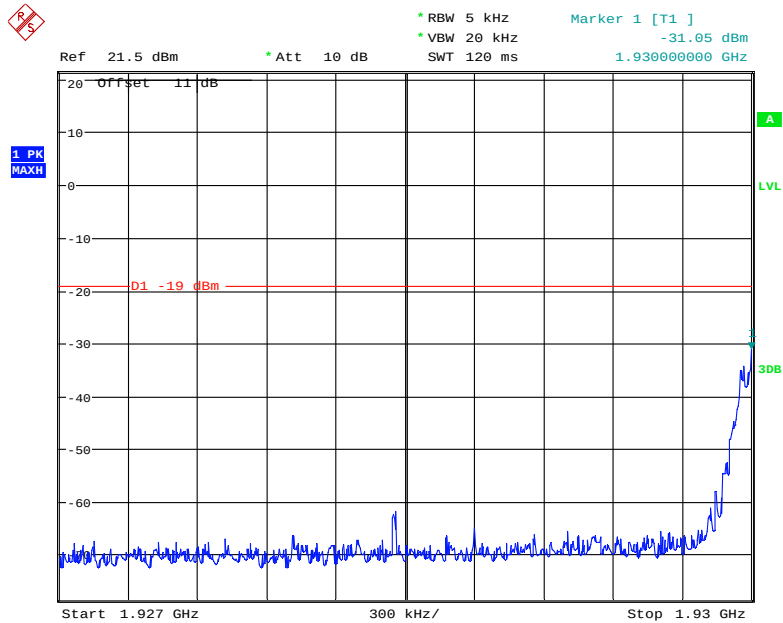


Date: 26.JAN.2021 16:27:01

PCS Band WCDMA Left Side Pre-AGC

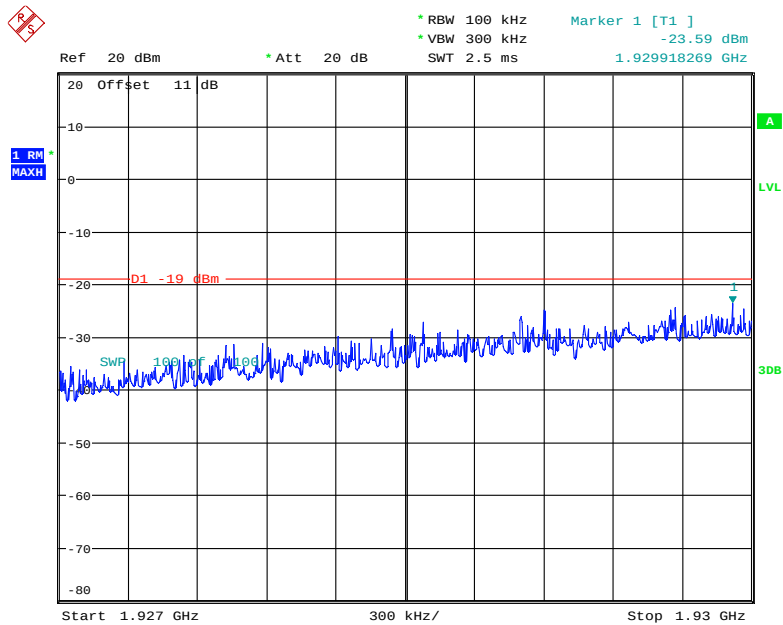


Date: 27.JAN.2021 16:19:50

PCS Band WCDMA Left Side Above AGC

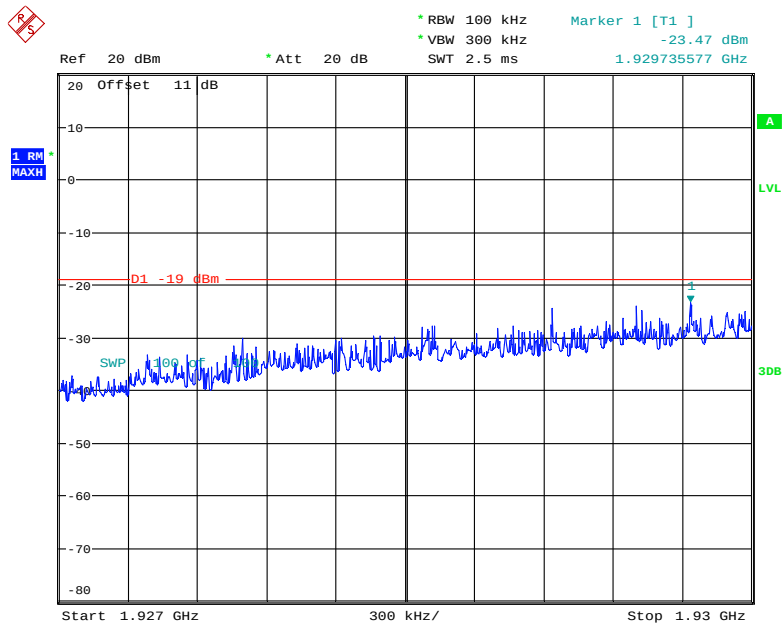


Date: 27.JAN.2021 16:20:39

PCS Band CDMA Right Side Pre-AGC

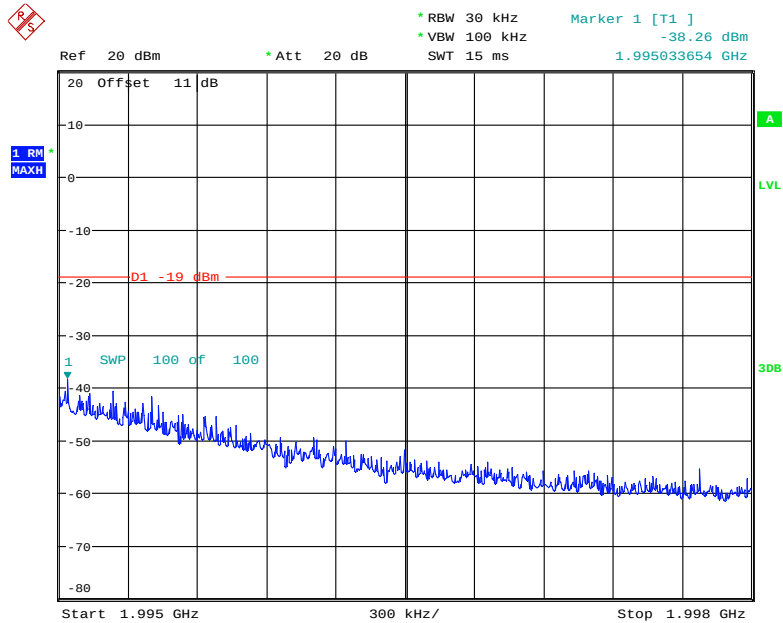


Date: 27.JAN.2021 16:12:44

PCS Band CDMA Right Side Above AGC

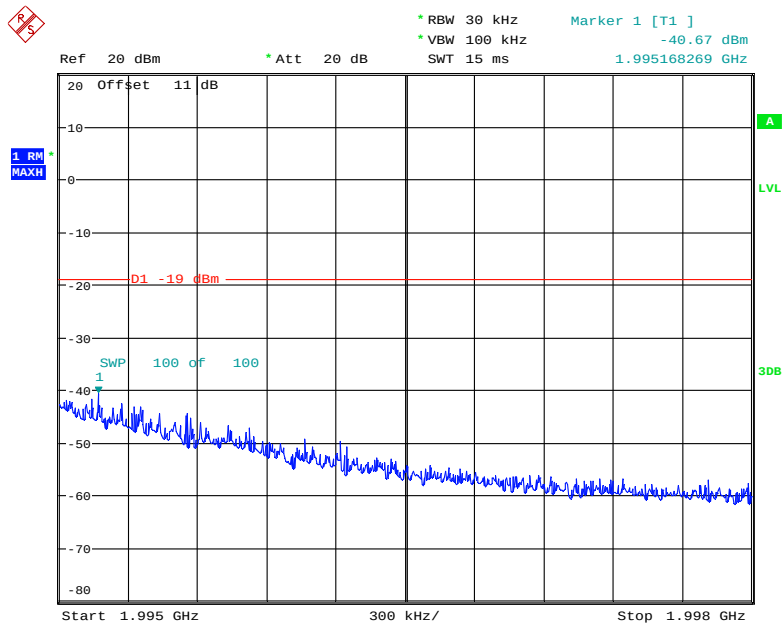


Date: 27.JAN.2021 16:13:15

PCS Band GSM Right Side Pre-AGC

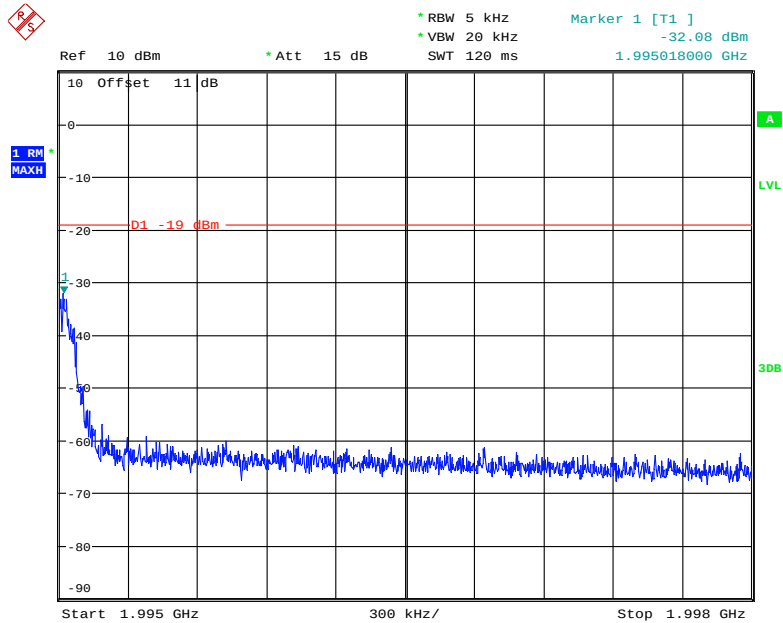


Date: 29.JAN.2021 15:16:20

PCS Band GSM Right Side Above AGC

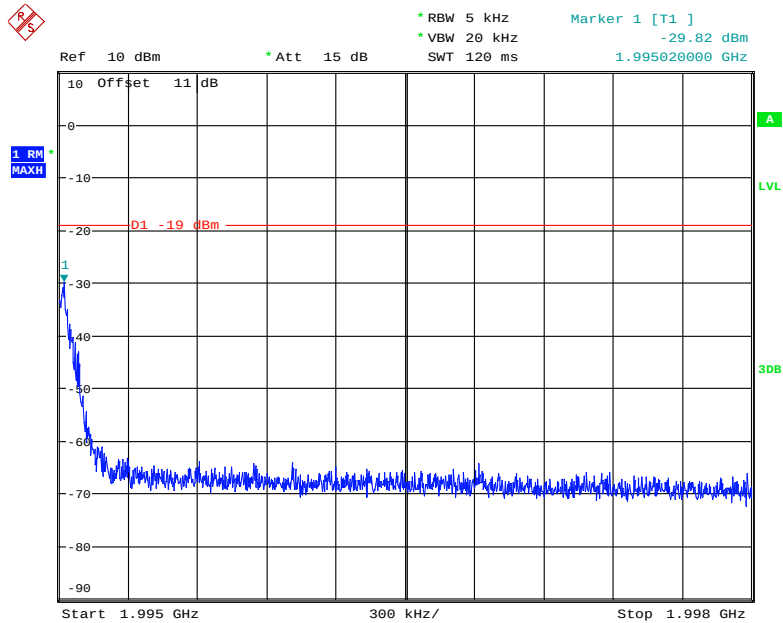


Date: 29.JAN.2021 15:16:47

PCS Band WCDMA Right Side Pre-AGC

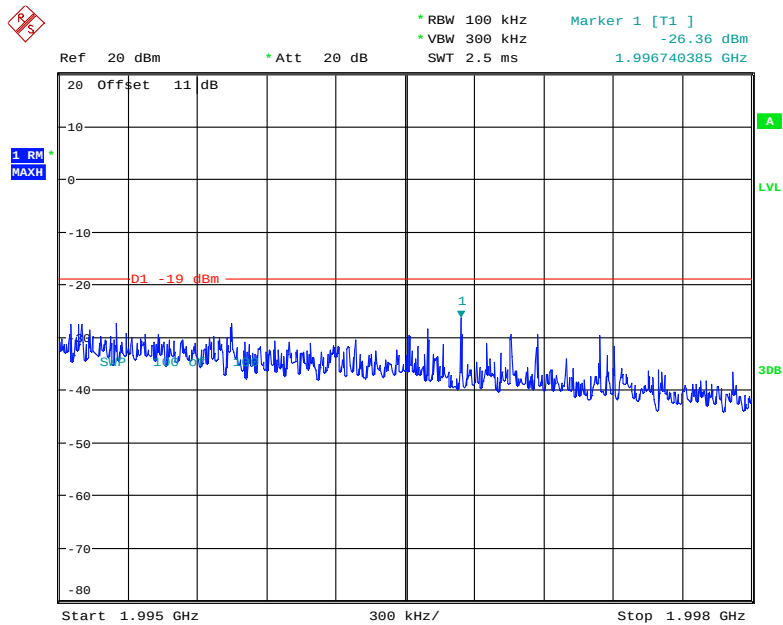


Date: 27.JAN.2021 16:17:46

PCS Band WCDMA Right Side 2107MHz Above AGC

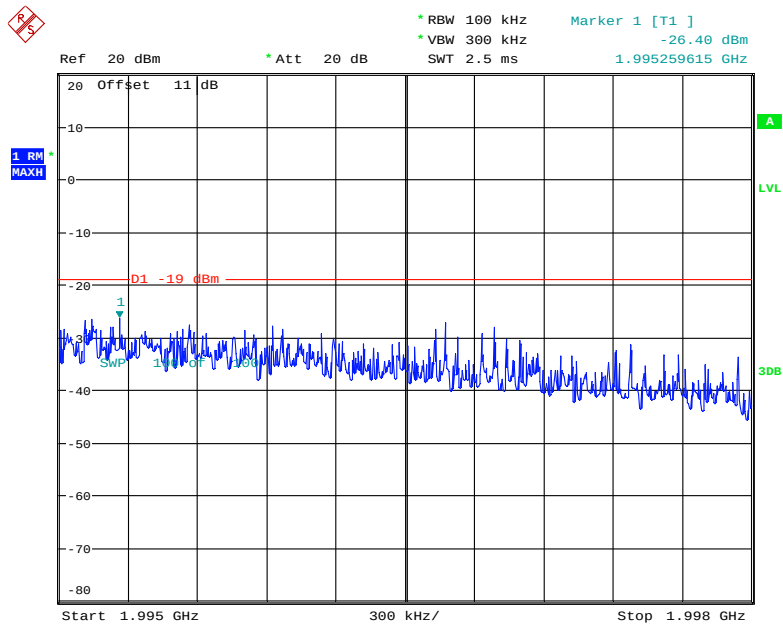


Date: 27.JAN.2021 16:18:54

AWS Band CDMA Left Side Pre-AGC

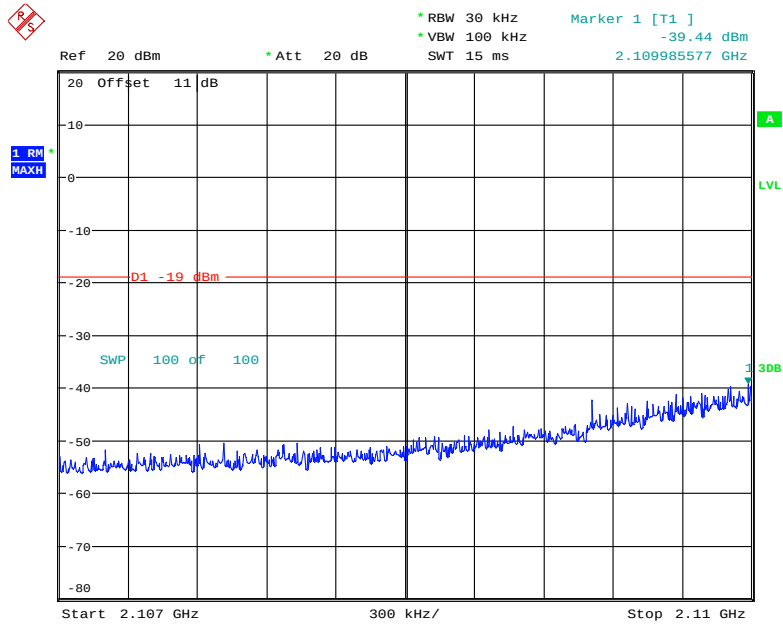


Date: 27.JAN.2021 16:07:39

AWS Band CDMA Left Side Above AGC

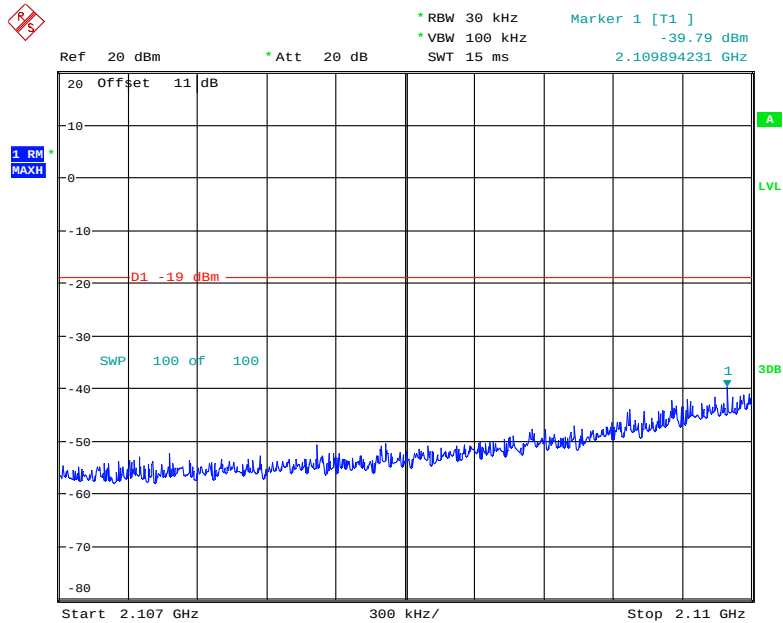


Date: 27.JAN.2021 16:08:07

AWS Band GSM Left Side Pre-AGC

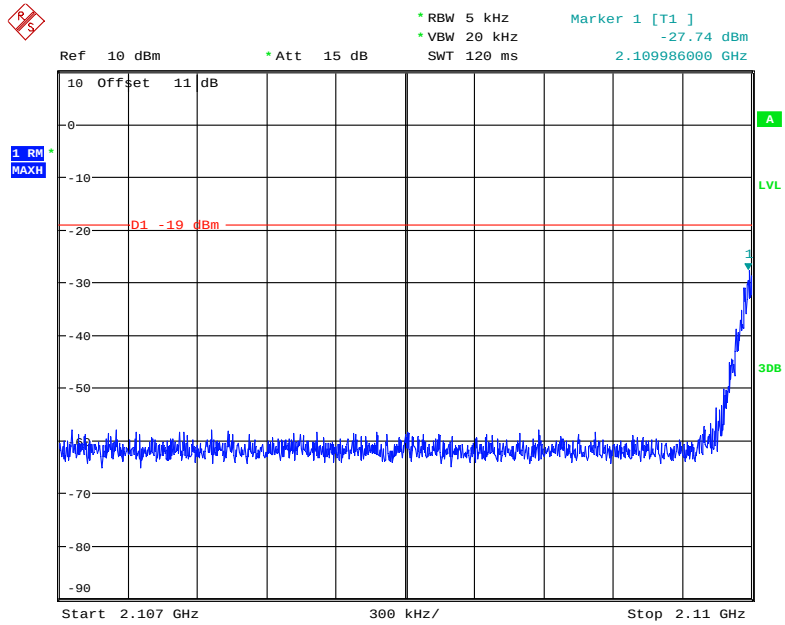


Date: 29.JAN.2021 15:14:56

AWS Band GSM Left Side Above AGC

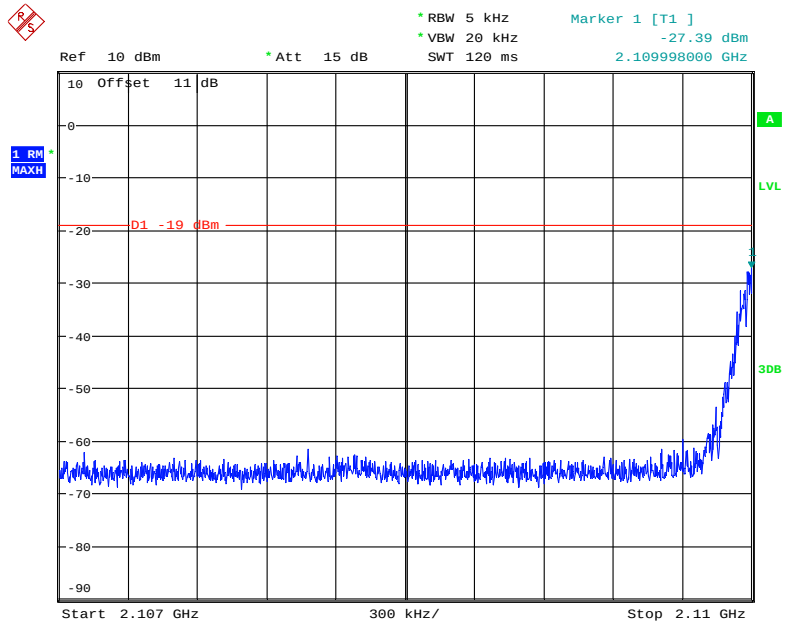


Date: 29.JAN.2021 15:15:31

AWS Band WCDMA Left Side Pre-AGC

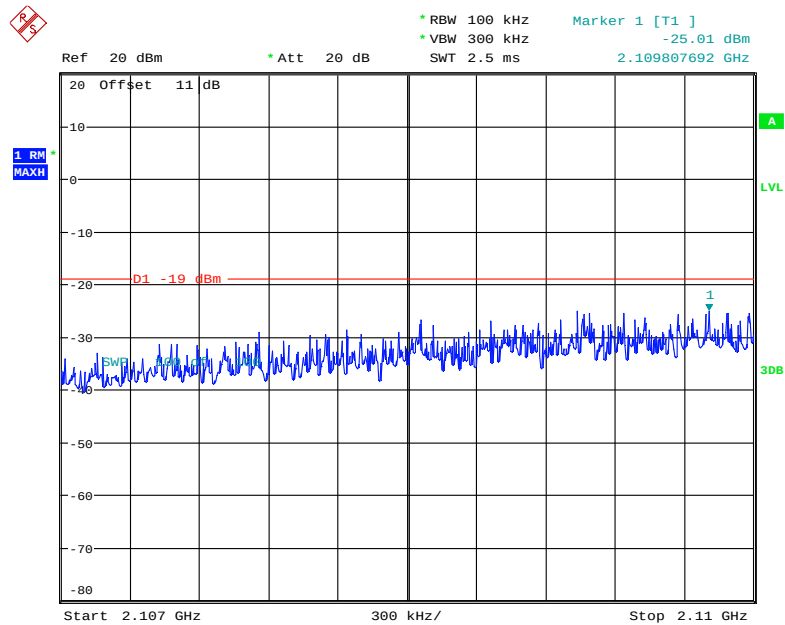


Date: 27.JAN.2021 16:21:31

AWS Band WCDMA Left Side Above AGC

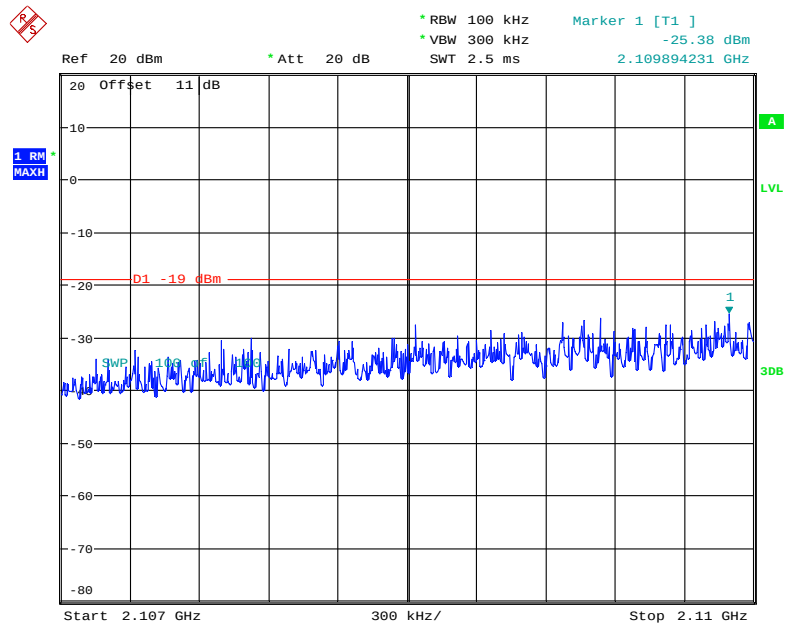


Date: 27.JAN.2021 16:22:11

AWS Band CDMA Right Side Pre-AGC

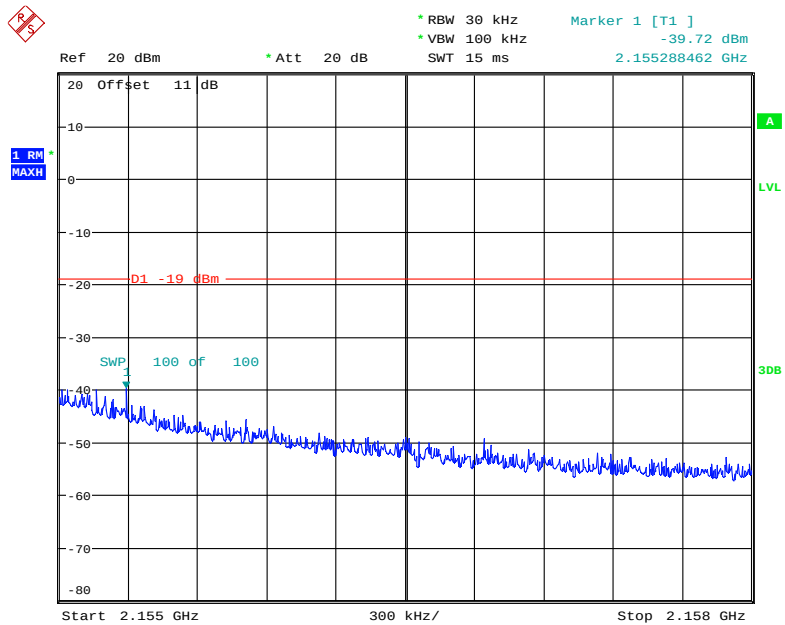


Date: 27.JAN.2021 16:09:00

AWS Band CDMA Right Side Above AGC

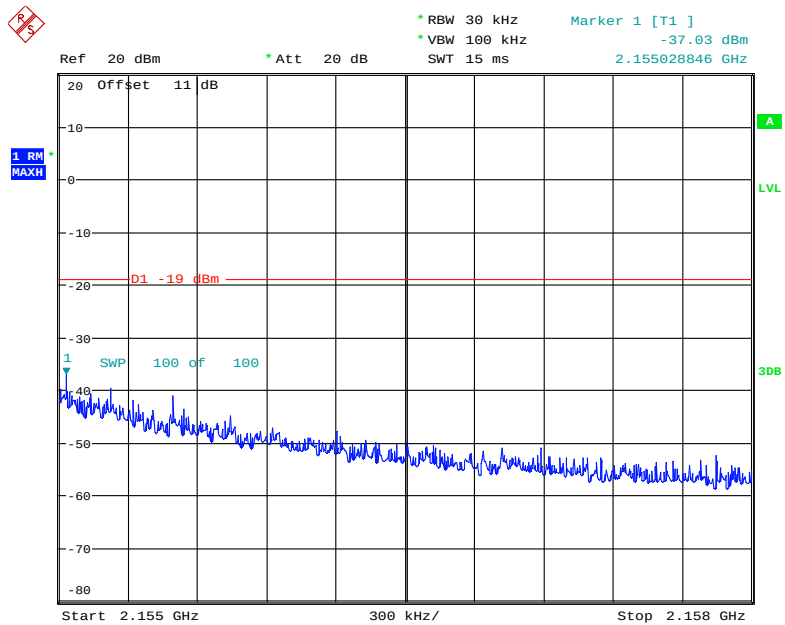


Date: 27.JAN.2021 16:09:47

AWS Band GSM Right Side Pre-AGC

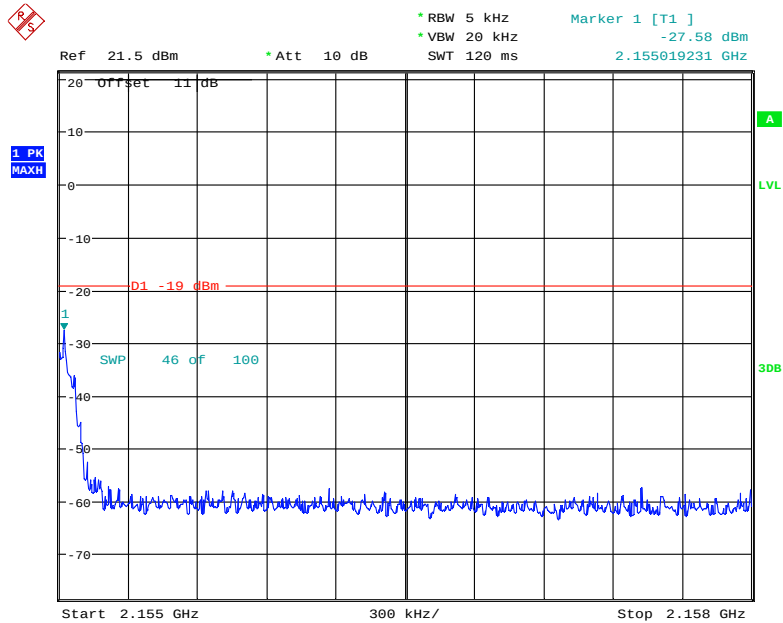


Date: 26.JAN.2021 16:32:38

AWS Band GSM Right Side Above AGC

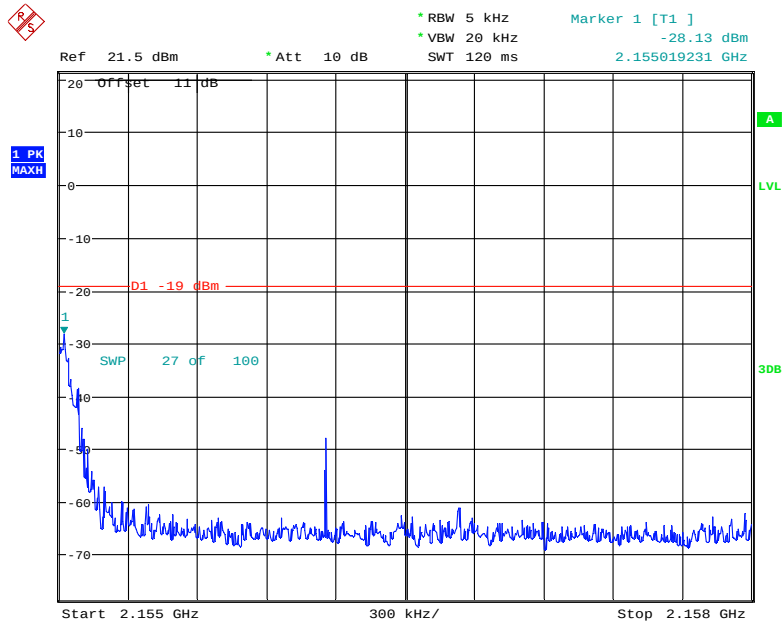


Date: 26.JAN.2021 16:33:07

AWS Band WCDMA Right Side Pre-AGC

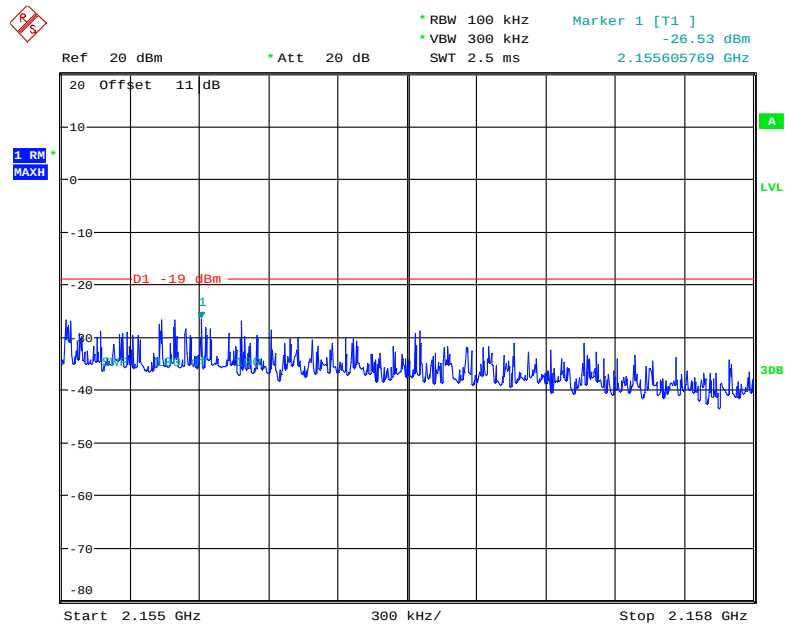

Date: 27.JAN.2021 16:24:03

AWS Band WCDMA Right Side Above AGC

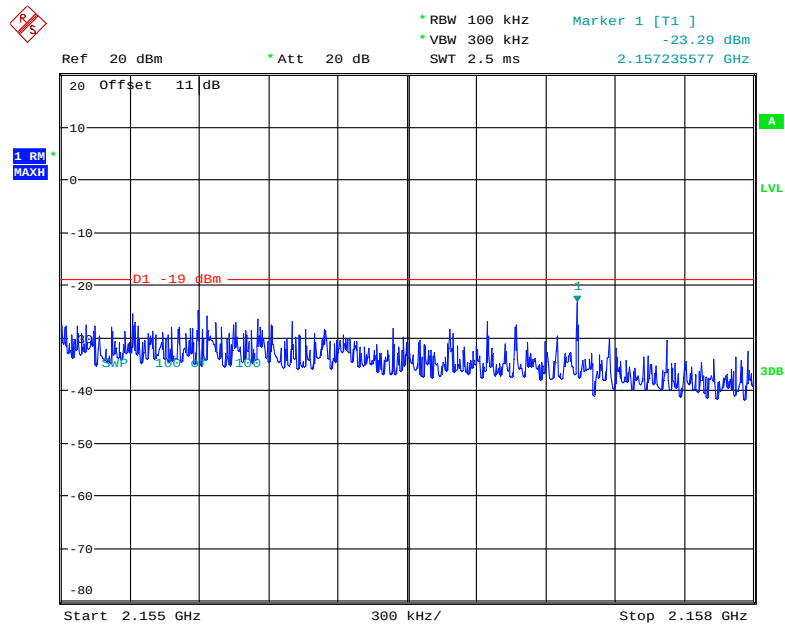

Date: 27.JAN.2021 16:24:57

§ 20.21(e)(8)(i)(A), § 20.21(e)(8)(i)(H) & § 20.21(e)(4) - NOISE LIMITS

Applicable Standards

According to § 20.21(e)(8)(i)(A) Noise Limits; § 20.21(e)(8)(i)(H) Transmit Power Off Mode (uplink and downlink noise power); § 20.21(e)(4) Self-monitoring.

Test Procedure

Maximum transmitter noise power level


- a) Connect the EUT to the test equipment as shown in **Figure 3**. Begin with the uplink output connected to the spectrum analyzer. When measuring downlink noise, connect the downlink output to the spectrum analyzer.
- b) Set the spectrum analyzer RBW to 1 MHz with the VBW $\geq 3 \times$ RBW.
- c) Select the power averaging (RMS) detector and trace average over at least 100 traces.
- d) Set the center frequency of the spectrum analyzer to the center of the CMRS band under test with the span $\geq 2 \times$ the CMRS band.
- e) Measure the maximum transmitter noise power level.
- f) Save the spectrum analyzer plot as necessary for inclusion in the final test report.
- g) Repeat 7.7b) to 7.7f) for all operational uplink and downlink bands.
- h) Connect the EUT to the test equipment as shown in **Figure 4** for uplink. Affirm the coupled path of the RF coupler is connected to the spectrum analyzer.
- i) Configure the signal generator for 4.1 MHz AWGN operation.
- j) Set the spectrum analyzer RBW for 1 MHz with the VBW $\geq 3 \times$ RBW with a power averaging (rms) detector with at least 100 trace averages.
- k) Set the center frequency of the spectrum analyzer to the center of the CMRS band under test with the span $\geq 2 \times$ the CMRS band. This shall include all spectrum blocks in the particular CMRS band under test (see Annex A).
- l) For uplink noise measurements, set the spectrum analyzer center frequency for the uplink band under test and tune the signal generator to the center of the paired downlink band.
- m) Measure the maximum transmitter noise power level when varying the downlink signal generator output level from -90 dBm to -20 dBm, as measured at the input port, in 1 dB steps inside the RSSI-dependent region and in 10 dB steps outside the RSSI-dependent region. Report the six values closest to the limit with at least two points within the RSSI-dependent region of the limit. See noise limit in Annex D.
- n) Repeat 7.7.1h) through 7.7.1m) for all operational uplink.

Variable uplink noise timing

Variable uplink noise timing is to be measured as follows.

- a) Set the spectrum analyzer to the uplink frequency to be measured.
- b) Set the span to 0 Hz with a sweep time of 10 seconds.
- c) Set the power level of signal generator 1 to the lowest level of the RSSI-dependent noise.
- d) Select MAX HOLD and increase the power level of signal generator 1 by 10 dB for mobile boosters and 20 dB for fixed boosters.
- e) Confirm that the uplink noise decreases to the specified level within 1 second for mobile devices and 3 seconds for fixed devices
- f) Repeat 7.7.2a) to 7.7.2e) for all operational uplink bands.
- g) Include plots and summary table in test report.

Note: Some signal boosters will require a signal generator input because they will not operate unless a signal is received at the input terminals. If this is the case, connect a second signal generator and cycle the RF output to simulate this function.

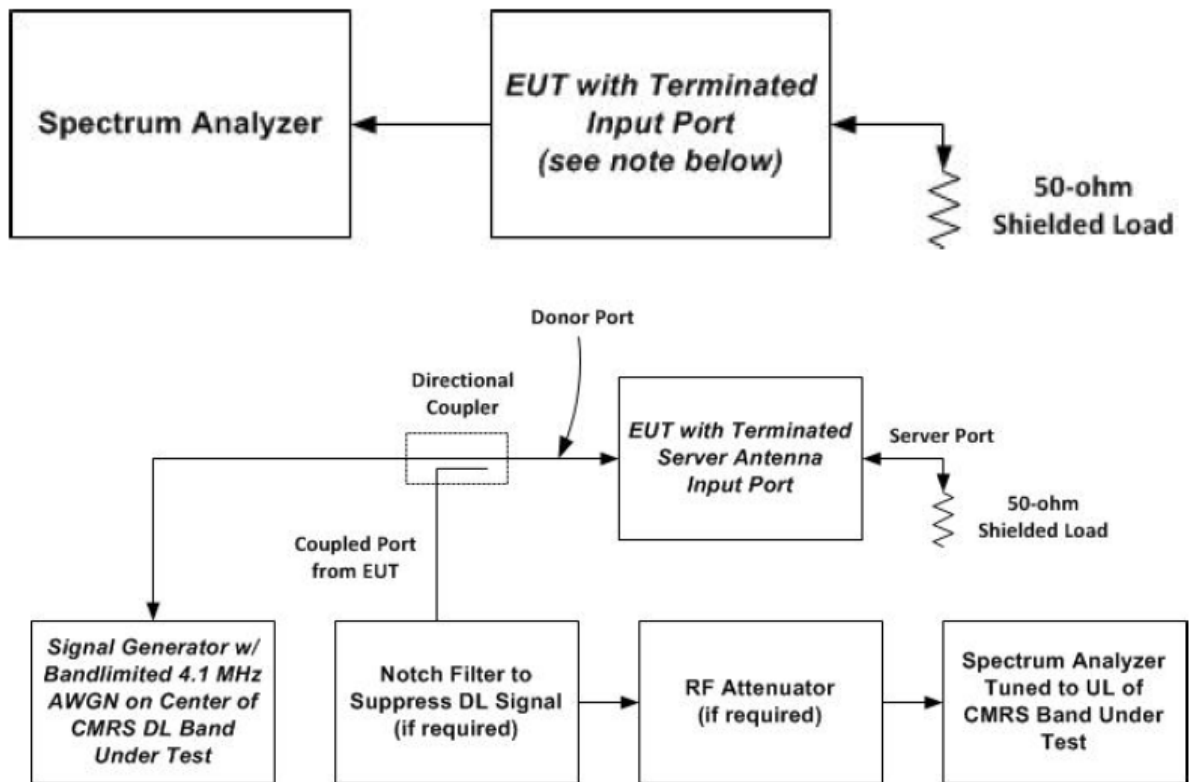

Test Data

Environmental Conditions

Temperature:	25.7 °C
Relative Humidity:	54 %
ATM Pressure:	101.0 kPa

The testing was performed by Jacob Kong on 2021-01-28.

Test Result: Pass

Please refer to following table.

Maximum Noise:

Mode	Operation Bands	Measured Value	Limit	Result
		dBm/MHz	dBm/MHz	
Uplink	Lower 700MHz	-47.93	-45.51	Pass
	Upper 700MHz	-49.98	-44.64	Pass
	Cellular	-46.82	-44.05	Pass
	PCS	-41.89	-37.01	Pass
	AWS	-41.87	-37.73	Pass
Downlink	Lower 700MHz	-46.30	-45.51	Pass
	Upper 700MHz	-46.27	-44.64	Pass
	Cellular	-45.46	-44.05	Pass
	PCS	-39.10	-37.01	Pass
	AWS	-40.20	-37.73	Pass


Note: Fixed booster maximum noise power shall not exceed $-102.5 \text{ dBm/MHz} + 20 \text{ Log}_{10}(\text{Frequency})$, where Frequency is the uplink mid-band frequency of the supported spectrum bands in MHz.

Variable uplink Noise limit test result:

Operation Bands	RSSI	Measured Value	Limit	Results
	dBm	dBm/MHz	dBm/MHz	
Lower 700MHz	-90	-47.61	-45.51	Pass
	-80	-47.45	-45.51	Pass
	-60	-52.32	-45.51	Pass
	-59	-53.24	-45.51	Pass
	-58	-53.68	-45.51	Pass
	-57	-54.83	-46	Pass
Upper 700MHz	-90	-49.49	-44.64	Pass
	-80	-49.40	-44.64	Pass
	-59	-54.24	-44.64	Pass
	-58	-54.98	-45	Pass
	-57	-55.95	-46	Pass
	-56	-56.56	-47	Pass
Cellular	-90	-46.59	-44.05	Pass
	-80	-46.43	-44.05	Pass
	-59	-50.64	-44.05	Pass
	-58	-51.35	-45	Pass
	-57	-51.97	-46	Pass
	-56	-52.34	-47	Pass
PCS	-90	-41.69	-37.01	Pass
	-80	-41.82	-37.01	Pass
	-66	-46.18	-37.01	Pass
	-65	-46.91	-38	Pass
	-64	-47.30	-39	Pass
	-63	-47.88	-40	Pass
AWS	-90	-42.30	-37.73	Pass
	-80	-42.45	-37.73	Pass
	-63	-45.98	-40	Pass
	-62	-46.75	-41	Pass
	-61	-47.12	-42	Pass
	-60	-48.06	-43	Pass


Maximum Noise

Uplink Cellular Band

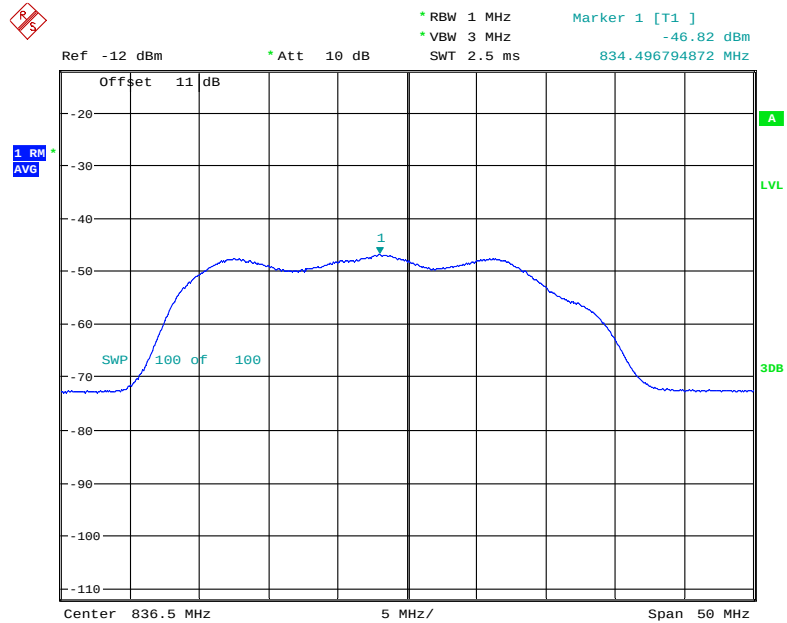


Date: 28.JAN.2021 11:57:29

Uplink PCS Band

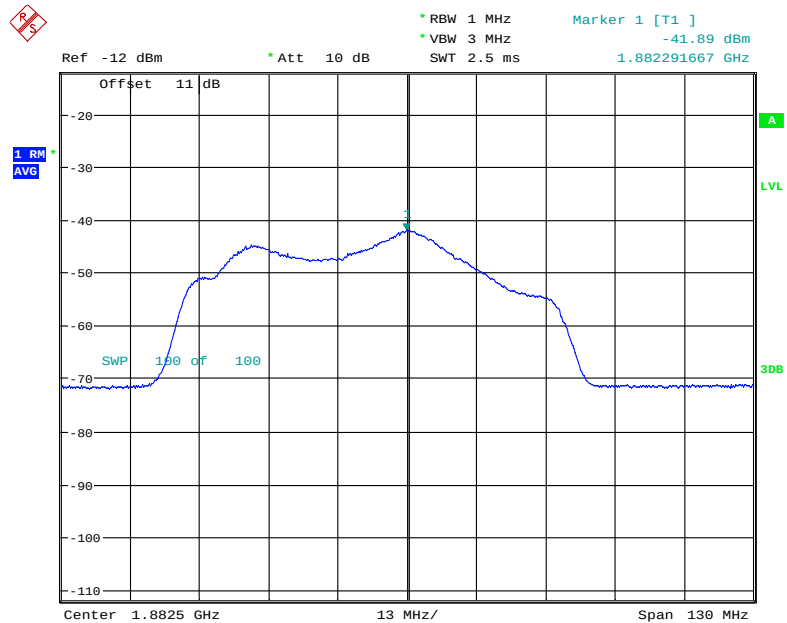


Date: 28.JAN.2021 12:00:25

Uplink AWS

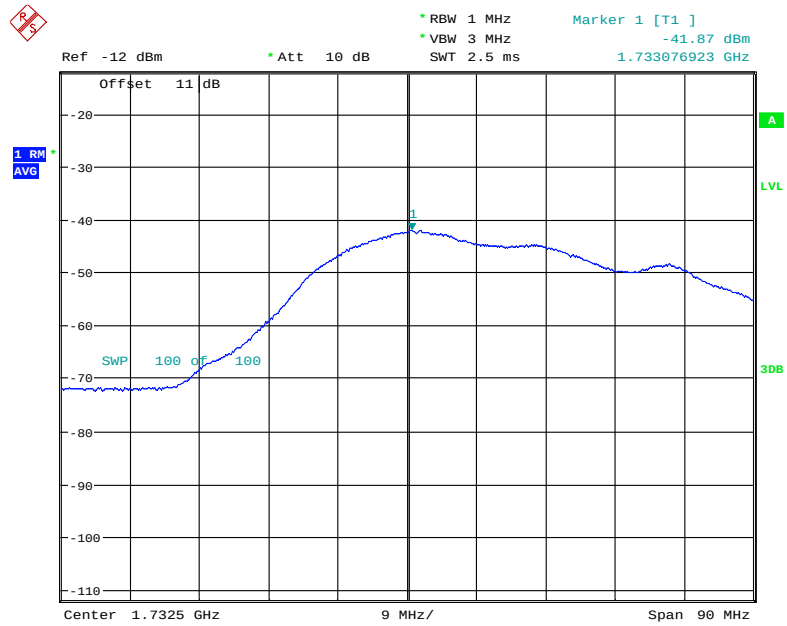


Date: 28.JAN.2021 11:59:45

Uplink Lower 700MHz

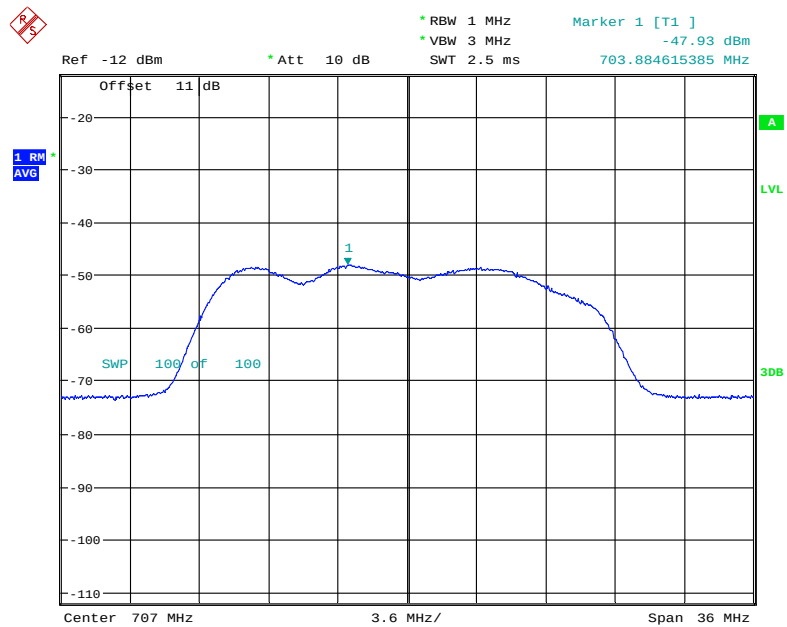


Date: 28.JAN.2021 11:58:16

Uplink Upper 700MHz

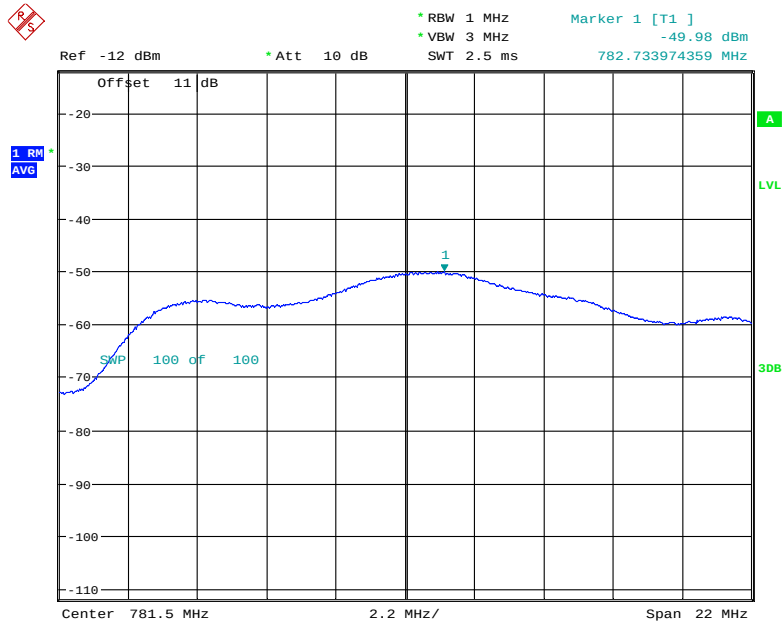


Date: 28.JAN.2021 11:58:42

Downlink Cellular Band

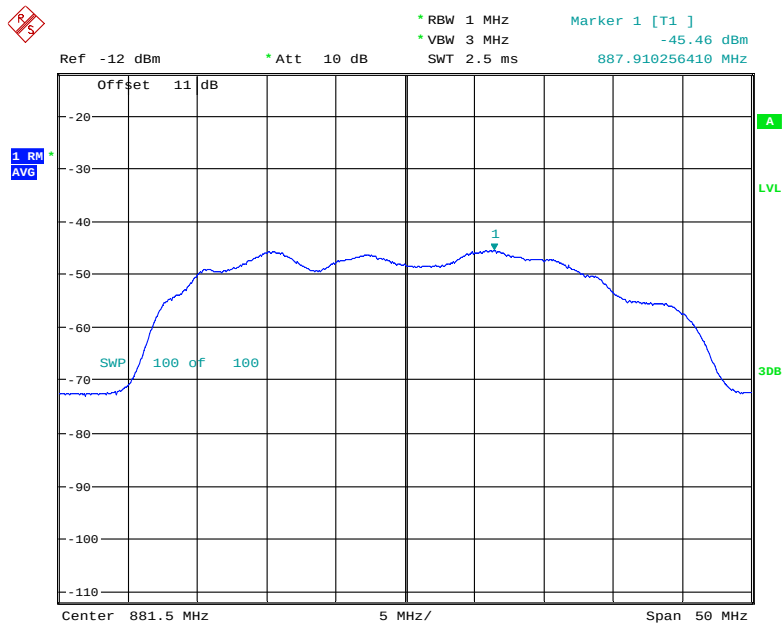


Date: 28.JAN.2021 12:02:48

Downlink PCS Band

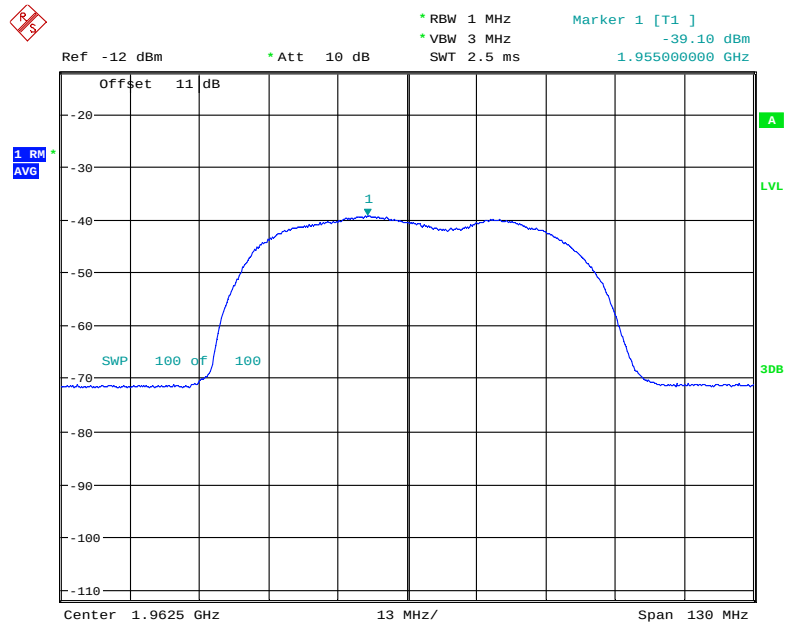


Date: 28.JAN.2021 12:02:02

Downlink AWS Band

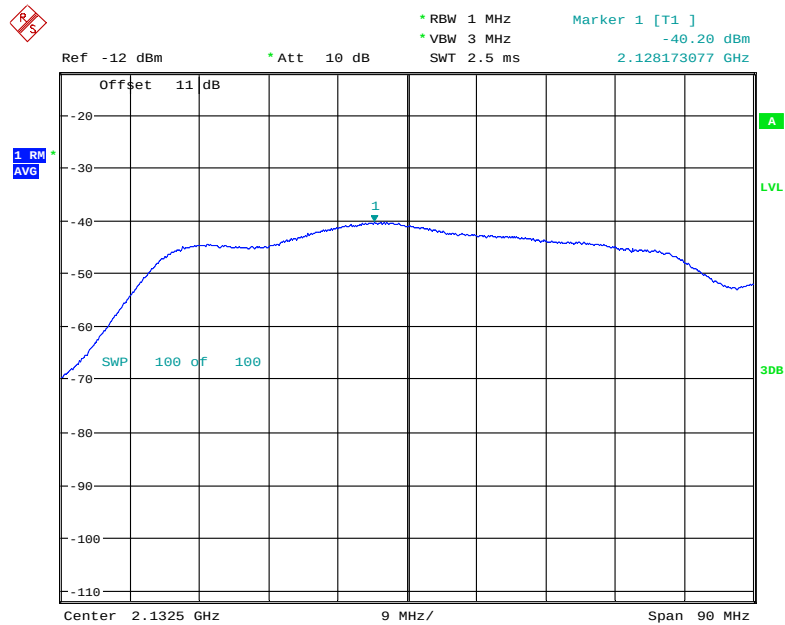


Date: 28.JAN.2021 12:02:22

Downlink Lower 700MHz

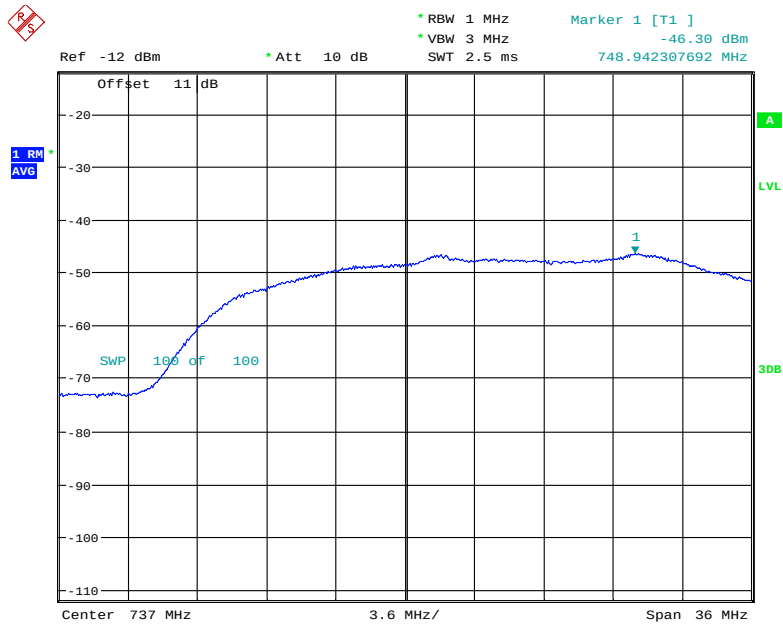

Date: 28.JAN.2021 12:03:48

Downlink Upper 700MHz

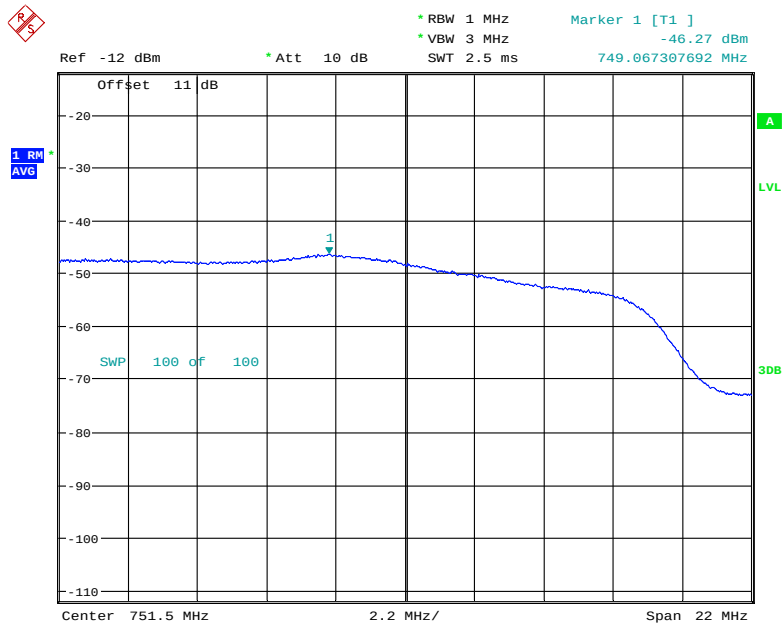


Date: 28.JAN.2021 12:03:14

Variable Uplink Noise Timing:


Operation Bands	Measured Value	Limit	Result
	s	s	
Lower 700MHz	0.032	3	Pass
Upper 700MHz	0.032	3	Pass
Cellular	0.369	3	Pass
PCS	0.304	3	Pass
AWS	0.304	3	Pass

Note: The uplink noise decreases to the specified level within 1 second for mobile devices and 3 seconds for fixed devices.

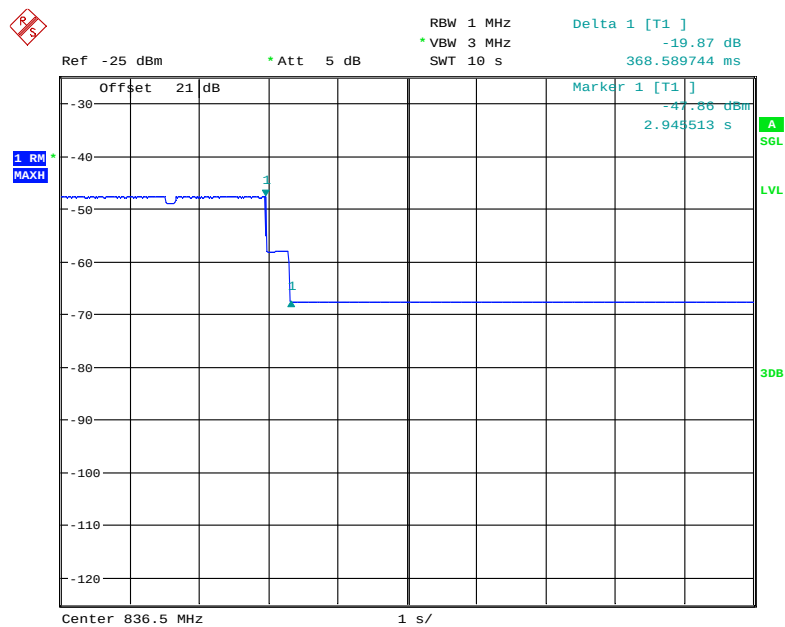Cellular Band


Date: 28.JAN.2021 14:32:47

PCS Band

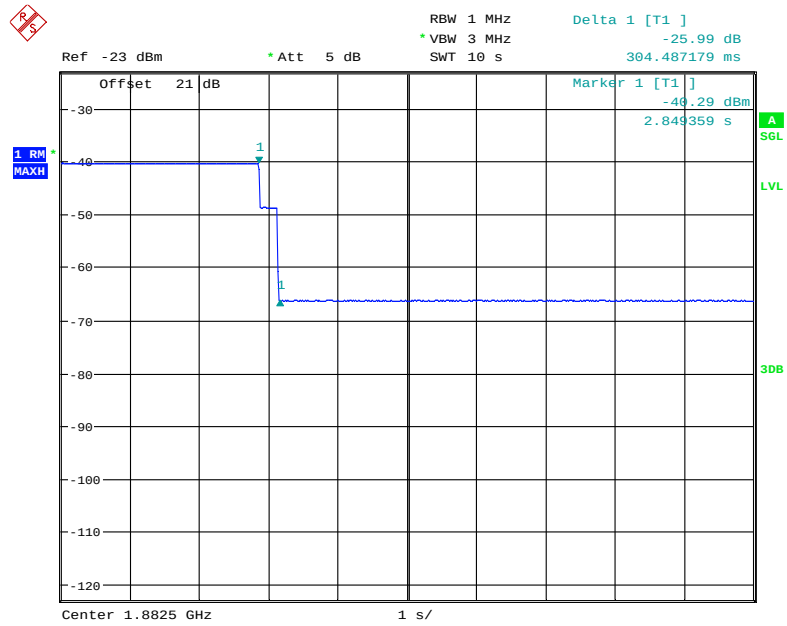


Date: 28.JAN.2021 14:36:04

AWS Band

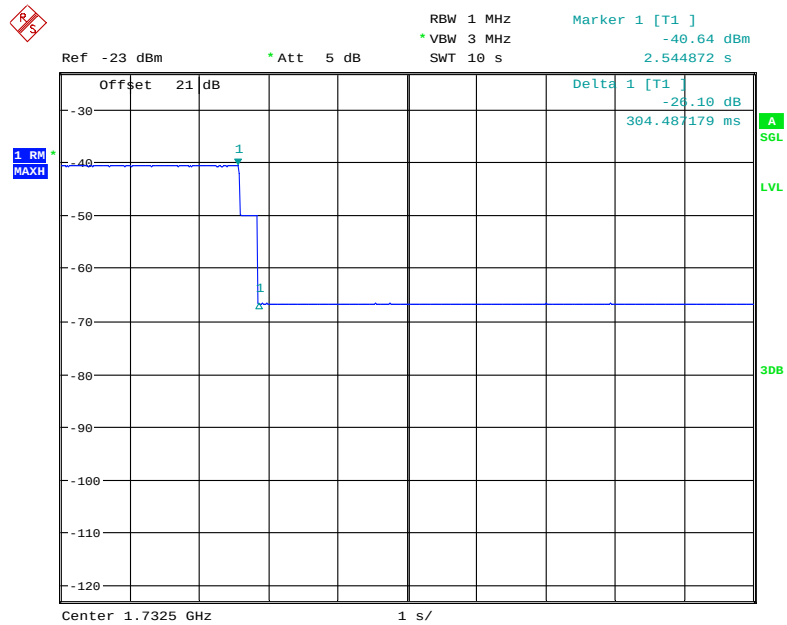


Date: 28.JAN.2021 14:37:22

Lower 700MHz

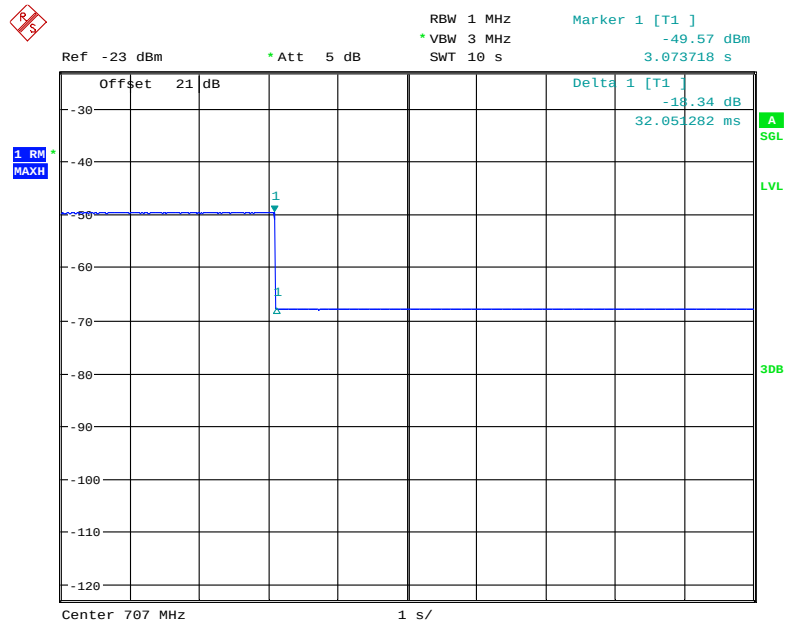

Date: 28.JAN.2021 14:40:51

Upper 700MHz

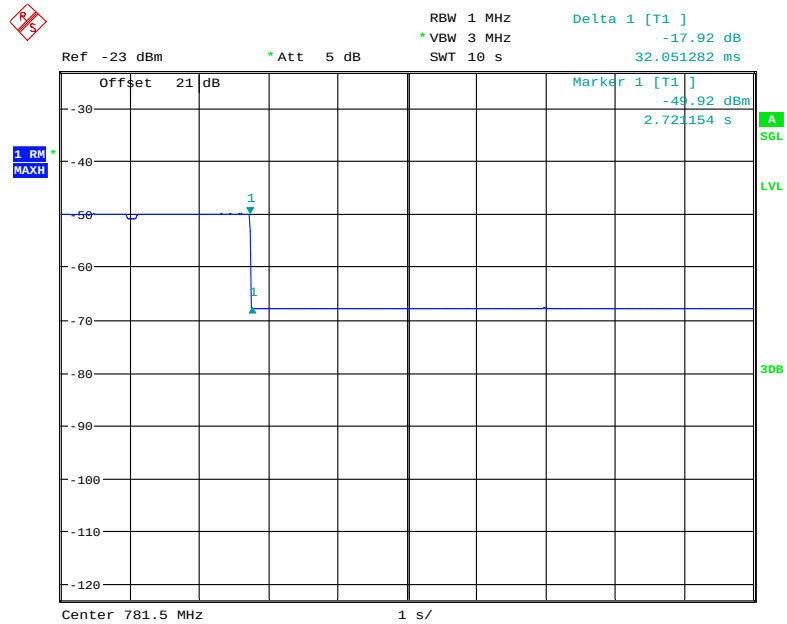

Date: 28.JAN.2021 14:42:25

§ 20.21(e)(8)(i)(I) & §20.21(e)(4) - UPLINK INACTIVITY

Applicable Standards


According to § 20.21(e)(8)(i)(I) Uplink Inactivity & §20.21(e)(4); §20.21(e)(4) Self-monitoring.

Test Procedure

This measurement procedure is intended to demonstrate compliance to the uplink inactivity requirements specified for wideband consumer signal boosters in § 20.21(e)(8)(i)(I).

- Connect the EUT to the test equipment as shown in **Figure 3** with the uplink output connected to the spectrum analyzer.
- Select the RMS power averaging detector.
- Set the spectrum analyzer RBW for 1 MHz with the $VBW \geq 3 \times RBW$.
- Set the center frequency of the spectrum analyzer to the center of the uplink operational band.
- Set the span for 0 Hz with a single sweep time for a minimum of 330 seconds.
- Start to capture a new trace using MAX HOLD.
- After approximately 15 seconds turn on the EUT power.
- Once the full spectrum analyzer trace is complete place a MARKER on the leading edge of the pulse and use the DELTA MARKER METHOD to measure the time until the uplink becomes inactive.
- Affirm that the noise level for the squelched signal is below the uplink inactivity noise power limit, as specified by the rules.
- Capture the plot for inclusion in the test report.
- Measure noise using procedures in 7.7.1a) to 7.7.1f).
- Repeat 7.8d) through 7.8k) for all operational uplink bands.

Note: Some signal boosters will require a signal generator input because they will not operate unless a signal is received at the input terminals. If this is the case, connect a signal generator and cycle the RF output to simulate this function.

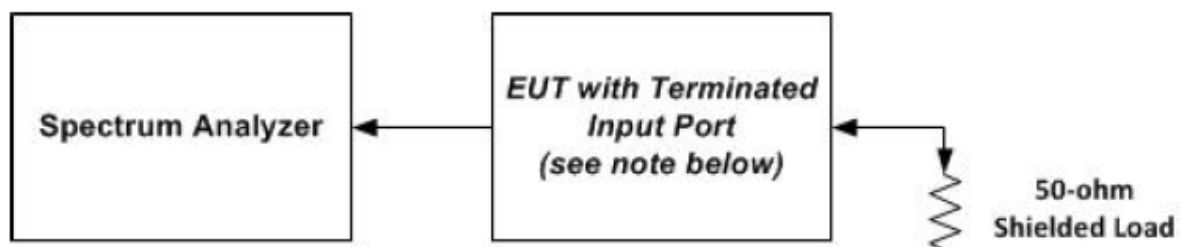

Test Data**Environmental Conditions**

Temperature:	25.7 °C
Relative Humidity:	54 %
ATM Pressure:	101.0 kPa

The testing was performed by Jacob Kong on 2021-01-28.

Test Result: Pass

Please refer to following table.


Operation Band	Measured value	Limit	Result
	s	s	
Lower 700 MHz	297.32	300	Pass
Upper 700 MHz	297.32		Pass
Cellular	297.32		Pass
PCS	297.32		Pass
AWS	297.32		Pass

Note: When the consumer booster is not serving an active device connection after 5 minutes the uplink noise power not exceed -70 dBm/MHz.

Cellular Band


Date: 28. JAN. 2021 15:07:04

PCS Band

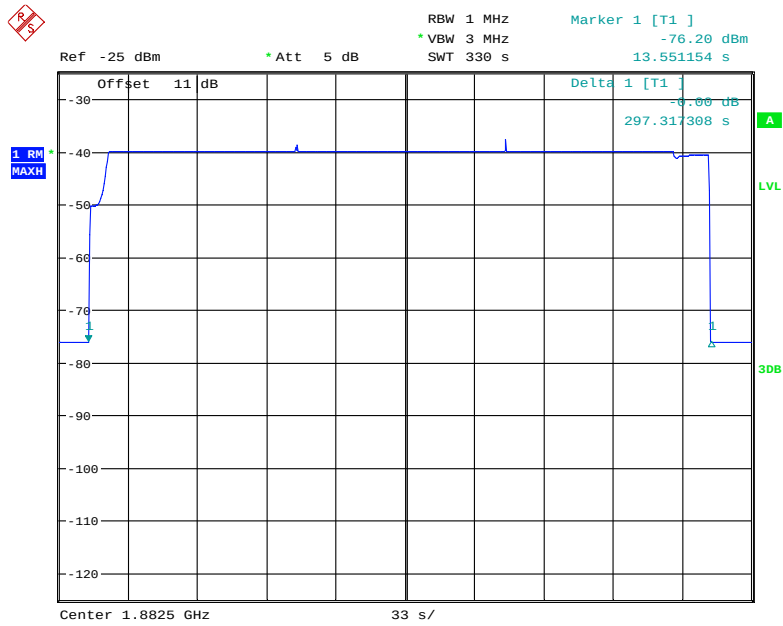


Date: 28.JAN.2021 15:21:23

AWS Band

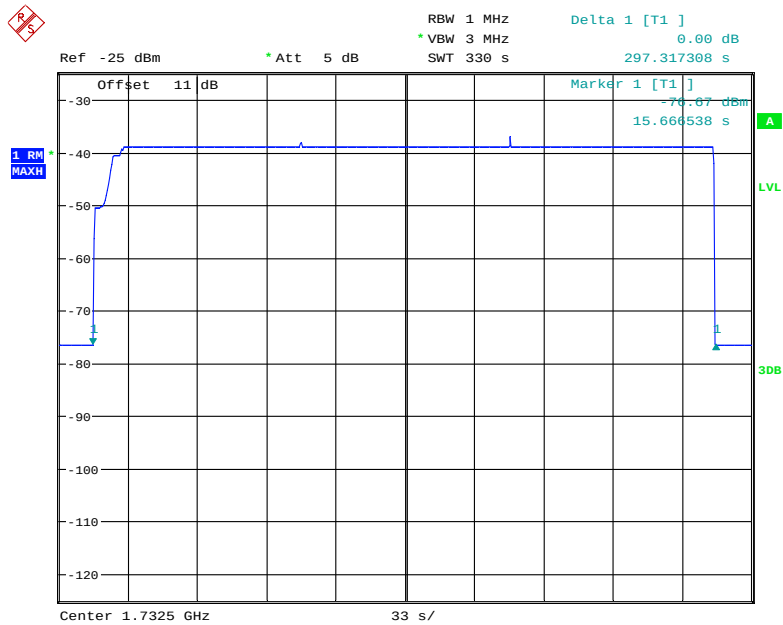


Date: 28.JAN.2021 15:13:16

Lower 700MHz

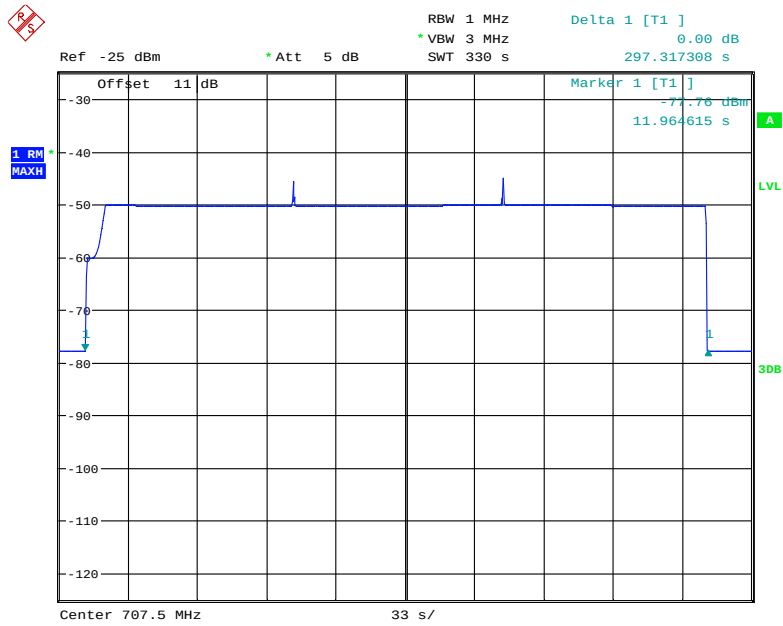

Date: 28.JAN.2021 15:00:42

Upper 700MHz

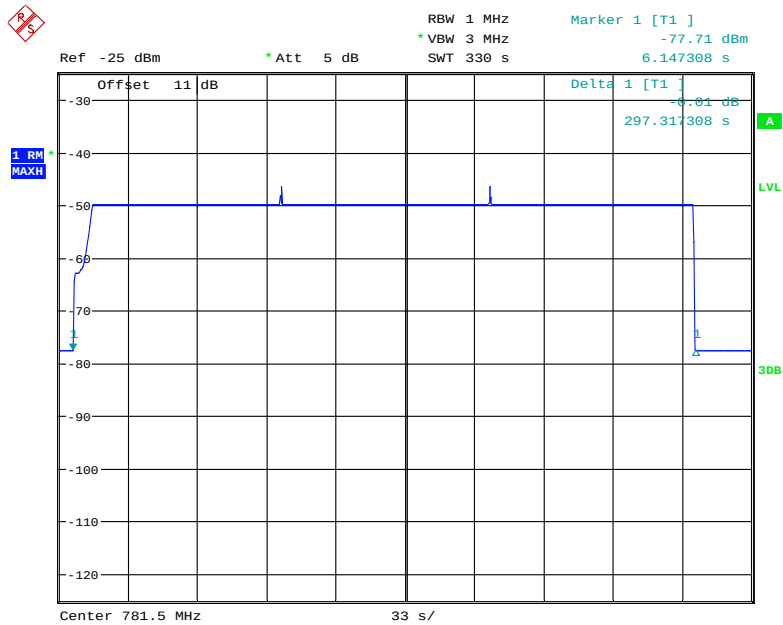

Date: 28.JAN.2021 14:53:11

§ 20.21(e)(8)(i)(C)(1) & § 20.21(e)(8)(i)(H) - VARIABLE BOOSTER GAIN

Applicable Standards

Rule paragraph(s): § 20.21(e)(8)(i)(C)(1) *Booster Gain Limits* (variable gain); § 20.21(e)(8)(i)(H) *Transmit Power Off Mode* (uplink gain).

Test Procedure

Maximum gain

This procedure shall be used to demonstrate compliance to the booster gain limits specified for wideband consumer signal boosters in § 20.21(e)(8)(i)(C) or § 20.21(e)(8)(i)(H). The variable booster gain limits are expressed as a function of RSSI and MSCL. The RSSI is varied over a range of values as specified within the procedure. Refer to Annex B of this document for guidance on determining the applicable MSCL value.

- a) Connect the EUT to the test equipment as shown in **Figure 5** with the uplink output connected to signal generator 1. Confirm that the coupled path of the RF coupler is connected to the spectrum analyzer.
- b) Configure downlink signal generator 1 for AWGN operation with a 99% occupied bandwidth of 4.1 MHz tuned to the center of the operational band.
- c) Set the power level and frequency of signal generator 2 to a value 5 dB below the AGC level determined from 7.2. The signal type is AWGN with a 99% OBW of 4.1 MHz.
- d) Set RBW = 100 kHz.
- e) Set VBW $\geq$ 300 kHz.
- f) Select the CHANNEL POWER measurement mode.
- g) Select the RMS (power averaging) detector.
- h) Ensure that the number of measurement points per sweep $\geq (2 \times \text{span})/\text{RBW}$.
- i) Sweep time = auto couple or as necessary (but no less than auto couple value).
- j) Trace average at least 10 traces in power averaging (i.e., RMS) mode.
- k) Measure the maximum channel power and compute maximum gain when varying the signal generator 1 output to a level from -90 dBm to -20 dBm as measured at the input port in 1 dB steps inside the RSSI-dependent region and 10 dB steps outside the RSSI-dependent region and report the six values closest to the limit, including at least two points from within the RSSI-dependent region of operation. See gain limit in charts in Annex D for uplink gain requirements. Additionally, document that the EUT provides equivalent uplink and downlink gain, and when operating in shutoff mode the uplink and downlink gain is within the transmit power off mode gain limits.
- l) Repeat 7.9.1b) to 7.9.1k) for all operational uplink bands.

Variable uplink gain timing

Variable uplink gain timing is to be measured as follows.

- a) Set the spectrum analyzer to the uplink frequency to be measured.
- b) Set the span to 0 Hz with a sweep time of 10 seconds.
- c) Set the power level of signal generator 1 to the lowest level of the RSSI-dependent gain.
- d) Select MAX HOLD and increase the power level of signal generator 1 by 10 dB for mobile boosters and 20 dB for fixed indoor boosters. Signal generator 2 remains same, as described in 7.9.1c).
- e) Confirm that the uplink gain decreases to the specified levels within 1 second for mobile devices and 3 seconds for fixed devices.
- f) Repeat 7.9.2a) to 7.9.2e) for all operational uplink bands.

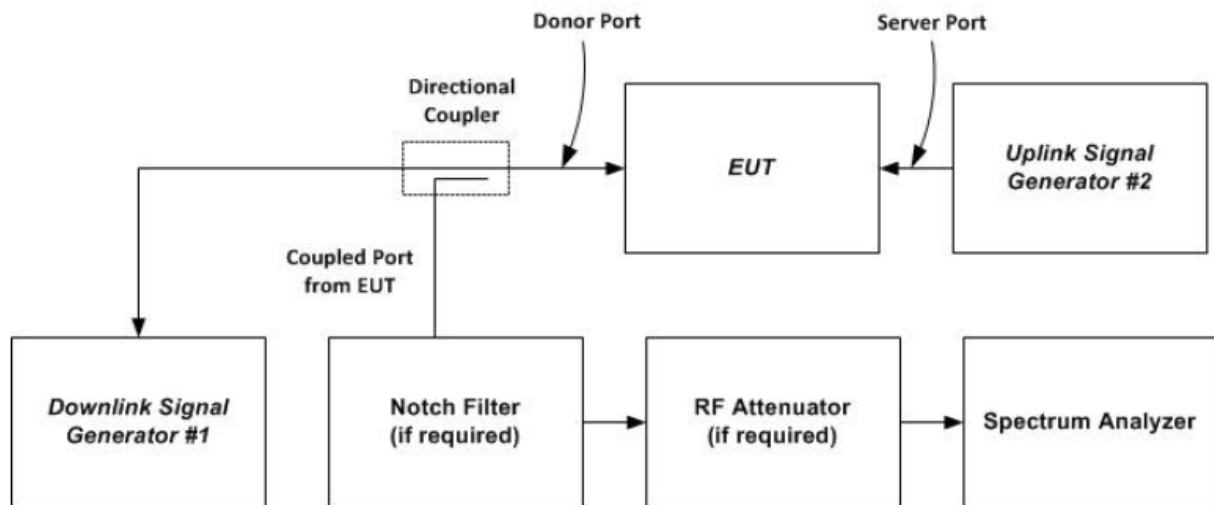


Figure 5 – Variable gain instrumentation test setup

Test Data

Environmental Conditions

Temperature:	25.7 °C
Relative Humidity:	54 %
ATM Pressure:	101.0 kPa

The testing was performed by Jacob Kong on 2021-01-28.

Test Result: Pass

Please refer to following table.

MSCL calculation:

Operation Bands	Frequency	Distance	Path Loss	Indoor Antenna Gain	Indoor Cable Loss	Polarity Loss	MSCL
	MHz	m	dB	(dBi)	(dB)	(dB)	
Lower 700	707.0	1	29.49	5	4.97	3.01	32.47
Upper700	781.5	1	30.36	5	4.97	3.01	33.34
Cellur	836.5	1	30.95	5	5.17	3.01	34.13
PCS	1882.5	1	37.99	7	7.51	3.01	41.51
AWS	1732.5	1	37.27	7	7.51	3.01	40.79

Note:

Path loss= $20\log f + 20\log d - 27.50$

Polarity loss= $20\log(1/\sin(45)) = 3.01$

MSCL= Path loss + Indoor Cable Loss - Mobile Antenna Gain- Indoor Antenna Gain+ Polarity Loss

Mobile Antenna Gain=0

The lowest MSCL was calculated and used according to the manufacturer's specification

Variable booster gain:


Operation Bands	RSSI	P _{in}	P _{out}	MSCL	Measured Value	Limit	Result
	dBm	dBm	dBm	dB	dB	dB	
Lower 700	-62	-46.5	8.02	32.47	54.52	60.47	Pass
	-61	-46.5	6.81	32.47	53.31	59.47	Pass
	-60	-46.5	5.93	32.47	52.43	58.47	Pass
	-59	-46.5	4.73	32.47	51.23	57.47	Pass
	-58	-46.5	3.51	32.47	50.01	56.47	Pass
	-57	-46.5	2.11	32.47	48.61	55.47	Pass
Upper 700	-62	-46	8.34	33.34	54.34	61.34	Pass
	-61	-46	7.34	33.34	53.34	60.34	Pass
	-60	-46	6.43	33.34	52.43	59.34	Pass
	-59	-46	5.05	33.34	51.05	58.34	Pass
	-58	-46	4.08	33.34	50.08	57.34	Pass
	-57	-46	2.74	33.34	48.74	56.34	Pass
Cellular	-62	-49	6.03	34.13	55.03	62.13	Pass
	-61	-49	5.41	34.13	54.41	61.13	Pass
	-60	-49	4.71	34.13	53.71	60.13	Pass
	-59	-49	3.83	34.13	52.83	59.13	Pass
	-58	-49	2.89	34.13	51.89	58.13	Pass
	-57	-49	2.02	34.13	51.02	57.13	Pass
PCS	-70	-55	8.31	41.51	63.31	77.51	Pass
	-69	-55	8.13	41.51	63.13	76.51	Pass
	-68	-55	7.21	41.51	62.21	75.51	Pass
	-67	-55	6.77	41.51	61.77	74.51	Pass
	-66	-55	5.82	41.51	60.82	73.51	Pass
	-65	-55	4.69	41.51	59.69	72.51	Pass
AWS	-61	-56	7.67	40.79	63.67	67.79	Pass
	-60	-56	6.87	40.79	62.87	66.79	Pass
	-59	-56	6.31	40.79	62.31	65.79	Pass
	-58	-56	5.64	40.79	61.64	64.79	Pass
	-57	-56	4.57	40.79	60.57	63.79	Pass
	-56	-56	3.43	40.79	59.43	62.79	Pass

Note: Variable booster gain Limit: $-34 \text{ dB-RSSI} + \text{MSCL}$.

Variable gain timing:


Operation Bands	Measured value	Limit	Results
MHz	s	s	
Lower 700	0.044	3	Pass
Upper 700	0.012		Pass
Cellular	0.301		Pass
PCS	0.365		Pass
AWS	0.028		Pass

Cellular Band

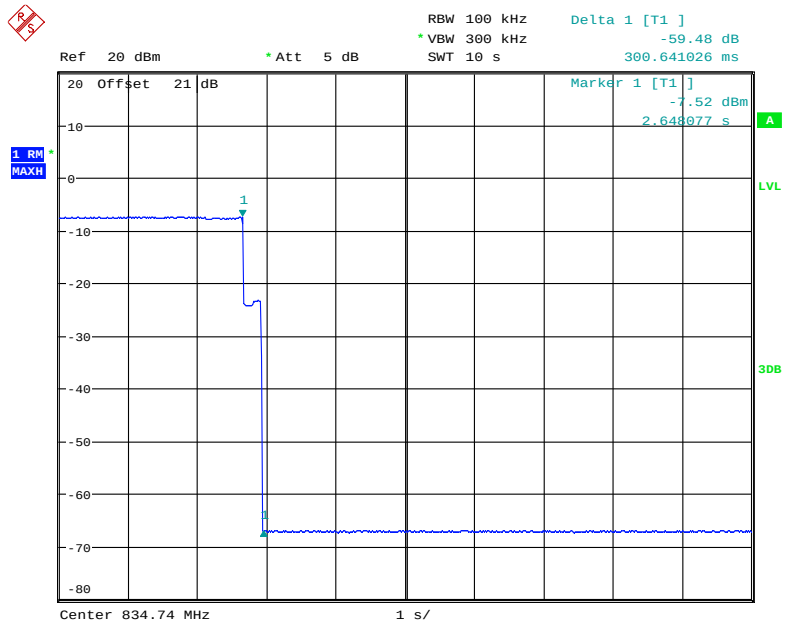


Date: 28.JAN.2021 20:15:18

PCS Band

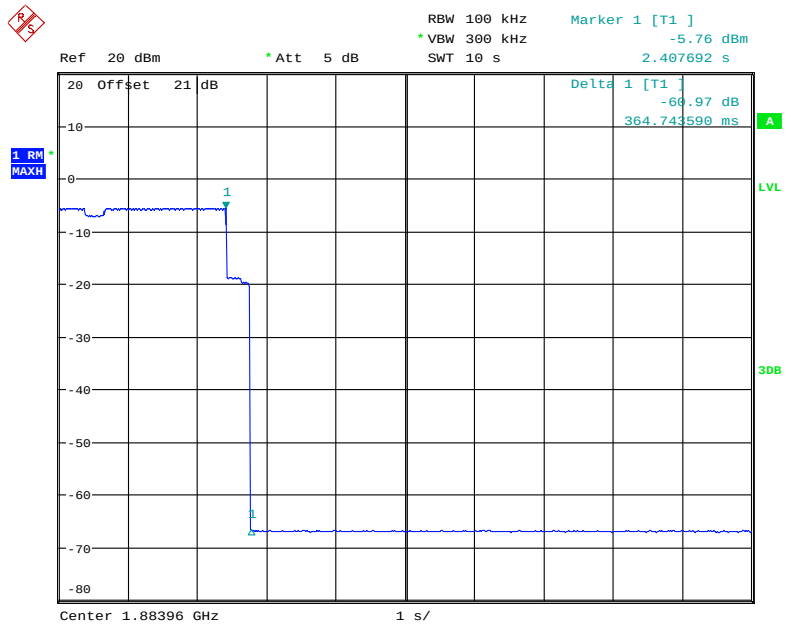


Date: 28.JAN.2021 20:21:46

AWS Band

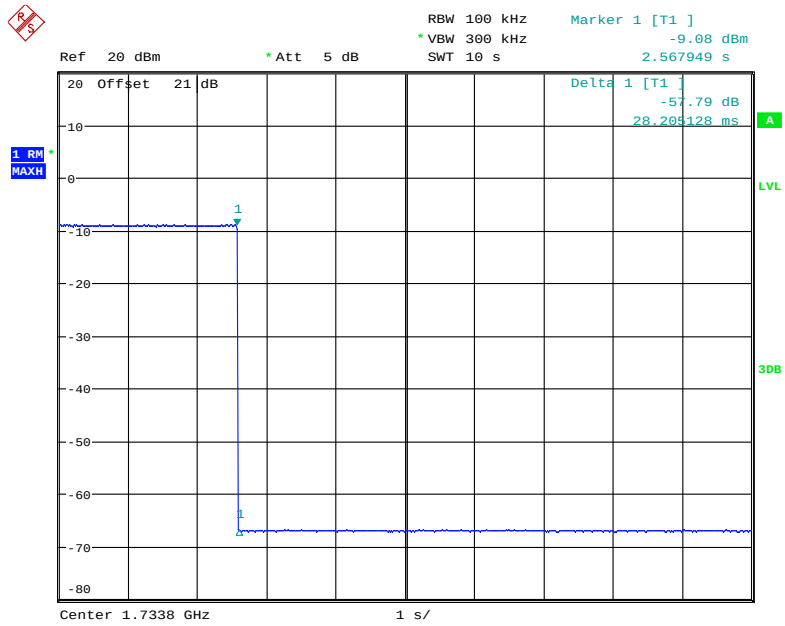


Date: 28.JAN.2021 20:11:11

Lower 700MHz

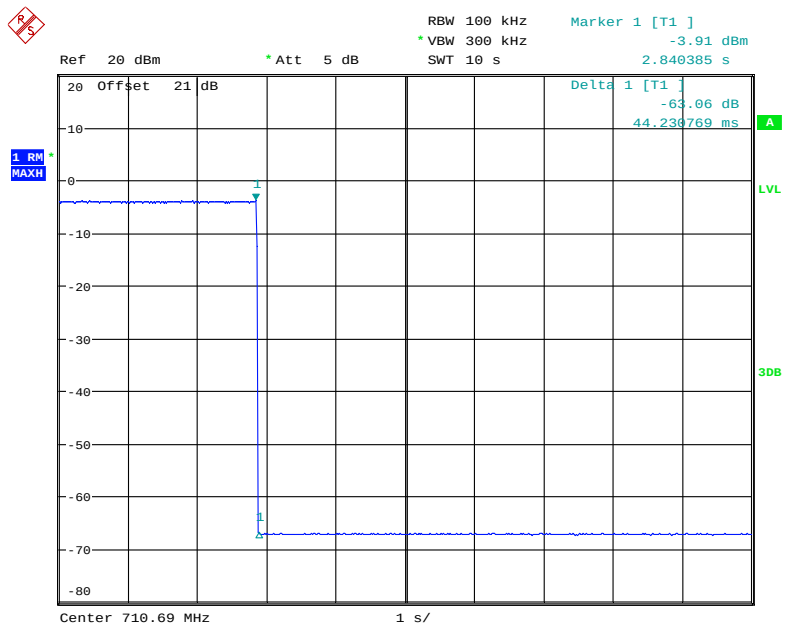

Date: 28.JAN.2021 20:18:15

Upper 700MHz

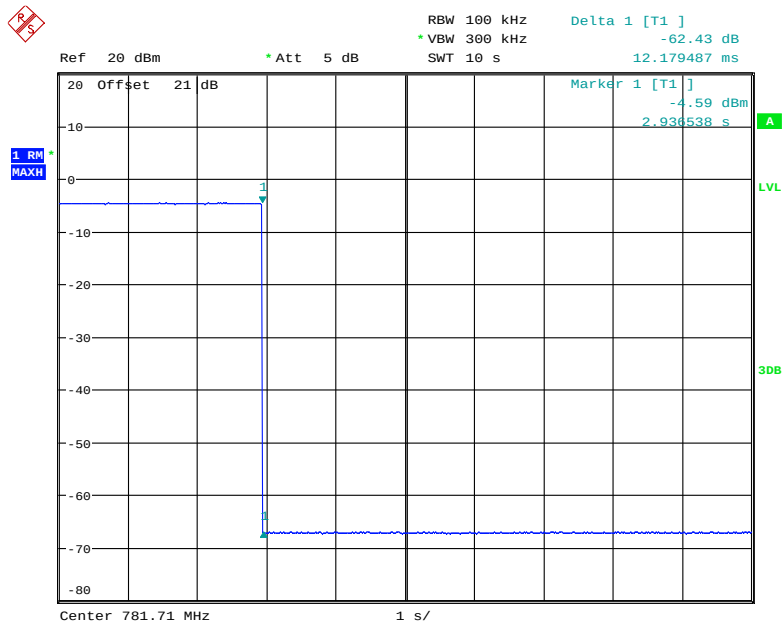

Date: 28.JAN.2021 20:20:00

§ 2.1049 - OCCUPIED BANDWIDTH

Applicable Standards

According to § 2.1049 Measurements required: Occupied bandwidth.

Test Procedure

This measurement is required to compare the uniformity of the output signal relative to the input signal and to satisfy the requirements of § 2.1049.

- Connect the test equipment as shown in **Figure 6** to measure the characteristics of the test signals produced by the signal generator.
- Set VBW to $\geq 3 \times \text{RBW}$.
- Set the center frequency of the spectrum analyzer to the center of the operational band. The span will be adjusted for each modulation type and occupied bandwidth as necessary for accurately viewing the signals.
- Set the signal generator for power level to match the values obtained in 7.2.
- Set the signal generator modulation type for GSM with a PRBS pattern and allow the trace on the signal generator to stabilize adjusting the span as necessary.
- Set the spectrum analyzer RBW for 1% to 5% of the emissions bandwidth.
- Capture the spectrum analyzer trace for inclusion in the test report.
- Repeat 7.10c) to 7.10g) for CDMA and W-CDMA modulation adjusting the span as necessary for all uplink and downlink operational bands. AWGN or LTE may be used in place of W-CDMA, as an option.
- Connect the test equipment as shown in **Figure 1**. Begin with the uplink output connected to the spectrum analyzer.
- Repeat 7.10c) to 7.10h) in this new configuration.

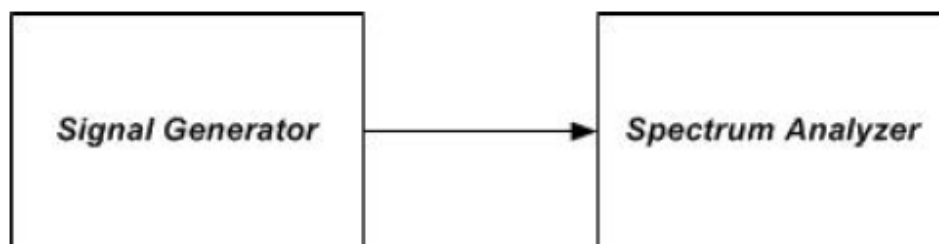


Figure 6 – Occupied bandwidth instrumentation test setup

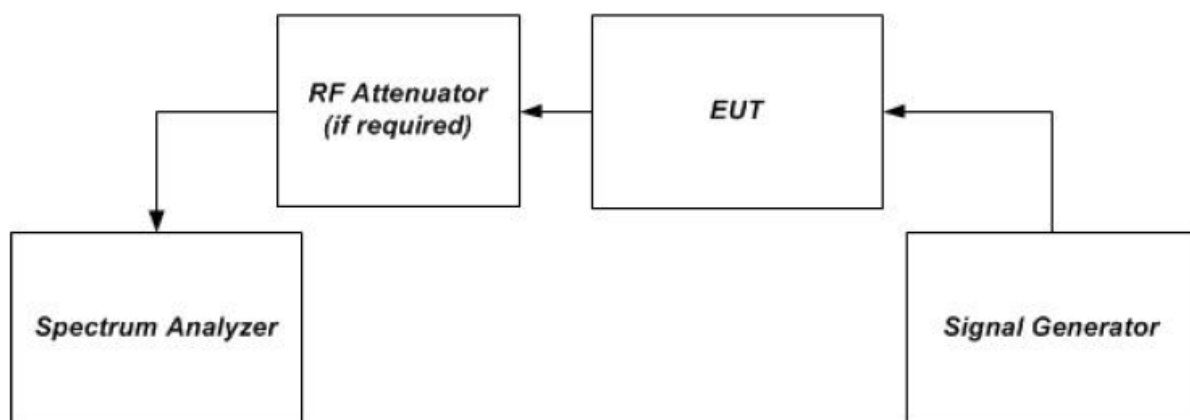


Figure 1 – Band verification test instrumentation setup

Test Data**Environmental Conditions**

Temperature:	25.7 °C
Relative Humidity:	54 %
ATM Pressure:	101.0 kPa


The testing was performed by Jacob Kong on 2021-01-28.

Test Result: Pass

Please refer to following table.


Mode	Operation Bands	Signal type	Occupied bandwidth(MHz)		Result
			In	Out	
Uplink	Lower 700	GSM	0.244	0.245	Pass
		CDMA	1.202	1.207	Pass
		WCDMA	4.183	4.247	Pass
	Upper 700	GSM	0.244	0.244	Pass
		CDMA	1.207	1.226	Pass
		WCDMA	4.199	4.167	Pass
	Cellular	GSM	0.244	0.244	Pass
		CDMA	1.207	1.212	Pass
		WCDMA	4.199	4.215	Pass
	PCS	GSM	0.245	0.244	Pass
		CDMA	1.202	1.207	Pass
		WCDMA	4.231	4.151	Pass
Downlink	Lower 700	GSM	0.245	0.244	Pass
		CDMA	1.207	1.202	Pass
		WCDMA	4.199	4.183	Pass
	Upper 700	GSM	0.245	0.245	Pass
		CDMA	1.202	1.212	Pass
		WCDMA	4.183	4.151	Pass
	Cellular	GSM	0.245	0.242	Pass
		CDMA	1.202	1.207	Pass
		WCDMA	4.183	4.231	Pass
	PCS	GSM	0.247	0.245	Pass
		CDMA	1.207	1.207	Pass
		WCDMA	4.231	4.215	Pass
	AWS	GSM	0.245	0.247	Pass
		CDMA	1.207	1.202	Pass
		WCDMA	4.215	4.167	Pass

Uplink, 836.5MHz-CDMA (Input)

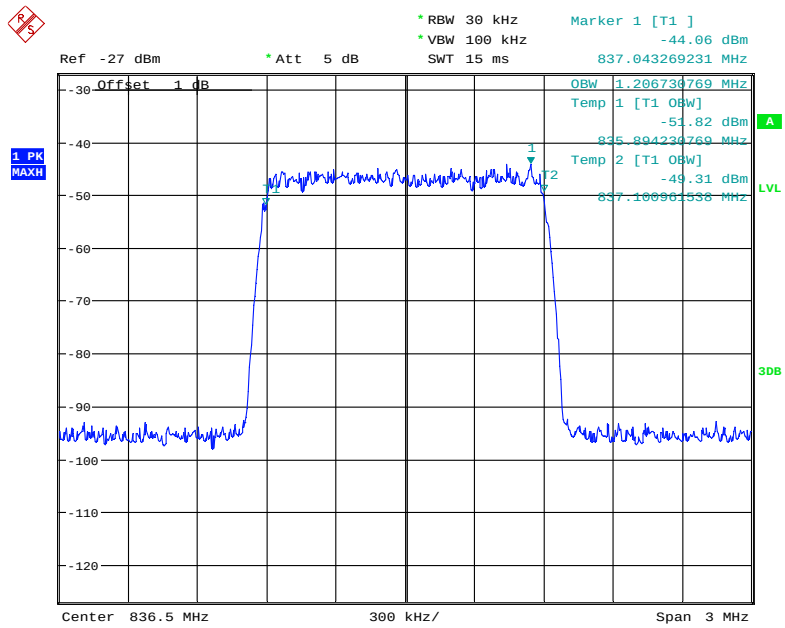

Date: 28.JAN.2021 17:31:58

Uplink, 836.5MHz-CDMA (Output)

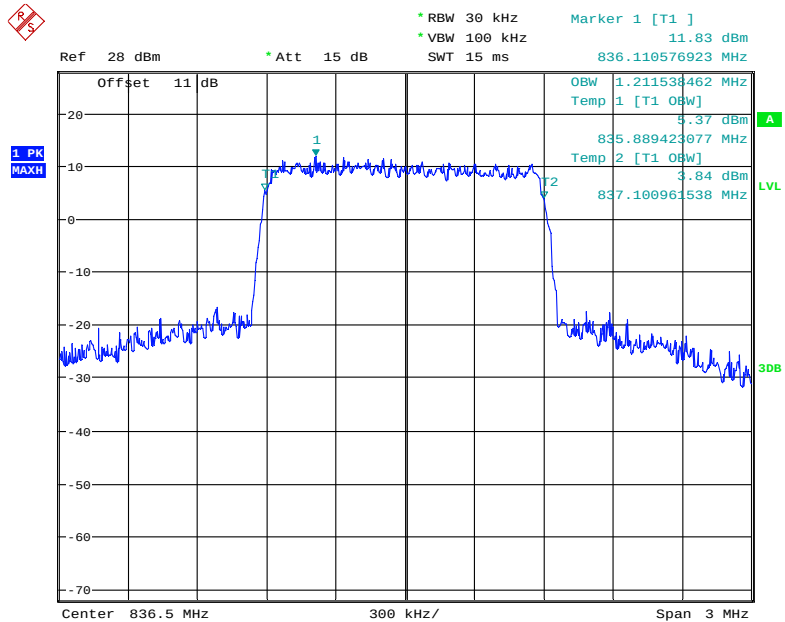

Date: 28.JAN.2021 17:13:29

Spectrum Analyzer Readings:


- Ref:** -28 dBm
- Att:** 5 dB
- RBW:** 5 kHz
- VBW:** 20 kHz
- SWT:** 40 ms
- Marker 1 [T1]:** 836.511217949 MHz, -45.17 dBm
- Marker 2 [T2]:** 836.621794872 MHz, -58.65 dBm
- Center Frequency:** 836.5 MHz
- Span:** 1 MHz
- Offset:** 1 dB
- Scale:** 1 PK MAXH

Date: 28.JAN.2021 17:33:26

[illegible]


Date: 28.JAN.2021 17:07:27

Uplink, 836.5MHz-WCDMA (Input)

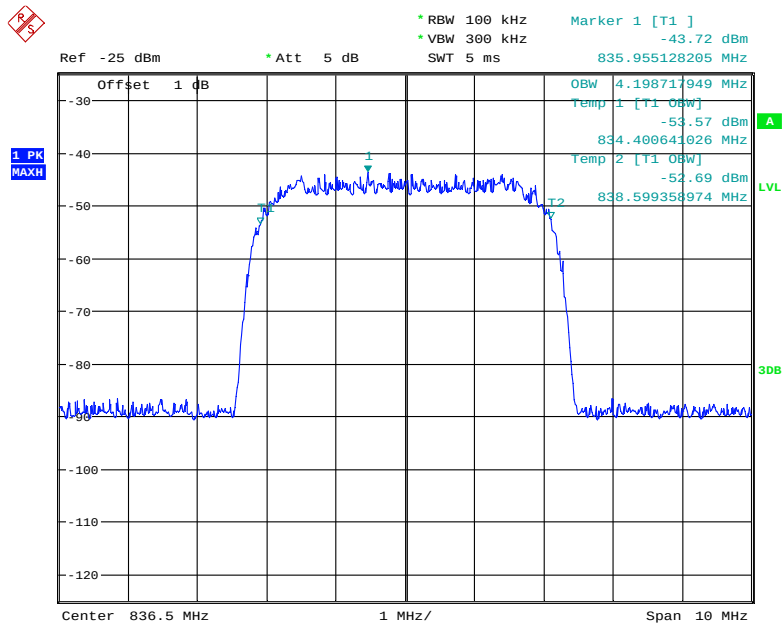


Date: 28.JAN.2021 17:25:20

Uplink, 836.5MHz-WCDMA (Output)

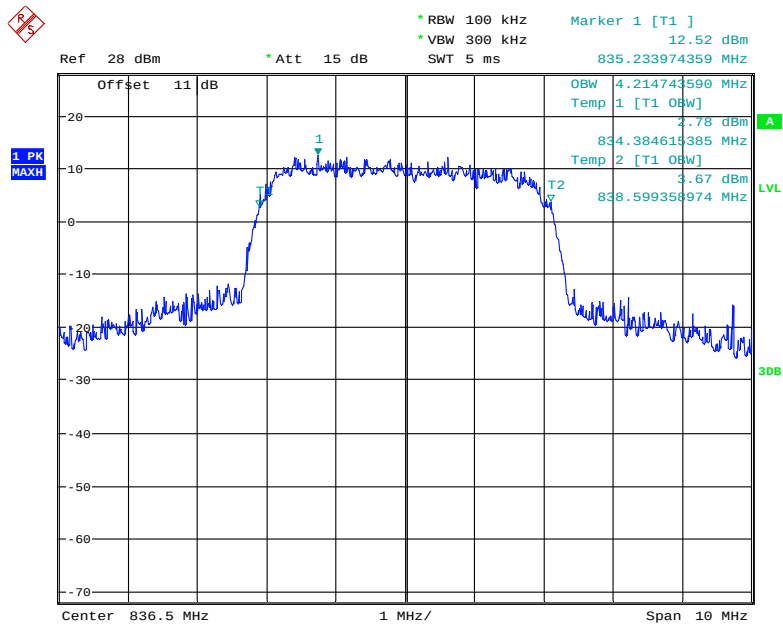


Date: 28.JAN.2021 17:41:20

Uplink, 1882.5MHz-CDMA (Input)

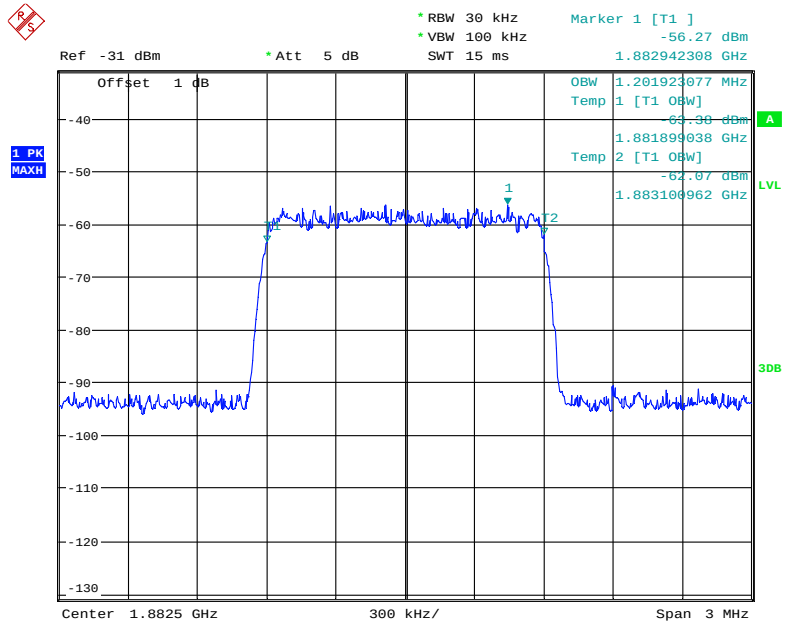


Date: 28.JAN.2021 17:30:39

Uplink, 1882.5MHz-CDMA (Output)

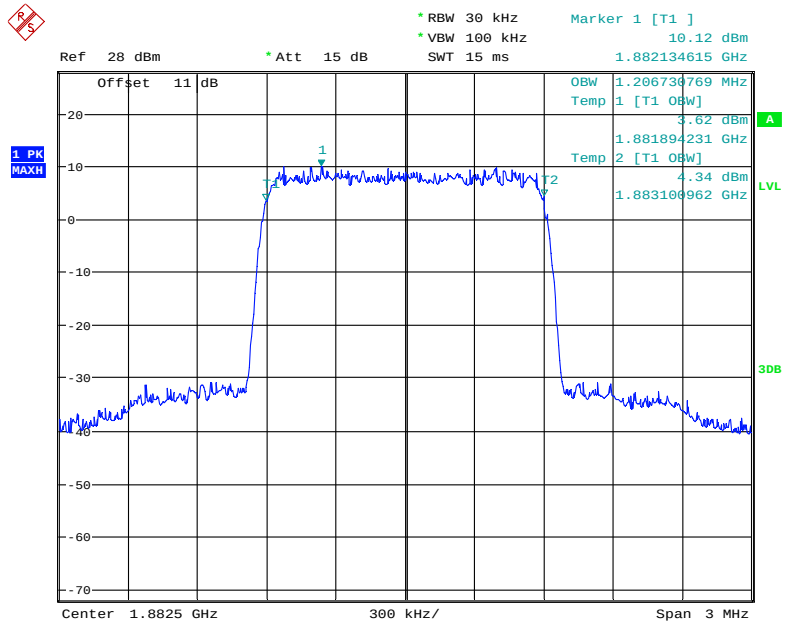


Date: 28.JAN.2021 17:14:16

Uplink, 1882.5MHz-GSM (Input)

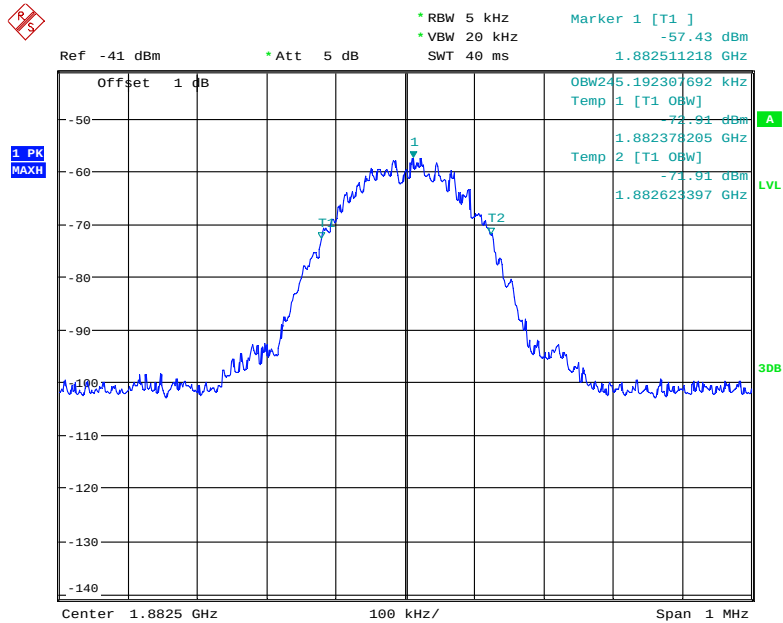


Date: 28.JAN.2021 17:35:56

Uplink, 1882.5MHz-GSM (Output)

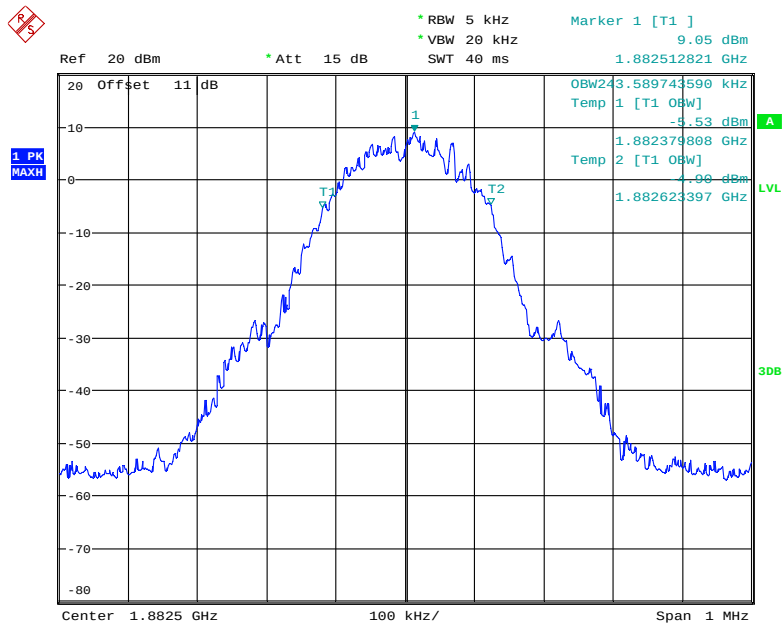


Date: 28.JAN.2021 17:09:00

Uplink, 1882.5MHz-WCDMA (Input)

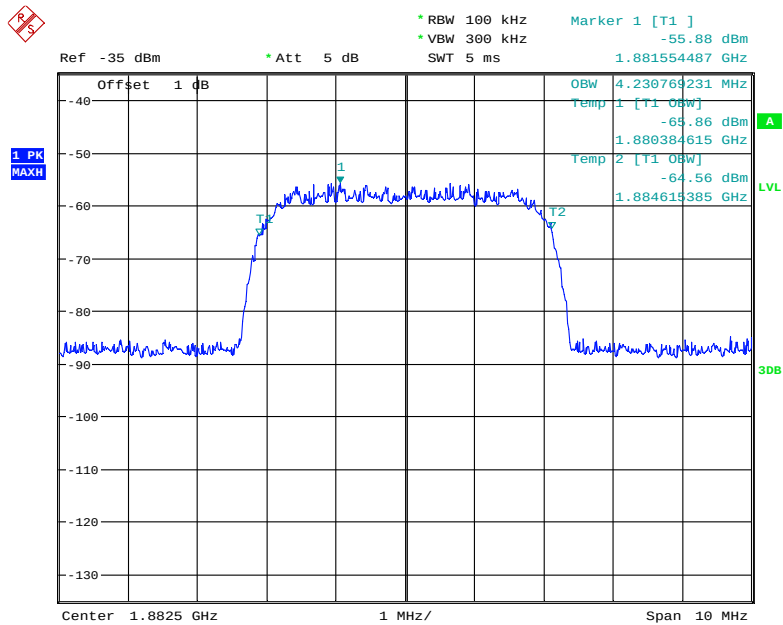


Date: 28.JAN.2021 17:26:49

Uplink, 1882.5MHz-WCDMA (Output)

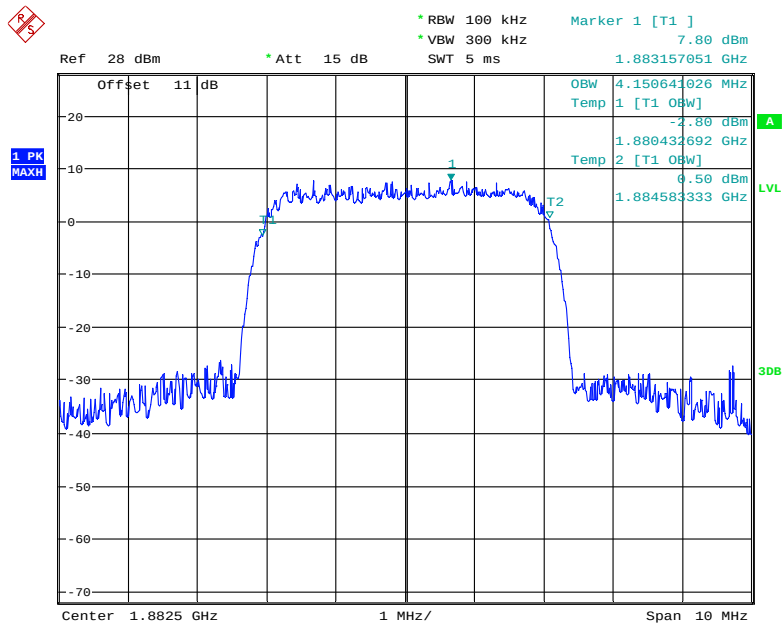


Date: 28.JAN.2021 17:42:14

Uplink, 1732.5MHz-CDMA (Input)

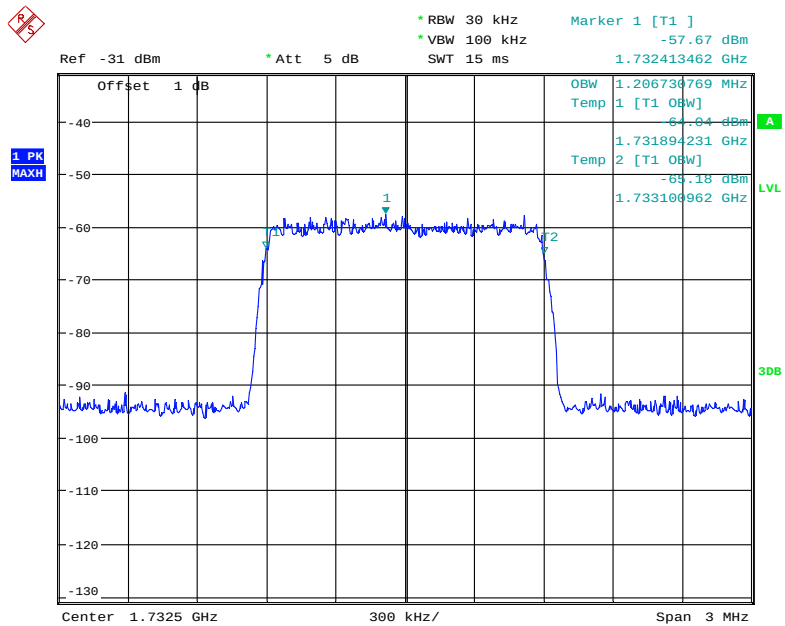


Date: 28.JAN.2021 17:31:38

Uplink, 1732.5MHz-CDMA (Output)

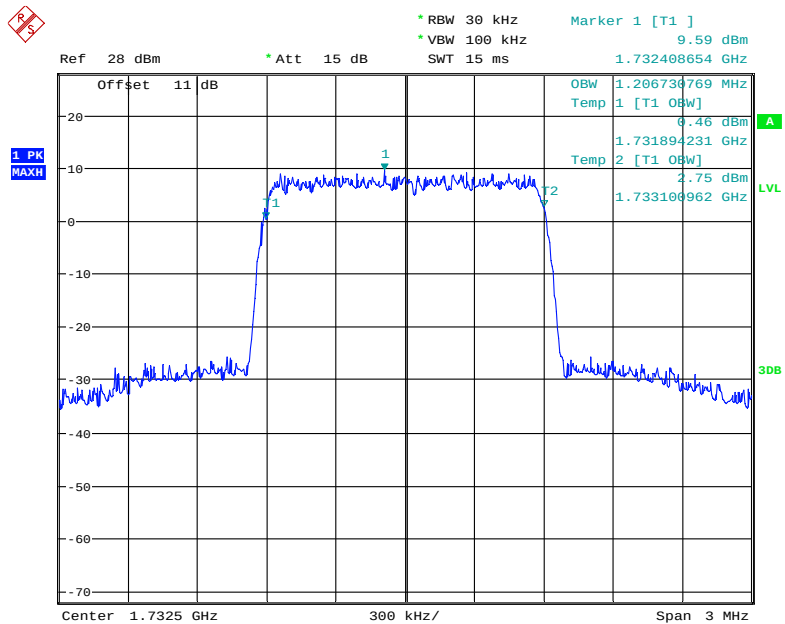


Date: 28.JAN.2021 17:13:48

Uplink, 1732.5MHz-GSM (Input)

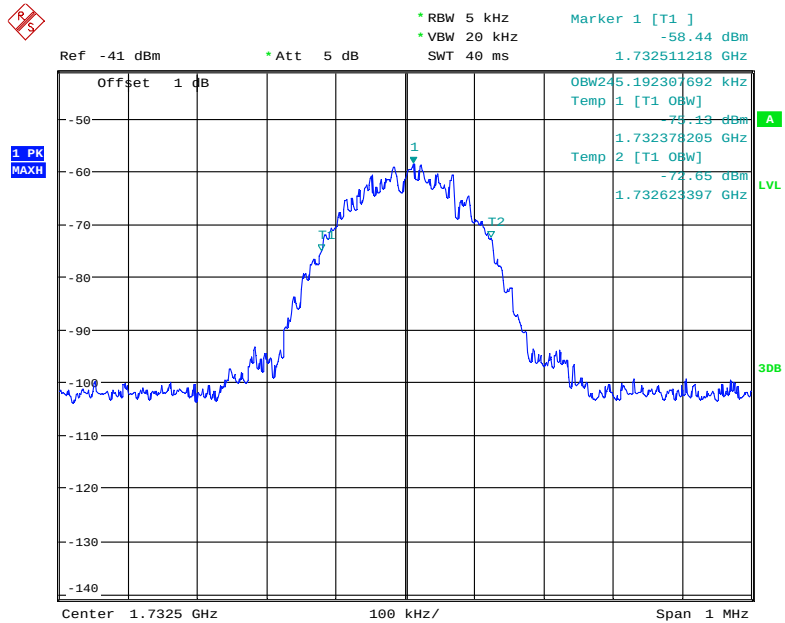


Date: 28.JAN.2021 17:33:54

Uplink, 1732.5MHz-GSM (Output)

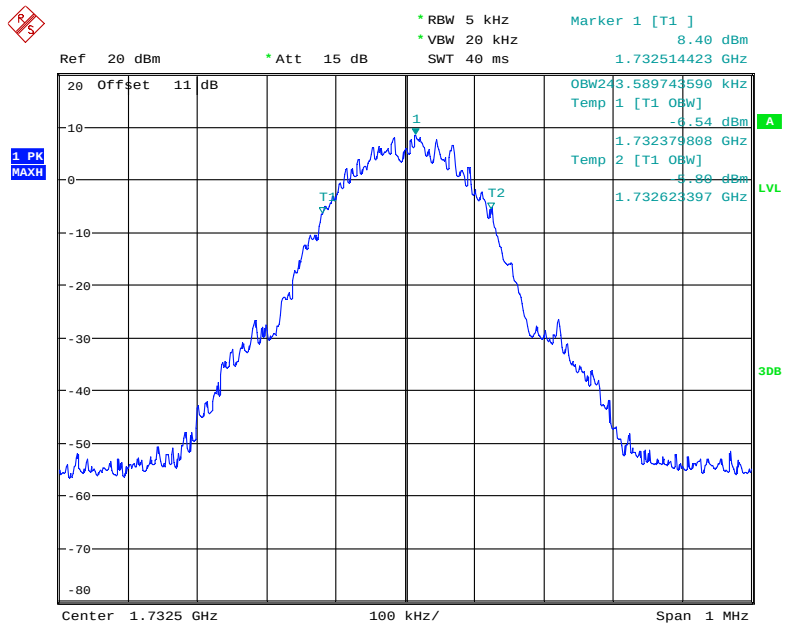


Date: 28.JAN.2021 17:08:11

Uplink, 1732.5MHz-WCDMA (Input)

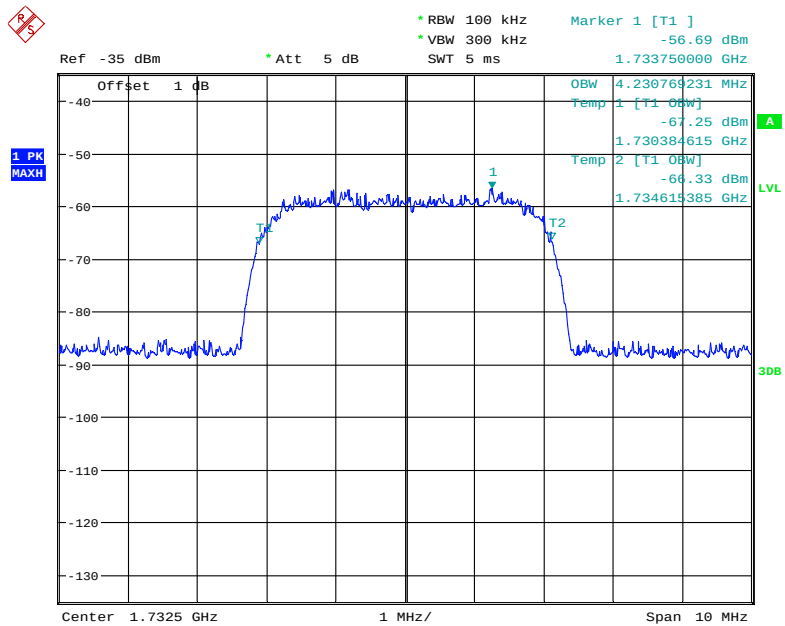


Date: 28.JAN.2021 17:25:58

Uplink, 1732.5MHz-WCDMA (Output)

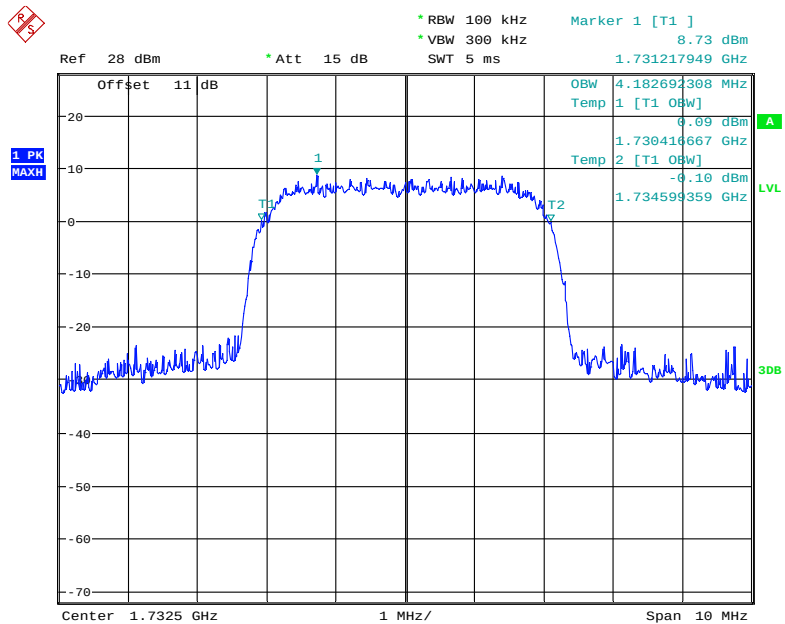


Date: 28.JAN.2021 17:41:56

Uplink, 707MHz-CDMA (Input)

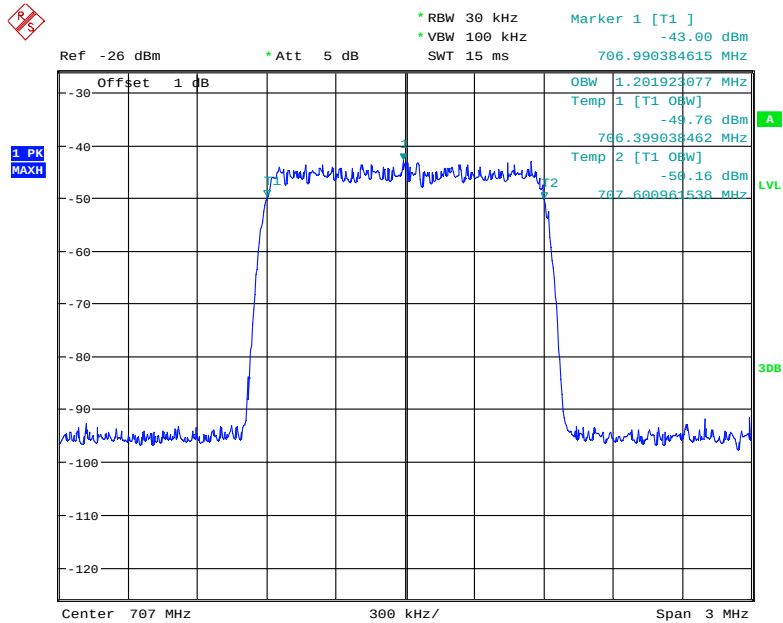


Date: 28.JAN.2021 17:30:14

Uplink, 707MHz-CDMA (Output)

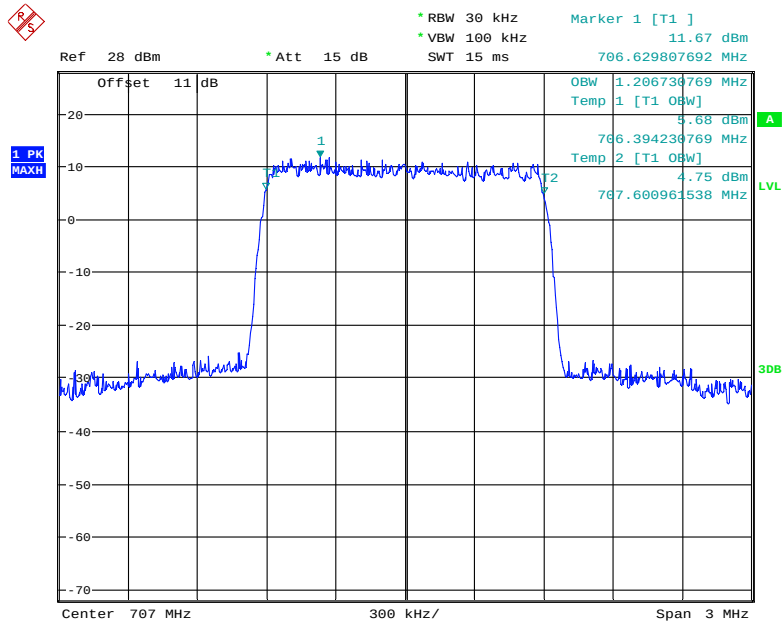


Date: 28.JAN.2021 17:14:40

Uplink, 707MHz-GSM (Input)

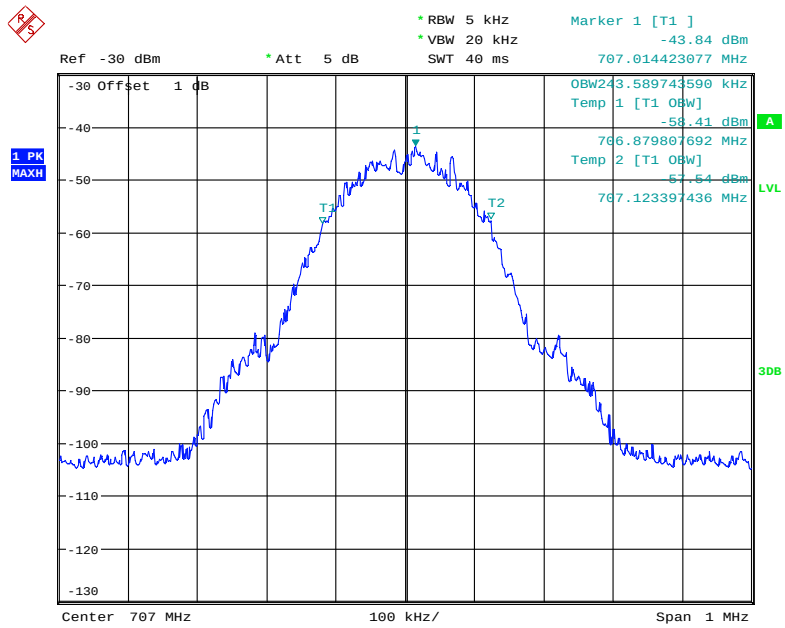


Date: 28.JAN.2021 17:36:29

Uplink, 707MHz-GSM (Output)

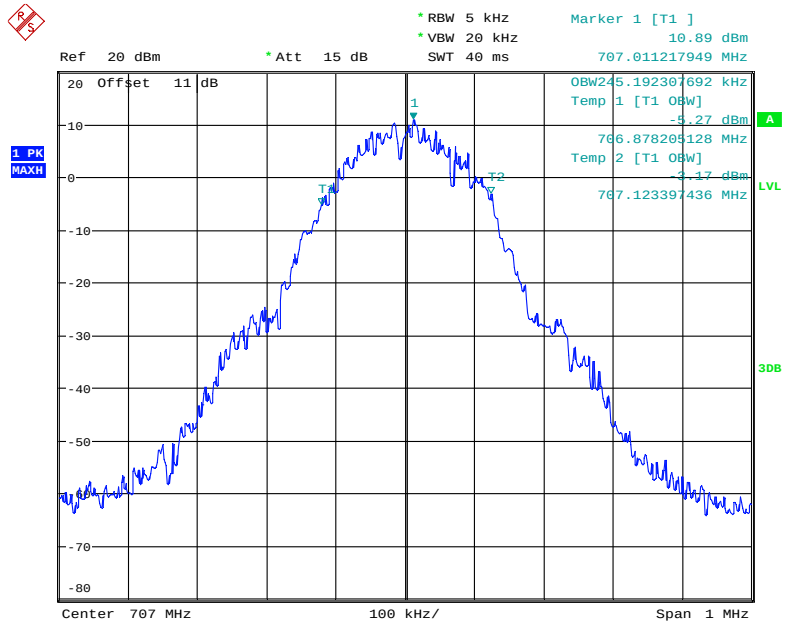


Date: 28.JAN.2021 17:09:29

Uplink, 707MHz-WCDMA (Input)

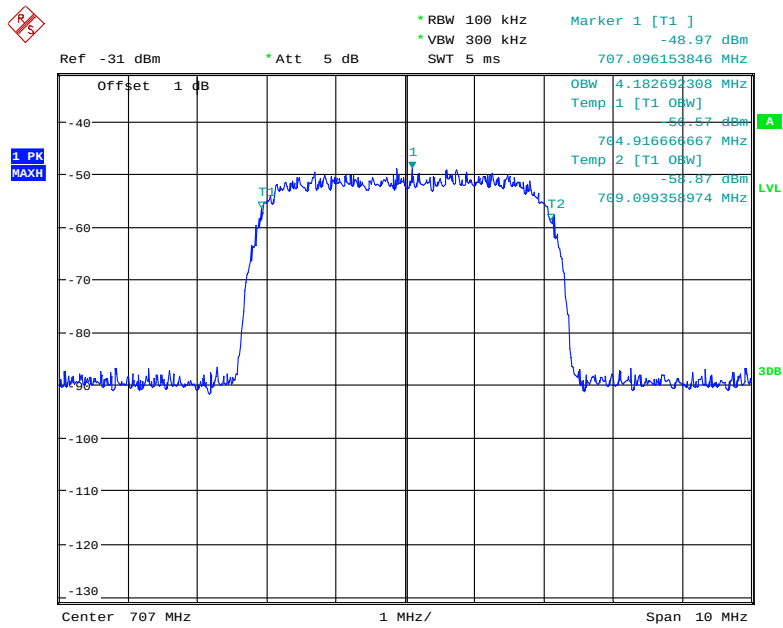


Date: 28.JAN.2021 17:27:48

Uplink, 707MHz-WCDMA (Output)

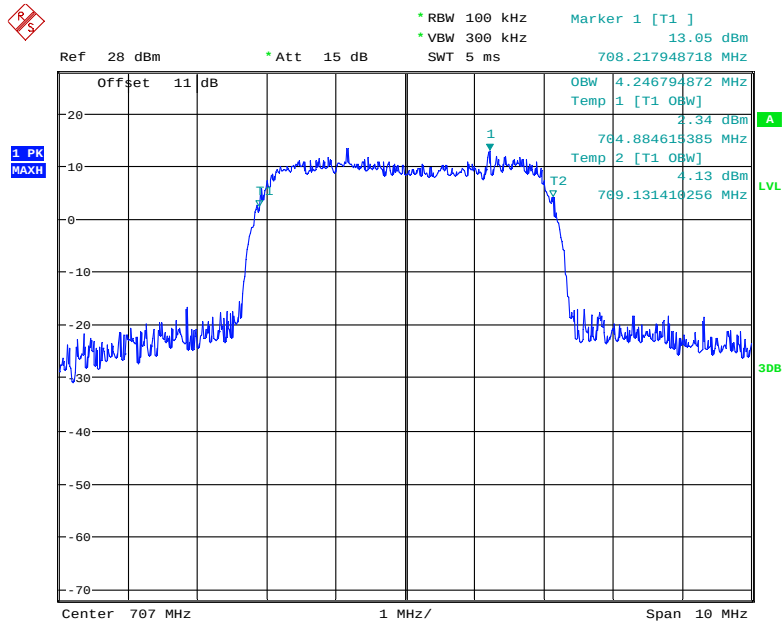


Date: 28.JAN.2021 17:42:35

Uplink, 781.5MHz-CDMA (Input)

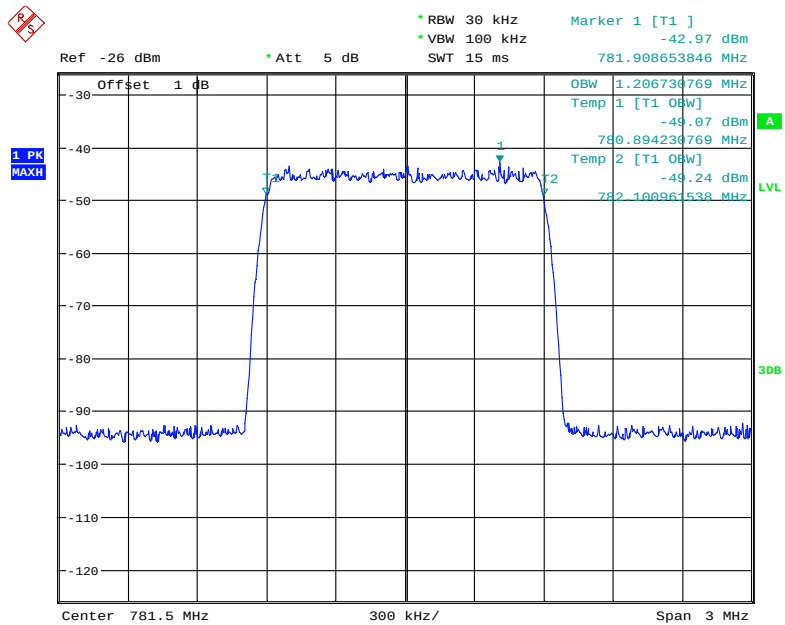


Date: 28.JAN.2021 17:29:11

Uplink, 781.5MHz-CDMA (Output)

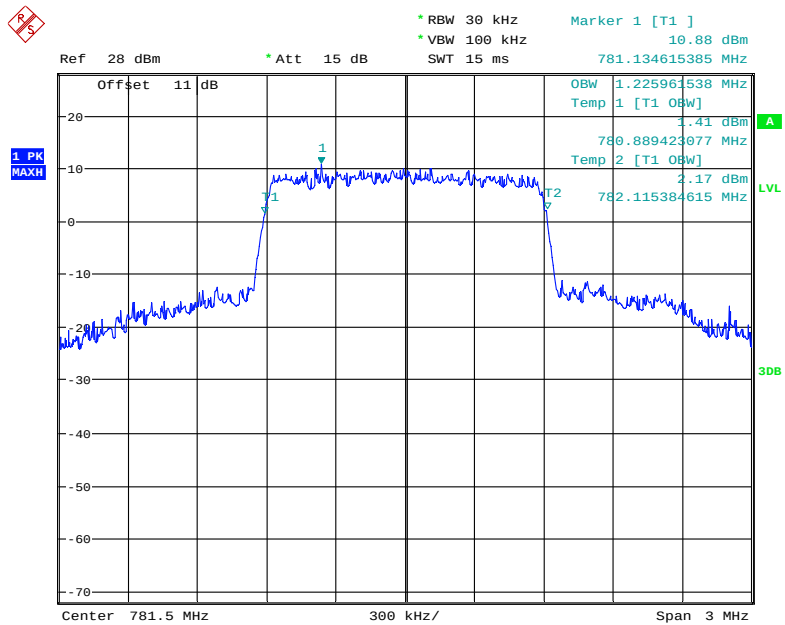


Date: 28.JAN.2021 17:15:27

Uplink, 781.5MHz-GSM (Input)

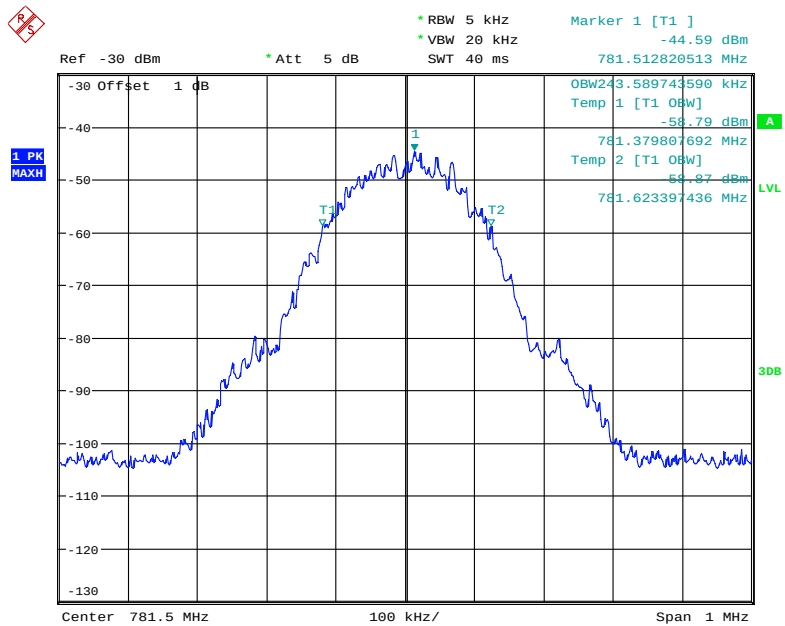


Date: 28.JAN.2021 17:37:35

Uplink, 781.5MHz-GSM (Output)

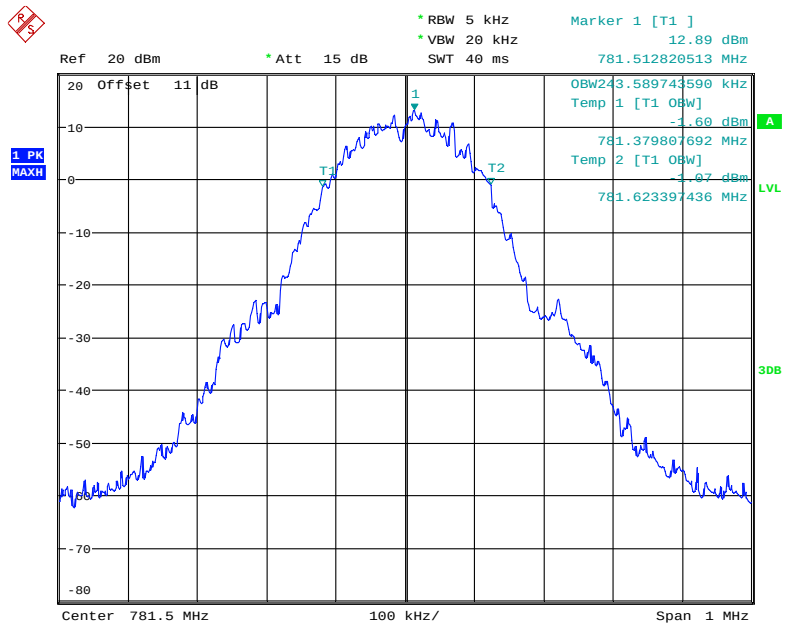


Date: 28.JAN.2021 17:10:13

Uplink, 781.5MHz-WCDMA (Input)

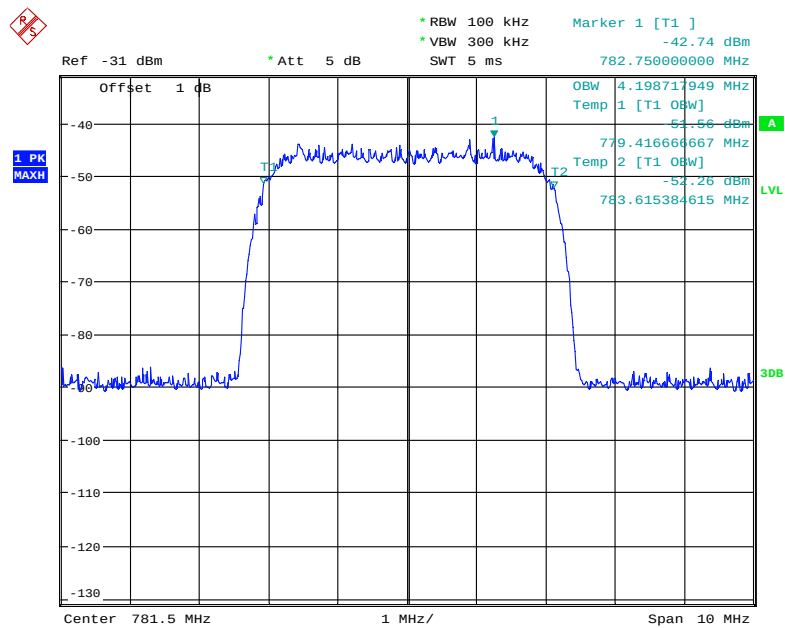


Date: 28.JAN.2021 17:28:26

Uplink, 781.5MHz-WCDMA (Output)

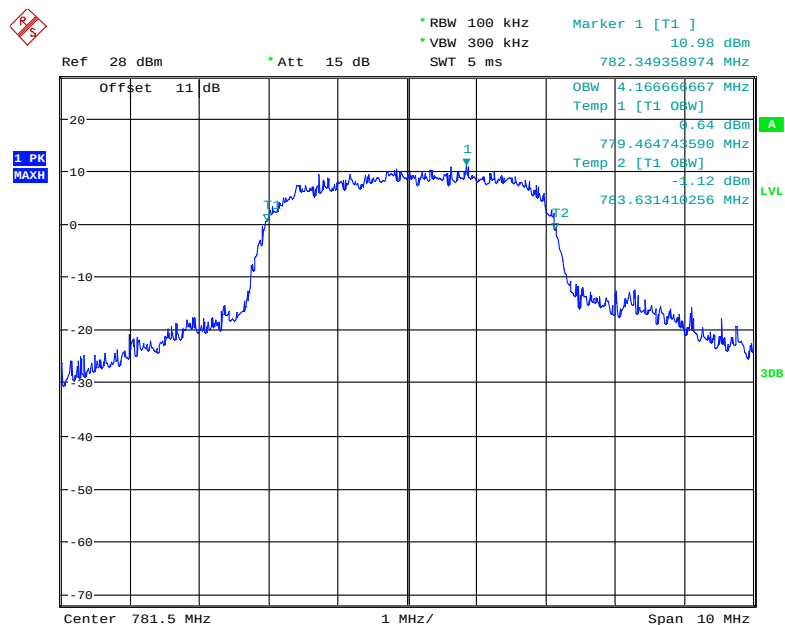


Date: 28.JAN.2021 17:43:15

Downlink, 881.5MHz-CDMA (Input)

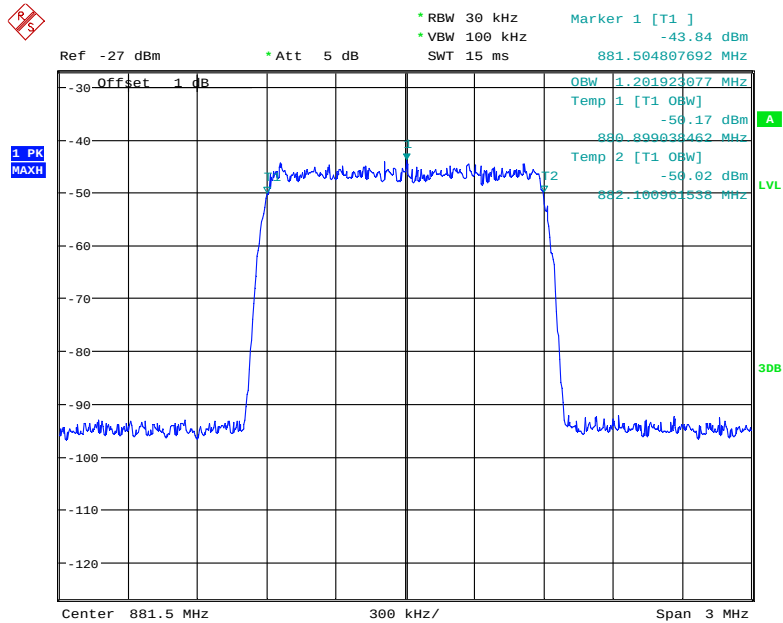


Date: 28.JAN.2021 17:32:20

Downlink, 881.5MHz-CDMA (Output)

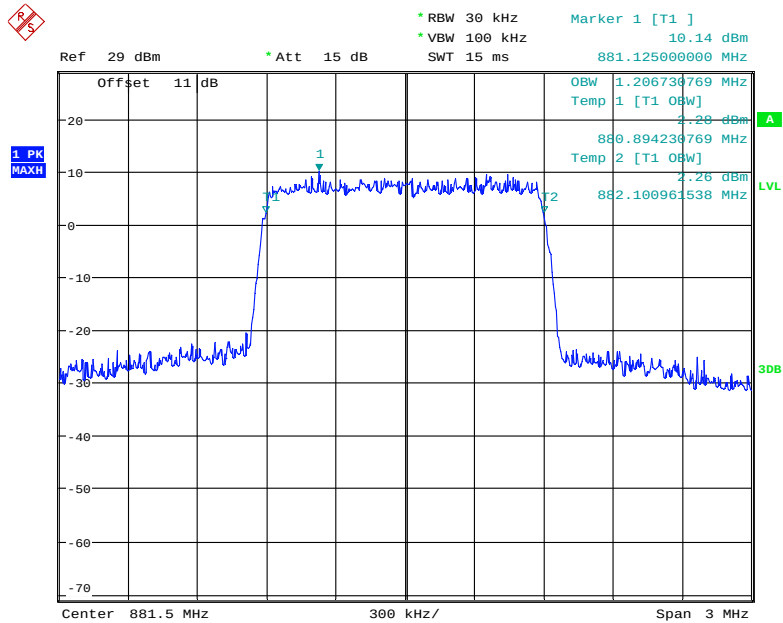


Date: 28.JAN.2021 16:59:44

Downlink, 881.5MHz-GSM (Input)

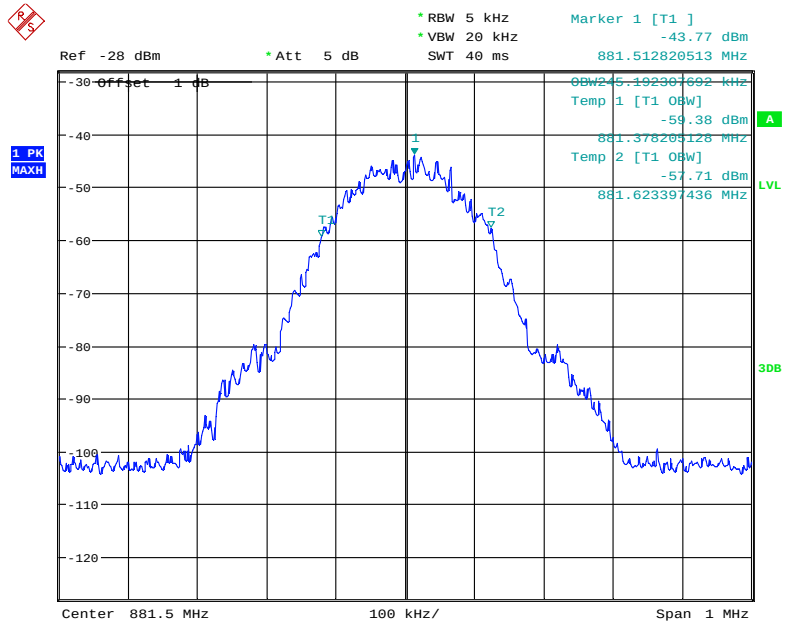


Date: 28.JAN.2021 17:33:02

Downlink, 881.5MHz-GSM (Output)

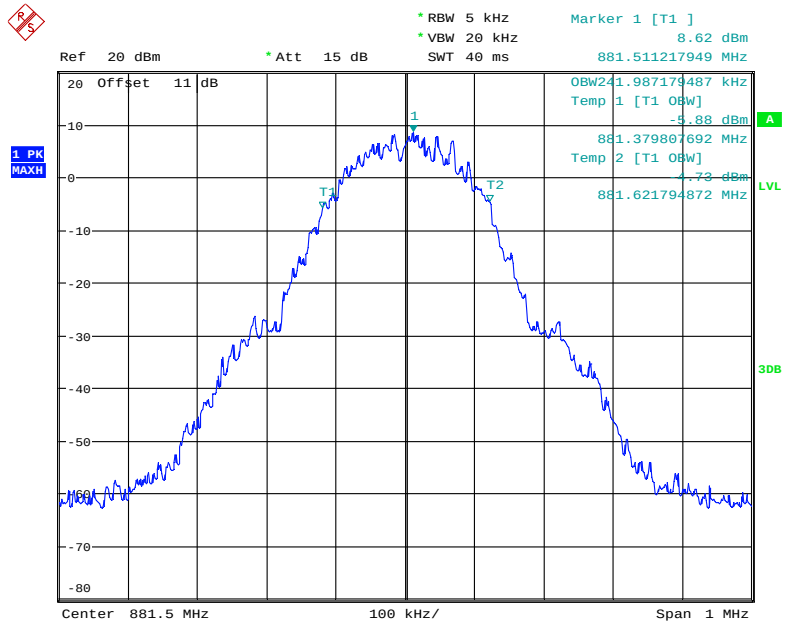


Date: 28.JAN.2021 17:05:32

Downlink, 881.5MHz-WCDMA (Input)

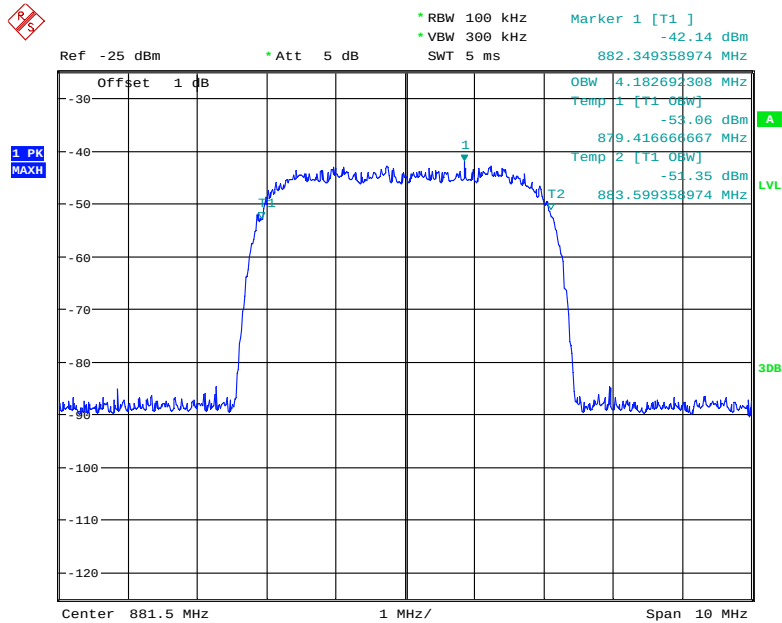


Date: 28.JAN.2021 17:24:55

Downlink, 881.5MHz-WCDMA (Output)

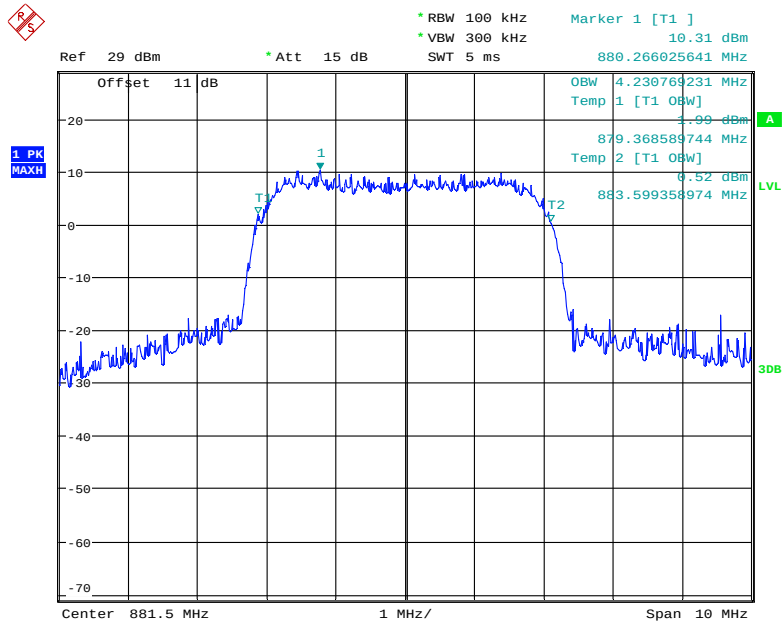


Date: 28.JAN.2021 17:00:25

Downlink, 1962.5MHz-CDMA (Input)

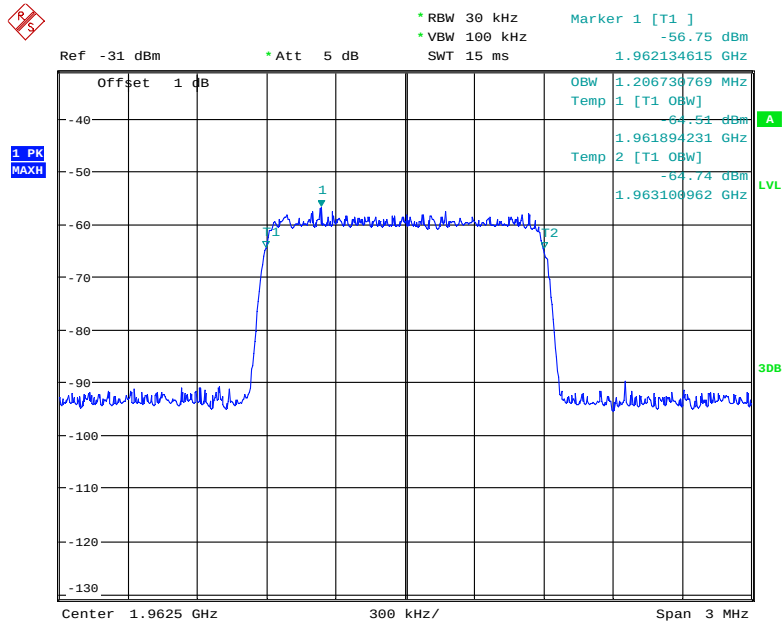


Date: 28.JAN.2021 17:30:58

Downlink, 1962.5MHz-CDMA (Output)

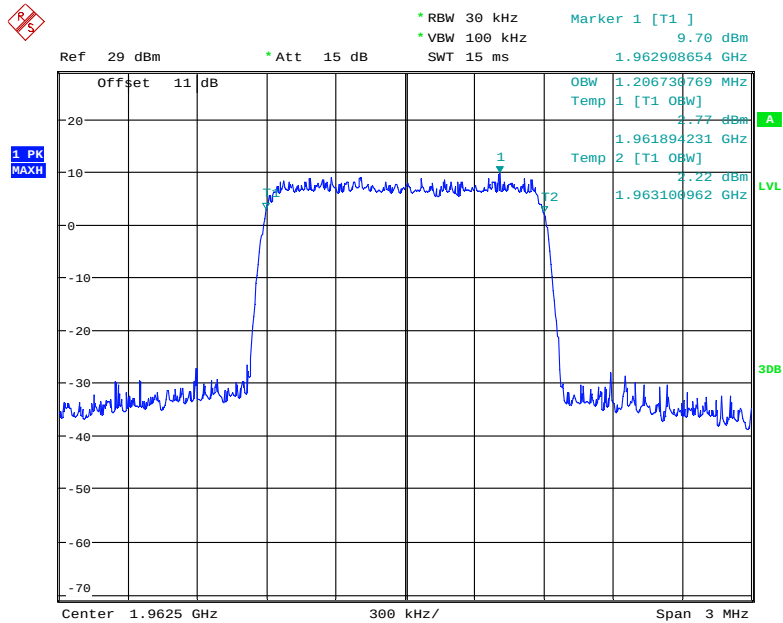


Date: 28.JAN.2021 16:58:56

Downlink, 1962.5MHz-GSM (Input)

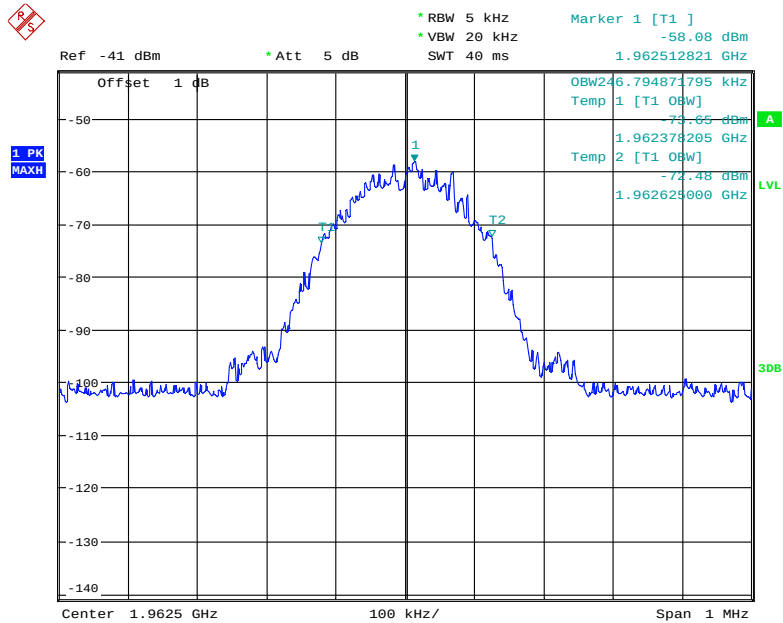


Date: 28.JAN.2021 17:35:22

Downlink, 1962.5MHz-GSM (Output)

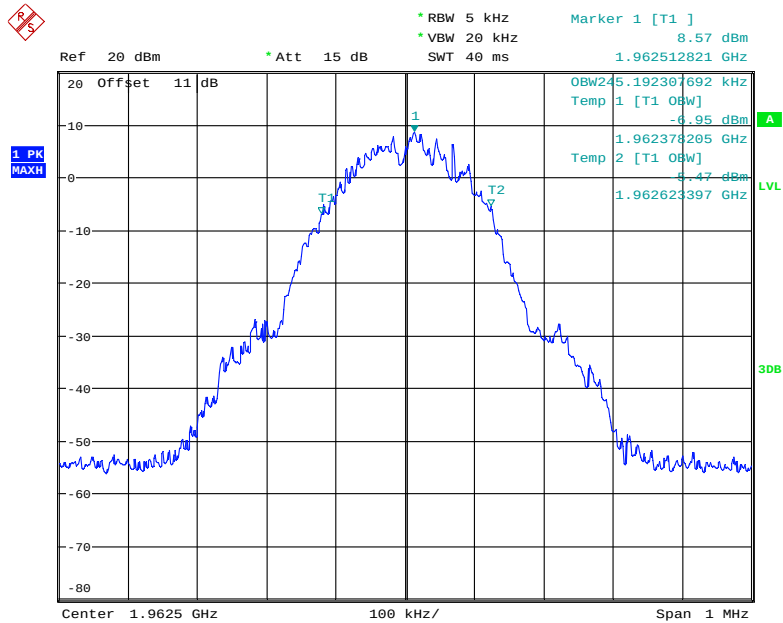


Date: 28.JAN.2021 17:04:13

Downlink, 1962.5MHz-WCDMA (Input)

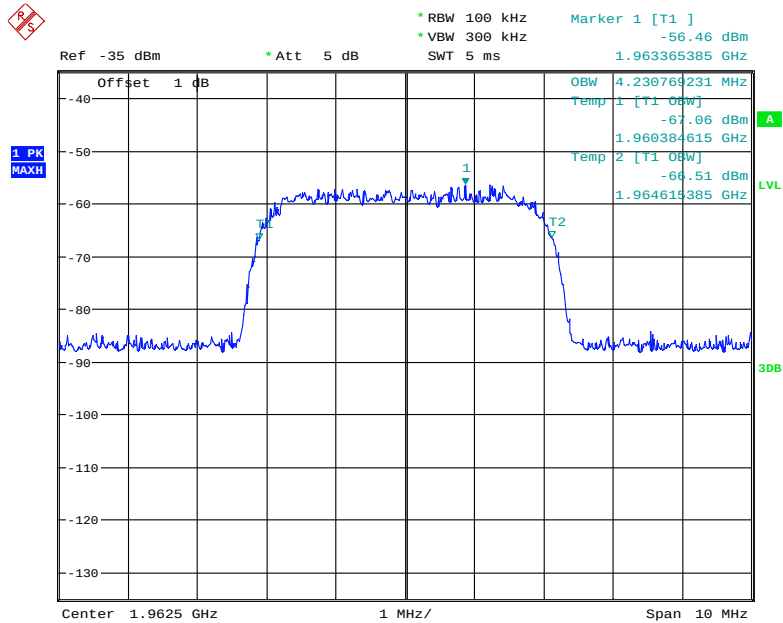


Date: 28.JAN.2021 17:27:07

Downlink, 1962.5MHz-WCDMA (Output)

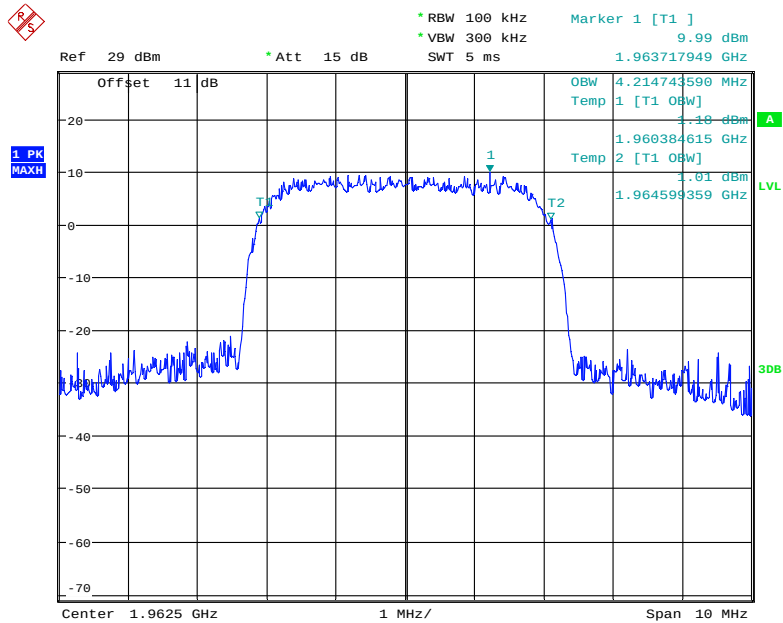


Date: 28.JAN.2021 17:01:18

Downlink, 2132.5MHz-CDMA (Input)

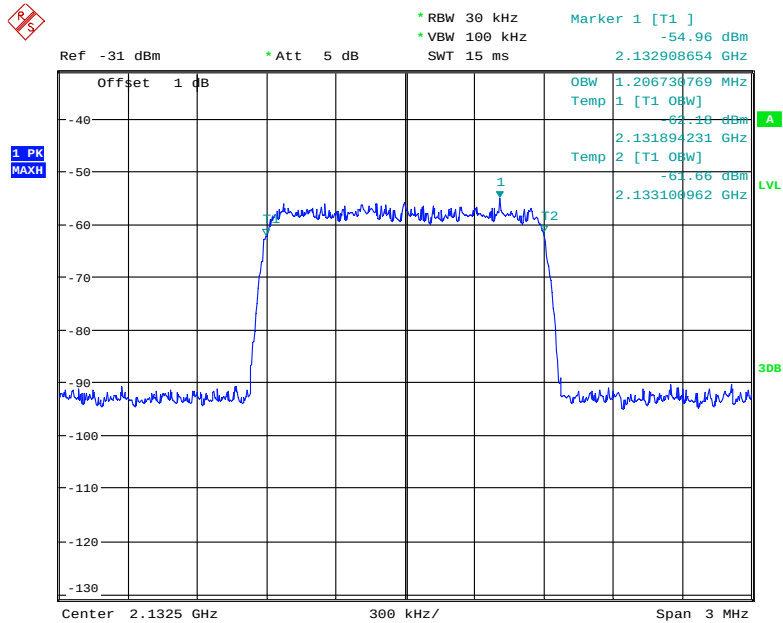


Date: 28.JAN.2021 17:31:20

Downlink, 2132.5MHz-CDMA (Output)

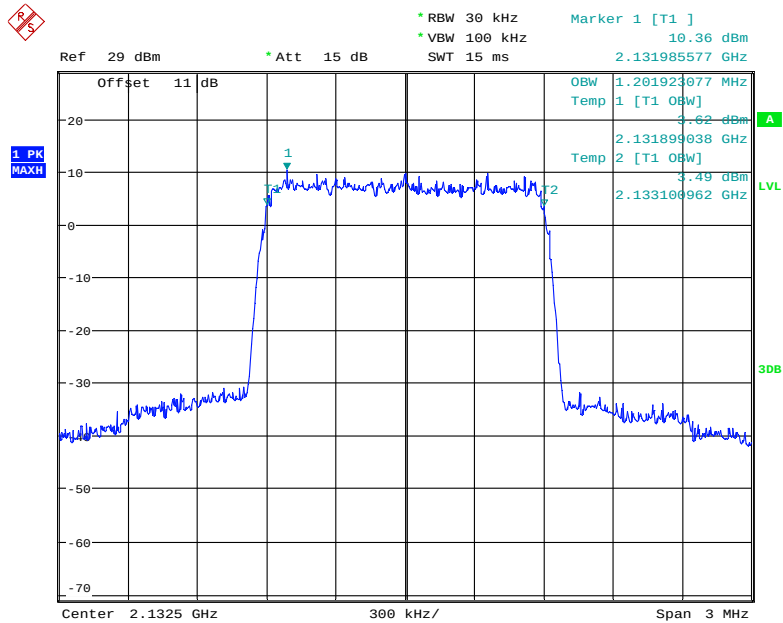


Date: 28.JAN.2021 16:59:21

Downlink, 2132.5MHz-GSM (Input)

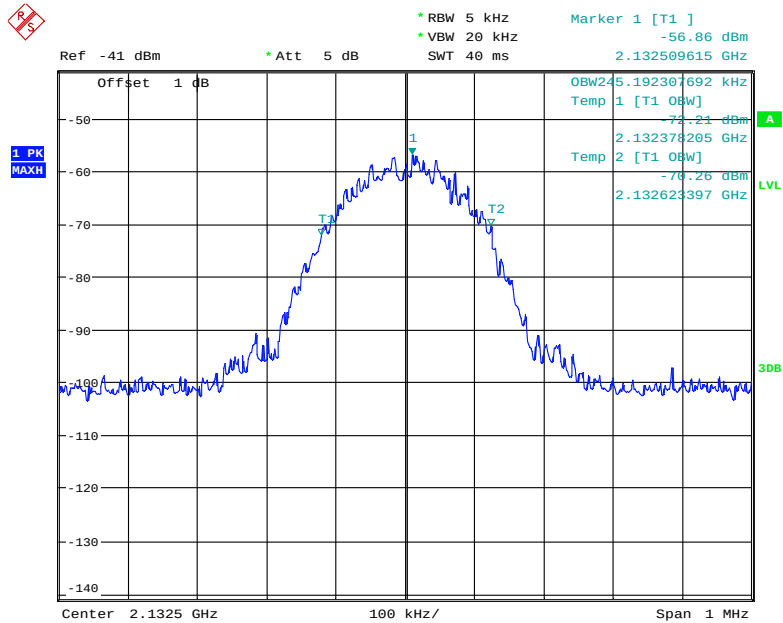


Date: 28.JAN.2021 17:34:55

Downlink, 2132.5MHz-GSM (Output)

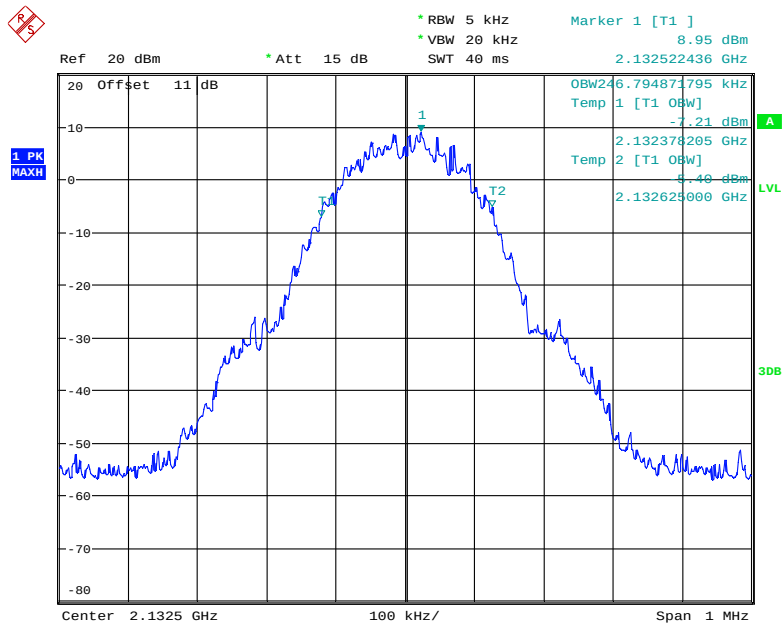


Date: 28.JAN.2021 17:05:03

Downlink, 2132.5MHz-WCDMA (Input)

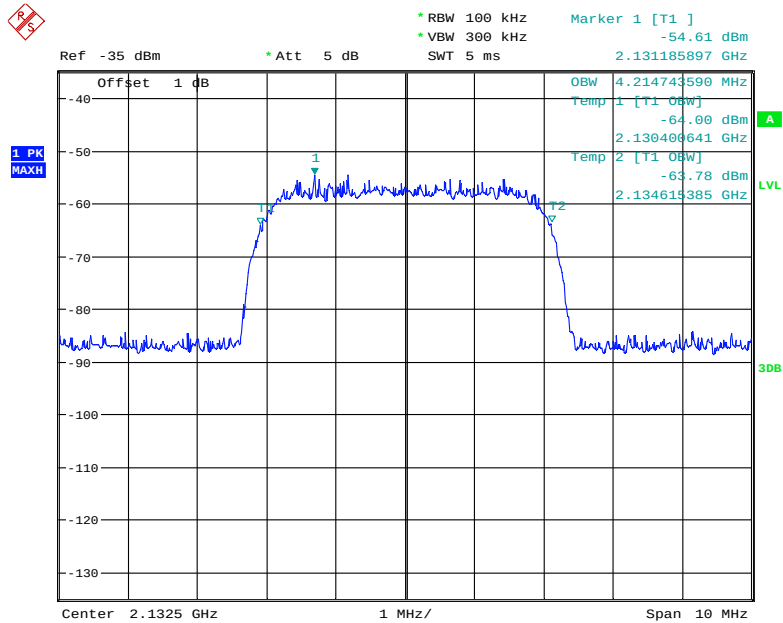


Date: 28.JAN.2021 17:26:27

Downlink, 2132.5MHz-WCDMA (Output)

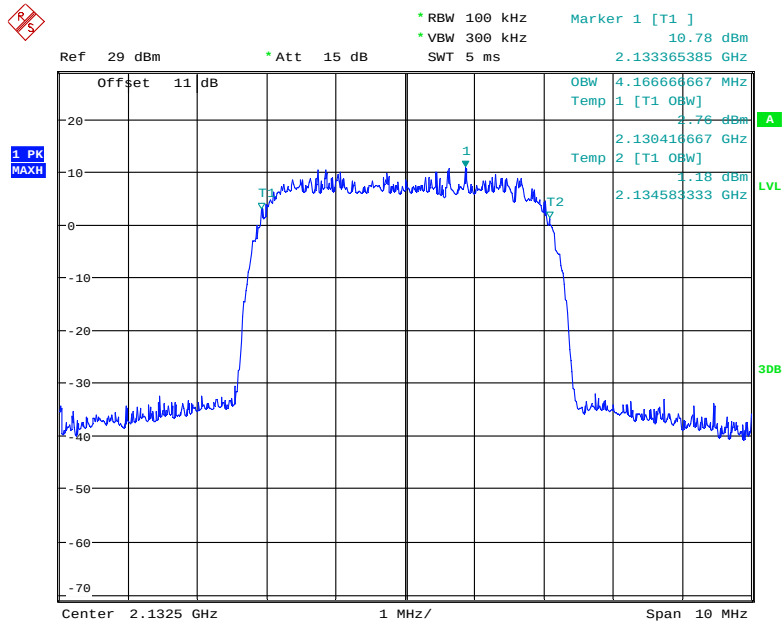


Date: 28.JAN.2021 17:00:50

Downlink, 737MHz-CDMA (Input)

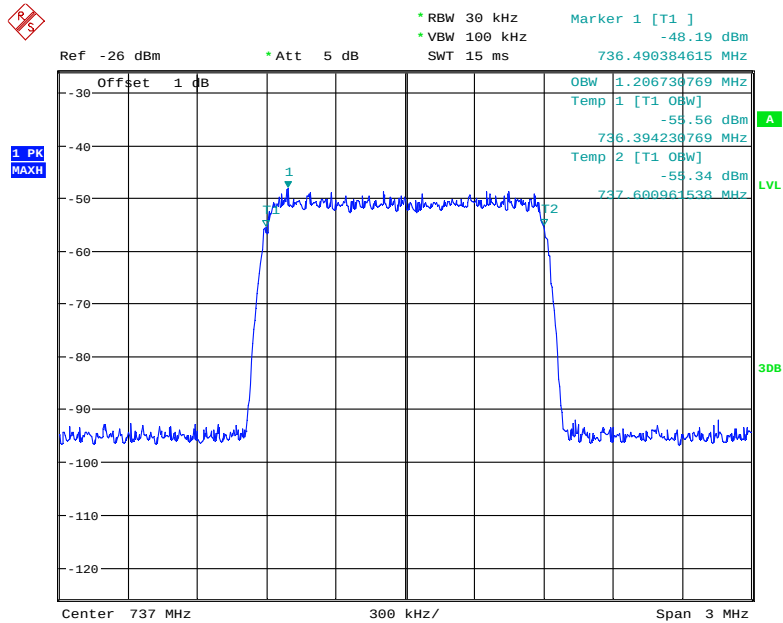


Date: 28.JAN.2021 17:29:57

Downlink, 737MHz-CDMA (Output)

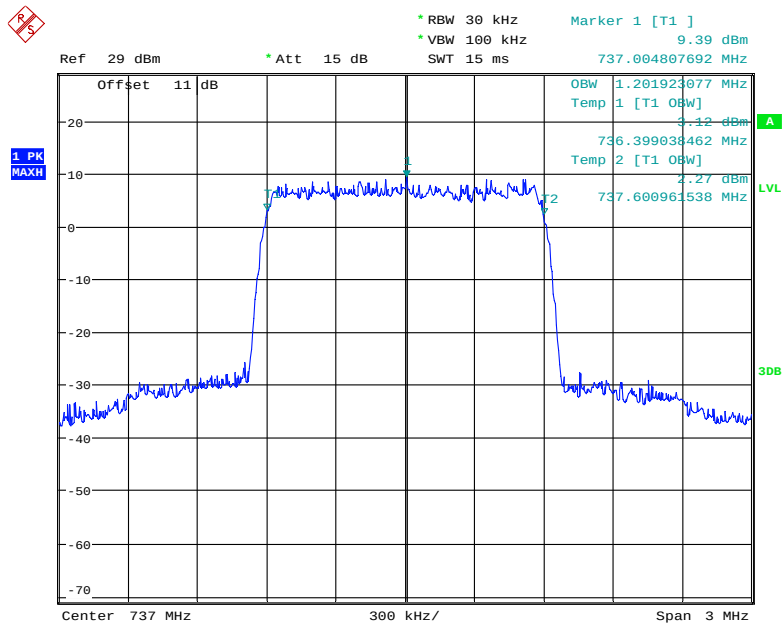


Date: 28.JAN.2021 16:58:29

Downlink, 737MHz-GSM (Input)

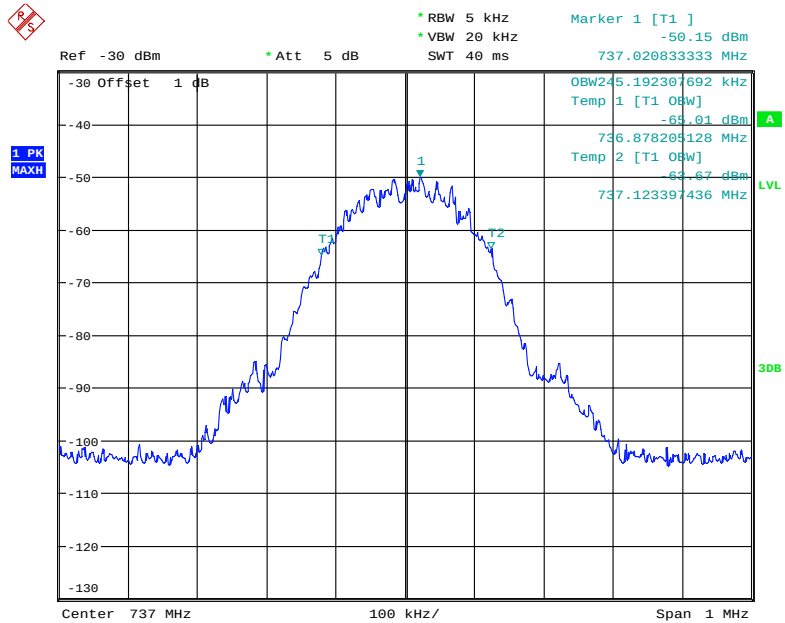


Date: 28.JAN.2021 17:37:07

Downlink, 737MHz-GSM (Output)

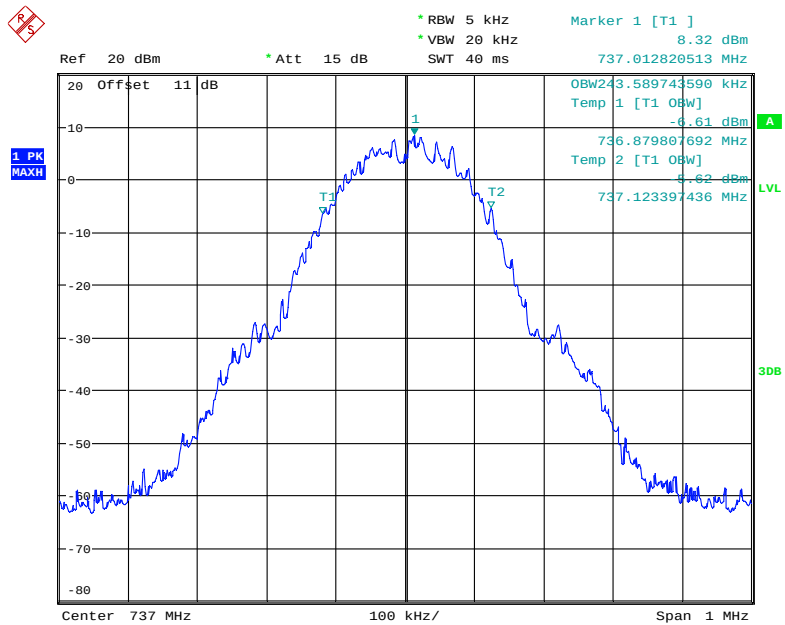


Date: 28.JAN.2021 17:03:41

Downlink, 737MHz-WCDMA (Input)

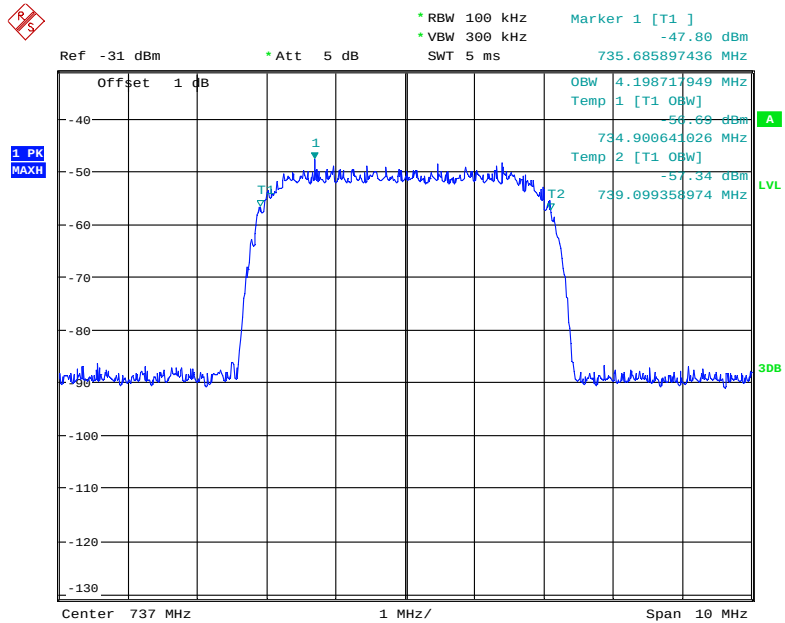


Date: 28.JAN.2021 17:27:34

Downlink, 737MHz-WCDMA (Output)

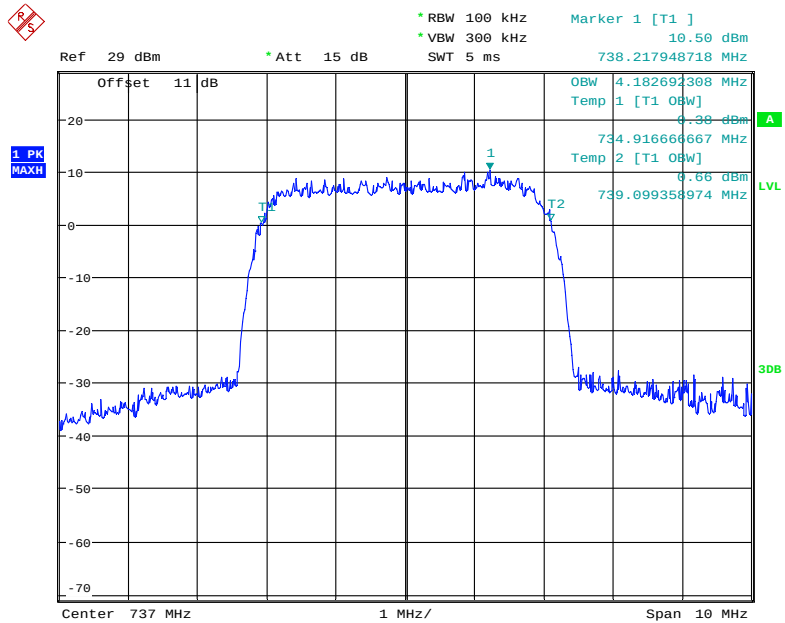


Date: 28.JAN.2021 17:01:44

Downlink, 751.5MHz-CDMA (Input)

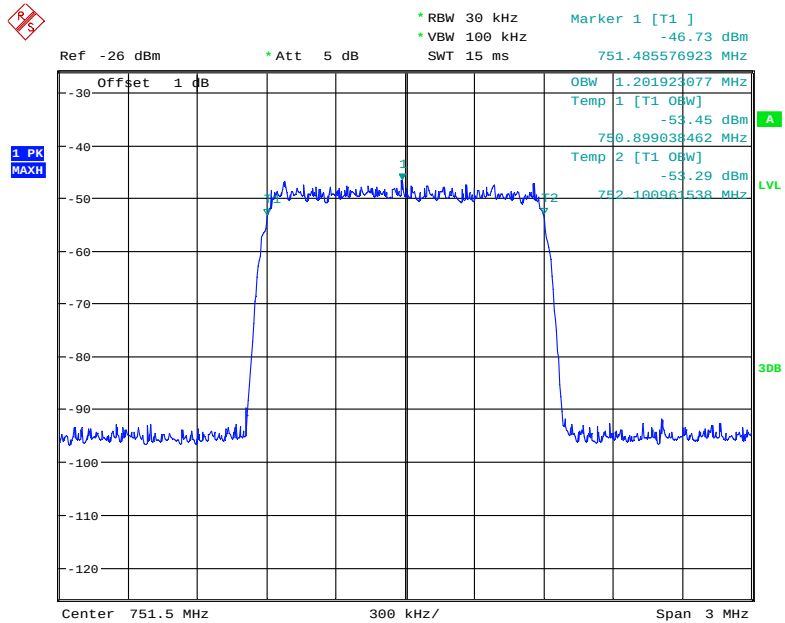


Date: 28.JAN.2021 17:29:39

Downlink, 751.5MHz-CDMA (Output)

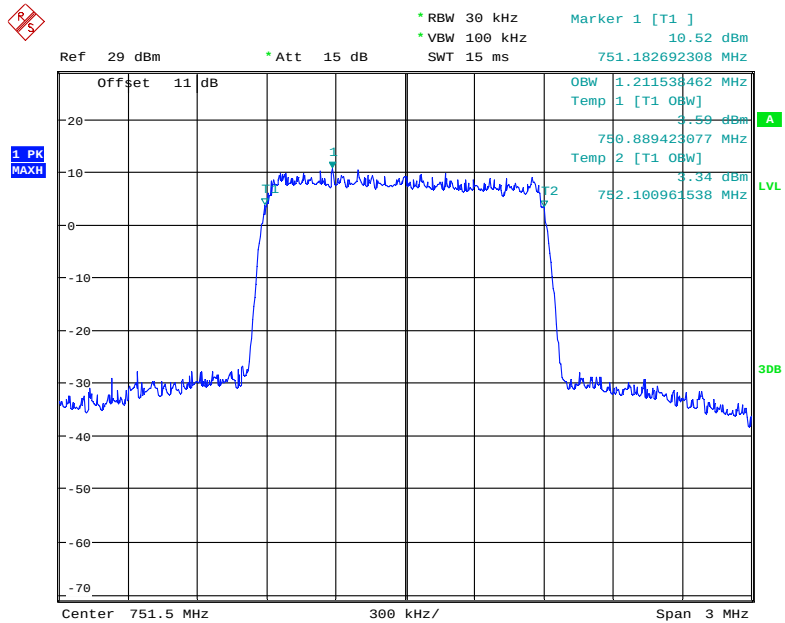


Date: 28.JAN.2021 16:57:32

Downlink, 751.5MHz-GSM (Input)

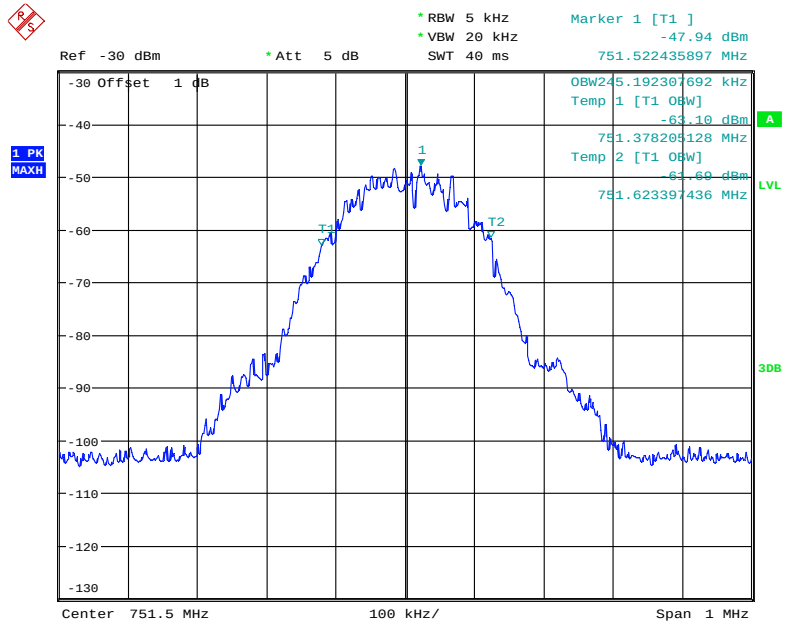


Date: 28.JAN.2021 17:38:08

Downlink, 751.5MHz-GSM (Output)

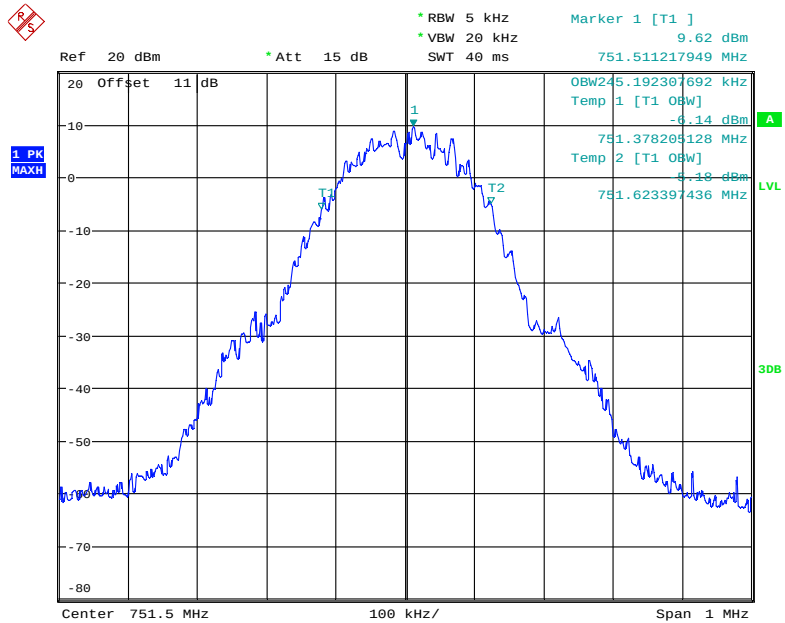


Date: 28.JAN.2021 17:03:14

Downlink, 751.5MHz-WCDMA (Input)

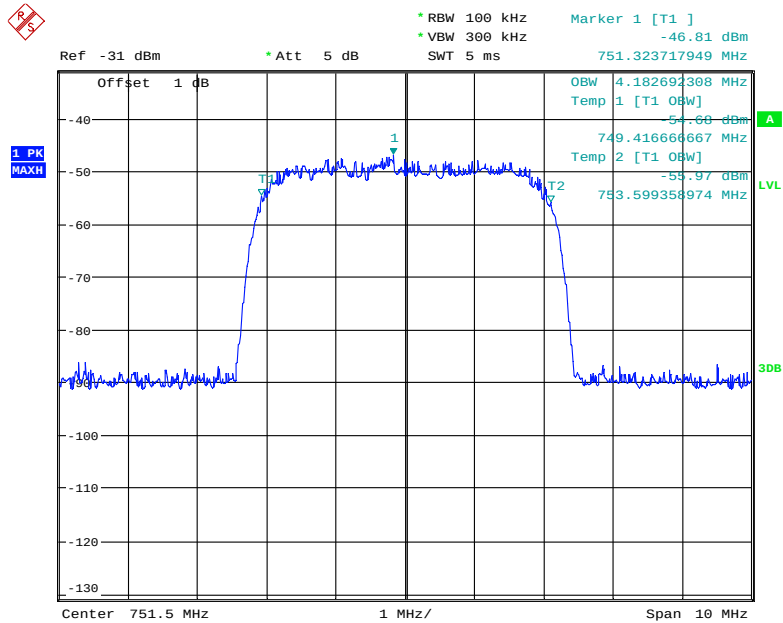

Date: 28.JAN.2021 17:28:09

Downlink, 751.5MHz-WCDMA (Output)

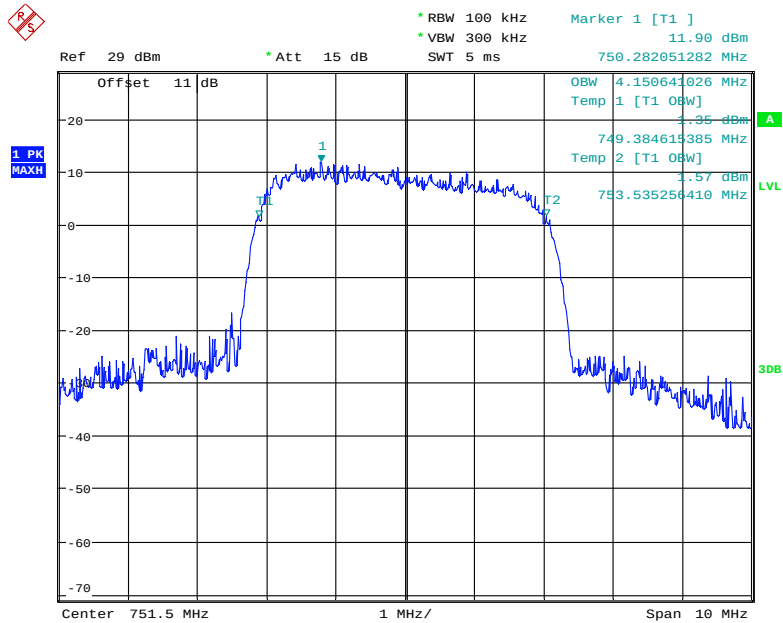

Date: 28.JAN.2021 17:02:14

§ 20.21(e)(8)(ii)(A) & §20.21(e)(4) - OSCILLATION DETECTION

Applicable Standards

Rule paragraph(s): § 20.21(e)(8)(ii)(A) Anti-Oscillation, §20.21(e)(4) Self-monitoring

For this measurement two EUTs will be permitted, one operating in a normal mode and the second operating in a test mode that is capable of disabling the uplink inactivity squelching and or a reduction of the time between restarts to 5 seconds. This will greatly decrease the test time required.

NOTE — Consumer boosters certified as direct connection mobile boosters having gain of less than or equal to 15 dB are exempt from compliance to testing procedures in 7.11.3 and 7.11.4.

Test Procedure

According to KDB 935210 D03 Signal Booster Measurements v04, §7.11.2 Oscillation restart tests and §7.11.3 Test procedure for measuring oscillation mitigation or shutdown

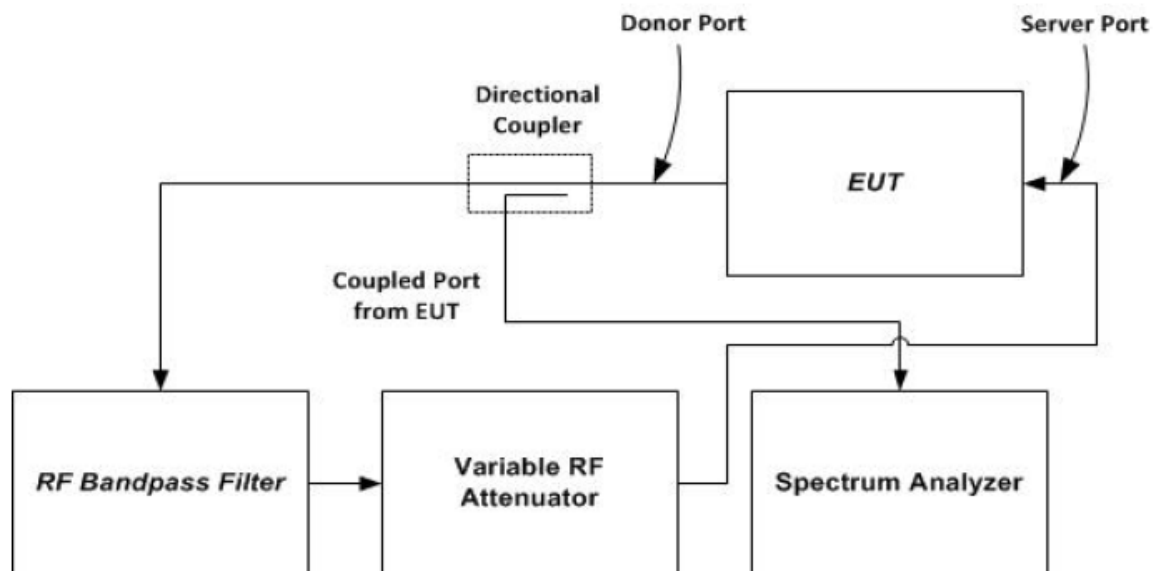


Figure 7 – Oscillation detection instrumentation test setup

Test Data

Environmental Conditions

Temperature:	26.3 °C
Relative Humidity:	53 %
ATM Pressure:	101.1 kPa

The testing was performed by Jacob Kong on 2021-01-29.

Test Result: Pass

Please refer to following table.

Oscillation Restart Time:

Mode	Operation Bands	Detection Time (s)		Power level	Between restart time (s)		Number of restart		Result
		Reading	Limit	dBm	Reading	Limit	Reading	Limit	
Uplink	Lower 700	0.176	0.3	24.49	62.21	60	3	5	Pass
	Upper 700	0.192		22.90	62.26		3		Pass
	Cellular	0.096		25.44	62.04		4		Pass
	PCS	0.156		25.90	62.40		3		Pass
	AWS	0.192		24.57	62.04		3		Pass
Downlink	Lower 700	0.232	1	26.91	62.26	60	3	5	Pass
	Upper 700	0.112		28.30	62.26		3		Pass
	Cellular	0.080		23.77	62.04		3		Pass
	PCS	0.153		17.24	62.26		3		Pass
	AWS	0.200		25.85	61.82		3		Pass

Oscillation Mitigation or Shutdown:

Mode	Operation Band	Max gain dB	Isolation dB	Difference dB	Limit dB	Result
Uplink	Lower 700	63	+5	3.89	12.00	Pass
			+4	4.41	12.00	Pass
			+3	5.35	12.00	Pass
			+2	6.21	12.00	Pass
			+1	6.43	12.00	Pass
			+0	7.18	12.00	Pass
			-1	8.14	12.00	Pass
			-2	9.35	12.00	Pass
			-3	10.35	12.00	Pass
			-4	12.15	12.00	Pass
			-5	/	12.00	Pass
	Upper 700	64	+5	4.27	12.00	Pass
			+4	5.30	12.00	Pass
			+3	6.02	12.00	Pass
			+2	6.38	12.00	Pass
			+1	7.07	12.00	Pass
			+0	7.62	12.00	Pass
			-1	8.12	12.00	Pass
			-2	8.79	12.00	Pass
			-3	9.46	12.00	Pass
			-4	10.56	12.00	Pass
			-5	11.76	12.00	Pass
	Cellular	64	+5	5.44	12.00	Pass
			+4	6.18	12.00	Pass
			+3	7.13	12.00	Pass
			+2	7.19	12.00	Pass
			+1	8.12	12.00	Pass
			+0	8.76	12.00	Pass
			-1	9.92	12.00	Pass
			-2	10.28	12.00	Pass
			-3	11.67	12.00	Pass
			-4	12.43	12.00	Pass
			-5	/	12.00	Pass
	PCS	71.9	+5	6.44	12.00	Pass
			+4	7.10	12.00	Pass
			+3	7.76	12.00	Pass
			+2	8.67	12.00	Pass
			+1	8.96	12.00	Pass
			+0	10.91	12.00	Pass
			-1	12.03	12.00	Pass
			-2	/	12.00	Pass
			-3	/	12.00	Pass
			-4	/	12.00	Pass
			-5	/	12.00	Pass


Mode	Operation Band	Max gain	Isolation	Difference	Limit	Result
		dB	dB	dB	dB	
Uplink	AWS	71.2	+5	6.69	12.00	Pass
			+4	7.44	12.00	Pass
			+3	8.24	12.00	Pass
			+2	9.02	12.00	Pass
			+1	9.51	12.00	Pass
			+0	10.27	12.00	Pass
			-1	11.44	12.00	Pass
			-2	12.12	12.00	Pass
			-3	/	12.00	Pass
			-4	/	12.00	Pass
			-5	/	12.00	Pass
Downlink	Lower 700	63.23	+5	5.04	12.00	Pass
			+4	6.13	12.00	Pass
			+3	7.03	12.00	Pass
			+2	8.03	12.00	Pass
			+1	8.64	12.00	Pass
			+0	9.65	12.00	Pass
			-1	11.02	12.00	Pass
			-2	12.21	12.00	Pass
			-3	/	12.00	Pass
			-4	/	12.00	Pass
			-5	/	12.00	Pass
	Upper 700	63.20	+5	5.91	12.00	Pass
			+4	6.47	12.00	Pass
			+3	6.57	12.00	Pass
			+2	7.34	12.00	Pass
			+1	8.31	12.00	Pass
			+0	9.07	12.00	Pass
			-1	10.43	12.00	Pass
			-2	11.25	12.00	Pass
			-3	12.30	12.00	Pass
			-4	/	12.00	Pass
			-5	/	12.00	Pass
	Cellular	62.77	+5	5.69	12.00	Pass
			+4	6.32	12.00	Pass
			+3	6.86	12.00	Pass
			+2	7.28	12.00	Pass
			+1	7.76	12.00	Pass
			+0	8.23	12.00	Pass
			-1	6.93	12.00	Pass
			-2	7.93	12.00	Pass
			-3	8.56	12.00	Pass
			-4	9.23	12.00	Pass
			-5	9.52	12.00	Pass

Mode	Operation Band	Max gain	Isolation	Difference	Limit	Result
		dB	dB	dB	dB	
Downlink	PCS	71.84	+5	6.15	12.00	Pass
			+4	7.82	12.00	Pass
			+3	8.36	12.00	Pass
			+2	9.42	12.00	Pass
			+1	10.76	12.00	Pass
			+0	11.30	12.00	Pass
			-1	12.37	12.00	Pass
			-2	/	12.00	Pass
			-3	/	12.00	Pass
			-4	/	12.00	Pass
			-5	/	12.00	Pass
	AWS	71.19	+5	7.71	12.00	Pass
			+4	7.45	12.00	Pass
			+3	8.21	12.00	Pass
			+2	8.79	12.00	Pass
			+1	9.45	12.00	Pass
			+0	10.13	12.00	Pass
			-1	11.23	12.00	Pass
			-2	12.45	12.00	Pass
			-3	/	12.00	Pass
			-4	/	12.00	Pass
			-5	/	12.00	Pass


Note: The measured difference exceeds the limit for a period of less than 300 seconds before device mitigate and shut down. The maximum recorded time prior to mitigate or shutdown was 120s.

**Oscillation restart tests:
Uplink**

Cellular Band

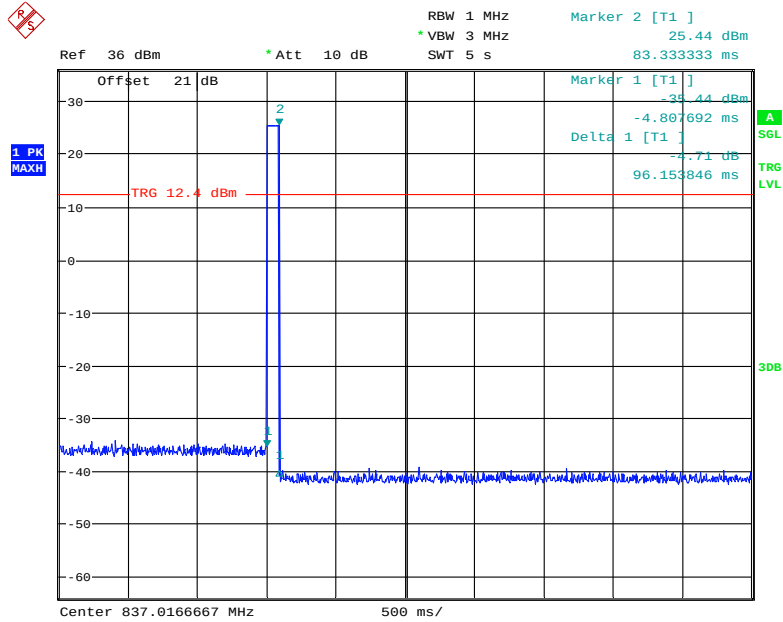


Date: 29.JAN.2021 11:28:54

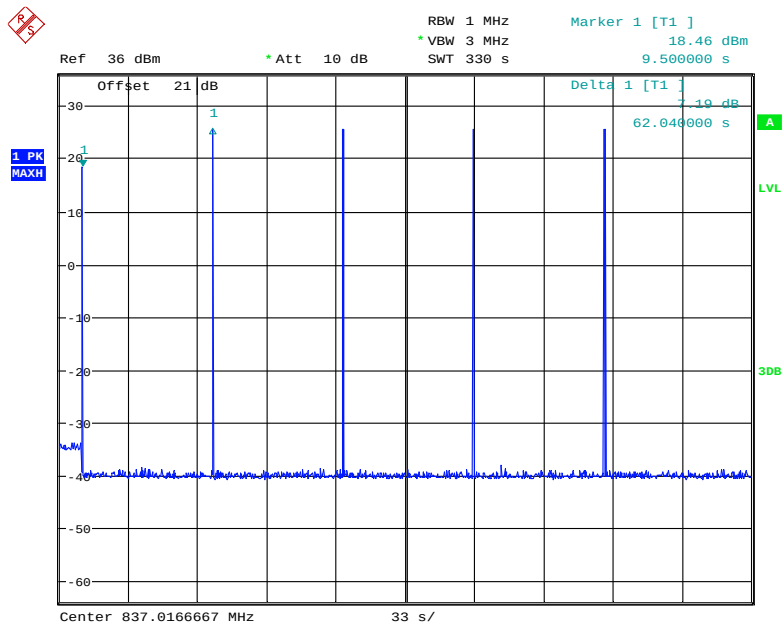


Date: 29.JAN.2021 11:35:32

PCS Band

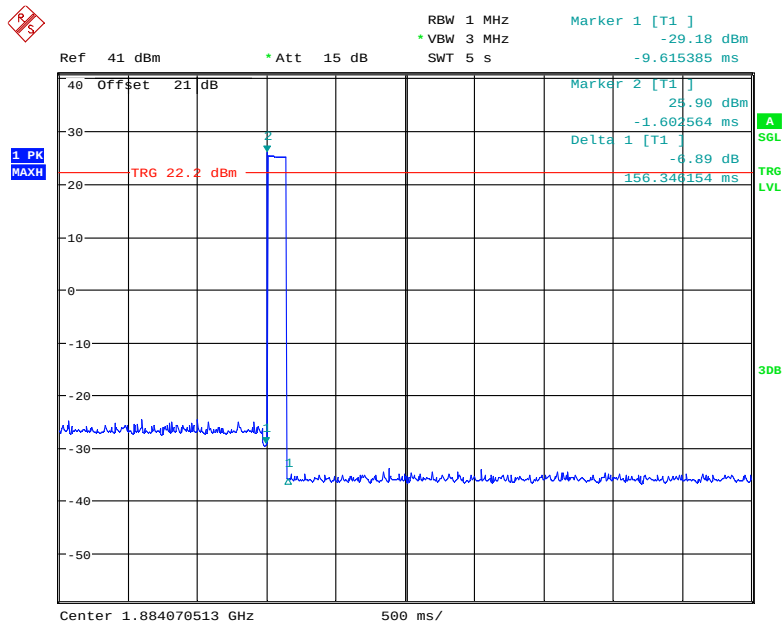


Date: 28.JAN.2021 15:48:22

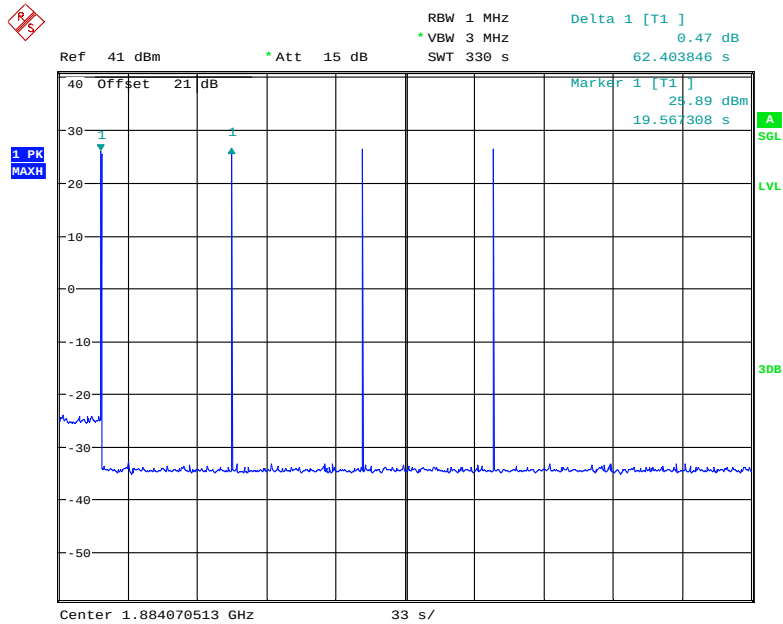


Date: 28.JAN.2021 15:56:49

AWS Band

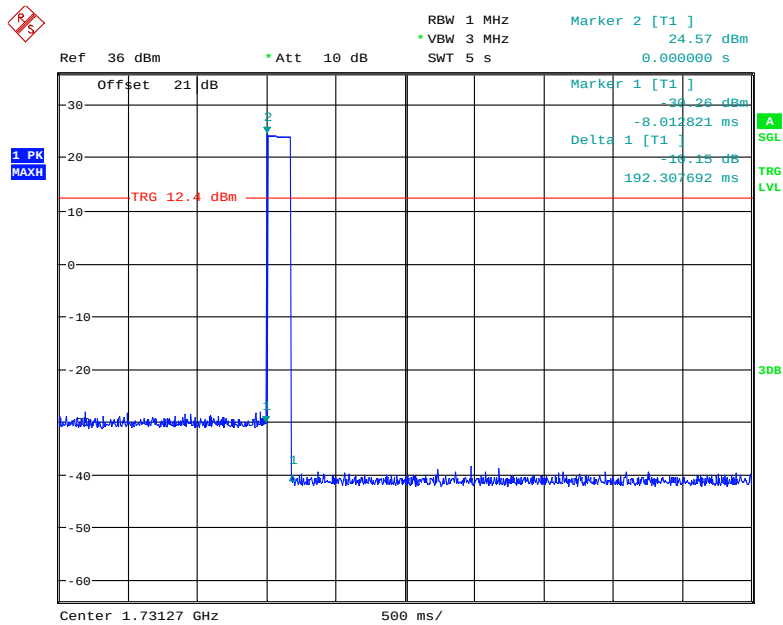


Date: 29.JAN.2021 11:45:57

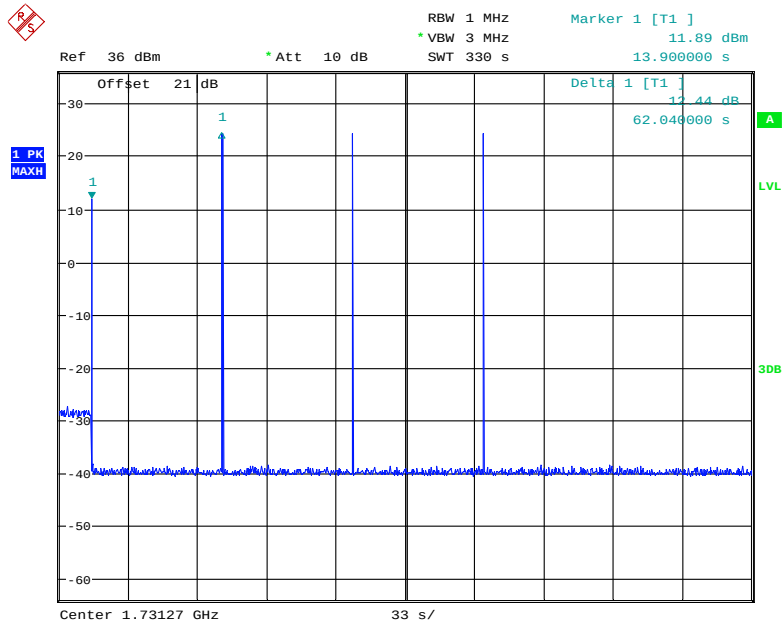


Date: 29.JAN.2021 11:52:10

Lower 700MHz

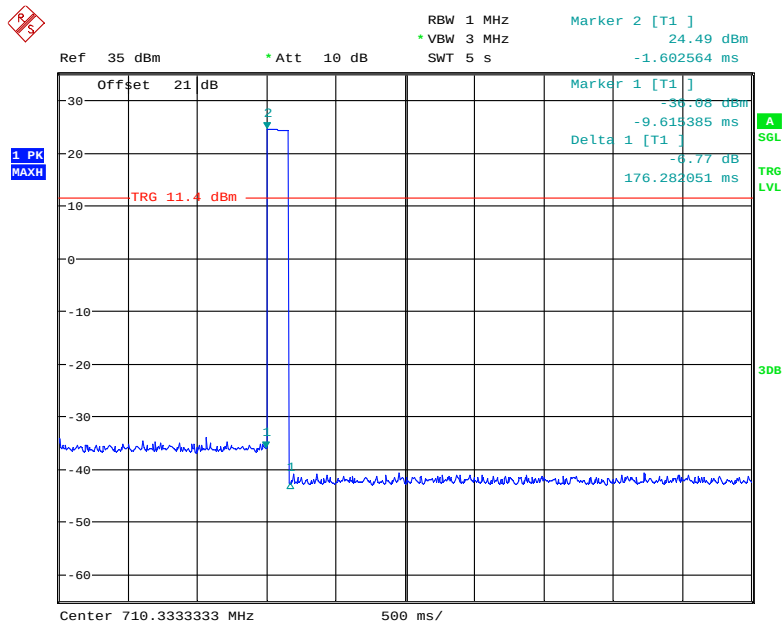


Date: 29.JAN.2021 10:44:37

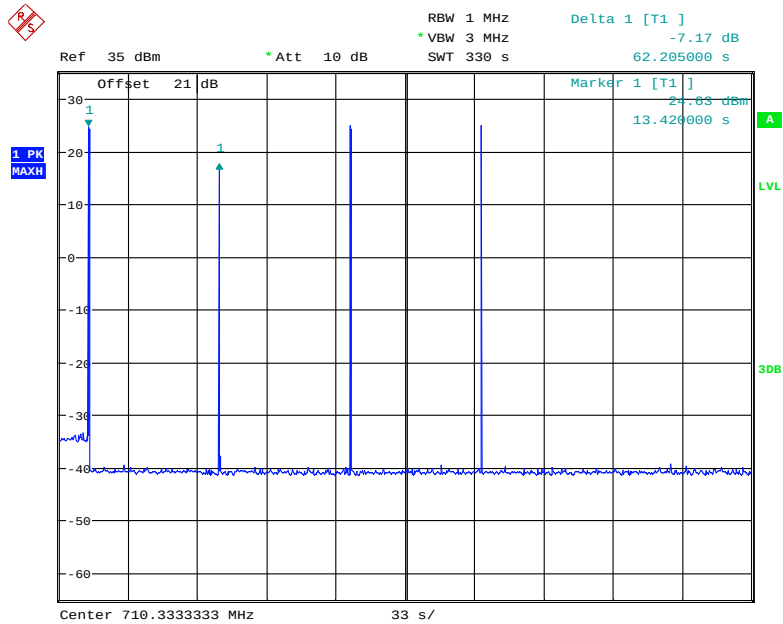


Date: 29.JAN.2021 10:53:45

Upper 700MHz

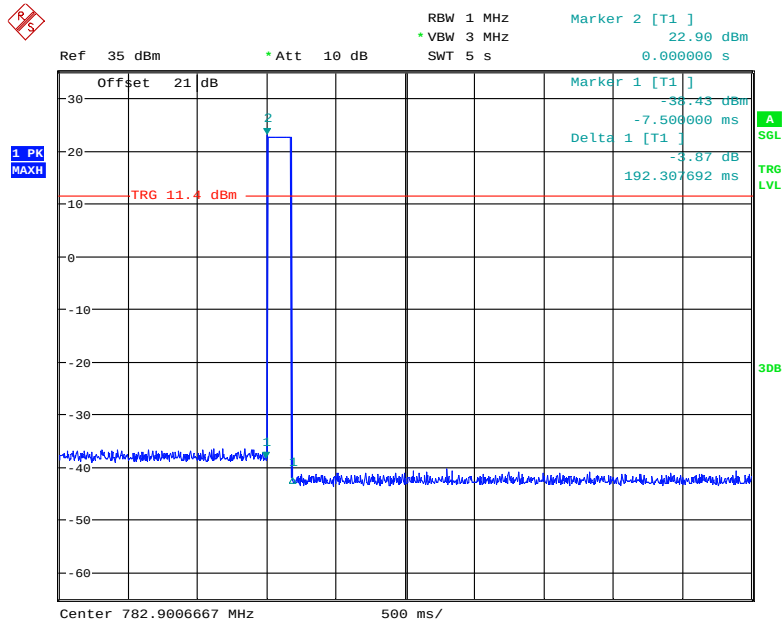


Date: 29.JAN.2021 11:11:31

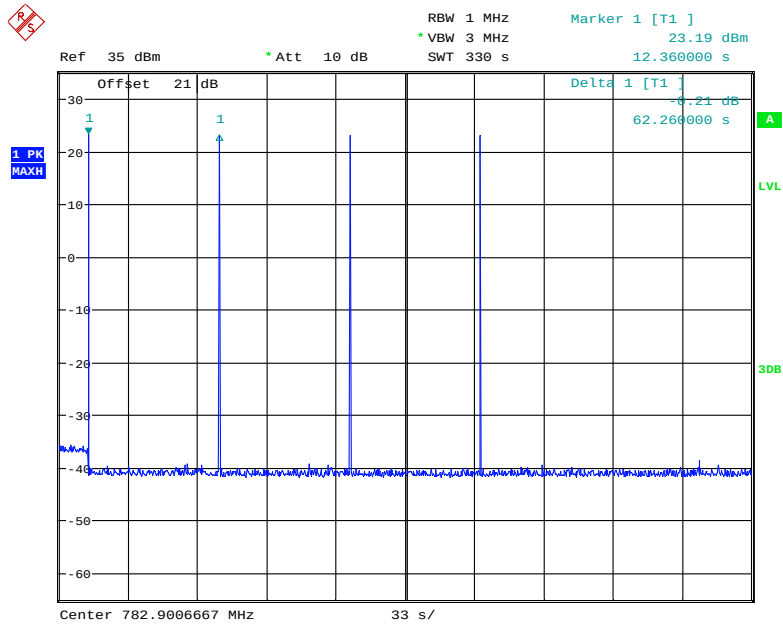


Date: 29.JAN.2021 11:18:42

Downlink

Cellular Band

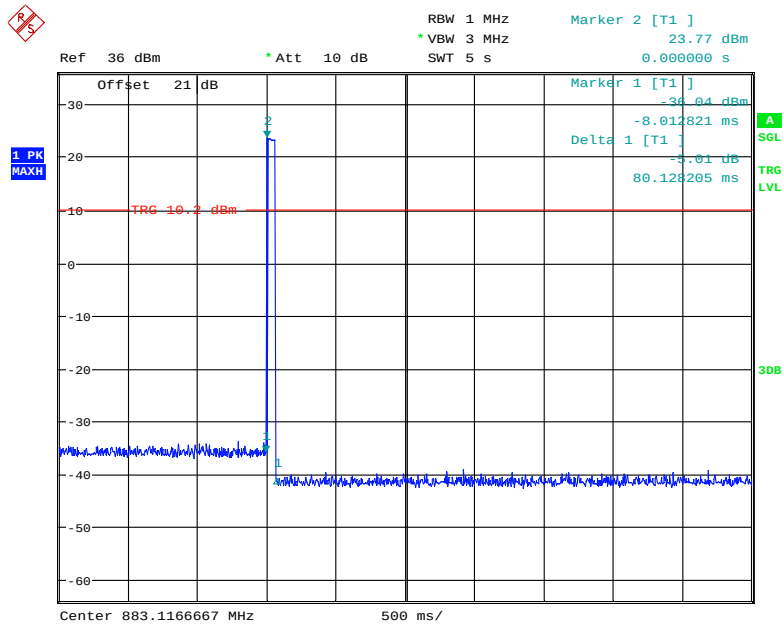


Date: 29.JAN.2021 14:02:25

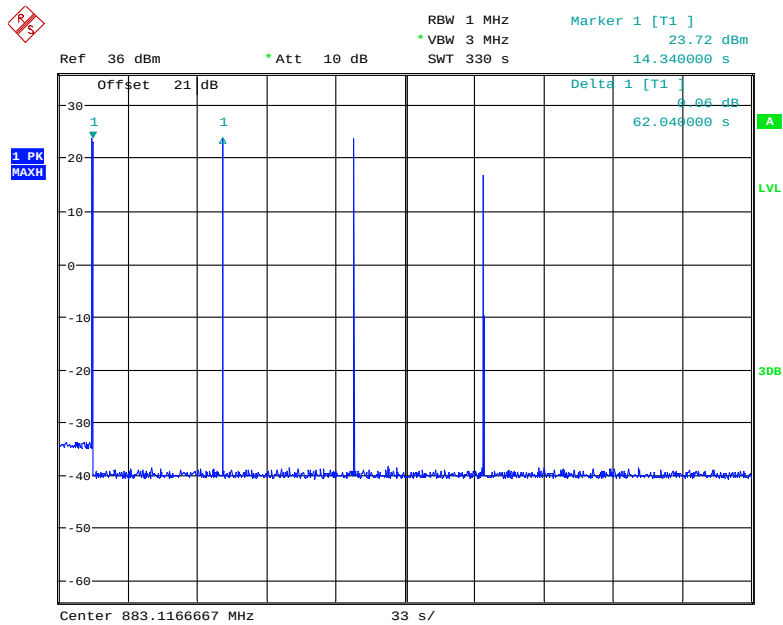


Date: 29.JAN.2021 14:08:35

PCS Band

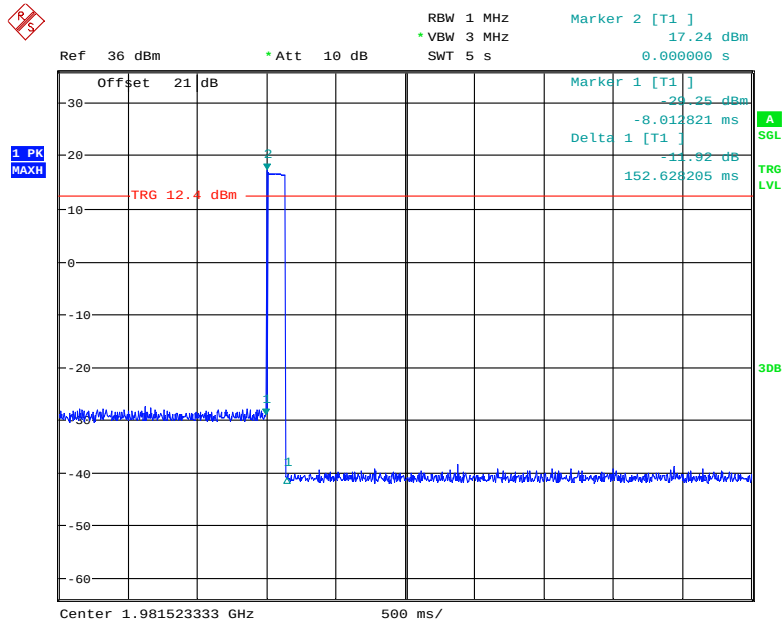


Date: 29.JAN.2021 13:29:40

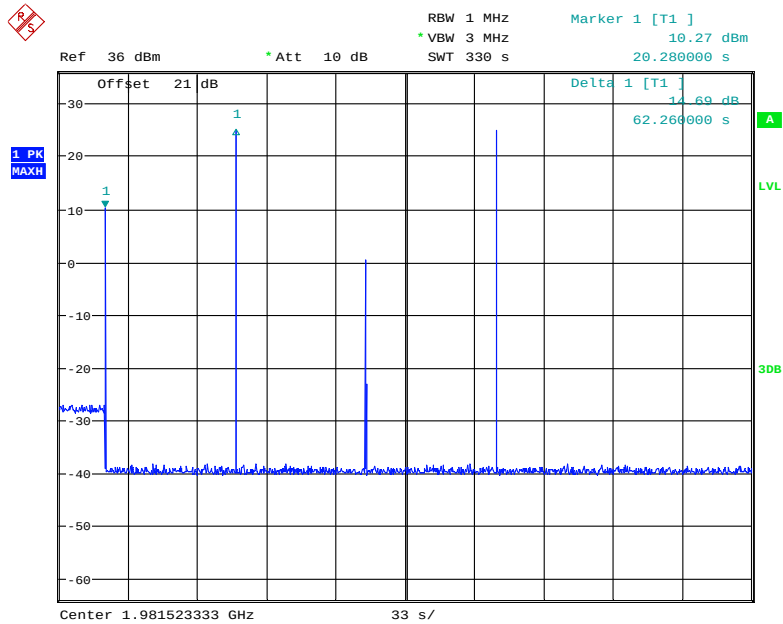


Date: 29.JAN.2021 13:35:59

AWS Band

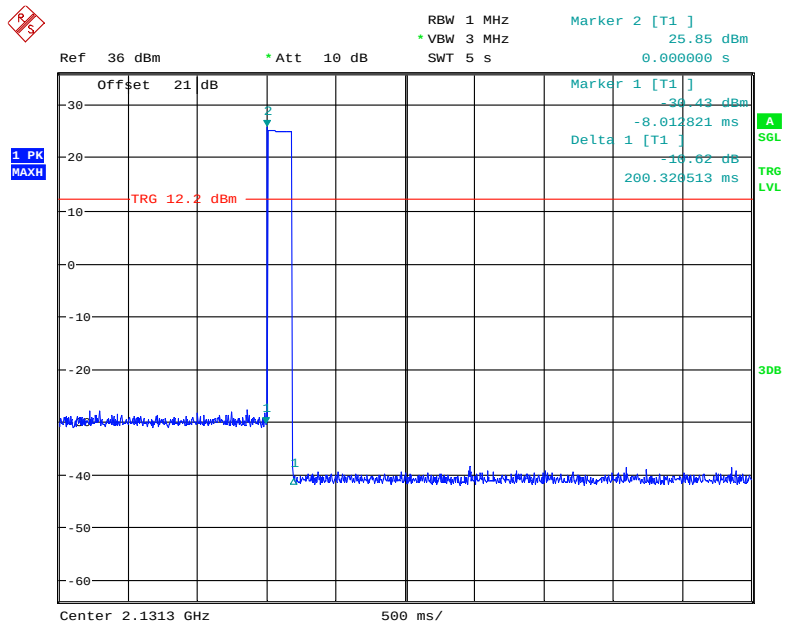


Date: 29.JAN.2021 13:46:33

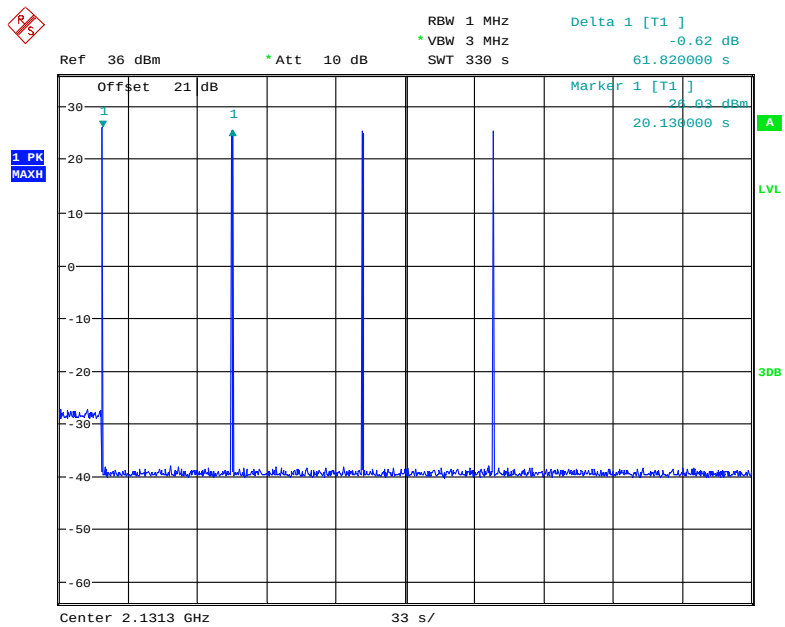


Date: 29.JAN.2021 13:52:45

Lower 700MHz

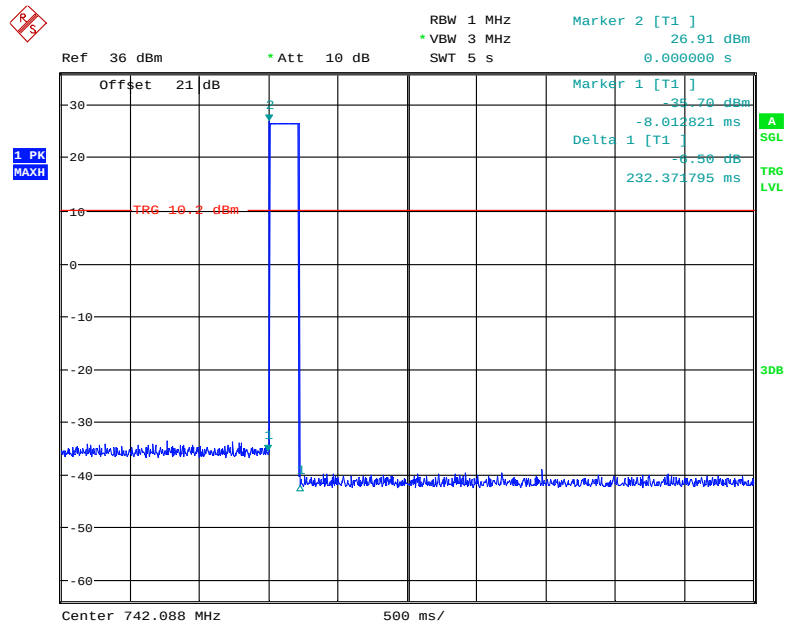


Date: 29.JAN.2021 14:17:14

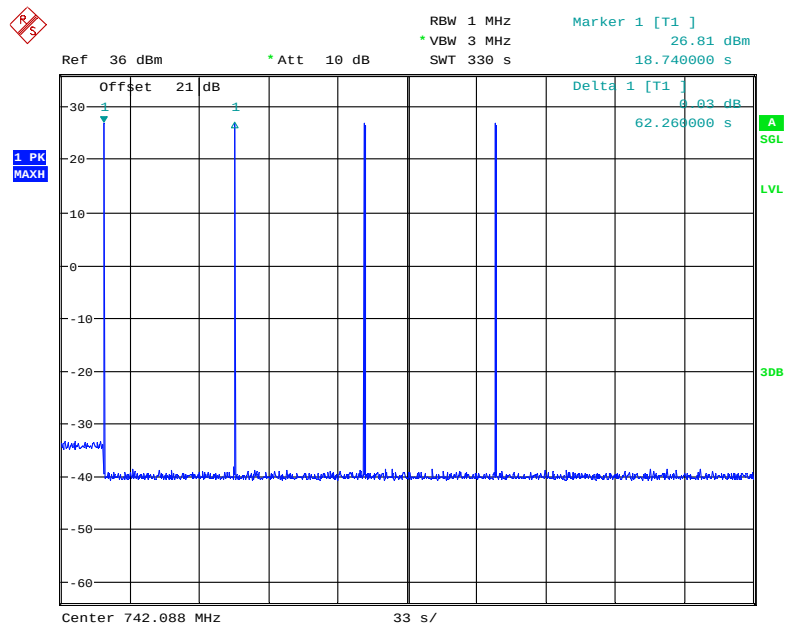


Date: 29.JAN.2021 14:23:37

Upper 700MHz

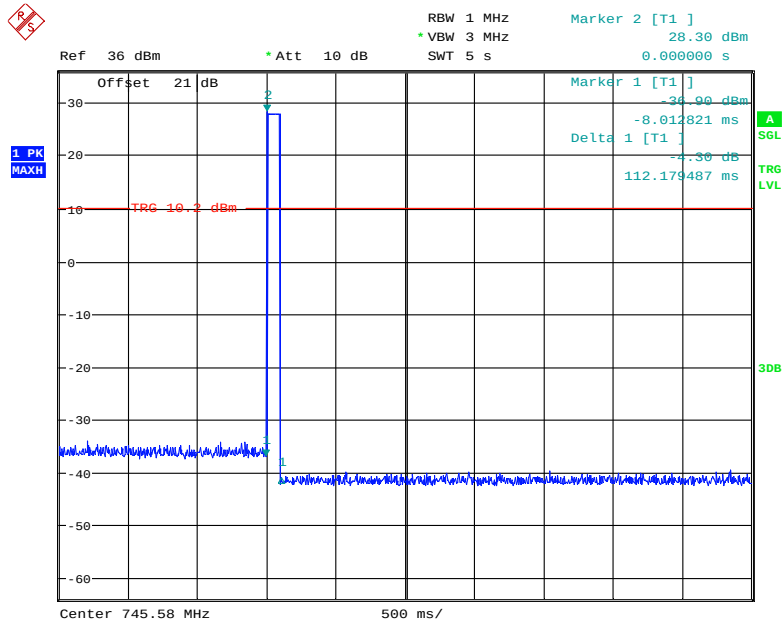

Date: 29.JAN.2021 14:33:47

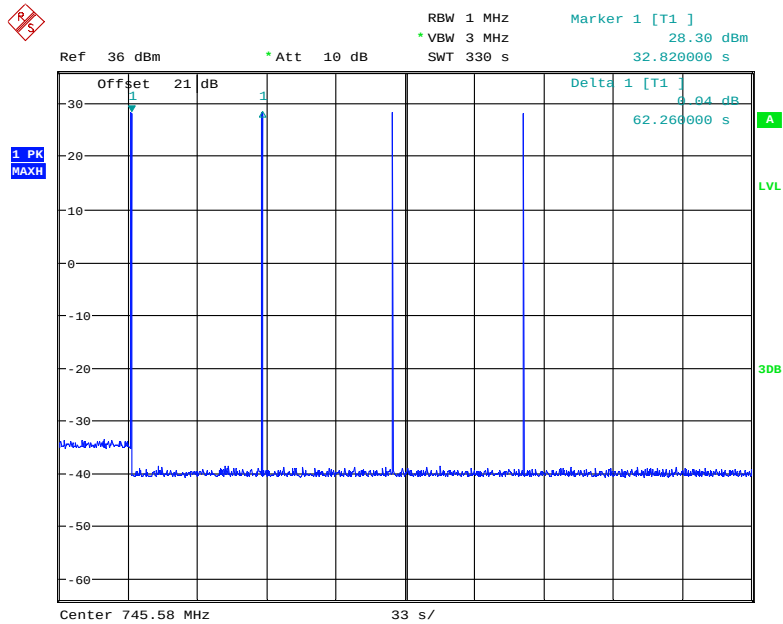

Date: 29.JAN.2021 14:40:10

§2.1051- SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Applicable Standards

FCC §2.1051 *Measurements required: Spurious emissions at antenna terminals.*

§20.21(e)(8)(i)(E): Booster out of band emissions (OOBE) shall be at least 6 dB below the FCC's mobile emission limits for the supported bands of operation. Compliance to OOBE limits will utilize high peak-to-average CMRS signal types.

§22.917 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

§24.238 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

§27.53: the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;

Test Procedure

The following procedures shall be used to demonstrate compliance to the applicable conducted spurious emissions limits as per § 2.1051.

Note: *For frequencies below 1 GHz, an RBW of 1 MHz may be used in a preliminary measurement. If non-compliant emissions are detected, a final measurement shall be made with a 100 kHz RBW. Additionally, a peak detector may also be used for the preliminary measurement. If non-compliant emissions are detected then a final measurement of these emissions shall be made with the power averaging (RMS) detector.*

- a) Connect the EUT to the test equipment as shown in **Figure 1**. Begin with the uplink output connected to the spectrum analyzer.
- b) Configure the signal generator for AWGN with a 99% occupied bandwidth of 4.1 MHz with a center frequency corresponding to the center of the CMRS band under test.
- c) Set the signal generator amplitude to the level determined in the power measurement procedure in 7.2.
- d) Turn on the signal generator RF output and measure the spurious emission power levels with an appropriate measurement instrument as follows.
 - 1) Set RBW = measurement bandwidth specified in the applicable rule section for the operational frequency band under consideration (see Annex A for relevant cross-references). Note that many of the individual rule sections permit the use of a narrower RBW (typically $\geq 1\%$ of the emission bandwidth) to enhance measurement accuracy, but the result must then be integrated over the specified measurement bandwidth.
 - 2) Set VBW = $3 \times$ RBW.
 - 3) Select the power averaging (RMS) detector. (See above note regarding the use of a peak detector for preliminary measurements.)
 - 4) Sweep time = auto-couple.
 - 5) Set the analyzer start frequency to the lowest radio frequency signal generated in the equipment, without going below 9 kHz, and the stop frequency to the lower band/block edge frequency minus 100 kHz or 1 MHz, as specified in the applicable rule part. Note that the number of measurement points in each sweep

must be $\geq (2 \times \text{span/RBW})$ which may require that the measurement range defined by the start and stop frequencies above be subdivided, depending on the available number of measurement points provided by the spectrum analyzer. Trace average at least 10 traces in power averaging (i.e., RMS) mode.

6) Use the peak marker function to identify the highest amplitude level over each measured frequency range. Record the frequency and amplitude and capture a plot for inclusion in the test report.

7) Reset the analyzer start frequency to the upper band/block edge frequency plus 100 kHz or 1 MHz, as specified in the applicable rule part, and the analyzer stop frequency to $10 \times$ the highest frequency of the fundamental emission. Note that the number of measurement points in each sweep must be $\geq (2 \times \text{span/RBW})$ which may require that the measurement range defined by the start and stop frequencies above be subdivided, depending on the available number of measurement points provided by the spectrum analyzer.

8) Use the peak marker function to identify the highest amplitude level over each of the measured frequency ranges. Record the frequency and amplitude and capture a plot for inclusion in the test report.

e) Repeat 7.6b) through 7.6d) for each supported frequency band of operation.

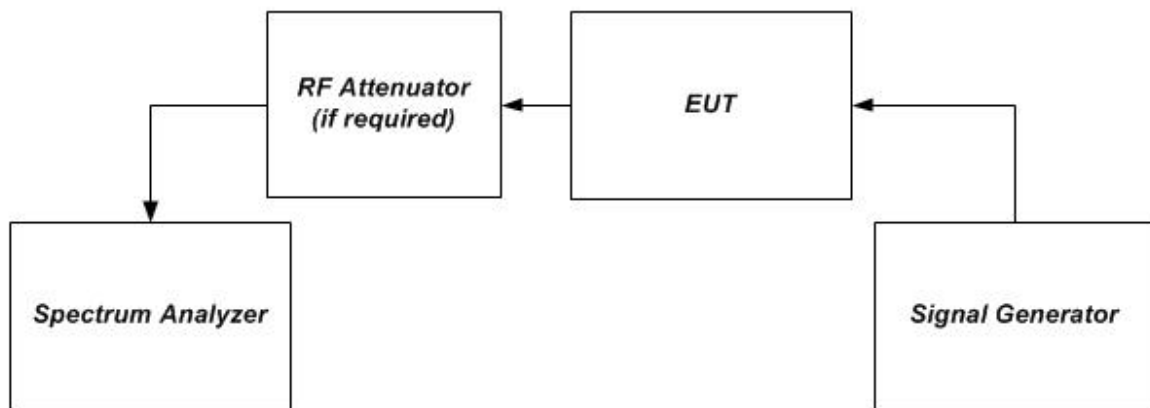


Figure 1 – Band verification test instrumentation setup

Test Data

Environmental Conditions

Temperature:	25.7 °C
Relative Humidity:	54 %
ATM Pressure:	101.0 kPa

The testing was performed by Jacob Kong on 2021-01-28.


Test Mode: Transmitting

Test Result: Pass


Please refer to the following plots.

Uplink


Cellular Band

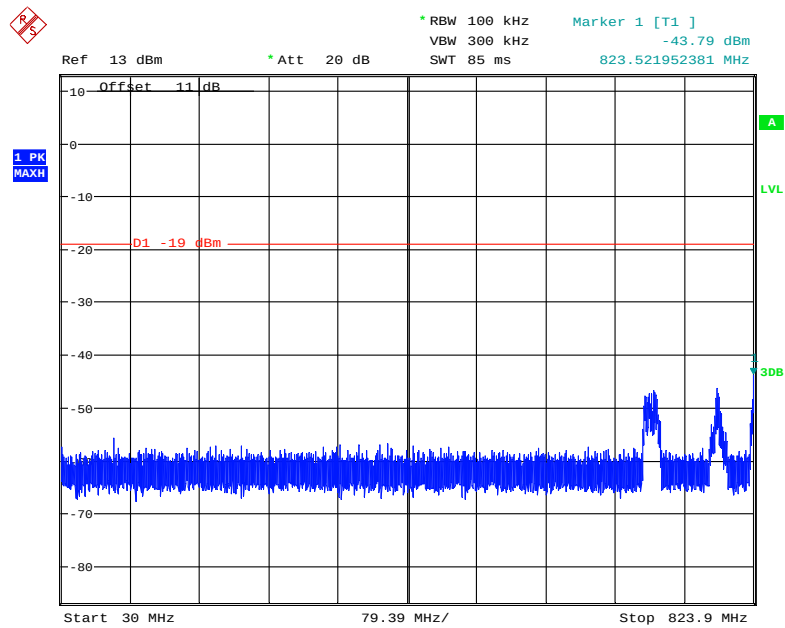

Date: 28.JAN.2021 11:44:41

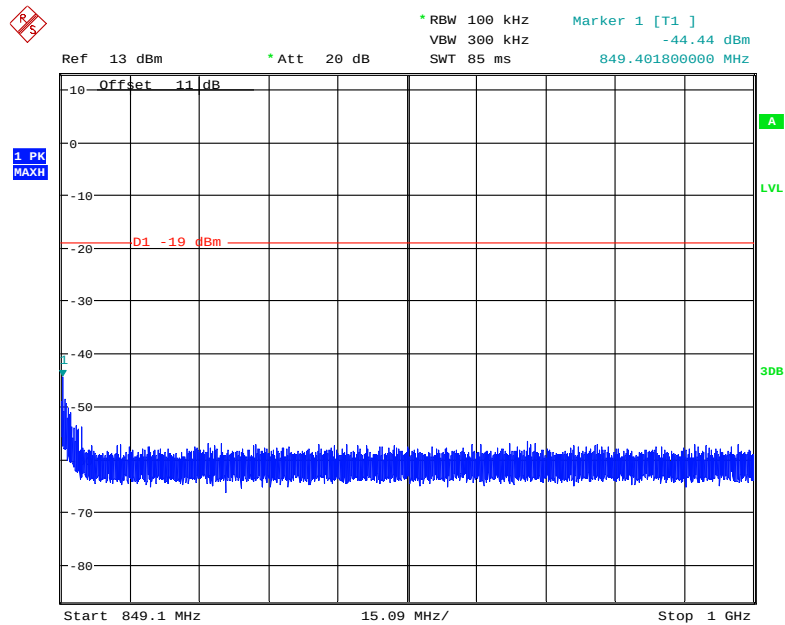


Date: 28.JAN.2021 11:45:27

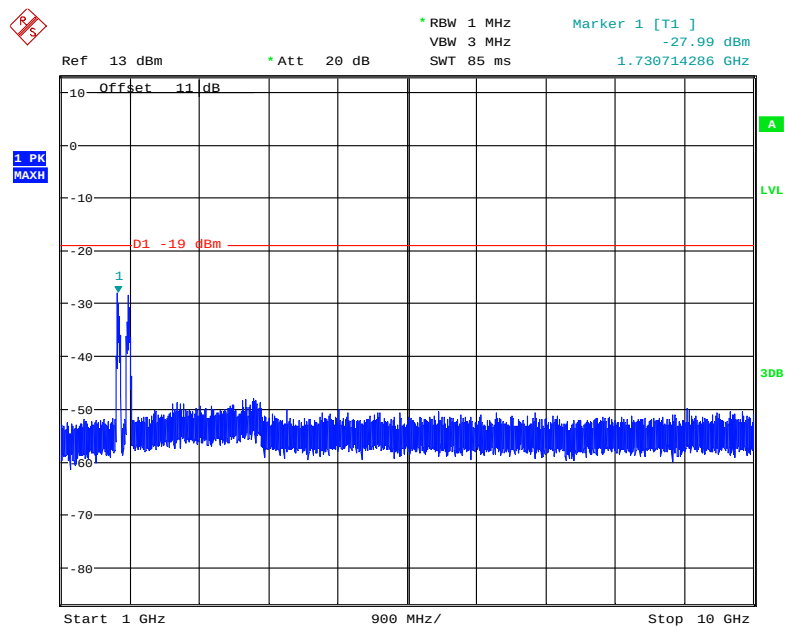


Date: 28.JAN.2021 11:44:05


PCS Band

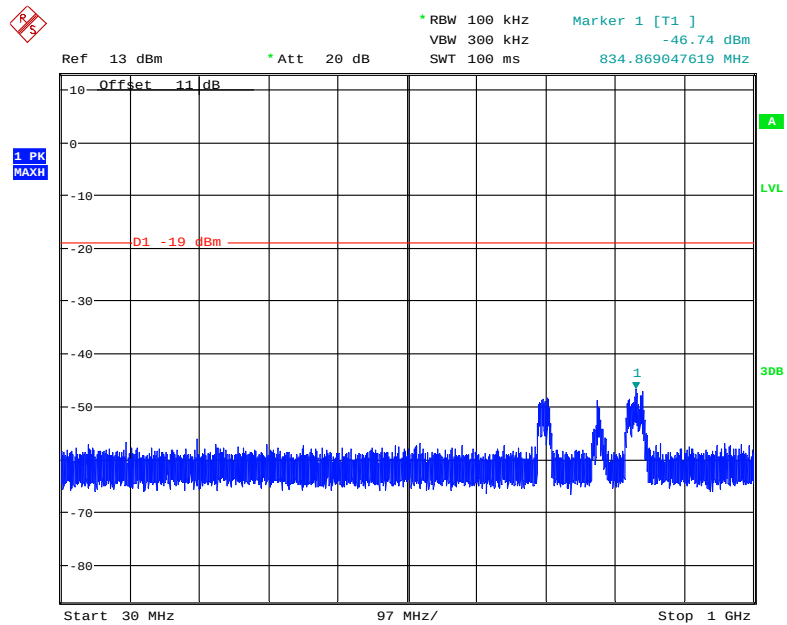

Date: 28.JAN.2021 11:41:58

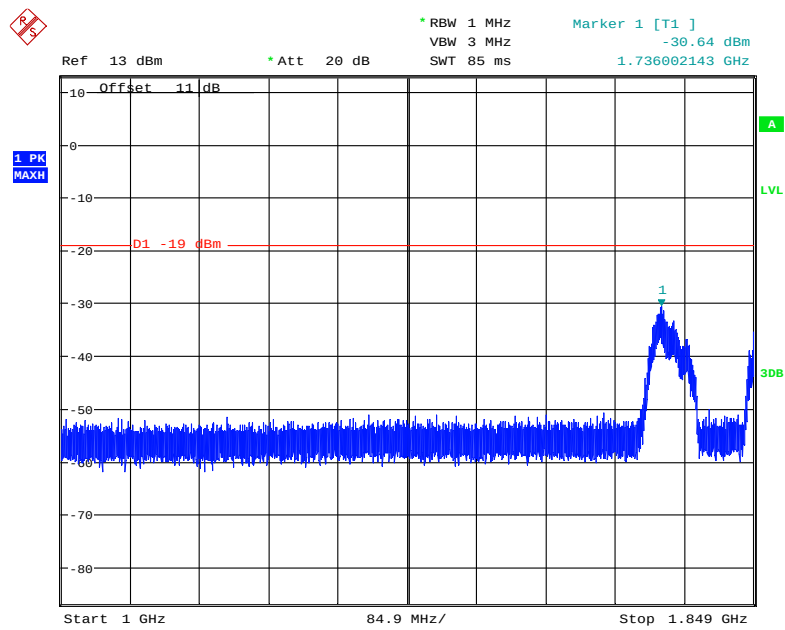


Date: 28.JAN.2021 11:41:04

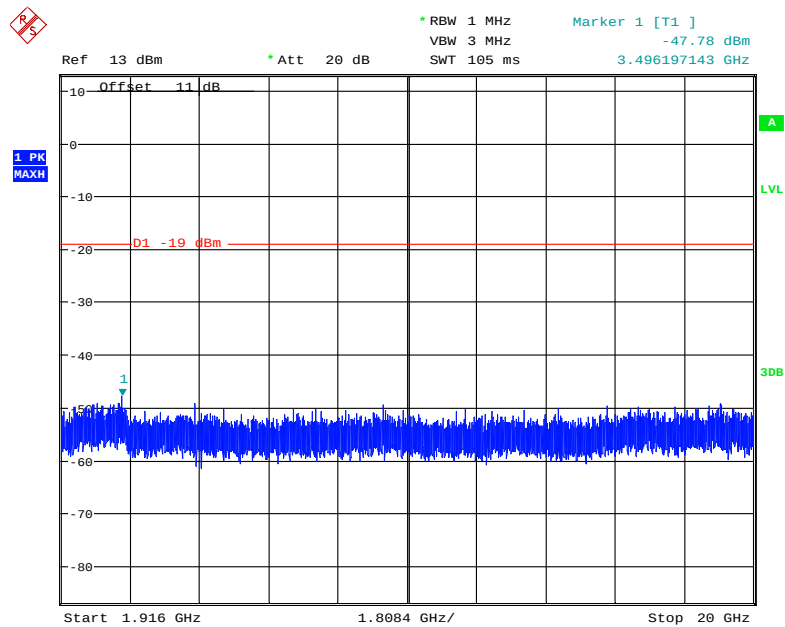


Date: 28.JAN.2021 11:41:37


AWS Band

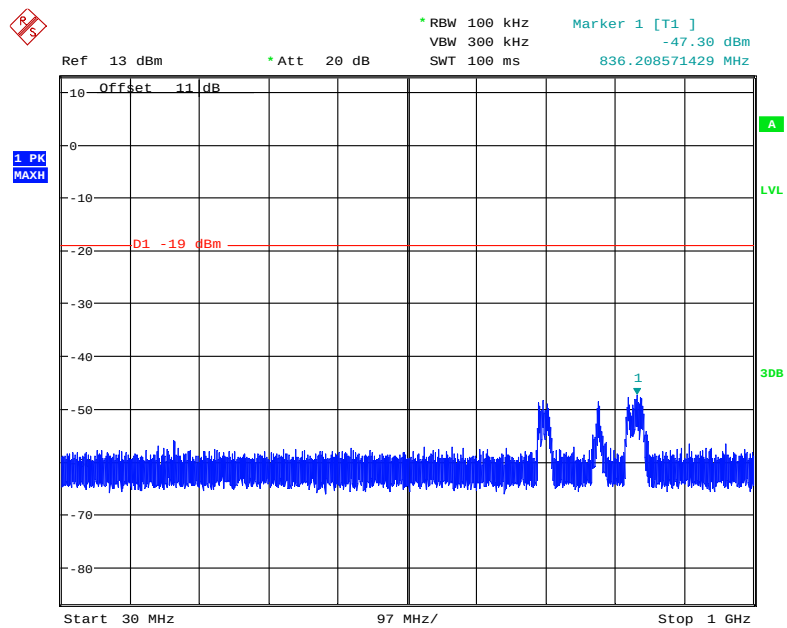

Date: 28.JAN.2021 11:42:23

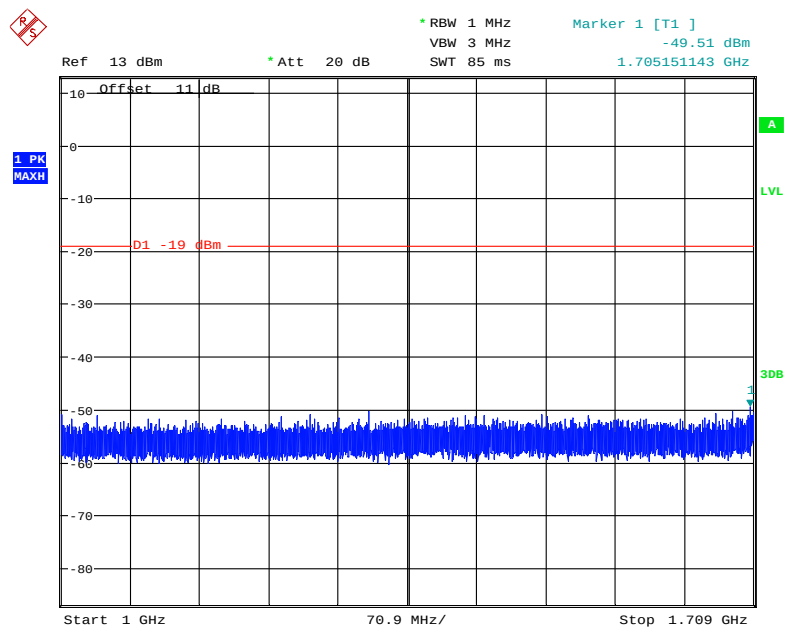


Date: 28.JAN.2021 11:42:45

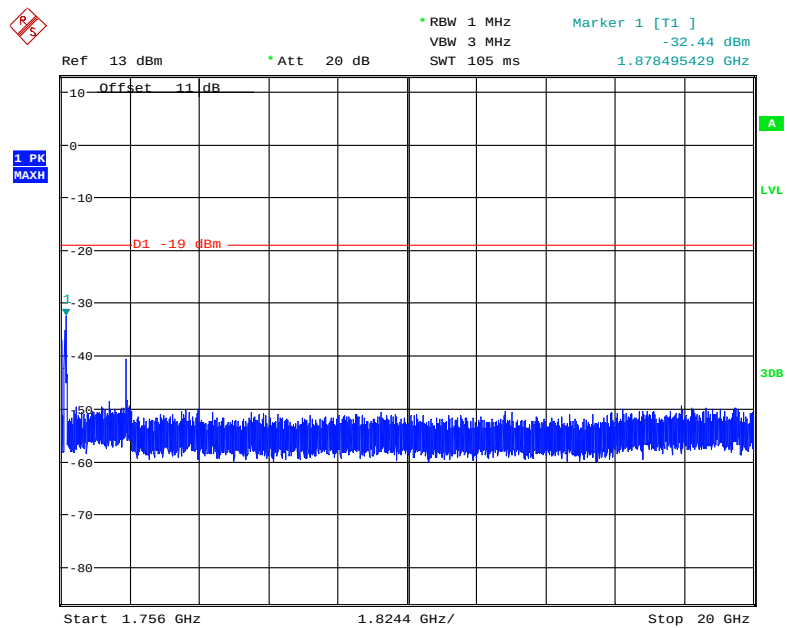


Date: 28.JAN.2021 11:43:29


Lower 700MHz

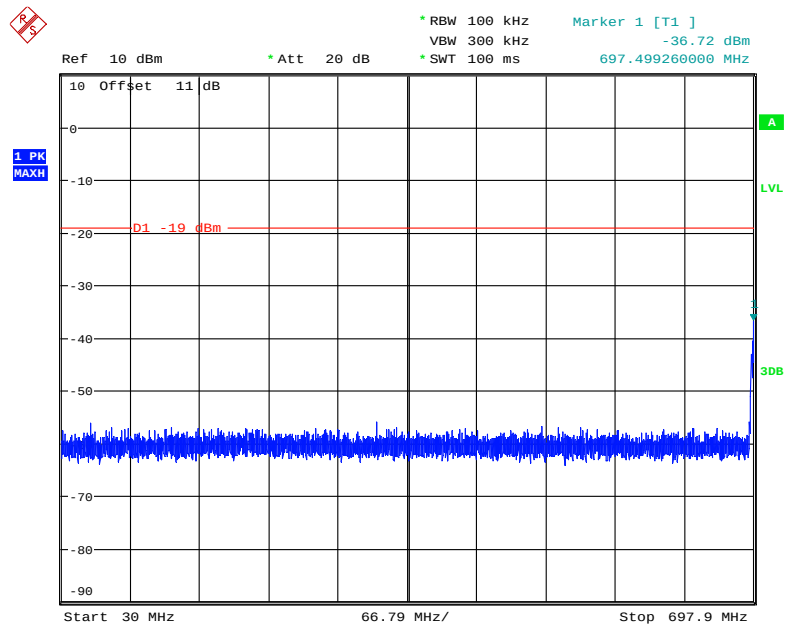

Date: 7.FEB.2021 08:54:28

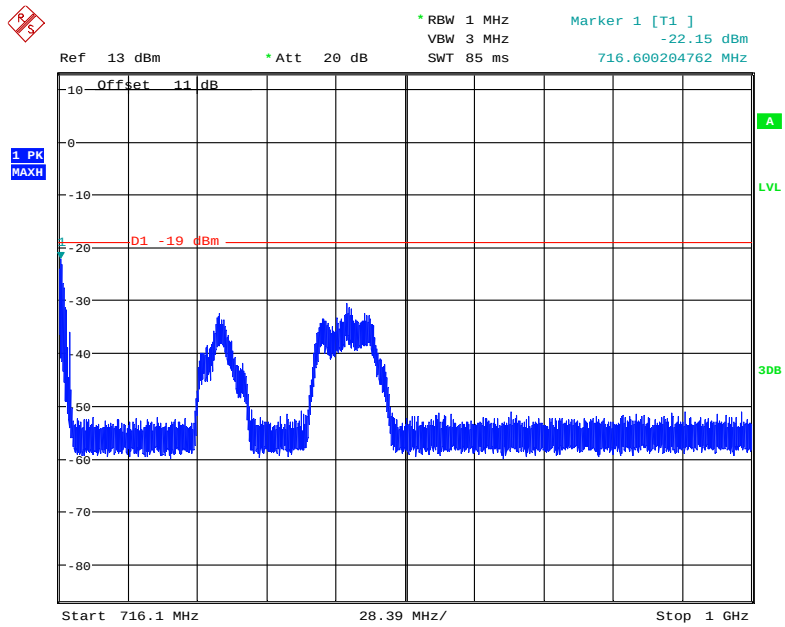


Date: 28.JAN.2021 11:51:50

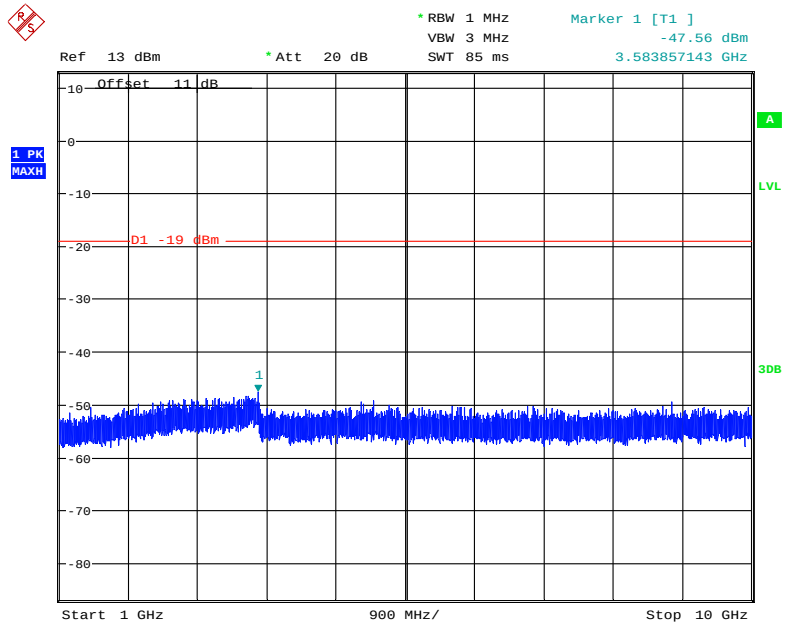


Date: 28.JAN.2021 11:50:58


Upper 700MHz

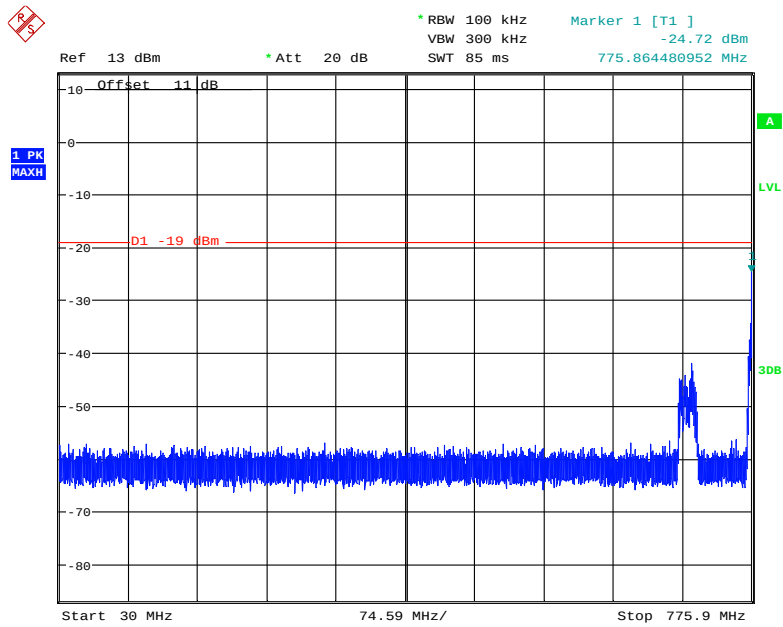

Date: 28.JAN.2021 11:47:07

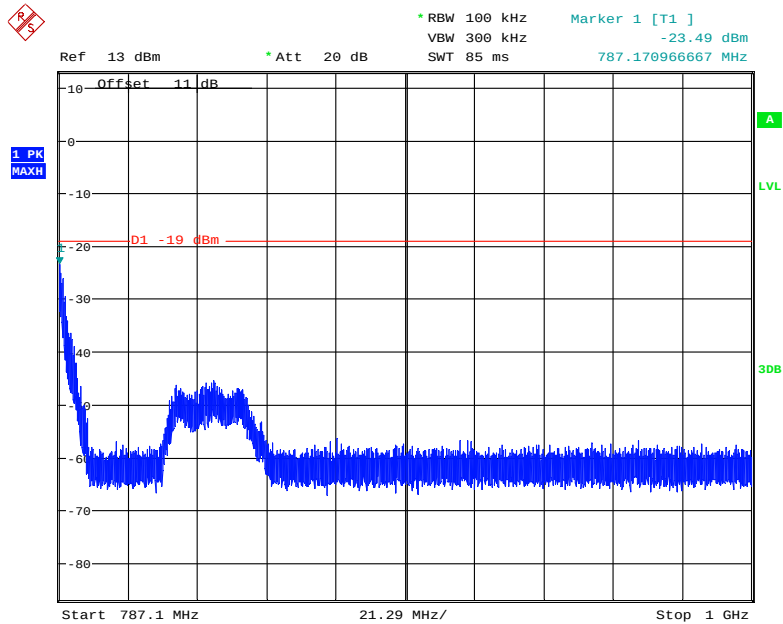


Date: 28.JAN.2021 11:46:12

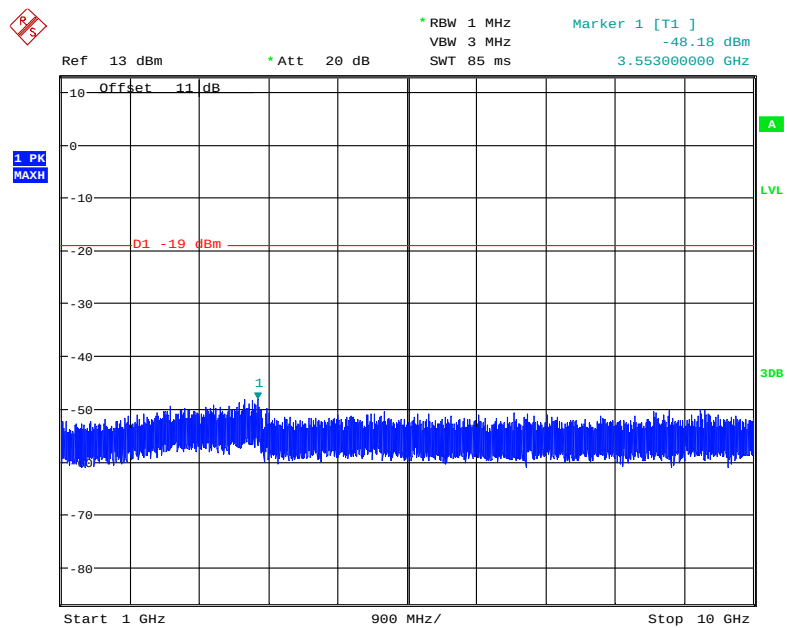


Date: 28.JAN.2021 11:49:52

Downlink


Cellular Band

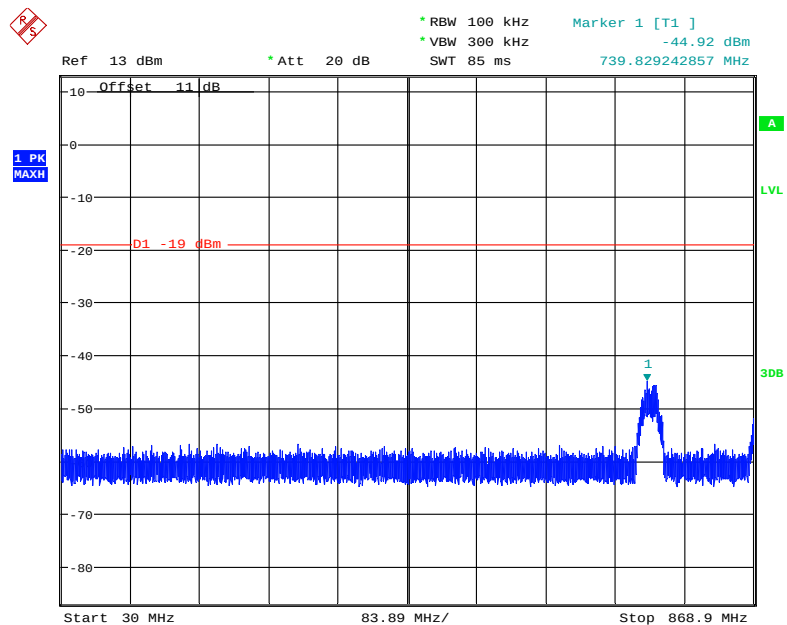

Date: 28.JAN.2021 11:23:36

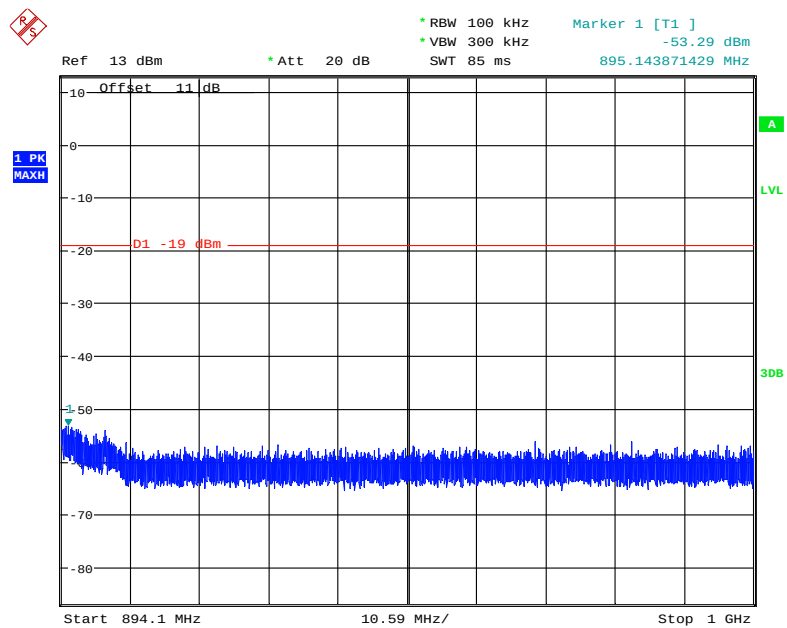


Date: 28.JAN.2021 11:22:27

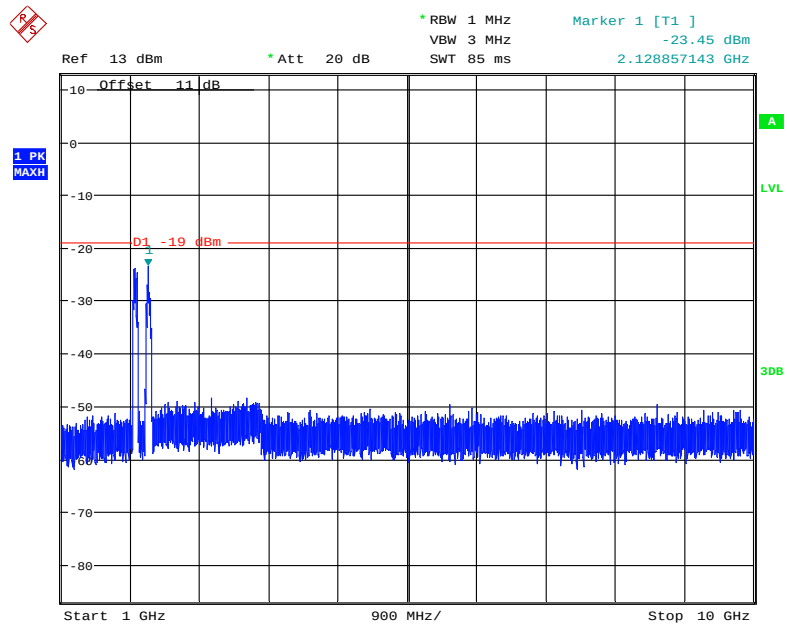


Date: 28.JAN.2021 11:37:46


PCS Band

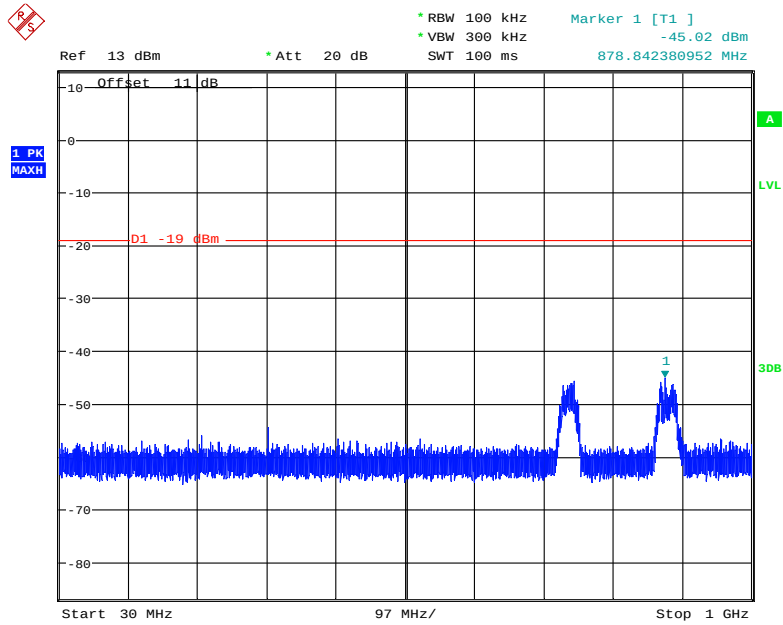

Date: 28.JAN.2021 11:26:26

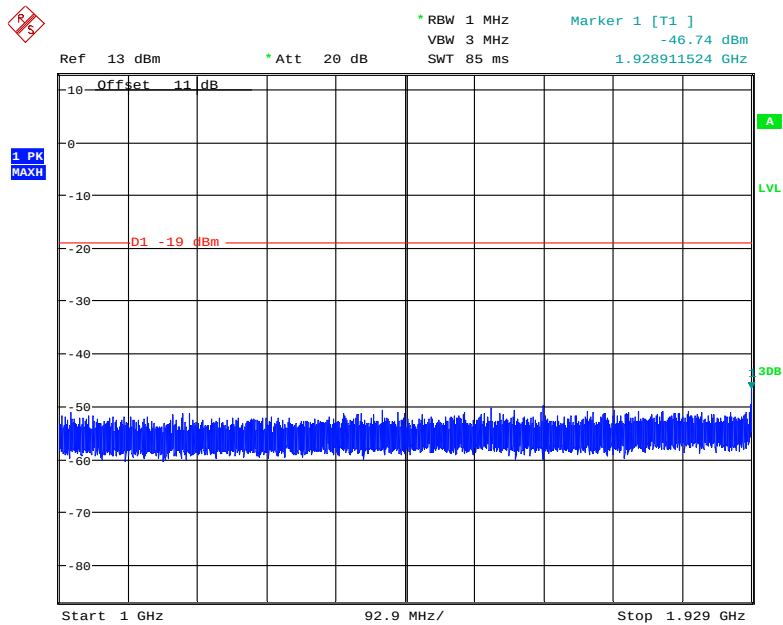


Date: 28.JAN.2021 11:39:43

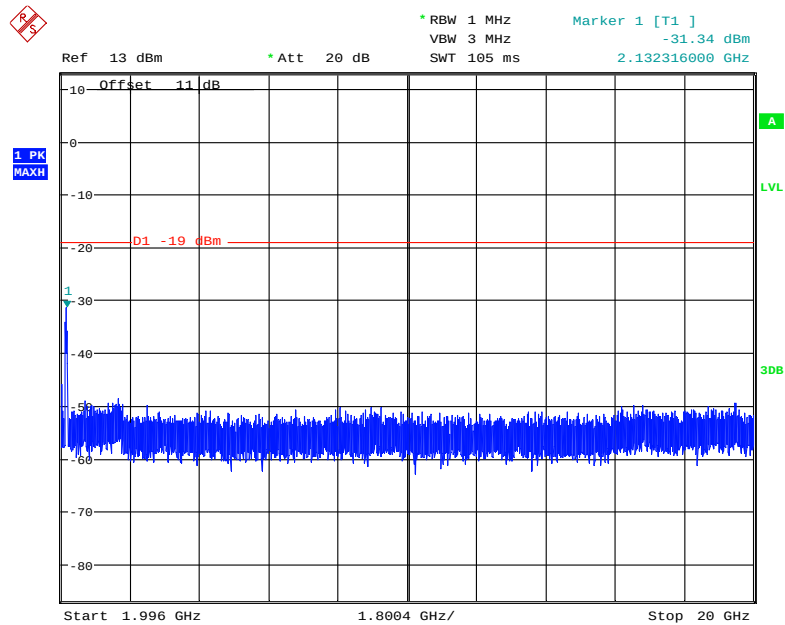


Date: 28.JAN.2021 11:39:19


AWS Band

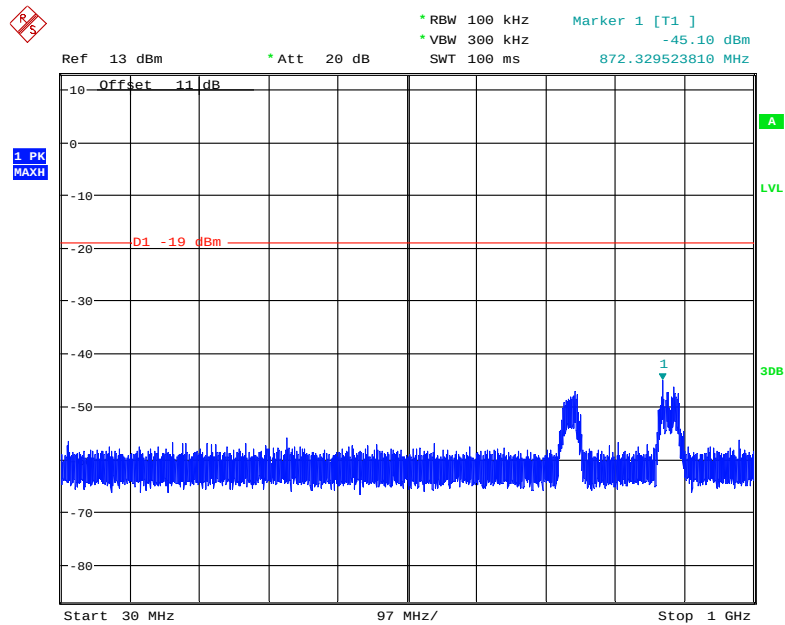

Date: 28.JAN.2021 11:24:44

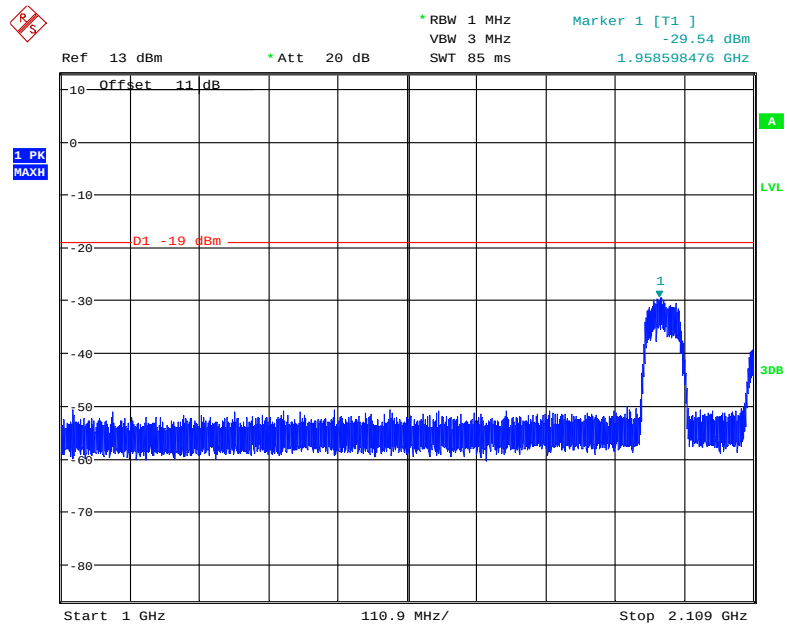


Date: 28.JAN.2021 11:38:32

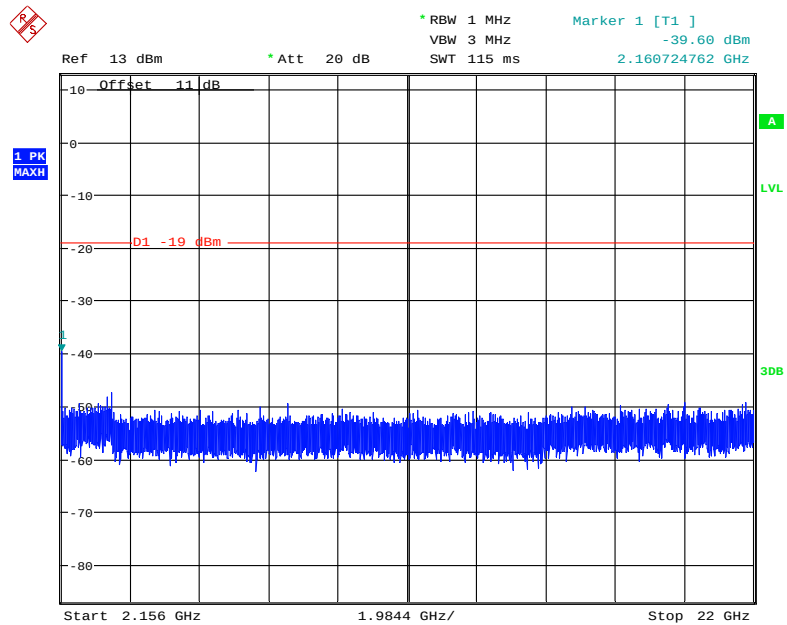


Date: 28.JAN.2021 11:38:49


Lower 700MHz

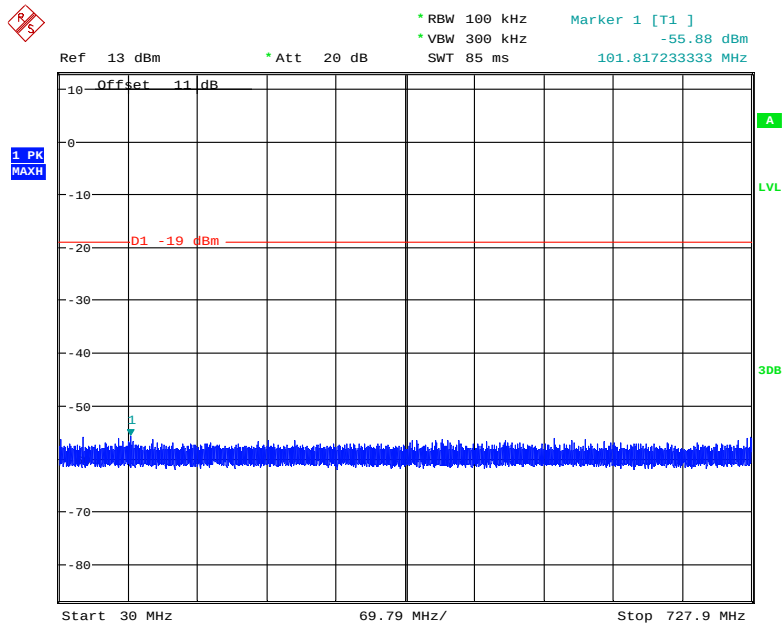

Date: 28.JAN.2021 11:16:32

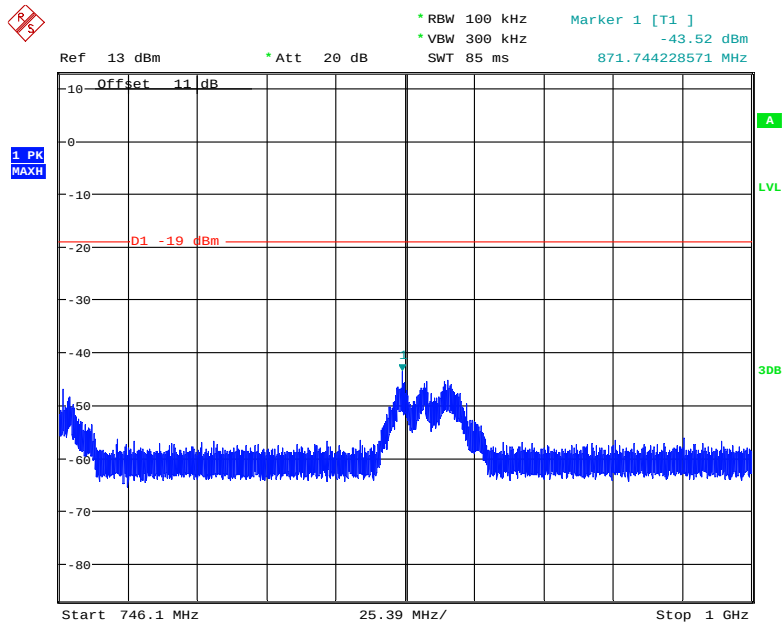


Date: 28.JAN.2021 11:17:34

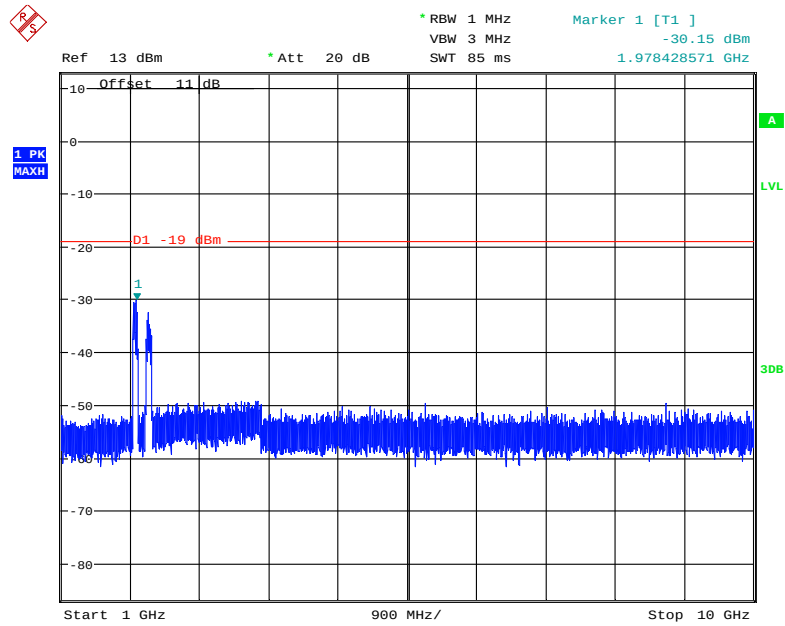


Date: 28.JAN.2021 11:18:13


Upper 700MHz

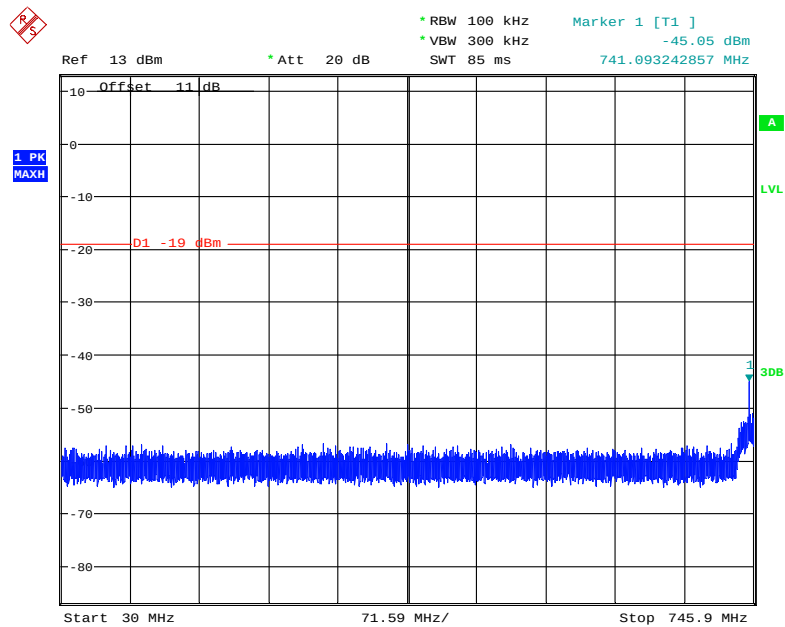

Date: 28.JAN.2021 11:20:04

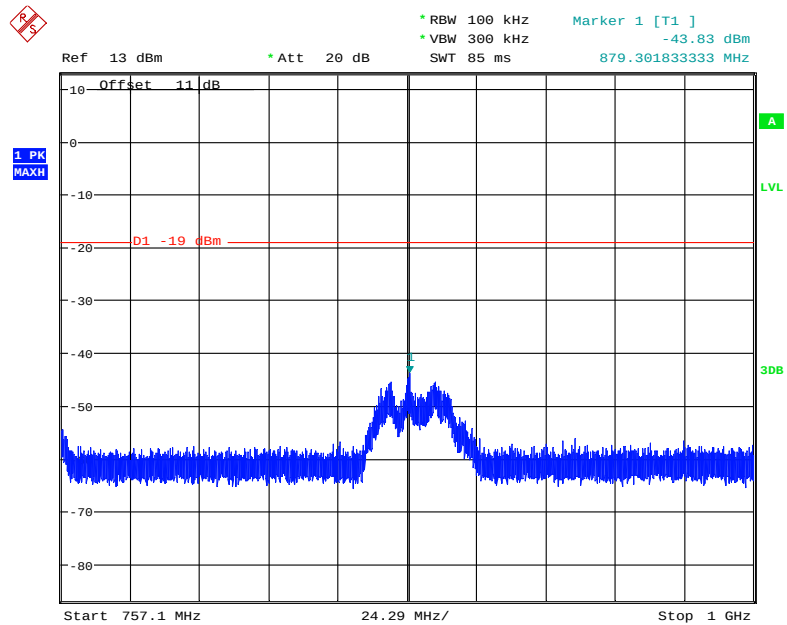

Date: 28.JAN.2021 11:20:35

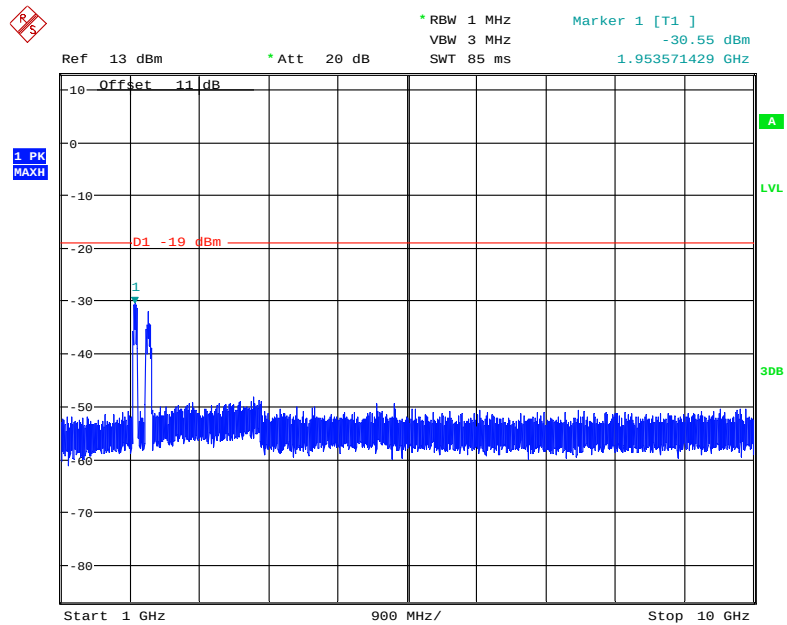


Date: 28.JAN.2021 11:19:27

Uplink


Additional requirement for upper 700MHz band

763 MHz~775 MHz

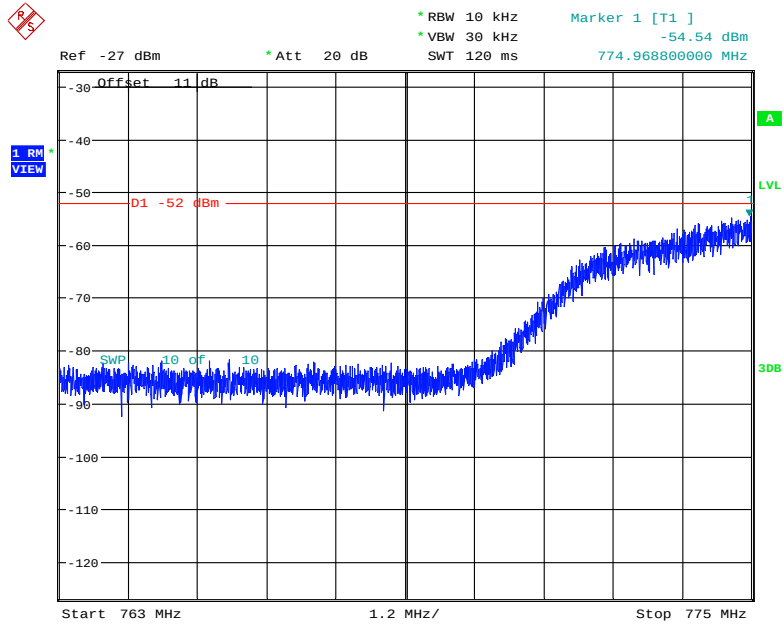


Date: 29.JAN.2021 09:15:31

793 MHz~805 MHz

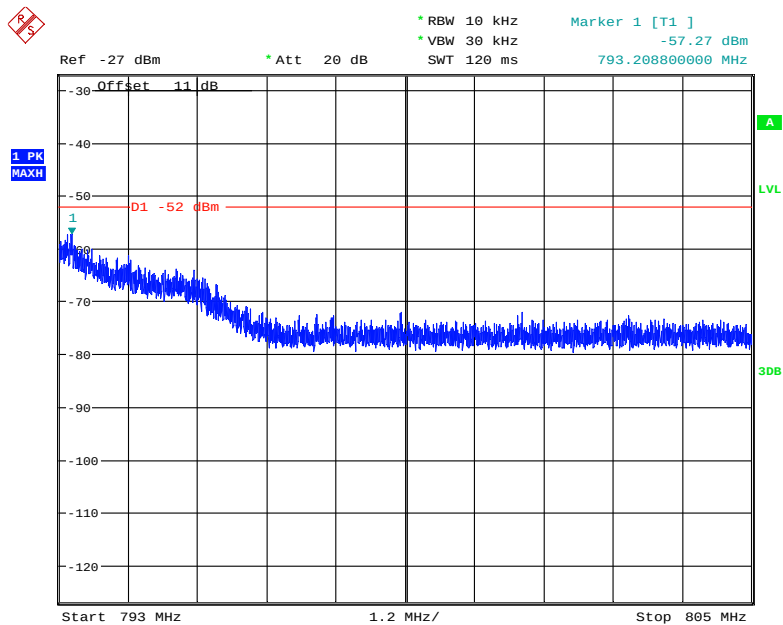


Date: 29.JAN.2021 09:17:14

1559 MHz~1610 MHz (wide band)

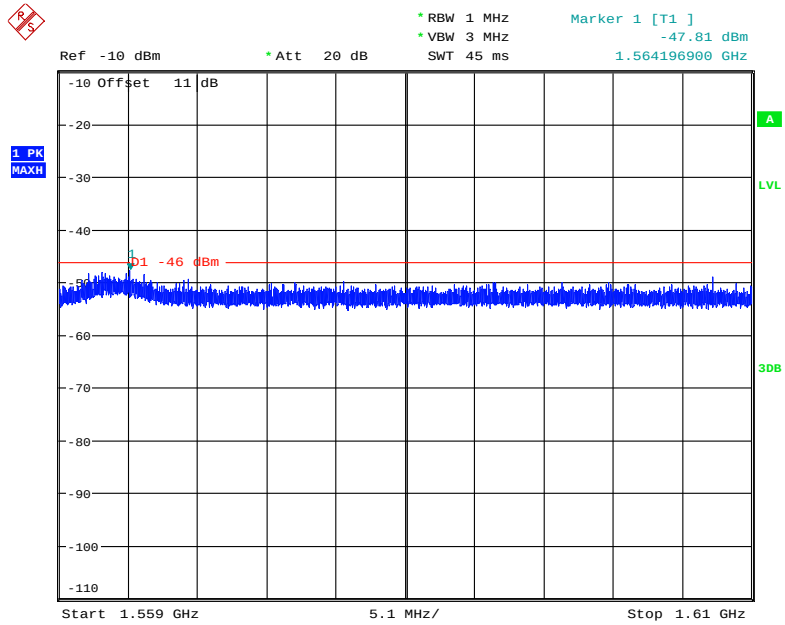

Date: 29.JAN.2021 09:12:09


1559 MHz~1610 MHz (narrow band)

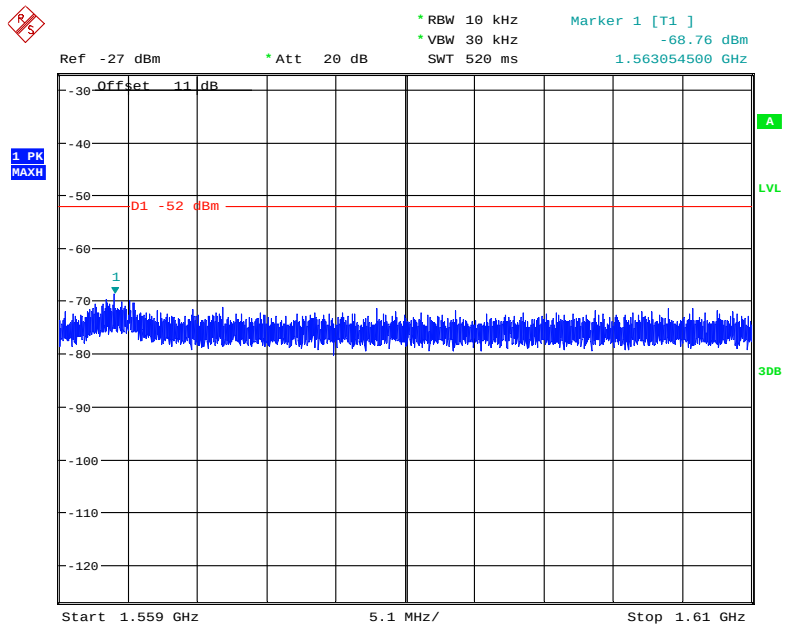

Date: 29.JAN.2021 09:12:42


Downlink

763 MHz~775 MHz

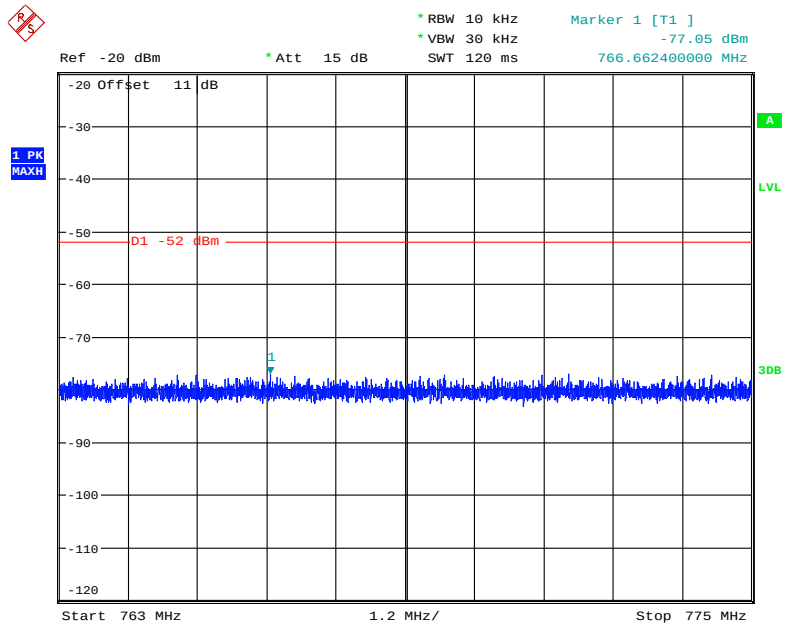


Date: 29.JAN.2021 09:06:32

793 MHz~805 MHz

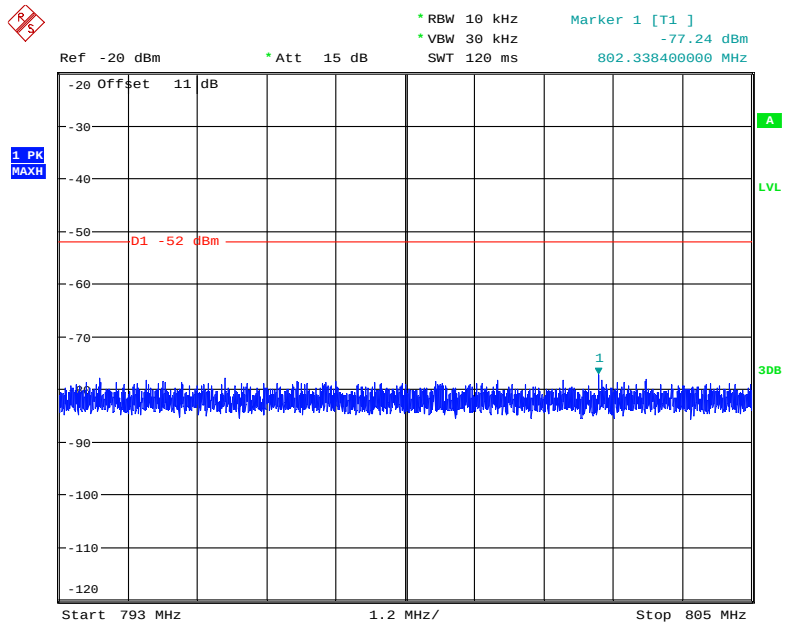


Date: 29.JAN.2021 09:07:39

1559 MHz~1610 MHz (wide band)

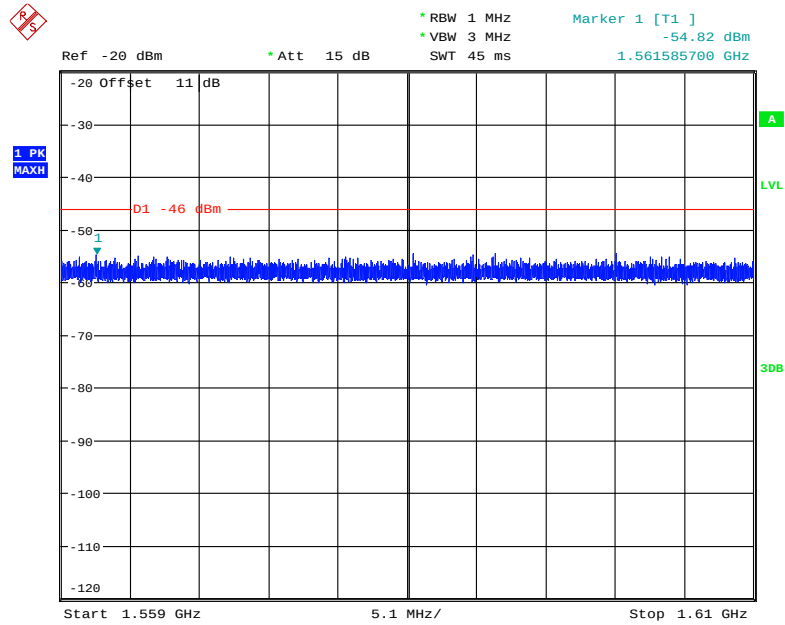

Date: 29.JAN.2021 09:08:52

1559 MHz~1610 MHz (narrow band)

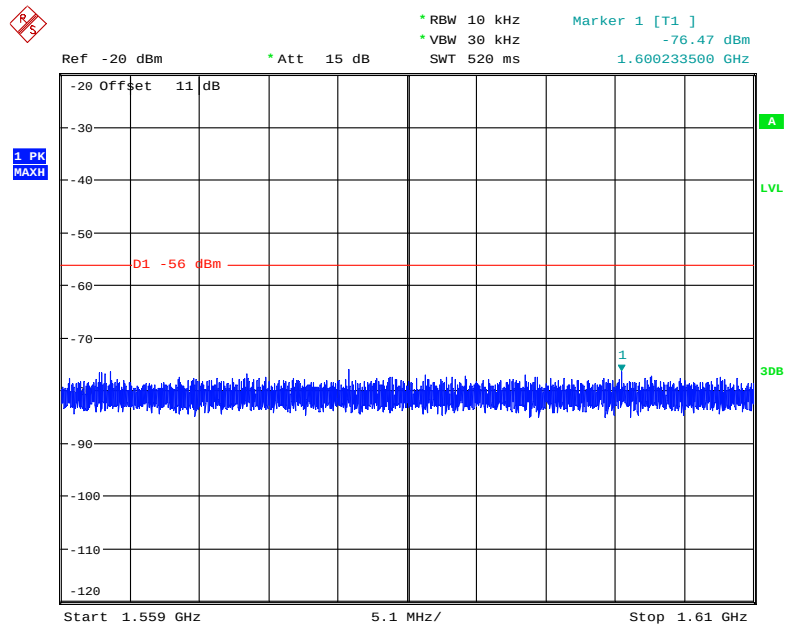

Date: 29.JAN.2021 09:08:16

§ 2.1053 - RADIATED SPURIOUS EMISSIONS

Applicable Standards

§ 2.1053 *Measurements required: Field strength of spurious radiation.*

Test Procedure

This procedure is intended to satisfy the requirements specified in § 2.1053. The applicable limits are those specified for mobile emissions in the rule part appropriate to the band of operation (see Annex A).

- Place the EUT on an OATS or semi-anechoic chamber turntable 3 m from the receiving antenna.
- Connect the EUT to the test equipment as shown in **Figure 10** beginning with the uplink output.
- Set the signal generator to produce a CW signal with the frequency set to the center of the operational band under test and the power level set at P_{IN} as determined from 7.2.
- Measure the radiated spurious emissions from the EUT from lowest to the highest frequencies as specified in § 2.1057. Maximize the radiated emissions by utilizing the procedures described in Clause 8 of ANSI C63.4-2014.
- Capture the peak emissions plots using a peak detector with Max-Hold for inclusion in the test report. Tabular data is acceptable in lieu of spectrum analyzer plots.
- Repeat 7.12c) through 7.12e) for all operational bands.

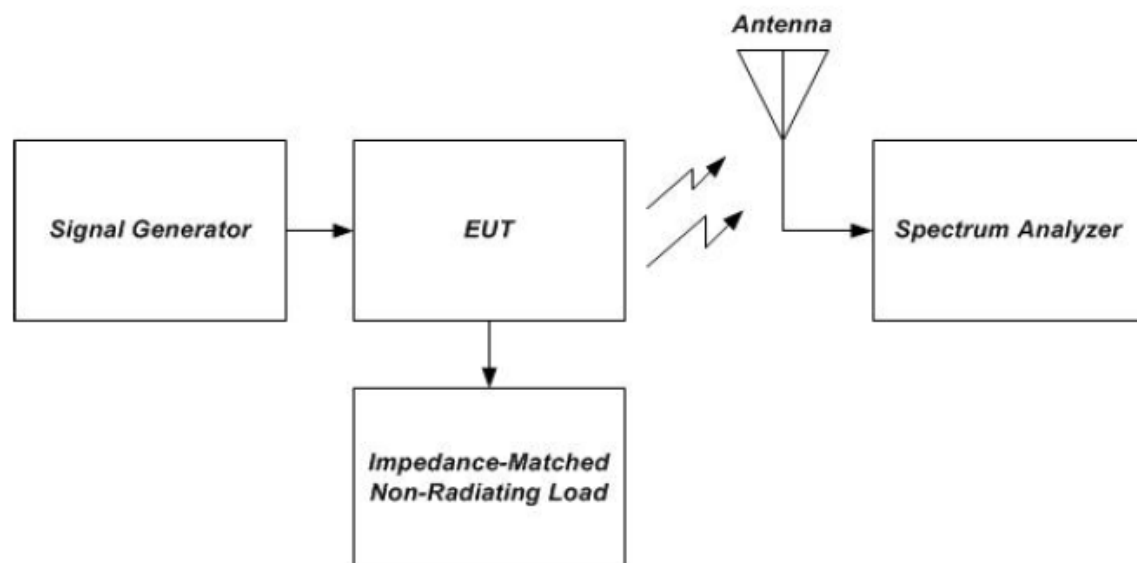


Figure 10 – Radiated spurious emissions test instrumentation setup

Test Data**Environmental Conditions**

Temperature:	24~24.8 °C
Relative Humidity:	53~54 %
ATM Pressure:	101.0~101.1 kPa

The testing was performed by Holland Yang on 2021-01-28 for below 1GHz and Troy Wang on 2021-01-27 for above 1GHz.

Test Result: Pass

Please refer to following table.

Test Mode: Transmitting (Worst case)

Uplink

Frequency	Receiver	TurnTable	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
(MHz)	Reading (dBμV)	Angle Degree	Height (m)	Polar (H / V)	SG Level (dBm)	Cable loss (dB)	Antenna Gain (dBd/dBi)			
Cellular Band, Test Frequency 837MHz										
222.10	46.25	225	2.4	H	-63.0	0.85	0.0	-63.85	-19	44.85
125.80	41.98	18	2.0	V	-62.1	0.84	0.0	-62.94	-19	43.94
1673.00	44.52	149	2.5	H	-62.2	1.30	8.90	-54.60	-19	35.60
1673.00	46.59	125	1.2	V	-59.5	1.30	8.90	-51.90	-19	32.90
3234.00	50.22	226	1.8	H	-50.7	1.60	11.50	-40.80	-19	21.80
3234.00	53.69	196	1.7	V	-47.4	1.60	11.50	-37.50	-19	18.50
3203.00	52.28	303	2.2	H	-48.6	1.60	11.50	-38.70	-19	19.70
3203.00	55.59	174	1.2	V	-45.5	1.60	11.50	-35.60	-19	16.60
PCS Band, Test Frequency 1883MHz										
221.60	45.76	322	1.7	H	-63.4	0.85	0.0	-64.25	-19	45.25
126.10	42.51	351	1.2	V	-61.6	0.84	0.0	-62.44	-19	43.44
3765.00	44.86	137	1.4	H	-58.3	1.50	11.80	-48.00	-19	29.00
3765.00	44.57	279	2.1	V	-58.1	1.50	11.80	-47.80	-19	28.80
3234.00	49.79	253	2.4	H	-51.1	1.60	11.50	-41.20	-19	22.20
3234.00	53.89	215	1.9	V	-47.2	1.60	11.50	-37.30	-19	18.30
3203.00	52.14	343	1.2	H	-48.7	1.60	11.50	-38.80	-19	19.80
3203.00	56.19	43	2.4	V	-44.9	1.60	11.50	-35.00	-19	16.00

Frequency	Receiver	TurnTable	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
(MHz)	Reading (dBμV)	Angle Degree	Height (m)	Polar (H / V)	SG Level (dBm)	Cable loss (dB)	Antenna Gain (dBd/dBi)			
AWS Band, Test Frequency 1733MHz										
221.50	46.21	38	2.4	H	-63.0	0.85	0.0	-63.85	-19	44.85
61.80	41.58	170	1.3	V	-66.8	0.75	0.0	-67.55	-19	48.55
3465.00	44.65	104	2.2	H	-56.8	1.50	12.00	-46.30	-19	27.30
3465.00	44.72	101	1.4	V	-57.5	1.50	12.00	-47.00	-19	28.00
3234.00	48.95	10	1.7	H	-51.9	1.60	11.50	-42.00	-19	23.00
3234.00	52.91	325	1.9	V	-48.2	1.60	11.50	-38.30	-19	19.30
3203.00	51.73	327	1.6	H	-49.1	1.60	11.50	-39.20	-19	20.20
3203.00	55.86	184	1.8	V	-45.3	1.60	11.50	-35.40	-19	16.40
Lower 700MHz, Test Frequency 707MHz										
221.60	46.21	44	1.5	H	-63.0	0.85	0.0	-63.85	-19	44.85
126.20	42.50	318	1.5	V	-61.6	0.84	0.0	-62.44	-19	43.44
1414.00	44.12	358	1.6	H	-64.2	1.60	7.90	-57.90	-19	38.90
1414.00	44.24	252	1.3	V	-64.3	1.60	7.90	-58.00	-19	39.00
3234.00	47.87	92	2.4	H	-53.0	1.60	11.50	-43.10	-19	24.10
3234.00	50.02	254	1.5	V	-51.1	1.60	11.50	-41.20	-19	22.20
3203.00	50.12	151	2.4	H	-50.8	1.60	11.50	-40.90	-19	21.90
3203.00	53.29	82	1.5	V	-47.8	1.60	11.50	-37.90	-19	18.90
Upper 700MHz, Test Frequency 781MHz										
221.90	45.69	279	1.4	H	-63.5	0.85	0.0	-64.35	-19	45.35
61.60	42.15	164	1.0	V	-66.3	0.75	0.0	-67.05	-19	48.05
1563.00	45.07	343	1.2	H	-63.3	1.40	8.70	-56.00	-46	10.00
1563.00	44.87	9	2.3	V	-63.3	1.40	8.70	-56.00	-46	10.00
3203.00	48.26	331	1.9	H	-52.6	1.60	11.50	-42.70	-19	23.70
3203.00	52.03	357	1.4	V	-49.1	1.60	11.50	-39.20	-19	20.20

Downlink

Frequency	Receiver	TurnTable	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
(MHz)	Reading (dBμV)	Angle Degree	Height (m)	Polar (H / V)	SG Level (dBm)	Cable loss (dB)	Antenna Gain (dBd/dBi)			
Cellular Band, Test Frequency 882MHz										
221.70	45.99	59	1.2	H	-63.2	0.85	0.0	-64.05	-19	45.05
61.90	42.30	18	1.9	V	-66.1	0.75	0.0	-66.85	-19	47.85
1763.00	43.42	164	1.6	H	-62.0	1.30	9.30	-54.00	-19	35.00
1763.00	44.02	117	1.9	V	-61.0	1.30	9.30	-53.00	-19	34.00
3312.00	48.36	114	1.8	H	-52.6	1.50	11.70	-42.40	-19	23.40
3312.00	52.41	122	1.5	V	-48.6	1.50	11.70	-38.40	-19	19.40

Frequency	Receiver	TurnTable	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
(MHz)	Reading (dBμV)	Angle Degree	Height (m)	Polar (H / V)	SG Level (dBm)	Cable loss (dB)	Antenna Gain (dBd/dBi)			
PCS Band, Test Frequency 1963MHz										
221.80	45.83	242	1.1	H	-63.4	0.85	0.0	-64.25	-19	45.25
125.60	41.36	59	1.3	V	-62.7	0.84	0.0	-63.54	-19	44.54
3925.00	44.14	100	1.9	H	-58.3	1.60	11.90	-48.00	-19	29.00
3925.00	44.87	210	1.6	V	-57.4	1.60	11.90	-47.10	-19	28.10
3234.00	50.36	159	1.9	H	-50.5	1.60	11.50	-40.60	-19	21.60
3234.00	53.29	334	2.3	V	-47.8	1.60	11.50	-37.90	-19	18.90
AWS Band, Test Frequency 2133MHz										
221.60	46.51	31	1.4	H	-62.7	0.85	0.0	-63.55	-19	44.55
126.20	41.56	43	2.4	V	-62.5	0.84	0.0	-63.34	-19	44.34
4265.00	44.05	124	1.7	H	-57.5	1.50	11.70	-47.30	-19	28.30
4265.00	44.32	314	1.8	V	-56.5	1.50	11.70	-46.30	-19	27.30
3290.00	51.74	149	1.6	H	-49.2	1.50	11.70	-39.00	-19	20.00
3290.00	54.39	69	1.1	V	-46.6	1.50	11.70	-36.40	-19	17.40
Lower 700MHz, Test Frequency 737MHz										
221.60	46.22	283	1.9	H	-63.0	0.85	0.0	-63.85	-19	44.85
61.80	41.73	326	1.8	V	-66.7	0.75	0.0	-67.45	-19	48.45
1474.00	44.52	291	1.5	H	-64.1	1.60	8.50	-57.20	-19	38.20
1474.00	44.41	109	1.4	V	-64.5	1.60	8.50	-57.60	-19	38.60
3234.00	50.24	283	1.7	H	-50.6	1.60	11.50	-40.70	-19	21.70
3234.00	54.02	81	1.6	V	-47.1	1.60	11.50	-37.20	-19	18.20
3203.00	53.04	285	1.6	H	-47.8	1.60	11.50	-37.90	-19	18.90
3203.00	56.15	111	2.0	V	-45.0	1.60	11.50	-35.10	-19	16.10
Upper 700MHz, Test Frequency 752MHz										
221.60	46.19	149	2.3	H	-63.0	0.85	0.0	-63.85	-19	44.85
125.90	42.52	15	1.2	V	-61.5	0.84	0.0	-62.34	-19	43.34
1503.00	45.16	237	1.1	H	-63.5	1.60	8.50	-56.60	-19	37.60
1503.00	46.73	210	2.2	V	-62.2	1.60	8.50	-55.30	-19	36.30
3234.00	51.82	210	1.7	H	-49.1	1.60	11.50	-39.20	-19	20.20
3234.00	55.61	52	1.2	V	-45.5	1.60	11.50	-35.60	-19	16.60
3203.00	51.17	188	1.2	H	-49.7	1.60	11.50	-39.80	-19	20.80
3203.00	54.25	141	2.0	V	-46.9	1.60	11.50	-37.00	-19	18.00

Note:

- 1) Absolute Level = Substituted Level - Cable loss + Antenna Gain
 2) Margin = Limit- Absolute Level

******* END OF REPORT *******