



**FCC 47 CFR PART 15 SUBPART C**

**TEST REPORT**

**For**

**900/ 1800/ 1900/ Bluetooth Mobile Handset**

**Brand Name: CMCS**

**Model Number: Konstanze**

**Issue Date: September 17, 2003**

*Prepared for*

**Chi Mei Communication Systems, Inc.  
11F, No. 39, Chung Hua Road, Sec. 1,  
Taipei City, Taiwan, R.O.C.**

*Prepared by*

**Compliance Certification Services Inc.  
No. 81-1, Lane 210, Bade Rd. 2, Luchu Hsiang,  
Taoyuan Hsien, (338) Taiwan, R.O.C.  
TEL: 886-3-324-0332  
FAX: 886-3-324-5235**



---

***Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.*



## **TABLE OF CONTENTS**

<b>1. TEST RESULT CERTIFICATION.....</b>	<b>3</b>
<b>2. EUT DESCRIPTION.....</b>	<b>3</b>
<b>3. TEST METHODOLOGY .....</b>	<b>5</b>
3.1 EUT CONFIGURATION .....	5
3.2 EUT EXERCISE .....	5
3.3 GENERAL TEST PROCEDURES .....	5
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS .....	6
3.5 DESCRIPTION OF TEST MODES .....	6
<b>4. INSTRUMENT CALIBRATION.....</b>	<b>7</b>
<b>5. FACILITIES AND ACCREDITATIONS .....</b>	<b>8</b>
5.1 FACILITIES.....	8
5.2 EQUIPMENT .....	8
5.3 LABORATORY ACCREDITATIONS AND LISTING .....	8
5.4 TABLE OF ACCREDITATIONS AND LISTINGS .....	9
<b>6. SETUP OF EQUIPMENT UNDER TEST .....</b>	<b>10</b>
6.1 SUPPORT EQUIPMENT .....	10
6.2 SUPPORT EQUIPMENT .....	10
<b>7. FCC PART 15.247 REQUIREMENTS.....</b>	<b>11</b>
<b>CONDITION A: BLUETOOTH OPERATION .....</b>	<b>11</b>
7.1 PEAK POWER .....	11
7.2 BAND EDGES MEASUREMENT.....	12
7.3 PEAK POWER SPECTRAL DENSITY .....	25
7.4 FREQUENCY SEPARATION .....	28
7.5 NUMBER OF HOPPING FREQUENCY.....	30
7.6 TIME OF OCCUPANCY (DWELL TIME) .....	32
7.7 RADIO FREQUENCY EXPOSURE.....	35
7.8 RADIATED EMISSIONS .....	36
<b>CONDITION B: CO-LOCATED OPERATION</b>	
<b>(MOBILE PHONE &amp; BLUETOOTH OPERATED SIMULTANEOUSLY) .....</b>	<b>66</b>
7.9 RADIATED EMISSIONS .....	66
7.10 POWERLINE CONDUCTED EMISSIONS .....	69



## 1. TEST RESULT CERTIFICATION

**Applicant:** Chi Mei Communication Systems, Inc.  
11F, No. 39, Chung Hua Road, Sec. 1,  
Taipei City, Taiwan, R.O.C.

**Equipment Under Test:** 900/ 1800/ 1900/ Bluetooth Mobile Handset

**Trade Name:** CMCS

**Model:** Konstanze

**Model Difference** N/A

**Report Number:** B30715208-RP

**Date of Test:** September 2 ~ 6, 2003

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC Part 15 Subpart C	No non-compliance noted

### We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (1992) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247.

The test results of this report relate only to the tested sample identified in this report.

*Approved by:*

*Reviewed by:*

Jonson Lee  
Director of Linkou Laboratory  
Compliance Certification Services Inc.

Eric Wong  
Section Manager  
Compliance Certification Services Inc.



## 2. EUT DESCRIPTION

Product	900/ 1800/ 1900/ Bluetooth Mobile Handset
Trade Name	CMCS
Model No.	Konstanze
Model Discrepancy	N/A
Frequency Range	TX: 1850 ~ 1910MHz (for GSM) RX: 1930 MHz – 1989.8 MHz (for GSM) 2402 ~ 2480MHz (for Bluetooth)
Cellular Phone Standards	GSM (PCS) / GPRS / (FHSS)
Transmit Power	0.25 dBm
Antenna Type	PIFA Antenna
Antenna Gain	1 dBi
Power Supply	Battery: Rated 3.7Vdc, 630mAh
	Charger: Input: AC100-240V, 0.5A, 50/60Hz Output: 5Vdc, 550mA

**Note:** This submittal(s) (test report) is intended for FCC ID: QDJ-0307KON01 filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules. The composite system (digital device) is compliance with Subpart B is authorized under a DoC procedure.



### **3. TEST METHODOLOGY**

The tests documented in this report were performed in accordance with ANSI C63.4. Radiated testing was performed at an antenna to EUT distance 3 meters.

#### **3.1 EUT CONFIGURATION**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### **3.2 EUT EXERCISE**

The EUT (900/ 1800/ 1900/ Bluetooth Mobile Handset) was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.247 under the FCC Rules Part 15 Subpart C.

#### **3.3 GENERAL TEST PROCEDURES**

##### **Conducted Emissions**

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4-1992. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

##### **Radiated Emissions**

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4-1992.

**3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS**

- (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41	322 - 335.4		

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

- (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

**3.5 DESCRIPTION OF TEST MODES**

The EUT (900/ 1800/ 1900/ Bluetooth Mobile Handset) has been tested under operating condition.

Condition A (Bluetooth operation): The EUT is programmed into the Engineering mode and set to transmit continuously. Channel Low, Mid and High versus each orthogonal axis operation have been evaluated.

Condition B (Co-located operation): Radiated Emissions among the combination of the Mobile phone operation (with the worst case emission setup) with one of the Bluetooth channel (with the worst case emission setup).



#### **4. INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.



## **5. FACILITIES AND ACCREDITATIONS**

### **5.1 FACILITIES**

All measurement facilities used to collect the measurement data are located at

☒ No. 81-1, Lane 210, Bade Rd. 2, Luchu Hsiang, Taoyuan Hsien, Taiwan, R.O.C.

☐ No. 199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

### **5.2 EQUIPMENT**

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.







All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### **5.3 LABORATORY ACCREDITATIONS AND LISTING**

The test facilities used to perform radiated and conducted emissions tests are accredited by National Voluntary Laboratory Accreditation Program for the specific scope of accreditation under Lab Code: 200600-0 to perform Electromagnetic Interference tests according to FCC PART 15 AND CISPR 22 requirements. No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government. In addition, the test facilities are listed with Federal Communications Commission (registration no: 93105 and 90471).



## 5.4 TABLE OF ACCREDITATIONS AND LISTINGS


Country	Agency	Scope of Accreditation	Logo
USA	NVLAP*	EN 55011, EN 55014-1, AS/NZS 1044, CNS 13783-1, EN 55022, CNS 13438, EN 61000-3-2, EN 61000-3-3, ANSI C63.4, FCC OST/MP-5, AS/NZS 3548 IEC 61000-4-2, IEC 61000-4-3, IEC 61000-4-4, IEC 61000-4-5, IEC 61000-4-6, IEC 61000-4-8, IEC 61000-4-11	 200600-0
USA	FCC	3/10 meter Open Area Test Sites to perform FCC Part 15/18 measurements	 93105, 90471
Japan	VCCI	4 3/10 meter Open Area Test Sites to perform conducted/radiated measurements	<b>VCCI</b> R-393/1066/725/879 C-402/747/912
Norway	NEMKO	EN 50081-1/2, EN 50082-1/2, IEC 61000-6-1/2, EN 50091-2, EN 50130-4, EN 55011, EN 55013, EN 55014-1/2, EN 55015, EN 55022, EN 55024, EN 61000-3-2/3, EN 61326-1, IEC 61000-4-2/3/4/5/6/8/11, EN 60601-1-2, EN 300 328-2, EN 300 422-2, EN 301 419-1, EN 301 489-01/03/07/08/09/17, EN 301 419-2/3, EN 300 454-2, EN 301 357-2	 ELA 124a ELA 124b ELA 124c
Taiwan	CNLA	EN 300 328-1, EN 300 328-2, EN 300 220-1, EN 300 220-2, EN 300 220-3, 47 CFR FCC Part 15 Subpart C, EN 61000-3-2, EN 61000-3-3, CNS 13439, CNS 13783-1, CNS 14115, CNS 13438, AS/NZS 3548, CNS 13022-1, IEC 1000-4-3/4/5/6/8/11, CNS 13022-2/3	 <b>0 3 6 3</b> ILAC MRA
Taiwan	BSMI	CNS 13438, CNS 13783-1, CNS 13439, CNS 14115	 SL2-IS-E-0014 SL2-IN-E-0014 SL2-A1-E-0014 SL2-R1-E-0014 SL2-R2-E-0014 SL2-L1-E-0014
Canada	Industry Canada	RSS212, Issue 1	 IC 3991-3 IC 3991-4

\* No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government.



## 6. SETUP OF EQUIPMENT UNDER TEST

### 6.1 SUPPORT EQUIPMENT

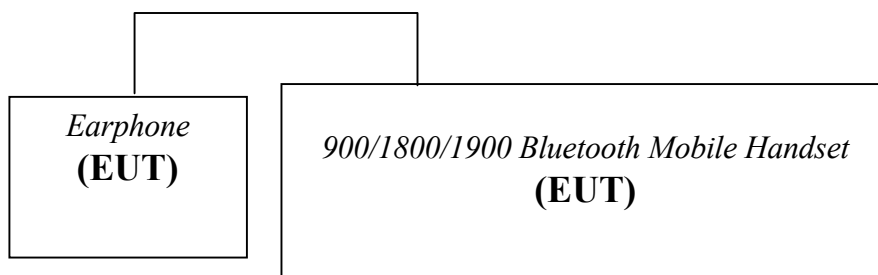

### 6.2 SUPPORT EQUIPMENT

Device Type	Brand	Model	FCC ID	Series No.	Data Cable	Power Cord
N/A	N/A	N/A	N/A	N/A	N/A	N/A

**Notes:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



## 7. FCC PART 15.247 REQUIREMENTS

### CONDITION A: BLUETOOTH OPERATION

#### 7.1 PEAK POWER

##### LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:


1. For systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz: 1 watt.
2. Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

##### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Peak Power Meter	BOONTON	4531	130601	01/09/2004
Peak Power Sensor	BOONTON	56218	2240	01/09/2004

*Remark: Each piece of equipment is scheduled for calibration once a year.*

##### Test Configuration



##### TEST PROCEDURE

The transmitter output is connected to the RF Power Meter. The RF Power Meter is set to the peak power detection.

##### TEST RESULTS

*No non-compliance noted*

##### Test Data

CH	Reading Power (dBm)	Cable Loss (dB)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	-1.43	0.80	-0.63	0.00086	1.00	PASS
Mid	-0.88	0.80	-0.08	0.00098		PASS
High	-0.55	0.80	0.25	0.00106		PASS

## 7.2 BAND EDGES MEASUREMENT


### LIMIT

According to §15.247(c), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	4/27/2004
Spectrum Analyzer	R&S	FSP30	1093.4495.30	7/22/2004
Low Loss Cable	Huber + Suhner	Sucoflex 104	N/A	N/A
Horn Antenna	EMCO	3115	N/A	2/24/2004

### TEST CONFIGURATION

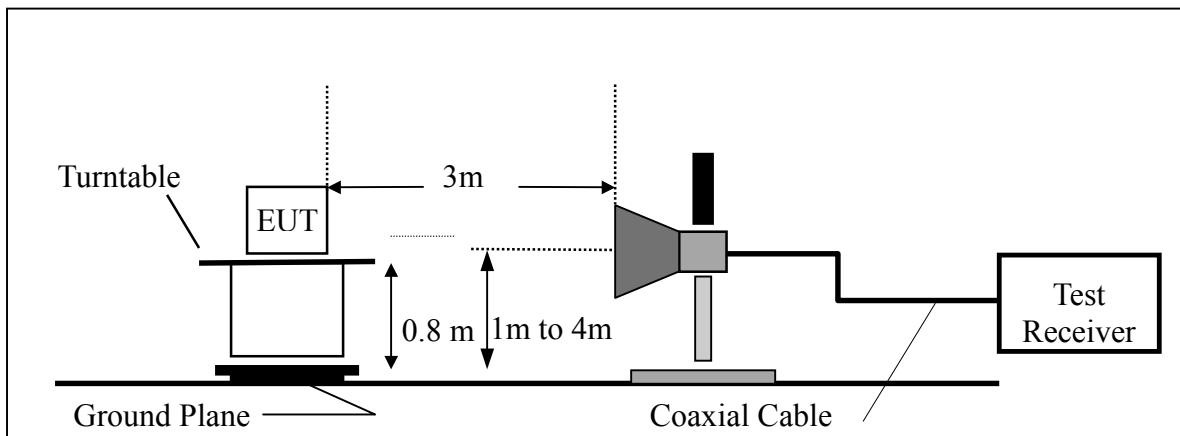

### TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
  - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
  - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

### TEST RESULTS


Refer to attach spectrum analyzer data chart.



## Band Edges Test Data X Mode / CH-Low

Detector mode: Peak


Polarity: Vertical

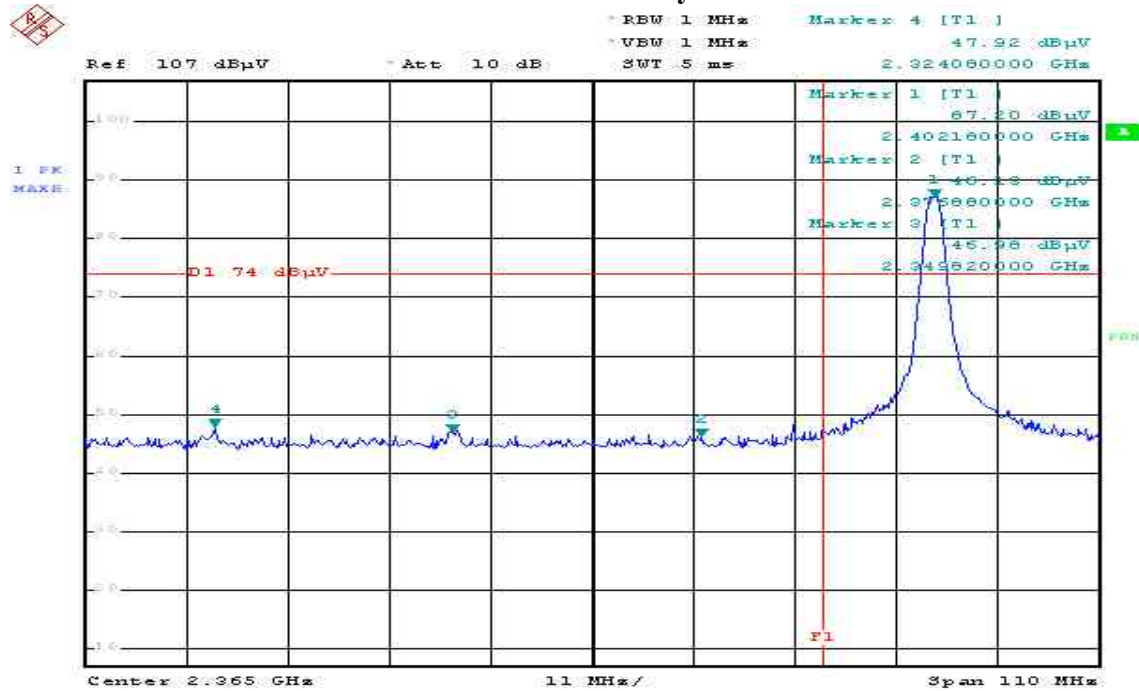

Date: 5.SEP.2003 10:27:04

Detector mode: Average

Polarity: Vertical

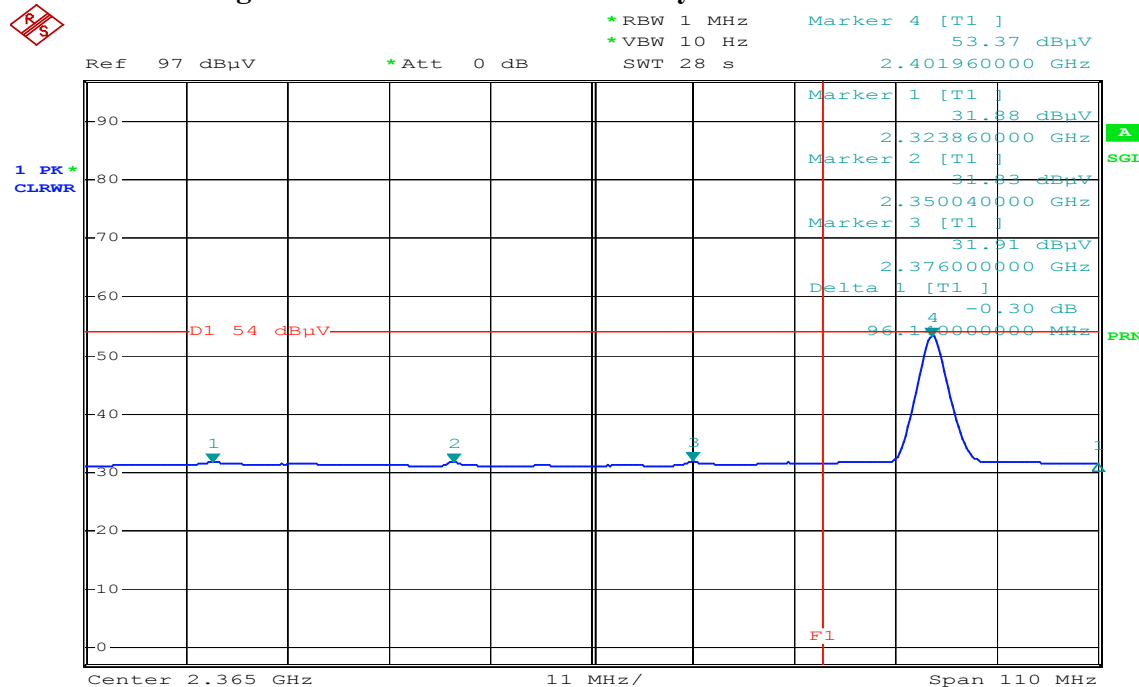


Date: 22.SEP.2003 16:21:30



Detector mode: Peak


Polarity: Horizontal

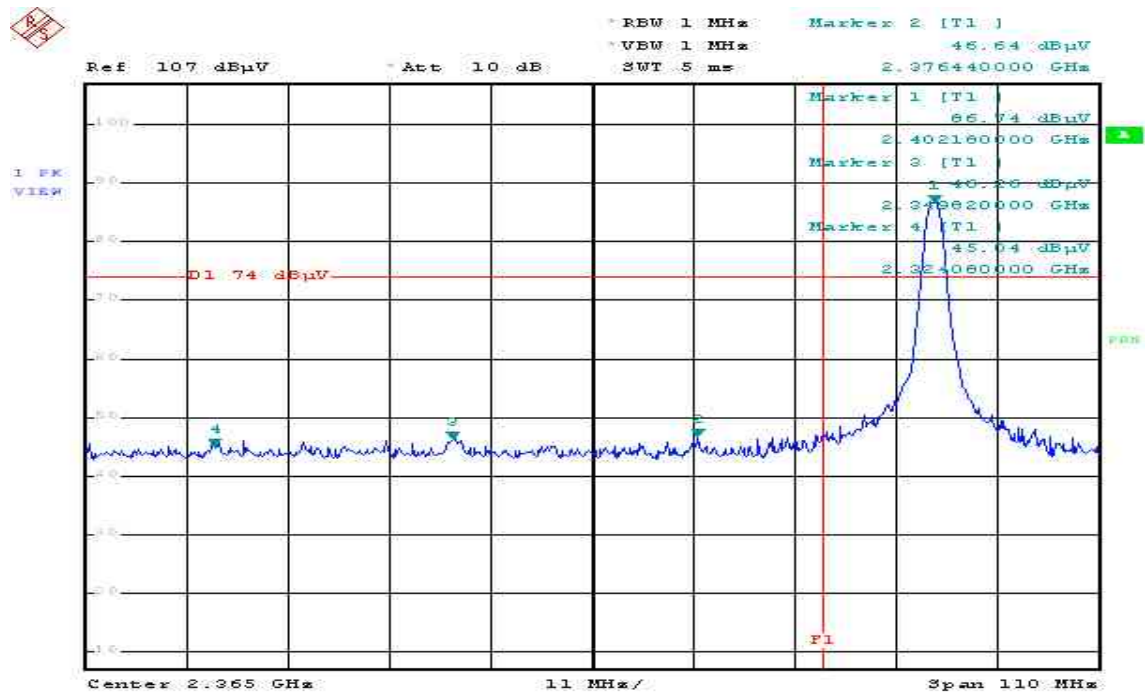

Date: 5 SEP 2003 10:32:00

Detector mode: Average

Polarity: Horizontal

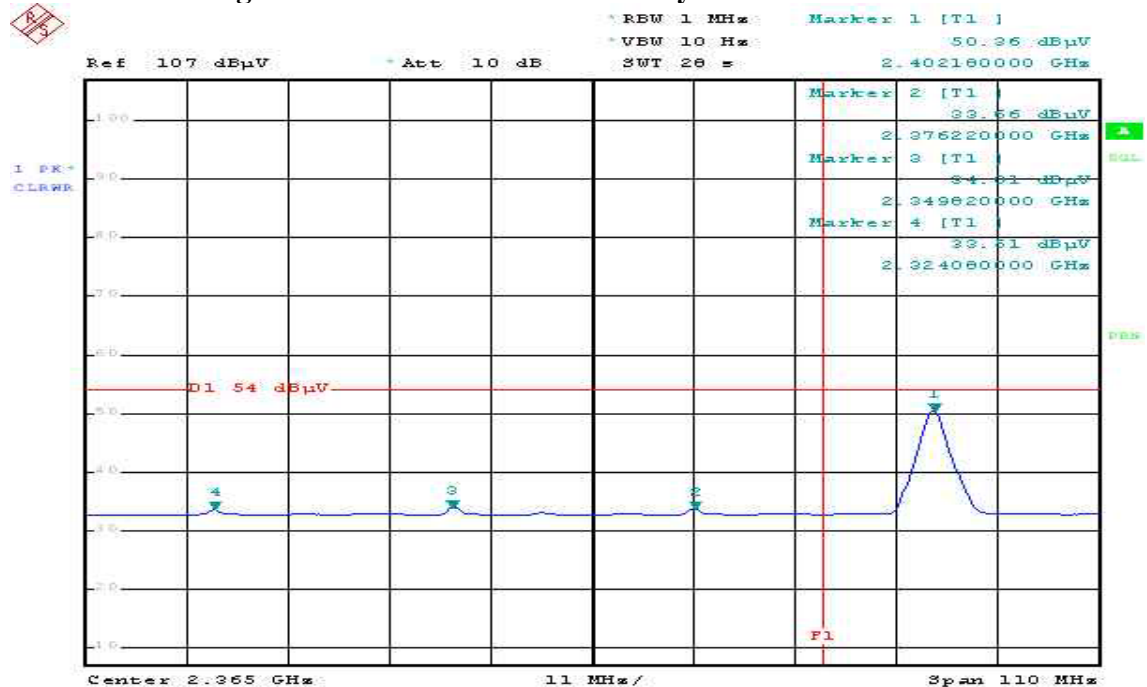


Date: 5 SEP 2003 10:29:56



## Band Edges Test Data X Mode / CH-High

Detector mode: Peak


Polarity: Vertical

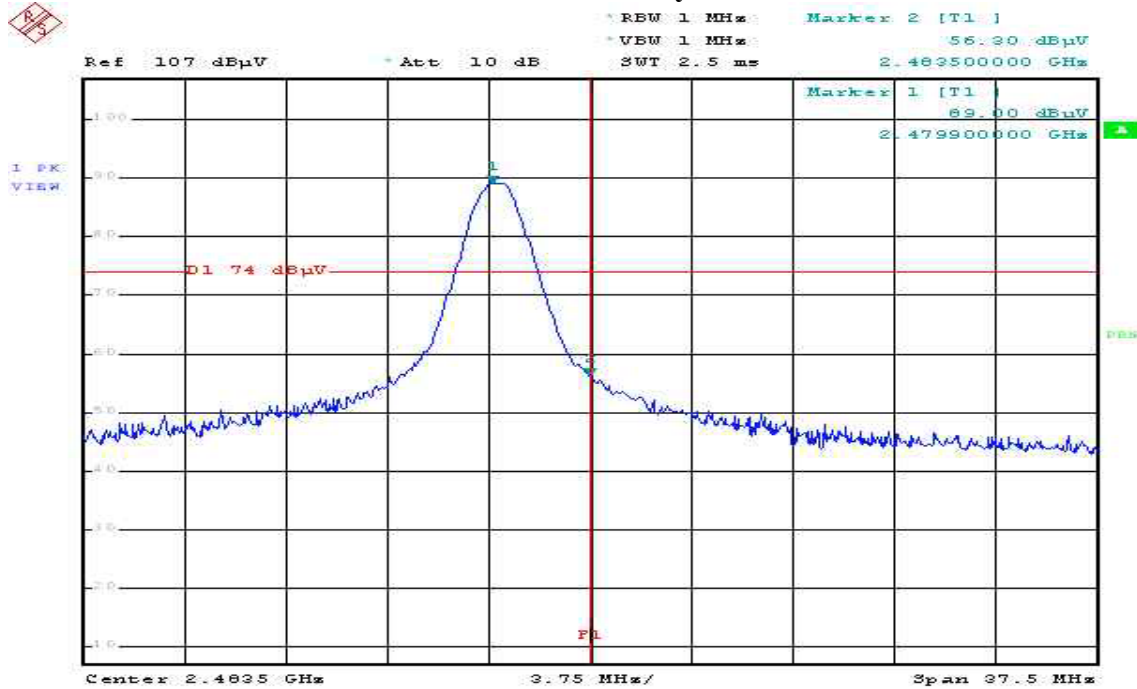

Date: 5.SEP.2003 10:42:31

Detector mode: Average

Polarity: Vertical

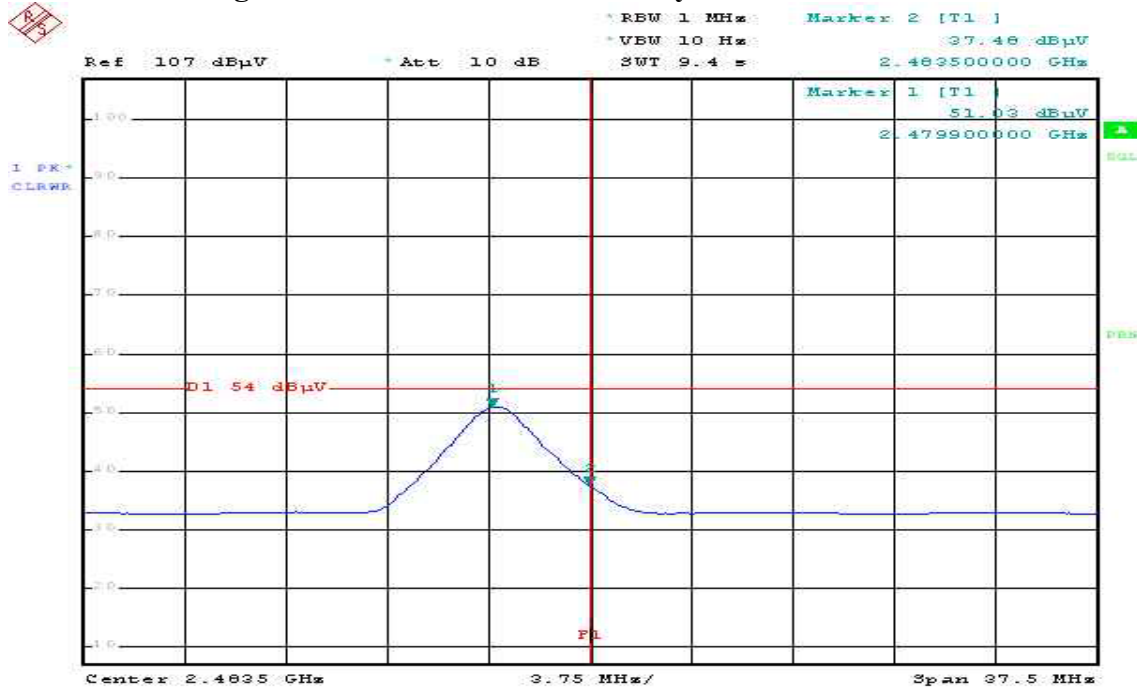


Date: 5.SEP.2003 10:41:05



Detector mode: Peak


Polarity: Horizontal

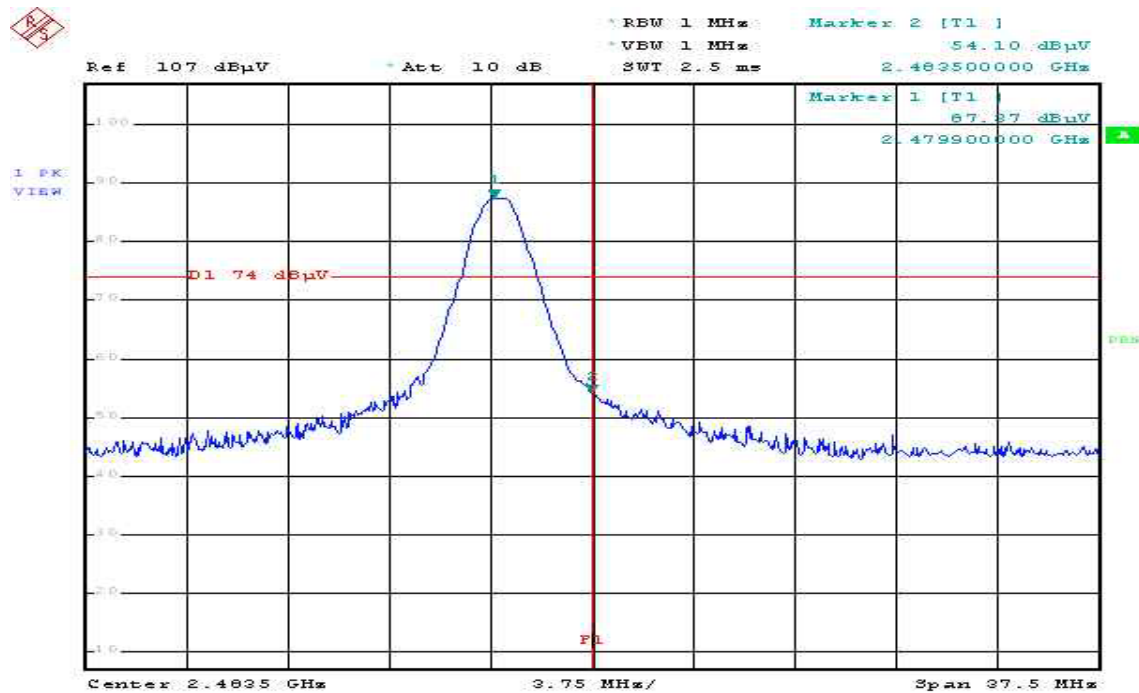

Date: 5.SEP.2003 10:46:14

Detector mode: Average

Polarity: Horizontal

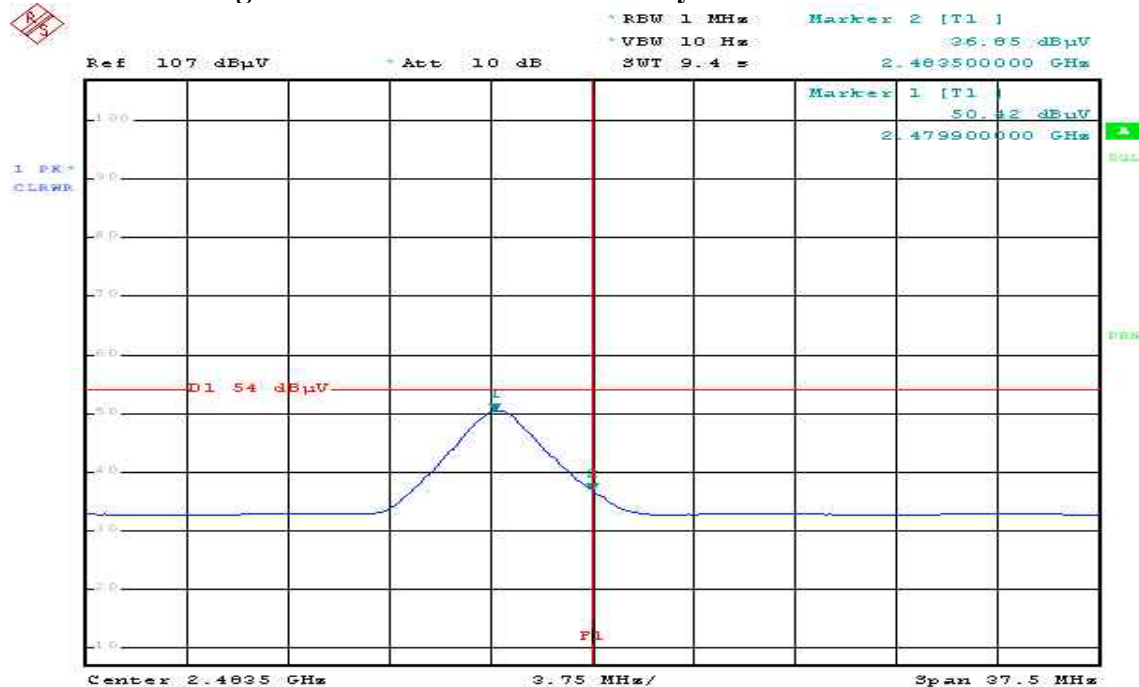

Date: 5.SEP.2003 10:47:34






## Band Edges Test Data Y Mode / CH-Low

Detector mode: Peak


Polarity: Vertical

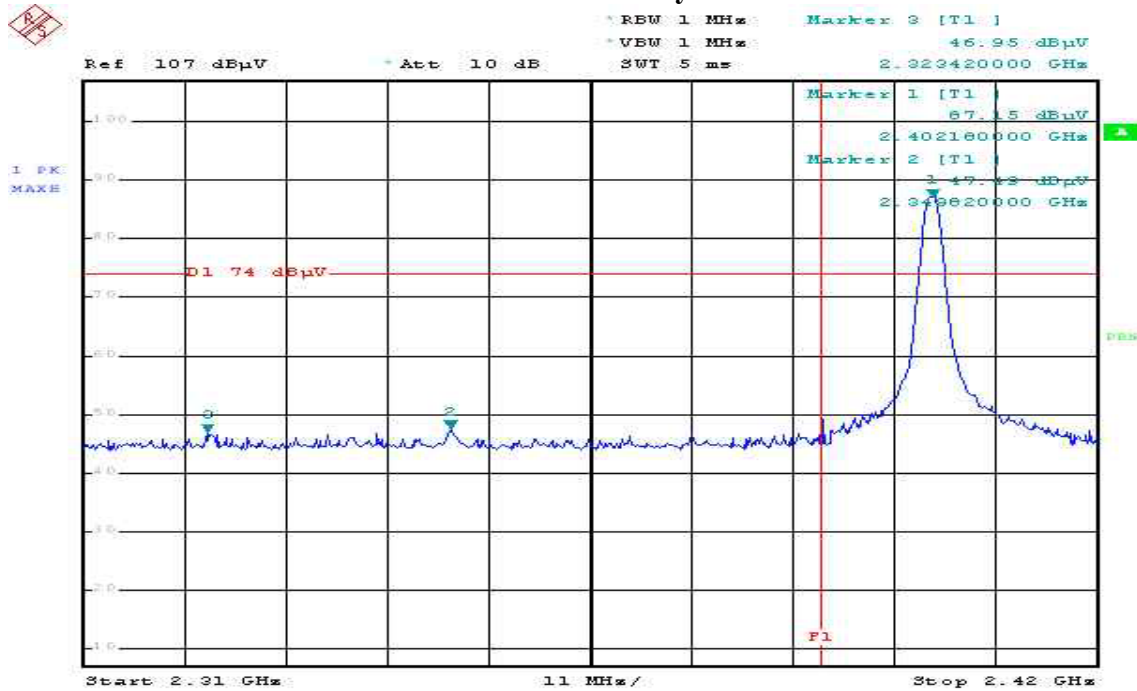

Date: 5.SEP.2003 11:33:42

Detector mode: Average

Polarity: Vertical

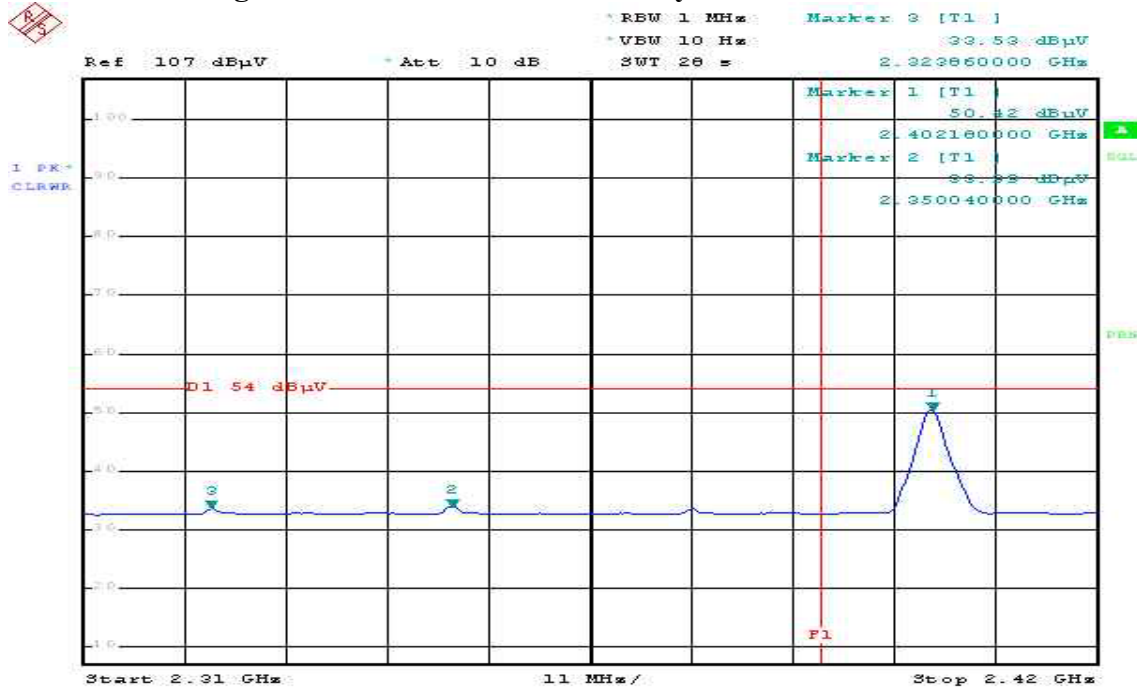


Date: 5.SEP.2003 11:35:09



Detector mode: Peak


Polarity: Horizontal

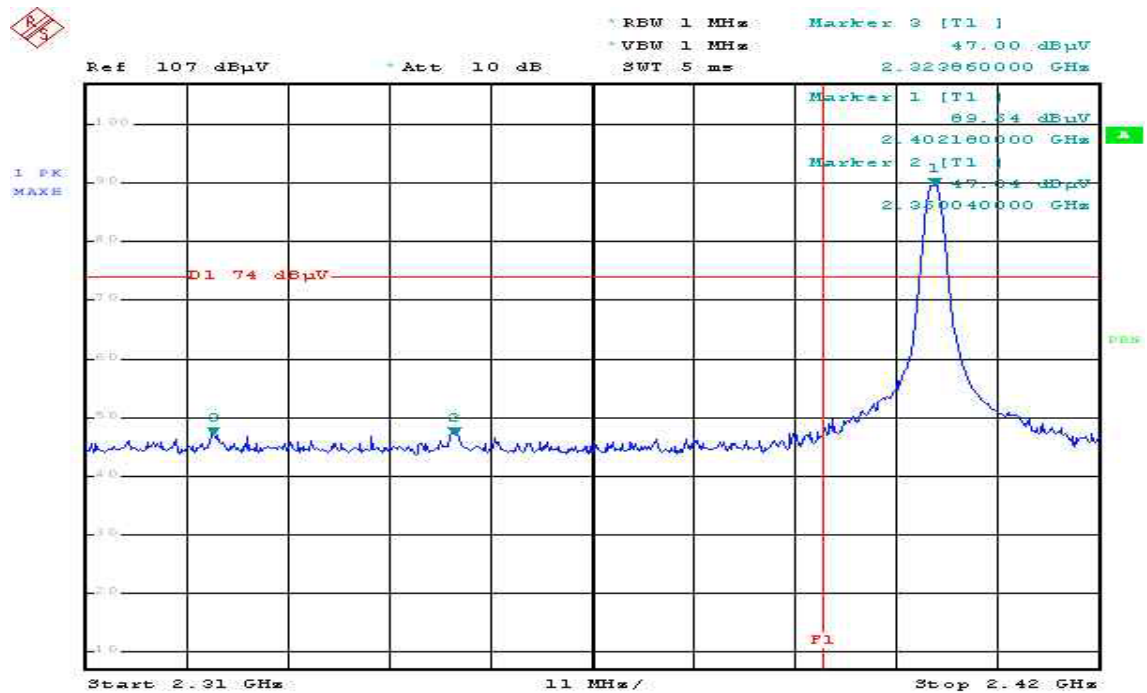

Date: 5.SEP.2003 11:37:35

Detector mode: Average

Polarity: Horizontal

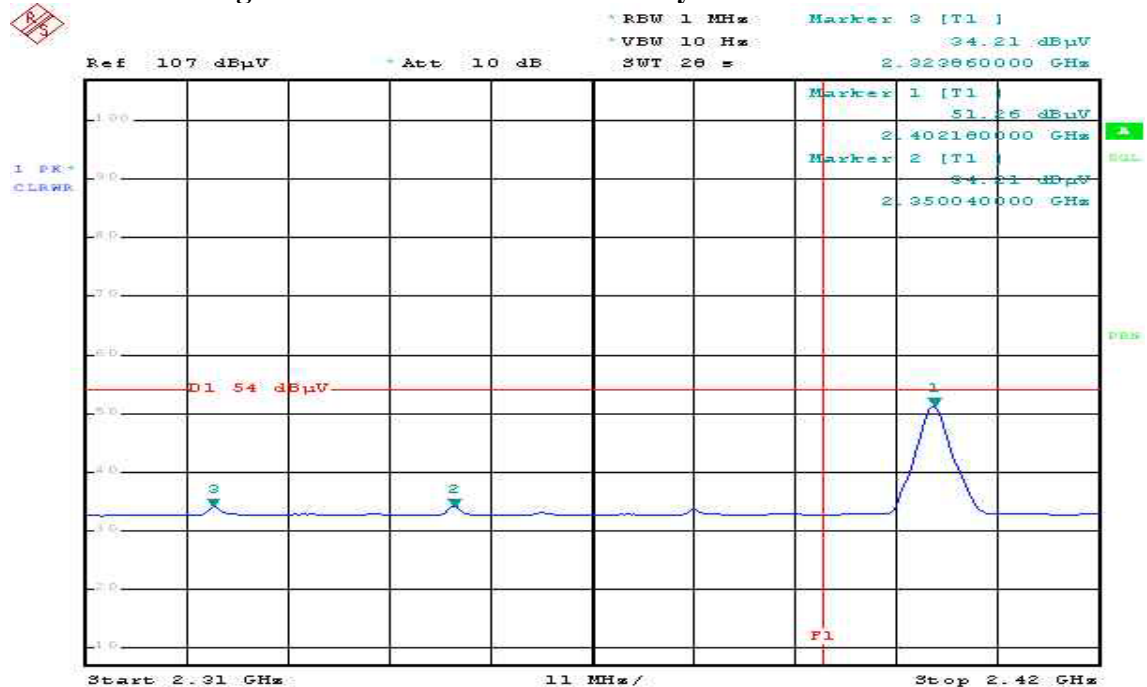


Date: 5.SEP.2003 11:39:15



## Band Edges Test Data Y Mode / CH-High

Detector mode: Peak


Polarity: Vertical

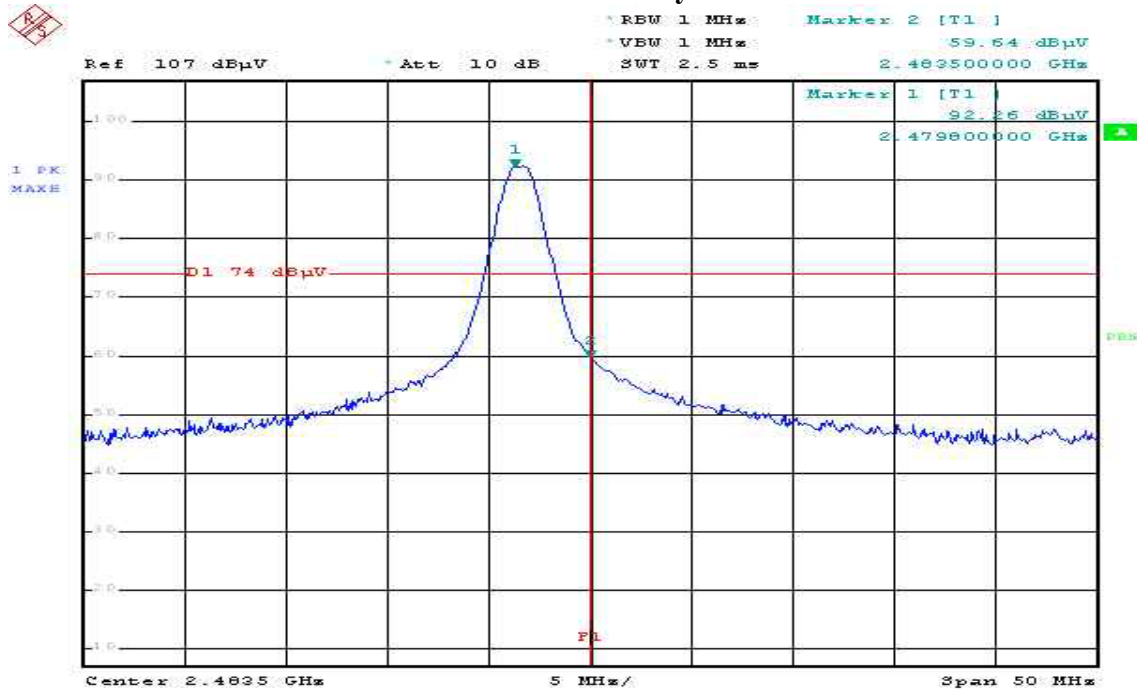

Date: 5.SEP.2003 11:28:11

Detector mode: Average

Polarity: Vertical

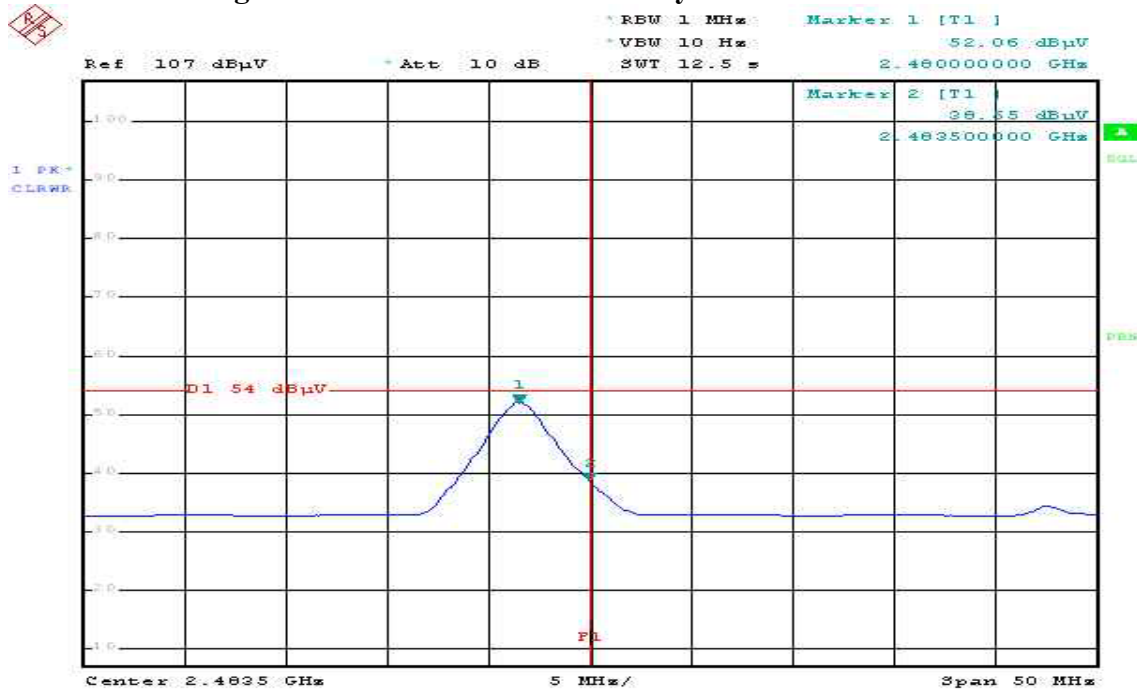


Date: 5.SEP.2003 11:29:25



Detector mode: Peak


Polarity: Horizontal

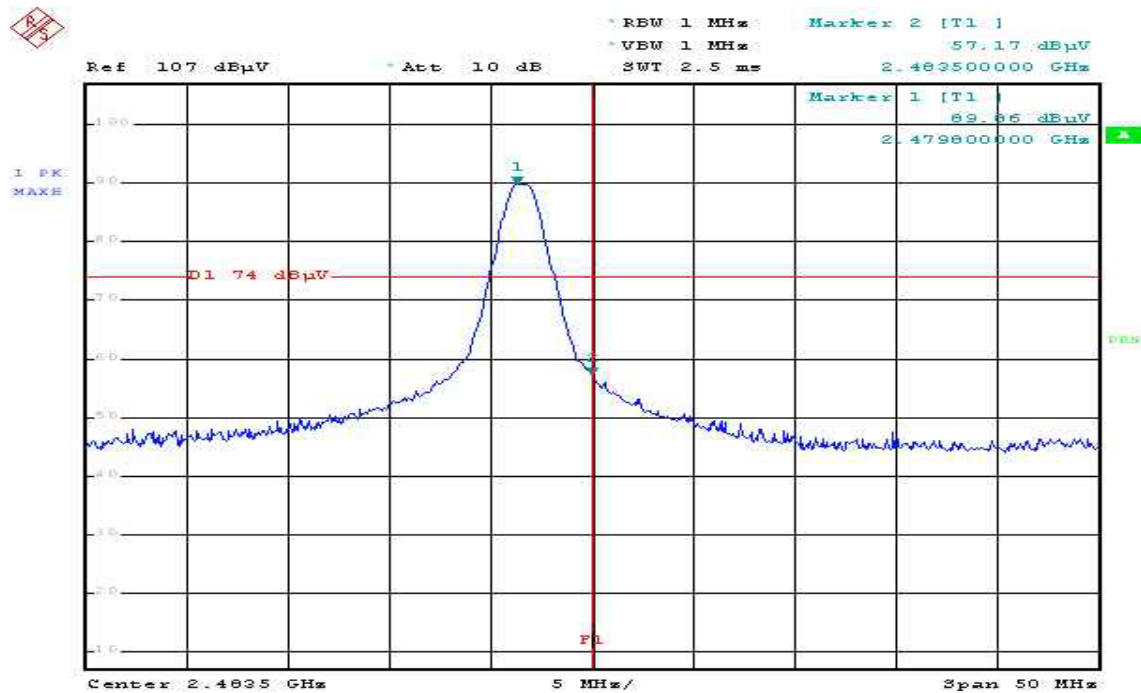

Date: 5.SEP.2003 11:24:21

Detector mode: Average

Polarity: Horizontal

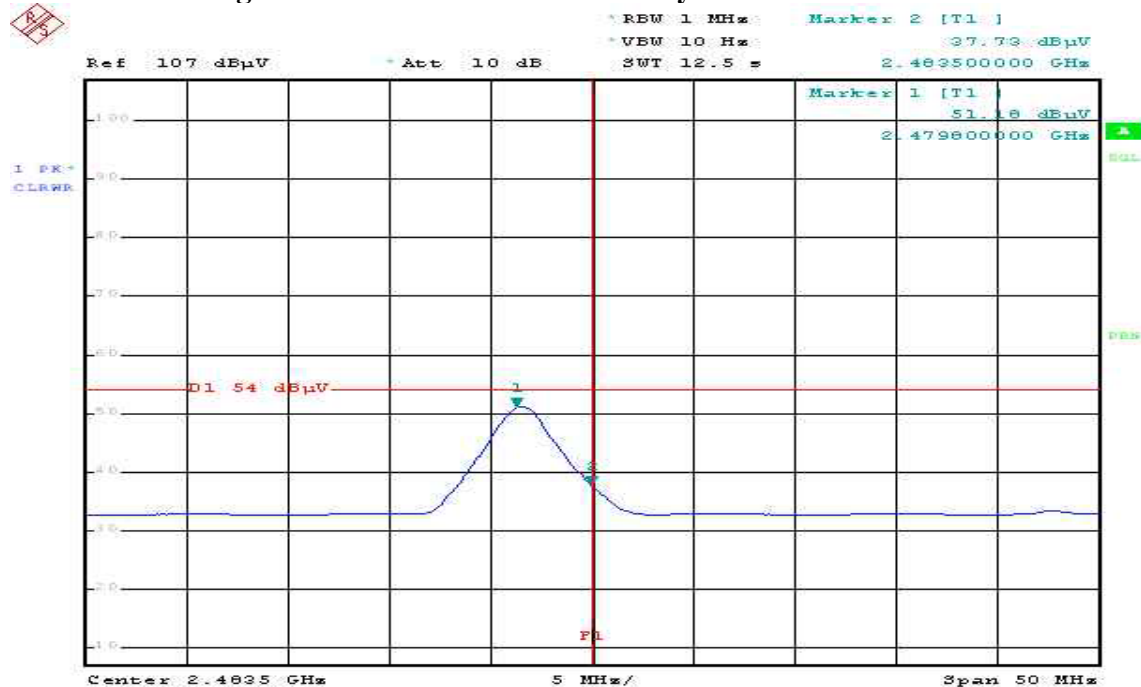


Date: 5.SEP.2003 11:25:15

### Band Edges Test Data Z Mode / CH-Low

**Detector mode: Peak**


**Polarity: Vertical**

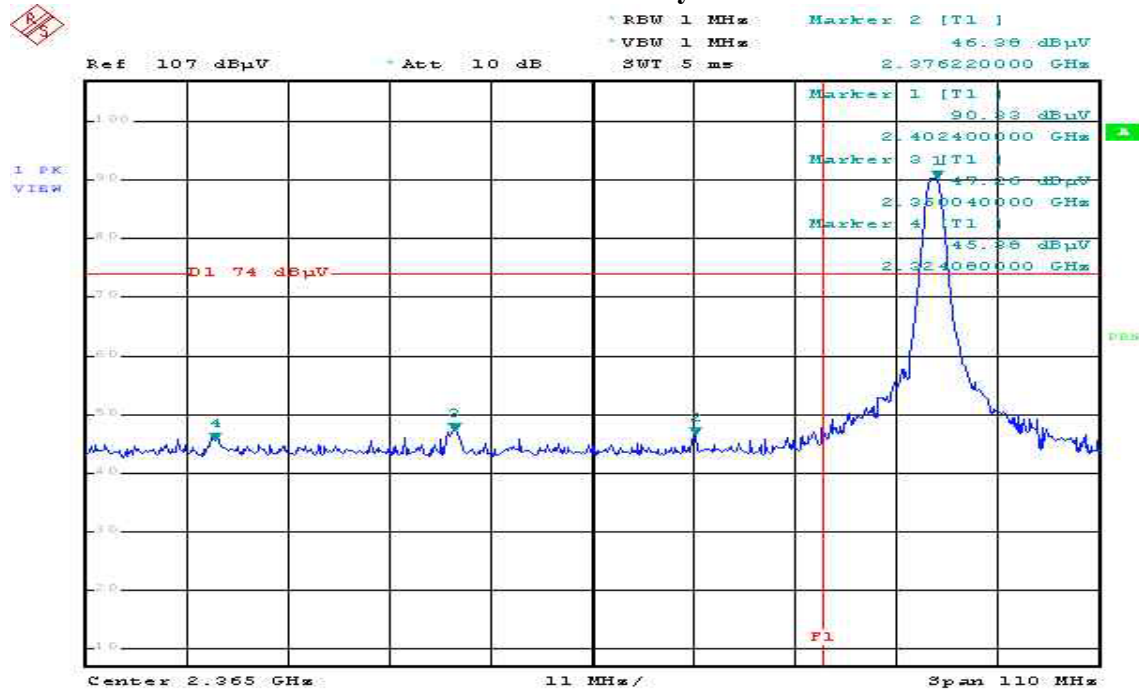

Date: 5.SEP.2003 11:08:03

### Detector mode: Average

**Polarity: Vertical**

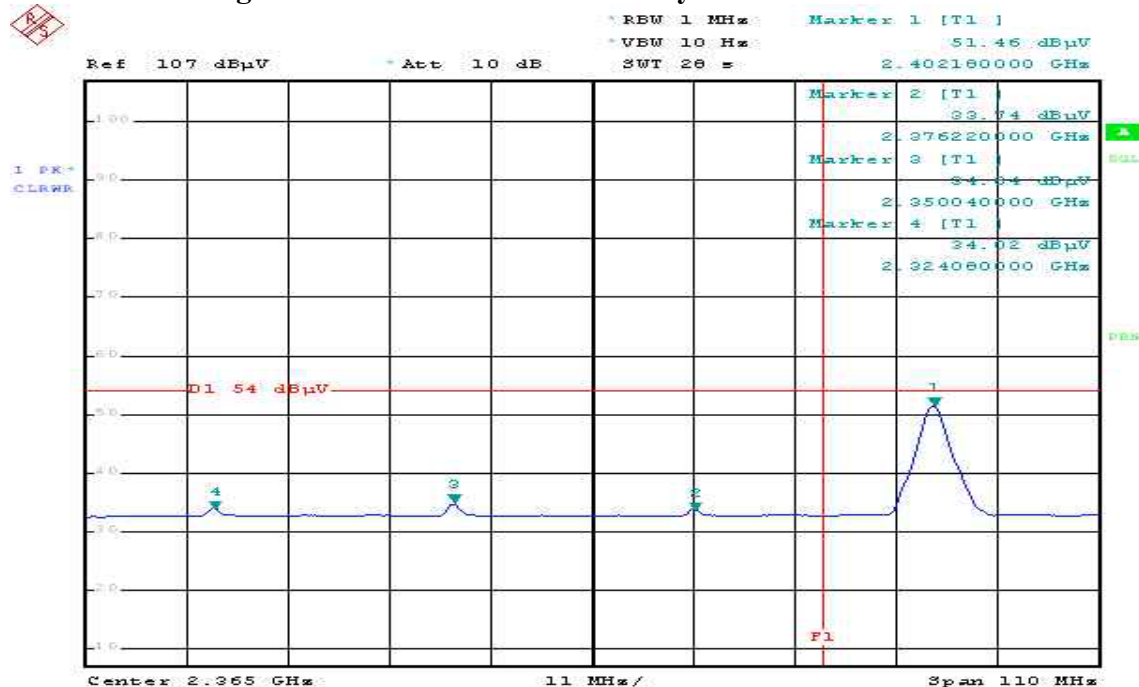


Date: 5.SEP.2003 11:09:21



Detector mode: Peak


Polarity: Horizontal

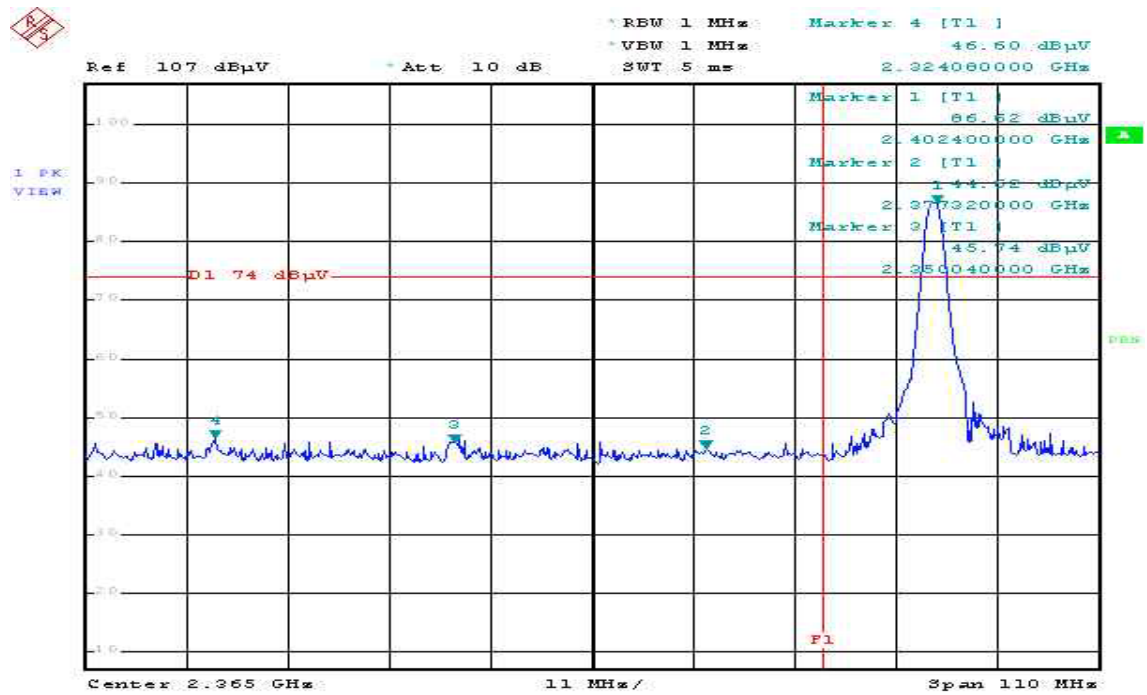

Date: 5.SEP.2003 11:02:21

Detector mode: Average

Polarity: Horizontal

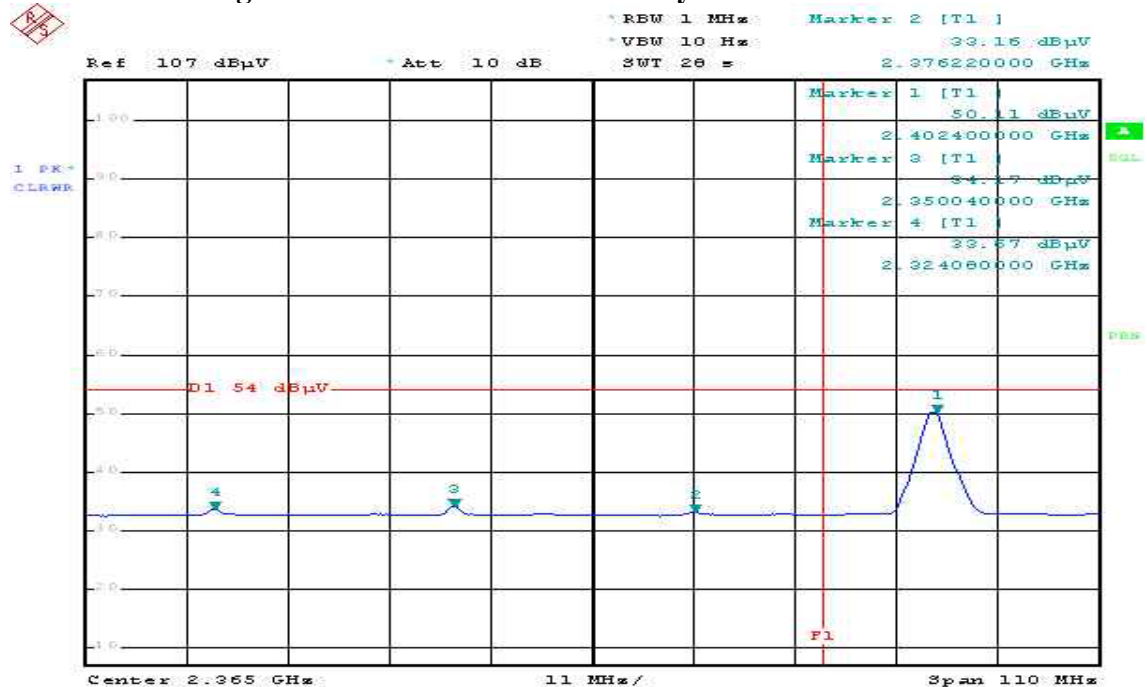


Date: 5.SEP.2003 11:03:35



## Band Edges Test Data Z Mode / CH-High


Detector mode: Peak

Polarity: Vertical

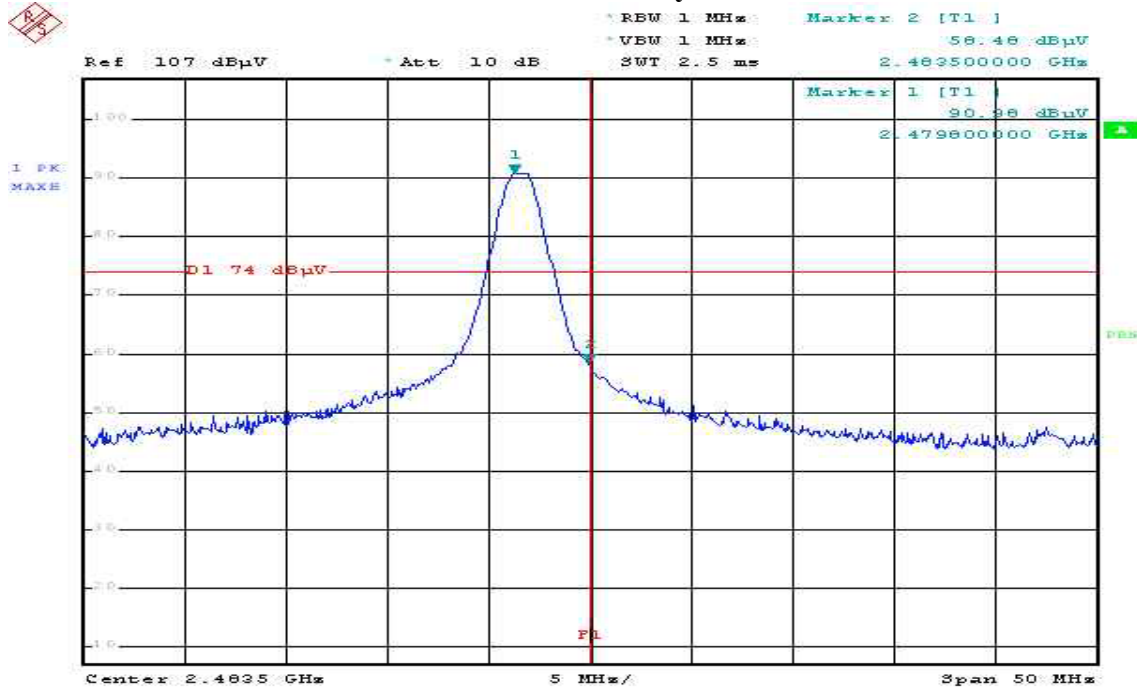

Detector mode: Average

Polarity: Vertical

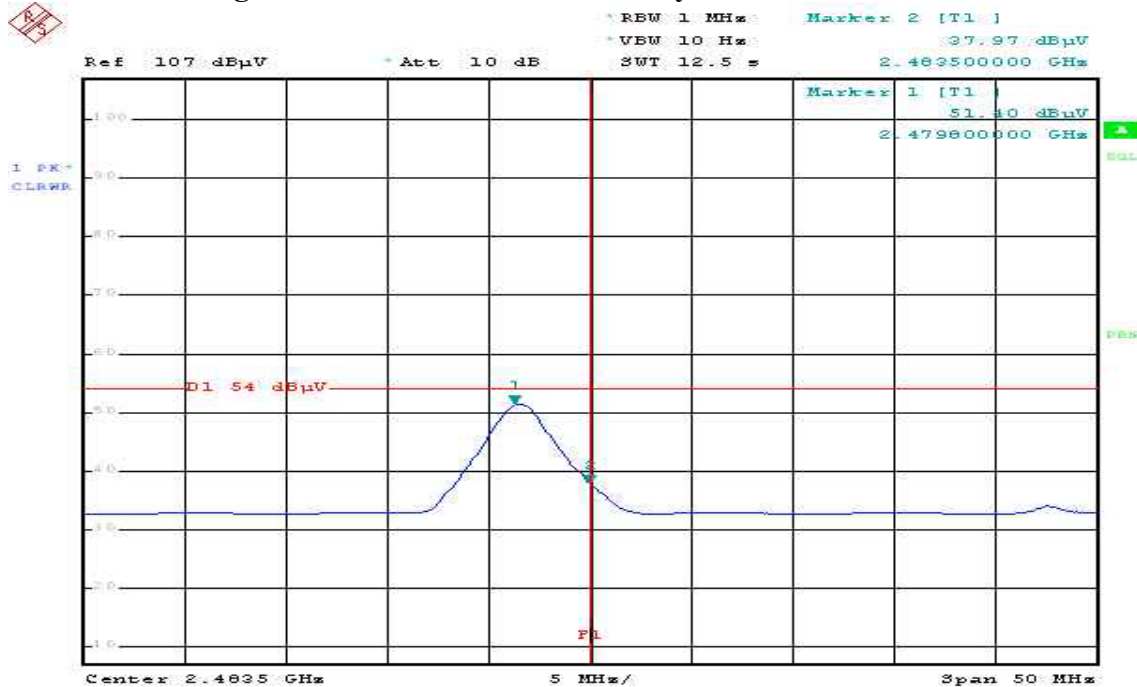






Detector mode: Peak


Polarity: Horizontal

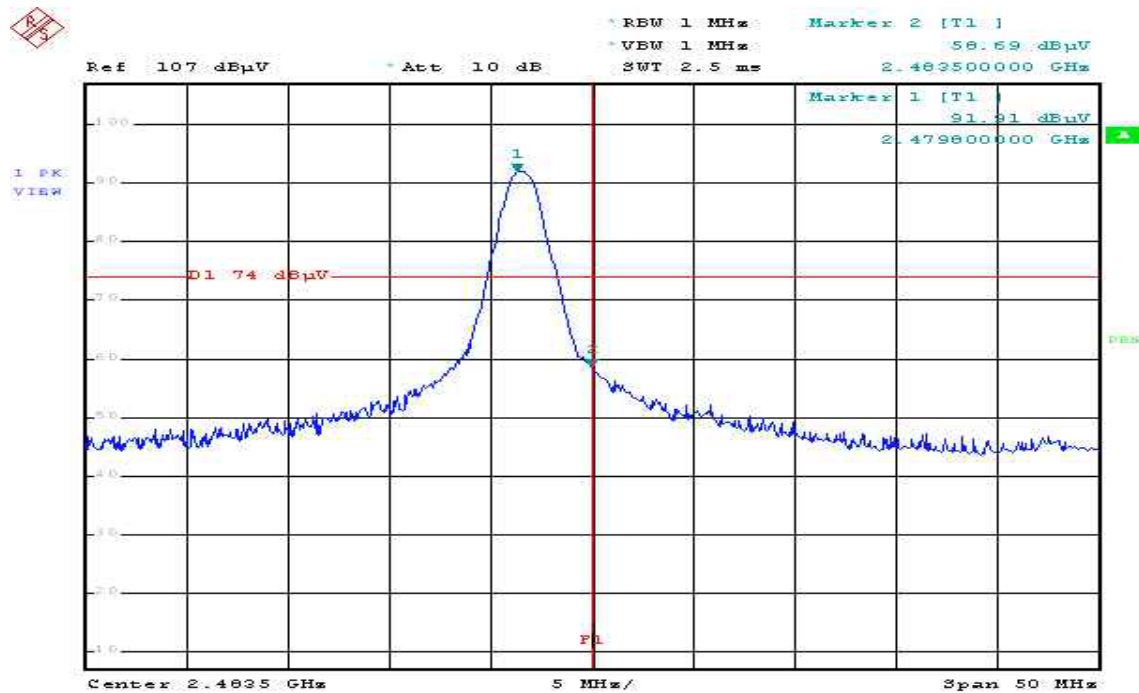

Date: 5.SEP.2003 11:17:33

Detector mode: Average

Polarity: Horizontal

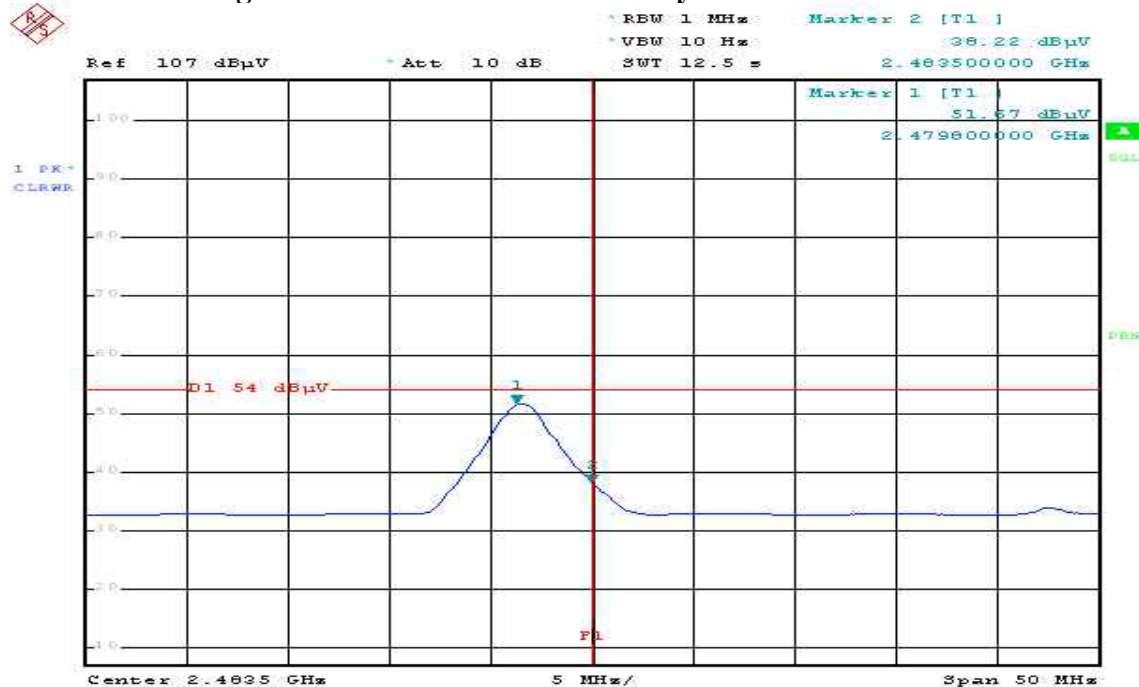

Date: 5.SEP.2003 11:18:26





### 7.3 PEAK POWER SPECTRAL DENSITY

#### LIMIT


1. For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.
2. The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

#### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
low loss cable	Huber + Suhner	Sucoflex 104	N/A	N/A
Spectrum Analyzer	Agilent	E4446A	US42510252	04/27/2004

*Remark: Each piece of equipment is scheduled for calibration once a year.*

#### Test Configuration



#### TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 300kHz, Sweep=100s
4. Record the max. reading.
5. Repeat the above procedure until the measurements for all frequencies are completed.

#### TEST RESULTS

*No non-compliance noted*


#### Test Data

Channel	Reading (dBm)	Cable Loss (dB)	PPSD (dBm)	Limit (dBm)	Result
Low	-12.73	0.80	-11.93	8.00	PASS
Mid	-13.56	0.80	-12.76		PASS
High	-13.14	0.80	-12.34		PASS




## Test Plot

### PPSD (Ch Low)

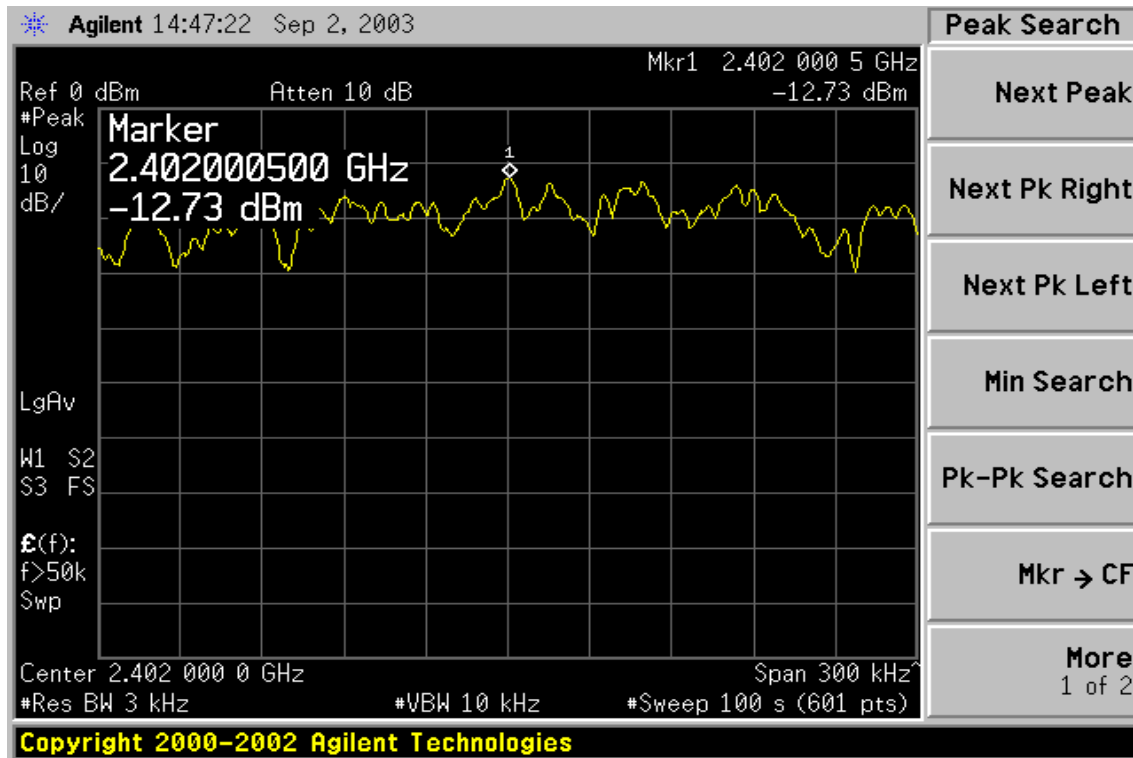


### PPSD (Ch Mid)

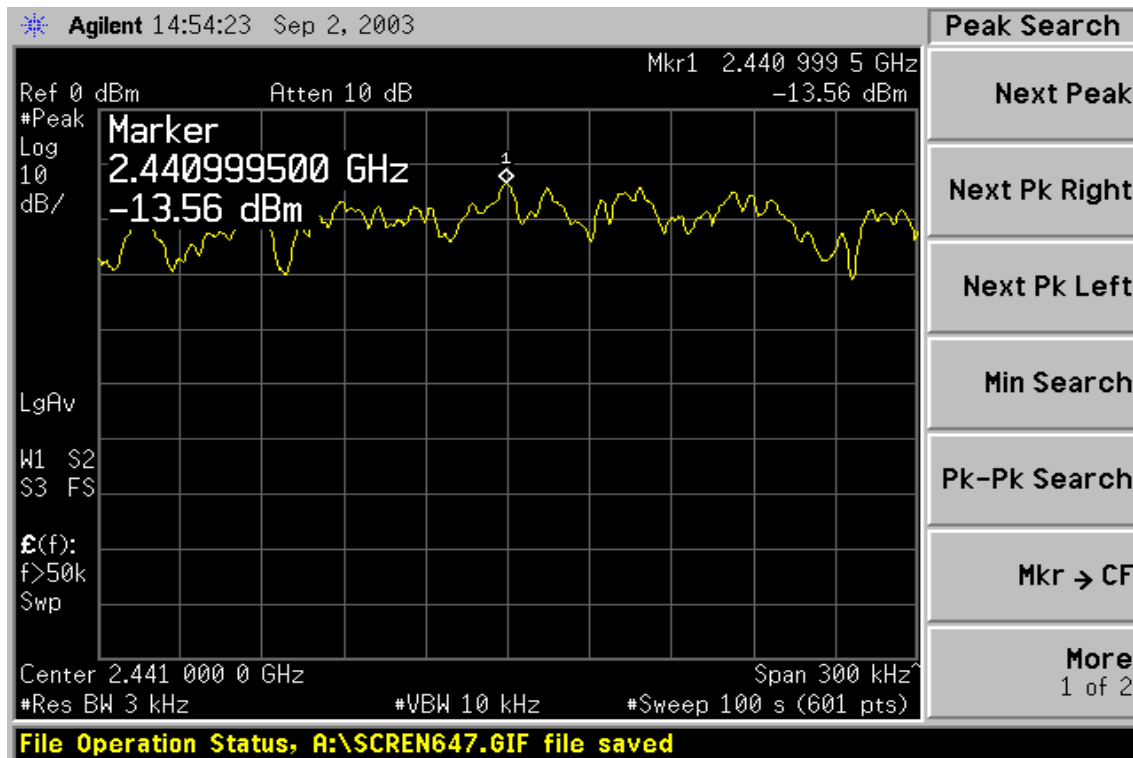



## PPSD (Ch High)

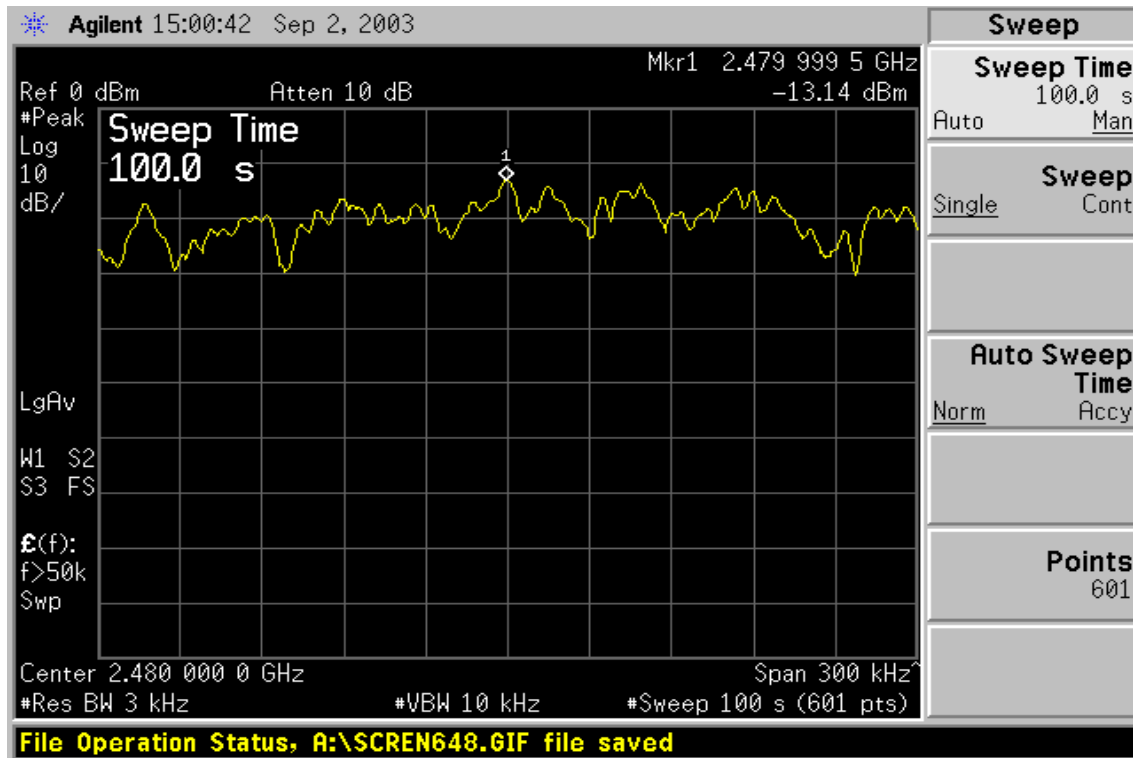



## 7.4 FREQUENCY SEPARATION

### LIMIT


According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.

### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	4/28/2004
Spectrum Analyzer	R&S	FSP30	1093.4495.30	7/22/2004
Low-loss Cable	Huber + Suhner	Sucoflex 104	N/A	N/A

**Remark:** Each piece of equipment is scheduled for calibration once a year.

### Test Configuration



### TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = middle of hopping channel.
4. Set the spectrum analyzer as RBW, VBW=100kHz, Adjust Span to 4.0 MHz, Sweep = auto.
5. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

### TEST RESULTS


*No non-compliance noted*

### Test Data


Channel Separation (M H z)	20 d B Bandwidth (k H z)	Lim it (k H z)	Result
1.00	917.87	> 25	Pass



### Test Plot (Measurement of Channel Separation)

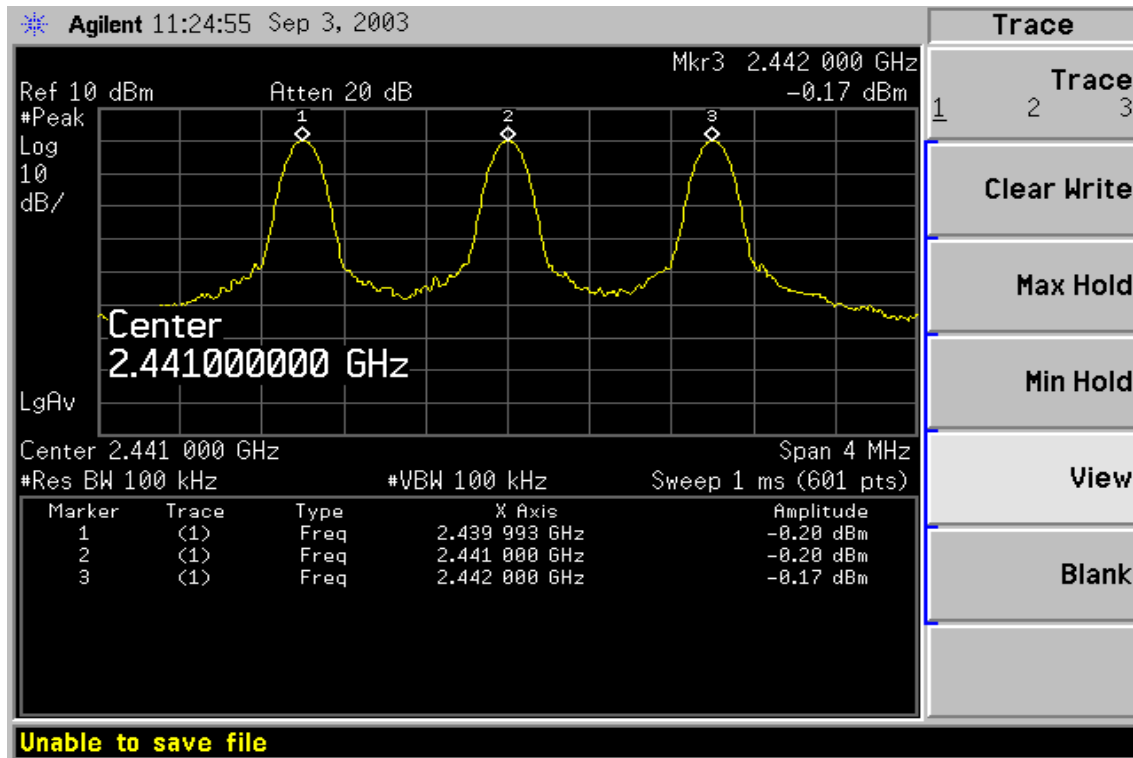

### Test Plot (Measurement of 20dB Bandwidth)

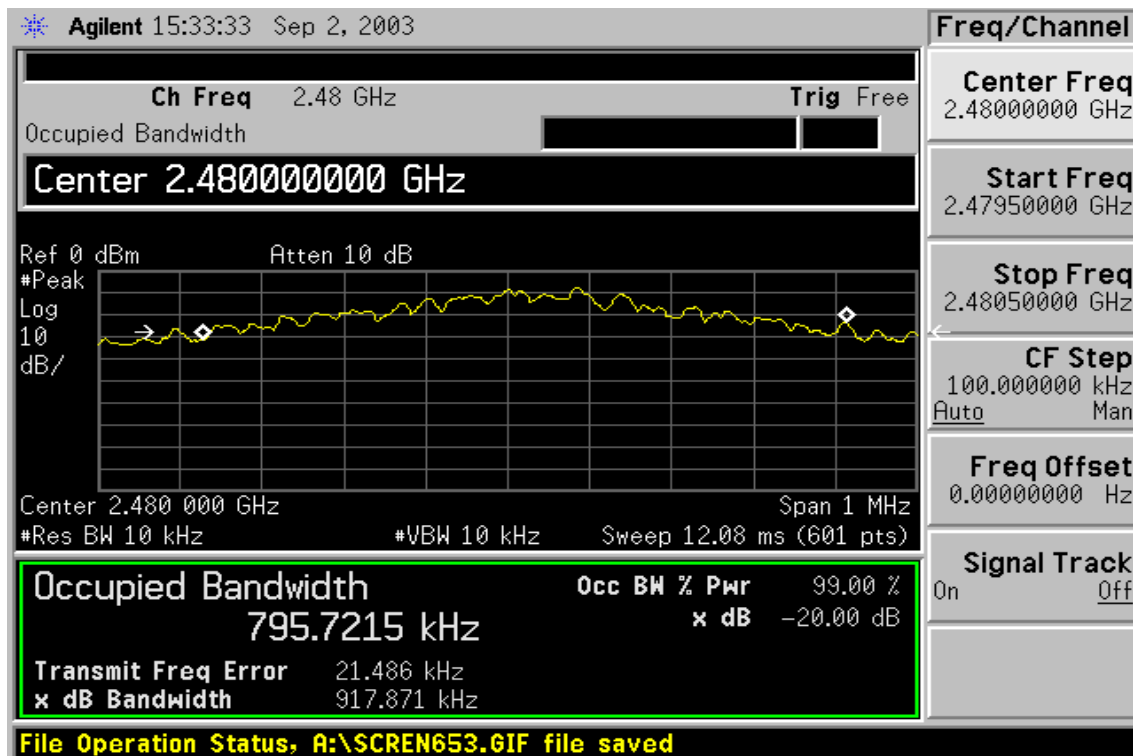



## 7.5 NUMBER OF HOPPING FREQUENCY

### LIMIT


According to §15.247(a)(1)(ii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 75 hopping frequencies.

### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	4/28/2004
Spectrum Analyzer	R&S	FSP30	1093.4495.30	7/22/2004
Low-loss Cable	Huber + Suhner	Sucoflex 104	N/A	N/A

**Remark:** Each piece of equipment is scheduled for calibration once a year.

### Test Configuration



### TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set spectrum analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = auto.
4. Set the spectrum analyzer as RBW, VBW=100kHz,
5. Max hold, view and count how many channel in the band.

### TEST RESULTS

*No non-compliance noted*


### Test Data

Result (No. of CH)	Limit (No. of CH)	Result
79	> 75	PASS




## Test Plot

### 2.4 GHz – 2.441 GHz

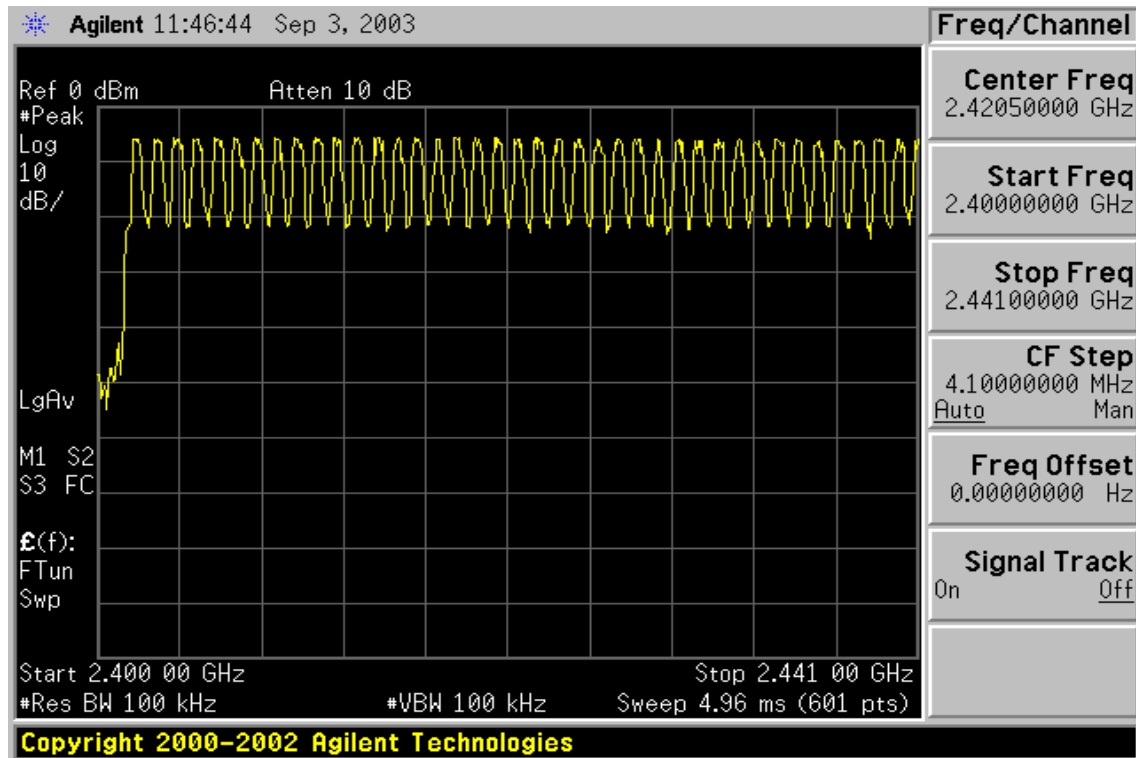

### 2.441 GHz – 2.4835 GHz

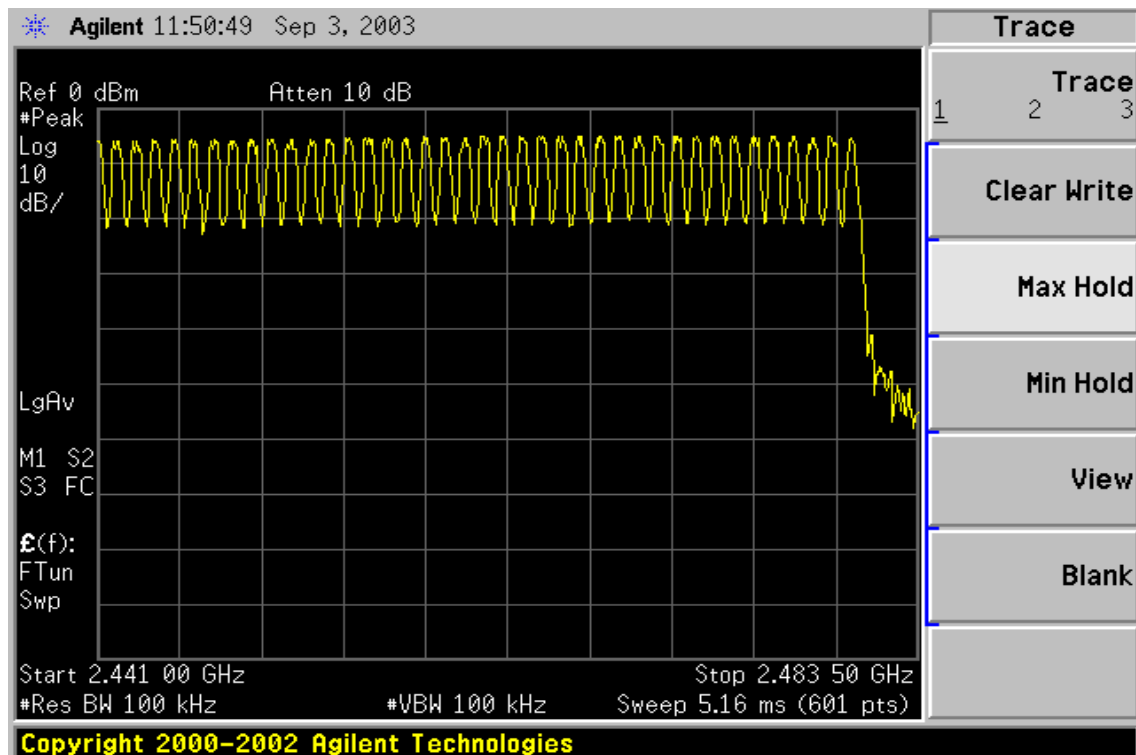



## 7.6 TIME OF OCCUPANCY (DWELL TIME)

### LIMIT


According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	04/28/2004
Spectrum Analyzer	R&S	FSP30	1093.4495.30	07/22/2004
Low-loss Cable	Huber + Suhner	Sucoflex 104	N/A	N/A

*Remark: Each piece of equipment is scheduled for calibration once a year.*

### Test Configuration



### TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW= 1MHz, VBW=3MHz, Span = 0Hz, Adjust Sweep = Auto.
5. Repeat above procedures until all frequency measured were complete.

### TEST RESULTS

*No non-compliance noted*

#### Test Data

CH Low:  $0.395 * 1600/79 * 30.0 = 240.00$  (ms)

CH Mid:  $0.396 * 1600/79 * 30.0 = 240.61$  (ms)

CH High:  $0.395 * 1600/79 * 30.0 = 240.00$  (ms)


C H	Pulse Time	Total of Dwell (m s)	Period Time (s)	Limit (m s)
L o w	0.395	240.00	30.00	400.00
M i d	0.396	240.61	30.00	400.00
H i g h	0.395	240.00	30.00	400.00






## Test Plot

### Dwell Time Test Data (CH-Low)

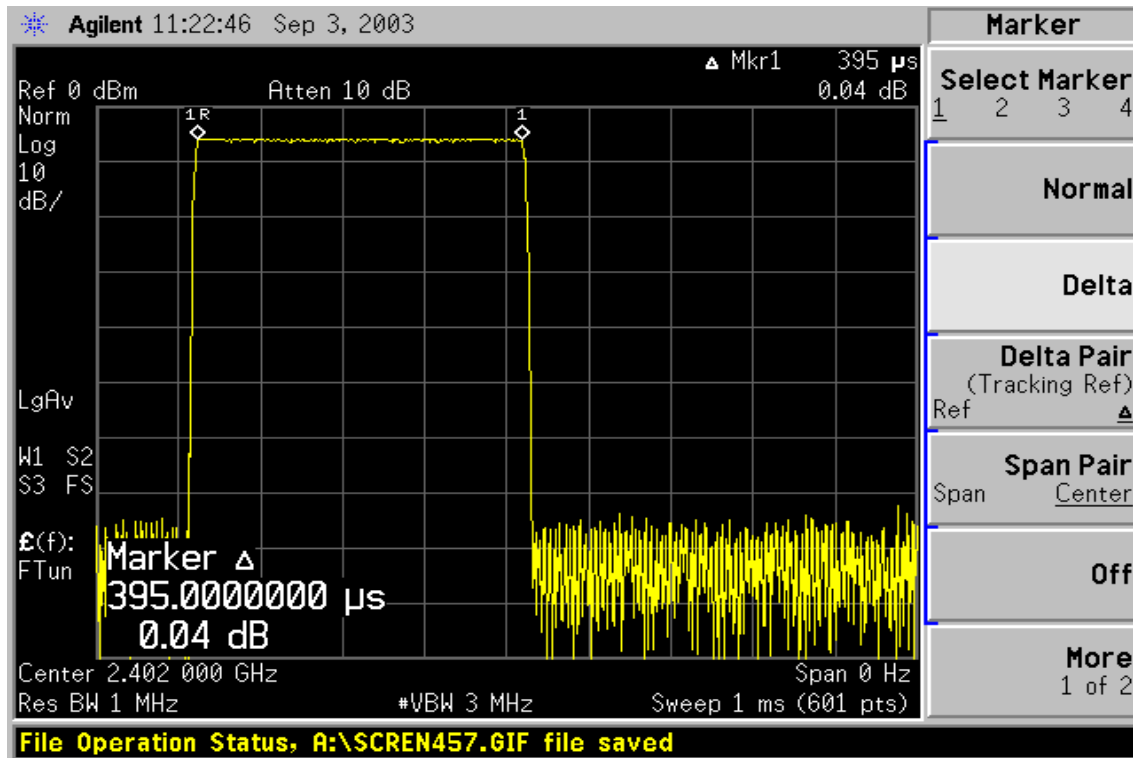

### Dwell Time Test Data (CH-Mid)

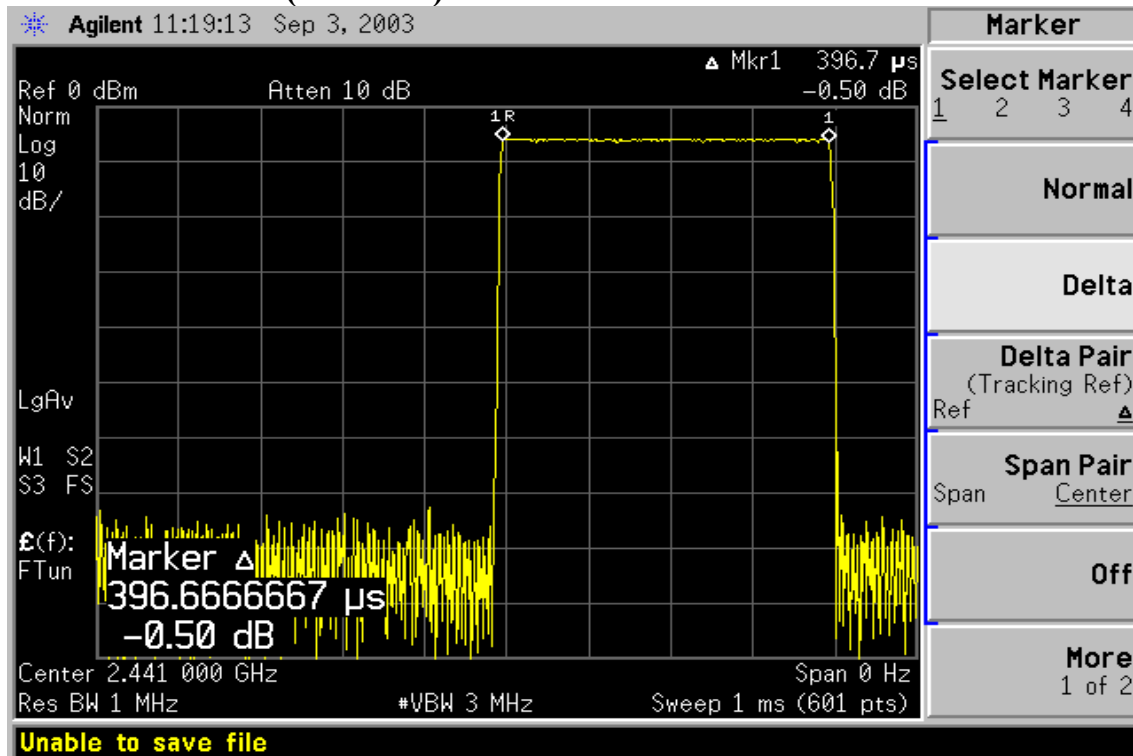





## 7.7 RADIO FREQUENCY EXPOSURE

### LIMIT

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See §15.247(b)(4) and §1.1307(b)(1) of this chapter.

### EUT Specification

<b>EUT</b>	900/ 1800/ 1900/ Bluetooth Mobile Handset
<b>Frequency band (Operating)</b>	<input type="checkbox"/> WLAN: 2.412GHz ~ 2.462GHz <input type="checkbox"/> WLAN: 5.18GHz ~ 5.32GHz / 5.50GHz ~ 5.70GHz <input type="checkbox"/> WLAN: 5.745GHz ~ 5825GHz <input checked="" type="checkbox"/> Others <u>Bluetooth: 2402GHz ~ 2480GHz</u>
<b>Device category</b>	<input checked="" type="checkbox"/> Portable (<20cm separation) <input type="checkbox"/> Mobile (>20cm separation) <input type="checkbox"/> Others _____
<b>Exposure classification</b>	<input type="checkbox"/> Occupational/Controlled exposure ( $S = 5mW/cm^2$ ) <input checked="" type="checkbox"/> General Population/Uncontrolled exposure ( $S=1mW/cm^2$ )
<b>Antenna diversity</b>	<input checked="" type="checkbox"/> Single antenna <input type="checkbox"/> Multiple antennas <input type="checkbox"/> Tx diversity <input checked="" type="checkbox"/> Rx diversity <input type="checkbox"/> Tx/Rx diversity
<b>Max. output power</b>	0.25 dBm (1.06mW)
<b>Antenna gain (Max)</b>	1 dBi (Numeric gain: 1.26)
<b>Evaluation applied</b>	<input type="checkbox"/> MPE Evaluation <input checked="" type="checkbox"/> SAR Evaluation*
<b>Note:</b> <i>*The maximum output power is 0.25dBm(1.06mW) at 2480MHz, which is exceeded the general population low threshold <math>60/F</math> (<math>60/2.441=0.02458W</math>), per the FCC rules, SAR evaluation is required.</i>	

### TEST RESULTS

**Note:** Please refer to the separate SAR report.



## 7.8 RADIATED EMISSIONS

### LIMIT

1. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

***Note:** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.*

2. In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength ( $\mu$ V/m at 3-meter)	Field Strength (dB $\mu$ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54




## **MEASUREMENT EQUIPMENT USED**

Open Area Test Site # 3				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	ADVANTEST	R3261A	N/A	3/18/2004
EMI Test Receiver	R&S	ESVS20	838804/004	1/04/2004
Pre-Amplifier	HP	8447D	2944A09173	3/03/2004
Bilog Antenna	SCHWAZBEC K	VULB9163	145	7/05/2004
Turn Table	EMCO	2081-1.21	9709-1885	N.C.R
Antenna Tower	EMCO	2075-2	9707-2060	N.C.R
Controller	EMCO	2090	9709-1256	N.C.R
RF Switch	ANRITSU	MP59B	M53867	N.C.R
Site NSA	C&C	N/A	N/A	9/06/2004
Horn antenna	Schwarzbeck	BBHA 9120	D210	2/23/2004
Loop Antenna	EMCO	6502	2356	7/10/2004
Pre-Amplifier	HP	8449B	3008B00965	10/02/2003


**Remark:** Each piece of equipment is scheduled for calibration once a year.

## **Test Configuration**

### **Below 1 GHz**

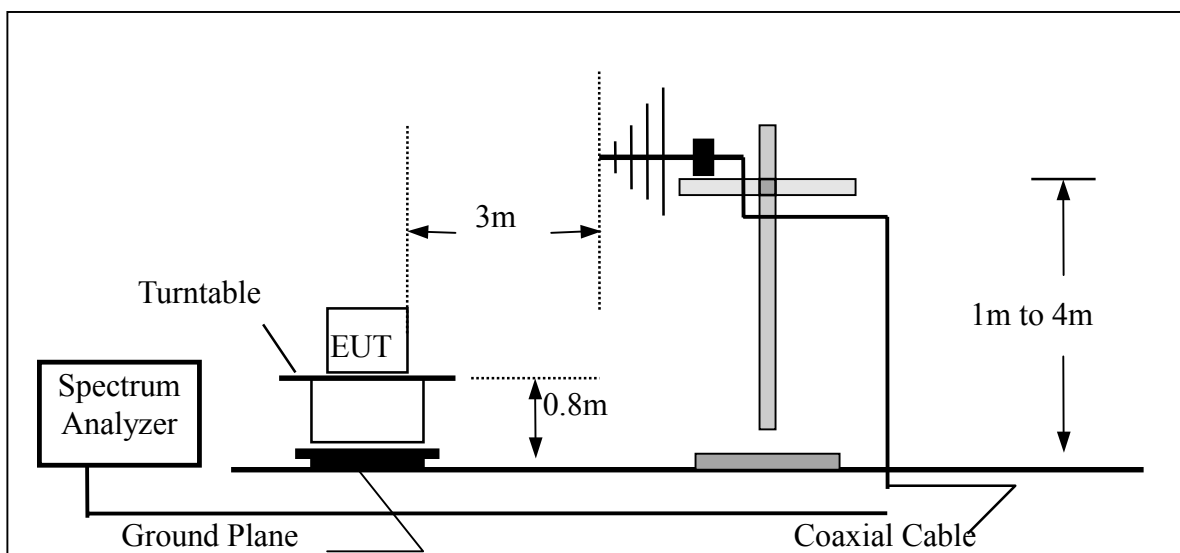

## Above 1 GHz

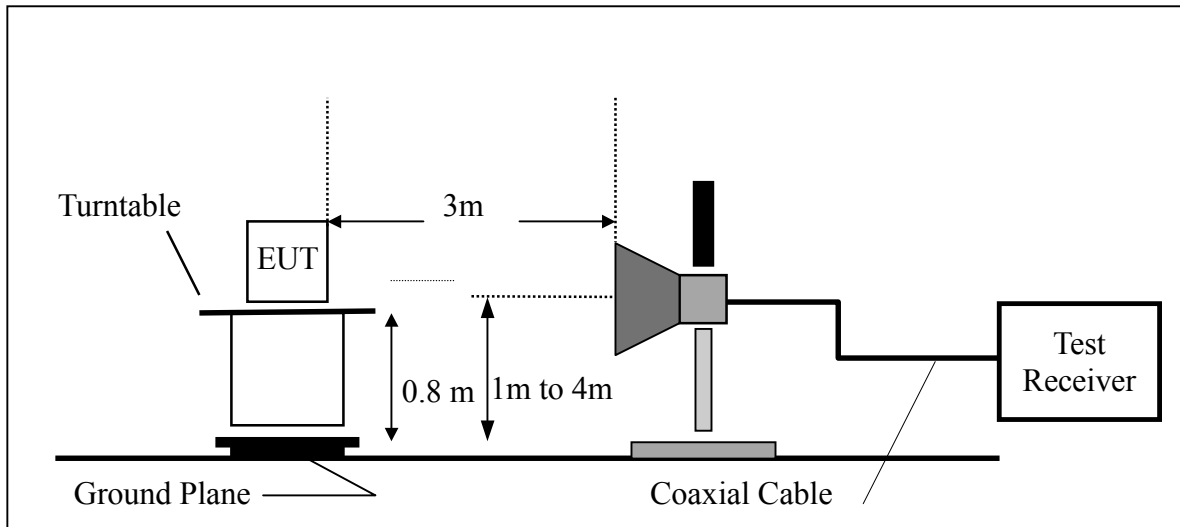

## TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

**TEST RESULTS****Below 1 GHz****Condition A: Bluetooth operation**

**Operation Mode:** Tx CH Low X Mode      **Test Date:** September 5, 2003  
**Temperature:** 30°C      **Tested by:** Jim  
**Humidity:** 55 % RH      **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
-	V	Peak	-	-	-	-	-
-	V	Peak	-	-	-	-	-
-	V	Peak	-	-	-	-	-
-	V	Peak	-	-	-	-	-
-	V	Peak	-	-	-	-	-
-	V	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-

***Notes:***

- Measuring frequencies from 30 MHz to the 1GHz.*
- Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.*
- Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
- The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.*



<b>Operation Mode:</b>	Tx CH Mid X Mode	<b>Test Date:</b>	September 5, 2003
<b>Temperature:</b>	30°C	<b>Tested by:</b>	Jim
<b>Humidity:</b>	55 % RH	<b>Polarity:</b>	Ver. / Hor.

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit 3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
-	V	Peak	-	-	-	-	-
-	V	Peak	-	-	-	-	-
-	V	Peak	-	-	-	-	-
-	V	Peak	-	-	-	-	-
-	V	Peak	-	-	-	-	-
-	V	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-

**Notes:**

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.





**Operation Mode:** Tx CH High X Mode **Test Date:** September 5, 2003  
**Temperature:** 30°C **Tested by:** Jim  
**Humidity:** 55 % RH **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
-	V	Peak	-	-	-	-	-
-	V	Peak	-	-	-	-	-
-	V	Peak	-	-	-	-	-
-	V	Peak	-	-	-	-	-
-	V	Peak	-	-	-	-	-
-	V	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-

**Notes:**

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.



**Operation Mode:** Tx CH Low Y Mode      **Test Date:** September 5, 2003  
**Temperature:** 30°C      **Tested by:** Jim  
**Humidity:** 55 % RH      **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
-	V	Peak	-	-	-	-	-
-	V	Peak	-	-	-	-	-
-	V	Peak	-	-	-	-	-
-	V	Peak	-	-	-	-	-
-	V	Peak	-	-	-	-	-
-	V	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-

**Notes:**

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.



<b>Operation Mode:</b>	Tx CH Mid Y Mode	<b>Test Date:</b>	September 5, 2003
<b>Temperature:</b>	30°C	<b>Tested by:</b>	Jim
<b>Humidity:</b>	55 % RH	<b>Polarity:</b>	Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
-	V	Peak	-	-	-	-	-
-	V	Peak	-	-	-	-	-
-	V	Peak	-	-	-	-	-
-	V	Peak	-	-	-	-	-
-	V	Peak	-	-	-	-	-
-	V	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-

**Notes:**

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.



<b>Operation Mode:</b>	Tx CH High Y Mode	<b>Test Date:</b>	September 5, 2003
<b>Temperature:</b>	30°C	<b>Tested by:</b>	Jim
<b>Humidity:</b>	55 % RH	<b>Polarity:</b>	Ver. / Hor.

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit 3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
-	V	Peak	-	-	-	-	-
-	V	Peak	-	-	-	-	-
-	V	Peak	-	-	-	-	-
-	V	Peak	-	-	-	-	-
-	V	Peak	-	-	-	-	-
-	V	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-

**Notes:**

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.



**Operation Mode:** Tx CH Low Z Mode      **Test Date:** September 5, 2003  
**Temperature:** 30°C      **Tested by:** Jim  
**Humidity:** 55 % RH      **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
-	V	Peak	-	-	-	-	-
-	V	Peak	-	-	-	-	-
-	V	Peak	-	-	-	-	-
-	V	Peak	-	-	-	-	-
-	V	Peak	-	-	-	-	-
-	V	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-

**Notes:**

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.



<b>Operation Mode:</b>	Tx CH Mid Z Mode	<b>Test Date:</b>	September 5, 2003
<b>Temperature:</b>	30°C	<b>Tested by:</b>	Jim
<b>Humidity:</b>	55 % RH	<b>Polarity:</b>	Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
-	V	Peak	-	-	-	-	-
-	V	Peak	-	-	-	-	-
-	V	Peak	-	-	-	-	-
-	V	Peak	-	-	-	-	-
-	V	Peak	-	-	-	-	-
-	V	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-

**Notes:**

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.



**Operation Mode:** Tx CH High Z Mode      **Test Date:** September 5, 2003  
**Temperature:** 30°C      **Tested by:** Jim  
**Humidity:** 55 % RH      **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
-	V	Peak	-	-	-	-	-
-	V	Peak	-	-	-	-	-
-	V	Peak	-	-	-	-	-
-	V	Peak	-	-	-	-	-
-	V	Peak	-	-	-	-	-
-	V	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-
-	H	Peak	-	-	-	-	-

**Notes:**

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.

**Above 1 GHz**

**Operation Mode:** Tx CH Low X Mode      **Test Date:** September 4, 2003  
**Temperature:** 30°C      **Tested by:** Jim  
**Humidity:** 55 % RH      **Polarity:** Ver.

Freq. (MHz)	Peak		Ant./CL CF(dB)	Actual FS		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
	Reading (dBuV)	Reading (dBuV)		Peak (dBuV/m)	AV (dBuV/m)				
2352.00	49.17	---	-3.22	45.95	---	74.00	54.00	-8.05	Peak
2380.00	48.29	---	-3.14	45.15	---	74.00	54.00	-8.85	Peak
2404.00	98.95	---	-3.06	95.89	---	---	---	---	Fundamental
2428.00	47.62	---	-2.98	44.64	---	74.00	54.00	-9.36	Peak
2456.00	49.26	---	-2.89	46.37	---	74.00	54.00	-7.63	Peak
4804.00	2.00	---	---	---	---	74.00	54.00	---	---
7206.00	3.00	---	---	---	---	74.00	54.00	---	---
9608.00	4.00	---	---	---	---	74.00	54.00	---	---
12010.00	5.00	---	---	---	---	74.00	54.00	---	---
14412.00	6.00	---	---	---	---	74.00	54.00	---	---
16814.00	7.00	---	---	---	---	74.00	54.00	---	---
19216.00	8.00	---	---	---	---	74.00	54.00	---	---
21618.00	9.00	---	---	---	---	74.00	54.00	---	---
24020.00	10.00	---	---	---	---	74.00	54.00	---	---

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
5. Spectrum AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms





**Operation Mode:** Tx CH Low X Mode      **Test Date:** September 4, 2003  
**Temperature:** 30°C      **Tested by:** Jim  
**Humidity:** 55 % RH      **Polarity:** Hor.

Freq. (MHz)	Peak Reading	AV Reading	Ant./CL CF(dB)	Actual FS		Peak Limit	AV Limit	Margin (dB)	Remark
	(dBuV)	(dBuV)		Peak (dBuV/m)	AV (dBuV/m)	(dBuV/m)	(dBuV/m)		
1192.00	47.59	---	-9.07	38.52	---	74.00	54.00	-15.48	Peak
2404.00	91.68	---	-3.06	88.62	---	---	---	---	Fundamental
4804.00	---	---	---	---	---	74.00	54.00	---	---
7206.00	---	---	---	---	---	74.00	54.00	---	---
9608.00	---	---	---	---	---	74.00	54.00	---	---
12010.00	---	---	---	---	---	74.00	54.00	---	---
14412.00	---	---	---	---	---	74.00	54.00	---	---
16814.00	---	---	---	---	---	74.00	54.00	---	---
19216.00	---	---	---	---	---	74.00	54.00	---	---
21618.00	---	---	---	---	---	74.00	54.00	---	---
24020.00	---	---	---	---	---	74.00	54.00	---	---

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
5. Spectrum AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms



**Operation Mode:** Tx CH Mid X Mode      **Test Date:** September 4, 2003  
**Temperature:** 30°C      **Tested by:** Jim  
**Humidity:** 55 % RH      **Polarity:** Ver.

Freq. (MHz)	Peak Reading (dBuV)	AV Reading (dBuV)	Ant./CL CF(dB)	Actual FS Peak (dBuV/m)	Actual FS AV (dBuV/m)	Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
1592.00	48.84	---	-6.85	41.99	---	74.00	54.00	-12.01	Peak
2340.00	46.93	---	-3.25	43.68	---	74.00	54.00	-10.32	Peak
2388.00	48.69	---	-3.11	45.58	---	74.00	54.00	-8.42	Peak
2416.00	48.61	---	-3.02	45.59	---	74.00	54.00	-8.41	Peak
2444.00	98.87	---	-2.93	95.94	---	---	---	---	Fundamental
2468.00	48.33	---	-2.85	45.48	---	74.00	54.00	-8.52	Peak
2496.00	49.62	---	-2.76	46.86	---	74.00	54.00	-7.14	Peak
4882.00	---	---	---	---	---	74.00	54.00	---	---
7323.00	---	---	---	---	---	74.00	54.00	---	---
9764.00	---	---	---	---	---	74.00	54.00	---	---
12205.00	---	---	---	---	---	74.00	54.00	---	---
14646.00	---	---	---	---	---	74.00	54.00	---	---
17087.00	---	---	---	---	---	74.00	54.00	---	---
19528.00	---	---	---	---	---	74.00	54.00	---	---
21969.00	---	---	---	---	---	74.00	54.00	---	---
24410.00	---	---	---	---	---	74.00	54.00	---	---

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
5. Spectrum AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms



**Operation Mode:** Tx CH Mid X Mode      **Test Date:** September 4, 2003  
**Temperature:** 30°C      **Tested by:** Jim  
**Humidity:** 55 % RH      **Polarity:** Hor.

Freq. (MHz)	Peak Reading	AV Reading	Ant./CL CF(dB)	Actual FS		Peak Limit	AV Limit	Margin (dB)	Remark
	(dBuV)	(dBuV)		Peak (dBuV/m)	AV (dBuV/m)	(dBuV/m)	(dBuV/m)		
2444.00	91.90	---	-2.93	88.97	---	---	---	---	Fundamental
4882.00	---	---	---	---	---	74.00	54.00	---	---
7323.00	---	---	---	---	---	74.00	54.00	---	---
9764.00	---	---	---	---	---	74.00	54.00	---	---
12205.00	---	---	---	---	---	74.00	54.00	---	---
14646.00	---	---	---	---	---	74.00	54.00	---	---
17087.00	---	---	---	---	---	74.00	54.00	---	---
19528.00	---	---	---	---	---	74.00	54.00	---	---
21969.00	---	---	---	---	---	74.00	54.00	---	---
24410.00	---	---	---	---	---	74.00	54.00	---	---

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
5. Spectrum AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms



**Operation Mode:** Tx CH High X Mode      **Test Date:** September 4, 2003  
**Temperature:** 30°C      **Tested by:** Jim  
**Humidity:** 55 % RH      **Polarity:** Ver.

Freq. (MHz)	Peak	AV	Ant./CL CF(dB)	Actual FS		Peak	AV	Margin (dB)	Remark
	Reading (dBuV)	Reading (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/m)		
1596.00	49.46	---	-6.82	42.64	---	74.00	54.00	-11.36	Peak
2352.00	46.60	---	-3.22	43.38	---	74.00	54.00	-10.62	Peak
2380.00	46.23	---	-3.14	43.09	---	74.00	54.00	-10.91	Peak
2404.00	48.36	---	-3.06	45.30	---	74.00	54.00	-8.70	Peak
2428.00	48.54	---	-2.98	45.56	---	74.00	54.00	-8.44	Peak
2456.00	47.13	---	-2.89	44.24	---	74.00	54.00	-9.76	Peak
2480.00	98.96	---	-2.82	96.14	---	---	---	---	Fundamental
2532.00	46.26	---	-2.68	43.58	---	74.00	54.00	-10.42	Peak
4960.00	---	---	---	---	---	74.00	54.00	---	---
7440.00	---	---	---	---	---	74.00	54.00	---	---
9920.00	---	---	---	---	---	74.00	54.00	---	---
12400.00	---	---	---	---	---	74.00	54.00	---	---
14880.00	---	---	---	---	---	74.00	54.00	---	---
17360.00	---	---	---	---	---	74.00	54.00	---	---
19840.00	---	---	---	---	---	74.00	54.00	---	---
22320.00	---	---	---	---	---	74.00	54.00	---	---
24800.00	---	---	---	---	---	74.00	54.00	---	---

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
5. Spectrum AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms



**Operation Mode:** Tx CH High X Mode **Test Date:** September 4, 2003  
**Temperature:** 30°C **Tested by:** Jim  
**Humidity:** 55 % RH **Polarity:** Hor.

Freq. (MHz)	Peak Reading	AV Reading	Ant./CL CF(dB)	Actual FS		Peak Limit	AV Limit	Margin (dB)	Remark
	(dBuV)	(dBuV)		Peak (dBuV/m)	AV (dBuV/m)	(dBuV/m)	(dBuV/m)		
2480.00	94.52	---	-2.82	91.70	---	---	---	---	Fundamental
4960.00	---	---	---	---	---	74.00	54.00	---	---
7440.00	---	---	---	---	---	74.00	54.00	---	---
9920.00	---	---	---	---	---	74.00	54.00	---	---
12400.00	---	---	---	---	---	74.00	54.00	---	---
14880.00	---	---	---	---	---	74.00	54.00	---	---
17360.00	---	---	---	---	---	74.00	54.00	---	---
19840.00	---	---	---	---	---	74.00	54.00	---	---
22320.00	---	---	---	---	---	74.00	54.00	---	---
24800.00	---	---	---	---	---	74.00	54.00	---	---

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
5. Spectrum AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms



**Operation Mode:** Tx CH Low Y Mode      **Test Date:** September 4, 2003  
**Temperature:** 30°C      **Tested by:** Jim  
**Humidity:** 55 % RH      **Polarity:** Ver.

Freq. (MHz)	Peak Reading	AV Reading	Ant./CL CF(dB)	Actual FS		Peak Limit	AV Limit	Margin (dB)	Remark
	(dBuV)	(dBuV)		Peak (dBuV/m)	AV (dBuV/m)	(dBuV/m)	(dBuV/m)		
1596.00	50.34	---	-6.82	43.52	---	74.00	54.00	-10.48	Peak
2404.00	93.03	---	-3.06	89.97	---	---	---	---	Fundamental
4804.00	---	---	---	---	---	74.00	54.00	---	---
7206.00	---	---	---	---	---	74.00	54.00	---	---
9608.00	---	---	---	---	---	74.00	54.00	---	---
12010.00	---	---	---	---	---	74.00	54.00	---	---
14412.00	---	---	---	---	---	74.00	54.00	---	---
16814.00	---	---	---	---	---	74.00	54.00	---	---
19216.00	---	---	---	---	---	74.00	54.00	---	---
21618.00	---	---	---	---	---	74.00	54.00	---	---
24020.00	---	---	---	---	---	74.00	54.00	---	---

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
5. Spectrum AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms



**Operation Mode:** Tx CH Low Y Mode **Test Date:** September 4, 2003  
**Temperature:** 30°C **Tested by:** Jim  
**Humidity:** 55 % RH **Polarity:** Hor.

Freq. (MHz)	Peak Reading	AV Reading	Ant./CL CF(dB)	Actual FS		Peak Limit	AV Limit	Margin (dB)	Remark
	(dBuV)	(dBuV)		Peak (dBuV/m)	AV (dBuV/m)	(dBuV/m)	(dBuV/m)		
2404.00	92.62	---	-3.06	89.56	---	---	---	---	Fundamental
4804.00	---	---	---	---	---	74.00	54.00	---	---
7206.00	---	---	---	---	---	74.00	54.00	---	---
9608.00	---	---	---	---	---	74.00	54.00	---	---
12010.00	---	---	---	---	---	74.00	54.00	---	---
14412.00	---	---	---	---	---	74.00	54.00	---	---
16814.00	---	---	---	---	---	74.00	54.00	---	---
19216.00	---	---	---	---	---	74.00	54.00	---	---
21618.00	---	---	---	---	---	74.00	54.00	---	---
24020.00	---	---	---	---	---	74.00	54.00	---	---

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
5. Spectrum AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms



**Operation Mode:** Tx CH Mid Y Mode      **Test Date:** September 4, 2003  
**Temperature:** 30°C      **Tested by:** Jim  
**Humidity:** 55 % RH      **Polarity:** Ver.

Freq. (MHz)	Peak Reading (dBuV)	AV Reading (dBuV)	Ant./CL CF(dB)	Actual FS Peak (dBuV/m)	Actual FS AV (dBuV/m)	Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
1596.00	49.67	---	-6.82	42.85	---	74.00	54.00	-11.15	Peak
2444.00	92.79	---	-2.93	89.86	---	---	---	---	Fundamental
4882.00	---	---	---	---	---	74.00	54.00	---	---
7323.00	---	---	---	---	---	74.00	54.00	---	---
9764.00	---	---	---	---	---	74.00	54.00	---	---
12205.00	---	---	---	---	---	74.00	54.00	---	---
14646.00	---	---	---	---	---	74.00	54.00	---	---
17087.00	---	---	---	---	---	74.00	54.00	---	---
19528.00	---	---	---	---	---	74.00	54.00	---	---
21969.00	---	---	---	---	---	74.00	54.00	---	---
24410.00	---	---	---	---	---	74.00	54.00	---	---

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
5. Spectrum AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms





**Operation Mode:** Tx CH Mid Y Mode **Test Date:** September 4, 2003  
**Temperature:** 30°C **Tested by:** Jim  
**Humidity:** 55 % RH **Polarity:** Hor.

Freq. (MHz)	Peak Reading	AV Reading	Ant./CL CF(dB)	Actual FS		Peak Limit	AV Limit	Margin (dB)	Remark
	(dBuV)	(dBuV)		Peak (dBuV/m)	AV (dBuV/m)	(dBuV/m)	(dBuV/m)		
2444.00	92.01	---	-2.93	89.08	---	---	---	---	Fundamental
4882.00	---	---	---	---	---	74.00	54.00	---	---
7323.00	---	---	---	---	---	74.00	54.00	---	---
9764.00	---	---	---	---	---	74.00	54.00	---	---
12205.00	---	---	---	---	---	74.00	54.00	---	---
14646.00	---	---	---	---	---	74.00	54.00	---	---
17087.00	---	---	---	---	---	74.00	54.00	---	---
19528.00	---	---	---	---	---	74.00	54.00	---	---
21969.00	---	---	---	---	---	74.00	54.00	---	---
24410.00	---	---	---	---	---	74.00	54.00	---	---

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
5. Spectrum AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms



**Operation Mode:** Tx CH High Y Mode      **Test Date:** September 4, 2003  
**Temperature:** 30°C      **Tested by:** Jim  
**Humidity:** 55 % RH      **Polarity:** Ver.

Freq. (MHz)	Peak Reading (dBuV)	AV Reading (dBuV)	Ant./CL CF(dB)	Actual FS Peak (dBuV/m)	Actual FS AV (dBuV/m)	Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
1596.00	49.99	---	-6.82	43.17	---	74.00	54.00	-10.83	Peak
2480.00	93.95	---	-2.82	91.13	---	---	---	---	Fundamental
4960.00	---	---	---	---	---	74.00	54.00	---	---
7440.00	---	---	---	---	---	74.00	54.00	---	---
9920.00	---	---	---	---	---	74.00	54.00	---	---
12400.00	---	---	---	---	---	74.00	54.00	---	---
14880.00	---	---	---	---	---	74.00	54.00	---	---
17360.00	---	---	---	---	---	74.00	54.00	---	---
19840.00	---	---	---	---	---	74.00	54.00	---	---
22320.00	---	---	---	---	---	74.00	54.00	---	---
24800.00	---	---	---	---	---	74.00	54.00	---	---

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
5. Spectrum AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms



**Operation Mode:** Tx CH High Y Mode      **Test Date:** September 4, 2003  
**Temperature:** 30°C      **Tested by:** Jim  
**Humidity:** 55 % RH      **Polarity:** Hor.

Freq. (MHz)	Peak Reading	AV Reading	Ant./CL CF(dB)	Actual FS		Peak Limit	AV Limit	Margin (dB)	Remark
	(dBuV)	(dBuV)		Peak (dBuV/m)	AV (dBuV/m)	(dBuV/m)	(dBuV/m)		
2480.00	93.47	---	-2.82	90.65	---	---	---	---	Fundamental
4960.00	---	---	---	---	---	74.00	54.00	---	---
7440.00	---	---	---	---	---	74.00	54.00	---	---
9920.00	---	---	---	---	---	74.00	54.00	---	---
12400.00	---	---	---	---	---	74.00	54.00	---	---
14880.00	---	---	---	---	---	74.00	54.00	---	---
17360.00	---	---	---	---	---	74.00	54.00	---	---
19840.00	---	---	---	---	---	74.00	54.00	---	---
22320.00	---	---	---	---	---	74.00	54.00	---	---
24800.00	---	---	---	---	---	74.00	54.00	---	---

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
5. Spectrum AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms



**Operation Mode:** Tx CH Low Z Mode      **Test Date:** September 4, 2003  
**Temperature:** 30°C      **Tested by:** Jim  
**Humidity:** 55 % RH      **Polarity:** Ver.

Freq. (MHz)	Peak Reading (dBuV)	AV Reading (dBuV)	Ant./CL CF(dB)	Actual FS Peak (dBuV/m)	Actual FS AV (dBuV/m)	Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
1596.00	49.93	---	-6.82	43.11	---	74.00	54.00	-10.89	Peak
2404.00	94.82	---	-3.06	91.76	---	---	---	---	Fundamental
2532.00	46.24	---	-2.68	43.56	---	74.00	54.00	-10.44	Peak
4804.00	---	---	---	---	---	74.00	54.00	---	---
7206.00	---	---	---	---	---	74.00	54.00	---	---
9608.00	---	---	---	---	---	74.00	54.00	---	---
12010.00	---	---	---	---	---	74.00	54.00	---	---
14412.00	---	---	---	---	---	74.00	54.00	---	---
16814.00	---	---	---	---	---	74.00	54.00	---	---
19216.00	---	---	---	---	---	74.00	54.00	---	---
21618.00	---	---	---	---	---	74.00	54.00	---	---
24020.00	---	---	---	---	---	74.00	54.00	---	---

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
5. Spectrum AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms



**Operation Mode:** Tx CH Low Z Mode      **Test Date:** September 4, 2003  
**Temperature:** 30°C      **Tested by:** Jim  
**Humidity:** 55 % RH      **Polarity:** Hor.

Freq. (MHz)	Peak Reading	AV Reading	Ant./CL CF(dB)	Actual FS		Peak Limit	AV Limit	Margin (dB)	Remark
	(dBuV)	(dBuV)		Peak (dBuV/m)	AV (dBuV/m)	(dBuV/m)	(dBuV/m)		
2352.00	46.83	---	-3.22	43.61	---	74.00	54.00	-10.39	Peak
2404.00	94.08	---	-3.06	91.02	---	---	---	---	Fundamental
4804.00	---	---	---	---	---	74.00	54.00	---	---
7206.00	---	---	---	---	---	74.00	54.00	---	---
9608.00	---	---	---	---	---	74.00	54.00	---	---
12010.00	---	---	---	---	---	74.00	54.00	---	---
14412.00	---	---	---	---	---	74.00	54.00	---	---
16814.00	---	---	---	---	---	74.00	54.00	---	---
19216.00	---	---	---	---	---	74.00	54.00	---	---
21618.00	---	---	---	---	---	74.00	54.00	---	---
24020.00	---	---	---	---	---	74.00	54.00	---	---

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
5. Spectrum AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms



**Operation Mode:** Tx CH Mid Z Mode      **Test Date:** September 4, 2003  
**Temperature:** 30°C      **Tested by:** Jim  
**Humidity:** 55 % RH      **Polarity:** Ver.

Freq. (MHz)	Peak Reading (dBuV)	AV Reading (dBuV)	Ant./CL CF(dB)	Actual FS Peak (dBuV/m)	Actual FS AV (dBuV/m)	Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
1064.00	49.72	---	-9.98	39.74	---	74.00	54.00	-14.26	Peak
1328.00	47.72	---	-8.55	39.17	---	74.00	54.00	-14.83	Peak
1596.00	48.73	---	-6.82	41.91	---	74.00	54.00	-12.09	Peak
2444.00	93.71	---	-2.93	90.78	---	---	---	---	Fundamental
4882.00	---	---	---	---	---	74.00	54.00	---	---
7323.00	---	---	---	---	---	74.00	54.00	---	---
9764.00	---	---	---	---	---	74.00	54.00	---	---
12205.00	---	---	---	---	---	74.00	54.00	---	---
14646.00	---	---	---	---	---	74.00	54.00	---	---
17087.00	---	---	---	---	---	74.00	54.00	---	---
19528.00	---	---	---	---	---	74.00	54.00	---	---
21969.00	---	---	---	---	---	74.00	54.00	---	---
24410.00	---	---	---	---	---	74.00	54.00	---	---

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
5. Spectrum AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms



**Operation Mode:** Tx CH Mid Z Mode      **Test Date:** September 4, 2003  
**Temperature:** 30°C      **Tested by:** Jim  
**Humidity:** 55 % RH      **Polarity:** Hor.

Freq. (MHz)	Peak Reading	AV Reading	Ant./CL CF(dB)	Actual FS		Peak Limit	AV Limit	Margin (dB)	Remark
	(dBuV)	(dBuV)		Peak (dBuV/m)	AV (dBuV/m)	(dBuV/m)	(dBuV/m)		
1948.00	45.67	---	-4.75	40.92	---	74.00	54.00	-13.08	Peak
2444.00	92.91	---	-2.93	89.98	---	---	---	---	Fundamental
4882.00	---	---	---	---	---	74.00	54.00	---	---
7323.00	---	---	---	---	---	74.00	54.00	---	---
9764.00	---	---	---	---	---	74.00	54.00	---	---
12205.00	---	---	---	---	---	74.00	54.00	---	---
14646.00	---	---	---	---	---	74.00	54.00	---	---
17087.00	---	---	---	---	---	74.00	54.00	---	---
19528.00	---	---	---	---	---	74.00	54.00	---	---
21969.00	---	---	---	---	---	74.00	54.00	---	---
24410.00	---	---	---	---	---	74.00	54.00	---	---

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
5. Spectrum AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms



**Operation Mode:** Tx CH High Z Mode      **Test Date:** September 4, 2003  
**Temperature:** 30°C      **Tested by:** Jim  
**Humidity:** 55 % RH      **Polarity:** Ver.

Freq. (MHz)	Peak Reading (dBuV)	AV Reading (dBuV)	Ant./CL CF(dB)	Actual FS Peak (dBuV/m)	Actual FS AV (dBuV/m)	Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
1460.00	48.81	---	-7.86	40.95	---	74.00	54.00	-13.05	Peak
1592.00	50.84	---	-6.85	43.99	---	74.00	54.00	-10.01	Peak
2480.00	97.23	---	-2.82	94.41	---	---	---	---	Fundamental
4960.00	---	---	---	---	---	74.00	54.00	---	---
7440.00	---	---	---	---	---	74.00	54.00	---	---
9920.00	---	---	---	---	---	74.00	54.00	---	---
12400.00	---	---	---	---	---	74.00	54.00	---	---
14880.00	---	---	---	---	---	74.00	54.00	---	---
17360.00	---	---	---	---	---	74.00	54.00	---	---
19840.00	---	---	---	---	---	74.00	54.00	---	---
22320.00	---	---	---	---	---	74.00	54.00	---	---
24800.00	---	---	---	---	---	74.00	54.00	---	---

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
5. Spectrum AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms





**Operation Mode:** Tx CH High Z Mode      **Test Date:** September 4, 2003  
**Temperature:** 30°C      **Tested by:** Jim  
**Humidity:** 55 % RH      **Polarity:** Hor.

Freq. (MHz)	Peak Reading	AV Reading	Ant./CL CF(dB)	Actual FS		Peak Limit	AV Limit	Margin (dB)	Remark
	(dBuV)	(dBuV)		Peak (dBuV/m)	AV (dBuV/m)	(dBuV/m)	(dBuV/m)		
1988.00	45.24	---	-4.47	40.77	---	74.00	54.00	-13.23	Peak
2480.00	93.99	---	-2.82	91.17	---	---	---	---	Fundamental
4960.00	---	---	---	---	---	74.00	54.00	---	---
7440.00	---	---	---	---	---	74.00	54.00	---	---
9920.00	---	---	---	---	---	74.00	54.00	---	---
12400.00	---	---	---	---	---	74.00	54.00	---	---
14880.00	---	---	---	---	---	74.00	54.00	---	---
17360.00	---	---	---	---	---	74.00	54.00	---	---
19840.00	---	---	---	---	---	74.00	54.00	---	---
22320.00	---	---	---	---	---	74.00	54.00	---	---
24800.00	---	---	---	---	---	74.00	54.00	---	---

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
5. Spectrum AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms



## **CONDITION B: CO-LOCATED OPERATION (MOBILE PHONE & BLUETOOTH OPERATED SIMULTANEOUSLY)**

### **7.9 RADIATED EMISSIONS**

#### **LIMIT**

*(Same as the above section <7.8>)*

#### **MEASUREMENT EQUIPMENT USED**

*(Same as the above section <7.8>)*

#### **Test Configuration**

*(Same as the above section <7.8>)*

#### **TEST PROCEDURE**

*(Same as the above section <7.8>)*

**Condition B: Co-located operation**

**Operation Mode:** Mobile phone & Bluetooth      **Test Date:** September 6, 2003  
**Temperature:** 30°C      **Test by:** Jim  
**Humidity:** 55% RH      **Polarity:** Ver.

Frequency (MHz)	Reading Level (dBuV)	Antenna Polarization	S.G. (dBm)	Cable Loss (dB)	Ant. Gain (dBi)	Emission Level (dBm)	Limit (dBm)	Margin (dB)
1909.80	130.43	V	27.87	4.02	6.35	30.19	33.00	-2.81
2480.00	97.67	V	-14.25	4.54	7.31	-11.48	33.00	-44.48
3819.60	65.85	V	-28.79	6.01	7.19	-27.61	-13.00	-14.61
5729.40	57.83	V	-32.84	7.32	8.37	-31.80	-13.00	-18.80
7639.20	49.24	V	-36.67	8.56	8.38	-36.85	-13.00	-23.85
9549.00	44.75	V	-38.72	9.43	9.47	-38.68	-13.00	-25.68

**Notes:**

1. Measuring frequencies from 30 MHz to the 10th harmonic of highest fundamental frequency.
2. Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Spectrum Setting:  
30MHz- 1GHz, RBW= 100KHz, VBW= 100kHz, Sweep time= 200 ms.  
1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.
4. X Mode means the EUT in stand-up position; Y, Z Mode means the EUT in lie-on position



**Operation Mode:** Mobile phone & Bluetooth      **Test Date:** September 6, 2003  
**Temperature:** 30°C      **Test by:** Jim  
**Humidity:** 55% RH      **Polarity:** Hor.

Frequency (MHz)	Reading Level (dBuV)	Antenna Polarization	S.G. (dBm)	Cable Loss (dB)	Ant. Gain (dBi)	Emission Level (dBm)	Limit (dBm)	Margin (dB)
1850.20	125.45	H	22.85	3.95	6.30	25.20	33.00	-7.80
2480.00	91.48	H	-20.44	4.54	7.31	-17.67	33.00	-50.67
3700.40	60.67	H	-34.19	5.90	7.21	-32.88	-13.00	-19.88
5550.60	52.77	H	-37.92	7.27	8.20	-36.99	-13.00	-23.99
7400.80	46.01	H	-40.85	8.37	8.33	-40.89	-13.00	-27.89
9251.00	43.12	H	-40.28	9.48	9.25	-40.50	-13.00	-27.50
1850.20	129.26	H	26.66	3.95	6.30	29.01	33.00	-3.99
2480.00	94.01	H	-17.91	4.54	7.31	-15.14	33.00	-48.14
3700.40	61.25	H	-33.61	5.90	7.21	-32.30	-13.00	-19.30
5550.60	54.57	H	-36.12	7.27	8.20	-35.19	-13.00	-22.19
7400.80	45.25	H	-41.61	8.37	8.33	-41.65	-13.00	-28.65
9251.00	43.01	H	-40.39	9.48	9.25	-40.61	-13.00	-27.61

**Notes:**

1. Measuring frequencies from 30 MHz to the 10th harmonic of highest fundamental frequency.
2. Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Spectrum Setting:  
30MHz- 1GHz, RBW= 100KHz, VBW= 100kHz, Sweep time= 200 ms.  
1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.
4. X Mode means the EUT in stand-up position; Y, Z Mode means the EUT in lie-on position



## 7.10 POWERLINE CONDUCTED EMISSIONS

### LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCS30	847793/012	12/20/2003
LISN	R&S	ESH2-Z5	843285/010	12/15/2003
LISN	EMCO	3825/2	9003-1628	07/25/2004

**Remark:** Each piece of equipment is scheduled for calibration once a year.



## **TEST CONFIGURATION**

1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4-1992.
2. The EUT was plug-in the host PC via USB port. The host PC system was placed on the center of the back edge on the test table. The peripherals like modem, monitor printer, K/B, and mouse were placed on the side of the host PC system. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.
3. The keyboard was placed directly in the front of the monitor, flushed with the front tabletop. The mouse was placed next to the Keyboard, flushed with the back of keyboard.
4. The spacing between the peripherals was 10 centimeters.
5. External I/O cables were draped along the edge of the test table and bundle when necessary.
6. The host PC system was connected with 110Vac/60Hz power source.

*The EUT is set to transmit in a continuous mode.*

## **TEST PROCEDURE**

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

**TEST RESULTS**

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

**Operation Mode:** Normal operating

**Test Date:** September 6, 2003

**Temperature:** 30°C

**Tested by:** Jim

**Humidity:** 56 % RH

FREQ MHz	Q.P. Raw dBuV	AVG Raw dBuV	Q.P. Limit dBuV	AVG Limit dBuV	Q.P. Margin dB	AVG Margin dB	NOTE
0.199	38.90	---	63.65	53.65	-24.75	---	L1
0.241	39.80	---	62.06	52.06	-22.26	---	L1
0.386	39.00	---	58.15	48.15	-19.15	---	L1
0.438	41.20	---	57.10	47.10	-15.90	---	L1
0.491	34.30	---	56.15	46.15	-21.85	---	L1
6.261	38.60	---	60.00	50.00	-21.40	---	L1
0.228	41.20	---	62.52	52.52	-21.32	---	L2
0.247	40.30	---	61.86	51.86	-21.56	---	L2
0.440	34.10	---	57.06	47.06	-22.96	---	L2
0.679	35.80	---	56.00	46.00	-20.20	---	L2
6.593	39.60	---	60.00	50.00	-20.40	---	L2
7.007	39.10	---	60.00	50.00	-20.90	---	L2


**Note:**

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. "—" denotes the emission level was or more than 2dB below the Average limit
4. The IF bandwidth of SPA between 0.15MHz to 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9kHz;
5. L1 = Line One (Live line) / L2 = Line Two (Neutral Line)




## Test Data Plots

### Conducted emissions (Line 1)

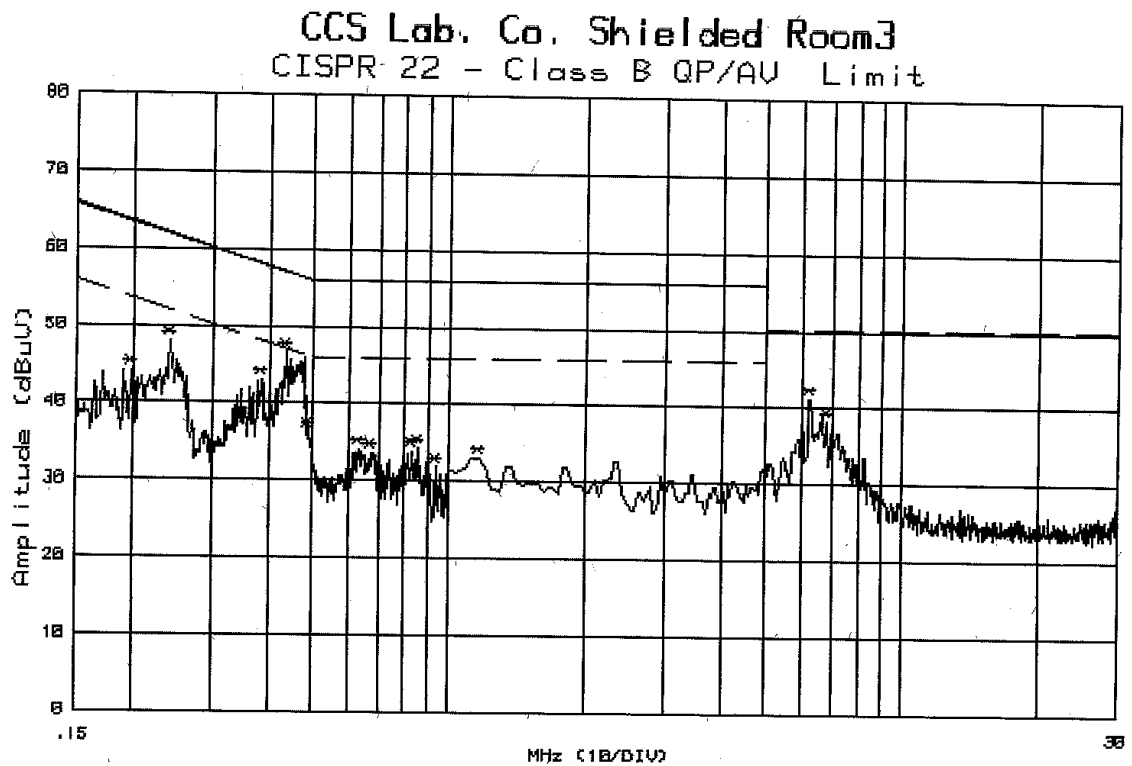

### Conducted emissions (Line 2)

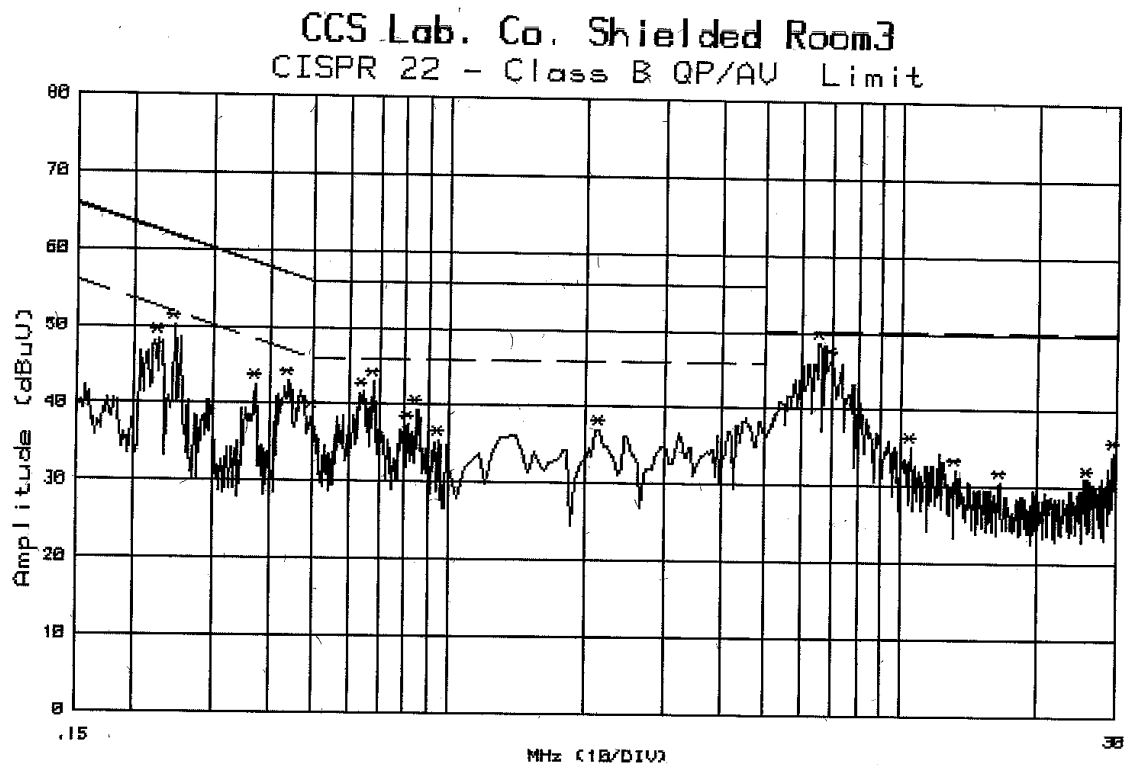



## **APPENDIX 1 PHOTOGRPHS OF TEST SETUP**

### **Radiated Emission Set up Photos**





## Conducted Emission Set Up Photos

