


Frigga T7X (Multiple-use)




Appearance Instruction

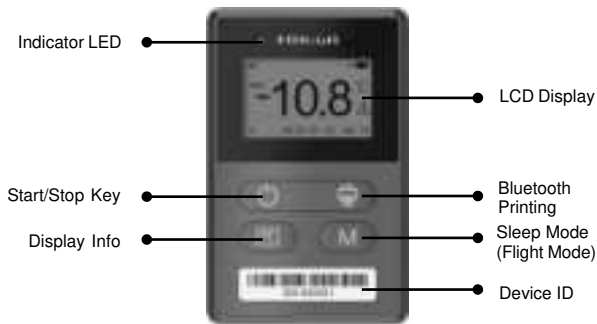

Note: The AC code (Activation code) is in the back of device.

Display Instruction

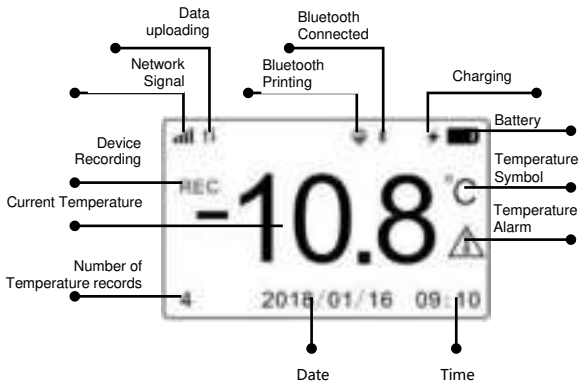

1. **Start :**

Long press "Start/stop" button till "REC" has been showed on the LCD interface, device is ready to monitor.
At the same time, the record quantity also will be showed on the LCD interface.



2. **Stop :**

Long press “Start/Stop” button till “REC” disappear from LCD interface, the device has been stopped.



3. BT Print :

Turn on BT printer first.

Long press “Print” button 3 sec., and
logger will connect printer automatically
and print data.



4. Check data :

Short press “Data” button, to show some information:

MAX temperature value

MIN temperature value



5. Mode Switch :

- Long press “Mode” button, to enter flight mode:
In flight mode, the logger only records data and doesn’t send data to platform.
LCD will be shut down, display nothing.
- Long press “Mode” button again, to quit flight mode:
Data report, LCD show, everything back to normal



6. Usage scenarios

Put the device in the container with goods together, it is not for portable use.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and

on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or transmitter.

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum distance of 20cm from your body.