

## FCC Test Report

**Report No.:** RF200204D01

**FCC ID:** K7SWIA002

**Test Model:** WIA002

**Series Model:** PW0004

**Received Date:** Feb. 4, 2020

**Test Date:** Feb. 5 to 13, 2020

**Issued Date:** Mar. 2, 2020

**Applicant:** Belkin International, Inc.

**Address:** 12045 East Waterfront Drive, Playa Vista, CA. 90094, USA

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Lin Kou Laboratories

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**FCC Registration /  
Designation Number:** 198487 / TW2021



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

## Table of Contents

<b>Report Issue History Record .....</b>	<b>3</b>
<b>Release Control Record .....</b>	<b>3</b>
<b>1 Certificate of Conformity .....</b>	<b>4</b>
<b>2 Summary of Test Results .....</b>	<b>5</b>
2.1 Measurement Uncertainty .....	5
2.2 Modification Record .....	5
<b>3 General Information .....</b>	<b>6</b>
3.1 General Description of EUT .....	6
3.2 Description of Test Modes .....	6
3.2.1 Test Mode Applicability and Tested Channel Detail .....	7
3.3 Description of Support Units .....	8
3.3.1 Configuration of System under Test .....	8
3.4 General Description of Applied Standards .....	9
<b>4 Test Types and Results .....</b>	<b>10</b>
4.1 Radiated Emission and Bandedge Measurement .....	10
4.1.1 Limits of Radiated Emission and Bandedge Measurement .....	10
4.1.2 Test Instruments .....	11
4.1.3 Test Procedures .....	12
4.1.4 Deviation from Test Standard .....	12
4.1.5 Test Set Up .....	13
4.1.6 EUT Operating Conditions .....	13
4.1.7 Test Results .....	14
4.2 Conducted Emission Measurement .....	24
4.2.1 Limits of Conducted Emission Measurement .....	24
4.2.2 Test Instruments .....	24
4.2.3 Test Procedures .....	25
4.2.4 Deviation from Test Standard .....	25
4.2.5 Test Setup .....	25
4.2.6 EUT Operating Conditions .....	25
4.2.7 Test Results .....	26
<b>5 Pictures of Test Arrangements .....</b>	<b>30</b>
<b>Appendix – Information of the Testing Laboratories .....</b>	<b>31</b>

### Report Issue History Record

Issue No.	Description	Date Issued
RF200204D01	Original release.	Mar. 2, 2020

### Release Control Record

Issue No.	Description	Date Issued
RF200204D01	Original release.	Mar. 2, 2020

## 1 Certificate of Conformity

**Product:** BOOST↑CHARGE™ Wireless Charging Pad 15W, Wireless Charging Pad 15W

**Test Model:** WIA002 **Brand:** belkin

**Series Model:** PW0004 **Brand:** playa

**Sample Status:** Engineering sample

**Applicant:** Belkin International, Inc.

**Test Date:** Feb. 5 to 13, 2020

**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.209)  
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

**Prepared by :** Jessica Cheng , **Date:** Mar. 2, 2020  
Jessica Cheng / Senior Specialist

**Approved by :** Rex Lai , **Date:** Mar. 2, 2020  
Rex Lai / Associate Technical Manager

## 2 Summary of Test Results

### 47 CFR FCC Part 15, Subpart C (Section 15.209)

FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -16.43dB at 0.68125MHz
15.209	Radiated Emission Test	Pass	Meet the requirement of limit. Minimum passing margin is -6.84dB at 32.04MHz

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ( $\pm$ )
Conducted Emissions at mains ports	150kHz ~ 30MHz	3.00 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	2.61 dB
	30MHz ~ 1000MHz	5.43 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

Product	BOOST↑CHARGE™ Wireless Charging Pad 15W, Wireless Charging Pad 15W
Test Model	WIA002 Brand: belkin
Series Model	PW0004 Brand: playa
Model Difference	Marketing Purpose
Sample Status	Engineering sample
Power Supply Rating	1) input: 5Vdc, 2A output: 5W 2) input: 9Vdc, 2A output: 7.5W 3) input: 12Vdc, 1.5A output: 10W 4) input: 12Vdc, 2A output: 15W
Modulation Type	FSK
Operating Frequency	127.8 kHz
Antenna Type	Coil antenna
Field Strength	79.66dBuV/m
Dimensions	15.1976cm <sup>2</sup> (diameter = 44mm)
Accessory Device	Wall charger
Data Cable Supplied	N/A
Maximum Power Output from the Charging Coil	15W

Note:

1. The EUT with Qi charging function and all models are listed as below.

Brand	Product	Model	Difference
belkin	BOOST↑CHARGE™ Wireless Charging Pad 15W	WIA002	For marketing purpose.
playa	Wireless Charging Pad 15W	PW0004	

During the test, **model: WIA002** was selected as representative model for test.

2. During the test, the **maximum output power: 15W** was applied to the final test.

3. The EUT consumes power from a Wall charger, as the following:

Brand	Model	Specification
belkin	DSA-18QFB FUS A	AC I/P: 100-240V, 50/60Hz, 0.8A DC O/P: +3.6-6V, 2A +6-9V, 2A +9-12V, 1.5A Shielded USB cable (1.2m)

#### 3.2 Description of Test Modes

The following test frequency is provided to this EUT:

Operating Frequency (kHz)	Test Mode
127.8	Charging Mode with max Load
127.8	Standby Mode

### 3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To		Description
	RE<1G	PLC	
A	√	√	Charging Mode with max Load
B	√	√	Standby Mode

Where **RE<1G**: Radiated Emission below 1GHz **PLC**: Power Line Conducted Emission

#### Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Operating Frequency (kHz)	Tested Frequency (kHz)
A	127.8	127.8
B	127.8	127.8

#### Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Operating Frequency (kHz)	Tested Frequency (kHz)
A	127.8	127.8
B	127.8	127.8

#### Test Condition:

Applicable To	Environmental Conditions	Input Power	Tested by
RE<1G	19 deg. C, 79% RH	120Vac, 60Hz	Ian Chang
PLC	25 deg. C, 75% RH	120Vac, 60Hz	Ian Chang

### 3.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Load	N/A	N/A	N/A	N/A	Supplied by client (15W max load)
B.	Mechanical tool	N/A	N/A	N/A	N/A	Supplied by client


ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/ No)	Cores (Qty.)	Remarks
1.	USB cable	1	1.2	Y	0	Supplied by client
2.	DC cable	1	0.1	N	0	Supplied by client

Note: The core(s) is(are) originally attached to the cable(s).

#### 3.3.1 Configuration of System under Test


##### Charging Mode:

Test Mode A:

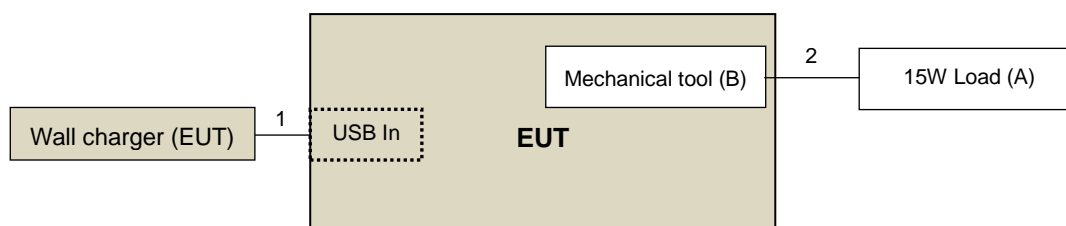

##### Standby Mode:

Test Mode B:

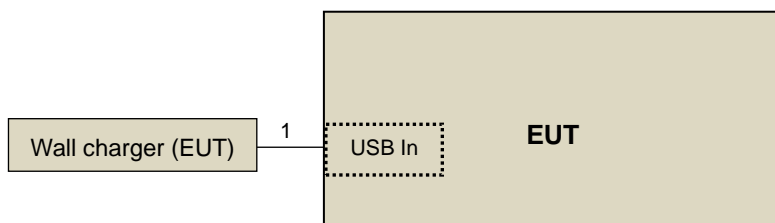



### **3.4 General Description of Applied Standards**

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

#### **47 CFR FCC Part 15, Subpart C (Section 15.209)**

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

##### For Frequency Below 30MHz

Frequency (MHz)	Field Strength (dBuV/m)		Measurement Distance (meters)
	uV/m	dBuV/m	
0.009 – 0.490	2400 / F (kHz)	48.52-13.80	300
0.490 – 1.705	24000 / F (kHz)	33.80-22.97	30
1.705 – 30.0	30	29.54	30

##### For Frequency Between 30-1000MHz

Frequency (MHz)	Class A (at 10m)		Class B (at 3m)	
	uV/m	dBuV/m	uV/m	dBuV/m
30-88	90	39.1	100	40.0
88-216	150	43.5	150	43.5
216-960	210	46.4	200	46.0
Above 960	300	49.5	500	54.0

#### 4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
HP Preamplifier	8447D	2432A03504	Feb. 20, 2019	Feb. 19, 2020
HP Preamplifier	8449B	3008A01201	Feb. 21, 2019	Feb. 20, 2020
MITEQ Preamplifier	AMF-6F-260400-33-8P	892164	Feb. 20, 2019	Feb. 19, 2020
Agilent TEST RECEIVER	N9038A	MY51210129	Mar. 05, 2019	Mar. 04, 2020
Schwarzbeck Antenna	VULB 9168	139	Nov. 7, 2019	Nov. 6, 2020
Schwarzbeck Antenna	VHBA 9123	480	Jun. 3, 2019	Jun. 2, 2021
Schwarzbeck Horn Antenna	BBHA-9170	212	Nov. 24, 2019	Nov. 23, 2020
Schwarzbeck Horn Antenna	BBHA 9120-D1	D130	Nov. 24, 2019	Nov. 23, 2020
ADT. Turn Table	TT100	0306	NA	NA
ADT. Tower	AT100	0306	NA	NA
Software	Radiated_V7.6.15.9.5	NA	NA	NA
SUHNER RF cable With 4dB PAD	SF102	Cable-CH6-01	Jul. 10, 2019	Jul. 9, 2020
SUHNER RF cable With 3/4dB PAD	SF102	Cable-CH8-3.6m	Jul. 10, 2019	Jul. 9, 2020
KEYSIGHT MIMO Powermeasurement Test set	U2021XA	U2021XA-001	Jun. 11, 2019	Jun. 10, 2020
KEYSIGHT Spectrum Analyzer	N9030A	MY54490260	Jul. 30, 2019	Jul. 29, 2020
Loop Antenna EMCI	LPA600	270	Aug. 23, 2019	Aug. 22, 2021

- NOTE:** 1. The calibration interval of the above test instruments is 12/24 months. And the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in Chamber No. 6.

#### 4.1.3 Test Procedures

##### For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200Hz at frequency range 9kHz to 150kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency range 150kHz to 30MHz.

##### For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle  $< 98\%$ ) or 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 Deviation from Test Standard


No deviation.

#### 4.1.5 Test Set Up

##### For Radiated emission below 30MHz

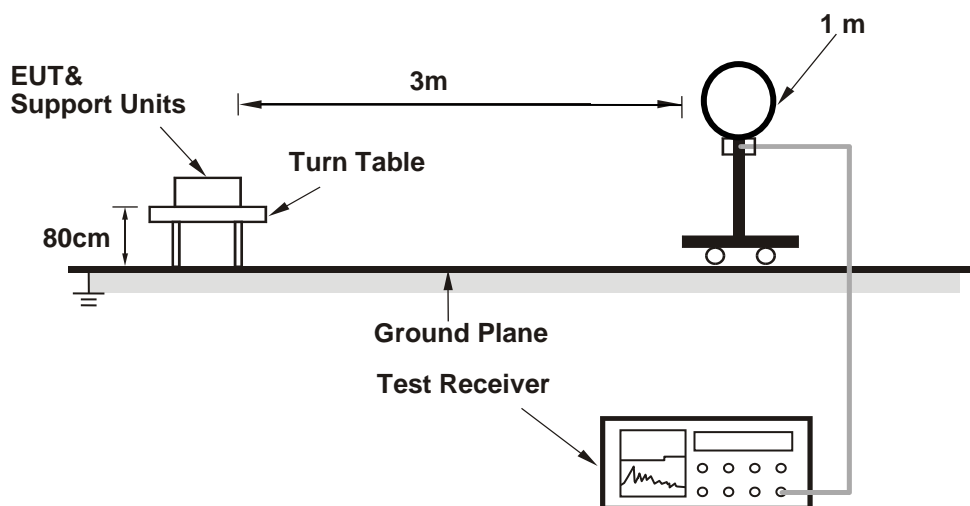

##### For Radiated emission 30MHz to 1GHz

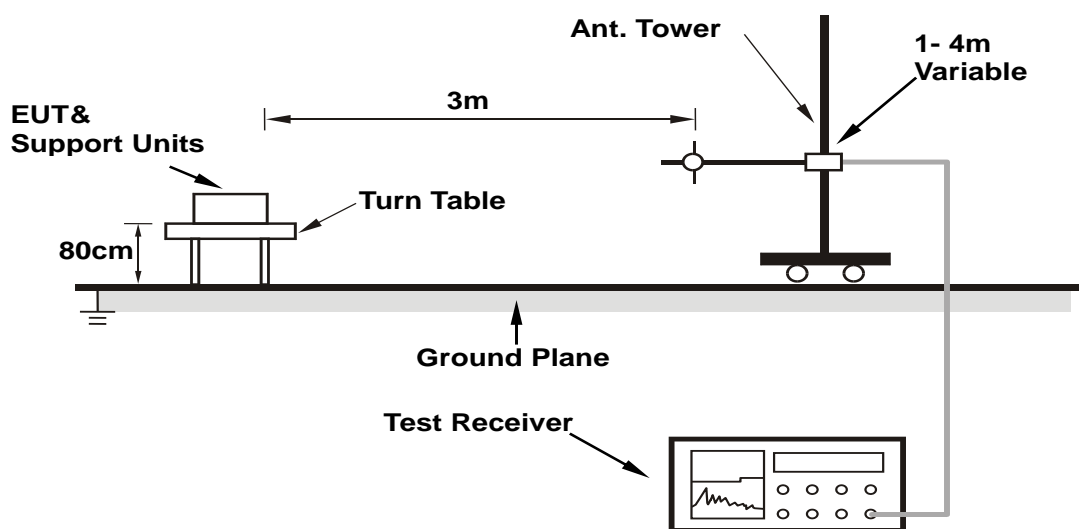

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT Operating Conditions

Test Mode A:

Put the Load on the EUT (wireless charging) during the test.

Test Mode B:

Set the EUT under standby condition.

#### 4.1.7 Test Results

Below 30MHz Data:


Charging Mode

Test Frequency	127.8kHz	Detector Function	Quasi-Peak (QP)
Frequency Range	9kHz ~ 30MHz		
Test Mode	A		

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*0.1278	79.66 QP	105.47	-25.81	1.00	100	60.42	19.24
2	0.3834	58.26 QP	95.93	-37.67	1.00	360	47.44	10.82
3	0.6390	50.16 QP	71.49	-21.33	1.00	332	42.50	7.66
4	0.8946	44.99 QP	68.57	-23.58	1.00	318	39.35	5.64
5	1.1502	40.57 QP	66.39	-25.82	1.00	302	36.03	4.54
6	1.4058	37.65 QP	64.65	-27.00	1.00	287	33.55	4.10
7	1.6614	40.82 QP	63.19	-22.37	1.00	248	37.16	3.66

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. Loop antenna was used for all radiated emission below 30MHz.
7. Limit @3m=Limit@300m+40log(300 / 3)=Limit@300m+80
8. Limit @3m=Limit@30m+40log(30 / 3)=Limit@30m+40

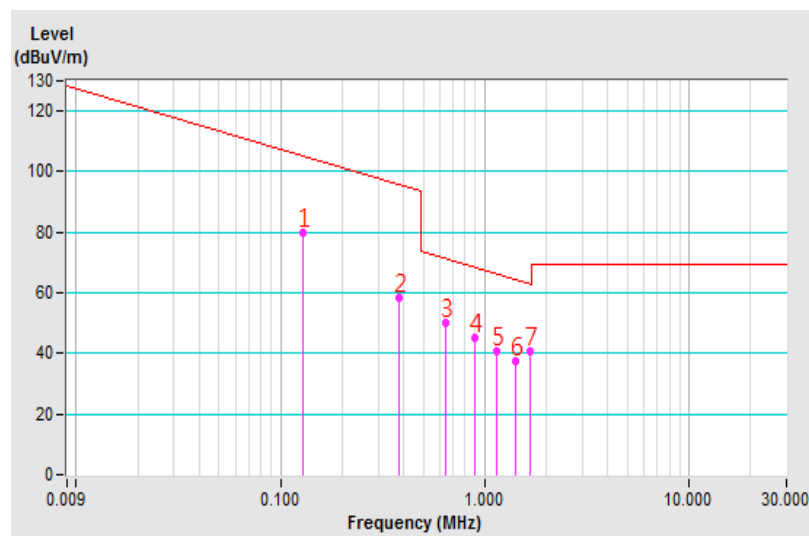


Test Frequency	127.8kHz	Detector Function	Quasi-Peak (QP)
Frequency Range	9kHz ~ 30MHz		
Test Mode	A		

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*0.1278	68.79 QP	105.47	-36.68	1.00	221	49.55	19.24
2	0.3834	53.65 QP	95.93	-42.28	1.00	250	42.83	10.82
3	0.6390	46.74 QP	71.49	-24.75	1.00	208	39.08	7.66
4	0.8946	41.64 QP	68.57	-26.93	1.00	197	36.00	5.64
5	1.1502	36.09 QP	66.39	-30.30	1.00	183	31.55	4.54
6	1.4058	33.94 QP	64.65	-30.71	1.00	172	29.84	4.10
7	1.6614	35.32 QP	63.19	-27.87	1.00	160	31.66	3.66

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. Loop antenna was used for all radiated emission below 30MHz.
7. Limit @3m=Limit@300m+40log(300 / 3)=Limit@300m+80
8. Limit @3m=Limit@30m+40log(30 / 3)=Limit@30m+40

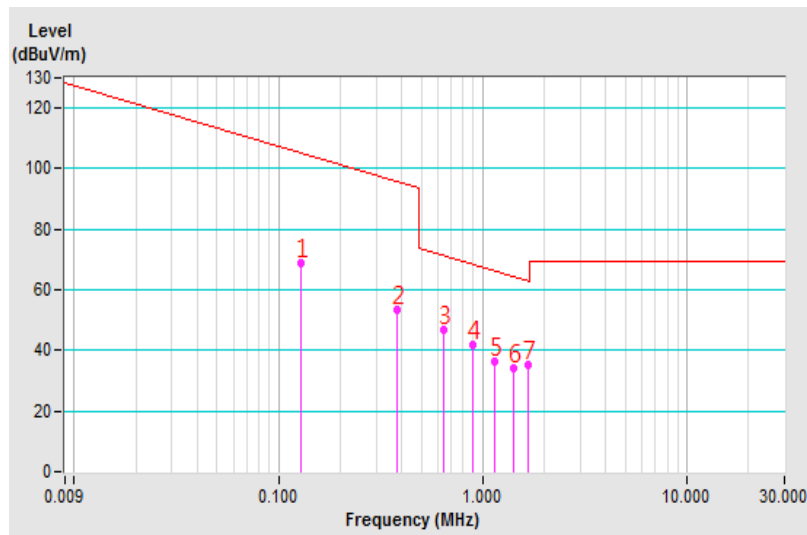


Test Frequency	127.8kHz	Detector Function	Quasi-Peak (QP)
Frequency Range	9kHz ~ 30MHz		
Test Mode	A		

Antenna Polarity & Test Distance: Loop Antenna Ground-Parallel At 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*0.1278	75.49 QP	105.47	-29.98	1.00	136	56.25	19.24
2	0.3834	56.62 QP	95.93	-39.31	1.00	304	45.80	10.82
3	0.6390	47.95 QP	71.49	-23.54	1.00	122	40.29	7.66
4	0.8946	42.69 QP	68.57	-25.88	1.00	114	37.05	5.64
5	1.1502	39.22 QP	66.39	-27.17	1.00	96	34.68	4.54
6	1.4058	36.66 QP	64.65	-27.99	1.00	75	32.56	4.10
7	1.6614	38.13 QP	63.19	-25.06	1.00	3	34.47	3.66

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. Loop antenna was used for all radiated emission below 30MHz.
7. Limit @3m=Limit@300m+40log(300 / 3)=Limit@300m+80
8. Limit @3m=Limit@30m+40log(30 / 3)=Limit@30m+40

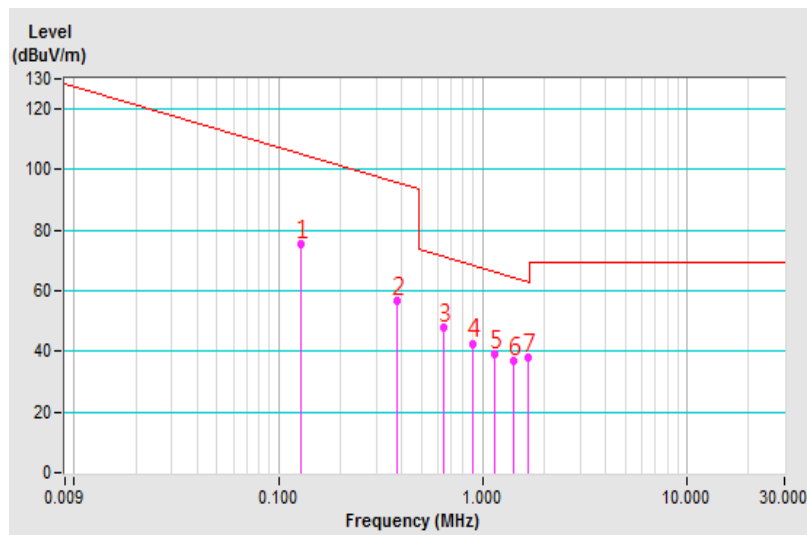




### Standby Mode

Test Frequency	127.8kHz	Detector Function	Quasi-Peak (QP)
Frequency Range	9kHz ~ 30MHz		
Test Mode	B		

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*0.1278	74.64 QP	105.47	-30.83	1.00	340	55.40	19.24
2	0.3834	52.37 QP	95.93	-43.56	1.00	228	41.55	10.82
3	0.6390	42.87 QP	71.49	-28.62	1.00	244	35.21	7.66
4	0.8946	37.91 QP	68.57	-30.66	1.00	256	32.27	5.64
5	1.1502	33.42 QP	66.39	-32.97	1.00	271	28.88	4.54
6	1.4058	32.21 QP	64.65	-32.44	1.00	310	28.11	4.10
7	1.6614	37.78 QP	63.19	-25.41	1.00	336	34.12	3.66

### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. Loop antenna was used for all radiated emission below 30MHz.
7. Limit @3m=Limit@300m+40log(300 / 3)=Limit@300m+80
8. Limit @3m=Limit@30m+40log(30 / 3)=Limit@30m+40

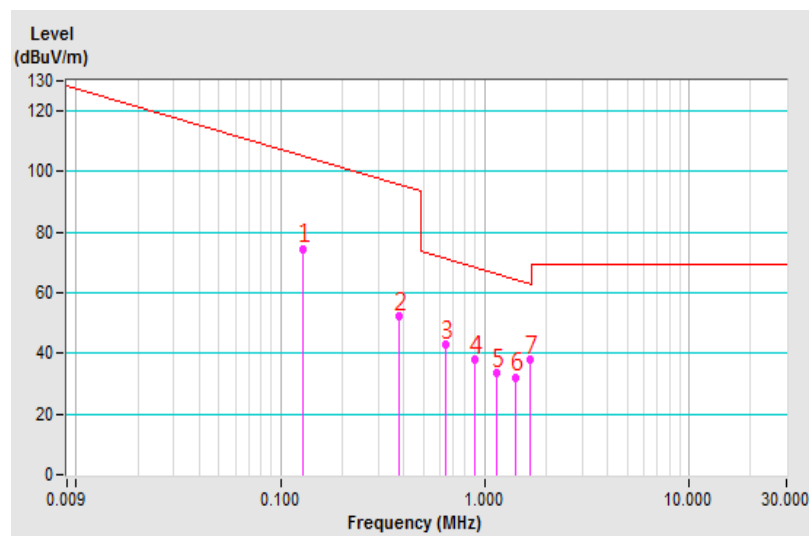


Test Frequency	127.8kHz	Detector Function	Quasi-Peak (QP)
Frequency Range	9kHz ~ 30MHz		
Test Mode	B		

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*0.1278	66.35 QP	105.47	-39.12	1.00	141	47.11	19.24
2	0.3834	48.84 QP	95.93	-47.09	1.00	80	38.02	10.82
3	0.6390	39.66 QP	71.49	-31.83	1.00	61	32.00	7.66
4	0.8946	31.57 QP	68.57	-37.00	1.00	102	25.93	5.64
5	1.1502	27.00 QP	66.39	-39.39	1.00	114	22.46	4.54
6	1.4058	27.04 QP	64.65	-37.61	1.00	126	22.94	4.10
7	1.6614	35.90 QP	63.19	-27.29	1.00	138	32.24	3.66

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. Loop antenna was used for all radiated emission below 30MHz.
7. Limit @3m=Limit@300m+40log(300 / 3)=Limit@300m+80
8. Limit @3m=Limit@30m+40log(30 / 3)=Limit@30m+40

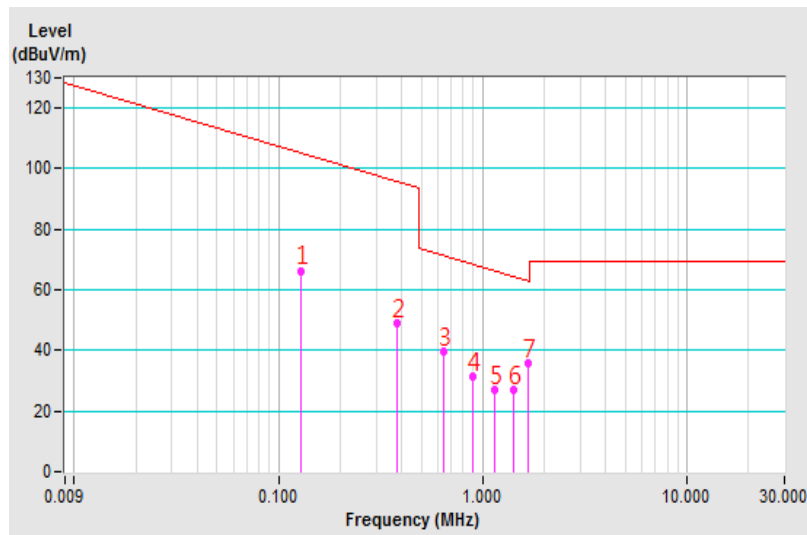


Test Frequency	127.8kHz	Detector Function	Quasi-Peak (QP)
Frequency Range	9kHz ~ 30MHz		
Test Mode	B		

Antenna Polarity & Test Distance: Loop Antenna Ground-Parallel At 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*0.1278	71.46 QP	105.47	-34.01	1.00	155	52.22	19.24
2	0.3834	50.23 QP	95.93	-45.70	1.00	248	39.41	10.82
3	0.6390	40.16 QP	71.49	-31.33	1.00	260	32.50	7.66
4	0.8946	34.67 QP	68.57	-33.90	1.00	272	29.03	5.64
5	1.1502	31.60 QP	66.39	-34.79	1.00	283	27.06	4.54
6	1.4058	30.62 QP	64.65	-34.03	1.00	329	26.52	4.10
7	1.6614	36.74 QP	63.19	-26.45	1.00	352	33.08	3.66

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. Loop antenna was used for all radiated emission below 30MHz.
7. Limit @3m=Limit@300m+40log(300 / 3)=Limit@300m+80
8. Limit @3m=Limit@30m+40log(30 / 3)=Limit@30m+40

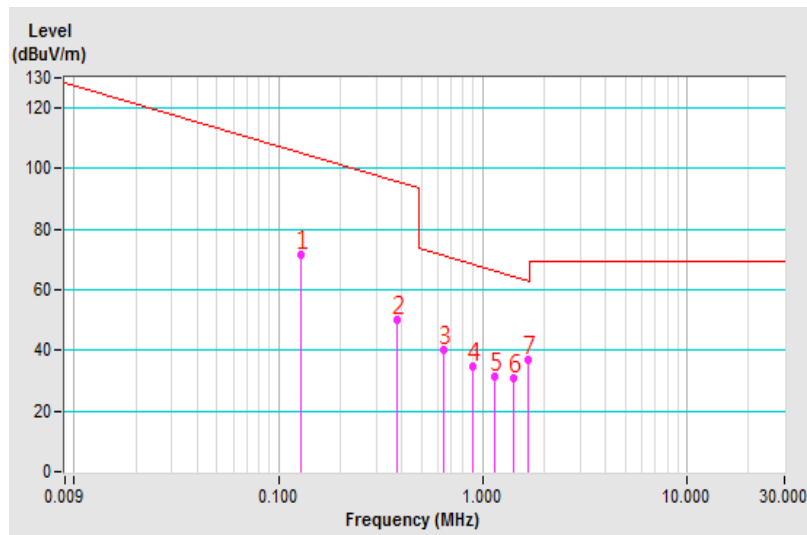

Above 30MHz Data:


Charging Mode

Test Frequency	127.8kHz	Detector Function	Quasi-Peak (QP)
Frequency Range	30MHz ~ 1GHz		
Test Mode	A		

Antenna Polarity & Test Distance: Horizontal At 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	31.84	21.70 QP	40.00	-18.30	2.34 H	149	30.55	-8.85
2	159.25	27.93 QP	43.50	-15.57	1.94 H	86	34.50	-6.57
3	204.99	30.40 QP	43.50	-13.10	2.18 H	266	39.70	-9.30
4	228.51	30.70 QP	46.00	-15.30	2.20 H	168	39.73	-9.03
5	319.25	28.05 QP	46.00	-17.95	1.52 H	339	32.42	-4.37
6	597.79	30.33 QP	46.00	-15.67	1.36 H	299	28.58	1.75

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.

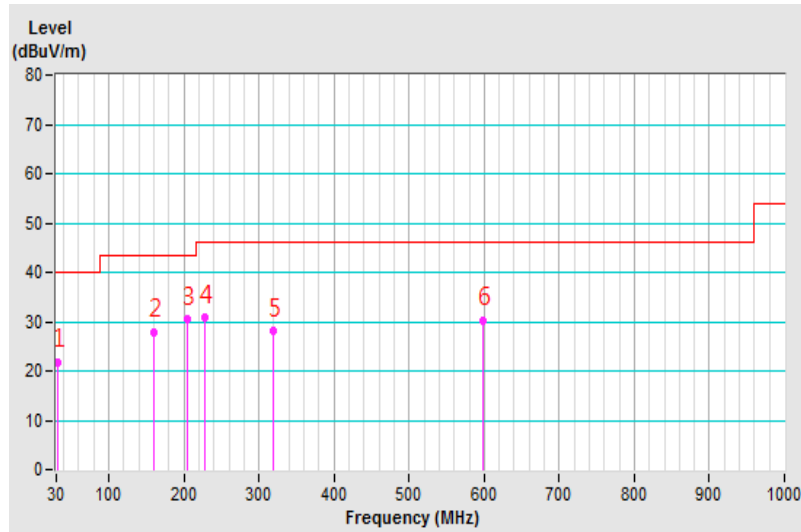


Test Frequency	127.8kHz	Detector Function	Quasi-Peak (QP)
Frequency Range	30MHz ~ 1GHz		
Test Mode	A		

Antenna Polarity & Test Distance: Vertical At 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	32.04	33.16 QP	40.00	-6.84	1.52 V	297	41.98	-8.82
2	57.01	28.46 QP	40.00	-11.54	1.34 V	132	35.98	-7.52
3	81.36	25.01 QP	40.00	-14.99	1.84 V	287	36.83	-11.82
4	158.23	24.12 QP	43.50	-19.38	2.10 V	130	30.68	-6.56
5	220.12	28.77 QP	46.00	-17.23	1.06 V	314	37.80	-9.03
6	529.21	28.97 QP	46.00	-17.03	1.15 V	343	29.07	-0.10

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.

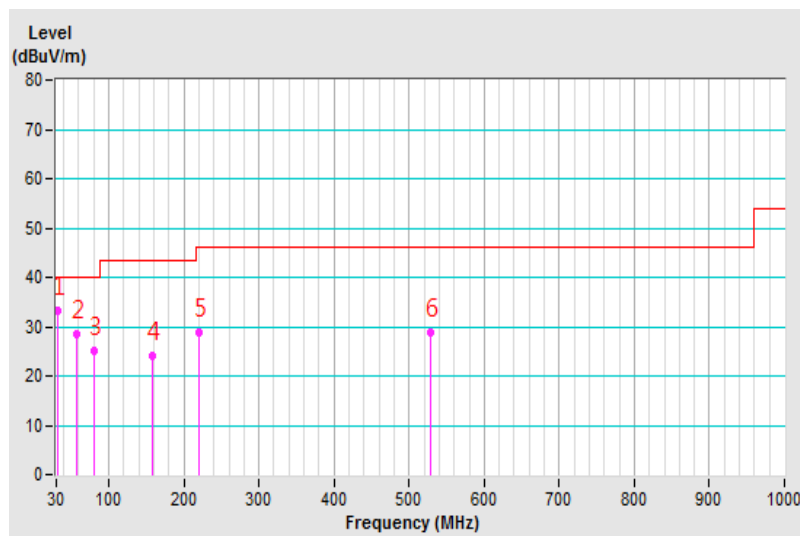


### Standby Mode

Test Frequency	127.8kHz	Detector Function	Quasi-Peak (QP)
Frequency Range	30MHz ~ 1GHz		
Test Mode	B		

Antenna Polarity & Test Distance: Horizontal At 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	47.41	21.17 QP	40.00	-18.83	1.91 H	109	28.30	-7.13
2	177.00	26.06 QP	43.50	-17.44	2.34 H	90	33.75	-7.69
3	197.76	28.12 QP	43.50	-15.38	1.42 H	222	37.55	-9.43
4	248.78	28.86 QP	46.00	-17.14	1.57 H	242	35.88	-7.02
5	331.72	28.48 QP	46.00	-17.52	1.28 H	339	32.59	-4.11
6	546.52	28.68 QP	46.00	-17.32	2.64 H	251	28.39	0.29

### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.

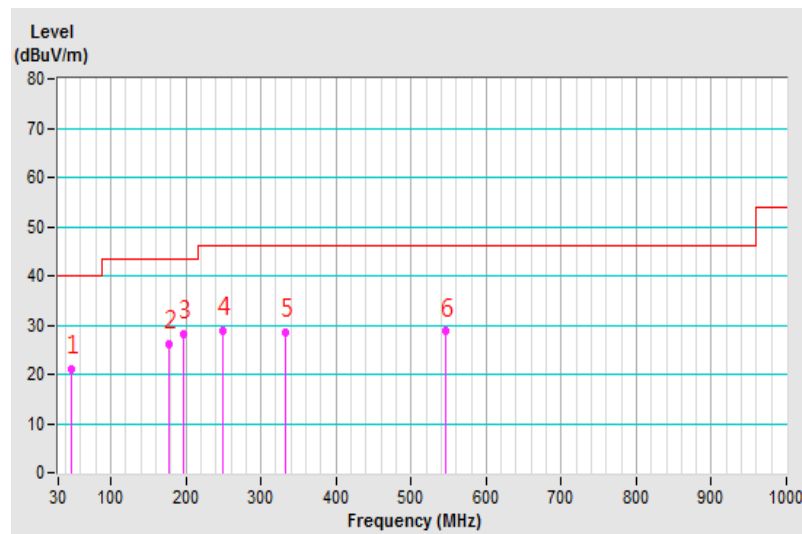


Test Frequency	127.8kHz	Detector Function	Quasi-Peak (QP)
Frequency Range	30MHz ~ 1GHz		
Test Mode	B		

Antenna Polarity & Test Distance: Vertical At 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	43.63	27.18 QP	40.00	-12.82	1.06 V	228	34.56	-7.38
2	88.25	24.39 QP	43.50	-19.11	1.34 V	230	36.95	-12.56
3	167.55	25.97 QP	43.50	-17.53	1.85 V	192	32.78	-6.81
4	237.82	26.48 QP	46.00	-19.52	1.13 V	146	34.27	-7.79
5	460.00	27.33 QP	46.00	-18.67	1.67 V	54	28.56	-1.23
6	587.17	30.50 QP	46.00	-15.50	2.15 V	314	28.93	1.57

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.

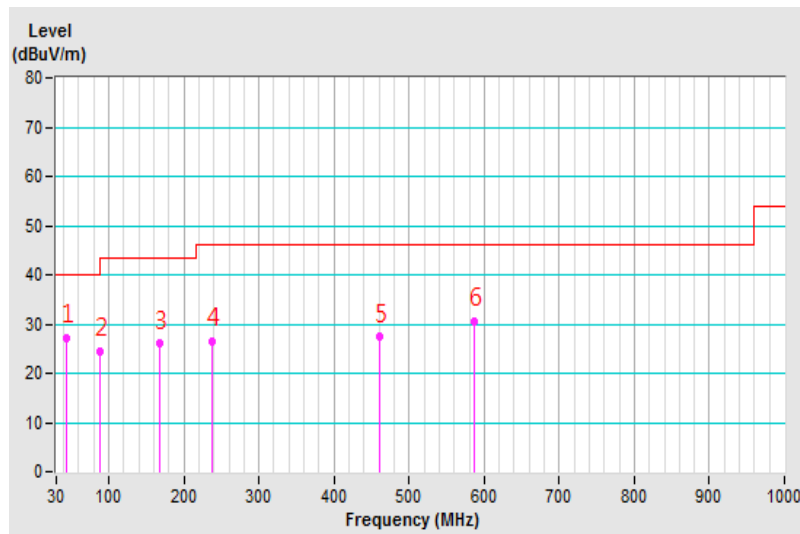

## 4.2 Conducted Emission Measurement

### 4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
ROHDE & SCHWARZ TEST RECEIVER	ESCS30	100276	Apr. 8, 2019	Apr. 7, 2020
SCHWARZBECK Artificial Mains Network (for EUT)	NSLK 8128	8128-244	Nov. 11, 2019	Nov. 10, 2020
LISN With Adapter (for EUT)	AD10	C05Ada-001	Nov. 11, 2019	Nov. 10, 2020
ROHDE & SCHWARZ Artificial Mains Network (for peripheral)	ESH3-Z5	100220	Nov. 18, 2019	Nov. 17, 2020
Software	Cond_V7.3.7.4	NA	NA	NA
RF cable (JYEBAO) With 10dB PAD	5D-FB	Cable-C05.01	Jan. 30, 2020	Jan. 29, 2021
LYNICS Terminator (For R&S LISN)	0900510	E1-01-305	Feb. 18, 2019	Feb. 17, 2020

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in Shielded Room No. 5.



### 4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

### 4.2.4 Deviation from Test Standard

No deviation.

### 4.2.5 Test Setup

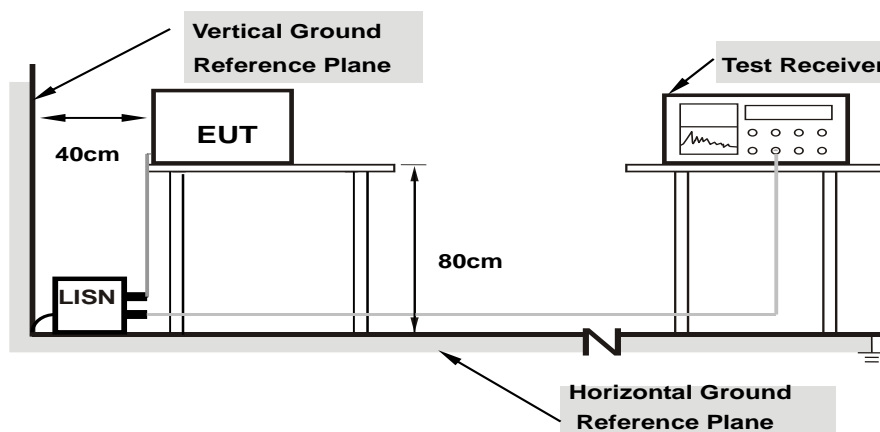

Note: Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 4.2.6 EUT Operating Conditions

Same as item 4.1.6.

#### 4.2.7 Test Results


##### Charging Mode

Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Test Mode	A		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.90	37.22	16.37	47.12	26.27	66.00	56.00	-18.88	-29.73
2	0.17344	9.90	33.35	13.58	43.25	23.48	64.79	54.79	-21.54	-31.31
3	0.19881	9.90	33.90	20.54	43.80	30.44	63.66	53.66	-19.86	-23.22
4	0.50301	9.92	26.39	14.24	36.31	24.16	56.00	46.00	-19.69	-21.84
5	0.68125	9.94	28.58	19.63	38.52	29.57	56.00	46.00	-17.48	-16.43
6	0.98203	9.97	22.32	9.04	32.29	19.01	56.00	46.00	-23.71	-26.99
7	6.08984	10.28	14.82	4.45	25.10	14.73	60.00	50.00	-34.90	-35.27

##### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

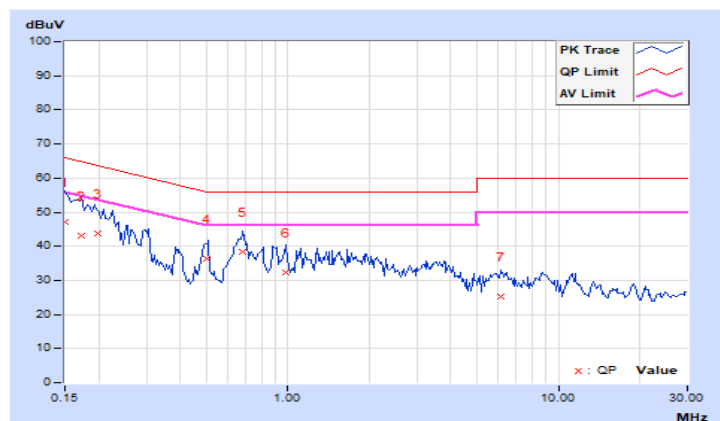


Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Test Mode	A		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.92	37.49	16.61	47.41	26.53	66.00	56.00	-18.59	-29.47
2	0.16953	9.92	33.91	13.34	43.83	23.26	64.98	54.98	-21.15	-31.72
3	0.19687	9.92	33.86	20.82	43.78	30.74	63.74	53.74	-19.96	-23.00
4	0.22422	9.92	25.62	9.17	35.54	19.09	62.66	52.66	-27.12	-33.57
5	0.68125	9.96	27.34	17.27	37.30	27.23	56.00	46.00	-18.70	-18.77
6	0.97813	9.99	22.68	8.88	32.67	18.87	56.00	46.00	-23.33	-27.13
7	1.19531	10.00	22.28	9.62	32.28	19.62	56.00	46.00	-23.72	-26.38
8	9.74609	10.51	9.12	2.25	19.63	12.76	60.00	50.00	-40.37	-37.24

#### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

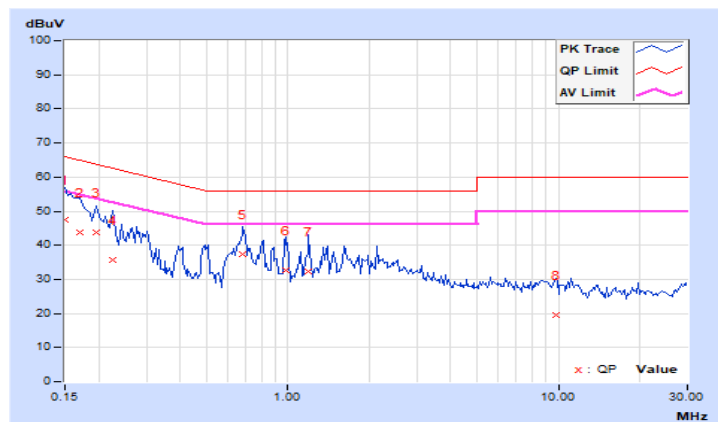


### Standby Mode

Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Test Mode	B		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	9.90	17.67	6.11	27.57	16.01	65.79	55.79	-38.22	-39.78
2	0.20078	9.90	15.44	5.28	25.34	15.18	63.58	53.58	-38.24	-38.40
3	0.50156	9.92	11.35	3.18	21.27	13.10	56.00	46.00	-34.73	-32.90
4	0.64219	9.93	17.32	4.59	27.25	14.52	56.00	46.00	-28.75	-31.48
5	0.70083	9.94	19.41	8.75	29.35	18.69	56.00	46.00	-26.65	-27.31
6	9.75385	10.50	4.51	2.17	15.01	12.67	60.00	50.00	-44.99	-37.33

### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

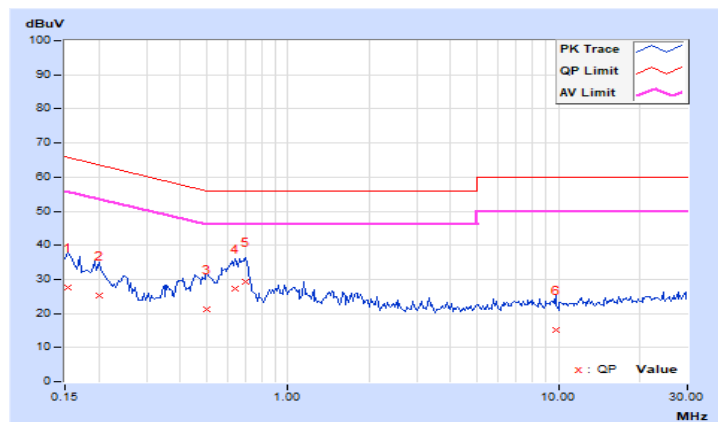


Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Test Mode	B		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.19687	9.92	13.80	5.52	23.72	15.44	63.74	53.74	-40.02	-38.30
2	0.21641	9.92	13.42	6.47	23.34	16.39	62.96	52.96	-39.62	-36.57
3	0.51719	9.95	9.19	3.41	19.14	13.36	56.00	46.00	-36.86	-32.64
4	0.68516	9.96	12.46	5.54	22.42	15.50	56.00	46.00	-33.58	-30.50
5	1.65625	10.03	5.89	1.61	15.92	11.64	56.00	46.00	-40.08	-34.36
6	24.00391	11.34	5.05	1.34	16.39	12.68	60.00	50.00	-43.61	-37.32

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

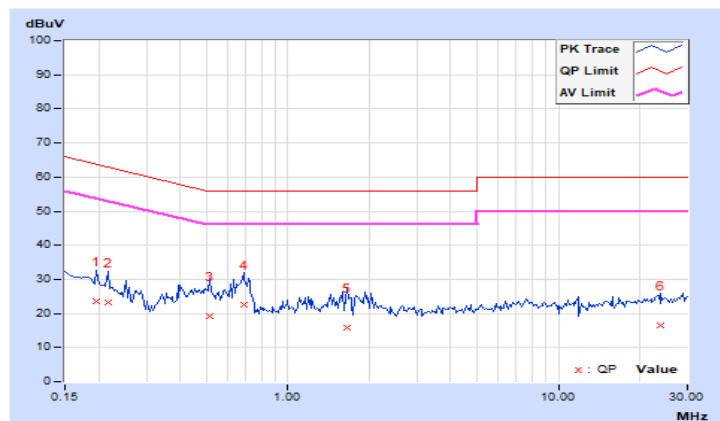

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

### Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

### Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

### Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---