



RADIO TEST REPORT

FCC ID : 2AXJ4WPA8631PV3
Equipment : AV1300 Gigabit Passthrough Powerline ac Wi-Fi Extender
Brand Name : tp-link
Model Name : TL-WPA8631P
Applicant : TP-Link Corporation Limited
Room 901, 9/F. , New East Ocean Centre, 9 Science
Museum Road, Tsim Sha Tsui, Kowloon, Hong Kong
Manufacturer : TP-Link Corporation Limited
Room 901, 9/F. , New East Ocean Centre, 9 Science
Museum Road, Tsim Sha Tsui, Kowloon, Hong Kong
Standard : 47 CFR FCC Part 15.407

The product was received on Sep. 27, 2022., and testing was started from Oct. 14, 2022 and completed on Dec. 14, 2022. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.



Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Applicable Standards	8
1.3 Testing Location Information	8
1.4 Measurement Uncertainty	9
2 Test Configuration of EUT.....	10
2.1 Test Channel Mode	10
2.2 The Worst Case Measurement Configuration	10
2.3 EUT Operation during Test	11
2.4 Accessories	11
2.5 Support Equipment.....	12
2.6 Test Setup Diagram	13
3 Transmitter Test Result	15
3.1 AC Power-line Conducted Emissions	15
3.2 Maximum Output Power	17
3.3 Unwanted Emissions.....	19
4 Test Equipment and Calibration Data	23
Appendix A. Test Results of AC Power-line Conducted Emissions	
Appendix B. Test Results of Maximum Output Power	
Appendix C. Test Results of Unwanted Emissions	
Appendix D. Test Photos	
Photographs of EUT v01	



TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB-A12_1 Ver1.3



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.407(a)	Maximum Output Power	PASS	-
3.3	15.407(b)	Unwanted Emissions	PASS	-

Declaration of Conformity:

1. The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers. It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
2. The measurement uncertainty please refer to report "Measurement Uncertainty".

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Sam Chen

Report Producer: Sandy Chuang

1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5150-5250	a, n (HT20), ac (VHT20)	5180-5240	36-48 [4]
5725-5850		5745-5825	149-165 [5]
5150-5250	n (HT40), ac (VHT40)	5190-5230	38-46 [2]
5250-5350		5270-5310	54-62 [2]
5150-5250	ac (VHT80)	5210	42 [1]
5725-5850		5775	155 [1]

Band	Mode	BWch (MHz)	Nant
5.15-5.25GHz	802.11a	20	2TX
5.15-5.25GHz	802.11n HT20	20	2TX
5.15-5.25GHz	802.11ac VHT20	20	2TX
5.15-5.25GHz	802.11n HT40	40	2TX
5.15-5.25GHz	802.11ac VHT40	40	2TX
5.15-5.25GHz	802.11ac VHT80	80	2TX
5.725-5.85GHz	802.11a	20	2TX
5.725-5.85GHz	802.11n HT20	20	2TX
5.725-5.85GHz	802.11ac VHT20	20	2TX
5.725-5.85GHz	802.11n HT40	40	2TX
5.725-5.85GHz	802.11ac VHT40	40	2TX
5.725-5.85GHz	802.11ac VHT80	80	2TX

Note:

- 11a, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- VHT20, VHT40, VHT80 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.
- BWch is the nominal channel bandwidth.

**1.1.2 Antenna Information**

Ant.	Port	Brand	P/N	Antenna Type	Connector	Gain (dBi)	
						2.4GHz	5GHz
1	1	TP-Link	3101503165	Dipole Antenna	I-PEX	1.5	1.5
2	2	TP-Link	3101503166	Dipole Antenna	I-PEX	1.5	1.5

Note: The above information was declared by manufacturer.

For 2.4GHz function:**For IEEE 802.11b/g/n (2TX/2RX):**

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

For 5GHz function:**For IEEE 802.11a/n/ac (2TX/2RX):**

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

1.1.3 Mode Test Duty Cycle

Mode	DC	DCF(dB)	T(s)	VBW(Hz) $\geq 1/T$
802.11a	0.958	0.19	1.398m	1k
802.11ac VHT20	0.765	1.16	2.107m	1k
802.11ac VHT40	0.674	1.71	3.964m	300
802.11ac VHT80	0.988	0.05	n/a (DC $\geq$ 0.98)	n/a (DC $\geq$ 0.98)

Note:

- ♦ DC is Duty Cycle.
- ♦ DCF is Duty Cycle Factor.

1.1.4 EUT Operational Condition

EUT Power Type	From Internal power supply			
Beamforming Function	☐	With beamforming	☒	Without beamforming
Function	☐	Outdoor P2M	☒	Indoor P2M
	☐	Fixed P2P	☐	Client
Channel Puncturing Function	☐	Supported	☒	Unsupported
Support RU	☒	Full RU	☐	Partial RU
Test Software Version	QATool (Version 0.0.2.6)			

Note: The above information was declared by manufacturer.



1.1.5 Table for Permissive Change

This product is an extension of original one reported under Sporton project number: FR672231-01AB.
Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
1. Changing PHY chip for PLC/power board	1. AC Power Port Conducted Emission 2. Maximum Conducted Output Power (802.11a / 5200, 802.11ac / 5785MHz) 3. Unwanted Emissions (below 1GHz; above 1GHz: 802.11a / 5200, 802.11ac / 5785MHz)
2. Revising FCC ID to "2AXJ4WPA8631PV3" from "TE7WPA8631PV3." 3. Revising applicant's and manufacturer's company name to "TP-Link Corporation Limited" from "TP-Link Technologies Co., Ltd." 4. Revising applicant's and manufacturer's company address to "Room 901, 9/F. , New East Ocean Centre, 9 Science Museum Road, Tsim Sha Tsui, Kowloon, Hong Kong" from "Building 24 (floors 1,3,4,5) and 28 (floors1-4), Central Science and Technology Park,Nanshan Shenzhen, 518057 China."	After evaluation, it does not need to re-test.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2013
- ♦ FCC KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 662911 D01 v02r01
- ♦ FCC KDB 412172 D01 v01r01
- ♦ FCC KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu (TAF: 3787)	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.) TEL: 886-3-656-9065 FAX: 886-3-656-9085 Test site Designation No. TW3787 with FCC. Conformity Assessment Body Identifier (CABID) TW3787 with ISED.

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted	TH02-CB	Caster Chang	21.3-22.8°C / 62-67%	Dec. 14, 2022
Radiated <Below 1GHz>	03CH05-CB	Wendy Hsu	24.4-25.5 °C / 55-58%	Oct. 14, 2022
Radiated <Above 1GHz>	03CH06-CB	Wendy Hsu	22.4~23.3 / 65~67	Dec. 14, 2022
AC Conduction	CO01-CB	Allen Chung	24~25 °C / 56~59%	Oct. 18, 2022



1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.4 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	3.4 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	5.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.3 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	5.1 dB	Confidence levels of 95%
Conducted Emission	2.4 dB	Confidence levels of 95%
Output Power Measurement	1.5 dB	Confidence levels of 95%

2 Test Configuration of EUT

2.1 Test Channel Mode

Mode	Power Setting
802.11a_Nss1,(6Mbps)_2TX	-
5200MHz	2E
802.11ac VHT20_Nss1,(MCS0)_2TX	-
5720MHz Straddle 5.725-5.85GHz	
5785MHz	32

Note:

- ♦ VHT20 covers HT20 due to similar modulation. The power setting of HT20 modes are the same or lower than VHT20.

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral
Operating Mode	Normal Link
1	The PLC function of EUT with Idle mode

The Worst Case Mode for Following Conformance Tests	
Tests Item	Maximum Output Power
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests	
Tests Item	Unwanted Emissions
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	CTX
Y-axis generated the worst result for Emissions in Unwanted Emissions <Above 1GHz>, thus the measurement will follow this same test configuration.	
1	2.4GHz: Place EUT in Y axis
2	5GHz: Place EUT in Y axis
For operating mode 1 is the worst case and it was record in this test report.	
Operating Mode > 1GHz	CTX
Y-axis generated the worst result, thus the measurement will follow this same test configuration.	
1	5GHz: Place EUT in Y axis

2.3 EUT Operation during Test

For CTX Mode:

The EUT was programmed to be in continuously transmitting mode.

For Normal Link Mode:

During the test, the EUT operation to normal function.

At the same time, the PLC function of EUT performed "Idle Mode" for the test.

2.4 Accessories

N/A



2.5 Support Equipment


For AC Conduction:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	LAN NB	DELL	E6430	N/A
B	5G NB	DELL	E6430	N/A
C	2.4G NB	DELL	E6430	N/A
D	Lighting	Philips	E27	NA


For Radiated and RF Conducted:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E4300	N/A

2.6 Test Setup Diagram

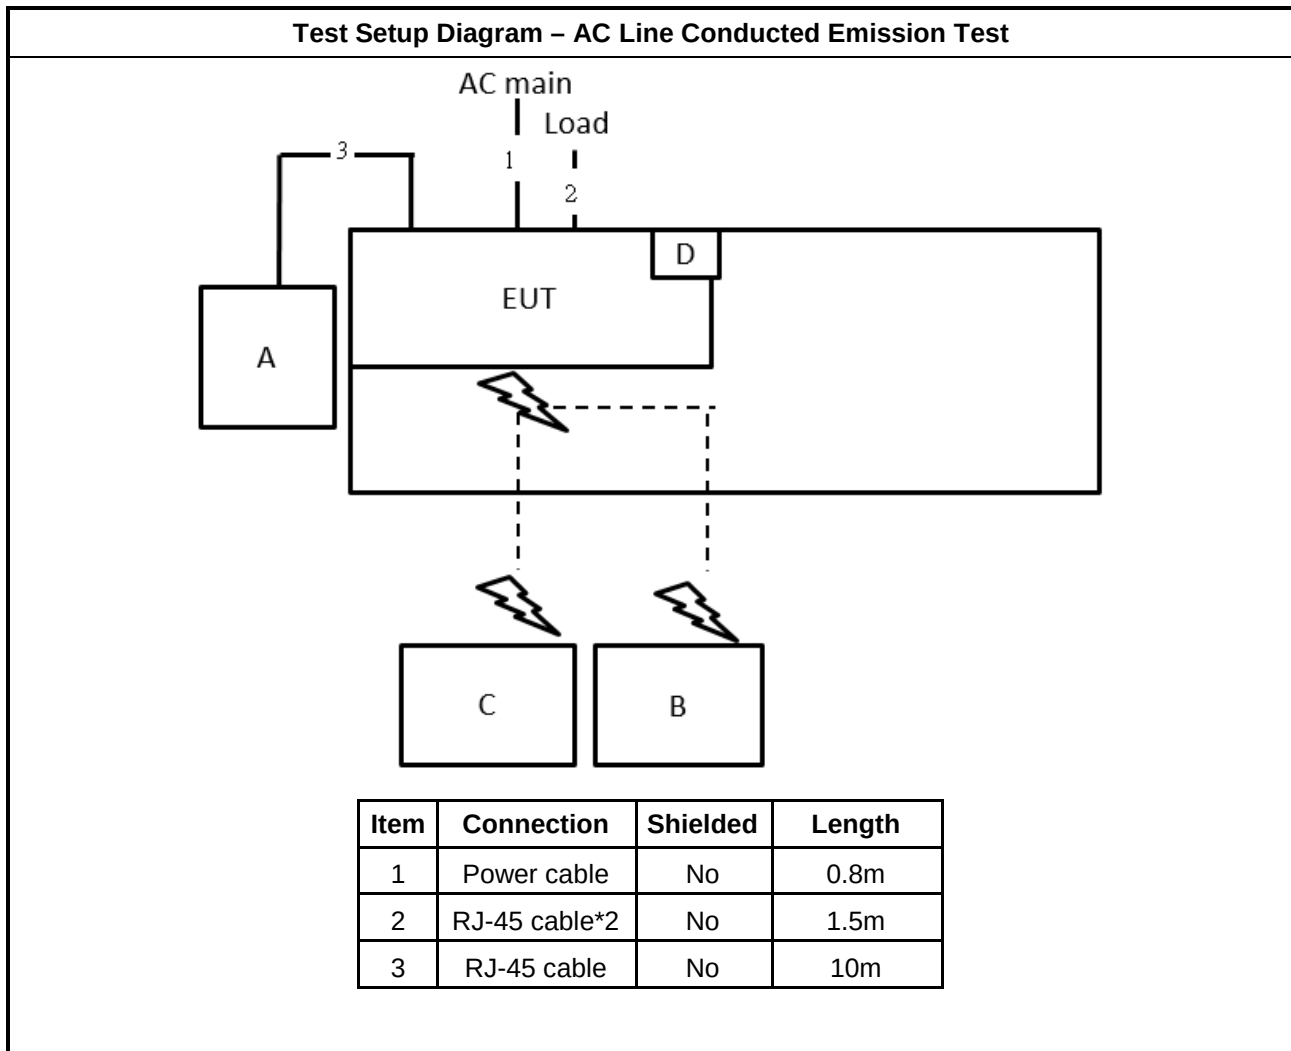

Test Setup Diagram - Radiated Test

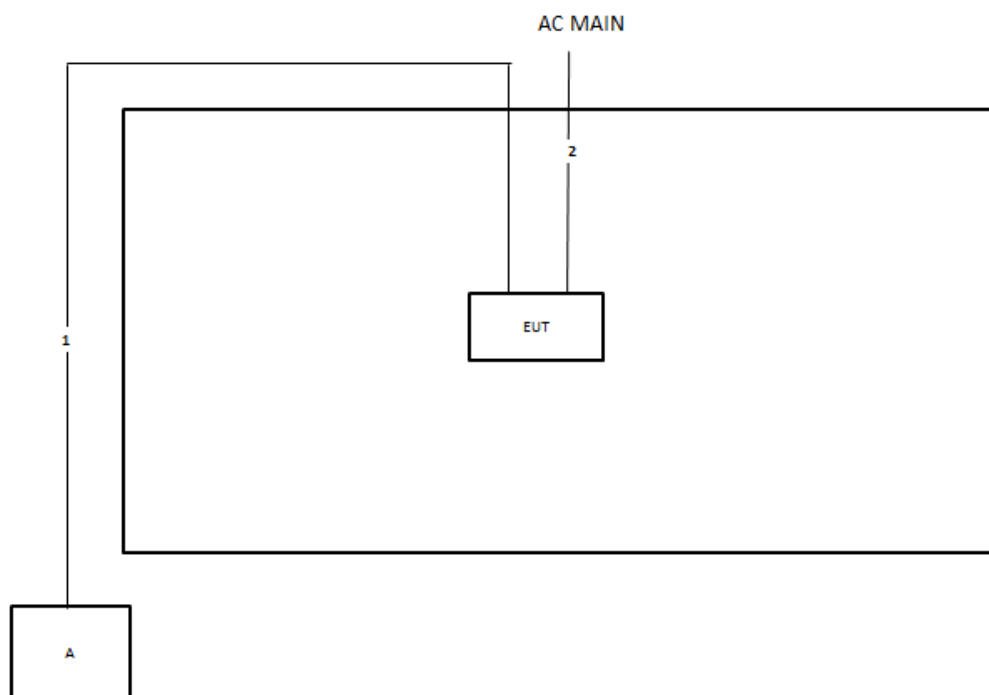

Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	Power cable	No	1.5m



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50
Note 1: * Decreases with the logarithm of the frequency.		


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

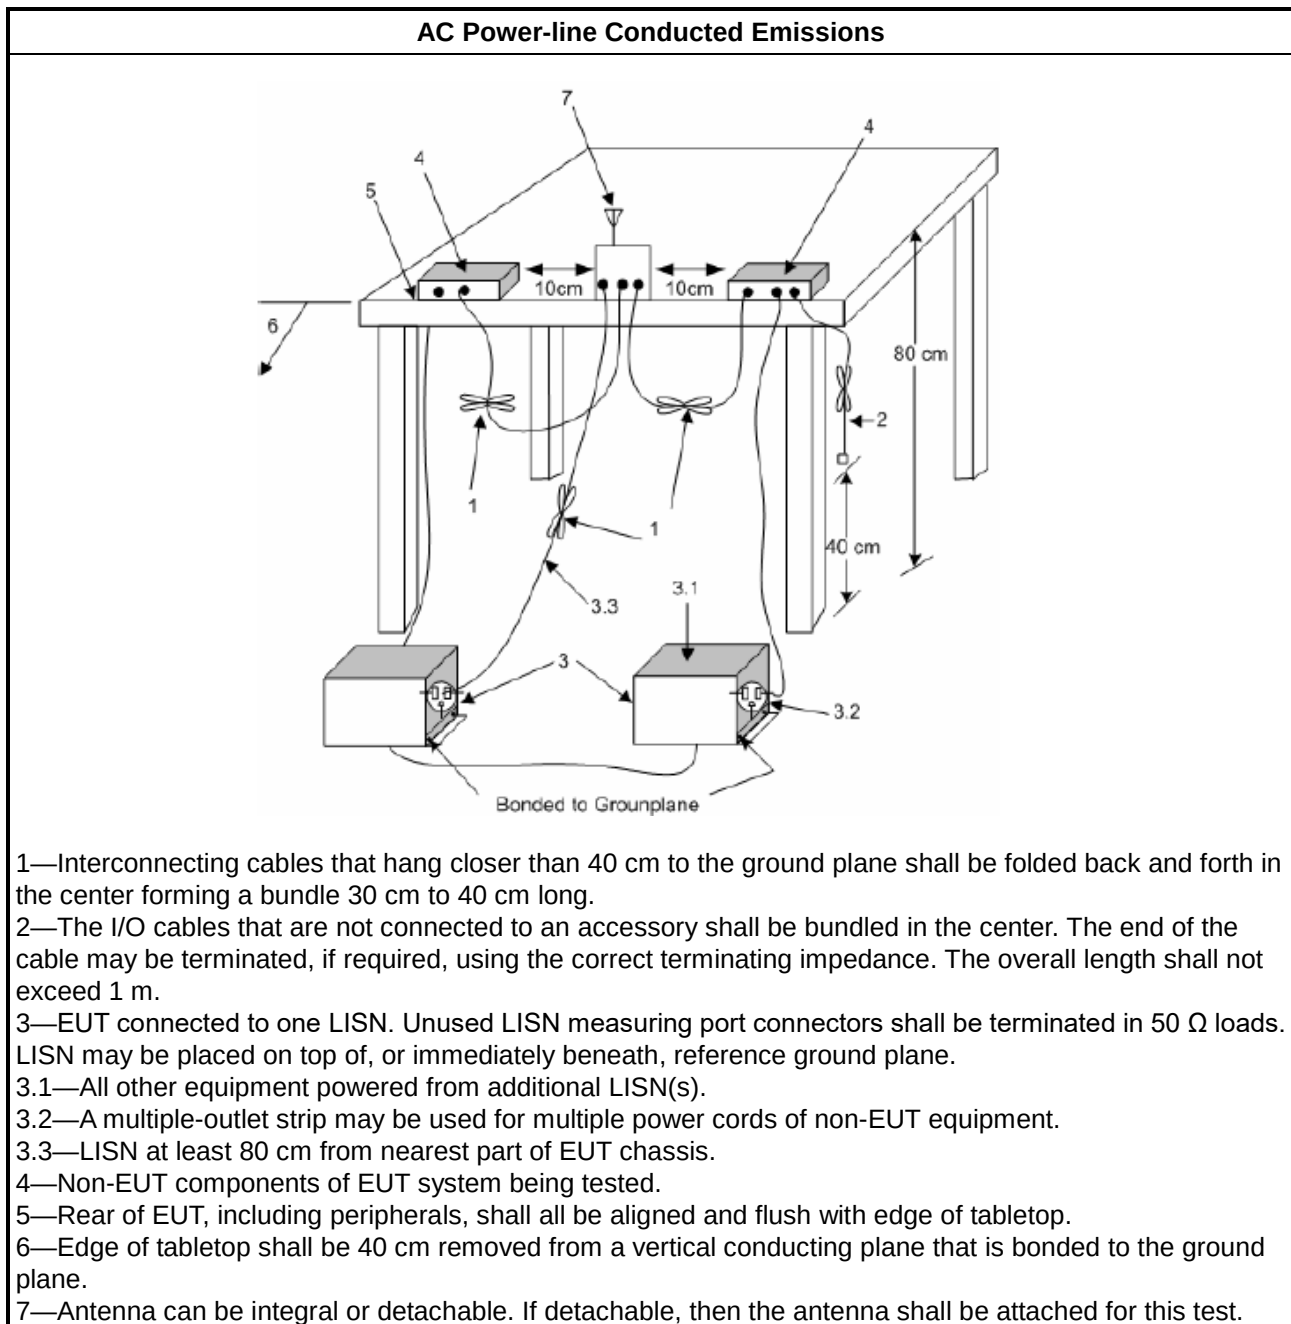

3.1.5 Measurement Results Calculation

The measured Level is calculated using:

- a. Corrected Reading: LISN Factor (LISN) + Attenuator (AT/AUX) + Cable Loss (CL) + Read Level (Raw) = Level
- b. Margin = -Limit + Level

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A



3.2 Maximum Output Power

3.2.1 Limit

Maximum Output Power Limit	
UNII Devices	
☒ For the 5.15-5.25 GHz band:	
☐	- Outdoor AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$. e.i.r.p. at any elevation angle above 30 degrees ≤ 125mW [21dBm] - Indoor AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ - Point-to-point AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 23$ dBi, then $P_{Out} = 30 - (G_{TX} - 23)$. - Mobile or Portable Client: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.
☐ For the 5.25-5.35 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.	
☐ For the 5.47-5.725 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.	
☒ For the 5.725-5.85 GHz band:	
☐	- Point-to-multipoint systems (P2M): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$. - Point-to-point systems (P2P): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W.
LE-LAN Devices	
☐ For the 5.15-5.25 GHz band, the maximum e.i.r.p. shall not exceed 200 mW or 10 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.	
☐ For the 5.25-5.35 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz	
☐ For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz	
☐ For the 5.725-5.85 GHz band:	
☐	- Point-to-multipoint systems (P2M): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$. - Point-to-point systems (P2P): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W.
P_{Out} = maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
	Average over on/off periods with duty factor
☐	Refer as FCC KDB 789033, clause E Method SA-2 (spectral trace averaging).
☐	Refer as FCC KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
	Wideband RF power meter and average over on/off periods with duty factor
☒	Refer as FCC KDB 789033, clause E Method PM-G (using an RF average power meter).
☒	For conducted measurement.
	If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
	If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$
☐	For radiated measurement.
	Refer as FCC KDB 789033 clause II A.1.F "Antenna-port Conducted versus Radiated Testing"
	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
	Refer as 錯誤! 找不到參照來源。 clause 2.2 for EIRP calculation.

3.2.4 Test Setup

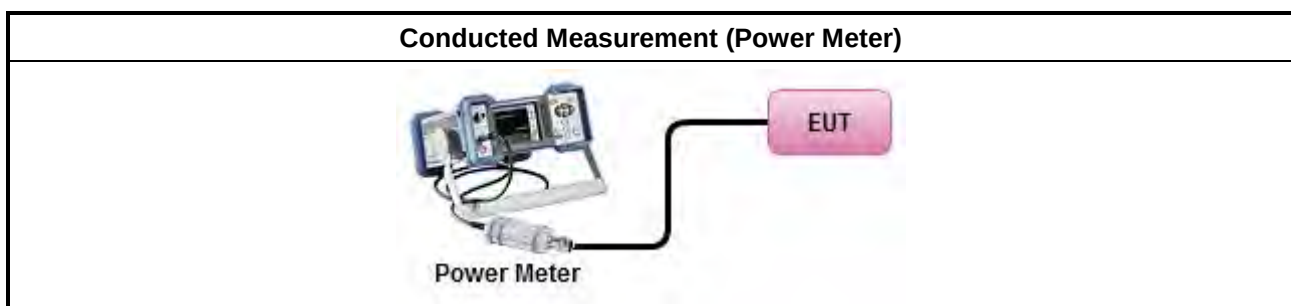

3.2.5 Test Result of Maximum Output Power

Refer as Appendix B



3.3 Unwanted Emissions

3.3.1 Transmitter Unwanted Emissions Limit

Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
☒ 5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
☐ 5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
☐ 5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
☒ 5.725 - 5.85 GHz	all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of



linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).


3.3.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).	
The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as FCC KDB 789033, clause G)2) for unwanted emissions into non-restricted bands.
	Refer as FCC KDB 789033, clause G)1) for unwanted emissions into restricted bands.
	☐ Refer as FCC KDB 789033, G)6) Method AD (Trace Averaging).
	☒ Refer as FCC KDB 789033, G)6) Method VB (Reduced VBW).
	☐ Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.
	☐ Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	☒ Refer as FCC KDB 789033, clause G)5) measurement procedure peak limit.
☐ Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.	
For radiated measurement.	
	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
The any unwanted emissions level shall not exceed the fundamental emission level.	
All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.	

3.3.4 Test Setup

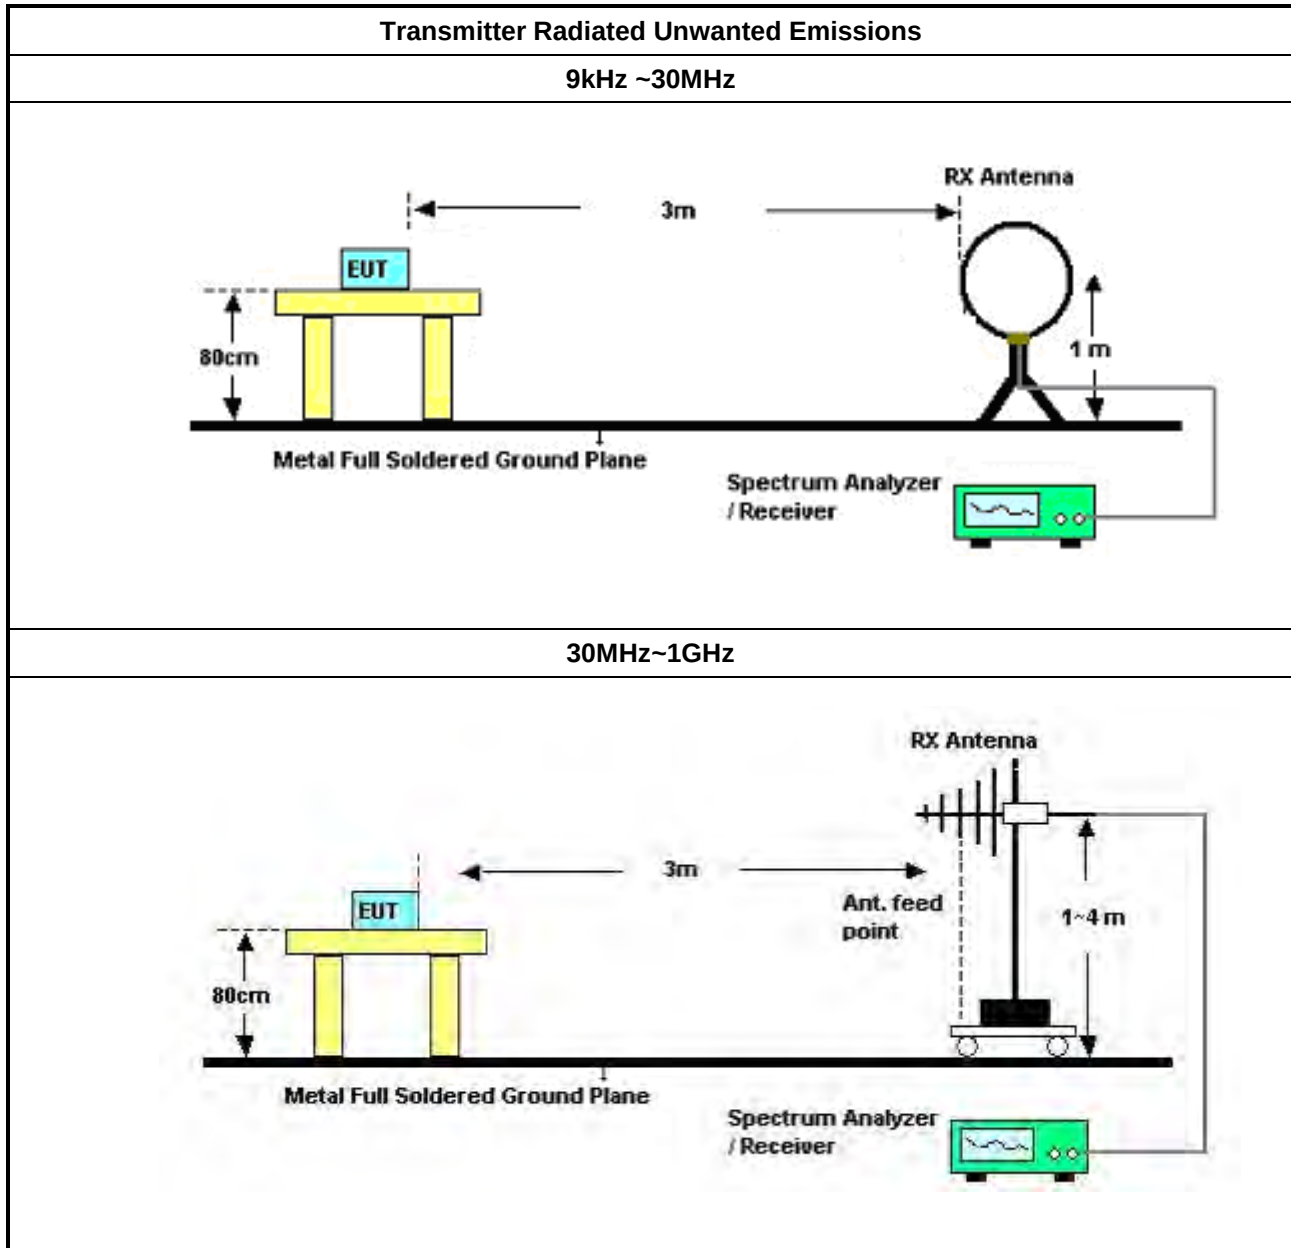

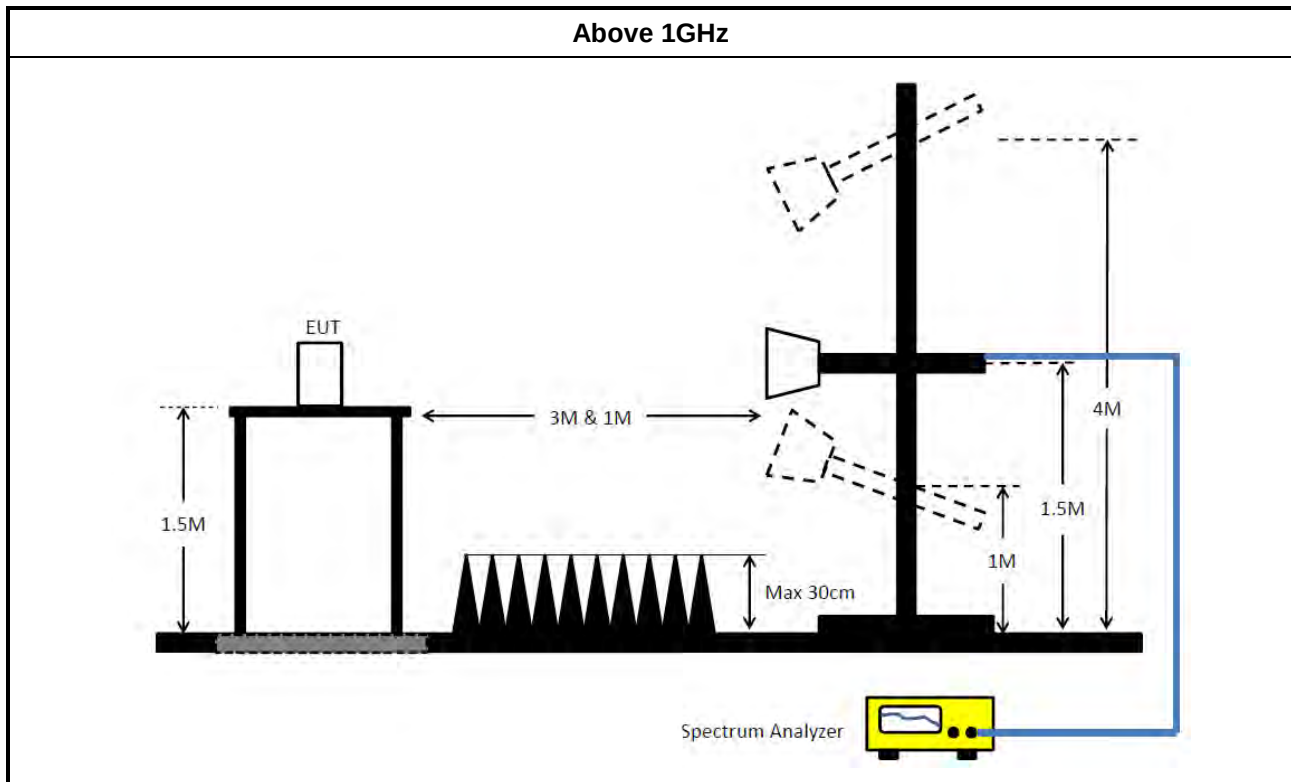

3.3.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable) = Level.

3.3.6 Transmitter Unwanted Emissions (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

3.3.7 Test Result of Transmitter Unwanted Emissions

Refer as Appendix C



4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.4GHz	Feb. 22, 2022	Feb. 21, 2023	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Feb. 09, 2022	Feb. 08, 2023	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Apr. 12, 2022	Apr. 11, 2023	Conduction (CO01-CB)
Pulse Limiter	Rohde&Schwarz	ESH3-Z2	100430	9kHz ~ 30MHz	Feb. 10, 2022	Feb. 09, 2023	Conduction (CO01-CB)
COND Cable	Woken	Cable	Low cable-CO01	9kHz ~ 30MHz	Oct. 18, 2022	Oct. 17, 2023	Conduction (CO01-CB)
Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Conduction (CO01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	May 14, 2022	May 13, 2023	Radiation (03CH05-CB)
3m Semi Anechoic Chamber NSA	TDK	SAC-3M	03CH05-CB	30 MHz ~ 1 GHz	Aug. 03, 2022	Aug. 02, 2023	Radiation (03CH05-CB)
Bilog Antenna with 6dB Attenuator	TESEQ & EMCI	CBL 6112D & N-6-06	35236 & AT-N0610	30MHz ~ 2GHz	Mar. 25, 2022	Mar. 24, 2023	Radiation (03CH05-CB)
Pre-Amplifier	EMCI	EMC330N	980331	20MHz ~ 3GHz	Apr. 26, 2022	Apr. 25, 2023	Radiation (03CH05-CB)
Spectrum Analyzer	R&S	FSP40	100304	9kHz ~ 40GHz	Mar. 14, 2022	Mar. 13, 2023	Radiation (03CH05-CB)
EMI Test Receiver	R&S	ESCS	826547/017	9kHz ~ 2.75GHz	Jun. 17, 2022	Jun. 16, 2023	Radiation (03CH05-CB)
RF Cable-low	Woken	RG402	Low Cable-04+23	30MHz~1GHz	Oct. 03, 2022	Oct. 02, 2023	Radiation (03CH05-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Radiation (03CH05-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH06-CB	1GHz ~18GHz 3m	Sep. 30, 2022	Sep. 29, 2023	Radiation (03CH06-CB)
Horn Antenna	SCHWARZBECK	BBHA9120D	BBHA 9120D-1292	1GHz~18GHz	Aug. 09, 2022	Aug. 08, 2023	Radiation (03CH06-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Aug. 22, 2022	Aug. 21, 2023	Radiation (03CH06-CB)
Pre-Amplifier	Agilent	83017A	MY53270064	0.5GHz ~ 26.5GHz	Aug 02, 2022	Aug 01, 2023	Radiation (03CH06-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 16, 2022	Nov. 15, 2023	Radiation (03CH06-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Signal Analyzer	R&S	FSV40	101904	9kHz ~ 40GHz	Apr. 26, 2022	Apr. 25, 2023	Radiation (03CH06-CB)
RF Cable-high	Woken	RG402	High Cable-67	1GHz~18GHz	Oct. 03, 2022	Oct. 02, 2023	Radiation (03CH06-CB)
RF Cable-high	Woken	RG402	High Cable-05+67	1GHz~18GHz	Oct. 03, 2022	Oct. 02, 2023	Radiation (03CH06-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Dec. 07, 2022	Dec. 06, 2023	Radiation (03CH06-CB)
High Cable	Woken	WCA0929M	40G#5	1GHz ~ 40 GHz	Dec. 07, 2022	Dec. 06, 2023	Radiation (03CH06-CB)
High Cable	Woken	WCA0929M	40G#6	1GHz ~ 40 GHz	Dec. 07, 2022	Dec. 06, 2023	Radiation (03CH06-CB)
Power Sensor	Anritsu	MA2411B	1126203	300MHz~40GHz	Oct. 17, 2022	Oct. 16, 2023	Conducted (TH02-CB)
Power Meter	Anritsu	ML2495A	1210004	300MHz~40GHz	Oct. 17, 2022	Oct. 16, 2023	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-01	1 GHz – 18 GHz	Oct. 03, 2022	Oct. 02, 2023	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-02	1 GHz – 18 GHz	Oct. 03, 2022	Oct. 02, 2023	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-03	1 GHz – 18 GHz	Oct. 03, 2022	Oct. 02, 2023	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-04	1 GHz – 18 GHz	Oct. 03, 2022	Oct. 02, 2023	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-05	1 GHz – 18 GHz	Oct. 03, 2022	Oct. 02, 2023	Conducted (TH02-CB)
Switch	SPTCB	SP-SWI	SWI-02	1 GHz –26.5 GHz	Oct. 04, 2022	Oct. 03, 2023	Conducted (TH02-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Conducted (TH02-CB)

Note: Calibration Interval of instruments listed above is one year.
NCR means Non-Calibration required.




Conducted Emissions at Powerline

Appendix A

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	AV	217.5k	35.74	52.92	-17.18	Line

Mode 1

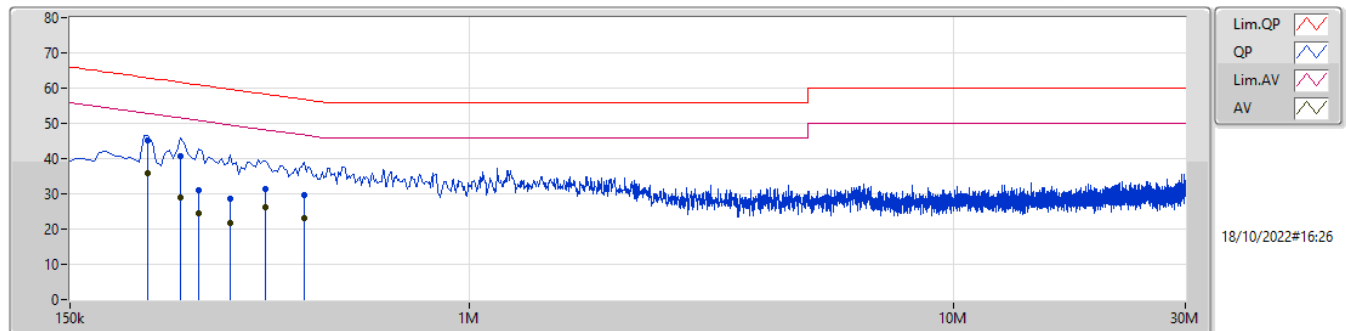

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)						
QP	217.5k	45.27	62.92	-17.65	9.99	Line	-	35.28	0.06	0.04	9.89						
AV	217.5k	35.74	52.92	-17.18	9.99	Line	"Worst"	25.75	0.06	0.04	9.89						
QP	253.5k	40.74	61.64	-20.90	10.00	Line	-	30.74	0.06	0.05	9.89						
AV	253.5k	28.85	51.64	-22.79	10.00	Line	-	18.85	0.06	0.05	9.89						
QP	276k	30.97	60.93	-29.96	10.00	Line	-	20.97	0.06	0.05	9.89						
AV	276k	24.48	50.93	-26.45	10.00	Line	-	14.48	0.06	0.05	9.89						
QP	321k	28.49	59.67	-31.18	10.00	Line	-	18.49	0.06	0.05	9.89						
AV	321k	21.62	49.67	-28.05	10.00	Line	-	11.62	0.06	0.05	9.89						
QP	379.5k	31.51	58.29	-26.78	10.01	Line	-	21.50	0.06	0.06	9.89						
AV	379.5k	26.35	48.29	-21.94	10.01	Line	-	16.34	0.06	0.06	9.89						
QP	456k	29.67	56.76	-27.09	10.01	Line	-	19.66	0.06	0.06	9.89						
AV	456k	23.03	46.76	-23.73	10.01	Line	-	13.02	0.06	0.06	9.89						

Mode 1

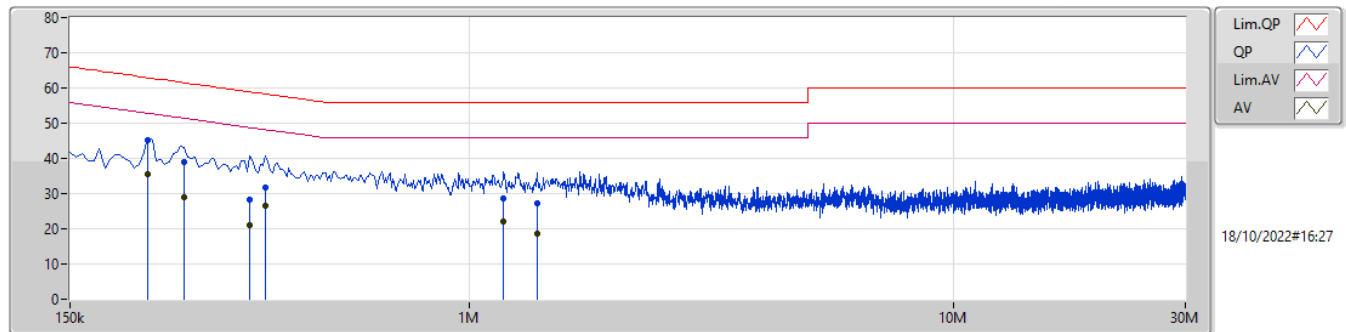

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)						
QP	217.5k	45.02	62.92	-17.90	10.00	Neutral	-	35.02	0.07	0.04	9.89						
AV	217.5k	35.51	52.92	-17.41	10.00	Neutral	"Worst"	25.51	0.07	0.04	9.89						
QP	258k	38.90	61.49	-22.59	10.01	Neutral	-	28.89	0.07	0.05	9.89						
AV	258k	28.96	51.49	-22.53	10.01	Neutral	-	18.95	0.07	0.05	9.89						
QP	352.5k	28.15	58.91	-30.76	10.02	Neutral	-	18.13	0.07	0.06	9.89						
AV	352.5k	21.14	48.91	-27.77	10.02	Neutral	-	11.12	0.07	0.06	9.89						
QP	379.5k	31.58	58.29	-26.71	10.02	Neutral	-	21.56	0.07	0.06	9.89						
AV	379.5k	26.46	48.29	-21.83	10.02	Neutral	-	16.44	0.07	0.06	9.89						
QP	1.176M	28.54	56.00	-27.46	10.02	Neutral	-	18.52	0.08	0.05	9.89						
AV	1.176M	21.98	46.00	-24.02	10.02	Neutral	-	11.96	0.08	0.05	9.89						
QP	1.379M	27.41	56.00	-28.59	10.04	Neutral	-	17.37	0.09	0.06	9.89						
AV	1.379M	18.54	46.00	-27.46	10.04	Neutral	-	8.50	0.09	0.06	9.89						



Average Power

Appendix B

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.15-5.25GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	25.99	0.39719	27.49	0.56105
5.725-5.85GHz	-	-	-	-
802.11ac VHT20_Nss1,(MCS0)_2TX	27.34	0.54200	28.84	0.76560



Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-
5200MHz	Pass	1.50	23.26	22.67	25.99	30.00	27.49	36.00
802.11ac VHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5785MHz	Pass	1.50	24.34	24.31	27.34	30.00	28.84	36.00

DG = Directional Gain; Port X = Port X output power




Radiated Emissions below 1GHz

Appendix C.1

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	QP	500.45M	42.66	46.00	-3.34	Vertical

Mode 1

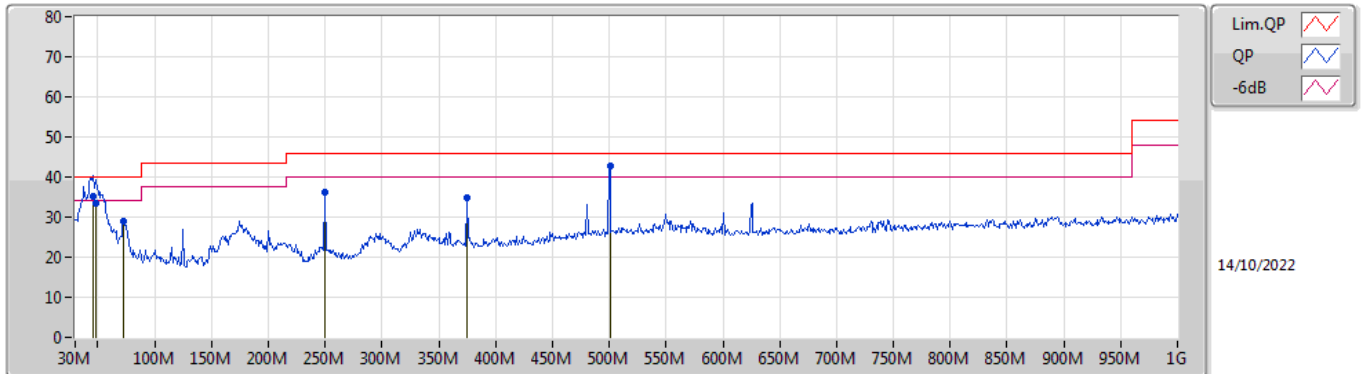

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV/m)	AF (dB/m)	CL (dB)	PA (dB)
QP	45.52M	35.17	40.00	-4.83	-15.43	3	Vertical	357	1.00	-	50.60	15.78	0.62	31.83
QP	48.43M	33.39	40.00	-6.61	-16.61	3	Vertical	0	1.25	-	50.00	14.59	0.65	31.85
PK	72.68M	29.01	40.00	-10.99	-18.92	3	Vertical	193	1.25	-	47.93	12.17	0.88	31.97
PK	250.19M	36.06	46.00	-9.94	-11.78	3	Vertical	94	1.00	-	47.84	18.22	2.00	32.00
PK	375.32M	34.66	46.00	-11.34	-8.75	3	Vertical	171	1.00	-	43.41	20.83	2.59	32.17
QP	500.45M	42.66	46.00	-3.34	-6.24	3	Vertical	240	1.00	"Worst"	48.90	23.20	2.96	32.40

Mode 1

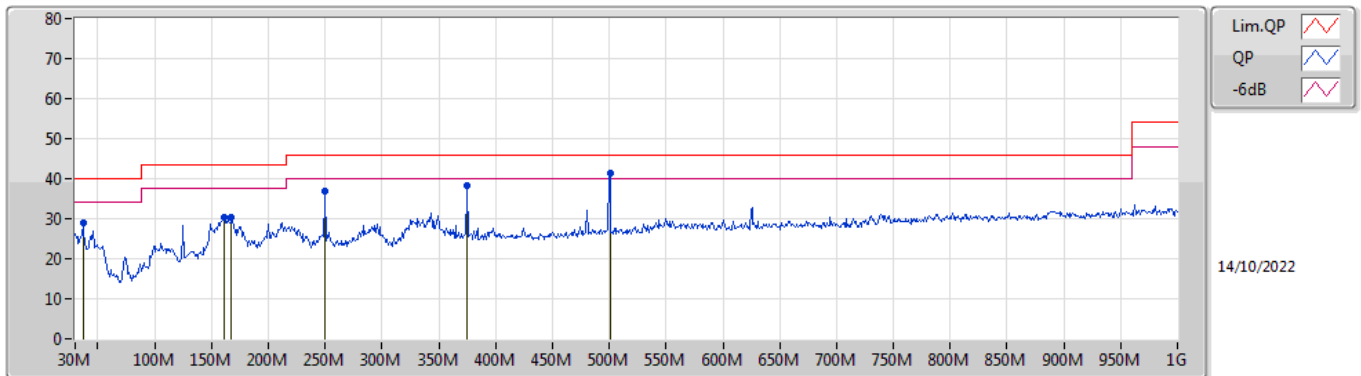

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV/m)	AF (dB/m)	CL (dB)	PA (dB)
PK	36.79M	28.85	40.00	-11.15	-10.83	3	Horizontal	214	1.00	-	39.68	20.36	0.52	31.71
PK	160.95M	30.32	43.50	-13.18	-14.75	3	Horizontal	95	1.50	-	45.07	15.71	1.52	31.98
PK	167.74M	30.37	43.50	-13.13	-14.89	3	Horizontal	88	1.50	-	45.26	15.54	1.56	31.99
PK	250.19M	36.81	46.00	-9.19	-11.78	3	Horizontal	114	1.25	-	48.59	18.22	2.00	32.00
PK	375.32M	38.29	46.00	-7.71	-8.75	3	Horizontal	212	1.00	-	47.04	20.83	2.59	32.17
PK	500.45M	41.24	46.00	-4.76	-6.24	3	Horizontal	223	1.50	"Worst"	47.48	23.20	2.96	32.40




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.15-5.25GHz	-	-	-	-	-	-	-	-	-	-	-
802.11a_Nss1.(6Mbps)_2TX	Pass	AV	5.1494G	53.22	54.00	-0.78	3	Vertical	330	1.65	-

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5200MHz_TX

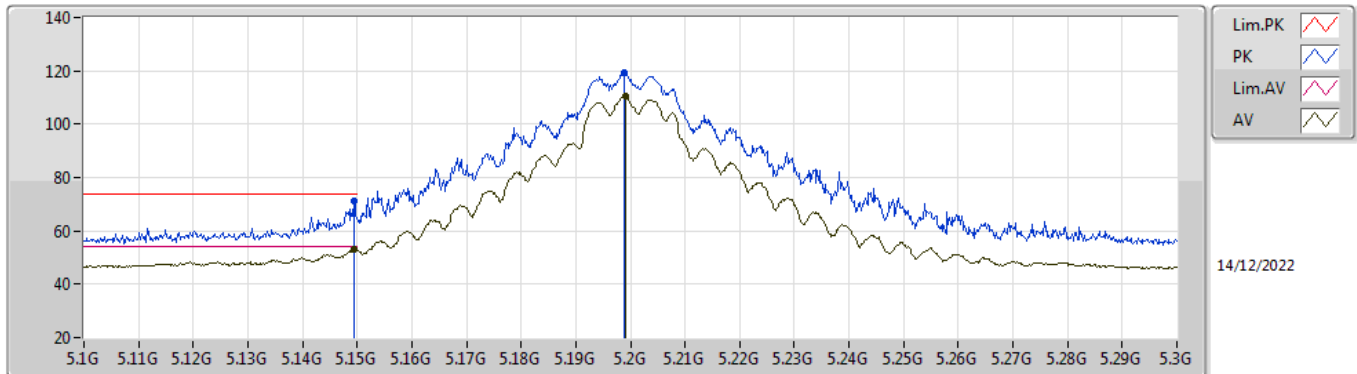


EUT Y_2TX
Setting 2E
06-H-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1494G	71.01	74.00	-2.99	65.92	3	Vertical	330	1.65	-	31.90	5.65	32.46
AV	5.1494G	53.22	54.00	-0.78	48.13	3	Vertical	330	1.65	-	31.90	5.65	32.46
PK	5.1988G	119.24	Inf	-Inf	114.20	3	Vertical	330	1.65	-	31.80	5.70	32.46
AV	5.199G	110.68	Inf	-Inf	105.64	3	Vertical	330	1.65	-	31.80	5.70	32.46

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5200MHz_TX

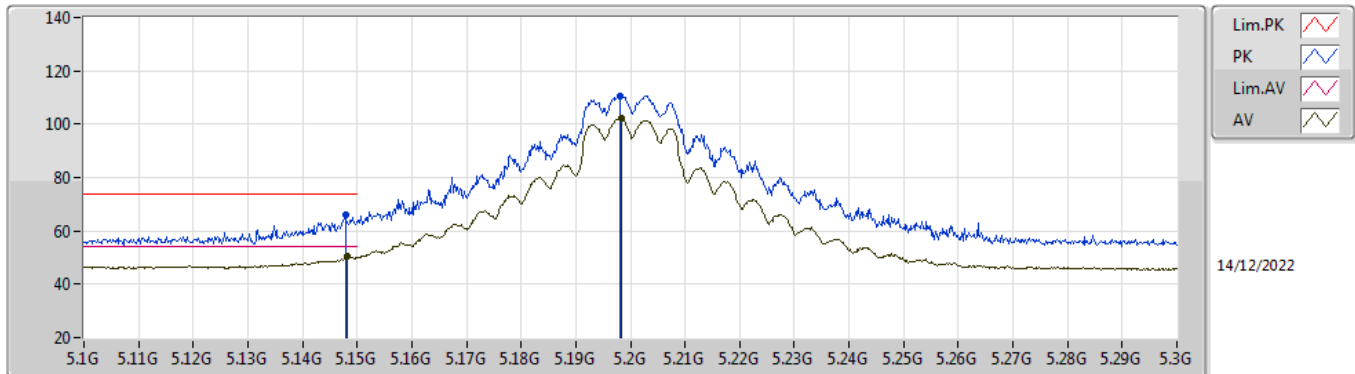


EUT Y_2TX
Setting 2E
06-H-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1478G	66.00	74.00	-8.00	60.91	3	Horizontal	105	1.80	-	31.90	5.65	32.46
AV	5.1482G	50.37	54.00	-3.63	45.28	3	Horizontal	105	1.80	-	31.90	5.65	32.46
PK	5.198G	110.68	Inf	-Inf	105.64	3	Horizontal	105	1.80	-	31.80	5.70	32.46
AV	5.1984G	102.02	Inf	-Inf	96.98	3	Horizontal	105	1.80	-	31.80	5.70	32.46

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5200MHz_TX

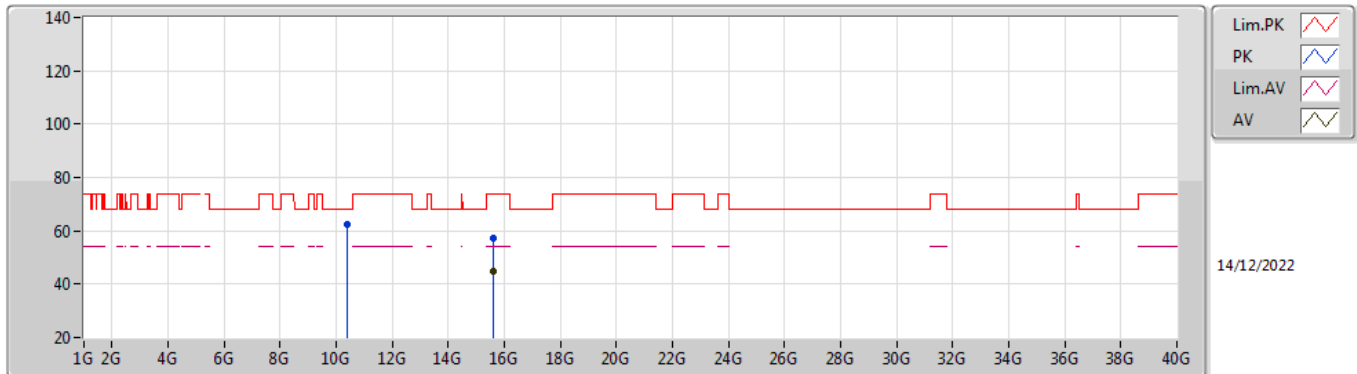


EUT Y_2TX
Setting 2E
06-H-G-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	10.40066G	62.51	68.20	-5.69	48.76	3	Vertical	42	1.75	-	40.10	8.28	34.63
PK	15.5991G	57.07	74.00	-16.93	43.45	3	Vertical	293	1.64	-	38.11	10.32	34.81
AV	15.60003G	45.07	54.00	-8.93	31.46	3	Vertical	293	1.64	-	38.10	10.32	34.81

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5200MHz_TX

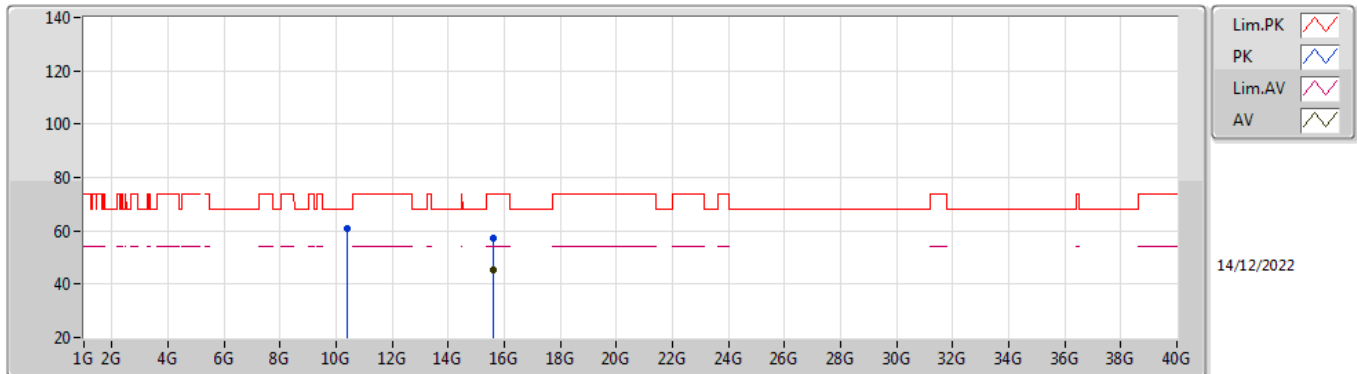


EUT Y_2TX
Setting 2E
06-H-G-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	10.40477G	60.63	68.20	-7.57	46.88	3	Horizontal	84	1.80	-	40.10	8.28	34.63
PK	15.60093G	57.05	74.00	-16.95	43.44	3	Horizontal	330	1.83	-	38.10	10.32	34.81
AV	15.5859G	45.19	54.00	-8.81	31.51	3	Horizontal	330	1.83	-	38.18	10.31	34.81

5.725-5.85GHz_802.11ac VHT20_Nss1,(MCS0)_2TX

5785MHz_TX

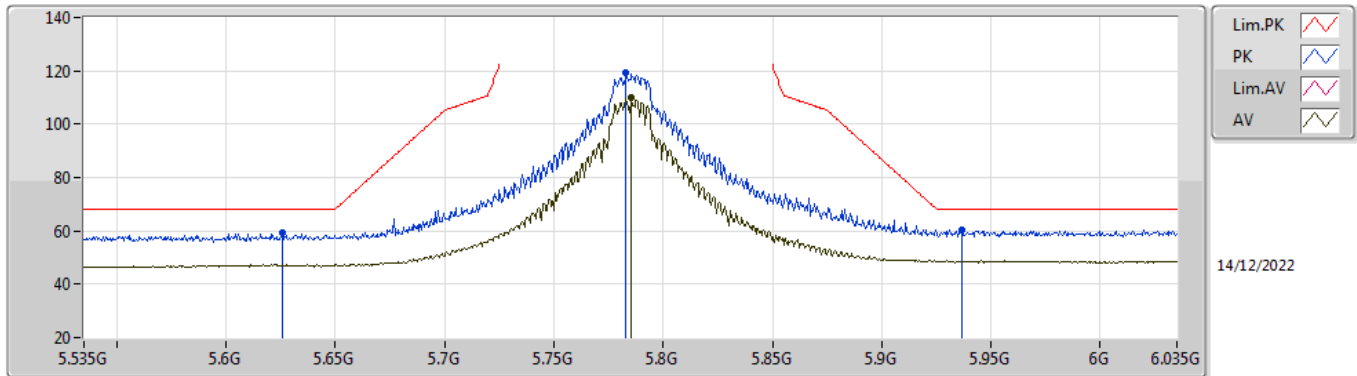


EUT Y_2TX
Setting 32
06-H-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.626G	59.43	68.20	-8.77	54.03	3	Vertical	353	1.80	-	31.85	6.01	32.46
PK	5.783G	119.06	Inf	-Inf	113.11	3	Vertical	353	1.80	-	32.27	6.09	32.41
AV	5.7855G	109.77	Inf	-Inf	103.82	3	Vertical	353	1.80	-	32.27	6.09	32.41
PK	5.9365G	60.33	68.20	-7.87	54.06	3	Vertical	353	1.80	-	32.60	6.03	32.36

5.725-5.85GHz_802.11ac VHT20_Nss1,(MCS0)_2TX

5785MHz_TX

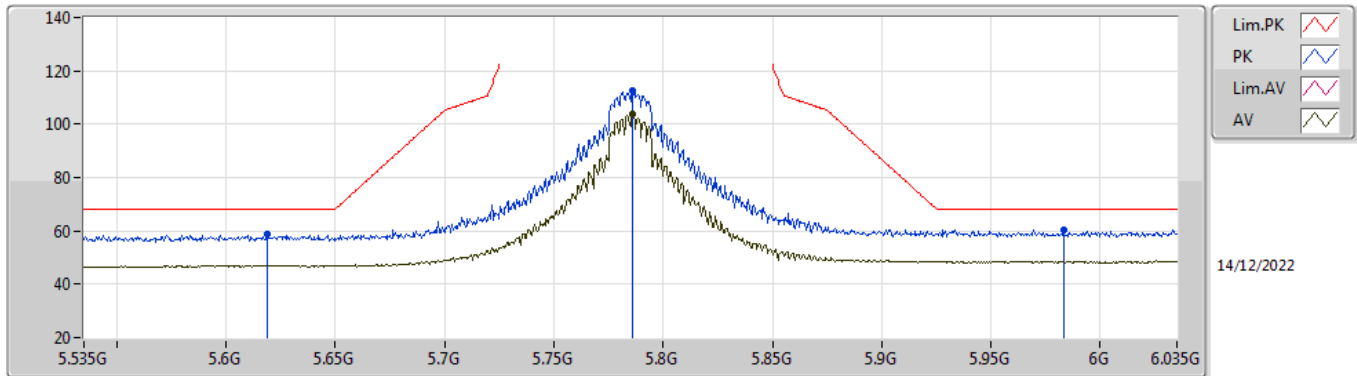


EUT Y_2TX
Setting 32
06-H-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.619G	58.78	68.20	-9.42	53.37	3	Horizontal	109	1.76	-	31.86	6.01	32.46
PK	5.786G	112.47	Inf	-Inf	106.52	3	Horizontal	109	1.76	-	32.27	6.09	32.41
AV	5.786G	103.54	Inf	-Inf	97.59	3	Horizontal	109	1.76	-	32.27	6.09	32.41
PK	5.983G	60.44	68.20	-7.76	54.25	3	Horizontal	109	1.76	-	32.53	6.01	32.35

5.725-5.85GHz_802.11ac VHT20_Nss1,(MCS0)_2TX

5785MHz_TX

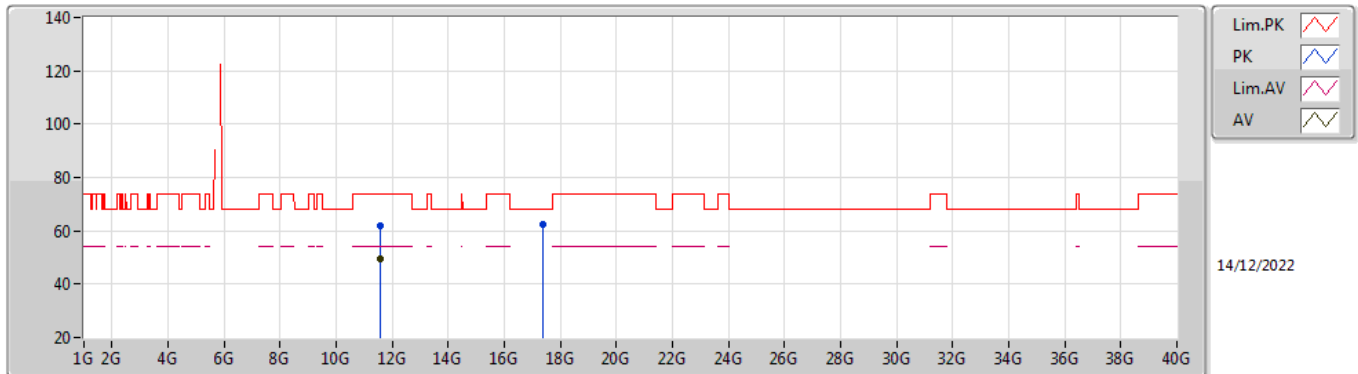


EUT Y_2TX
Setting 32
06-H-G-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.57075G	62.13	74.00	-11.87	48.00	3	Vertical	320	1.80	-	39.96	8.81	34.64
AV	11.57072G	49.72	54.00	-4.28	35.59	3	Vertical	320	1.80	-	39.96	8.81	34.64
PK	17.36052G	62.60	68.20	-5.60	44.49	3	Vertical	0	1.80	-	42.11	11.18	35.18

5.725-5.85GHz_802.11ac VHT20_Nss1,(MCS0)_2TX

5785MHz_TX

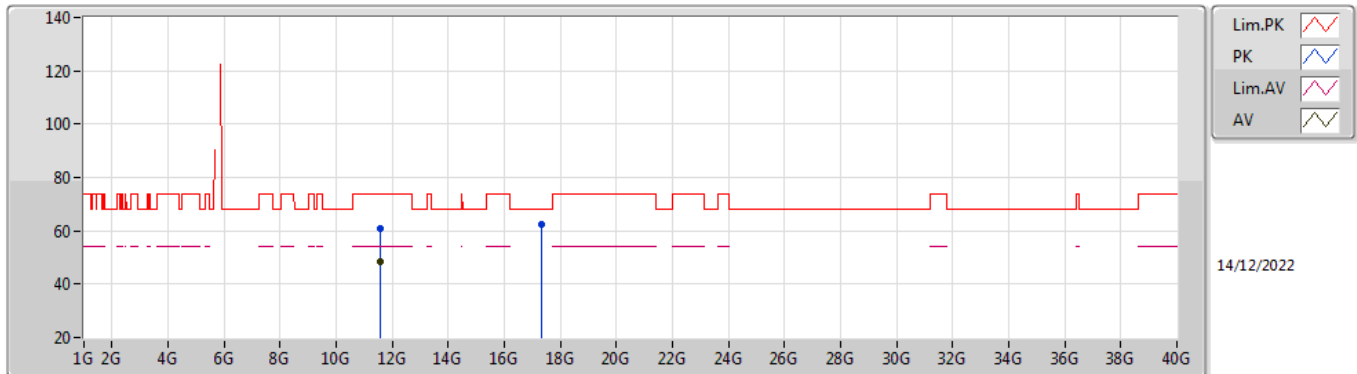

EUT Y_2TX
Setting 32
06-H-G-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.57234G	61.00	74.00	-13.00	46.87	3	Horizontal	58	1.78	-	39.96	8.81	34.64
AV	11.57036G	48.66	54.00	-5.34	34.53	3	Horizontal	58	1.78	-	39.96	8.81	34.64
PK	17.34927G	62.25	68.20	-5.95	44.26	3	Horizontal	0	1.80	-	41.99	11.17	35.17