



### 3DH5 Conducted Spurious Emissions - Left Earbud


#### Channel 00 (2402MHz)

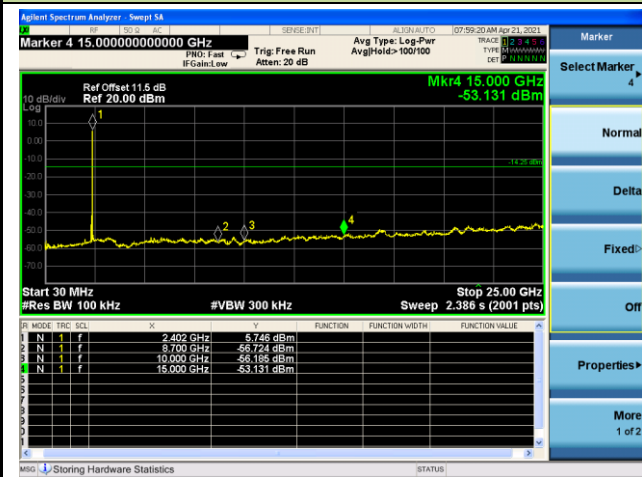

#### Channel 39 (2441MHz)

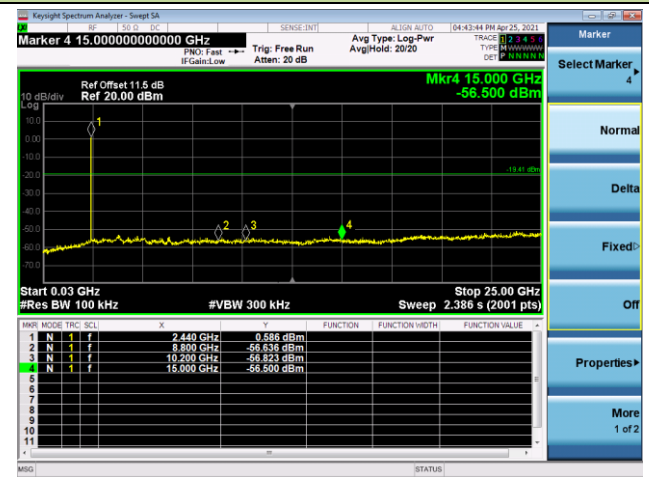


#### Channel 78 (2480MHz)

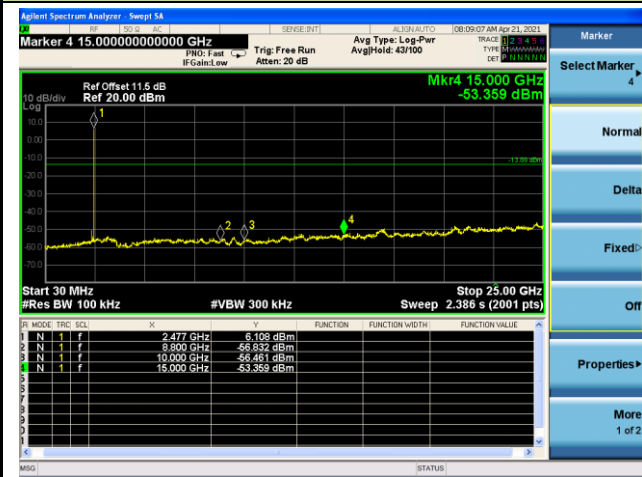


## DH5 Conducted Spurious Emissions - Right Earbud


### Channel 00 (2402MHz)

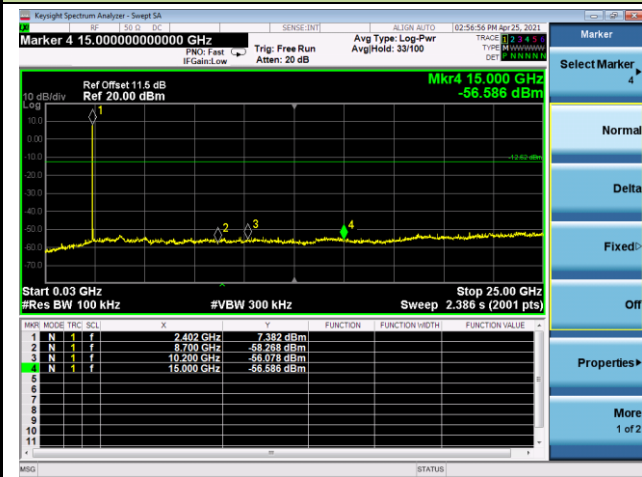

### Channel 39 (2441MHz)

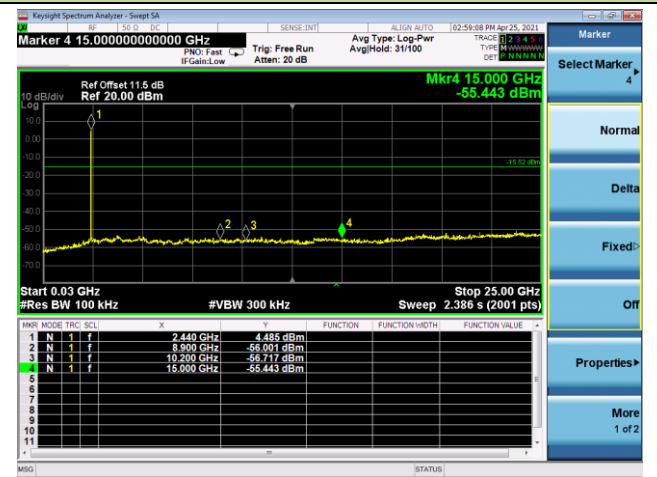


### Channel 78 (2480MHz)

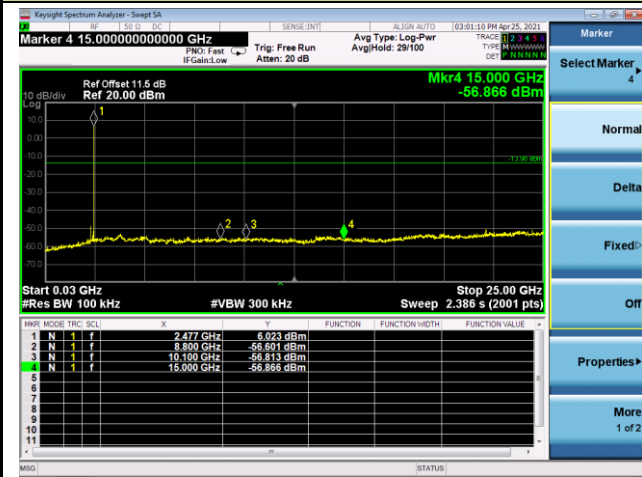


## 2DH5 Conducted Spurious Emissions - Right Earbud


### Channel 00 (2402MHz)

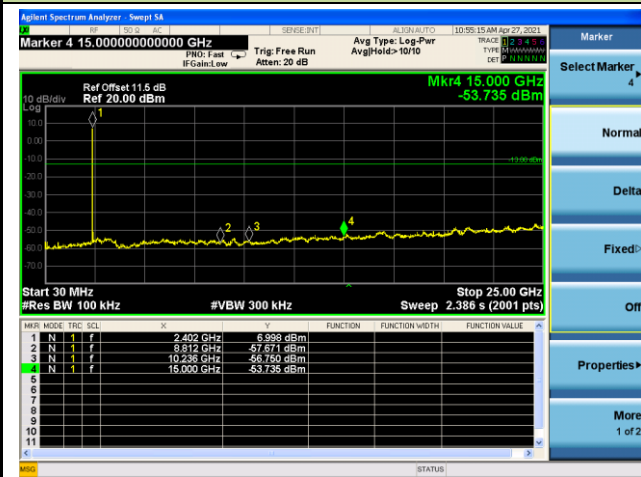

### Channel 39 (2441MHz)

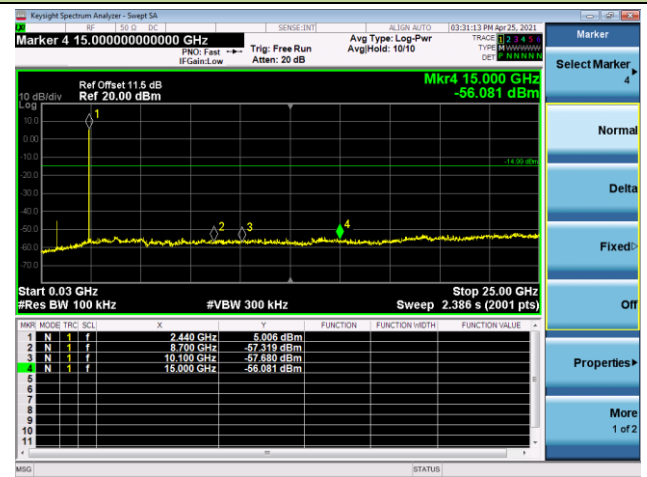


### Channel 78 (2480MHz)

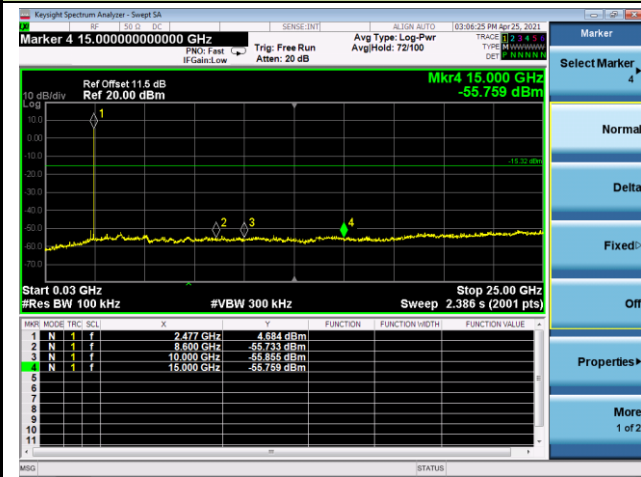


### 3DH5 Conducted Spurious Emissions - Right Earbud


#### Channel 00 (2402MHz)

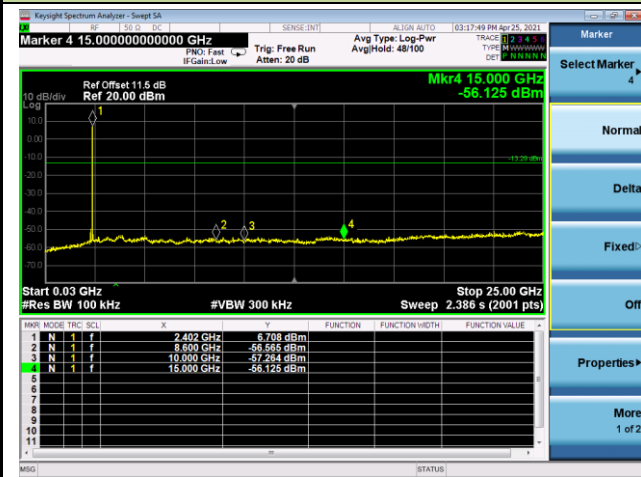

#### Channel 39 (2441MHz)

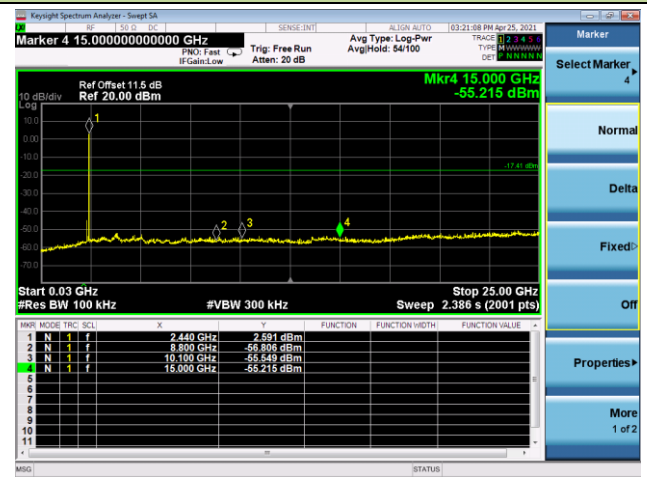

#### Channel 78 (2480MHz)

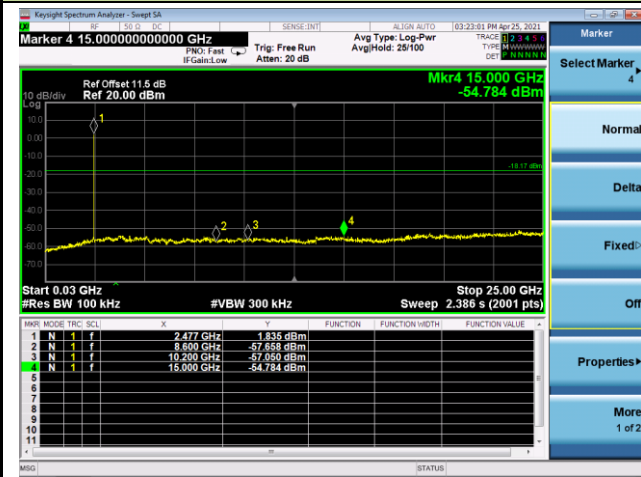

## 6.9. Radiated Spurious Emission Measurement

### 6.9.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

| FCC Part 15 Subpart C Paragraph 15.209 |                                       |                          |
|----------------------------------------|---------------------------------------|--------------------------|
| Frequency<br>(MHz)                     | Field Strength<br>( $\mu\text{V/m}$ ) | Measured Distance<br>(m) |
| 0.009 - 0.490                          | 2400/F (kHz)                          | 300                      |
| 0.490 - 1.705                          | 24000/F (kHz)                         | 30                       |
| 1.705 - 30                             | 30                                    | 30                       |
| 30 - 88                                | 100                                   | 3                        |
| 88 - 216                               | 150                                   | 3                        |
| 216 - 960                              | 200                                   | 3                        |
| Above 960                              | 500                                   | 3                        |

### 6.9.2. Test Procedure Used

ANSI C63.10-2013 - Section 6.3 & 6.4 & 6.5 & 6.6

### 6.9.3. Test Setting

**Table 1 - RBW as a function of frequency**

| Frequency     | RBW           |
|---------------|---------------|
| 9 ~ 150 kHz   | 200 ~ 300 Hz  |
| 0.15 ~ 30 MHz | 9 ~ 10 kHz    |
| 30 ~ 1000 MHz | 100 ~ 120 kHz |
| > 1000 MHz    | 1 MHz         |

**Quasi-Peak Measurements below 1GHz**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = As specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = Auto couple
6. Trace was allowed to stabilize

**Peak Measurements above 1GHz**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize

**Average Measurements above 1GHz (Method VB)**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle  $\geq 98\%$ , set VBW = 10Hz  
If the EUT duty cycle is  $< 98\%$ , set VBW  $\geq 1/T$ . T is the minimum transmission duration
4. Detector = Peak
5. Sweep time = Auto
6. Trace mode = Max hold
7. Trace was allowed to stabilize

### 6.9.4. Test Setup

#### Below 1GHz Test Setup:

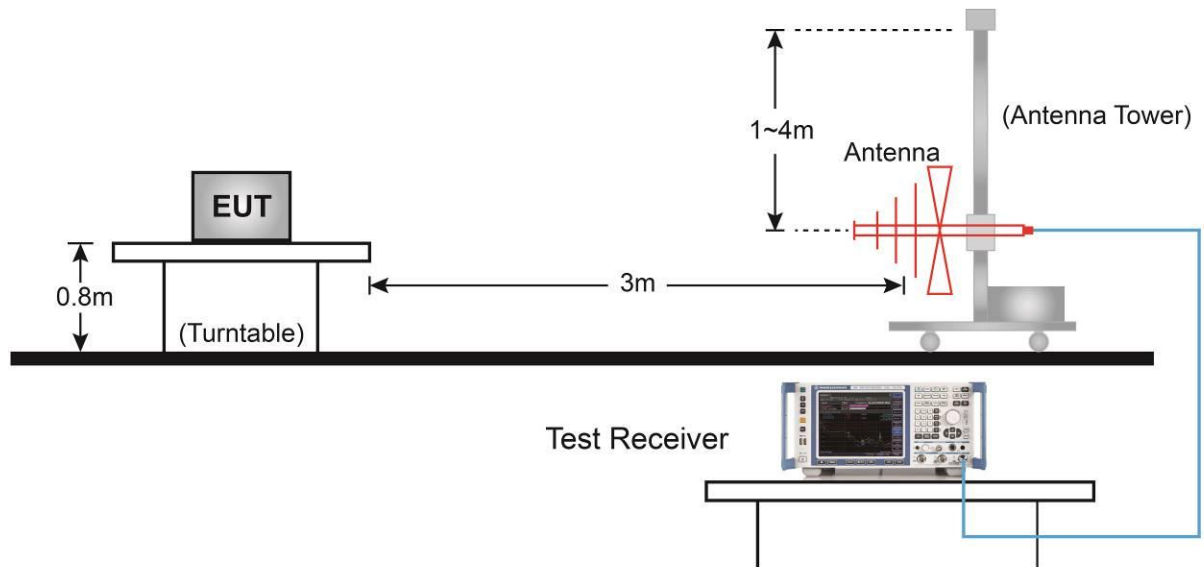

#### Above 1GHz Test Setup:

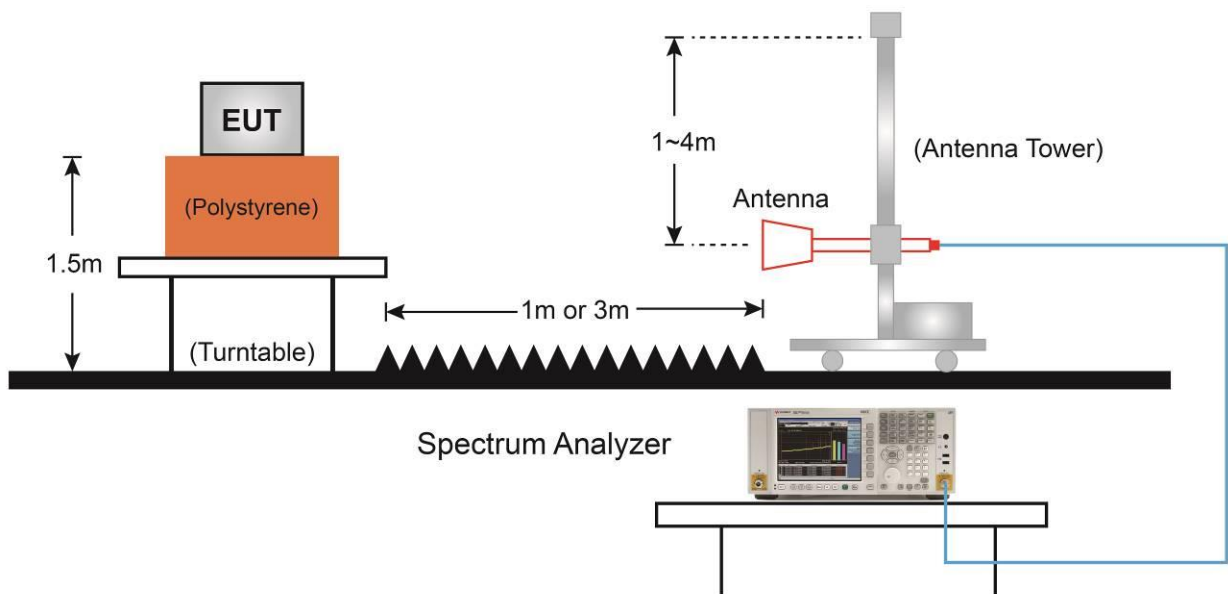

### 6.9.5. Test Result

|              |                                                                                                                                                                                   |               |                   |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-------------------|
| Test Site    | NS-AC1                                                                                                                                                                            | Test Engineer | Dillon Diao       |
| Test Date    | 2021/04/30                                                                                                                                                                        | Test Mode     | DH5 - Left Earbud |
| Test Channel | 00                                                                                                                                                                                |               |                   |
| Remark       | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |                   |

| Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
| 4808.0          | 44.3                 | 3.0         | 47.3                   | 74.0           | -26.7       | Peak     | Horizontal   |
| 8412.0          | 37.4                 | 11.0        | 48.4                   | 74.0           | -25.6       | Peak     | Horizontal   |
| 11480.5         | 35.0                 | 16.4        | 51.4                   | 74.0           | -22.6       | Peak     | Horizontal   |
| 4808.0          | 43.5                 | 3.0         | 46.5                   | 74.0           | -27.5       | Peak     | Vertical     |
| 7443.0          | 35.3                 | 10.5        | 45.8                   | 74.0           | -28.2       | Peak     | Vertical     |
| 11990.5         | 36.1                 | 15.6        | 51.7                   | 74.0           | -22.3       | Peak     | Vertical     |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|              |                                                                                                                                                                                   |               |                   |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-------------------|
| Test Site    | NS-AC1                                                                                                                                                                            | Test Engineer | Dillon Diao       |
| Test Date    | 2021/04/30                                                                                                                                                                        | Test Mode     | DH5 - Left Earbud |
| Test Channel | 39                                                                                                                                                                                |               |                   |
| Remark       | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |                   |

| Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
| 4884.5          | 42.1                 | 2.9         | 45.0                   | 74.0           | -29.0       | Peak     | Horizontal   |
| 7613.0          | 36.1                 | 10.3        | 46.4                   | 74.0           | -27.6       | Peak     | Horizontal   |
| 11378.5         | 35.7                 | 16.1        | 51.8                   | 74.0           | -22.2       | Peak     | Horizontal   |
| 4884.5          | 42.5                 | 2.9         | 45.4                   | 74.0           | -28.6       | Peak     | Vertical     |
| 7324.0          | 36.5                 | 10.2        | 46.7                   | 74.0           | -27.3       | Peak     | Vertical     |
| 10970.5         | 35.8                 | 15.8        | 51.6                   | 74.0           | -22.4       | Peak     | Vertical     |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|              |                                                                                                                                                                                   |               |                   |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-------------------|
| Test Site    | NS-AC1                                                                                                                                                                            | Test Engineer | Dillon Diao       |
| Test Date    | 2021/04/30                                                                                                                                                                        | Test Mode     | DH5 - Left Earbud |
| Test Channel | 78                                                                                                                                                                                |               |                   |
| Remark       | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |                   |

| Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
| 4961.0          | 40.2                 | 3.0         | 43.2                   | 74.0           | -30.8       | Peak     | Horizontal   |
| 8480.0          | 37.2                 | 11.7        | 48.9                   | 74.0           | -25.1       | Peak     | Horizontal   |
| 11140.5         | 35.6                 | 16.1        | 51.7                   | 74.0           | -22.3       | Peak     | Horizontal   |
| 4961.0          | 40.8                 | 3.0         | 43.8                   | 74.0           | -30.2       | Peak     | Vertical     |
| 7485.5          | 36.4                 | 10.5        | 46.9                   | 74.0           | -27.1       | Peak     | Vertical     |
| 12007.5         | 36.8                 | 15.7        | 52.5                   | 74.0           | -21.5       | Peak     | Vertical     |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|              |                                                                                                                                                                                   |               |                    |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|--------------------|
| Test Site    | NS-AC1                                                                                                                                                                            | Test Engineer | Dillon Diao        |
| Test Date    | 2021/04/30                                                                                                                                                                        | Test Mode     | 2DH5 - Left Earbud |
| Test Channel | 00                                                                                                                                                                                |               |                    |
| Remark       | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |                    |

| Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
| 4859.0          | 37.5                 | 2.9         | 40.4                   | 74.0           | -33.6       | Peak     | Horizontal   |
| 7468.5          | 34.9                 | 10.4        | 45.3                   | 74.0           | -28.7       | Peak     | Horizontal   |
| 10817.5         | 36.4                 | 15.5        | 51.9                   | 74.0           | -22.1       | Peak     | Horizontal   |
| 4808.0          | 41.7                 | 3.0         | 44.7                   | 74.0           | -29.3       | Peak     | Vertical     |
| 7298.5          | 36.0                 | 10.4        | 46.4                   | 74.0           | -27.6       | Peak     | Vertical     |
| 11387.0         | 35.1                 | 16.2        | 51.3                   | 74.0           | -22.7       | Peak     | Vertical     |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|              |                                                                                                                                                                                   |               |                    |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|--------------------|
| Test Site    | NS-AC1                                                                                                                                                                            | Test Engineer | Dillon Diao        |
| Test Date    | 2021/04/30                                                                                                                                                                        | Test Mode     | 2DH5 - Left Earbud |
| Test Channel | 39                                                                                                                                                                                |               |                    |
| Remark       | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |                    |

| Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
| 4884.5          | 40.0                 | 2.9         | 42.9                   | 74.0           | -31.1       | Peak     | Horizontal   |
| 8403.5          | 35.9                 | 11.1        | 47.0                   | 74.0           | -27.0       | Peak     | Horizontal   |
| 12007.5         | 35.9                 | 15.7        | 51.6                   | 74.0           | -22.4       | Peak     | Horizontal   |
| 4884.5          | 40.4                 | 2.9         | 43.3                   | 74.0           | -30.7       | Peak     | Vertical     |
| 7392.0          | 36.2                 | 10.4        | 46.6                   | 74.0           | -27.4       | Peak     | Vertical     |
| 10681.5         | 34.9                 | 15.1        | 50.0                   | 74.0           | -24.0       | Peak     | Vertical     |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|              |                                                                                                                                                                                   |               |                    |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|--------------------|
| Test Site    | NS-AC1                                                                                                                                                                            | Test Engineer | Dillon Diao        |
| Test Date    | 2021/04/30                                                                                                                                                                        | Test Mode     | 2DH5 - Left Earbud |
| Test Channel | 78                                                                                                                                                                                |               |                    |
| Remark       | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |                    |

| Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
| 5003.5          | 37.9                 | 3.6         | 41.5                   | 74.0           | -32.5       | Peak     | Horizontal   |
| 8480.0          | 36.1                 | 11.7        | 47.8                   | 74.0           | -26.2       | Peak     | Horizontal   |
| 11064.0         | 34.6                 | 16.2        | 50.8                   | 74.0           | -23.2       | Peak     | Horizontal   |
| 5088.5          | 38.6                 | 4.0         | 42.6                   | 74.0           | -31.4       | Peak     | Vertical     |
| 8488.5          | 36.0                 | 11.6        | 47.6                   | 74.0           | -26.4       | Peak     | Vertical     |
| 10707.0         | 35.2                 | 15.4        | 50.6                   | 74.0           | -23.4       | Peak     | Vertical     |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|              |                                                                                                                                                                                   |               |                    |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|--------------------|
| Test Site    | NS-AC1                                                                                                                                                                            | Test Engineer | Dillon Diao        |
| Test Date    | 2021/04/30                                                                                                                                                                        | Test Mode     | 3DH5 - Left Earbud |
| Test Channel | 00                                                                                                                                                                                |               |                    |
| Remark       | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |                    |

| Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
| 4808.0          | 40.9                 | 3.0         | 43.9                   | 74.0           | -30.1       | Peak     | Horizontal   |
| 7332.5          | 36.7                 | 10.3        | 47.0                   | 74.0           | -27.0       | Peak     | Horizontal   |
| 11438.0         | 35.3                 | 15.7        | 51.0                   | 74.0           | -23.0       | Peak     | Horizontal   |
| 5012.0          | 37.9                 | 3.5         | 41.4                   | 74.0           | -32.6       | Peak     | Vertical     |
| 7400.5          | 35.4                 | 10.5        | 45.9                   | 74.0           | -28.1       | Peak     | Vertical     |
| 11480.5         | 34.9                 | 16.4        | 51.3                   | 74.0           | -22.7       | Peak     | Vertical     |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|              |                                                                                                                                                                                   |               |                    |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|--------------------|
| Test Site    | NS-AC1                                                                                                                                                                            | Test Engineer | Dillon Diao        |
| Test Date    | 2021/04/30                                                                                                                                                                        | Test Mode     | 3DH5 - Left Earbud |
| Test Channel | 39                                                                                                                                                                                |               |                    |
| Remark       | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |                    |

| Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
| 4884.5          | 40.4                 | 2.9         | 43.3                   | 74.0           | -30.7       | Peak     | Horizontal   |
| 7715.0          | 37.0                 | 10.0        | 47.0                   | 74.0           | -27.0       | Peak     | Horizontal   |
| 10775.0         | 36.0                 | 15.5        | 51.5                   | 74.0           | -22.5       | Peak     | Horizontal   |
| 4884.5          | 40.3                 | 2.9         | 43.2                   | 74.0           | -30.8       | Peak     | Vertical     |
| 7477.0          | 35.5                 | 10.4        | 45.9                   | 74.0           | -28.1       | Peak     | Vertical     |
| 11370.0         | 34.6                 | 15.9        | 50.5                   | 74.0           | -23.5       | Peak     | Vertical     |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|              |                                                                                                                                                                                   |               |                    |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|--------------------|
| Test Site    | NS-AC1                                                                                                                                                                            | Test Engineer | Dillon Diao        |
| Test Date    | 2021/04/30                                                                                                                                                                        | Test Mode     | 3DH5 - Left Earbud |
| Test Channel | 78                                                                                                                                                                                |               |                    |
| Remark       | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |                    |

| Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
| 4944.0          | 36.5                 | 2.8         | 39.3                   | 74.0           | -34.7       | Peak     | Horizontal   |
| 7638.5          | 36.9                 | 10.0        | 46.9                   | 74.0           | -27.1       | Peak     | Horizontal   |
| 11072.5         | 35.3                 | 16.1        | 51.4                   | 74.0           | -22.6       | Peak     | Horizontal   |
| 4850.5          | 38.6                 | 2.9         | 41.5                   | 74.0           | -32.5       | Peak     | Vertical     |
| 7341.0          | 34.2                 | 10.4        | 44.6                   | 74.0           | -29.4       | Peak     | Vertical     |
| 10928.0         | 33.2                 | 15.6        | 48.8                   | 74.0           | -25.2       | Peak     | Vertical     |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|              |                                                                                                                                                                                   |               |                    |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|--------------------|
| Test Site    | NS-AC1                                                                                                                                                                            | Test Engineer | Dillon Diao        |
| Test Date    | 2021/04/30                                                                                                                                                                        | Test Mode     | DH5 - Right Earbud |
| Test Channel | 00                                                                                                                                                                                |               |                    |
| Remark       | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |                    |

| Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
| 4799.5          | 45.7                 | 2.9         | 48.6                   | 74.0           | -25.4       | Peak     | Horizontal   |
| 7451.5          | 35.8                 | 10.5        | 46.3                   | 74.0           | -27.7       | Peak     | Horizontal   |
| 8259.0          | 37.3                 | 10.6        | 47.9                   | 74.0           | -26.1       | Peak     | Horizontal   |
| 4799.5          | 42.6                 | 2.9         | 45.5                   | 74.0           | -28.5       | Peak     | Vertical     |
| 7732.0          | 36.5                 | 10.3        | 46.8                   | 74.0           | -27.2       | Peak     | Vertical     |
| 10656.0         | 37.2                 | 15.2        | 52.4                   | 74.0           | -21.6       | Peak     | Vertical     |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|              |                                                                                                                                                                                   |               |                    |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|--------------------|
| Test Site    | NS-AC1                                                                                                                                                                            | Test Engineer | Dillon Diao        |
| Test Date    | 2021/04/30                                                                                                                                                                        | Test Mode     | DH5 - Right Earbud |
| Test Channel | 39                                                                                                                                                                                |               |                    |
| Remark       | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |                    |

| Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
| 4884.5          | 43.9                 | 2.9         | 46.8                   | 74.0           | -27.2       | Peak     | Horizontal   |
| 8352.5          | 35.5                 | 10.8        | 46.3                   | 74.0           | -27.7       | Peak     | Horizontal   |
| 11625.0         | 35.9                 | 16.8        | 52.7                   | 74.0           | -21.3       | Peak     | Horizontal   |
| 4884.5          | 40.5                 | 2.9         | 43.4                   | 74.0           | -30.6       | Peak     | Vertical     |
| 8403.5          | 36.4                 | 11.1        | 47.5                   | 74.0           | -26.5       | Peak     | Vertical     |
| 11455.0         | 35.1                 | 16.0        | 51.1                   | 74.0           | -22.9       | Peak     | Vertical     |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|              |                                                                                                                                                                                   |               |                    |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|--------------------|
| Test Site    | NS-AC1                                                                                                                                                                            | Test Engineer | Dillon Diao        |
| Test Date    | 2021/04/30                                                                                                                                                                        | Test Mode     | DH5 - Right Earbud |
| Test Channel | 78                                                                                                                                                                                |               |                    |
| Remark       | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |                    |

| Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
| 4961.0          | 47.5                 | 3.0         | 50.5                   | 74.0           | -23.5       | Peak     | Horizontal   |
| 8420.5          | 36.7                 | 11.0        | 47.7                   | 74.0           | -26.3       | Peak     | Horizontal   |
| 10962.0         | 36.4                 | 15.9        | 52.3                   | 74.0           | -21.7       | Peak     | Horizontal   |
| 4961.0          | 41.6                 | 3.0         | 44.6                   | 74.0           | -29.4       | Peak     | Vertical     |
| 8327.0          | 37.2                 | 10.7        | 47.9                   | 74.0           | -26.1       | Peak     | Vertical     |
| 10605.0         | 37.2                 | 15.0        | 52.2                   | 74.0           | -21.8       | Peak     | Vertical     |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|              |                                                                                                                                                                                   |               |                     |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|---------------------|
| Test Site    | NS-AC1                                                                                                                                                                            | Test Engineer | Dillon Diao         |
| Test Date    | 2021/04/30                                                                                                                                                                        | Test Mode     | 2DH5 - Right Earbud |
| Test Channel | 00                                                                                                                                                                                |               |                     |
| Remark       | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |                     |

| Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
| 4808.0          | 40.8                 | 3.0         | 43.8                   | 74.0           | -30.2       | Peak     | Horizontal   |
| 7417.5          | 36.1                 | 10.5        | 46.6                   | 74.0           | -27.4       | Peak     | Horizontal   |
| 10732.5         | 35.9                 | 15.5        | 51.4                   | 74.0           | -22.6       | Peak     | Horizontal   |
| 4808.0          | 42.3                 | 3.0         | 45.3                   | 74.0           | -28.7       | Peak     | Vertical     |
| 7332.5          | 36.3                 | 10.3        | 46.6                   | 74.0           | -27.4       | Peak     | Vertical     |
| 8131.5          | 34.5                 | 11.1        | 45.6                   | 74.0           | -28.4       | Peak     | Vertical     |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|              |                                                                                                                                                                                   |               |                     |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|---------------------|
| Test Site    | NS-AC1                                                                                                                                                                            | Test Engineer | Dillon Diao         |
| Test Date    | 2021/04/30                                                                                                                                                                        | Test Mode     | 2DH5 - Right Earbud |
| Test Channel | 39                                                                                                                                                                                |               |                     |
| Remark       | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |                     |

| Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
| 4842.0          | 42.3                 | 3.0         | 45.3                   | 74.0           | -28.7       | Peak     | Horizontal   |
| 7477.0          | 35.5                 | 10.4        | 45.9                   | 74.0           | -28.1       | Peak     | Horizontal   |
| 8335.5          | 37.2                 | 10.7        | 47.9                   | 74.0           | -26.1       | Peak     | Horizontal   |
| 4842.0          | 42.0                 | 3.0         | 45.0                   | 74.0           | -29.0       | Peak     | Vertical     |
| 7664.0          | 36.8                 | 10.4        | 47.2                   | 74.0           | -26.8       | Peak     | Vertical     |
| 8318.5          | 37.8                 | 10.7        | 48.5                   | 74.0           | -25.5       | Peak     | Vertical     |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|              |                                                                                                                                                                                   |               |                     |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|---------------------|
| Test Site    | NS-AC1                                                                                                                                                                            | Test Engineer | Dillon Diao         |
| Test Date    | 2021/04/30                                                                                                                                                                        | Test Mode     | 2DH5 - Right Earbud |
| Test Channel | 78                                                                                                                                                                                |               |                     |
| Remark       | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |                     |

| Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
| 4884.5          | 40.5                 | 2.9         | 43.4                   | 74.0           | -30.6       | Peak     | Horizontal   |
| 7749.0          | 37.4                 | 10.3        | 47.7                   | 74.0           | -26.3       | Peak     | Horizontal   |
| 8412.0          | 36.9                 | 11.0        | 47.9                   | 74.0           | -26.1       | Peak     | Horizontal   |
| 4791.0          | 36.9                 | 2.9         | 39.8                   | 74.0           | -34.2       | Peak     | Vertical     |
| 7672.5          | 36.2                 | 10.5        | 46.7                   | 74.0           | -27.3       | Peak     | Vertical     |
| 8488.5          | 38.2                 | 11.6        | 49.8                   | 74.0           | -24.2       | Peak     | Vertical     |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|              |                                                                                                                                                                                   |               |                     |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|---------------------|
| Test Site    | NS-AC1                                                                                                                                                                            | Test Engineer | Dillon Diao         |
| Test Date    | 2021/04/30                                                                                                                                                                        | Test Mode     | 3DH5 - Right Earbud |
| Test Channel | 00                                                                                                                                                                                |               |                     |
| Remark       | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |                     |

| Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
| 4808.0          | 41.0                 | 3.0         | 44.0                   | 74.0           | -30.0       | Peak     | Horizontal   |
| 7715.0          | 37.3                 | 10.0        | 47.3                   | 74.0           | -26.7       | Peak     | Horizontal   |
| 8412.0          | 37.1                 | 11.0        | 48.1                   | 74.0           | -25.9       | Peak     | Horizontal   |
| 4808.0          | 41.4                 | 3.0         | 44.4                   | 74.0           | -29.6       | Peak     | Vertical     |
| 7468.5          | 35.7                 | 10.4        | 46.1                   | 74.0           | -27.9       | Peak     | Vertical     |
| 8233.5          | 36.5                 | 10.9        | 47.4                   | 74.0           | -26.6       | Peak     | Vertical     |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|              |                                                                                                                                                                                   |               |                     |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|---------------------|
| Test Site    | NS-AC1                                                                                                                                                                            | Test Engineer | Dillon Diao         |
| Test Date    | 2021/04/30                                                                                                                                                                        | Test Mode     | 3DH5 - Right Earbud |
| Test Channel | 39                                                                                                                                                                                |               |                     |
| Remark       | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |                     |

| Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
| 5105.5          | 39.4                 | 3.9         | 43.3                   | 74.0           | -30.7       | Peak     | Horizontal   |
| 7426.0          | 35.6                 | 10.5        | 46.1                   | 74.0           | -27.9       | Peak     | Horizontal   |
| 11242.5         | 35.8                 | 15.7        | 51.5                   | 74.0           | -22.5       | Peak     | Horizontal   |
| 4842.0          | 40.5                 | 3.0         | 43.5                   | 74.0           | -30.5       | Peak     | Vertical     |
| 8123.0          | 36.8                 | 11.2        | 48.0                   | 74.0           | -26.0       | Peak     | Vertical     |
| 11072.5         | 35.9                 | 16.1        | 52.0                   | 74.0           | -22.0       | Peak     | Vertical     |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|              |                                                                                                                                                                                   |               |                     |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|---------------------|
| Test Site    | NS-AC1                                                                                                                                                                            | Test Engineer | Dillon Diao         |
| Test Date    | 2021/04/30                                                                                                                                                                        | Test Mode     | 3DH5 - Right Earbud |
| Test Channel | 78                                                                                                                                                                                |               |                     |
| Remark       | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |                     |


| Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
| 5080.0          | 39.0                 | 4.0         | 43.0                   | 74.0           | -31.0       | Peak     | Horizontal   |
| 7740.5          | 37.4                 | 10.3        | 47.7                   | 74.0           | -26.3       | Peak     | Horizontal   |
| 11387.0         | 35.4                 | 16.2        | 51.6                   | 74.0           | -22.4       | Peak     | Horizontal   |
| 5097.0          | 39.2                 | 4.0         | 43.2                   | 74.0           | -30.8       | Peak     | Vertical     |
| 8097.5          | 35.9                 | 11.1        | 47.0                   | 74.0           | -27.0       | Peak     | Vertical     |
| 11446.5         | 35.2                 | 15.9        | 51.1                   | 74.0           | -22.9       | Peak     | Vertical     |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

### The Result of Radiated Emission below 1GHz:

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/22 |
| Limit: FCC_Part15.209_RE(3m)                                     | Engineer: Flay Yang   |
| Probe: NS-AC1_VULB9162                                           | Polarity: Horizontal  |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Transmit by DH5 at channel 2402MHz                    |                       |

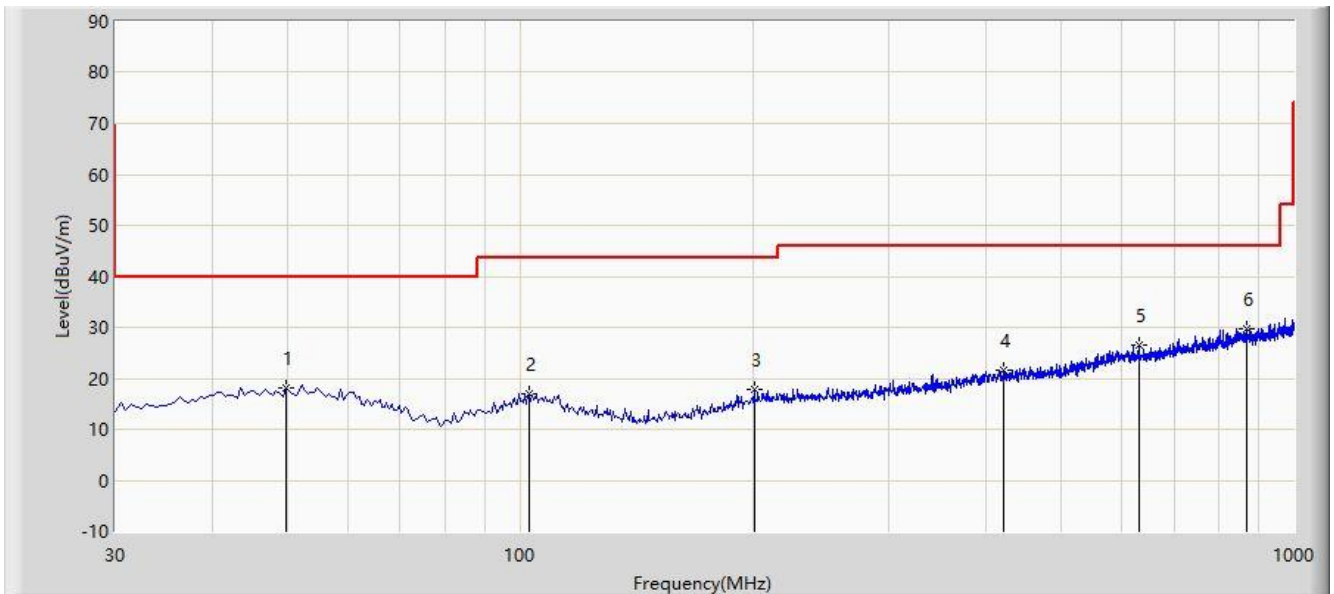

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 49.885          | 18.122                 | -1.292               | -21.878     | 40.000         | 19.414      | PK   |
| 2  |      |      | 102.750         | 16.944                 | -1.093               | -26.556     | 43.500         | 18.037      | PK   |
| 3  |      |      | 200.720         | 17.904                 | 0.419                | -25.596     | 43.500         | 17.485      | PK   |
| 4  |      |      | 422.365         | 21.719                 | -0.101               | -24.281     | 46.000         | 21.820      | PK   |
| 5  |      |      | 629.945         | 26.638                 | 1.523                | -19.362     | 46.000         | 25.114      | PK   |
| 6  |      | *    | 870.505         | 29.628                 | 1.244                | -16.372     | 46.000         | 28.384      | PK   |

Note 1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)


Note 2: QP measurement was not performed when peak measure level was lower than the QP limit.

Note 3: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

s

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/22 |
| Limit: FCC_Part15.209_RE(3m)                                     | Engineer: Flay Yang   |
| Probe: NS-AC1_VULB9162                                           | Polarity: Vertical    |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Transmit by DH5 at channel 2402MHz                    |                       |

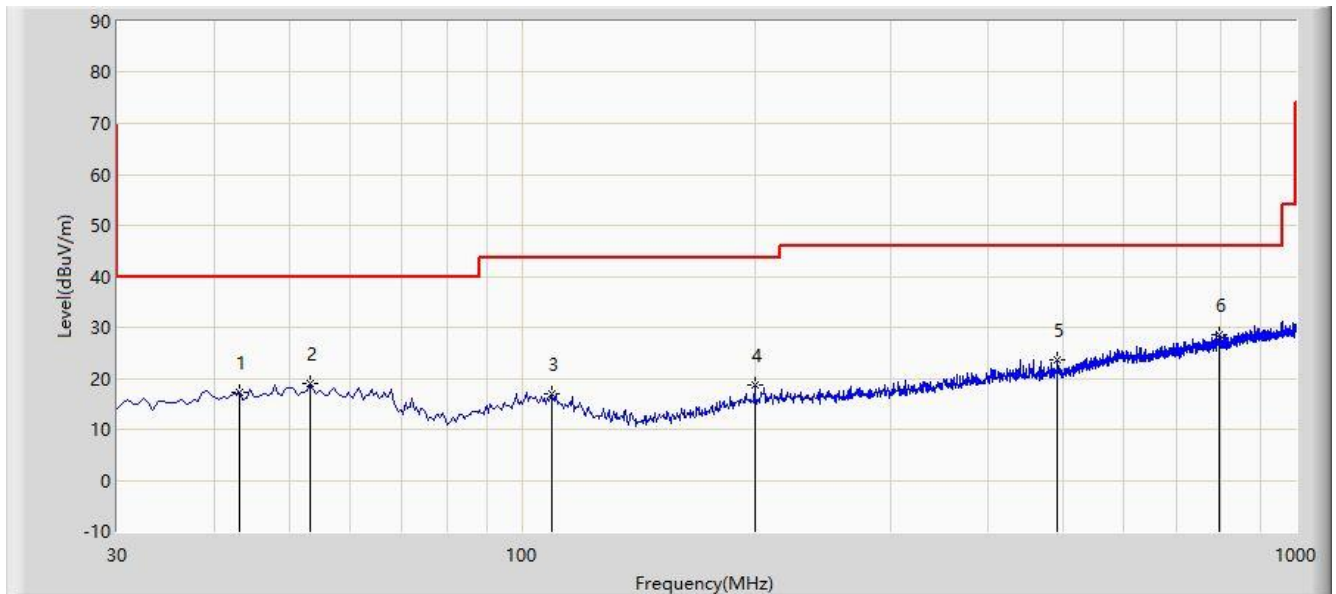

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 43.095          | 17.350                 | -1.365               | -22.650     | 40.000         | 18.715      | PK   |
| 2  |      |      | 53.280          | 18.848                 | -0.800               | -21.152     | 40.000         | 19.648      | PK   |
| 3  |      |      | 109.540         | 17.099                 | -0.959               | -26.401     | 43.500         | 18.058      | PK   |
| 4  |      |      | 199.750         | 18.652                 | 1.197                | -24.848     | 43.500         | 17.455      | PK   |
| 5  |      |      | 492.205         | 23.633                 | 1.290                | -22.367     | 46.000         | 22.343      | PK   |
| 6  |      | *    | 796.300         | 28.682                 | 1.434                | -17.318     | 46.000         | 27.248      | PK   |

Note 1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: QP measurement was not performed when peak measure level was lower than the QP limit.

Note 3: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

## 6.10. Radiated Restricted Band Edge Measurement

### 6.10.1. Test Limit

#### For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

| Frequency<br>(MHz)         | Frequency<br>(MHz)    | Frequency<br>(MHz) | Frequency<br>(GHz) |
|----------------------------|-----------------------|--------------------|--------------------|
| 0.090 - 0.110              | 16.42 - 16.423        | 399.9 - 410        | 4.5 - 5.15         |
| <sup>1</sup> 0.495 - 0.505 | 16.69475 - 16.69525   | 608 - 614          | 5.35 - 5.46        |
| 2.1735 - 2.1905            | 16.80425 - 16.80475   | 960 - 1240         | 7.25 - 7.75        |
| 4.125 - 4.128              | 25.5 - 25.67          | 1300 - 1427        | 8.025 - 8.5        |
| 4.17725 - 4.17775          | 37.5 - 38.25          | 1435 - 1626.5      | 9.0 - 9.2          |
| 4.20725 - 4.20775          | 73 - 74.6             | 1645.5 - 1646.5    | 9.3 - 9.5          |
| 6.215 - 6.218              | 74.8 - 75.2           | 1660 - 1710        | 10.6 - 12.7        |
| 6.26775 - 6.26825          | 108 - 121.94          | 1718.8 - 1722.2    | 13.25 - 13.4       |
| 6.31175 - 6.31225          | 123 - 138             | 2200 - 2300        | 14.47 - 14.5       |
| 8.291 - 8.294              | 149.9 - 150.05        | 2310 - 2390        | 15.35 - 16.2       |
| 8.362 - 8.366              | 156.52475 - 156.52525 | 2483.5 - 2500      | 17.7 - 21.4        |
| 8.37625 - 8.38675          | 156.7 - 156.9         | 2690 - 2900        | 22.01 - 23.12      |
| 8.41425 - 8.41475          | 162.0125 - 167.17     | 3260 - 3267        | 23.6 - 24.0        |
| 12.29 - 12.293             | 167.72 - 173.2        | 3332 - 3339        | 31.2 - 31.8        |
| 12.51975 - 12.52025        | 240 - 285             | 3345.8 - 3358      | 36.43 - 36.5       |
| 12.57675 - 12.57725        | 322 - 335.4           | 3600 - 4400        | ( <sup>2</sup> )   |
| 13.36 - 13.41              | --                    | --                 | --                 |

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

| FCC Part 15 Subpart C Paragraph 15.209 |                                       |                          |
|----------------------------------------|---------------------------------------|--------------------------|
| Frequency<br>(MHz)                     | Field Strength<br>( $\mu\text{V/m}$ ) | Measured Distance<br>(m) |
| 0.009 - 0.490                          | 2400/F (kHz)                          | 300                      |
| 0.490 - 1.705                          | 24000/F (kHz)                         | 30                       |
| 1.705 - 30                             | 30                                    | 30                       |
| 30 - 88                                | 100                                   | 3                        |
| 88 - 216                               | 150                                   | 3                        |
| 216 - 960                              | 200                                   | 3                        |
| Above 960                              | 500                                   | 3                        |

#### 6.10.2.Test Procedure Used

ANSI C63.10-2013 - Section 6.3 & 6.6 & 6.10

#### 6.10.3.Test Setting


##### Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize

### Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle  $\geq 98\%$ , set VBW = 10Hz
4. If the EUT duty cycle is  $< 98\%$ , set VBW  $\geq 1/T$ . T is the minimum transmission duration
5. Detector = Peak
6. Sweep time = Auto
7. Trace mode = Max hold
8. Trace was allowed to stabilize

#### 6.10.4.Test Setup

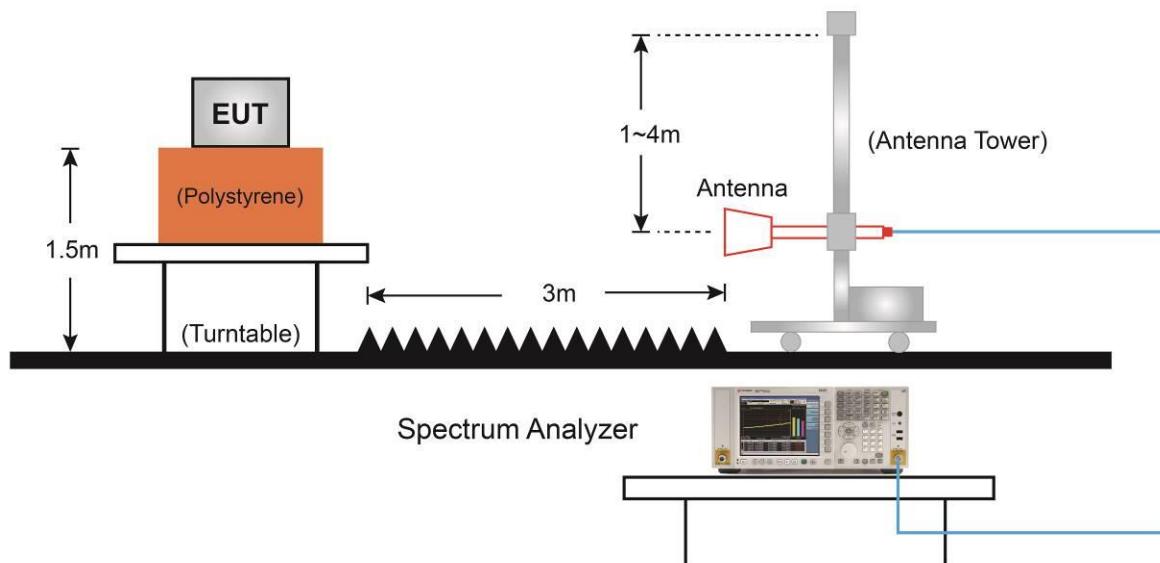

### 6.10.5.Test Result

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/23 |
| Limit: FCC_Part15_15.209_RE(3m)                                  | Engineer: Antony Yang |
| Probe: NS-AC1_BBHA9120D_2111                                     | Polarity: Horizontal  |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Left Earbud, Transmit by DH5 at Channel 2402MHz       |                       |

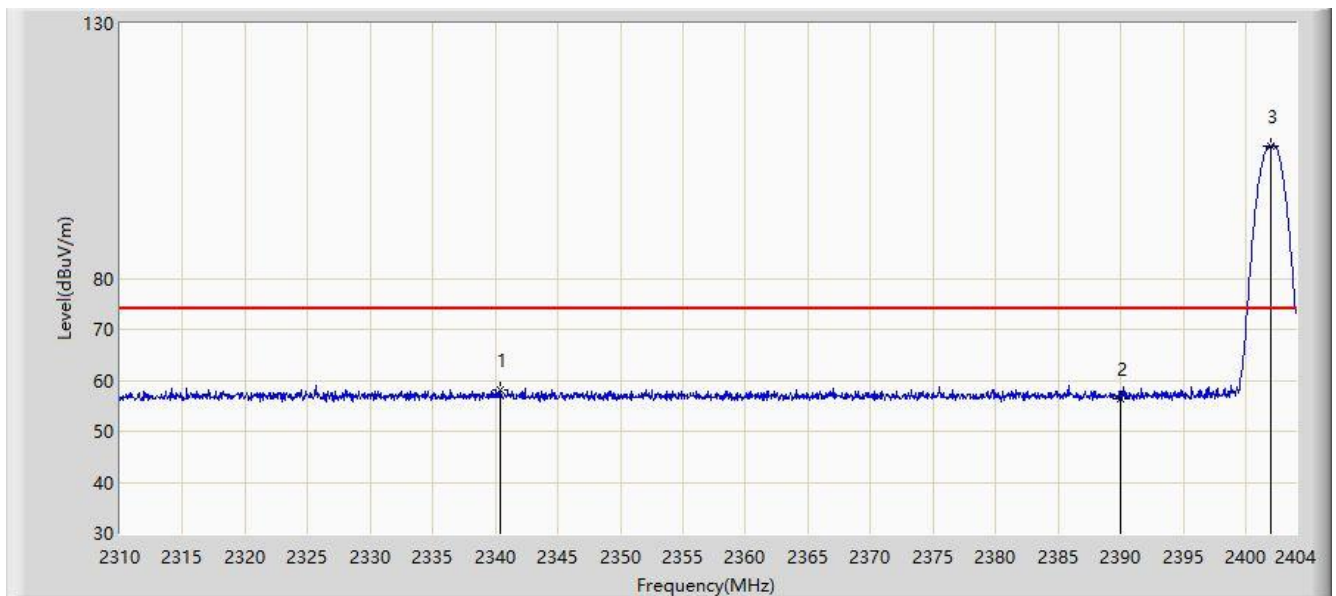


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2340.362        | 58.004                 | 26.977               | -15.996     | 74.000         | 31.027      | PK   |
| 2  |      |      | 2390.000        | 56.511                 | 25.605               | -17.489     | 74.000         | 30.906      | PK   |
| 3  |      | *    | 2402.026        | 106.085                | 75.189               | N/A         | N/A            | 30.896      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/23 |
| Limit: FCC_Part15_15.209_RE(3m)                                  | Engineer: Antony Yang |
| Probe: NS-AC1_BBHA9120D_2111                                     | Polarity: Horizontal  |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Left Earbud, Transmit by DH5 at Channel 2402MHz       |                       |

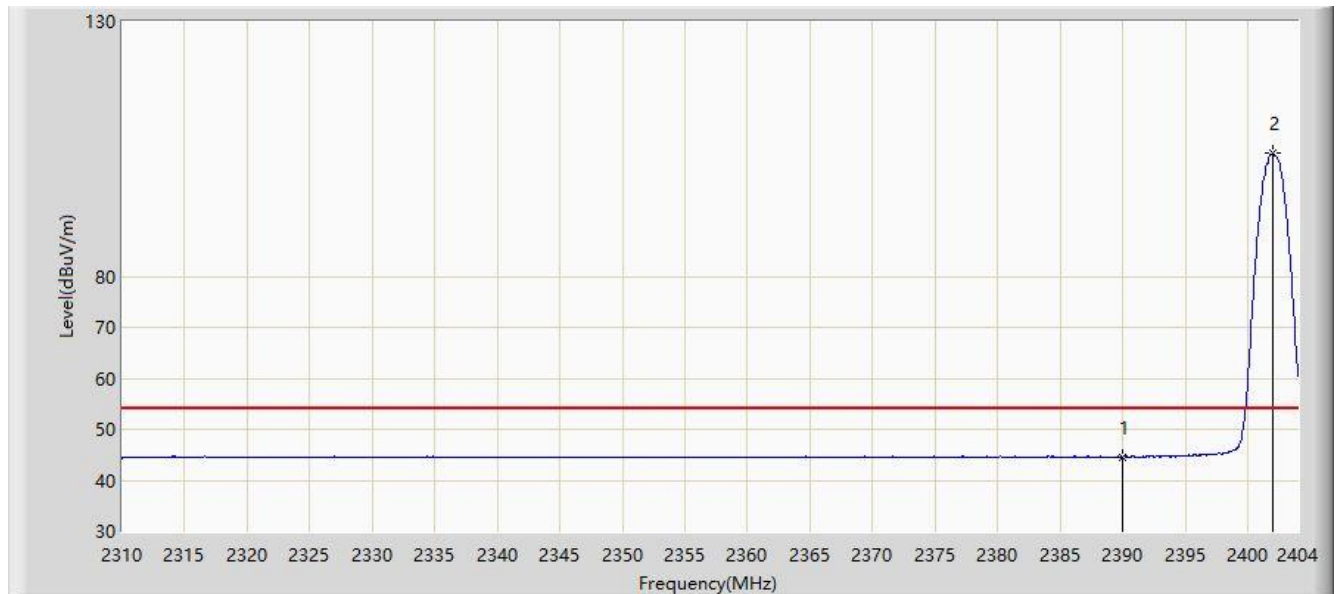


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 44.603                 | 13.697               | -9.397      | 54.000         | 30.906      | AV   |
| 2  |      | *    | 2401.979        | 104.112                | 73.216               | N/A         | N/A            | 30.896      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/23 |
| Limit: FCC_Part15_15.209_RE(3m)                                  | Engineer: Antony Yang |
| Probe: NS-AC1_BBHA9120D_2111                                     | Polarity: Vertical    |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Left Earbud, Transmit by DH5 at Channel 2402MHz       |                       |

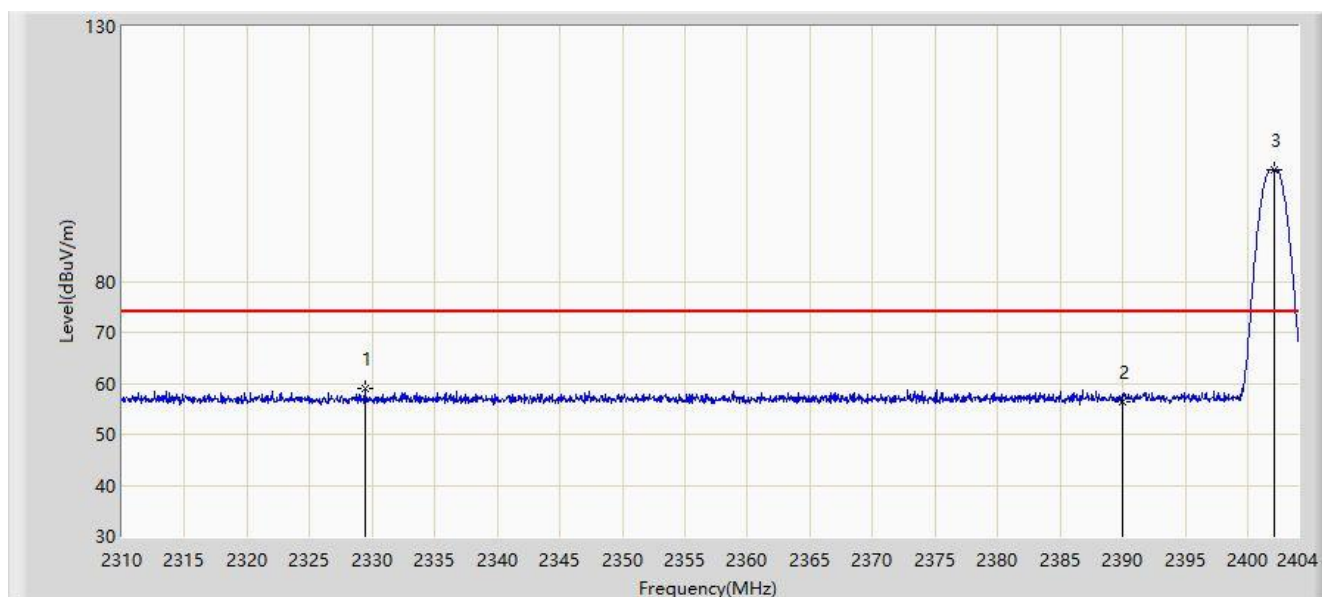


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2329.411        | 59.075                 | 28.013               | -14.925     | 74.000         | 31.062      | PK   |
| 2  |      |      | 2390.000        | 56.273                 | 25.367               | -17.727     | 74.000         | 30.906      | PK   |
| 3  |      | *    | 2402.167        | 101.990                | 71.094               | N/A         | N/A            | 30.897      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/23 |
| Limit: FCC_Part15_15.209_RE(3m)                                  | Engineer: Antony Yang |
| Probe: NS-AC1_BBHA9120D_2111                                     | Polarity: Vertical    |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Left Earbud, Transmit by DH5 at Channel 2402MHz       |                       |

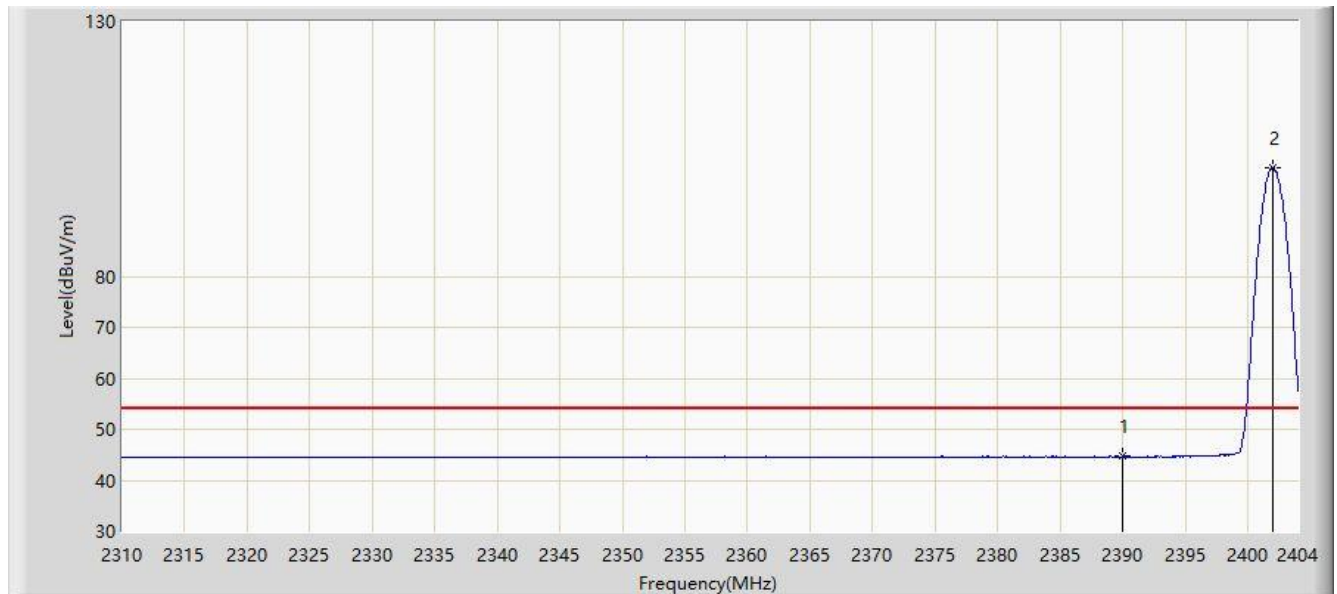


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 44.653                 | 13.747               | -9.347      | 54.000         | 30.906      | AV   |
| 2  |      | *    | 2401.979        | 101.362                | 70.466               | N/A         | N/A            | 30.896      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/23 |
| Limit: FCC_Part15_15.209_RE(3m)                                  | Engineer: Antony Yang |
| Probe: NS-AC1_BBHA9120D_2111                                     | Polarity: Horizontal  |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Left Earbud, Transmit by DH5 at Channel 2480MHz       |                       |

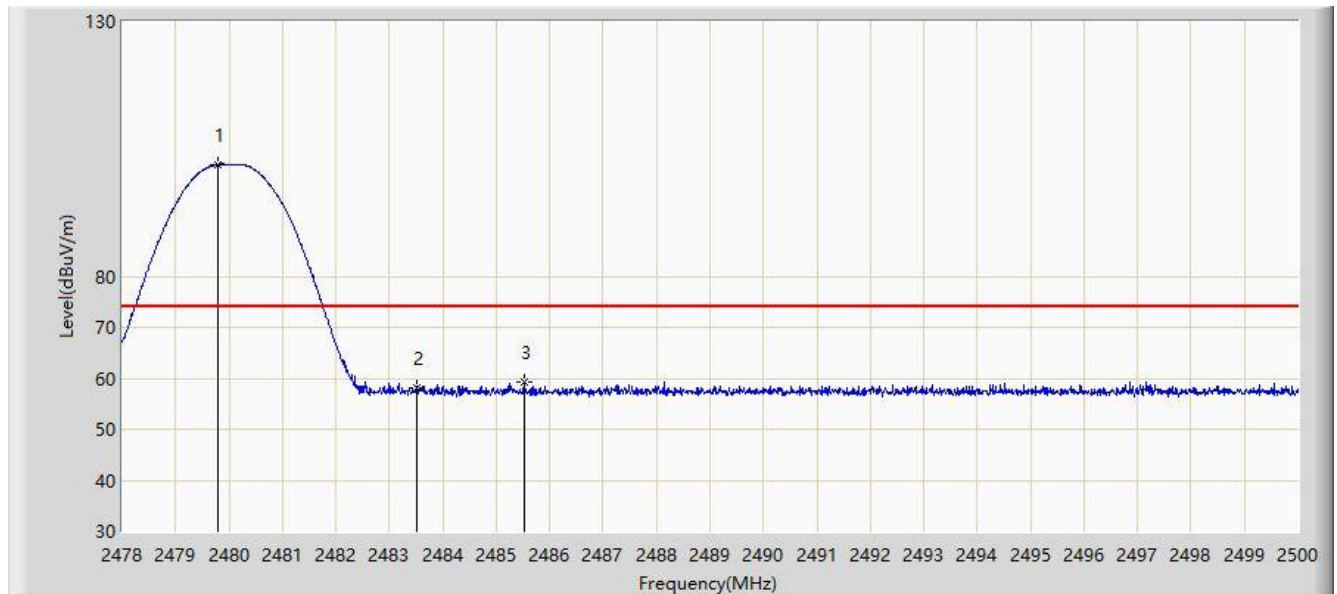


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2479.804        | 101.999                | 71.108               | N/A         | N/A            | 30.891      | PK   |
| 2  |      |      | 2483.500        | 58.016                 | 27.128               | -15.984     | 74.000         | 30.888      | PK   |
| 3  |      |      | 2485.513        | 59.216                 | 28.329               | -14.784     | 74.000         | 30.887      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/23 |
| Limit: FCC_Part15_15.209_RE(3m)                                  | Engineer: Antony Yang |
| Probe: NS-AC1_BBHA9120D_2111                                     | Polarity: Horizontal  |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Left Earbud, Transmit by DH5 at Channel 2480MHz       |                       |

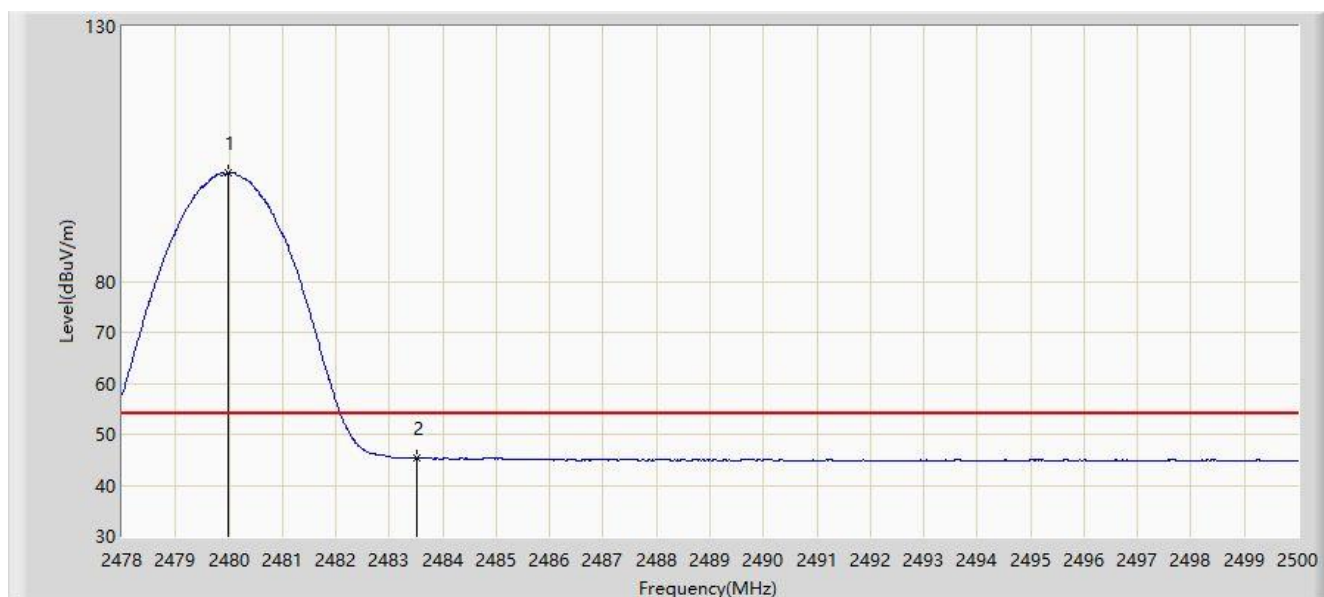


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2479.991        | 101.302                | 70.411               | N/A         | N/A            | 30.891      | AV   |
| 2  |      |      | 2483.500        | 45.394                 | 14.506               | -8.606      | 54.000         | 30.888      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/23 |
| Limit: FCC_Part15_15.209_RE(3m)                                  | Engineer: Antony Yang |
| Probe: NS-AC1_BBHA9120D_2111                                     | Polarity: Vertical    |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Left Earbud, Transmit by DH5 at Channel 2480MHz       |                       |

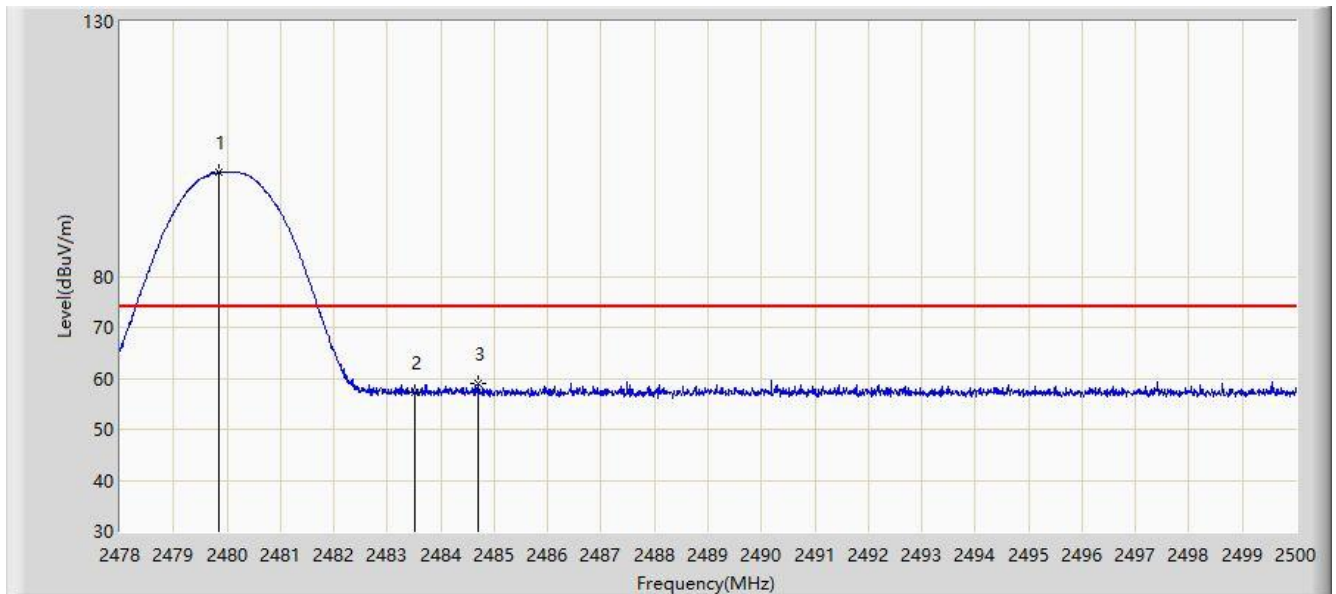


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2479.837        | 100.359                | 69.468               | N/A         | N/A            | 30.891      | PK   |
| 2  |      |      | 2483.500        | 57.249                 | 26.361               | -16.751     | 74.000         | 30.888      | PK   |
| 3  |      |      | 2484.710        | 58.910                 | 28.023               | -15.090     | 74.000         | 30.887      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/23 |
| Limit: FCC_Part15_15.209_RE(3m)                                  | Engineer: Antony Yang |
| Probe: NS-AC1_BBHA9120D_2111                                     | Polarity: Vertical    |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Left Earbud, Transmit by DH5 at Channel 2480MHz       |                       |

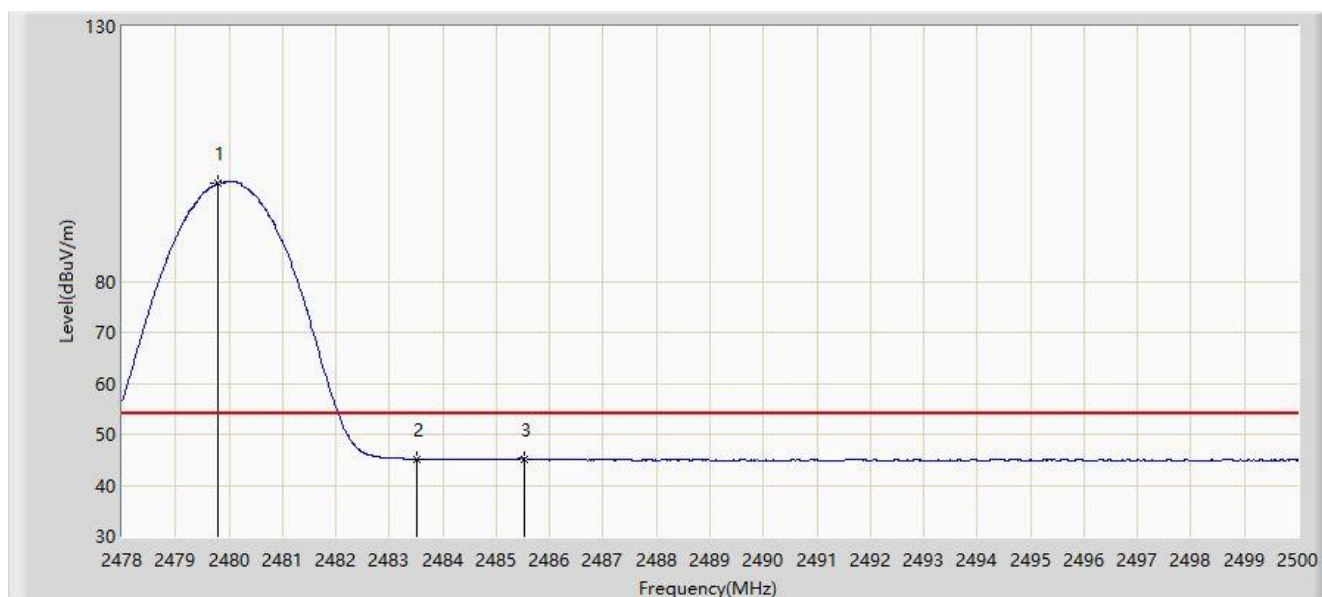


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2479.804        | 99.415                 | 68.524               | N/A         | N/A            | 30.891      | AV   |
| 2  |      |      | 2483.500        | 45.153                 | 14.265               | -8.847      | 54.000         | 30.888      | AV   |
| 3  |      |      | 2485.513        | 45.192                 | 14.305               | -8.808      | 54.000         | 30.887      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/23 |
| Limit: FCC_Part15_15.209_RE(3m)                                  | Engineer: Antony Yang |
| Probe: NS-AC1_BBHA9120D_2111                                     | Polarity: Horizontal  |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Left Earbud, Transmit by 2DH5 at Channel 2402MHz      |                       |

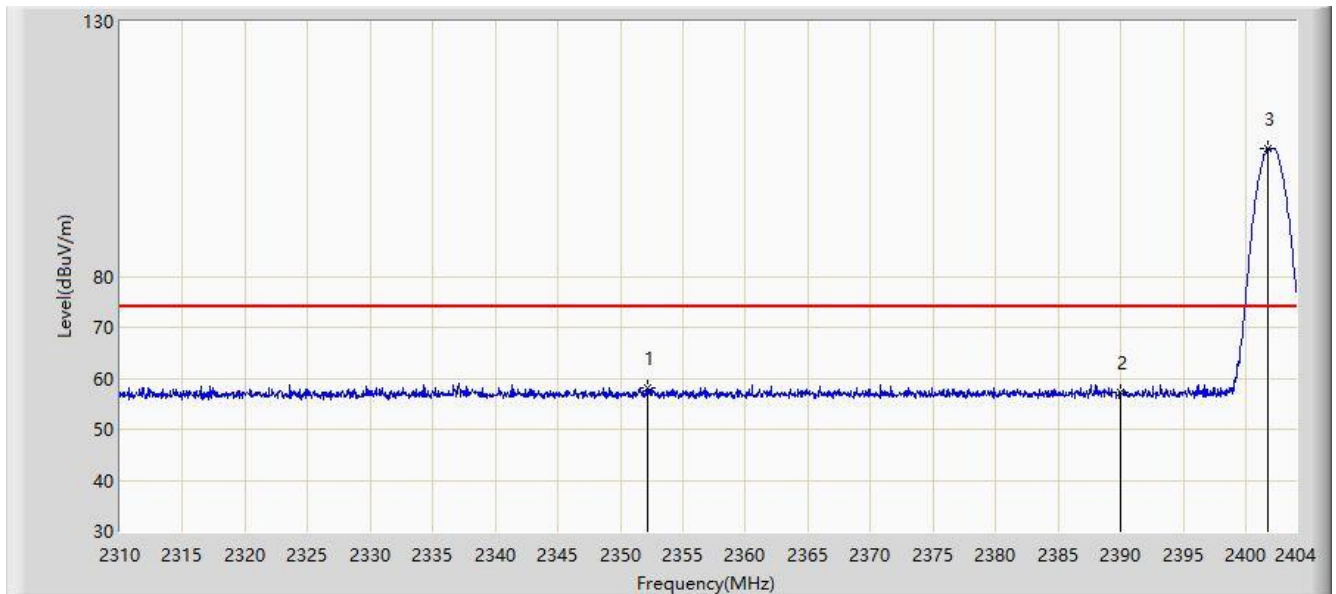


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2352.112        | 58.242                 | 27.246               | -15.758     | 74.000         | 30.996      | PK   |
| 2  |      |      | 2390.000        | 57.181                 | 26.275               | -16.819     | 74.000         | 30.906      | PK   |
| 3  |      | *    | 2401.744        | 105.083                | 74.187               | N/A         | N/A            | 30.897      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/23 |
| Limit: FCC_Part15_15.209_RE(3m)                                  | Engineer: Antony Yang |
| Probe: NS-AC1_BBHA9120D_2111                                     | Polarity: Horizontal  |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Left Earbud, Transmit by 2DH5 at Channel 2402MHz      |                       |

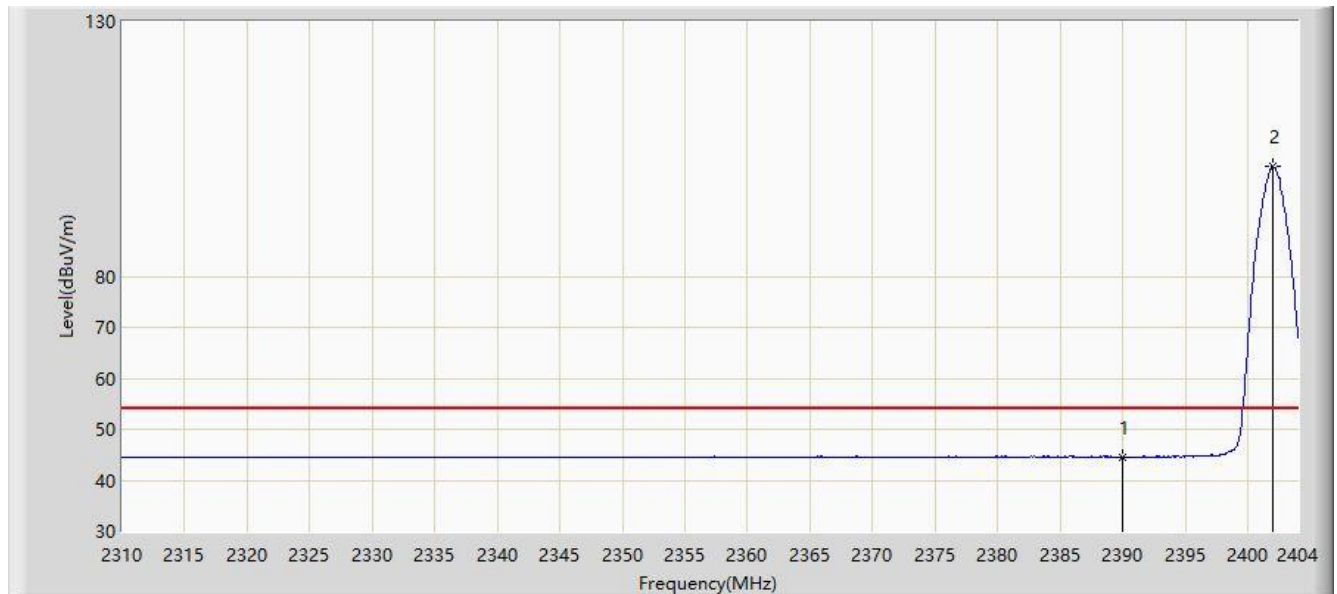


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 44.615                 | 13.709               | -9.385      | 54.000         | 30.906      | AV   |
| 2  |      | *    | 2401.979        | 101.627                | 70.731               | N/A         | N/A            | 30.896      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/23 |
| Limit: FCC_Part15_15.209_RE(3m)                                  | Engineer: Antony Yang |
| Probe: NS-AC1_BBHA9120D_2111                                     | Polarity: Vertical    |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Left Earbud, Transmit by 2DH5 at Channel 2402MHz      |                       |

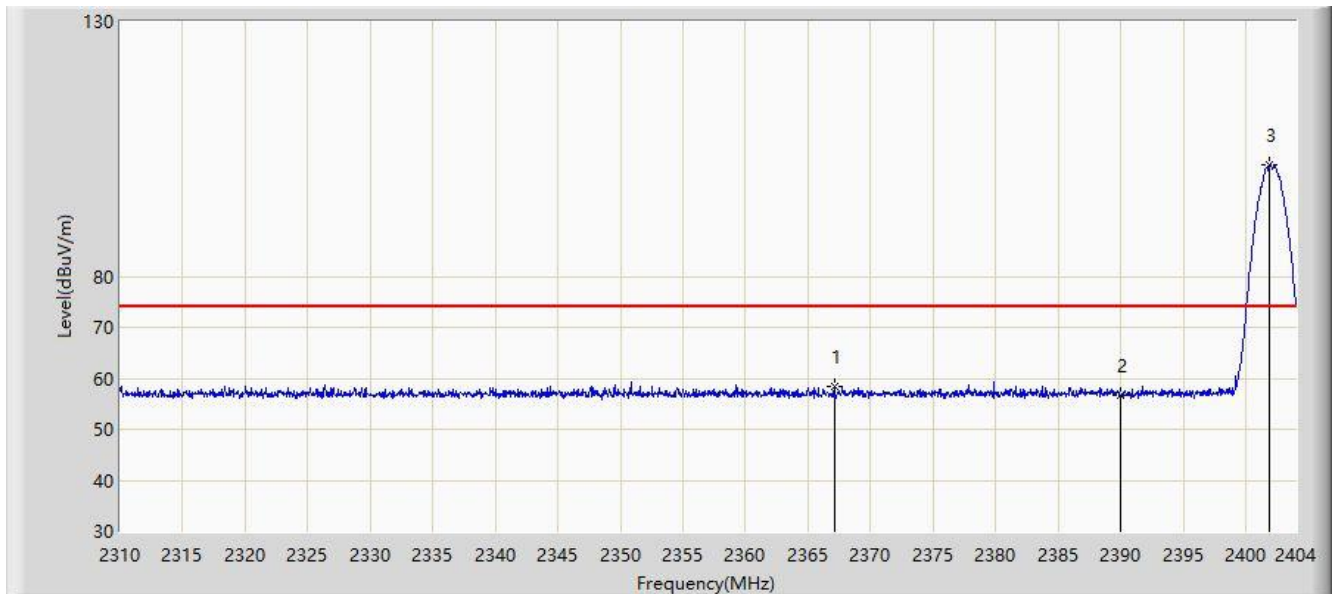


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2367.105        | 58.442                 | 27.482               | -15.558     | 74.000         | 30.960      | PK   |
| 2  |      |      | 2390.000        | 56.535                 | 25.629               | -17.465     | 74.000         | 30.906      | PK   |
| 3  |      | *    | 2401.885        | 101.905                | 71.009               | N/A         | N/A            | 30.896      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/23 |
| Limit: FCC_Part15_15.209_RE(3m)                                  | Engineer: Antony Yang |
| Probe: NS-AC1_BBHA9120D_2111                                     | Polarity: Vertical    |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Left Earbud, Transmit by 2DH5 at Channel 2402MHz      |                       |

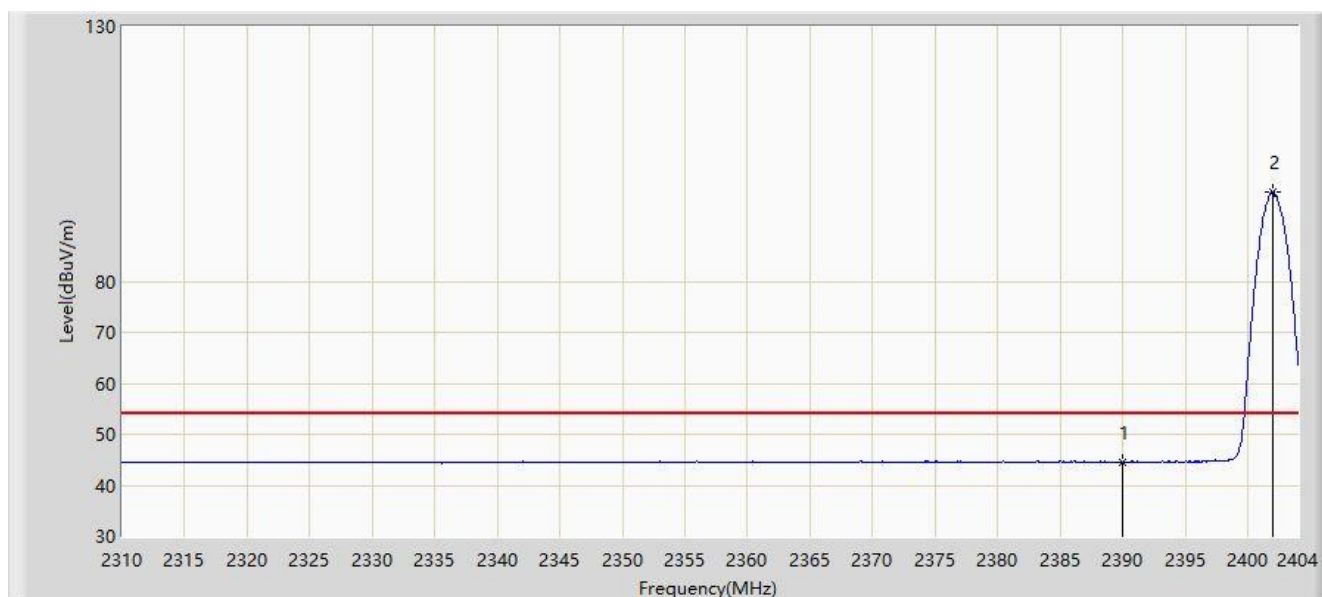


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 44.605                 | 13.699               | -9.395      | 54.000         | 30.906      | AV   |
| 2  |      | *    | 2401.979        | 97.572                 | 66.676               | N/A         | N/A            | 30.896      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/23 |
| Limit: FCC_Part15_15.209_RE(3m)                                  | Engineer: Antony Yang |
| Probe: NS-AC1_BBHA9120D_2111                                     | Polarity: Horizontal  |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Left Earbud, Transmit by 2DH5 at Channel 2480MHz      |                       |

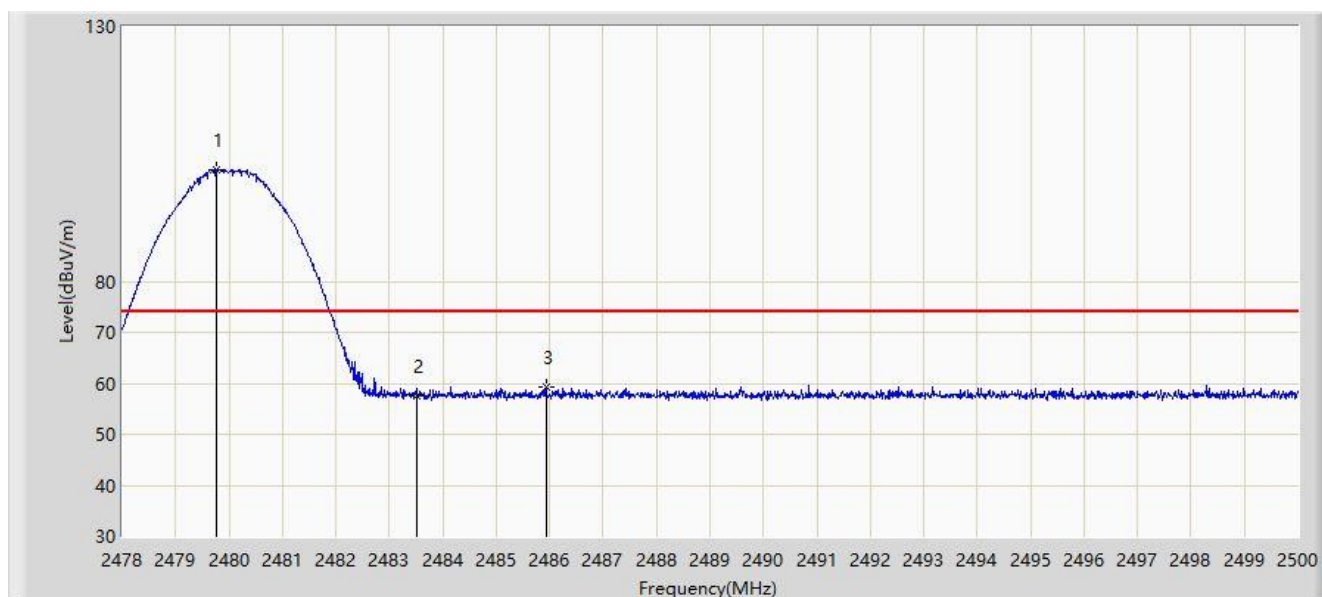

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2479.760        | 101.987                | 71.096               | N/A         | N/A            | 30.891      | PK   |
| 2  |      |      | 2483.500        | 57.603                 | 26.715               | -16.397     | 74.000         | 30.888      | PK   |
| 3  |      |      | 2485.931        | 59.138                 | 28.252               | -14.862     | 74.000         | 30.886      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/23 |
| Limit: FCC_Part15_15.209_RE(3m)                                  | Engineer: Antony Yang |
| Probe: NS-AC1_BBHA9120D_2111                                     | Polarity: Horizontal  |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Left Earbud, Transmit by 2DH5 at Channel 2480MHz      |                       |




| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2479.925        | 96.940                 | 66.049               | N/A         | N/A            | 30.891      | AV   |
| 2  |      |      | 2483.500        | 45.142                 | 14.254               | -8.858      | 54.000         | 30.888      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/23 |
| Limit: FCC_Part15_15.209_RE(3m)                                  | Engineer: Antony Yang |
| Probe: NS-AC1_BBHA9120D_2111                                     | Polarity: Vertical    |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Left Earbud, Transmit by 2DH5 at Channel 2480MHz      |                       |

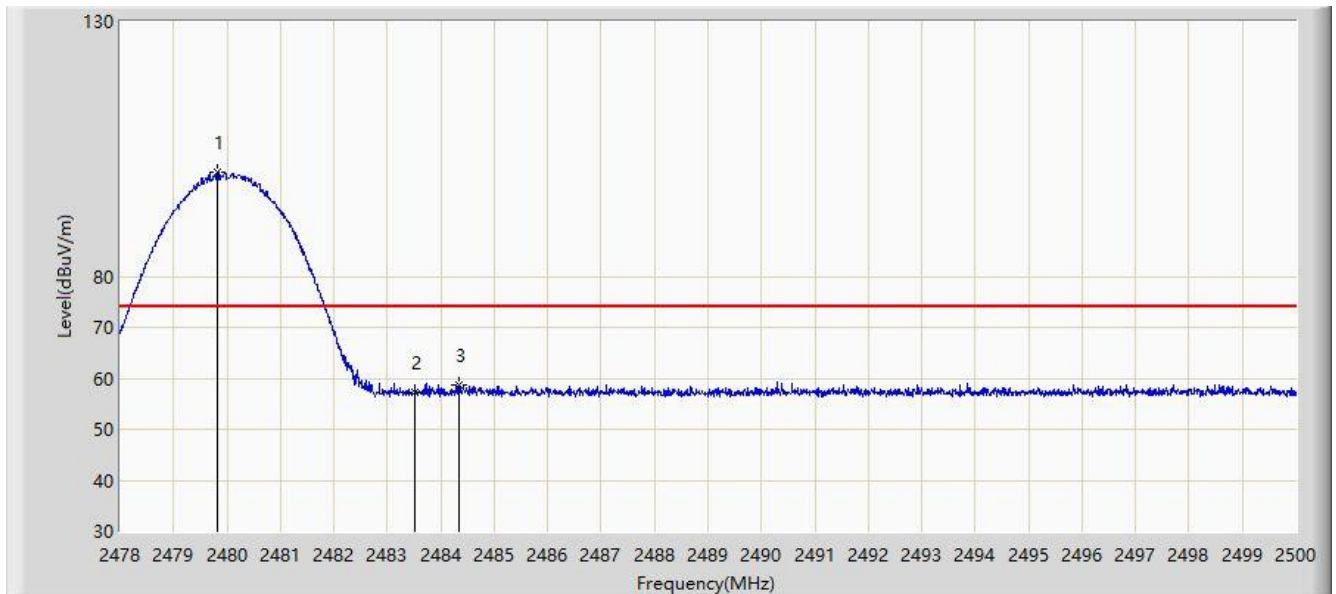


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2479.815        | 100.439                | 69.548               | N/A         | N/A            | 30.891      | PK   |
| 2  |      |      | 2483.500        | 57.282                 | 26.394               | -16.718     | 74.000         | 30.888      | PK   |
| 3  |      |      | 2484.336        | 58.754                 | 27.866               | -15.246     | 74.000         | 30.888      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/23 |
| Limit: FCC_Part15_15.209_RE(3m)                                  | Engineer: Antony Yang |
| Probe: NS-AC1_BBHA9120D_2111                                     | Polarity: Vertical    |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Left Earbud, Transmit by 2DH5 at Channel 2480MHz      |                       |

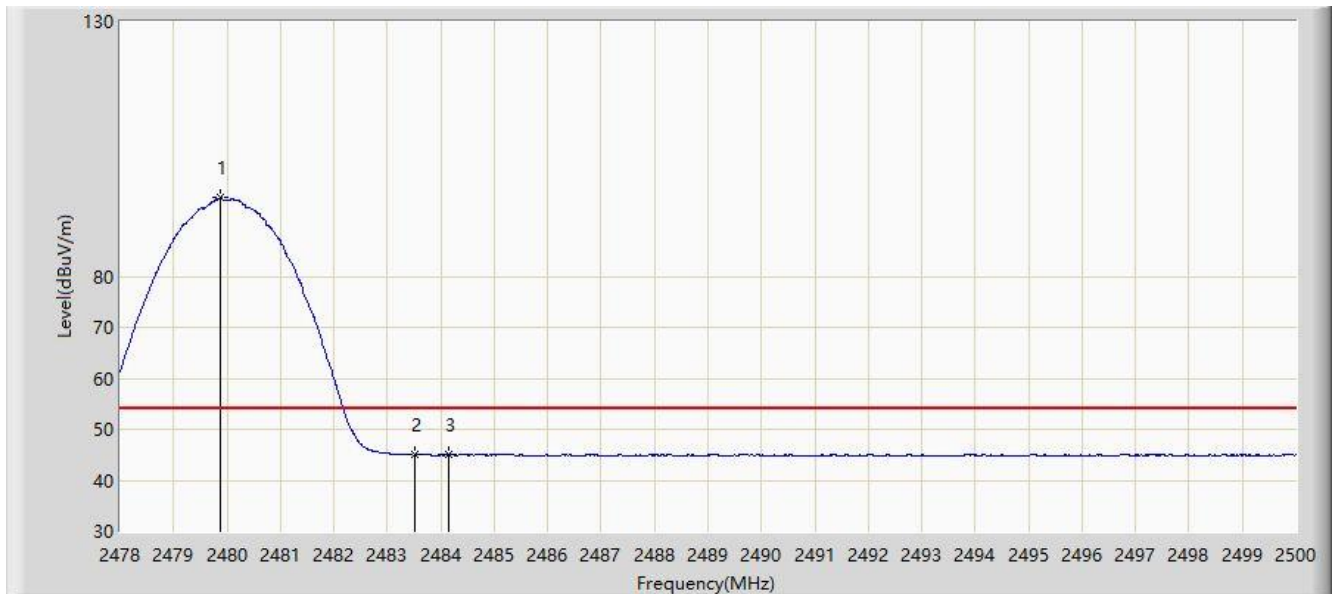


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2479.881        | 95.388                 | 64.497               | N/A         | N/A            | 30.891      | AV   |
| 2  |      |      | 2483.500        | 44.928                 | 14.040               | -9.072      | 54.000         | 30.888      | AV   |
| 3  |      |      | 2484.149        | 45.068                 | 14.180               | -8.932      | 54.000         | 30.888      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/23 |
| Limit: FCC_Part15_15.209_RE(3m)                                  | Engineer: Antony Yang |
| Probe: NS-AC1_BBHA9120D_2111                                     | Polarity: Horizontal  |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Left Earbud, Transmit by 3DH5 at Channel 2402MHz      |                       |

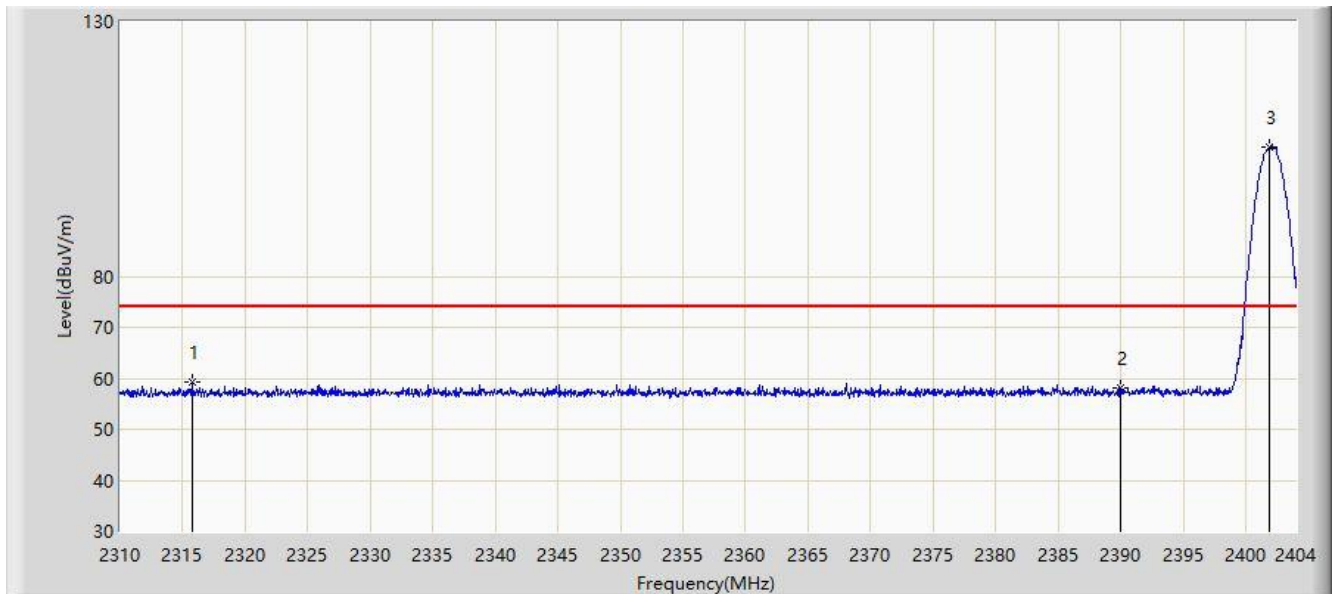


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2315.734        | 59.388                 | 28.284               | -14.612     | 74.000         | 31.104      | PK   |
| 2  |      |      | 2390.000        | 58.050                 | 27.144               | -15.950     | 74.000         | 30.906      | PK   |
| 3  |      | *    | 2401.838        | 105.331                | 74.435               | N/A         | N/A            | 30.896      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/23 |
| Limit: FCC_Part15_15.209_RE(3m)                                  | Engineer: Antony Yang |
| Probe: NS-AC1_BBHA9120D_2111                                     | Polarity: Horizontal  |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Left Earbud, Transmit by 3DH5 at Channel 2402MHz      |                       |

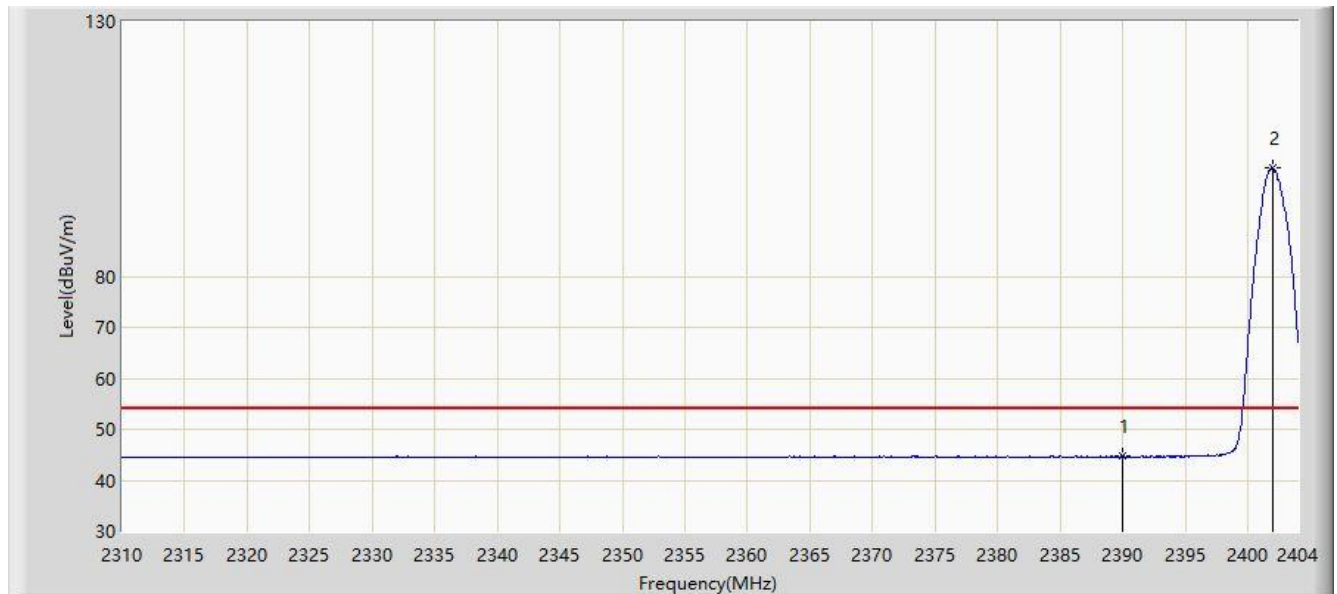


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 44.655                 | 13.749               | -9.345      | 54.000         | 30.906      | AV   |
| 2  |      | *    | 2401.979        | 101.388                | 70.492               | N/A         | N/A            | 30.896      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/23 |
| Limit: FCC_Part15_15.209_RE(3m)                                  | Engineer: Antony Yang |
| Probe: NS-AC1_BBHA9120D_2111                                     | Polarity: Vertical    |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Left Earbud, Transmit by 3DH5 at Channel 2402MHz      |                       |

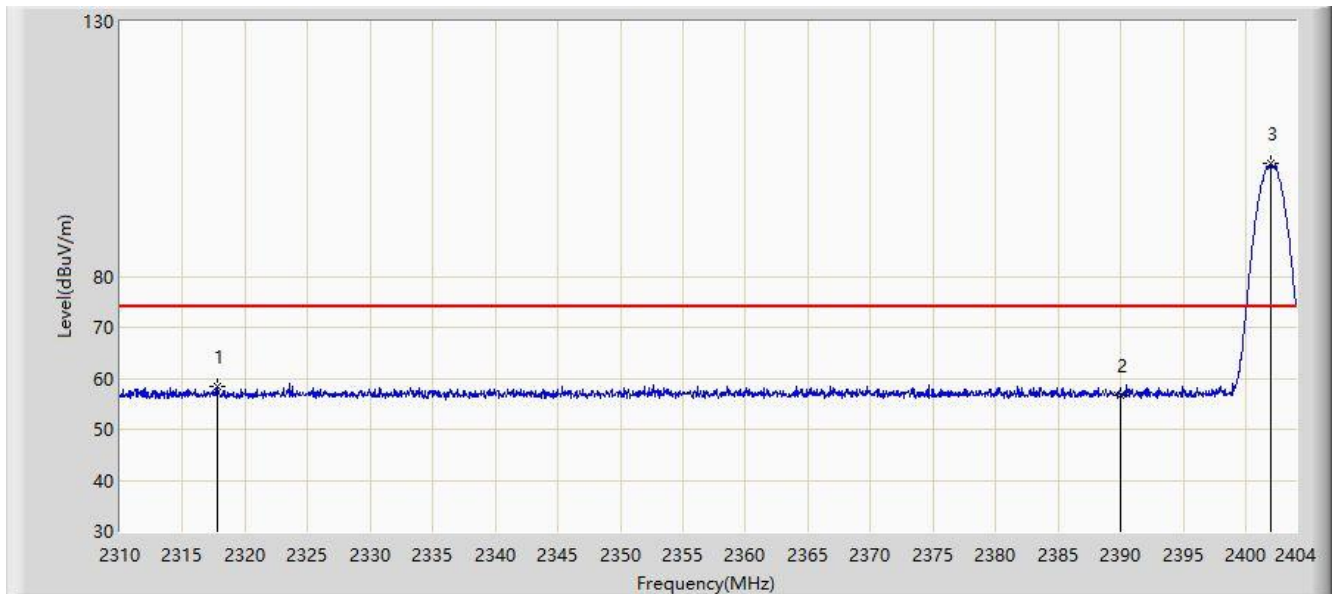


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2317.802        | 58.388                 | 27.290               | -15.612     | 74.000         | 31.098      | PK   |
| 2  |      |      | 2390.000        | 56.688                 | 25.782               | -17.312     | 74.000         | 30.906      | PK   |
| 3  |      | *    | 2401.979        | 102.041                | 71.145               | N/A         | N/A            | 30.896      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/23 |
| Limit: FCC_Part15_15.209_RE(3m)                                  | Engineer: Antony Yang |
| Probe: NS-AC1_BBHA9120D_2111                                     | Polarity: Vertical    |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Left Earbud, Transmit by 3DH5 at Channel 2402MHz      |                       |

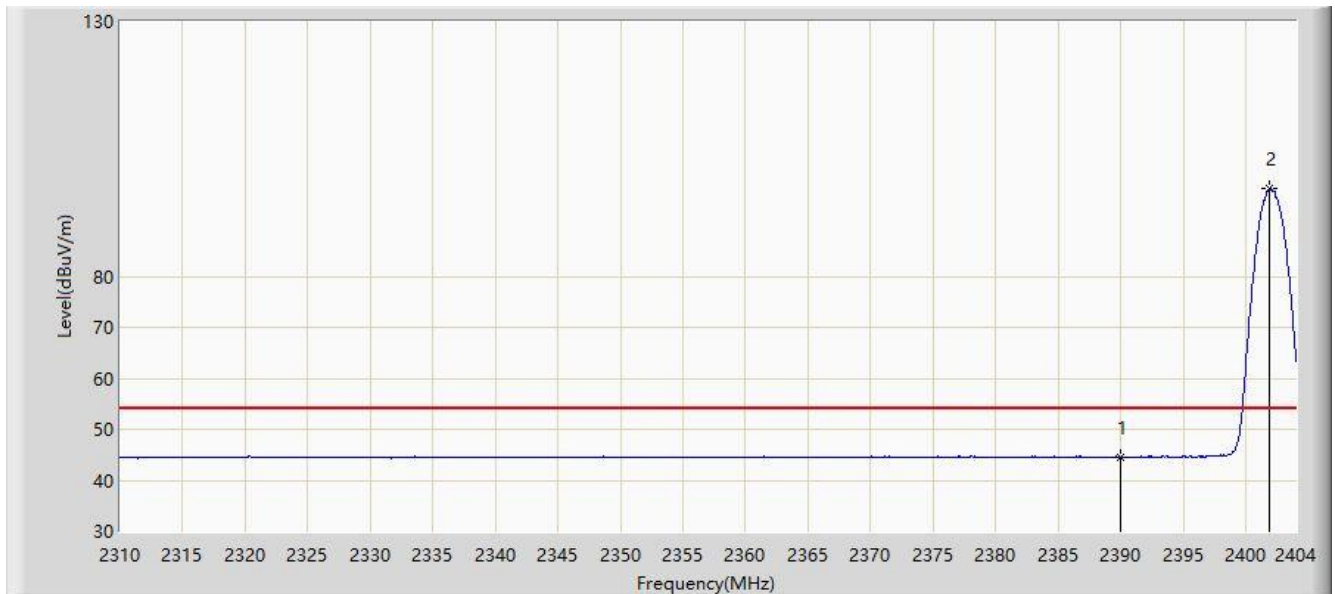


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 44.506                 | 13.600               | -9.494      | 54.000         | 30.906      | AV   |
| 2  |      | *    | 2401.932        | 97.251                 | 66.355               | N/A         | N/A            | 30.896      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/23 |
| Limit: FCC_Part15_15.209_RE(3m)                                  | Engineer: Antony Yang |
| Probe: NS-AC1_BBHA9120D_2111                                     | Polarity: Horizontal  |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Left Earbud, Transmit by 3DH5 at Channel 2480MHz      |                       |

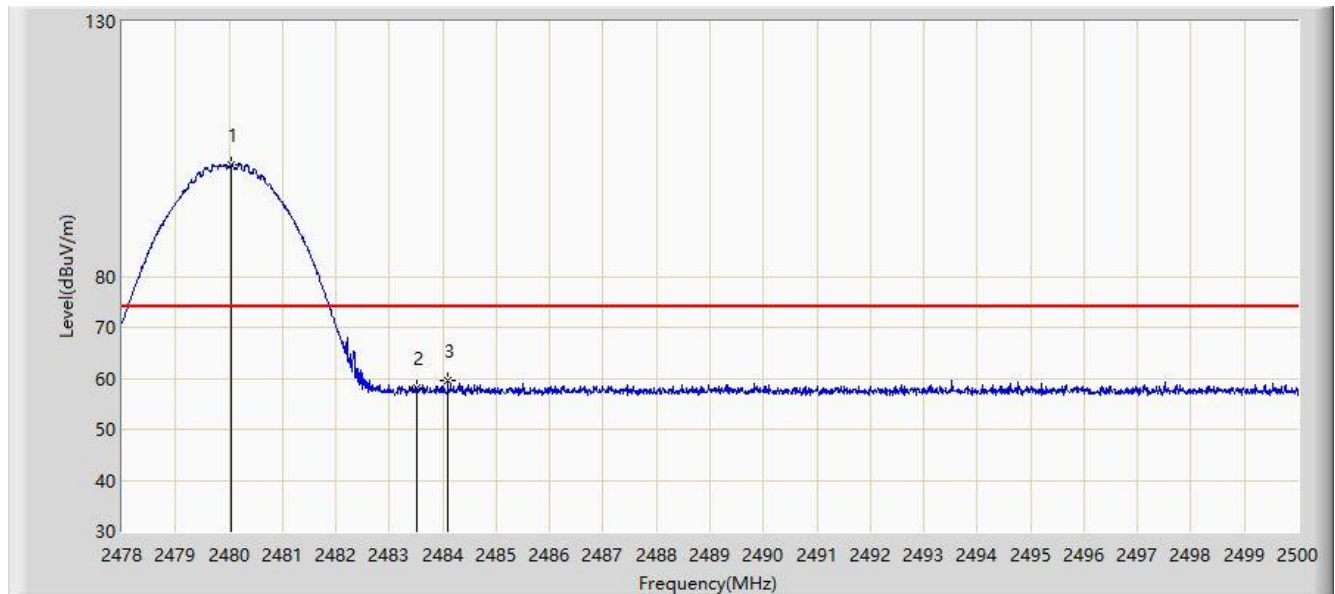


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2480.046        | 102.021                | 71.130               | N/A         | N/A            | 30.891      | PK   |
| 2  |      |      | 2483.500        | 58.085                 | 27.197               | -15.915     | 74.000         | 30.888      | PK   |
| 3  |      |      | 2484.094        | 59.530                 | 28.642               | -14.470     | 74.000         | 30.888      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/23 |
| Limit: FCC_Part15_15.209_RE(3m)                                  | Engineer: Antony Yang |
| Probe: NS-AC1_BBHA9120D_2111                                     | Polarity: Horizontal  |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Left Earbud, Transmit by 3DH5 at Channel 2480MHz      |                       |

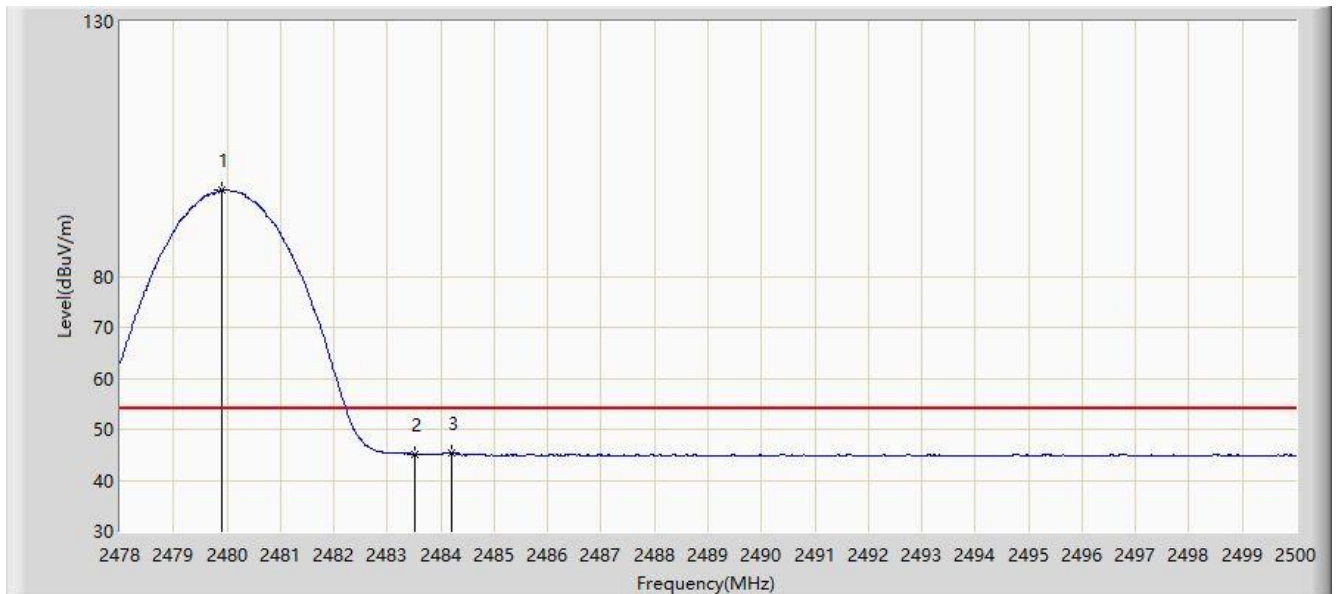


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2479.903        | 96.934                 | 66.043               | N/A         | N/A            | 30.891      | AV   |
| 2  |      |      | 2483.500        | 45.107                 | 14.219               | -8.893      | 54.000         | 30.888      | AV   |
| 3  |      |      | 2484.215        | 45.410                 | 14.522               | -8.590      | 54.000         | 30.888      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/23 |
| Limit: FCC_Part15_15.209_RE(3m)                                  | Engineer: Antony Yang |
| Probe: NS-AC1_BBHA9120D_2111                                     | Polarity: Vertical    |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Left Earbud, Transmit by 3DH5 at Channel 2480MHz      |                       |

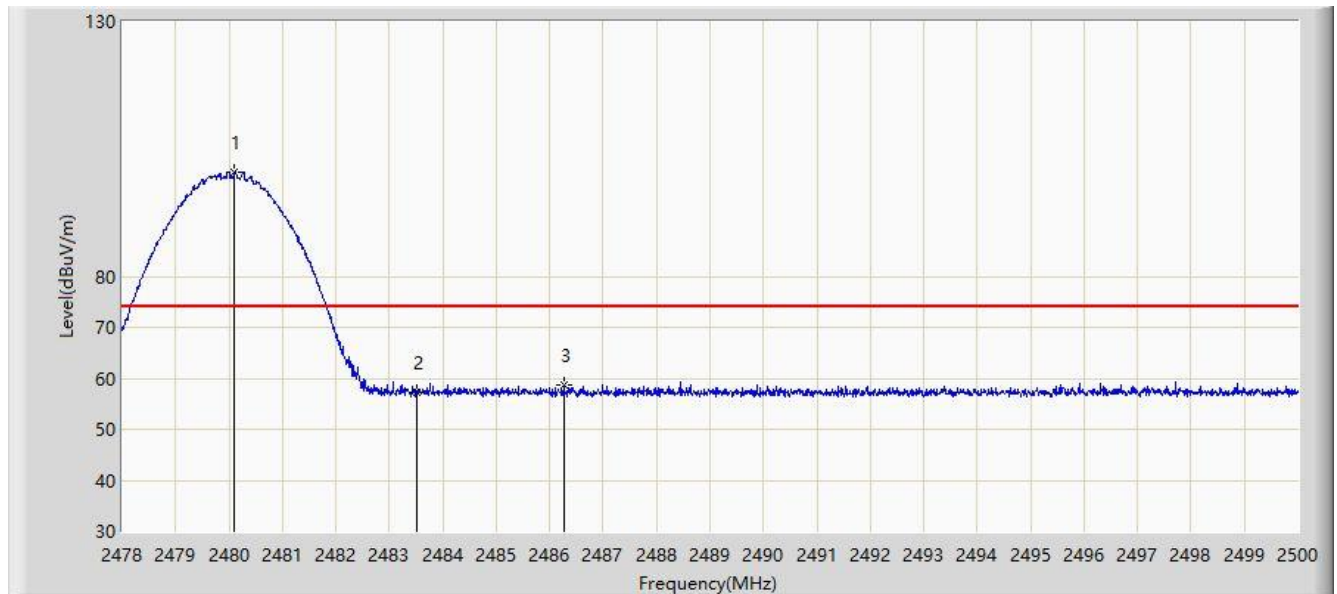


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2480.101        | 100.403                | 69.512               | N/A         | N/A            | 30.891      | PK   |
| 2  |      |      | 2483.500        | 57.365                 | 26.477               | -16.635     | 74.000         | 30.888      | PK   |
| 3  |      |      | 2486.272        | 58.657                 | 27.771               | -15.343     | 74.000         | 30.886      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/23 |
| Limit: FCC_Part15_15.209_RE(3m)                                  | Engineer: Antony Yang |
| Probe: NS-AC1_BBHA9120D_2111                                     | Polarity: Vertical    |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Left Earbud, Transmit by 3DH5 at Channel 2480MHz      |                       |

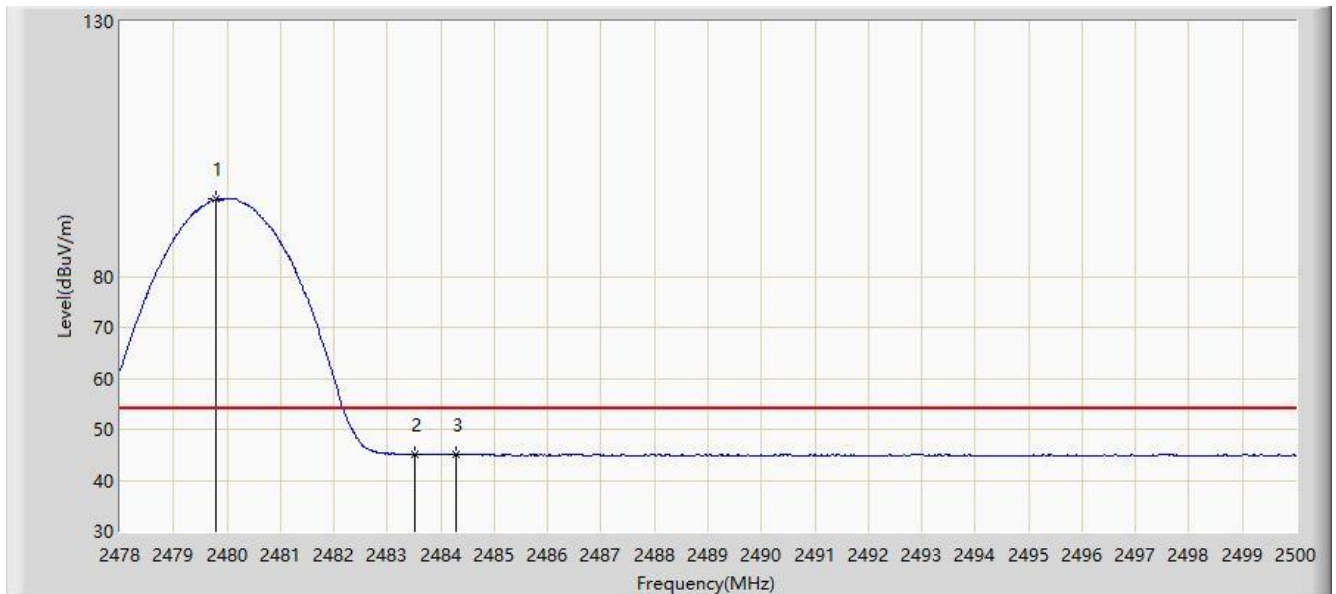


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2479.793        | 95.122                 | 64.231               | N/A         | N/A            | 30.891      | AV   |
| 2  |      |      | 2483.500        | 45.015                 | 14.127               | -8.985      | 54.000         | 30.888      | AV   |
| 3  |      |      | 2484.292        | 45.069                 | 14.181               | -8.931      | 54.000         | 30.888      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/23 |
| Limit: FCC_Part15_15.209_RE(3m)                                  | Engineer: Antony Yang |
| Probe: NS-AC1_BBHA9120D_2111                                     | Polarity: Horizontal  |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Right Earbud, Transmit by DH5 at Channel 2402MHz      |                       |

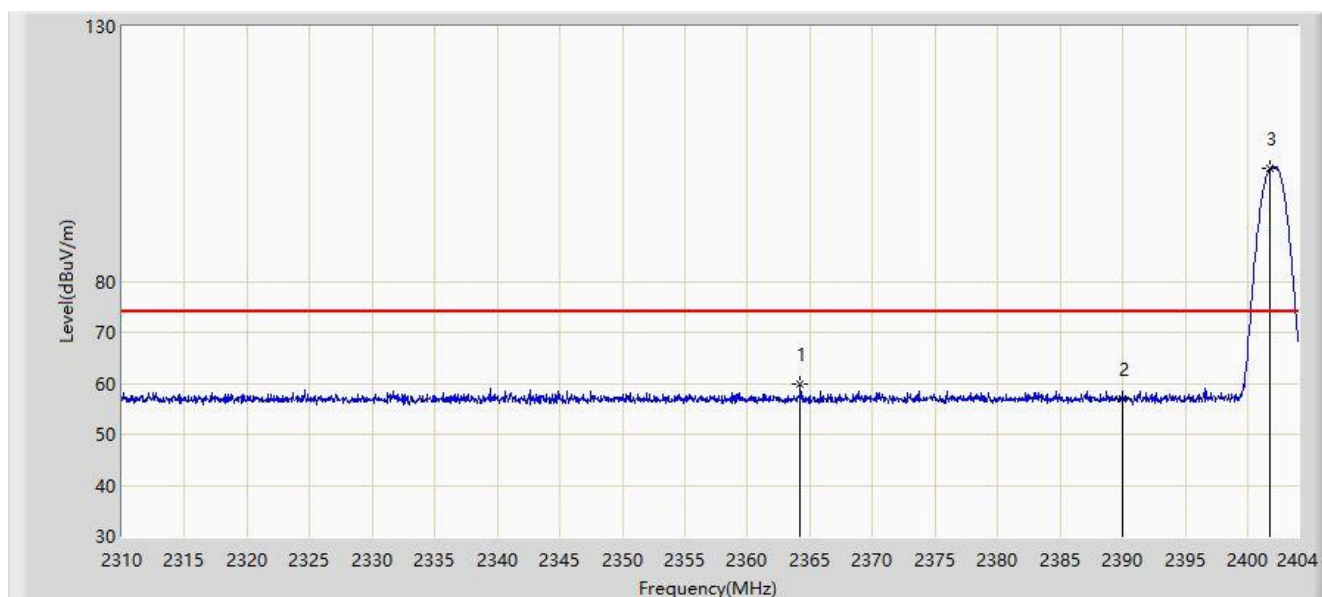


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2364.238        | 59.724                 | 28.758               | -14.276     | 74.000         | 30.967      | PK   |
| 2  |      |      | 2390.000        | 56.854                 | 25.948               | -17.146     | 74.000         | 30.906      | PK   |
| 3  |      | *    | 2401.791        | 102.274                | 71.378               | N/A         | N/A            | 30.896      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/23 |
| Limit: FCC_Part15_15.209_RE(3m)                                  | Engineer: Antony Yang |
| Probe: NS-AC1_BBHA9120D_2111                                     | Polarity: Horizontal  |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Right Earbud, Transmit by DH5 at Channel 2402MHz      |                       |

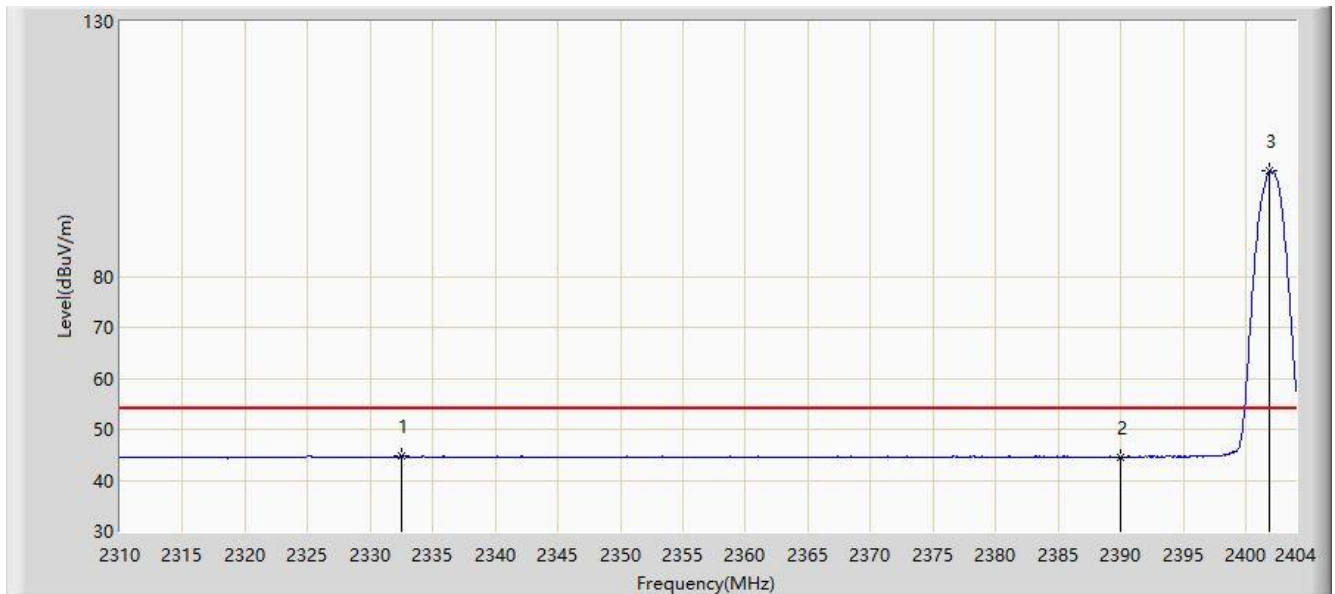


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2332.466        | 44.790                 | 13.738               | -9.210      | 54.000         | 31.052      | AV   |
| 2  |      |      | 2390.000        | 44.532                 | 13.626               | -9.468      | 54.000         | 30.906      | AV   |
| 3  |      | *    | 2401.885        | 100.691                | 69.795               | N/A         | N/A            | 30.896      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/23 |
| Limit: FCC_Part15_15.209_RE(3m)                                  | Engineer: Antony Yang |
| Probe: NS-AC1_BBHA9120D_2111                                     | Polarity: Vertical    |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Right Earbud, Transmit by DH5 at Channel 2402MHz      |                       |

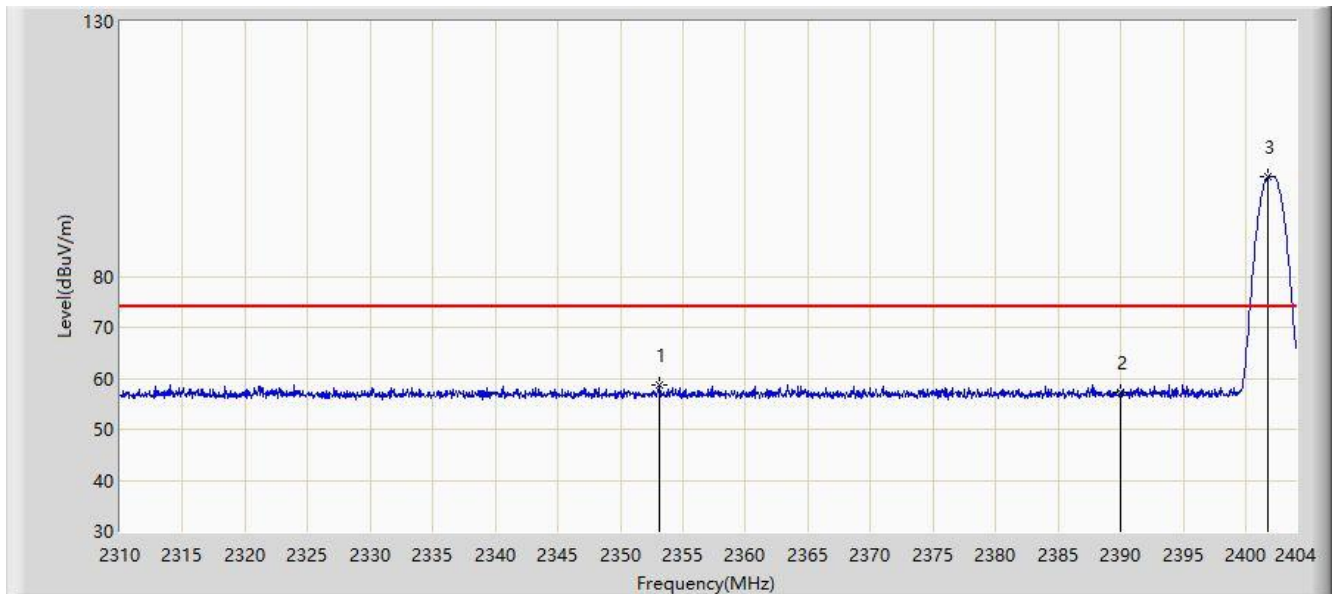


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2353.146        | 58.716                 | 27.723               | -15.284     | 74.000         | 30.993      | PK   |
| 2  |      |      | 2390.000        | 57.212                 | 26.306               | -16.788     | 74.000         | 30.906      | PK   |
| 3  |      | *    | 2401.791        | 99.490                 | 68.594               | N/A         | N/A            | 30.896      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/23 |
| Limit: FCC_Part15_15.209_RE(3m)                                  | Engineer: Antony Yang |
| Probe: NS-AC1_BBHA9120D_2111                                     | Polarity: Vertical    |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Right Earbud, Transmit by DH5 at Channel 2402MHz      |                       |

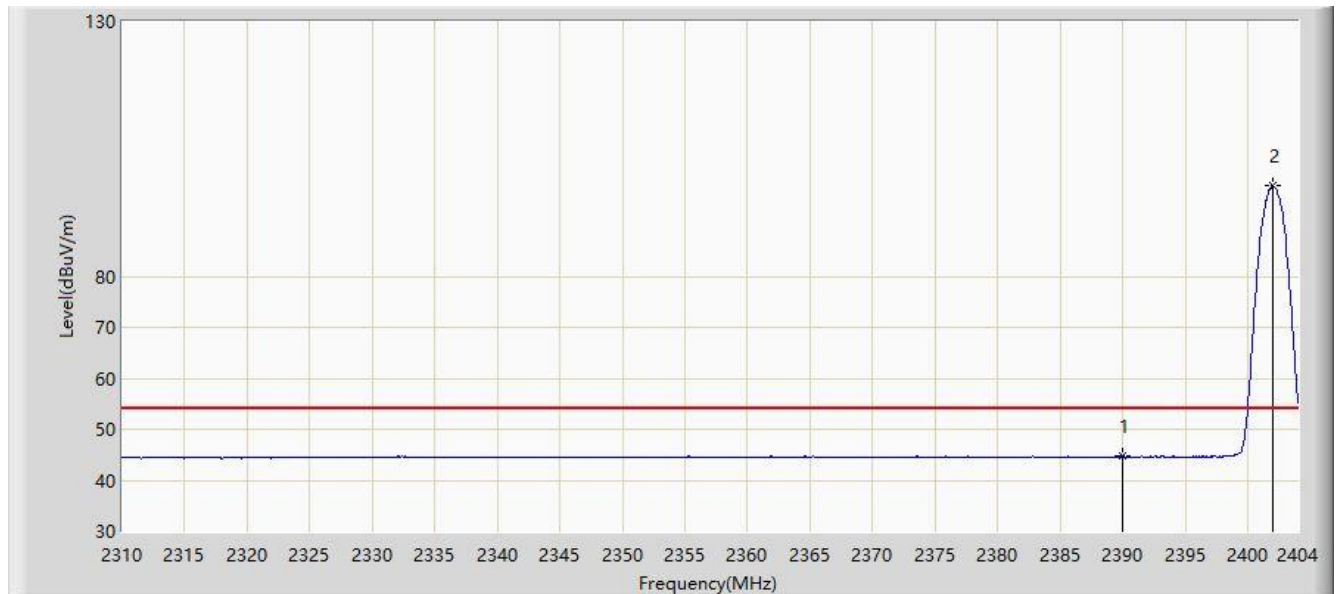


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 44.667                 | 13.761               | -9.333      | 54.000         | 30.906      | AV   |
| 2  |      | *    | 2401.979        | 97.869                 | 66.973               | N/A         | N/A            | 30.896      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/23 |
| Limit: FCC_Part15_15.209_RE(3m)                                  | Engineer: Antony Yang |
| Probe: NS-AC1_BBHA9120D_2111                                     | Polarity: Horizontal  |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Right Earbud, Transmit by DH5 at Channel 2480MHz      |                       |

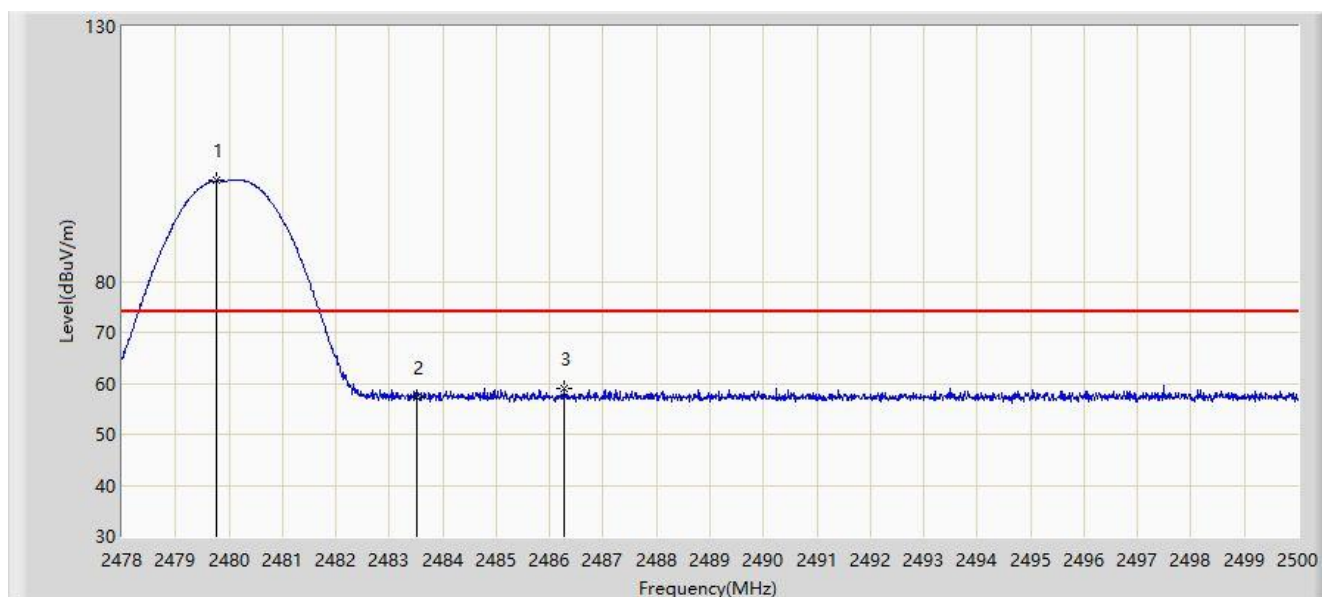

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2479.760        | 99.731                 | 68.840               | N/A         | N/A            | 30.891      | PK   |
| 2  |      |      | 2483.500        | 57.297                 | 26.409               | -16.703     | 74.000         | 30.888      | PK   |
| 3  |      |      | 2486.261        | 59.061                 | 28.175               | -14.939     | 74.000         | 30.886      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/23 |
| Limit: FCC_Part15_15.209_RE(3m)                                  | Engineer: Antony Yang |
| Probe: NS-AC1_BBHA9120D_2111                                     | Polarity: Horizontal  |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Right Earbud, Transmit by DH5 at Channel 2480MHz      |                       |




| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2479.859        | 99.146                 | 68.255               | N/A         | N/A            | 30.891      | AV   |
| 2  |      |      | 2483.500        | 45.166                 | 14.278               | -8.834      | 54.000         | 30.888      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/23 |
| Limit: FCC_Part15_15.209_RE(3m)                                  | Engineer: Antony Yang |
| Probe: NS-AC1_BBHA9120D_2111                                     | Polarity: Vertical    |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Right Earbud, Transmit by DH5 at Channel 2480MHz      |                       |

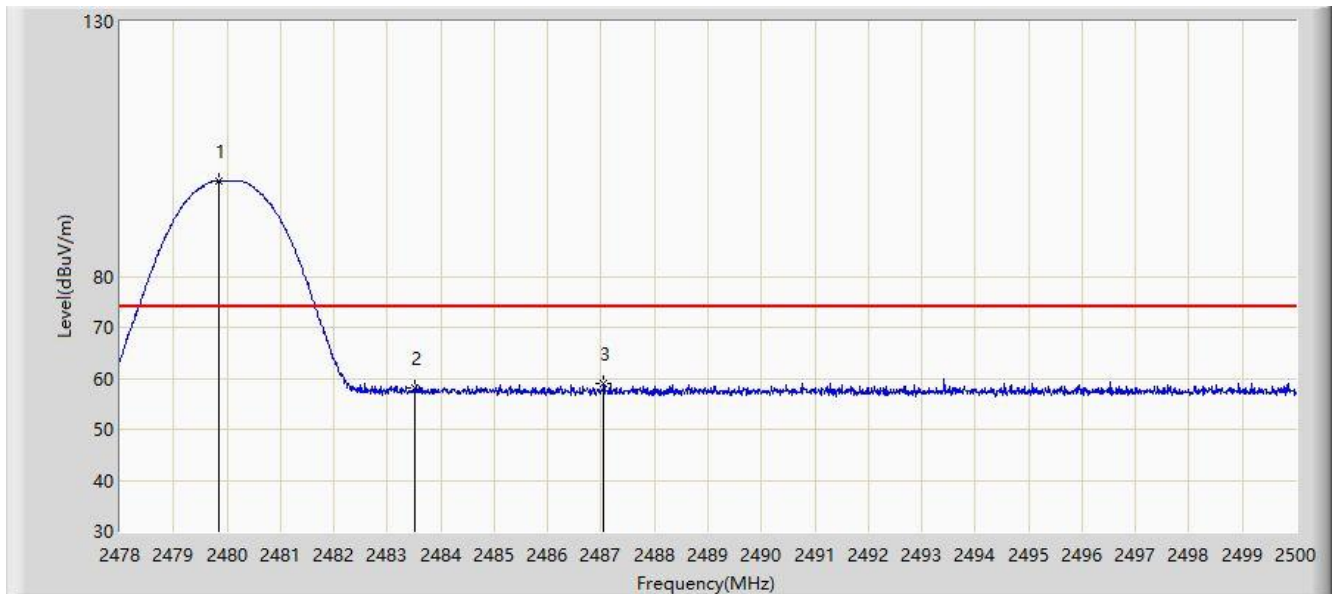


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2479.859        | 98.802                 | 67.911               | N/A         | N/A            | 30.891      | PK   |
| 2  |      |      | 2483.500        | 58.133                 | 27.245               | -15.867     | 74.000         | 30.888      | PK   |
| 3  |      |      | 2487.042        | 58.912                 | 28.026               | -15.088     | 74.000         | 30.886      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/23 |
| Limit: FCC_Part15_15.209_RE(3m)                                  | Engineer: Antony Yang |
| Probe: NS-AC1_BBHA9120D_2111                                     | Polarity: Vertical    |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Right Earbud, Transmit by DH5 at Channel 2480MHz      |                       |

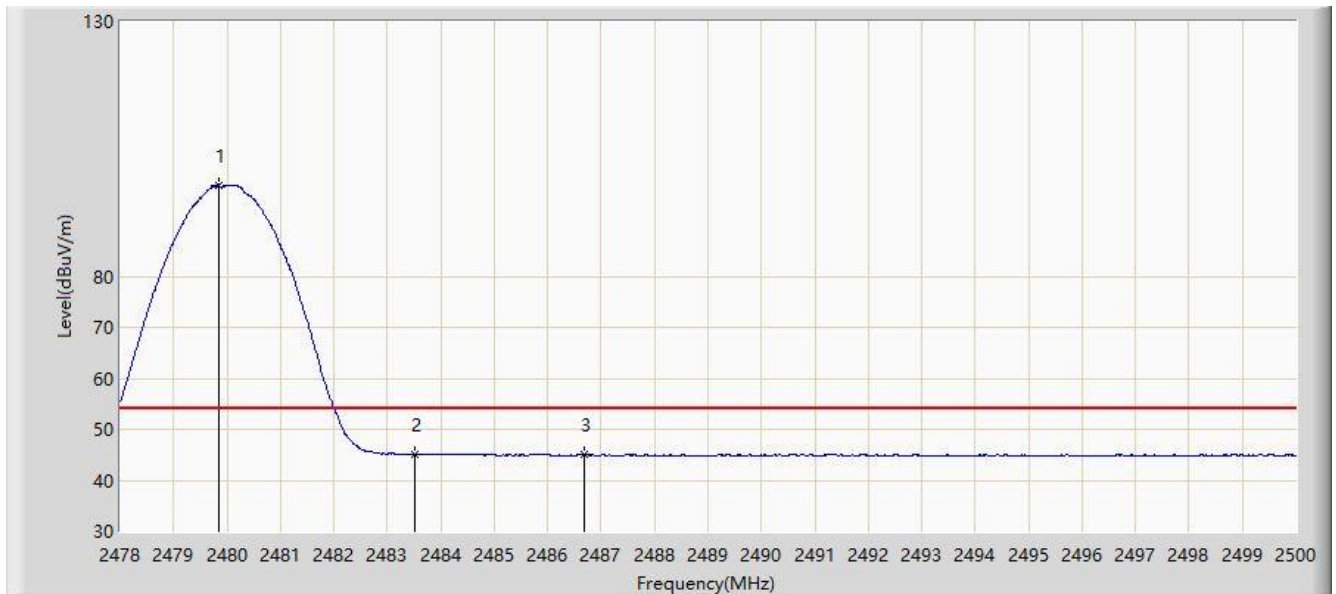


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2479.837        | 97.954                 | 67.063               | N/A         | N/A            | 30.891      | AV   |
| 2  |      |      | 2483.500        | 45.050                 | 14.162               | -8.950      | 54.000         | 30.888      | AV   |
| 3  |      |      | 2486.679        | 45.066                 | 14.180               | -8.934      | 54.000         | 30.886      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/23 |
| Limit: FCC_Part15_15.209_RE(3m)                                  | Engineer: Antony Yang |
| Probe: NS-AC1_BBHA9120D_2111                                     | Polarity: Horizontal  |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Right Earbud, Transmit by 2DH5 at Channel 2402MHz     |                       |

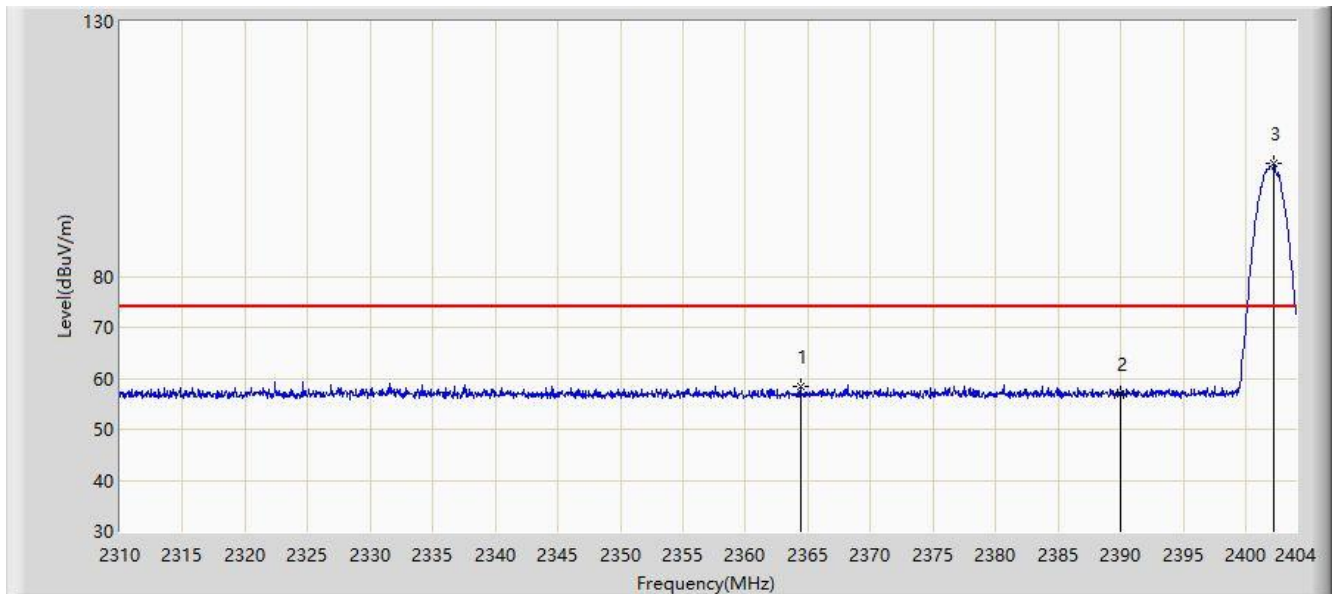


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2364.379        | 58.464                 | 27.498               | -15.536     | 74.000         | 30.966      | PK   |
| 2  |      |      | 2390.000        | 57.028                 | 26.122               | -16.972     | 74.000         | 30.906      | PK   |
| 3  |      | *    | 2402.261        | 102.034                | 71.138               | N/A         | N/A            | 30.896      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/23 |
| Limit: FCC_Part15_15.209_RE(3m)                                  | Engineer: Antony Yang |
| Probe: NS-AC1_BBHA9120D_2111                                     | Polarity: Horizontal  |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Right Earbud, Transmit by 2DH5 at Channel 2402MHz     |                       |

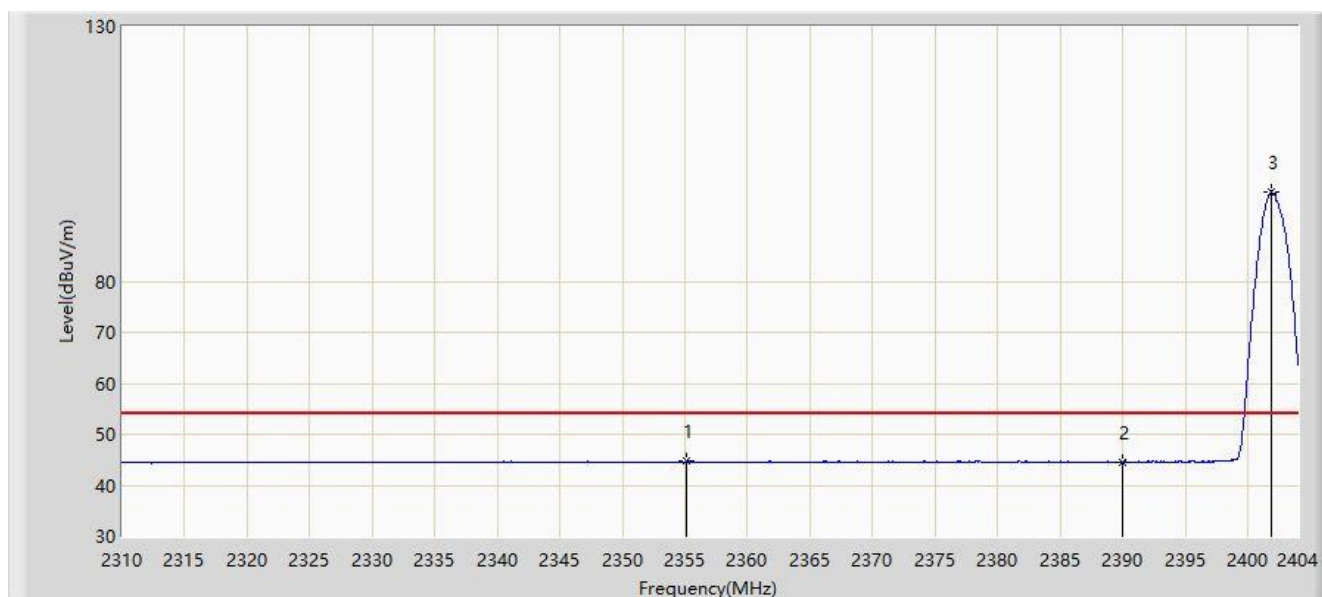


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2355.167        | 44.841                 | 13.853               | -9.159      | 54.000         | 30.987      | AV   |
| 2  |      |      | 2390.000        | 44.564                 | 13.658               | -9.436      | 54.000         | 30.906      | AV   |
| 3  |      | *    | 2401.885        | 97.623                 | 66.727               | N/A         | N/A            | 30.896      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/23 |
| Limit: FCC_Part15_15.209_RE(3m)                                  | Engineer: Antony Yang |
| Probe: NS-AC1_BBHA9120D_2111                                     | Polarity: Vertical    |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Right Earbud, Transmit by 2DH5 at Channel 2402MHz     |                       |

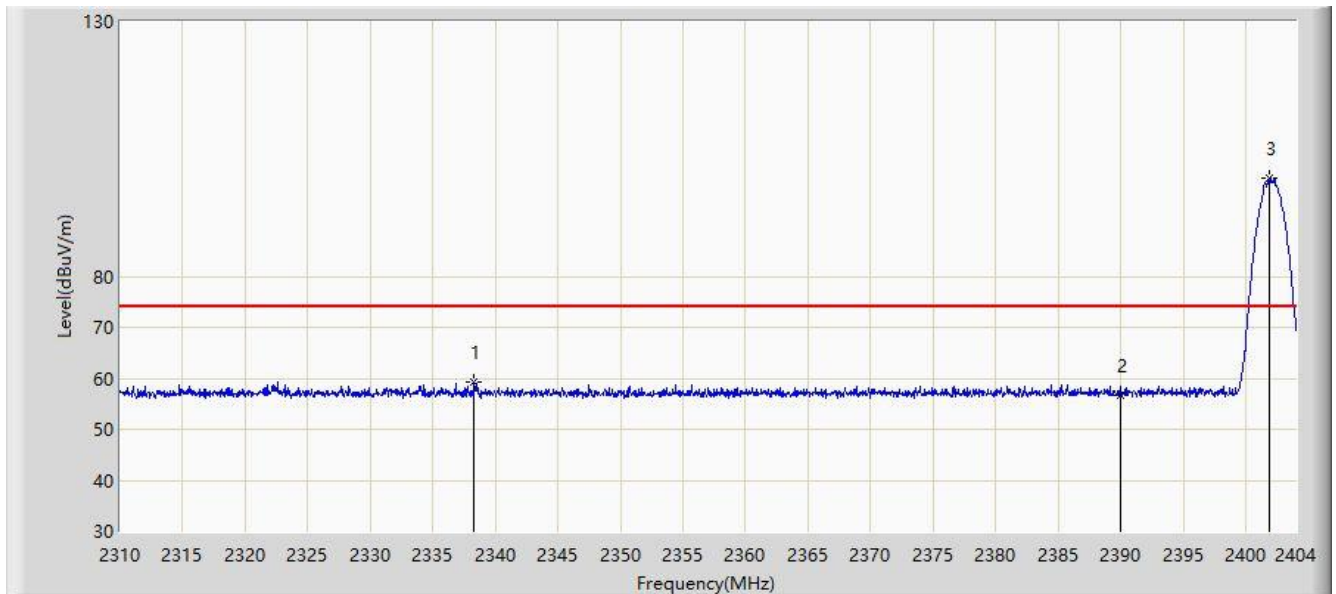


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2338.294        | 59.234                 | 28.201               | -14.766     | 74.000         | 31.033      | PK   |
| 2  |      |      | 2390.000        | 56.552                 | 25.646               | -17.448     | 74.000         | 30.906      | PK   |
| 3  |      | *    | 2401.838        | 99.313                 | 68.417               | N/A         | N/A            | 30.896      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/23 |
| Limit: FCC_Part15_15.209_RE(3m)                                  | Engineer: Antony Yang |
| Probe: NS-AC1_BBHA9120D_2111                                     | Polarity: Vertical    |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Right Earbud, Transmit by 2DH5 at Channel 2402MHz     |                       |

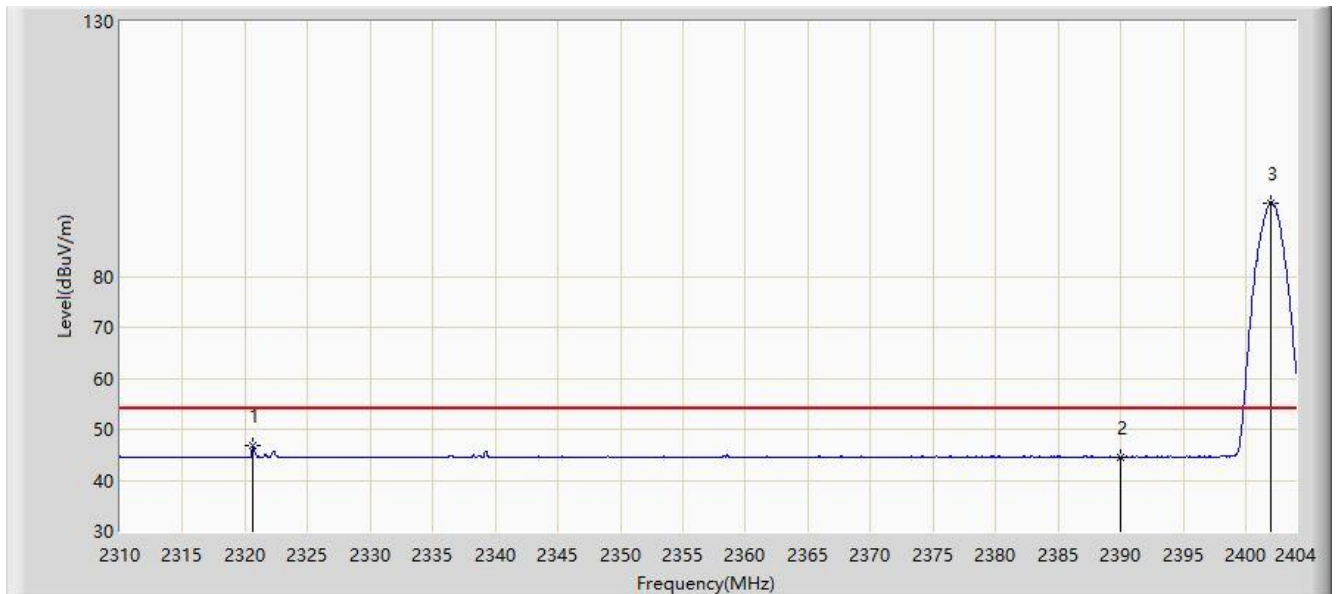


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2320.622        | 46.678                 | 15.588               | -7.322      | 54.000         | 31.089      | AV   |
| 2  |      |      | 2390.000        | 44.573                 | 13.667               | -9.427      | 54.000         | 30.906      | AV   |
| 3  |      | *    | 2401.979        | 94.452                 | 63.556               | N/A         | N/A            | 30.896      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/23 |
| Limit: FCC_Part15_15.209_RE(3m)                                  | Engineer: Antony Yang |
| Probe: NS-AC1_BBHA9120D_2111                                     | Polarity: Horizontal  |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Right Earbud, Transmit by 2DH5 at Channel 2480MHz     |                       |

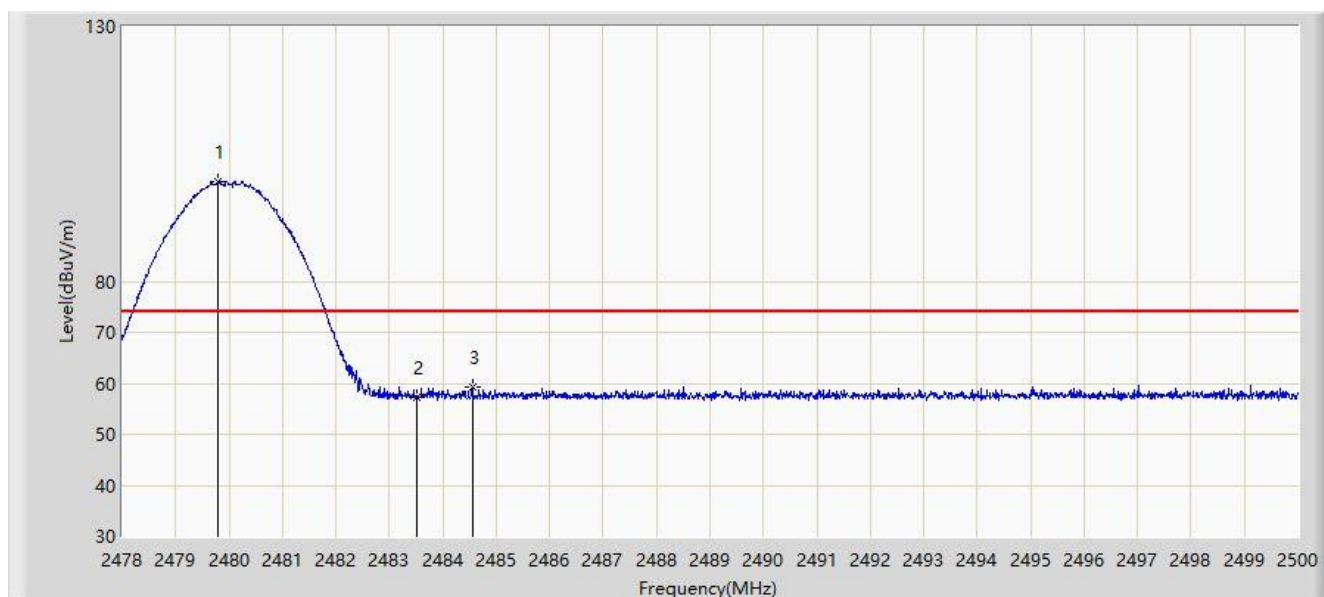


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2479.793        | 99.552                 | 68.661               | N/A         | N/A            | 30.891      | PK   |
| 2  |      |      | 2483.500        | 57.203                 | 26.315               | -16.797     | 74.000         | 30.888      | PK   |
| 3  |      |      | 2484.556        | 59.313                 | 28.426               | -14.687     | 74.000         | 30.887      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/23 |
| Limit: FCC_Part15_15.209_RE(3m)                                  | Engineer: Antony Yang |
| Probe: NS-AC1_BBHA9120D_2111                                     | Polarity: Horizontal  |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Right Earbud, Transmit by 2DH5 at Channel 2480MHz     |                       |

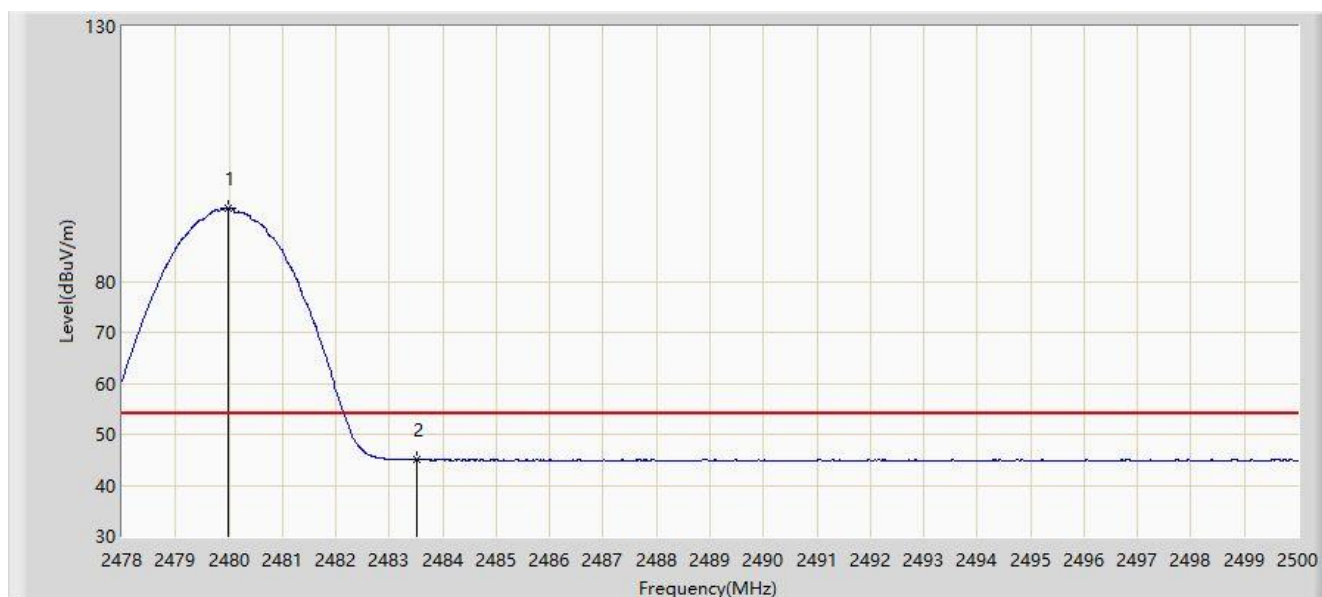


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2479.980        | 94.451                 | 63.560               | N/A         | N/A            | 30.891      | AV   |
| 2  |      |      | 2483.500        | 45.039                 | 14.151               | -8.961      | 54.000         | 30.888      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/23 |
| Limit: FCC_Part15_15.209_RE(3m)                                  | Engineer: Antony Yang |
| Probe: NS-AC1_BBHA9120D_2111                                     | Polarity: Vertical    |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Right Earbud, Transmit by 2DH5 at Channel 2480MHz     |                       |

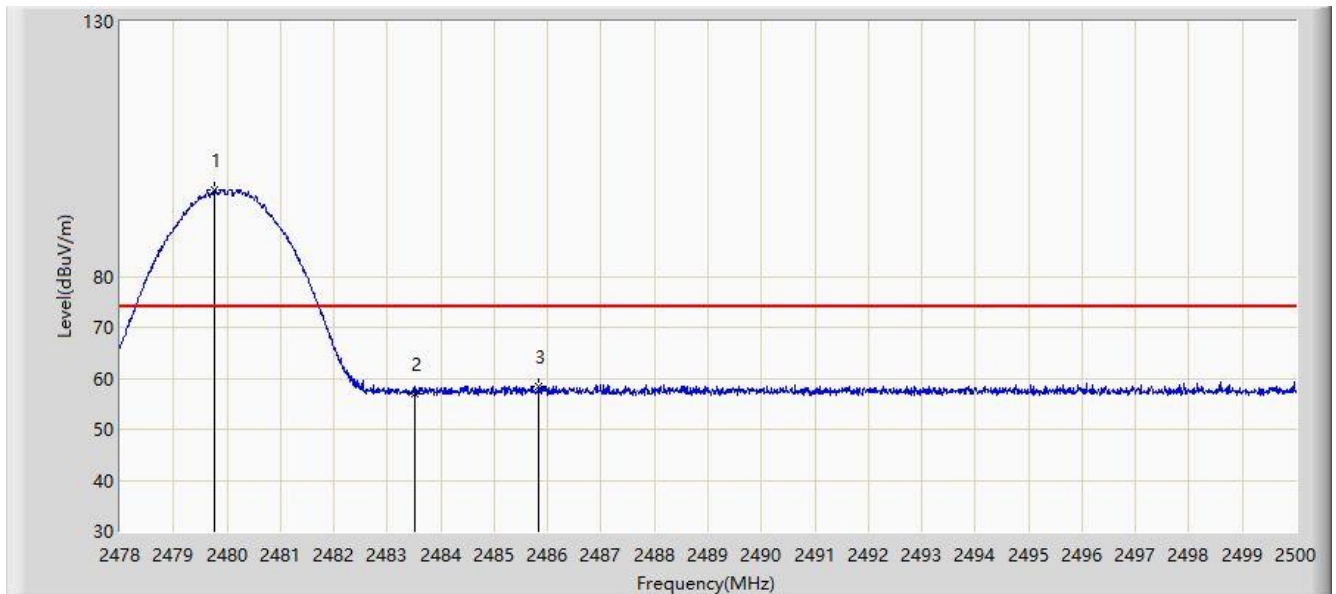


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2479.760        | 96.996                 | 66.105               | N/A         | N/A            | 30.891      | PK   |
| 2  |      |      | 2483.500        | 57.042                 | 26.154               | -16.958     | 74.000         | 30.888      | PK   |
| 3  |      |      | 2485.832        | 58.424                 | 27.538               | -15.576     | 74.000         | 30.886      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/23 |
| Limit: FCC_Part15_15.209_RE(3m)                                  | Engineer: Antony Yang |
| Probe: NS-AC1_BBHA9120D_2111                                     | Polarity: Vertical    |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Right Earbud, Transmit by 2DH5 at Channel 2480MHz     |                       |

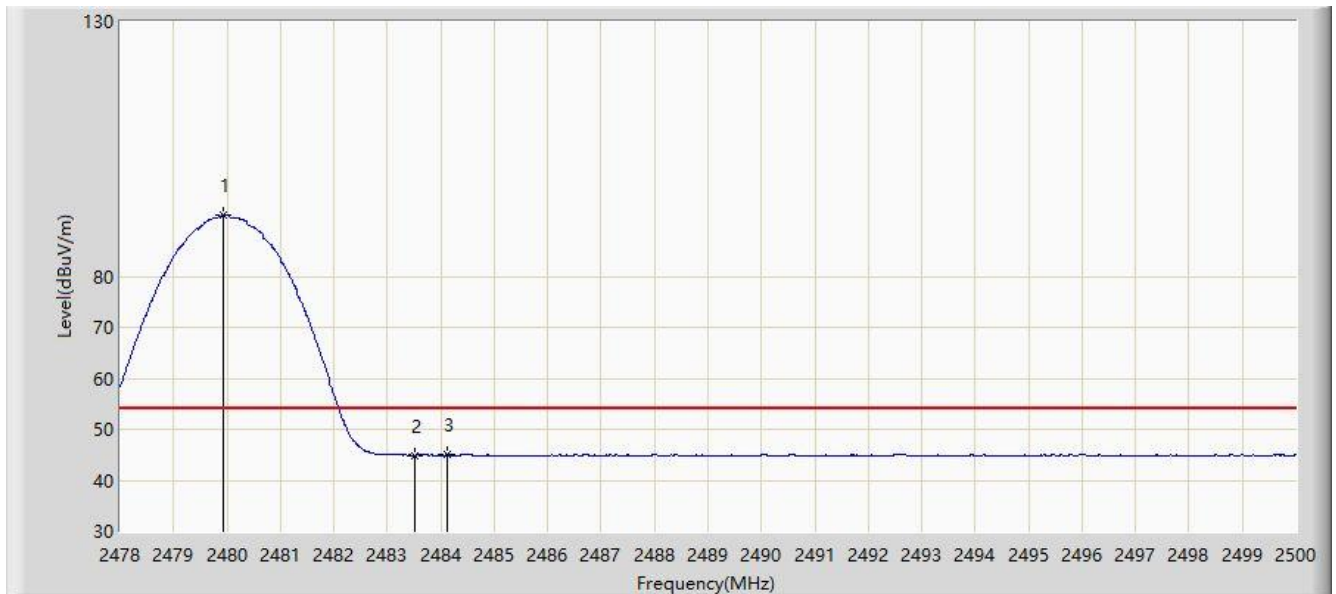


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2479.925        | 91.963                 | 61.072               | N/A         | N/A            | 30.891      | AV   |
| 2  |      |      | 2483.500        | 44.907                 | 14.019               | -9.093      | 54.000         | 30.888      | AV   |
| 3  |      |      | 2484.116        | 45.075                 | 14.187               | -8.925      | 54.000         | 30.888      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/23 |
| Limit: FCC_Part15_15.209_RE(3m)                                  | Engineer: Antony Yang |
| Probe: NS-AC1_BBHA9120D_2111                                     | Polarity: Horizontal  |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Right Earbud, Transmit by 3DH5 at Channel 2402MHz     |                       |

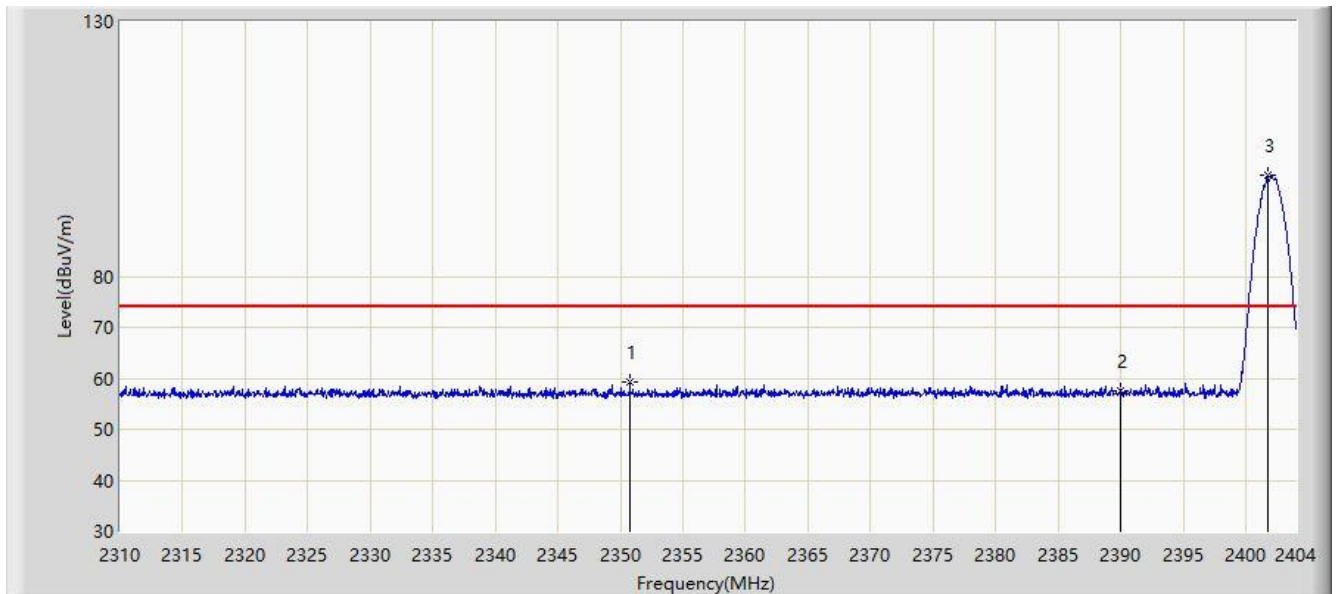


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2350.749        | 59.405                 | 28.406               | -14.595     | 74.000         | 30.999      | PK   |
| 2  |      |      | 2390.000        | 57.567                 | 26.661               | -16.433     | 74.000         | 30.906      | PK   |
| 3  |      | *    | 2401.744        | 99.732                 | 68.836               | N/A         | N/A            | 30.897      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/23 |
| Limit: FCC_Part15_15.209_RE(3m)                                  | Engineer: Antony Yang |
| Probe: NS-AC1_BBHA9120D_2111                                     | Polarity: Horizontal  |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Right Earbud, Transmit by 3DH5 at Channel 2402MHz     |                       |

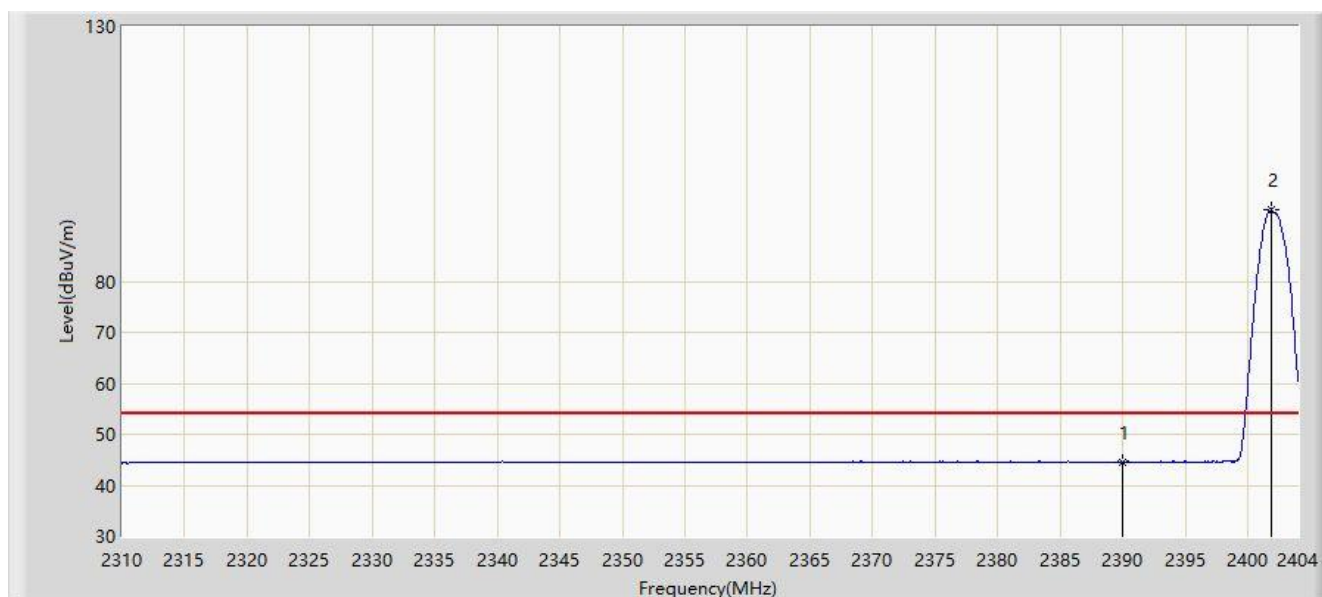


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 44.523                 | 13.617               | -9.477      | 54.000         | 30.906      | AV   |
| 2  |      | *    | 2401.885        | 94.141                 | 63.245               | N/A         | N/A            | 30.896      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/23 |
| Limit: FCC_Part15_15.209_RE(3m)                                  | Engineer: Antony Yang |
| Probe: NS-AC1_BBHA9120D_2111                                     | Polarity: Vertical    |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Right Earbud, Transmit by 3DH5 at Channel 2402MHz     |                       |

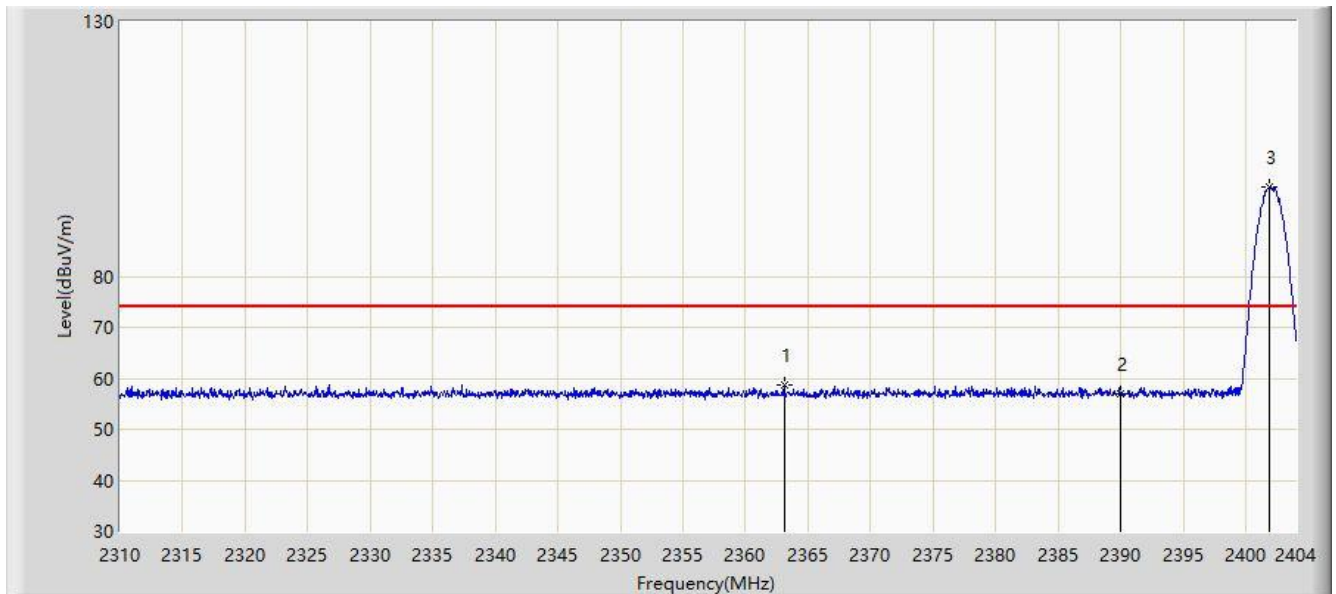


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2363.110        | 58.719                 | 27.750               | -15.281     | 74.000         | 30.968      | PK   |
| 2  |      |      | 2390.000        | 56.900                 | 25.994               | -17.100     | 74.000         | 30.906      | PK   |
| 3  |      | *    | 2401.885        | 97.621                 | 66.725               | N/A         | N/A            | 30.896      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/23 |
| Limit: FCC_Part15_15.209_RE(3m)                                  | Engineer: Antony Yang |
| Probe: NS-AC1_BBHA9120D_2111                                     | Polarity: Vertical    |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Right Earbud, Transmit by 3DH5 at Channel 2402MHz     |                       |

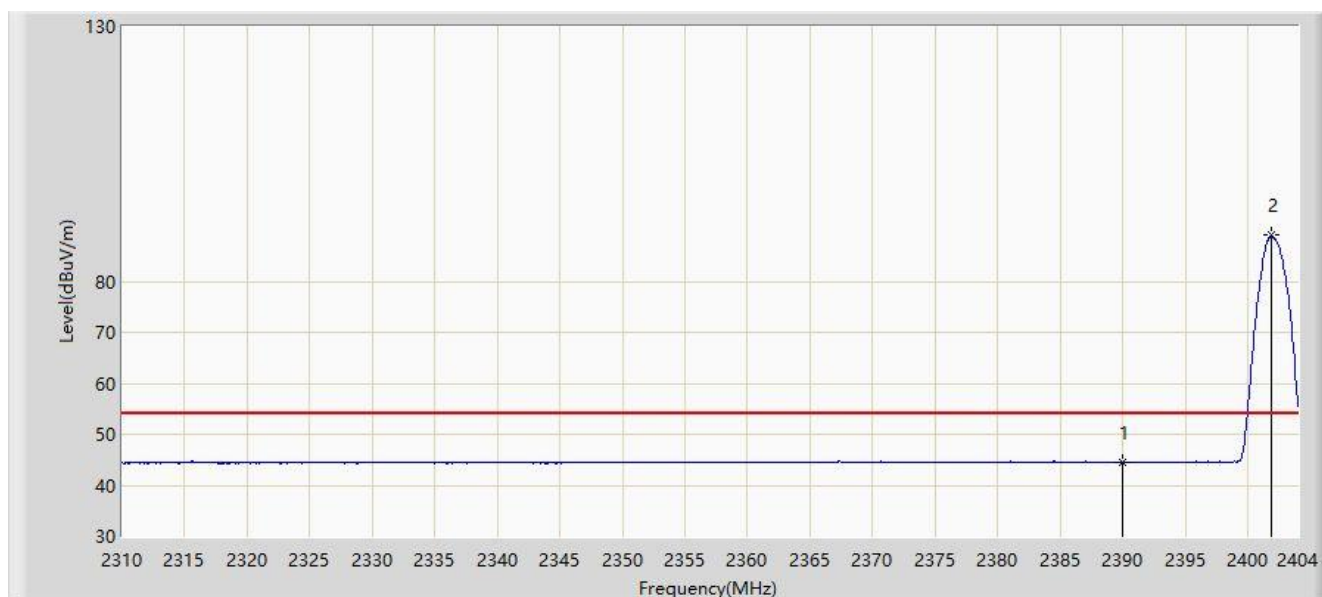


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 44.509                 | 13.603               | -9.491      | 54.000         | 30.906      | AV   |
| 2  |      | *    | 2401.838        | 89.026                 | 58.130               | N/A         | N/A            | 30.896      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/23 |
| Limit: FCC_Part15_15.209_RE(3m)                                  | Engineer: Antony Yang |
| Probe: NS-AC1_BBHA9120D_2111                                     | Polarity: Horizontal  |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Right Earbud, Transmit by 3DH5 at Channel 2480MHz     |                       |

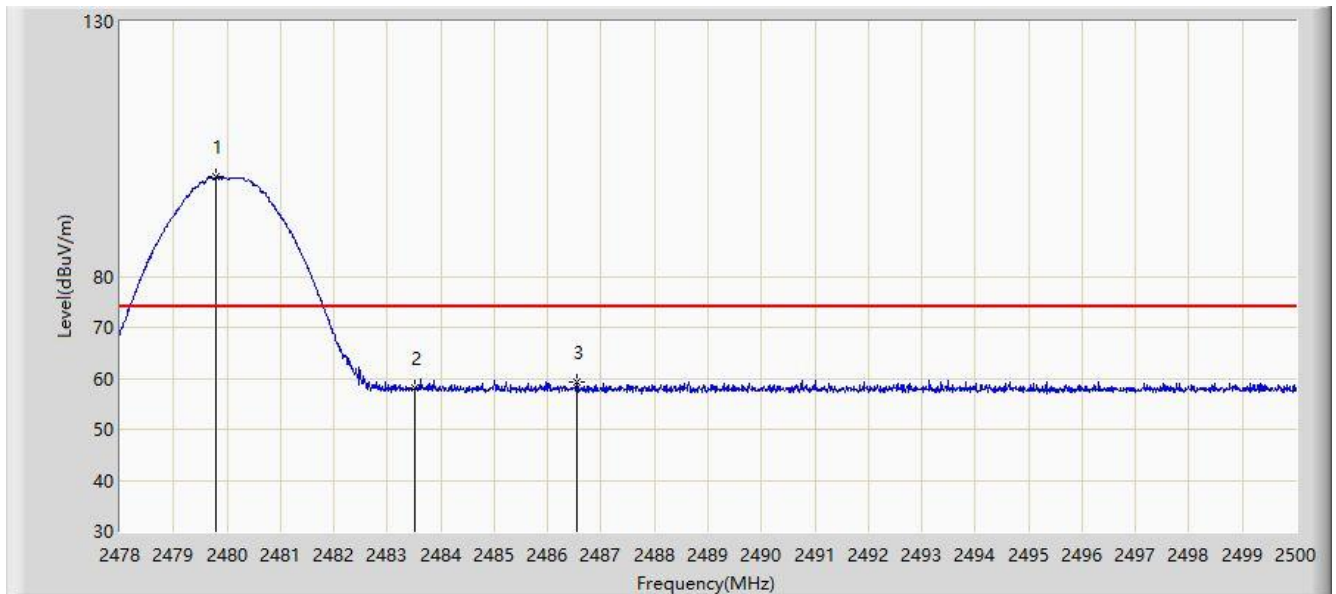


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2479.782        | 99.426                 | 68.535               | N/A         | N/A            | 30.891      | PK   |
| 2  |      |      | 2483.500        | 58.063                 | 27.175               | -15.937     | 74.000         | 30.888      | PK   |
| 3  |      |      | 2486.536        | 59.364                 | 28.478               | -14.636     | 74.000         | 30.886      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/23 |
| Limit: FCC_Part15_15.209_RE(3m)                                  | Engineer: Antony Yang |
| Probe: NS-AC1_BBHA9120D_2111                                     | Polarity: Horizontal  |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Right Earbud, Transmit by 3DH5 at Channel 2480MHz     |                       |

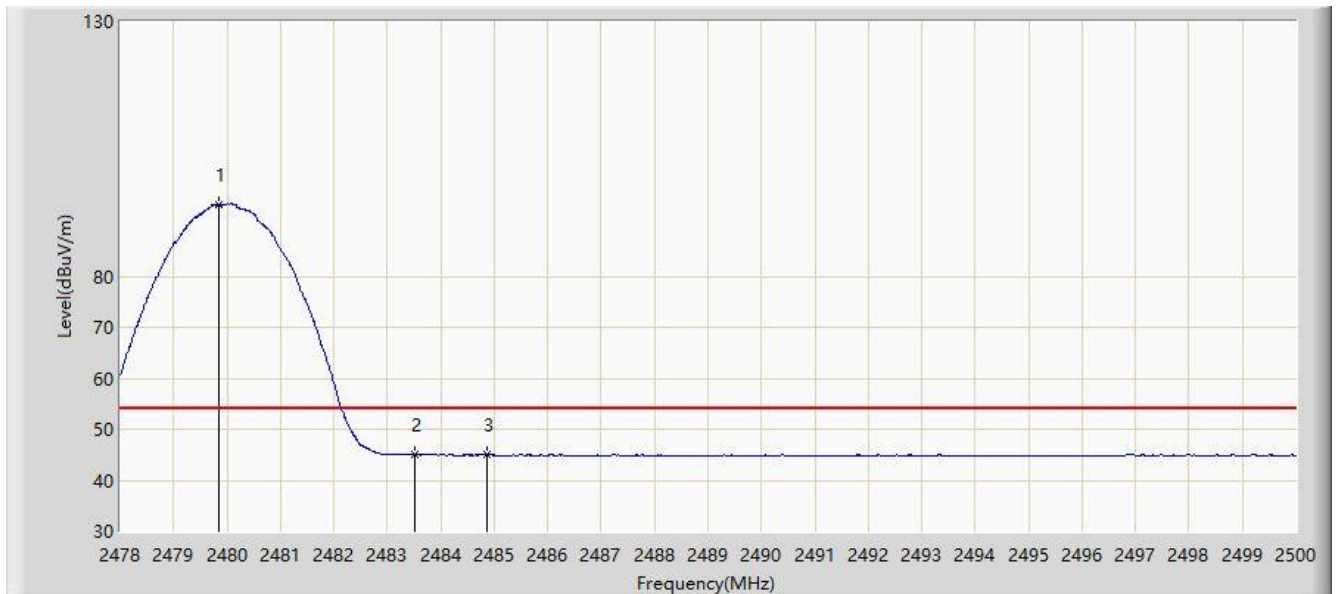


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2479.848        | 94.143                 | 63.252               | N/A         | N/A            | 30.891      | AV   |
| 2  |      |      | 2483.500        | 44.999                 | 14.111               | -9.001      | 54.000         | 30.888      | AV   |
| 3  |      |      | 2484.853        | 45.071                 | 14.184               | -8.929      | 54.000         | 30.887      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/23 |
| Limit: FCC_Part15_15.209_RE(3m)                                  | Engineer: Antony Yang |
| Probe: NS-AC1_BBHA9120D_2111                                     | Polarity: Vertical    |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Right Earbud, Transmit by 3DH5 at Channel 2480MHz     |                       |

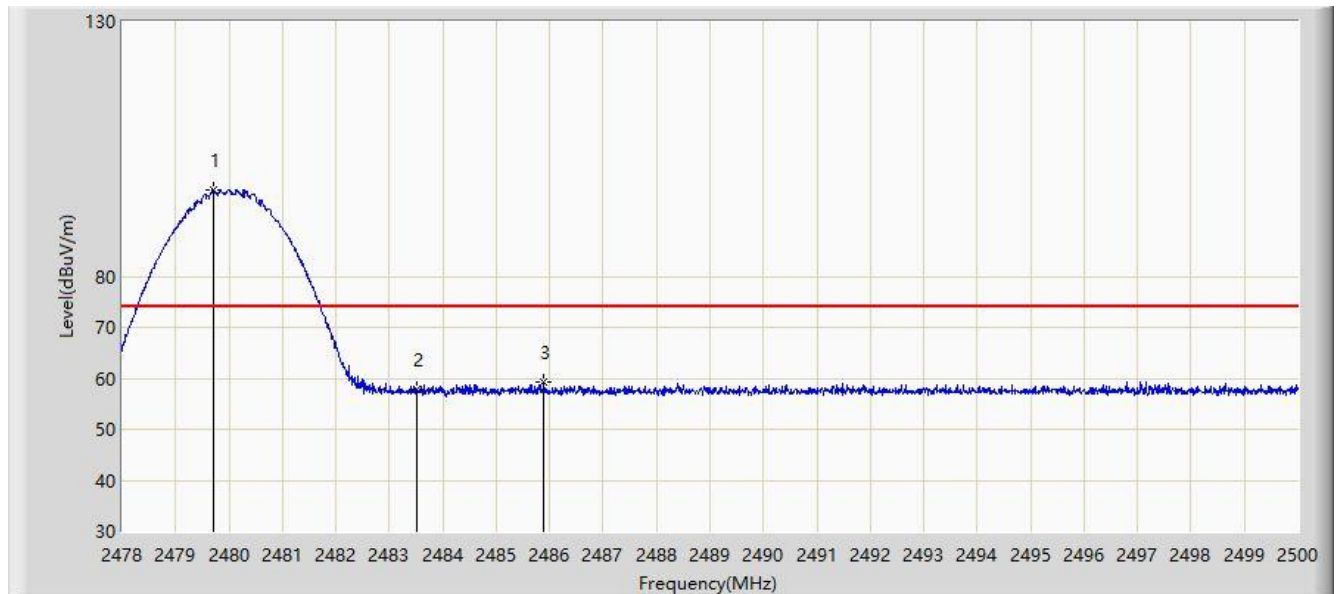


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2479.716        | 96.926                 | 66.035               | N/A         | N/A            | 30.891      | PK   |
| 2  |      |      | 2483.500        | 57.740                 | 26.852               | -16.260     | 74.000         | 30.888      | PK   |
| 3  |      |      | 2485.887        | 59.145                 | 28.259               | -14.855     | 74.000         | 30.886      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                  |                       |
|------------------------------------------------------------------|-----------------------|
| Site: NS-AC1                                                     | Test Date: 2021/04/23 |
| Limit: FCC_Part15_15.209_RE(3m)                                  | Engineer: Antony Yang |
| Probe: NS-AC1_BBHA9120D_2111                                     | Polarity: Vertical    |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: DC 5V          |
| Test Mode: Right Earbud, Transmit by 3DH5 at Channel 2480MHz     |                       |

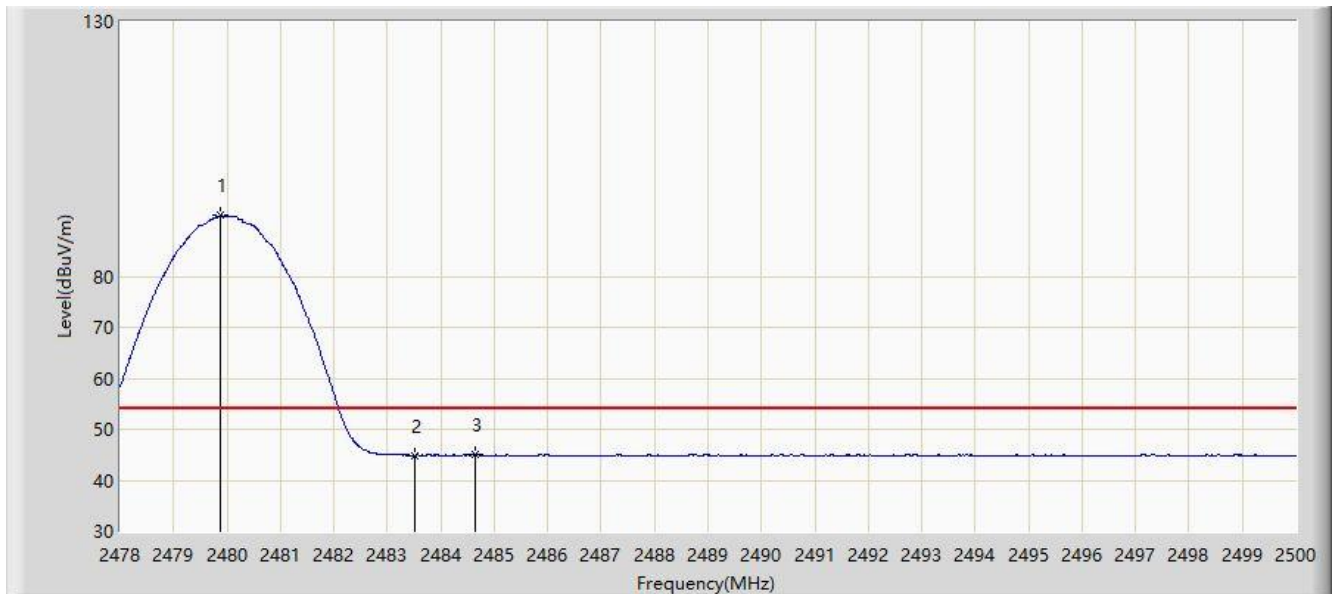

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2479.870        | 91.910                 | 61.019               | N/A         | N/A            | 30.891      | AV   |
| 2  |      |      | 2483.500        | 44.878                 | 13.990               | -9.122      | 54.000         | 30.888      | AV   |
| 3  |      |      | 2484.655        | 45.085                 | 14.198               | -8.915      | 54.000         | 30.887      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

## 6.11. AC Conducted Emissions Measurement


### 6.11.1. Test Limit

| FCC Part 15 Subpart C Paragraph 15.207 Limits |                 |                      |
|-----------------------------------------------|-----------------|----------------------|
| Frequency (MHz)                               | QP (dB $\mu$ V) | Average (dB $\mu$ V) |
| 0.15 - 0.50                                   | 66 - 56         | 56 - 46              |
| 0.50 - 5.0                                    | 56              | 46                   |
| 5.0 - 30                                      | 60              | 50                   |

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

### 6.11.2. Test Setup

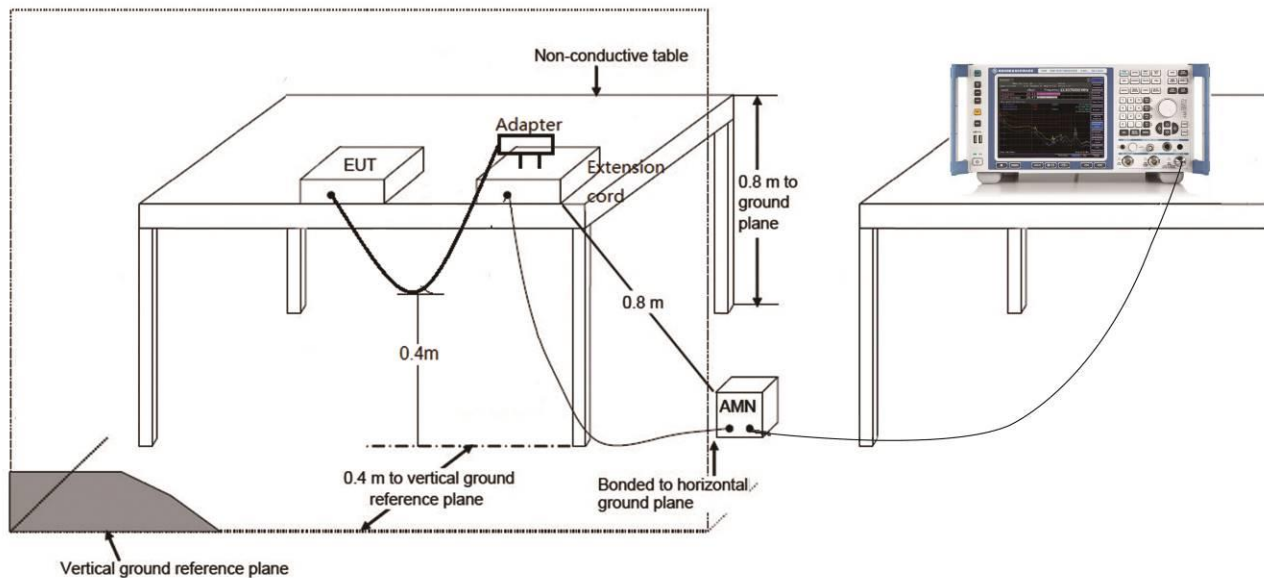

### 6.11.3.Test Result

|                                                                  |                               |
|------------------------------------------------------------------|-------------------------------|
| Site: NS-SR2                                                     | Test Date: 2021/04/29 - 14:28 |
| Limit: FCC_Part15.207_CE_AC Power                                | Engineer: Flay Yang           |
| Probe: ENV216_102493_Filter Off_0.15~30MHz                       | Polarity: Line                |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 2DH5 at Channel 2441MHz                   |                               |

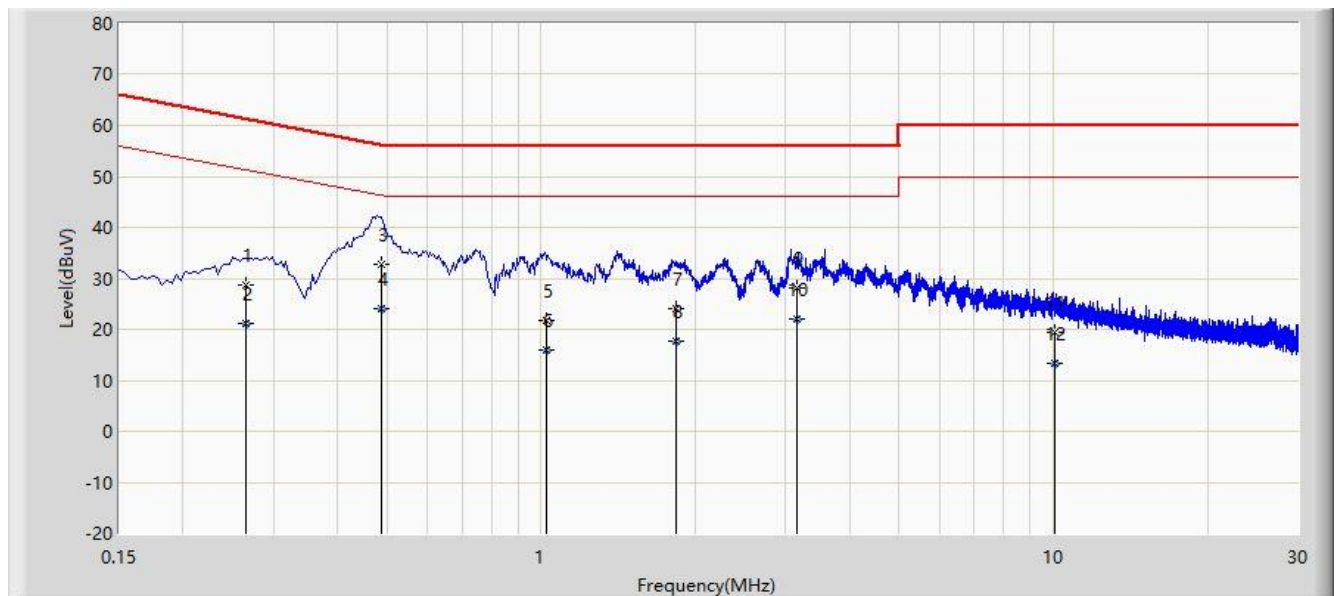


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV) | Factor (dB) | Type |
|----|------|------|-----------------|----------------------|----------------------|-------------|--------------|-------------|------|
| 1  |      |      | 0.266           | 28.776               | 19.240               | -32.466     | 61.242       | 9.536       | QP   |
| 2  |      |      | 0.266           | 21.031               | 11.495               | -30.211     | 51.242       | 9.536       | AV   |
| 3  |      |      | 0.486           | 32.671               | 23.113               | -23.573     | 56.243       | 9.558       | QP   |
| 4  |      | *    | 0.486           | 24.003               | 14.445               | -22.240     | 46.243       | 9.558       | AV   |
| 5  |      |      | 1.022           | 21.822               | 12.219               | -34.178     | 56.000       | 9.603       | QP   |
| 6  |      |      | 1.022           | 15.997               | 6.394                | -30.003     | 46.000       | 9.603       | AV   |
| 7  |      |      | 1.830           | 24.154               | 14.530               | -31.846     | 56.000       | 9.623       | QP   |
| 8  |      |      | 1.830           | 17.735               | 8.111                | -28.265     | 46.000       | 9.623       | AV   |
| 9  |      |      | 3.150           | 28.223               | 18.564               | -27.777     | 56.000       | 9.659       | QP   |
| 10 |      |      | 3.150           | 22.157               | 12.498               | -23.843     | 46.000       | 9.659       | AV   |
| 11 |      |      | 10.082          | 19.417               | 9.628                | -40.583     | 60.000       | 9.788       | QP   |
| 12 |      |      | 10.082          | 13.463               | 3.675                | -36.537     | 50.000       | 9.788       | AV   |

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

|                                                                  |                               |
|------------------------------------------------------------------|-------------------------------|
| Site: NS-SR2                                                     | Test Date: 2021/04/29 - 14:42 |
| Limit: FCC_Part15.207_CE_AC Power                                | Engineer: Flay Yang           |
| Probe: ENV216_102493_Filter Off_0.15~30MHz                       | Polarity: Neutral             |
| EUT: True Wireless Gaming Earbuds with Active Noise Cancellation | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 2DH5 at Channel 2441MHz                   |                               |

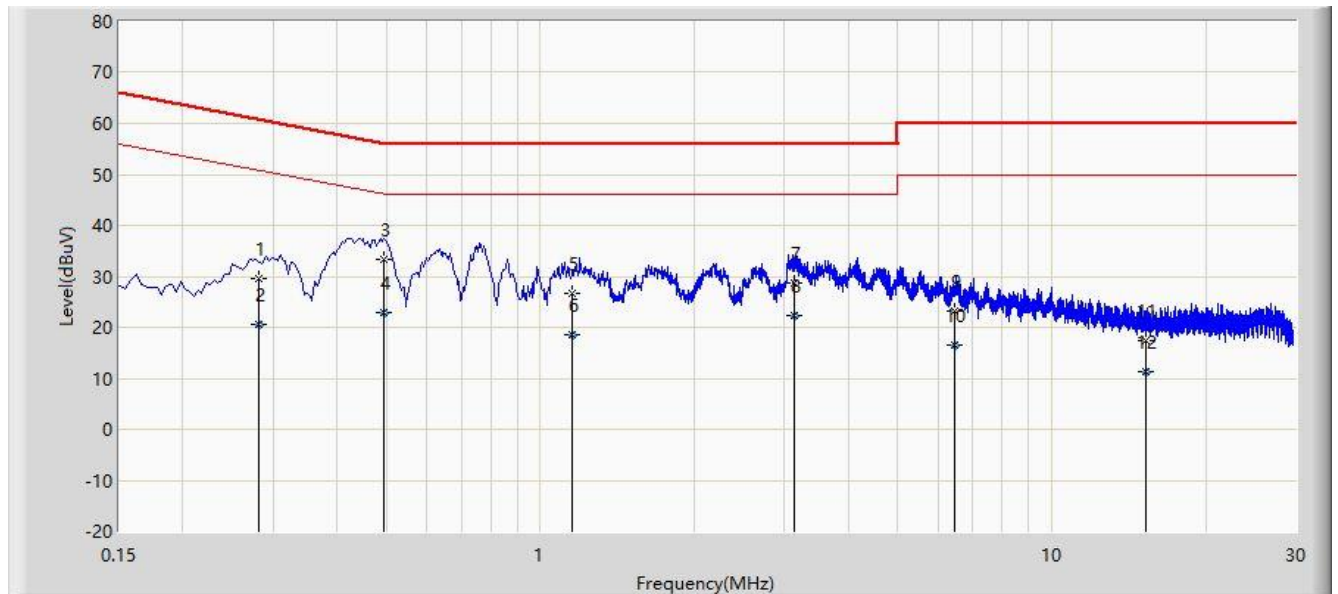

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV) | Factor (dB) | Type |
|----|------|------|-----------------|----------------------|----------------------|-------------|--------------|-------------|------|
| 1  |      |      | 0.282           | 29.559               | 20.014               | -31.198     | 60.757       | 9.545       | QP   |
| 2  |      |      | 0.282           | 20.542               | 10.997               | -30.215     | 50.757       | 9.545       | AV   |
| 3  |      | *    | 0.494           | 33.427               | 23.857               | -22.673     | 56.100       | 9.570       | QP   |
| 4  |      |      | 0.494           | 22.960               | 13.390               | -23.140     | 46.100       | 9.570       | AV   |
| 5  |      |      | 1.154           | 26.727               | 17.125               | -29.273     | 56.000       | 9.602       | QP   |
| 6  |      |      | 1.154           | 18.652               | 9.050                | -27.348     | 46.000       | 9.602       | AV   |
| 7  |      |      | 3.126           | 28.708               | 19.049               | -27.292     | 56.000       | 9.659       | QP   |
| 8  |      |      | 3.126           | 22.343               | 12.684               | -23.657     | 46.000       | 9.659       | AV   |
| 9  |      |      | 6.442           | 23.183               | 13.447               | -36.817     | 60.000       | 9.737       | QP   |
| 10 |      |      | 6.442           | 16.513               | 6.776                | -33.487     | 50.000       | 9.737       | AV   |
| 11 |      |      | 15.258          | 17.499               | 7.590                | -42.501     | 60.000       | 9.909       | QP   |
| 12 |      |      | 15.258          | 11.441               | 1.532                | -38.559     | 50.000       | 9.909       | AV   |

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

## 7. CONCLUSION

The data collected relate only the item(s) tested and show that the device is compliance with Part 15C of the FCC rules.

## **Appendix A - Test Setup Photograph**

Refer to “2104RSU061-UT” file.

## **Appendix B - EUT Photograph**

Refer to “2104RSU061-UE” file.