

TEST REPORT

FCC DTS Test for SM-F741U
Certification

APPLICANT
SAMSUNG Electronics Co., Ltd.

REPORT NO.
HCT-RF-2404-FC042

DATE OF ISSUE
April 26, 2024

Tested by
Sang Hoon Lee



Technical Manager
Jong Seok Lee



HCT CO., LTD.
Bongjai Huh
BongJai Huh / CEO

**HCT CO.,LTD.**

2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Tel. +82 31 645 6300 Fax. +82 31 645 6401

TEST REPORT

REPORT NO.

HCT-RF-2404-FC042

DATE OF ISSUE

April 26, 2024

Additional Model

SM-F741U1

Applicant**SAMSUNG Electronics Co., Ltd.**

129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

**Product Name
Model Name**

Mobile Phone
SM-F741U

Average Output Power

SISO(Ant.1) : 17.99 dBm
SISO(Ant.2) : 17.46 dBm
MIMO_CDD (Ant.1+ Ant.2) : 20.62 dBm

FCC ID

A3LSMF741U

Date of Test

February 23, 2024 ~ April 26, 2024

FCC Classification

Digital Transmission System(DTS)

Test Standard Used

FCC Rule Part(s): Part 15.247

Test Results

PASS

Location of Test

☒ Permanent Testing Lab ☐ On Site Testing Lab

(Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea)

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	April 26, 2024	Initial Release

Notice

Content

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

When confirmation of authenticity of this test report is required, please contact www.hct.co.kr

The test results in this test report are not associated with the ((KS Q) ISO/IEC 17025) accreditation by KOLAS (Korea Laboratory Accreditation Scheme) / A2LA (American Association for Laboratory Accreditation) that are under the ILAC (International Laboratory Accreditation Cooperation) Mutual Recognition Agreement (MRA).

CONTENTS

1. EUT DESCRIPTION	5
ANTENNA CONFIGURATIONS	6
2. TEST METHODOLOGY	8
EUT CONFIGURATION	8
EUT EXERCISE	8
GENERAL TEST PROCEDURES	8
DESCRIPTION OF TEST MODES	9
3. INSTRUMENT CALIBRATION	9
4. FACILITIES AND ACCREDITATIONS	9
FACILITIES	9
EQUIPMENT	9
5. ANTENNA REQUIREMENTS	10
6. MEASUREMENT UNCERTAINTY	10
7. DESCRIPTION OF TESTS	11
8. SUMMARY TEST OF RESULTS	27
9. TEST RESULT	28
9.1 DUTY CYCLE	28
9.2 6 dB BANDWIDTH	30
9.3 OUTPUT POWER	33
9.4 POWER SPECTRAL DENSITY	35
9.5 BAND EDGE / CONDUCTED SPURIOUS EMISSIONS	38
9.6 RADIATED SPURIOUS EMISSIONS	41
9.7 RADIATED RESTRICTED BAND EDGES	55
9.8 POWERLINE CONDUCTED EMISSIONS	59
9.9 CONFIRMATION OF GEO-LOCATION MECHANISM	61
10. LIST OF TEST EQUIPMENT	64
11. ANNEX A_ TEST SETUP PHOTO	66

1. EUT DESCRIPTION

Model	SM-F741U			
Additional Model	SM-F741U1			
EUT Type	Mobile Phone			
Power Supply	DC 3.88 V			
Frequency Range	2 412 MHz ~ 2 462 MHz			
Max. RF Output Power	<u>Average Power</u>	SISO(Ant.1)	802.11b : 802.11g : 802.11n(HT20) : 802.11ac(VHT20) :	17.99 dBm 17.53 dBm 17.63 dBm 16.98 dBm
		SISO(Ant.2)	802.11b : 802.11g : 802.11n(HT20) : 802.11ac(VHT20) :	17.46 dBm 17.34 dBm 17.37 dBm 16.42 dBm
		MIMO_CDD (Ant1+Ant2)	802.11b : 802.11g : 802.11n(HT20) : 802.11ac(VHT20) :	20.62 dBm 20.45 dBm 20.51 dBm 19.67 dBm
	<u>Peak Power</u>	SISO(Ant.1)	802.11b : 802.11g : 802.11n(HT20) : 802.11ac(VHT20) :	23.61 dBm 25.93 dBm 25.74 dBm 24.90 dBm
		SISO(Ant.2)	802.11b : 802.11g : 802.11n(HT20) : 802.11ac(VHT20) :	23.02 dBm 25.78 dBm 25.48 dBm 24.61 dBm
		MIMO_CDD (Ant1+Ant2)	802.11b : 802.11g : 802.11n(HT20) : 802.11ac(VHT20) :	26.24 dBm 28.86 dBm 28.62 dBm 27.71 dBm
Modulation Type	DSSS/CCK : 802.11b OFDM : 802.11g, 802.11n, 802.11ac			
Number of Channels	11 Channels			
Antenna Specification	Type: Metal			
Serial number	Conducted : 7b58367d3c507ece Radiated : R3CX20KJSQR			

ANTENNA CONFIGURATIONS

1. Antenna configuration

Configurations	SISO		MIMO	
	Ant1	Ant2	CDD	SDM
802.11b	O	O	O	X
802.11g	O	O	O	X
802.11n(HT20)	O	O	O	O
802.11ac(VHT20)	O	O	O	O

Note:

- (1) O = Support, X = Not Support
- (2) SISO = Single Input Single Output
- (3) SDM = Spatial Diversity Multiplexing
- (4) CDD = Cyclic Delay Diversity

2.This device supports simultaneous transmission operation, which allows for two channels to operate independent of one another in the 2.4 GHz and 5 GHz or 6GHz Bands simultaneously on each antenna.

RSDB Scenario	2.4 GHz WiFi Ant.1	2.4 GHz WiFi Ant.2	5 GHz WiFi Ant.1	5 GHz WiFi Ant.2	6 GHz WiFi Ant.1	6 GHz WiFi Ant.2	Bluetooth Ant.1	Bluetooth Ant.2	Test Case
2.4 GHz WiFi MIMO + 6 GHz WiFi MIMO	on	on			on	on			
2.4 GHz WiFi MIMO + 5 GHz WiFi MIMO	on	on	on	on					Scenario1
Dual Bluetooth + 5 GHz WiFi MIMO			on	on			on	on	Scenario2
Dual Bluetooth + 6 GHz WiFi MIMO					on	on	on	on	Scenario3
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 5 GHz WiFi MIMO		on	on	on			on		Scenario4
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 6 GHz WiFi MIMO		on			on	on	on		

3. Directional Gain Calculation

According to KDB 662911 D01 Multiple Transmitter Output v02r01 F) 2) e) (iii), f) ii)

$$\text{Directional Gain(CDD)} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left(\sum_{k=1}^{N_{ANT}} g_{j,k} \right)^2}{N_{ANT}} \right]$$

$$\text{Directional gain(SDM)} = G_{\max} + 10 \cdot \text{LOG}(N_{ANT} / N_{SS})$$

Ant Gain (dBi)		N _{ANT} / N _{ss}	Directional Gain (dBi)	
			CDD	SDM
ANT.1	-5.28	2 / 2	-3.06	-5.28
ANT.2	-6.95			

Note

According to Ansi C63.10-2013 section 14.4.3, the directional gain is calculated using the formula, where G_N is the gain of the nth antenna and N_{ANT} is the total number of antennas used.

$$\text{Directional gain(CDD)} = 10 \cdot \log \left(\left(\frac{10^{(\text{ANT.0 Gain}/20)} + 10^{(\text{ANT.1 Gain}/20)} \right)^2 / 2 \right) \text{ dBi}$$

$$\text{Directional gain(SDM)} = G_{\max} + 10 \cdot \log(N_{ANT} / N_{SS})$$

Sample MIMO Calculation:

Ex) ANT.1 : 11.58 dBm ANT.2 : 12.08 dBm

$$\text{MIMO} = \text{ANT.1} + \text{ANT.2}$$

$$(11.58 \text{ dBm} + 12.08 \text{ dBm}) = (14.387 \text{ mW} + 16.143 \text{ mW}) = 30.53 \text{ mW} = 14.88 \text{ dBm}$$

2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05r02 dated April 02, 2019 entitled “guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10 (Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1 GHz. Above 1 GHz with 1.5 m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated March 11, 2024 (Registration Number: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5. ANTENNA REQUIREMENTS

According to FCC 47 CFR § 15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of § 15.203

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.98 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.36 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.70 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.52 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.66 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.58 (Confidence level about 95 %, $k=2$)

7. DESCRIPTION OF TESTS

7.1. Duty Cycle

Test Configuration

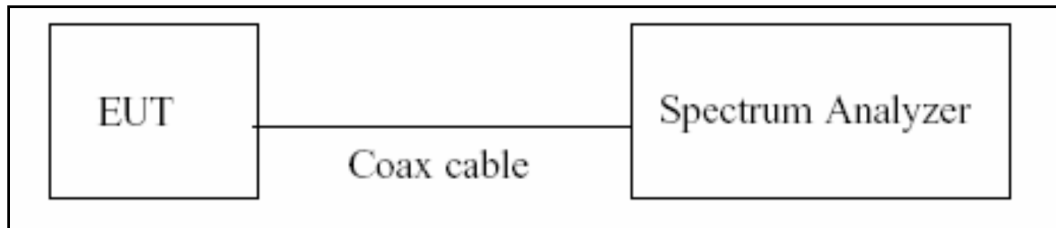

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz or 50 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Average
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on} / T_{total} and Duty Cycle Factor = $10\log(1/\text{Duty Cycle})$

7.2. 6 dB Bandwidth

Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 11.8.1 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.


Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

7.3. Output Power

Limit

The maximum permissible conducted output power is 1 Watt.

Test Configuration



Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)
: Measure the peak power of the transmitter.
- Average Power (Procedure 11.9.2.3 in ANSI 63.10-2013)
 - 1) Measure the duty cycle.
 - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 - 3) Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation


- Conducted Output Power(Peak) = Measured Value + ATT loss + Cable loss
- Conducted Output Power(Average) = Measured Value + ATT loss + Cable loss + Duty Cycle Factor

7.4. Power Spectral Density

Limit

The transmitter power density average over 1-second interval shall not be greater than 8 dBm in any 3 kHz BW.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r02, Procedure 11.10 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Set span to at least 1.5 times the OBW.
- 3) $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$.
- 4) $VBW \geq 3 \times RBW$.
- 5) Sweep = auto couple
- 6) Detector = power averaging (rms) or sample detector (when rms not available).
- 7) Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / RBW]$.
- 8) Employ trace averaging (rms) mode over a minimum of 100 traces
- 9) Use the peak marker function to determine the maximum amplitude level.
- 10) Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

- 11) if then duty factor shall be added to adjust the result if the duty cycle is less than 98 %

Sample Calculation

- Power Spectral Density = Measured Value + ATT loss + Cable loss + Duty Cycle Factor


7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

Limit

The maximum conducted (Average) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least relative to the maximum in-band peak PSD level in 100 kHz.

[Conducted > 30 dBc]

Test Configuration



Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points $\geq 2 \times$ Span/RBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

Factors for frequency

Freq(MHz)	Factor(dB)
30	20.06
100	20.14
200	20.17
300	20.21
400	20.28
500	20.28
600	20.28
700	20.28
800	20.30
900	20.31
1000	20.35
2000	20.55
2400	20.62
3000	20.67
4000	20.74
5000	20.86
5850	20.84
6000	20.83
7000	20.93
8000	20.97
9000	21.09
10000	21.18
11000	21.27
12000	21.33
13000	21.33
14000	21.40
15000	21.49
16000	21.52
17000	21.55
18000	21.63
19000	21.65
20000	21.66
21000	21.76
22000	21.82
23000	21.86
24000	21.90
25000	21.92

Note : 1. 2400 ~ 2500 MHz is fundamental frequency range.

2. Factor = Attenuator loss + Cable loss

3. Ant.1 Total Port offset = Attenuator loss + Cable loss + EUT cable loss(0.38 dB) = 21.00 dB

4. Ant.2 Total Port offset = Attenuator loss + Cable loss = 20.62 dB


7.6. Radiated Test

Limit


Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 – 0.490	$2400/F(\text{kHz})$	300
0.490 – 1.705	$24000/F(\text{kHz})$	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

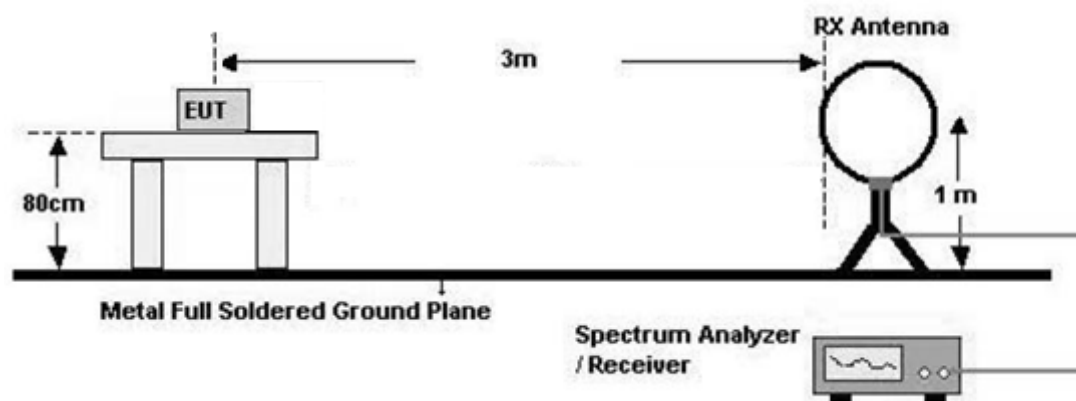

30 MHz - 1 GHz

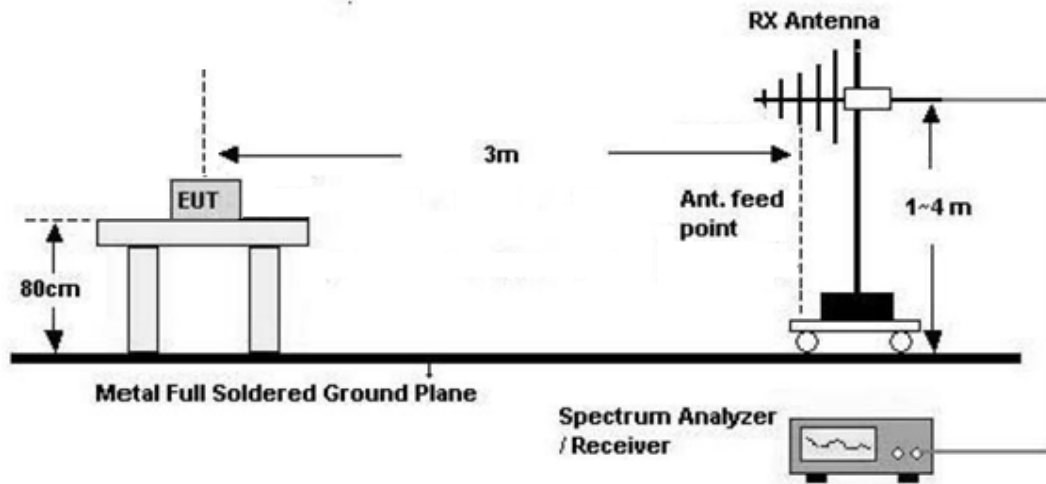

Above 1 GHz

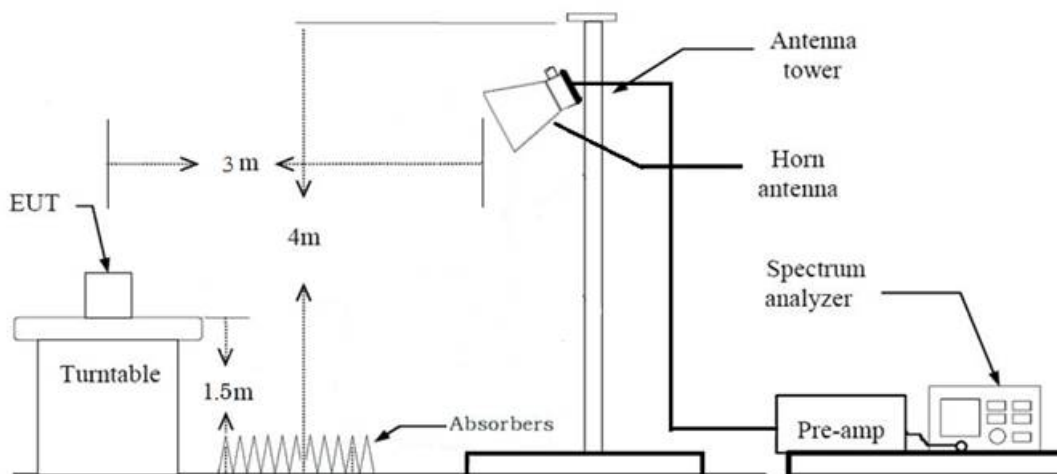

Test Procedure of Radiated spurious emissions (Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8 m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40\log(3\text{ m}/300\text{ m}) = -80\text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40\log(3\text{ m}/30\text{ m}) = -40\text{ dB}$
Measurement Distance : 3 m
8. Spectrum Setting
 - Frequency Range = 9 kHz ~ 30 MHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 9 kHz
 - VBW $\geq 3 \times$ RBW
9. Total = Measured value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions (Below 1 GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8 m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1 m to 4 m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

6. Spectrum Setting**(1) Measurement Type(Peak):**

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW $\geq 3 \times$ RBW

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

In general, (1) is used mainly

7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting (Method 8.6 in KDB 558074 v05r02, Procedure 11.12 in ANSI 63.10-2013)

(1) Measurement Type(Peak):

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW

(2) Measurement Type(Average): Duty cycle $\geq 98 \%$

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle $< 98 \%$, duty cycle variations are less than $\pm 2 \%$

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 % duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)

11. Total(Measurement Type : Peak)

= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle $\geq 98 \%$)

= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle < 98 %)

= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)
+ Duty Cycle Factor

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 2310 MHz ~ 2390 MHz / 2483.5 MHz ~ 2500 MHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW

(2) Measurement Type(Average): Duty cycle ≥ 98 %,

- Measured Frequency Range : 2310 MHz ~ 2390 MHz / 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle < 98 %, duty cycle variations are less than ± 2 %

- Measured Frequency Range : 2310 MHz ~ 2390 MHz / 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 % duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)

11. Total(Measurement Type : Peak)

= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle $\geq 98\%$)

= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle < 98 %)

= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F) + Duty Cycle

Factor

7.7. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 ^(a)	56 to 46 ^(a)
0.50 to 5	56	46
5 to 30	60	50

^(a)Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak(Final Result) = Measured Value + Correction Factor

7.8. Worst case configuration and mode

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone, Stand alone + External accessories(Earphone, etc)
 - Worstcase : Stand alone
 2. The EUT was tested in three modes(Open, Half-open, Closed), the worst case configuration results are reported.
 - Radiated Spurious Emissions Worst case : Open mode, Half-open, Closed
 - Radiated Restricted Band Edge : Open mode
 3. All Antenna of operation were investigated and the worst case results are reported
 - Antenna Operation Type : SISO, MIMO_CDD(Ant.1+Ant.2), MIMO_SDM(Ant.1+Ant.2)
 - Worstcase: MIMO_CDD(Ant.1+Ant.2)
 4. EUT Axis
 - Radiated Spurious Emissions : Y
 - Radiated Restricted Band Edge : X
 5. Duty cycle factor applies only 802.11g/n (Duty cycle < 98 %).
 6. All data rate of operation were investigated and the test results are worst case in lowest Data Rate of each mode. (Worst case : MCS0)
 - 802.11b : 1 Mbps
 - 802.11g : 6 Mbps
 - 802.11n(HT20): MCS0
 - 802.11ac(VHT20): MCS0
 6. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
 - Position : Horizontal, Vertical, Parallel to the ground plane
 8. Radiated Spurious Emission
 - All mode of operation were investigated and the worst case results are reported.
 - Worstcase :
- | EUT Mode | Mode |
|----------------|--|
| Open mode | 802.11b, 802.11g, 802.11n(HT20), 802.11ac(VHT20) |
| Half-open mode | 802.11ac(VHT20) |
| Closed mode | |
9. SM-F741U, SM-F741U1 were tested and the worst case results are reported.
(Worst case: SM-F741U)

Radiated test(RSDB)

1. Please refer to the [DTS ax], [BT], [UNII ax], [UNII 6e] Test Report.
2. SM-F741U, SM-F741U1 were tested and the worst case results are reported.
(Worst case: SM-F741U)

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone+ External accessories(Earphone,etc) + Travel Adapter
Stand alone + Travel Adapter
 - Worstcase : Stand alone + Travel Adapter
2. SM-F741U, SM-F741U1 were tested and the worst case results are reported.
(Worst case: SM-F741U)

Conducted test

1. The EUT was configured with data rate of highest power.
2. SM-F741U, SM-F741U1 were tested and the worst case results are reported.
(Worst case: SM-F741U)

8. SUMMARY TEST OF RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§ 15.247(a)(2)	> 500 kHz	Conducted	PASS
Conducted Maximum Output Power	§ 15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§ 15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge (Out of Band Emissions)	§ 15.247(d)	Conducted > 30 dBc		PASS
AC Power line Conducted Emissions	§ 15.207	cf. Section 7.7		PASS
Radiated Spurious Emissions	§ 15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§ 15.247(d), 15.205, 15.209	cf. Section 7.6		PASS


9. TEST RESULT

9.1 DUTY CYCLE


Mode	Data Rate	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11b	1 Mbps	8.816	8.922	0.988	0.052
	2 Mbps	4.407	4.511	0.977	0.102
	5.5 Mbps	1.664	1.766	0.943	0.257
	11 Mbps	0.882	0.983	0.897	0.473
802.11g	6 Mbps	1.464	1.571	0.932	0.305
	9 Mbps	0.985	1.092	0.903	0.445
	12 Mbps	0.745	0.854	0.872	0.593
	18 Mbps	0.504	0.613	0.822	0.850
	24 Mbps	0.383	0.491	0.778	1.088
	36 Mbps	0.263	0.372	0.707	1.503
	48 Mbps	0.205	0.350	0.587	2.314
	54 Mbps	0.185	0.348	0.531	2.750
802.11n (HT20)	MCS0	1.249	1.358	0.920	0.363
	MCS1	0.646	0.752	0.859	0.662
	MCS2	0.438	0.547	0.801	0.964
	MCS3	0.339	0.448	0.757	1.209
	MCS4	0.238	0.355	0.671	1.730
	MCS5	0.190	0.352	0.540	2.680
	MCS6	0.172	0.352	0.489	3.103
	MCS7	0.160	0.350	0.456	3.414
802.11ac (VHT20)	MCS0	1.251	1.360	0.920	0.362
	MCS1	0.649	0.757	0.856	0.674
	MCS2	0.446	0.552	0.807	0.929
	MCS3	0.345	0.453	0.760	1.193
	MCS4	0.243	0.380	0.640	1.938
	MCS5	0.193	0.364	0.530	2.761
	MCS6	0.177	0.355	0.500	3.010
	MCS7	0.165	0.353	0.466	3.317
	MCS8	0.147	0.352	0.417	3.796

Test Plots


802.11b (1 Mbps)

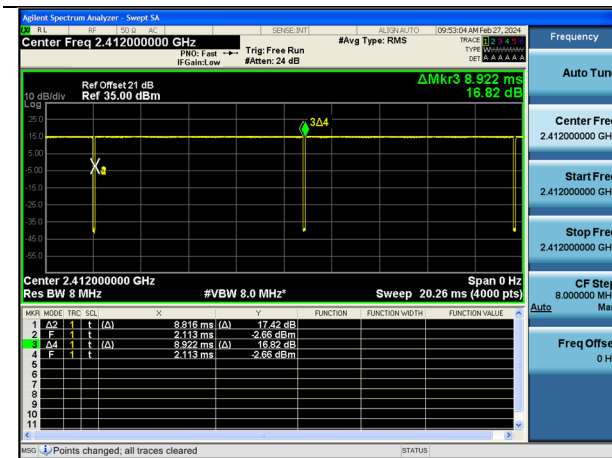


802.11g (6 Mbps)

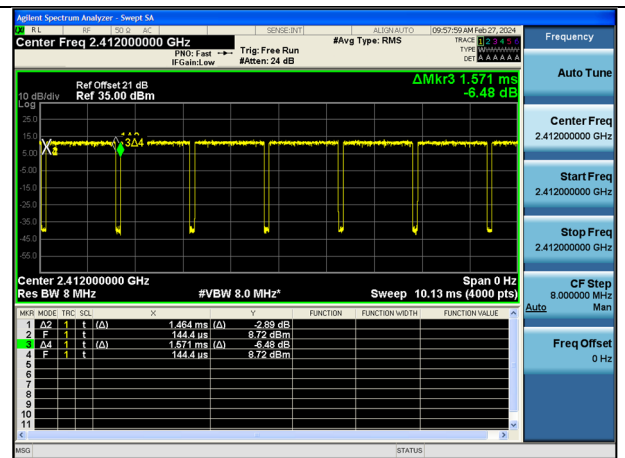

802.11n (MCS0)

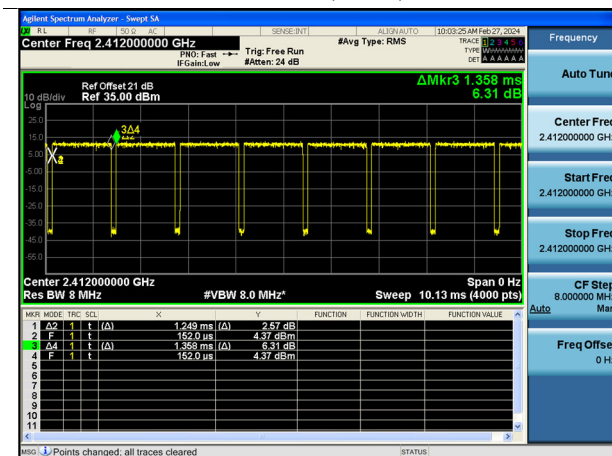

802.11ac (MCS0)

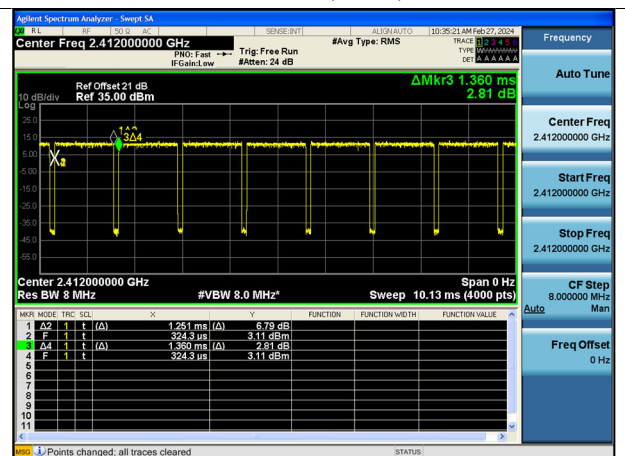

Note:

In order to simplify the report, attached plots were only the lowest data rate.

9.2 6 dB BANDWIDTH

[ANT. 1]

Mode	Frequency [MHz]	Channel No.	6 dB Bandwidth [MHz]	Minimum Bandwidth [MHz]
802.11b	2412	1	8.103	0.50
	2437	6	7.172	0.50
	2462	11	7.616	0.50
802.11g	2412	1	16.42	0.50
	2437	6	16.40	0.50
	2462	11	16.38	0.50
802.11n(HT20)	2412	1	17.66	0.50
	2437	6	17.66	0.50
	2462	11	17.64	0.50
802.11ac(VHT20)	2412	1	17.67	0.50
	2437	6	17.65	0.50
	2462	11	17.64	0.50

[ANT. 2]


Mode	Frequency [MHz]	Channel No.	6 dB Bandwidth [MHz]	Minimum Bandwidth [MHz]
802.11b	2412	1	7.609	0.50
	2437	6	8.064	0.50
	2462	11	8.026	0.50
802.11g	2412	1	16.40	0.50
	2437	6	16.39	0.50
	2462	11	16.36	0.50
802.11n(HT20)	2412	1	17.64	0.50
	2437	6	17.65	0.50
	2462	11	17.62	0.50
802.11ac(VHT20)	2412	1	17.65	0.50
	2437	6	17.64	0.50
	2462	11	17.40	0.50

Test Plots

[ANT. 1]

Note: In order to simplify the report, attached plots were only the narrowest 6 dB BW channel


802.11b-CH 6

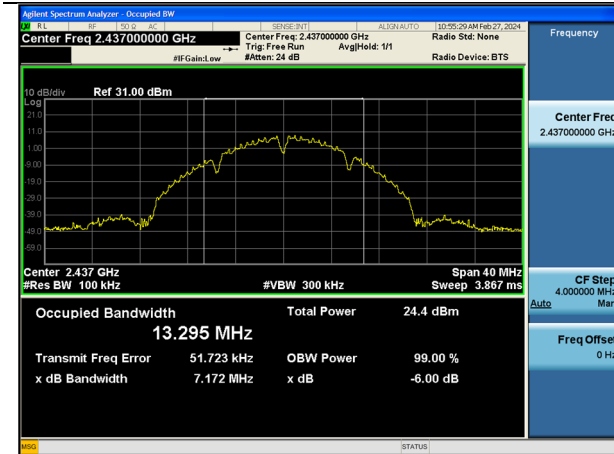


802.11g-CH 11



802.11n_HT20-CH 11

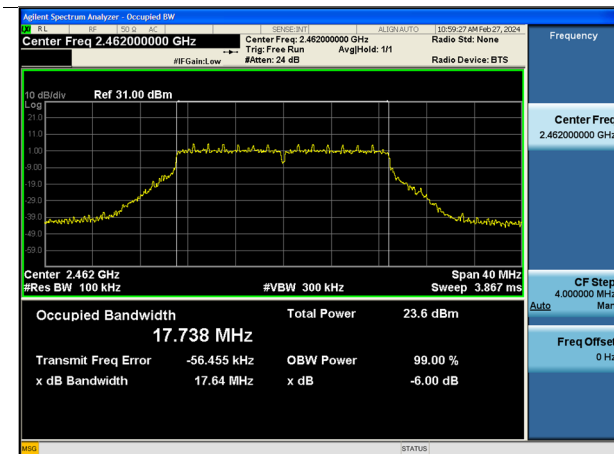


802.11ac_VHT20-CH 11

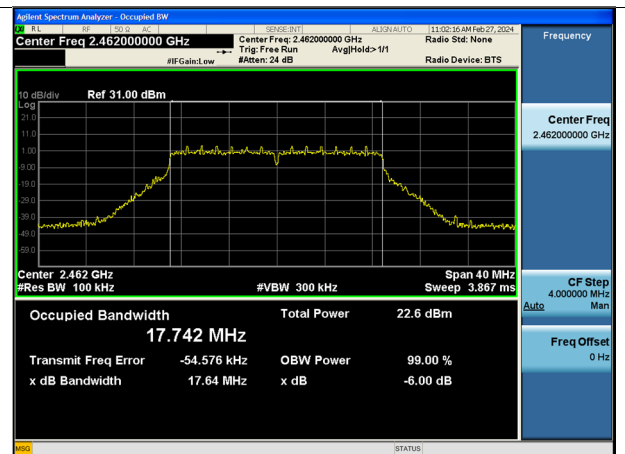


[ANT. 2]

Note: In order to simplify the report, attached plots were only the narrowest 6 dB BW channel


802.11b-CH 1

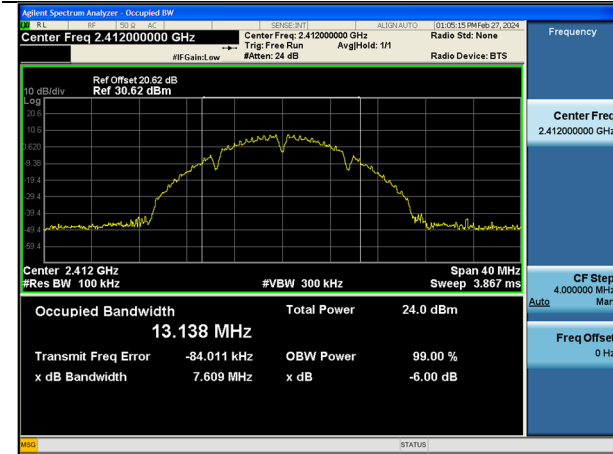


802.11g-CH 11

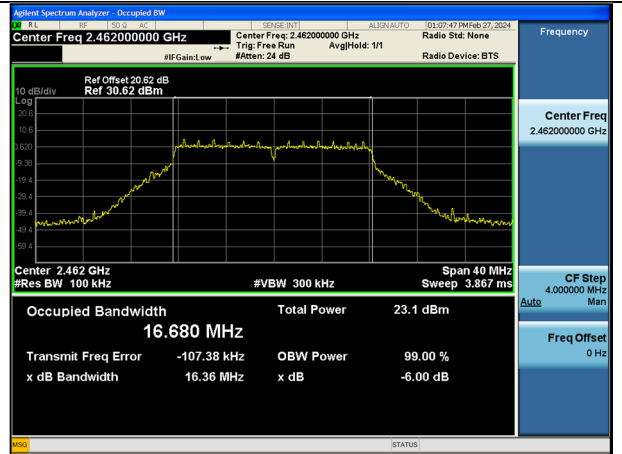

802.11n_HT20-CH 11

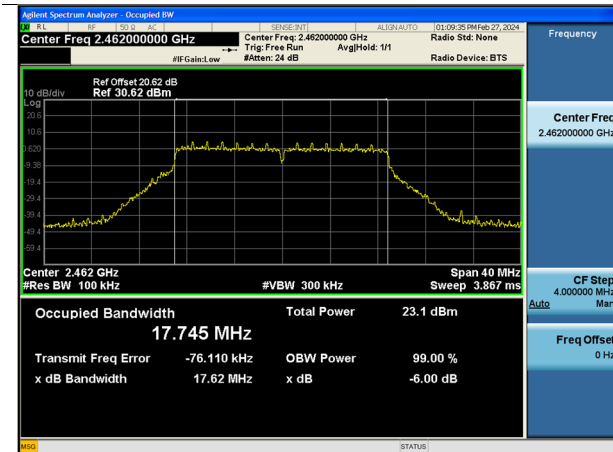

802.11ac_VHT20-CH 11

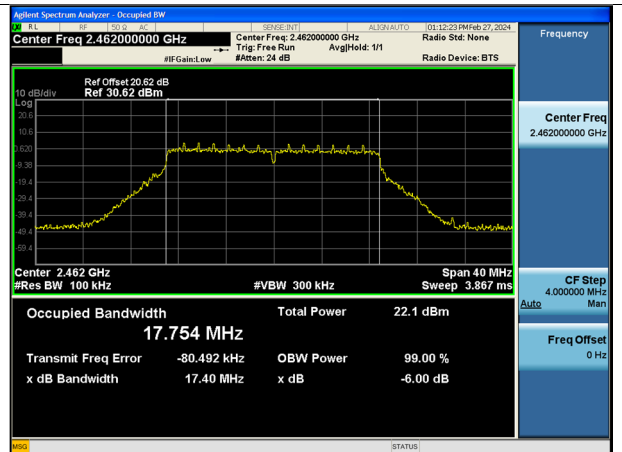

9.3 OUTPUT POWER

Note :

1. MIMO_CDD(Ant1+Ant2) Power = $10 \cdot \log((10^{(\text{Ant. 1 power} / 10)}) + (10^{(\text{Ant. 2 power} / 10)}))$

Peak Power

[MIMO_CDD(Ant1+Ant2)]

Mode	Frequency [MHz]	Channel No.	Data Rate	Conducted Peak Power [dBm]	Limit [dBm]
802.11b	2412	1	11M	26.24	30
	2437	6	11M	26.04	30
	2462	11	11M	26.17	30
802.11g	2412	1	54M	27.86	30
	2437	6	54M	28.86	30
	2462	11	54M	27.80	30
802.11n	2412	1	MCS6	27.67	30
	2437	6	MCS6	28.62	30
	2462	11	MCS6	27.54	30
802.11ac	2412	1	MCS8	27.71	30
	2437	6	MCS8	27.61	30
	2462	11	MCS8	27.67	30

Average Power

Note :

1. Total Power [dBm] = Measured Power [dBm] + Duty Cycle Factor [dB]

[MIMO_CDD(Ant1+Ant2)]

Mode	Frequency [MHz]	Channel No.	Data Rate	Conducted Average Power [dBm]			Limit [dBm]
				ANT1	ANT2	MIMO	
802.11b	2412	1	5.5M	17.99	17.18	20.62	30
	2437	6	5.5M	17.69	17.46	20.59	30
	2462	11	5.5M	17.87	17.26	20.59	30
802.11g	2412	1	18M	16.72	16.21	19.48	30
	2437	6	18M	17.53	17.34	20.45	30
	2462	11	18M	16.64	16.24	19.45	30
802.11n	2412	1	MCS6	16.78	16.23	19.52	30
	2437	6	MCS6	17.63	17.37	20.51	30
	2462	11	MCS6	16.68	16.21	19.46	30
802.11ac	2412	1	MCS4	16.98	16.30	19.67	30
	2437	6	MCS4	16.67	16.42	19.56	30
	2462	11	MCS4	16.84	16.40	19.63	30

9.4 POWER SPECTRAL DENSITY

Note :

1. MIMO_CDD(Ant1+Ant2) PSD = $10 \cdot \log((10^{(\text{Ant. 1 PSD} / 10)}) + (10^{(\text{Ant. 2 PSD} / 10)}))$
2. Total PSD = Measured Value + Duty Cycle Factor

[MIMO_CDD(Ant1+Ant2)]

BW	Frequency [MHz]	Channel No.	Data Rate	Power Spectral Density [dBm]			Limit
				ANT1	ANT2	MIMO	
802.11b	2412	1	5.5M	-2.588	-3.165	0.143	8 dBm / 3 kHz
	2437	6	5.5M	-2.809	-2.877	0.167	
	2462	11	5.5M	-2.608	-2.889	0.264	
802.11g	2412	1	18M	-7.394	-8.101	-4.723	
	2437	6	18M	-6.086	-6.859	-3.445	
	2462	11	18M	-7.570	-8.195	-4.861	
802.11n	2412	1	MCS6	-6.047	-6.293	-3.158	
	2437	6	MCS6	-4.492	-4.677	-1.574	
	2462	11	MCS6	-6.402	-6.504	-3.443	
802.11ac	2412	1	MCS4	-5.858	-6.299	-3.062	
	2437	6	MCS4	-4.637	-6.227	-2.349	
	2462	11	MCS4	-6.429	-6.873	-3.635	


Test Plots

Note :


In order to simplify the report, attached plots were only the worst case PSD channel.

[MIMO_CDD(Ant1+Ant2)]

Power Spectral Density (802.11b-CH 11)

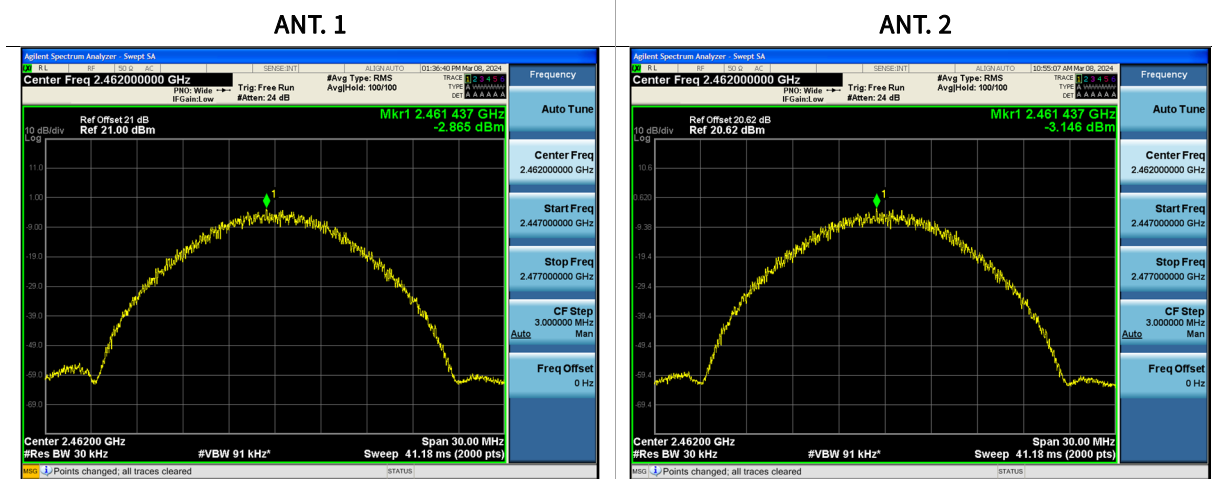


Power Spectral Density (802.11g-CH 6)

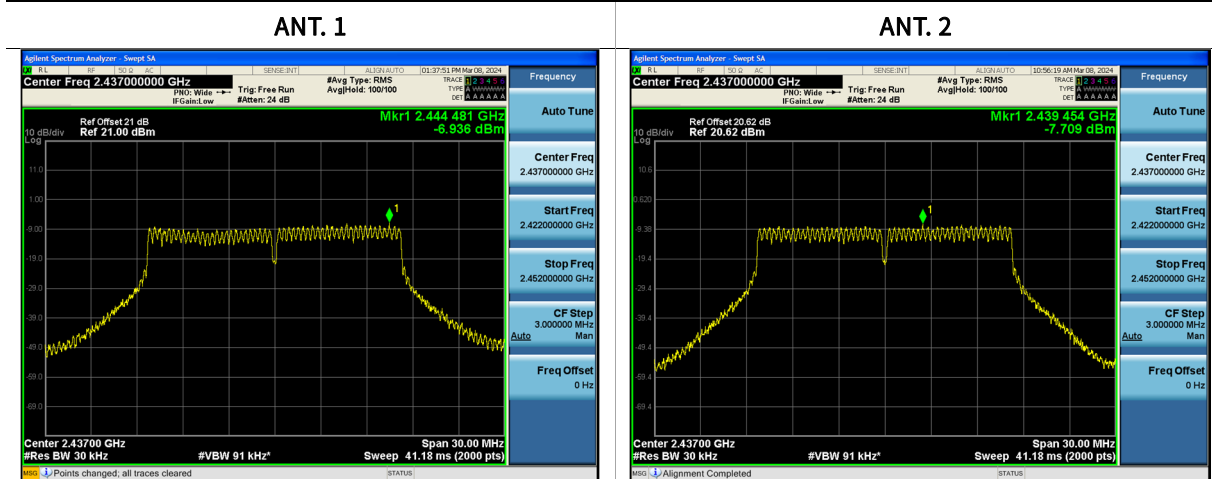


Power Spectral Density (802.11n-CH 6)

ANT. 1

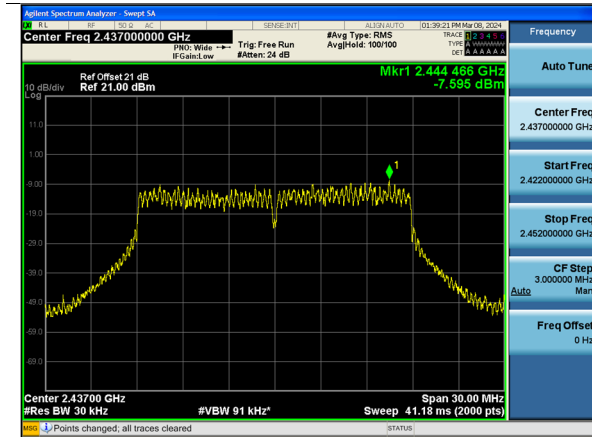


ANT. 2

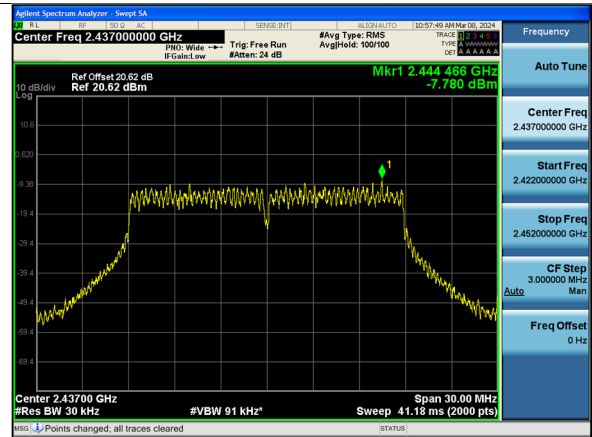


Power Spectral Density (802.11ac-CH 6)

ANT. 1

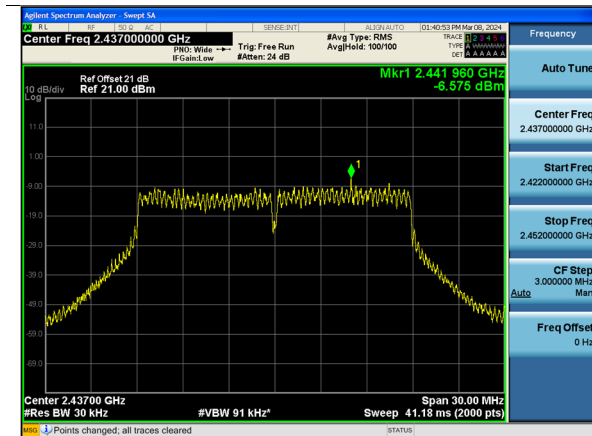

ANT. 2

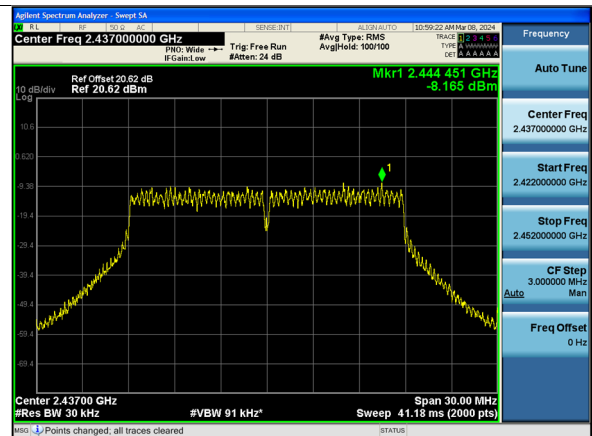

9.5 BAND EDGE / CONDUCTED SPURIOUS EMISSIONS

Band Edge

Limit : 30 dBc

[ANT. 1]


Mode	Freq. [MHz]	CH.	Measured Position	Band edge[dB]
802.11b	2 412	1	Lowest Bandedge	50.819
	2 462	11	Highest Bandedge	54.522
802.11g	2 412	1	Lowest Bandedge	34.898
	2 462	11	Highest Bandedge	49.589
802.11n	2 412	1	Lowest Bandedge	34.588
	2 462	11	Highest Bandedge	46.992
802.11ac	2 412	1	Lowest Bandedge	34.290
	2 462	11	Highest Bandedge	48.485

[ANT. 2]

Mode	Freq. [MHz]	CH.	Measured Position	Band edge[dB]
802.11b	2 412	1	Lowest Bandedge	53.803
	2 462	11	Highest Bandedge	55.205
802.11g	2 412	1	Lowest Bandedge	35.289
	2 462	11	Highest Bandedge	50.577
802.11n	2 412	1	Lowest Bandedge	35.189
	2 462	11	Highest Bandedge	49.027
802.11ac	2 412	1	Lowest Bandedge	34.366
	2 462	11	Highest Bandedge	49.368

Test Plots


Note: In order to simplify the report, attached plots were only the worst case.

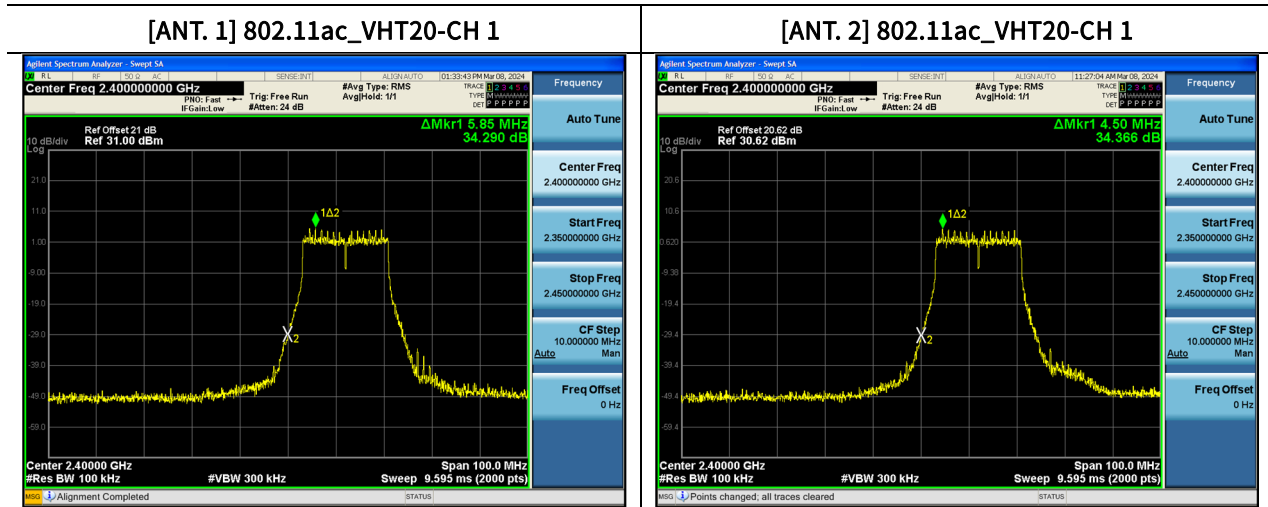


Test Plots(Conducted Spurious Emission)

Note: In order to simplify the report, attached plots were only the worst case.

[ANT. 1] 802.11ac_VHT20_Ch.11_MCS4

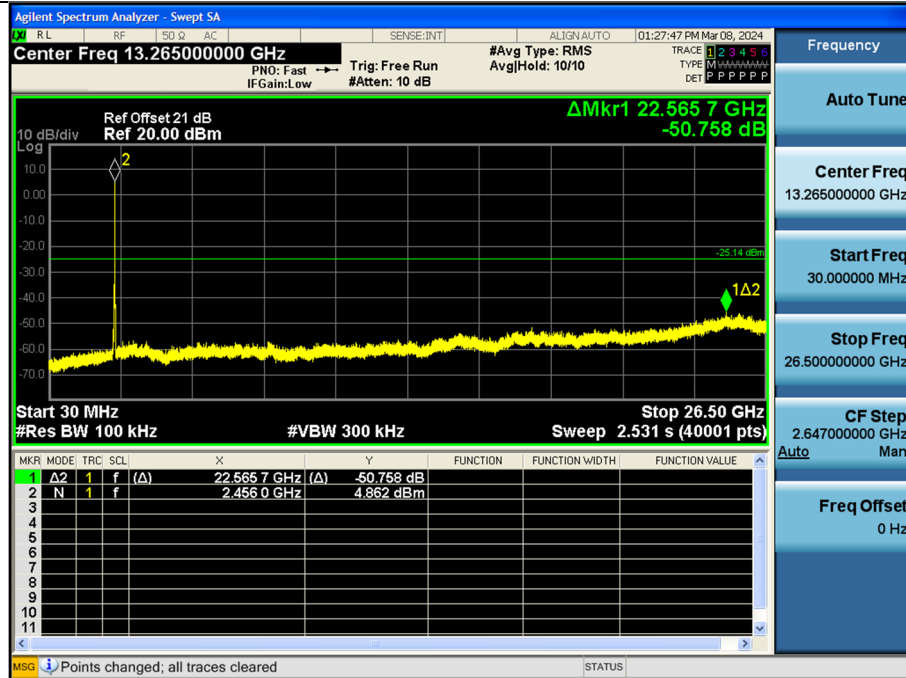

[ANT. 2] 802.11b_Ch.11_5.5 Mbps

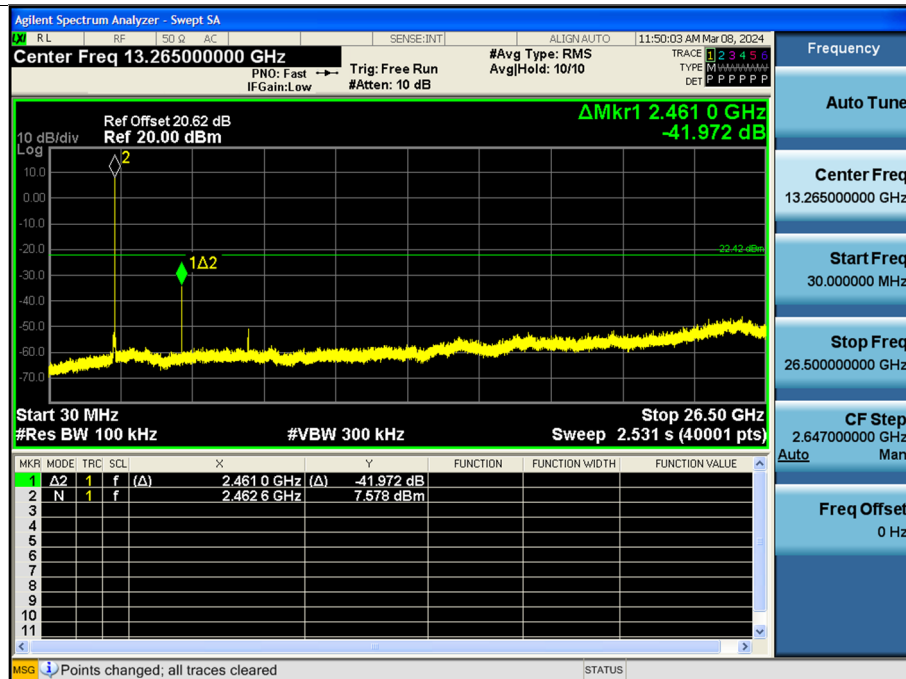

9.6 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30 MHz

Frequency	Measured Value	A.F+C.L+D.F	Ant. POL	Total	Limit	Margin
[MHz]	[dBμV/m]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]
No Critical peaks found						

Note:

1. The Measured value of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40\log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dBμV) + Distance extrapolation factor

Frequency Range : Below 1 GHz

Frequency	Measured Value	A.F+C.L	Ant. POL	Total	Limit	Margin
[MHz]	[dBμV/m]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]
No Critical peaks found						

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz

[MIMO_CDD(Ant1+Ant2)]

[Open mode]

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2412 MHz
Channel No.	01 Ch

Frequency	Measured Value	A.F+C.L- A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
4824	41.85	4.83	V	46.68	73.98	27.30	PK
4824	32.12	4.83	V	36.95	53.98	17.03	AV
7236	37.95	12.62	V	50.57	73.98	23.41	PK
7236	25.81	12.62	V	38.43	53.98	15.55	AV
4824	42.60	4.83	H	47.43	73.98	26.55	PK
4824	33.19	4.83	H	38.02	53.98	15.96	AV
7236	39.01	12.62	H	51.63	73.98	22.35	PK
7236	27.41	12.62	H	40.03	53.98	13.95	AV

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2437 MHz
Channel No.	06 Ch

Frequency	Measured Value	A.F+C.L- A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
4874	42.02	5.20	V	47.22	73.98	26.76	PK
4874	32.12	5.20	V	37.32	53.98	16.66	AV
7311	38.33	12.63	V	50.96	73.98	23.02	PK
7311	26.01	12.63	V	38.64	53.98	15.34	AV
4874	42.90	5.20	H	48.10	73.98	25.88	PK
4874	33.11	5.20	H	38.31	53.98	15.67	AV
7311	39.15	12.63	H	51.78	73.98	22.20	PK
7311	27.51	12.63	H	40.14	53.98	13.84	AV

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2462 MHz
Channel No.	11 Ch

Frequency	Measured Value	A.F+C.L- A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
4924	42.30	5.29	V	47.59	73.98	26.39	PK
4924	32.02	5.29	V	37.31	53.98	16.67	AV
7386	38.92	12.51	V	51.43	73.98	22.55	PK
7386	27.54	12.51	V	40.05	53.98	13.93	AV
4924	42.17	5.29	H	47.46	73.98	26.52	PK
4924	31.94	5.29	H	37.23	53.98	16.75	AV
7386	38.51	12.51	H	51.02	73.98	22.96	PK
7386	25.95	12.51	H	38.46	53.98	15.52	AV

Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2412 MHz
Channel No.	01 Ch

Frequency	Measured Value	Duty Cycle Factor	A.F+C.L- A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
4824	41.62	0.00	4.83	V	46.45	73.98	27.53	PK
4824	29.05	0.30	4.83	V	34.18	53.98	19.80	AV
7236	38.01	0.00	12.62	V	50.63	73.98	23.35	PK
7236	25.62	0.30	12.62	V	38.54	53.98	15.44	AV
4824	41.71	0.00	4.83	H	46.54	73.98	27.44	PK
4824	29.18	0.30	4.83	H	34.31	53.98	19.67	AV
7236	38.05	0.00	12.62	H	50.67	73.98	23.31	PK
7236	25.75	0.30	12.62	H	38.67	53.98	15.31	AV

Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2437 MHz
Channel No.	06 Ch

Frequency	Measured Value	Duty Cycle Factor	A.F+C.L- A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
4874	41.62	0.00	5.20	V	46.82	73.98	27.16	PK
4874	29.05	0.30	5.20	V	34.55	53.98	19.43	AV
7311	38.32	0.00	12.63	V	50.95	73.98	23.03	PK
7311	25.95	0.30	12.63	V	38.88	53.98	15.10	AV
4874	41.72	0.00	5.20	H	46.92	73.98	27.06	PK
4874	29.15	0.30	5.20	H	34.65	53.98	19.33	AV
7311	38.33	0.00	12.63	H	50.96	73.98	23.02	PK
7311	25.98	0.30	12.63	H	38.91	53.98	15.07	AV

Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2462 MHz
Channel No.	11 Ch

Frequency	Measured Value	Duty Cycle Factor	A.F+C.L-A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
4924	41.96	0.00	5.29	V	47.25	73.98	26.73	PK
4924	29.25	0.30	5.29	V	34.84	53.98	19.14	AV
7386	38.41	0.00	12.51	V	50.92	73.98	23.06	PK
7386	26.15	0.30	12.51	V	38.96	53.98	15.02	AV
4924	41.51	0.00	5.29	H	46.80	73.98	27.18	PK
4924	29.21	0.30	5.29	H	34.80	53.98	19.18	AV
7386	38.33	0.00	12.51	H	50.84	73.98	23.14	PK
7386	26.11	0.30	12.51	H	38.92	53.98	15.06	AV

Operation Mode: 802.11n (HT20)

Transfer MCS Index: 0

Operating Frequency: 2412 MHz

Channel No.: 01 Ch

Frequency	Measured Value	Duty Cycle Factor	A.F+C.L- A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
4824	41.59	0.00	4.83	V	46.42	73.98	27.56	PK
4824	29.09	0.36	4.83	V	34.28	53.98	19.70	AV
7236	37.95	0.00	12.62	V	50.57	73.98	23.41	PK
7236	25.69	0.36	12.62	V	38.67	53.98	15.31	AV
4824	41.66	0.00	4.83	H	46.49	73.98	27.49	PK
4824	29.15	0.36	4.83	H	34.34	53.98	19.64	AV
7236	38.06	0.00	12.62	H	50.68	73.98	23.30	PK
7236	25.79	0.36	12.62	H	38.77	53.98	15.21	AV

Operation Mode: 802.11n (HT20)

Transfer MCS Index: 0

Operating Frequency: 2437 MHz

Channel No.: 06 Ch

Frequency	Measured Value	Duty Cycle Factor	A.F+C.L- A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
4874	41.65	0.00	5.20	V	46.85	73.98	27.13	PK
4874	29.05	0.36	5.20	V	34.61	53.98	19.37	AV
7311	38.39	0.00	12.63	V	51.02	73.98	22.96	PK
7311	25.96	0.36	12.63	V	38.95	53.98	15.03	AV
4874	41.66	0.00	5.20	H	46.86	73.98	27.12	PK
4874	29.08	0.36	5.20	H	34.64	53.98	19.34	AV
7311	38.41	0.00	12.63	H	51.04	73.98	22.94	PK
7311	25.99	0.36	12.63	H	38.98	53.98	15.00	AV

Operation Mode:	802.11n (HT20)
Transfer MCS Index:	0
Operating Frequency	2462 MHz
Channel No.	11 Ch

Frequency	Measured Value	Duty Cycle Factor	A.F+C.L- A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
4924	41.62	0.00	5.29	V	46.91	73.98	27.07	PK
4924	29.35	0.36	5.29	V	35.00	53.98	18.98	AV
7386	38.51	0.00	12.51	V	51.02	73.98	22.96	PK
7386	26.16	0.36	12.51	V	39.03	53.98	14.95	AV
4924	41.51	0.00	5.29	H	46.80	73.98	27.18	PK
4924	29.25	0.36	5.29	H	34.90	53.98	19.08	AV
7386	38.45	0.00	12.51	H	50.96	73.98	23.02	PK
7386	26.15	0.36	12.51	H	39.02	53.98	14.96	AV

Operation Mode: 802.11ac (VHT20)

Transfer MCS Index: 0

Operating Frequency: 2412 MHz

Channel No.: 01 Ch

Frequency	Measured Value	Duty Cycle Factor	A.F+C.L- A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
4824	41.49	0.00	4.83	V	46.32	73.98	27.66	PK
4824	29.07	0.36	4.83	V	34.26	53.98	19.72	AV
7236	37.95	0.00	12.62	V	50.57	73.98	23.41	PK
7236	25.71	0.36	12.62	V	38.69	53.98	15.29	AV
4824	41.65	0.00	4.83	H	46.48	73.98	27.50	PK
4824	29.12	0.36	4.83	H	34.31	53.98	19.67	AV
7236	38.01	0.00	12.62	H	50.63	73.98	23.35	PK
7236	25.81	0.36	12.62	H	38.79	53.98	15.19	AV

Operation Mode: 802.11ac (VHT20)

Transfer MCS Index: 0

Operating Frequency: 2437 MHz

Channel No.: 06 Ch

Frequency	Measured Value	Duty Cycle Factor	A.F+C.L- A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
4874	41.49	0.00	5.20	V	46.69	73.98	27.29	PK
4874	29.02	0.36	5.20	V	34.58	53.98	19.40	AV
7311	38.29	0.00	12.63	V	50.92	73.98	23.06	PK
7311	25.96	0.36	12.63	V	38.95	53.98	15.03	AV
4874	41.55	0.00	5.20	H	46.75	73.98	27.23	PK
4874	29.04	0.36	5.20	H	34.60	53.98	19.38	AV
7311	38.40	0.00	12.63	H	51.03	73.98	22.95	PK
7311	25.97	0.36	12.63	H	38.96	53.98	15.02	AV

Operation Mode:	802.11ac (VHT20)
Transfer MCS Index:	0
Operating Frequency	2462 MHz
Channel No.	11 Ch

Frequency	Measured Value	Duty Cycle Factor	A.F+C.L-A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
4924	41.65	0.00	5.29	V	46.94	73.98	27.04	PK
4924	29.31	0.36	5.29	V	34.96	53.98	19.02	AV
7386	38.45	0.00	12.51	V	50.96	73.98	23.02	PK
7386	26.16	0.36	12.51	V	39.03	53.98	14.95	AV
4924	41.59	0.00	5.29	H	46.88	73.98	27.10	PK
4924	29.29	0.36	5.29	H	34.94	53.98	19.04	AV
7386	38.65	0.00	12.51	H	51.16	73.98	22.82	PK
7386	26.13	0.36	12.51	H	39.00	53.98	14.98	AV

[Half-open mode]

Operation Mode:	802.11ac (VHT20)
Transfer MCS Index:	0
Operating Frequency	2412 MHz
Channel No.	01 Ch

Frequency	Measured Value	Duty Cycle Factor	A.F+C.L- A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
4824	41.31	0.00	4.83	V	46.14	73.98	27.84	PK
4824	29.05	0.36	4.83	V	34.24	53.98	19.74	AV
7236	38.15	0.00	12.62	V	50.77	73.98	23.21	PK
7236	25.80	0.36	12.62	V	38.78	53.98	15.20	AV
4824	41.35	0.00	4.83	H	46.18	73.98	27.80	PK
4824	29.08	0.36	4.83	H	34.27	53.98	19.71	AV
7236	38.22	0.00	12.62	H	50.84	73.98	23.14	PK
7236	25.82	0.36	12.62	H	38.80	53.98	15.18	AV

Operation Mode:	802.11ac (VHT20)
Transfer MCS Index:	0
Operating Frequency	2437 MHz
Channel No.	06 Ch

Frequency	Measured Value	Duty Cycle Factor	A.F+C.L- A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
4874	41.58	0.00	5.20	V	46.78	73.98	27.20	PK
4874	29.01	0.36	5.20	V	34.57	53.98	19.41	AV
7311	38.29	0.00	12.63	V	50.92	73.98	23.06	PK
7311	26.05	0.36	12.63	V	39.04	53.98	14.94	AV
4874	41.62	0.00	5.20	H	46.82	73.98	27.16	PK
4874	29.05	0.36	5.20	H	34.61	53.98	19.37	AV
7311	38.32	0.00	12.63	H	50.95	73.98	23.03	PK
7311	26.14	0.36	12.63	H	39.13	53.98	14.85	AV

Operation Mode:	802.11ac (VHT20)
Transfer MCS Index:	0
Operating Frequency	2462 MHz
Channel No.	11 Ch

Frequency	Measured Value	Duty Cycle Factor	A.F+C.L- A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
4924	41.32	0.00	5.29	V	46.61	73.98	27.37	PK
4924	29.05	0.36	5.29	V	34.70	53.98	19.28	AV
7386	38.51	0.00	12.51	V	51.02	73.98	22.96	PK
7386	26.09	0.36	12.51	V	38.96	53.98	15.02	AV
4924	41.43	0.00	5.29	H	46.72	73.98	27.26	PK
4924	29.15	0.36	5.29	H	34.80	53.98	19.18	AV
7386	38.35	0.00	12.51	H	50.86	73.98	23.12	PK
7386	26.05	0.36	12.51	H	38.92	53.98	15.06	AV

[Closed mode]

Operation Mode:	802.11ac (VHT20)
Transfer MCS Index:	0
Operating Frequency	2412 MHz
Channel No.	01 Ch

Frequency	Measured Value	Duty Cycle Factor	A.F+C.L-A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
4824	41.39	0.00	4.83	V	46.22	73.98	27.76	PK
4824	29.01	0.36	4.83	V	34.20	53.98	19.78	AV
7236	38.41	0.00	12.62	V	51.03	73.98	22.95	PK
7236	25.71	0.36	12.62	V	38.69	53.98	15.29	AV
4824	41.44	0.00	4.83	H	46.27	73.98	27.71	PK
4824	29.05	0.36	4.83	H	34.24	53.98	19.74	AV
7236	38.62	0.00	12.62	H	51.24	73.98	22.74	PK
7236	25.78	0.36	12.62	H	38.76	53.98	15.22	AV

Operation Mode:	802.11ac (VHT20)
Transfer MCS Index:	0
Operating Frequency	2437 MHz
Channel No.	06 Ch

Frequency	Measured Value	Duty Cycle Factor	A.F+C.L-A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
4874	41.44	0.00	5.20	V	46.64	73.98	27.34	PK
4874	29.07	0.36	5.20	V	34.63	53.98	19.35	AV
7311	38.55	0.00	12.63	V	51.18	73.98	22.80	PK
7311	26.01	0.36	12.63	V	39.00	53.98	14.98	AV
4874	41.40	0.00	5.20	H	46.60	73.98	27.38	PK
4874	29.03	0.36	5.20	H	34.59	53.98	19.39	AV
7311	38.62	0.00	12.63	H	51.25	73.98	22.73	PK
7311	26.05	0.36	12.63	H	39.04	53.98	14.94	AV

Operation Mode:	802.11ac (VHT20)
Transfer MCS Index:	0
Operating Frequency	2462 MHz
Channel No.	11 Ch


Frequency	Measured Value	Duty Cycle Factor	A.F+C.L-A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
4924	42.30	0.00	5.29	V	47.59	73.98	26.39	PK
4924	29.75	0.36	5.29	V	35.40	53.98	18.58	AV
7386	38.29	0.00	12.51	V	50.80	73.98	23.18	PK
7386	26.01	0.36	12.51	V	38.88	53.98	15.10	AV
4924	42.32	0.00	5.29	H	47.61	73.98	26.37	PK
4924	29.78	0.36	5.29	H	35.43	53.98	18.55	AV
7386	38.39	0.00	12.51	H	50.90	73.98	23.08	PK
7386	26.04	0.36	12.51	H	38.91	53.98	15.07	AV

Test Plots


Note: In order to simplify the report, Plot of worst case are only reported.

[MIMO_CDD(Ant1+Ant2)]

Radiated Spurious Emissions plot – Average Result (802.11b_1 Mbps, Ch.6 3rd Harmonic, Y-H)

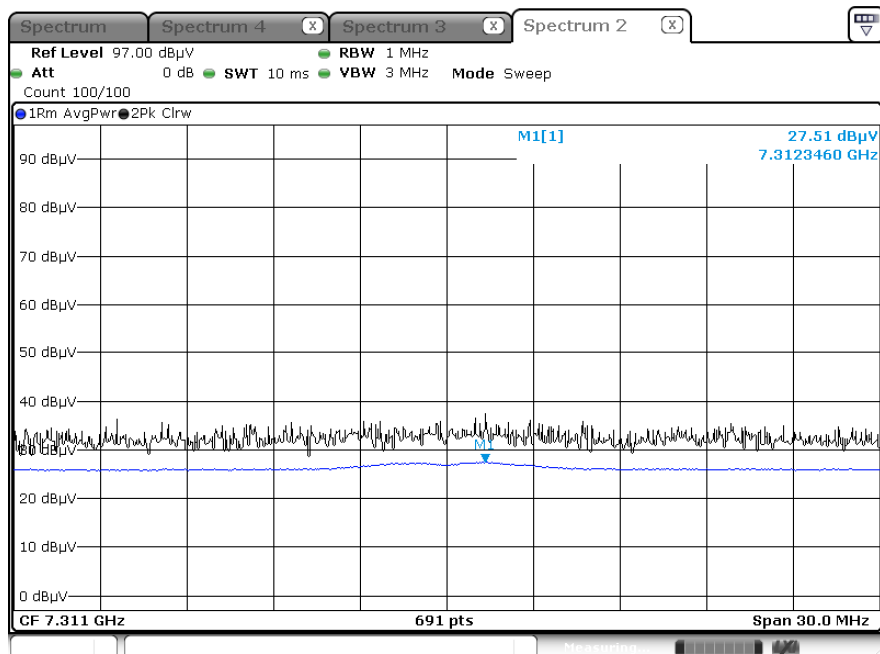

Radiated Spurious Emissions plot – Peak Result (802.11b_1 Mbps, Ch.6 3rd Harmonic, Y-H)

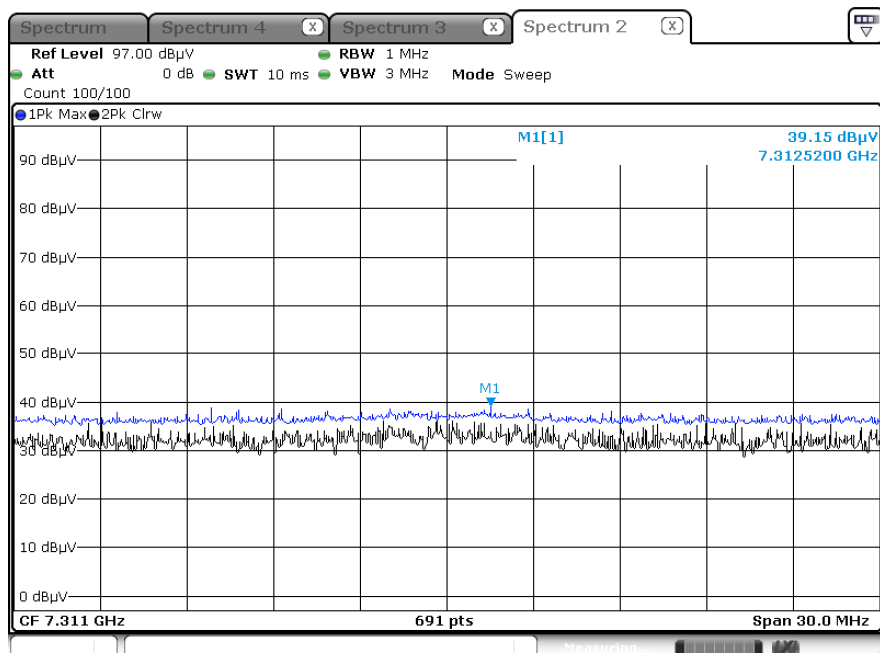

9.7 RADIATED RESTRICTED BAND EDGES

[MIMO_CDD(Ant1+Ant2)]

[Open mode]

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2412 MHz, 2462 MHz
Channel No.	01 Ch, 11 Ch

Frequency	Measured Value	A.F.+C.L+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
2390.0	19.22	35.41	H	54.63	73.98	19.35	PK
2390.0	8.95	35.41	H	44.36	53.98	9.62	AV
2390.0	19.05	35.41	V	54.46	73.98	19.52	PK
2390.0	8.81	35.41	V	44.22	53.98	9.76	AV
2483.5	20.25	35.99	H	56.24	73.98	17.74	PK
2483.5	9.12	35.99	H	45.11	53.98	8.87	AV
2483.5	20.12	35.99	V	56.11	73.98	17.87	PK
2483.5	9.02	35.99	V	45.01	53.98	8.97	AV

Operation Mode: 802.11g
Transfer Rate: 6 Mbps
Operating Frequency: 2412 MHz, 2462 MHz
Channel No.: 01 Ch, 11 Ch

Frequency	Measured Value	Duty Cycle Factor	A.F.+C.L+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
# 2390	23.94	0.00	35.41	H	59.35	73.98	14.63	PK
# 2390	13.46	0.30	35.41	H	49.17	53.98	4.81	AV
# 2390	23.71	0.00	35.41	V	59.12	73.98	14.86	PK
# 2390	13.12	0.30	35.41	V	48.83	53.98	5.15	AV
# 2483.5	25.52	0.00	35.99	H	61.51	73.98	12.47	PK
# 2483.5	13.40	0.30	35.99	H	49.69	53.98	4.29	AV
# 2483.5	25.02	0.00	35.99	V	61.01	73.98	12.97	PK
# 2483.5	13.01	0.30	35.99	V	49.30	53.98	4.68	AV

Note : integration method Used (ANSI C63.10 Section11.13.3)

Operation Mode: 802.11n (HT20)
Transfer MCS Index: 0
Operating Frequency: 2412 MHz, 2462 MHz
Channel No.: 01 Ch, 11 Ch

Frequency	Measured Value	Duty Cycle Factor	A.F.+C.L+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
# 2390	23.15	0.00	35.41	H	58.56	73.98	15.42	PK
# 2390	13.19	0.36	35.41	H	48.96	53.98	5.02	AV
# 2390	22.95	0.00	35.41	V	58.36	73.98	15.62	PK
# 2390	12.85	0.36	35.41	V	48.62	53.98	5.36	AV
# 2483.5	23.31	0.00	35.99	H	59.30	73.98	14.68	PK
# 2483.5	13.24	0.36	35.99	H	49.59	53.98	4.39	AV
# 2483.5	23.02	0.00	35.99	V	59.01	73.98	14.97	PK
# 2483.5	12.51	0.36	35.99	V	48.86	53.98	5.12	AV

Note : integration method Used (ANSI C63.10 Section11.13.3)

Operation Mode:	802.11ac (VHT20)
Transfer MCS Index:	0
Operating Frequency	2412 MHz, 2462 MHz
Channel No.	01 Ch, 11 Ch

Frequency	Measured Value	Duty Cycle Factor	A.F.+C.L+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
# 2390	27.17	0.00	35.41	H	62.58	73.98	11.40	PK
# 2390	14.17	0.36	35.41	H	49.94	53.98	4.04	AV
# 2390	26.95	0.00	35.41	V	62.36	73.98	11.62	PK
# 2390	13.89	0.36	35.41	V	49.66	53.98	4.32	AV
# 2483.5	25.05	0.00	35.99	H	61.04	73.98	12.94	PK
# 2483.5	15.02	0.36	35.99	H	51.37	53.98	2.61	AV
# 2483.5	24.02	0.00	35.99	V	60.01	73.98	13.97	PK
# 2483.5	13.95	0.36	35.99	V	50.30	53.98	3.68	AV

Note : integration method Used (ANSI C63.10 Section11.13.3)

Test Plots


Note:

In order to simplify the report, Plots of worst case are only reported.

[MIMO_CDD(Ant1+Ant2)]


Radiated Restricted Band Edges plot – Average Result (802.11ac (VHT20)_ MCS0, Ch.11, X-H)

(Integration method Used)

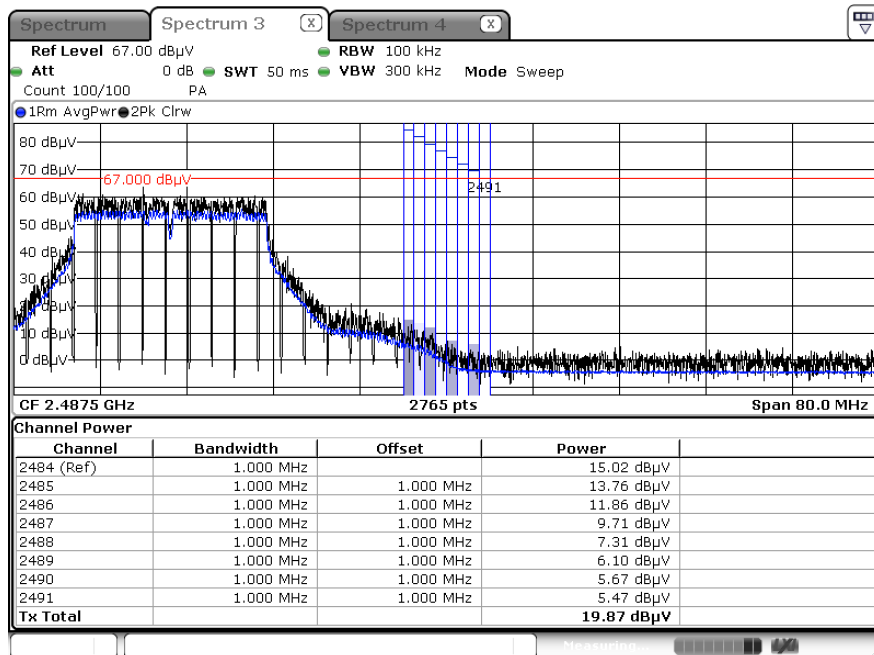

Radiated Restricted Band Edges plot – Peak Result (802.11ac (VHT20)_ MCS0, Ch.11, X-H)

(Integration method Used)

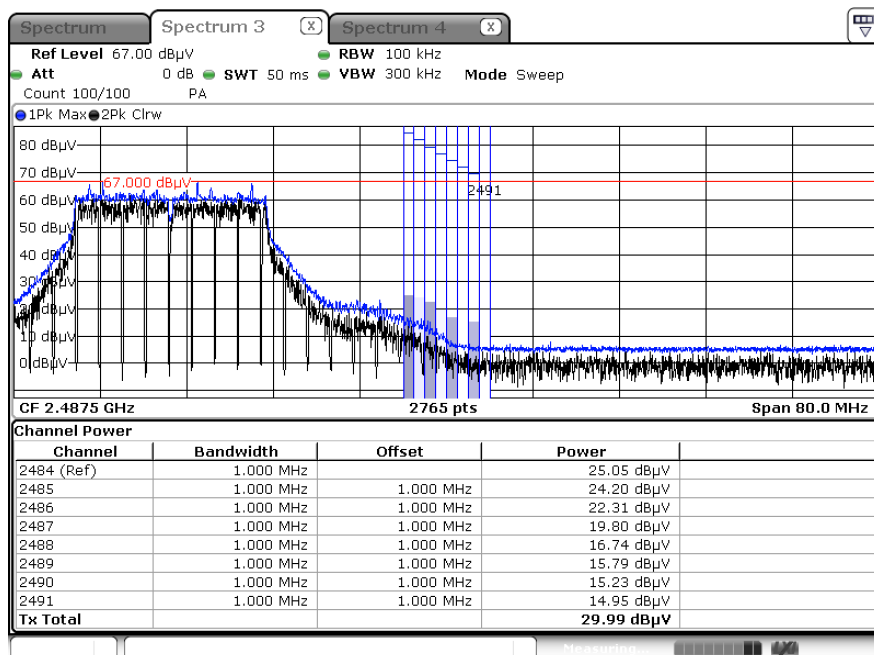

9.8 POWERLINE CONDUCTED EMISSIONS

Conducted Emissions

Test


1 / 2

Test Report

Common Information

EUT : SM-F741U
Operating Conditions : 2.4G WLAN Mode
Comment :

Full Spectrum

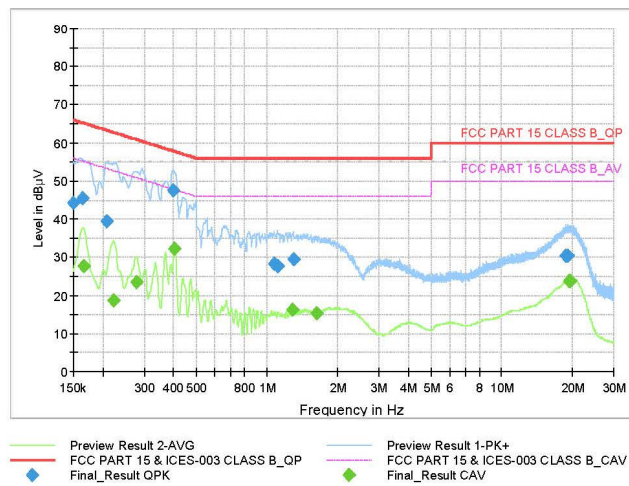

Final Result QPK

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.1500	44.39	66.00	21.61	9.000	N	9.6
0.1635	45.58	65.28	19.71	9.000	N	9.6
0.2085	39.47	63.27	23.80	9.000	N	9.6
0.3998	47.50	57.86	10.36	9.000	L1	9.6
1.0715	28.29	56.00	27.71	9.000	N	9.7
1.1120	27.75	56.00	28.25	9.000	N	9.7
1.2965	29.58	56.00	26.42	9.000	N	9.7
18.6845	30.40	60.00	29.60	9.000	L1	10.3
19.0468	30.41	60.00	29.59	9.000	L1	10.4

2024-03-07

오전 11:16:16

Test

2 / 2

Final Result CAV

Frequency (MHz)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.1658	27.74	55.17	27.43	9.000	N	9.6
0.2220	18.70	52.74	34.05	9.000	N	9.6
0.2783	23.34	50.87	27.53	9.000	N	9.6
0.4043	32.22	47.77	15.55	9.000	L1	9.6
1.2875	16.16	46.00	29.84	9.000	L1	9.7
1.6228	15.22	46.00	30.78	9.000	L1	9.7
19.3168	23.74	50.00	26.26	9.000	L1	10.4
19.3280	23.83	50.00	26.17	9.000	L1	10.4
19.4968	23.77	50.00	26.23	9.000	L1	10.4

2024-03-07

오전 11:16:16

9.9 CONFIRMATION OF GEO-LOCATION MECHANISM


The device uses MCC information obtained from the public cellular carrier to determine that it is operating outside the U.S. and then enable channels 12 and 13 only if a non-US MCC that supports channel 12 and 13 is confirmed.

The device uses a geo-location mechanism based on the Country in order to only enable certain WLAN DTS bands when the device is not in the USA.

WLAN	Country code = US	Country code = KR(Korea)
CH 12	Did not connect	Connected
CH 13	Did not connect	Connected

The verification tests confirmed the operational of the geo-location mechanism.

Test Setup


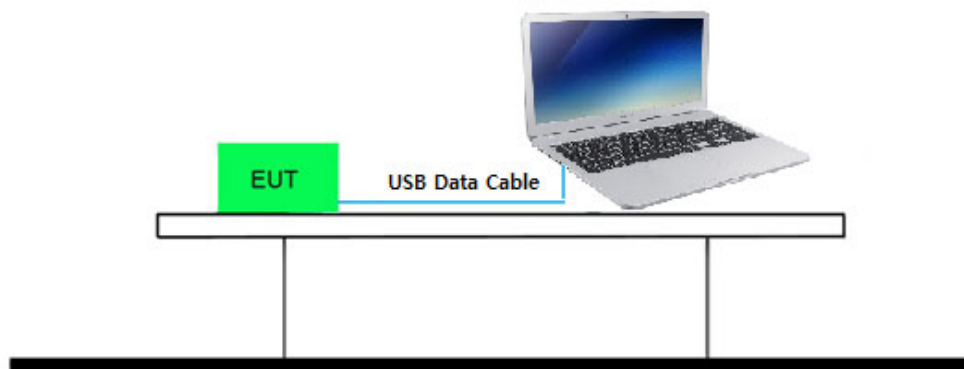


Test Procedure

In case of Country code

1. Open Command Prompt.
2. Setting the country for product
3. At the Command Prompt, enter the command.
>adb root
>adb remount
>adb shell cmd wifi get-country-code
>adb shell iw phy phy0 channels

Setting the country for product

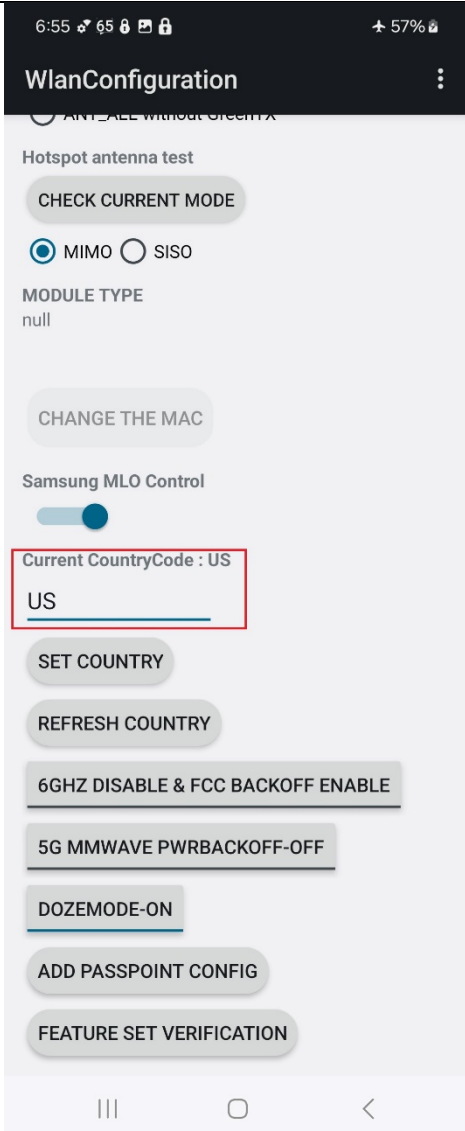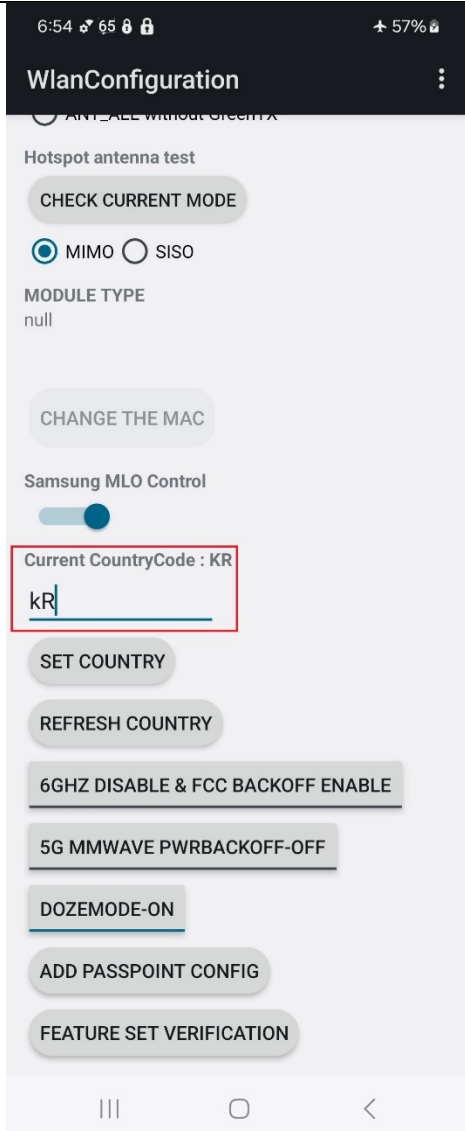Country code = US	Country code = KR(Korea)
 <p>The screenshot shows the 'WlanConfiguration' app interface for the US. The 'Current CountryCode' field is highlighted with a red box and contains the text 'US'. Other visible options include 'CHECK CURRENT MODE', 'MIMO' (selected), 'SISO', 'CHANGE THE MAC', 'Samsung MLO Control' (toggle), 'SET COUNTRY', 'REFRESH COUNTRY', '6GHZ DISABLE & FCC BACKOFF ENABLE', '5G MMWAVE PWRBACKOFF-OFF', 'DOZEMODE-ON', 'ADD PASSPOINT CONFIG', and 'FEATURE SET VERIFICATION'.</p>	 <p>The screenshot shows the 'WlanConfiguration' app interface for KR(Korea). The 'Current CountryCode' field is highlighted with a red box and contains the text 'kR'. Other visible options are identical to the US screenshot.</p>

Country code = US	Country code = KR (Korea)
<pre> C:\Wadb>adb shell cmd wifi get-country-code Wifi Country Code = US C:\Wadb>adb shell iw phy phy0 channels Band 1: * 2412 MHz [1] Maximum TX power: 30.0 dBm Channel widths: 20MHz HT40+ * 2417 MHz [2] Maximum TX power: 30.0 dBm Channel widths: 20MHz HT40+ * 2422 MHz [3] Maximum TX power: 30.0 dBm Channel widths: 20MHz HT40+ * 2427 MHz [4] Maximum TX power: 30.0 dBm Channel widths: 20MHz HT40+ * 2432 MHz [5] Maximum TX power: 30.0 dBm Channel widths: 20MHz HT40- HT40+ * 2437 MHz [6] Maximum TX power: 30.0 dBm Channel widths: 20MHz HT40- HT40+ * 2442 MHz [7] Maximum TX power: 30.0 dBm Channel widths: 20MHz HT40- HT40+ * 2447 MHz [8] Maximum TX power: 30.0 dBm Channel widths: 20MHz HT40- * 2452 MHz [9] Maximum TX power: 30.0 dBm Channel widths: 20MHz HT40- * 2457 MHz [10] Maximum TX power: 30.0 dBm Channel widths: 20MHz HT40- * 2462 MHz [11] Maximum TX power: 30.0 dBm Channel widths: 20MHz HT40- * 2467 MHz [12] (disabled) * 2472 MHz [13] (disabled) </pre>	<pre> C:\Wadb>adb shell cmd wifi get-country-code Wifi Country Code = KR C:\Wadb>adb shell iw phy phy0 channels Band 1: * 2412 MHz [1] Maximum TX power: 23.0 dBm Channel widths: 20MHz HT40+ * 2417 MHz [2] Maximum TX power: 23.0 dBm Channel widths: 20MHz HT40+ * 2422 MHz [3] Maximum TX power: 23.0 dBm Channel widths: 20MHz HT40+ * 2427 MHz [4] Maximum TX power: 23.0 dBm Channel widths: 20MHz HT40+ * 2432 MHz [5] Maximum TX power: 23.0 dBm Channel widths: 20MHz HT40- HT40+ * 2437 MHz [6] Maximum TX power: 23.0 dBm Channel widths: 20MHz HT40- HT40+ * 2442 MHz [7] Maximum TX power: 23.0 dBm Channel widths: 20MHz HT40- HT40+ * 2447 MHz [8] Maximum TX power: 23.0 dBm Channel widths: 20MHz HT40- HT40+ * 2452 MHz [9] Maximum TX power: 23.0 dBm Channel widths: 20MHz HT40- * 2457 MHz [10] Maximum TX power: 23.0 dBm Channel widths: 20MHz HT40- * 2462 MHz [11] Maximum TX power: 23.0 dBm Channel widths: 20MHz HT40- * 2467 MHz [12] Maximum TX power: 23.0 dBm Channel widths: 20MHz HT40- * 2472 MHz [13] Maximum TX power: 23.0 dBm Channel widths: 20MHz HT40- </pre>

10. LIST OF TEST EQUIPMENT

Conducted Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
LISN	ENV216	Rohde & Schwarz	102245	08/02/2024	Annual
EMI Test Receiver	ESR	Rohde & Schwarz	101910	05/26/2024	Annual
Temperature Chamber	SU-642	ESPEC	0093008124	02/19/2025	Annual
Signal Analyzer	N9030A	Agilent	MY49432108	02/20/2025	Annual
Power Measurement Set	OSP 120	Rohde & Schwarz	101231	06/09/2024	Annual
Power Meter	N1911A	Agilent	MY45100523	02/28/2025	Annual
Power Sensor	N1921A	Agilent	MY57820067	02/22/2025	Annual
Directional Coupler	87300B	Agilent	3116A03621	10/30/2024	Annual
Power Splitter	11667B	Hewlett Packard	10545	02/06/2025	Annual
DC Power Supply	E3632A	Agilent	MY40004427	08/25/2024	Annual
Attenuator(10 dB)(DC-26.5 GHz)	8493C	HP	07560	06/12/2024	Annual
Attenuator(10 dB)(DC-26.5 GHz)	8493C	HP	08285	06/02/2024	Annual
Attenuator(20 dB)	18N-20dB	Rohde & Schwarz	8	02/20/2025	Annual
Software	EMC32	Rohde & Schwarz	N/A	N/A	N/A
FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	HCT CO., LTD.	N/A	N/A	N/A
Bluetooth Tester	CBT	Rohde & Schwarz	100752	01/03/2025	Annual

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Controller	CO3000	Innco system	CO3000-4p	N/A	N/A
Antenna Position Tower	MA4640/800-XP-EP	Innco system	S1AM	08/03/2025	Biennial
Turn Table	DS2000-S-1t	Innco system	DS2000/572/54610422/P	N/A	N/A
Amp & Filter Bank Switch Controller	FBSM-01B	T&M system	TM19050002	N/A	N/A
Loop Antenna	1513	Schwarzbeck	1513-333	03/07/2026	Biennial
Hybrid Antenna	VULB 9168	Schwarzbeck	9168-0895	08/16/2024	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	9120D-1300	01/03/2026	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	9120D-2296	05/18/2024	Biennial
Horn Antenna(15 GHz ~ 40 GHz)	BBHA9170	Schwarzbeck	BBHA9170342	09/29/2024	Biennial
Spectrum Analyzer	FSV(10 Hz ~ 40 GHz)	Rohde & Schwarz	101055	05/12/2024	Annual
Band Reject Filter	WRCJV2400/2483.5-2370/2520-60/12SS	Wainwright Instruments	2	01/02/2025	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	5	06/12/2024	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	6	06/12/2024	Annual
High Pass Filter(7 GHz ~ 18 GHz)	WHKX10-7150-8000-18000-50SS	Wainwright Instruments	1	02/28/2025	Annual
Power Amplifier	CBL18265035	CERNEX	22966	11/17/2024	Annual
Power Amplifier	CBL26405040	CERNEX	25956	02/26/2025	Annual
Bluetooth Tester	TC-3000C	TESCOM	3000C000175	03/19/2025	Annual
RF Switching System	FMSR-05B (HPF(3~18GHz) + LNA1(1~18GHz))	T&M system	S1L1	01/02/2025	Annual
RF Switching System	FMSR -05B (ATT(10dB) + LNA1(1~18GHz))	T&M system	S1L2	01/02/2025	Annual
RF Switching System	FMSR -05B (ATT(3dB) + LNA1(1~18GHz))	T&M system	S1L3	01/02/2025	Annual
RF Switching System	FMSR -05B (LNA1(1~18GHz))	T&M system	S1L4	01/02/2025	Annual
RF Switching System	FMSR -05B (HPF(7~18GHz) + LNA2(6~18GHz))	T&M system	S1L5	01/02/2025	Annual
RF Switching System	FMSR -05B (Thru(30MHz ~ 18GHz))	T&M system	S1L6	01/02/2025	Annual

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

11. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2404-FC042-P