



WIFI-2.4G

Design Specifications	Typical
Antenna Type*	Patch
Working Frequency	2.4GHz
Antenna Gain	1.5 dBi
Impedance	50 ohm
Overall Dimensions*	12.5mm * 4.23mm
Manufacturer's company name	Shenzhen keshijia electronics co.,ltd
Manufacturer Address	First floor, Building D, Zhongxi Industrial Park, Shajing Street, Bao'an District, Shenzhen

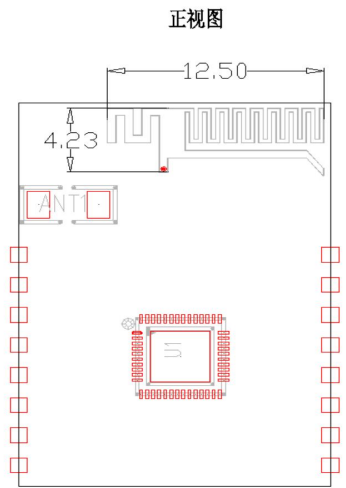


Passive Test For 2.4-2.5		
Freq (MHz)	Effi (%)	Gain (dBi)
2400	40.71	0.79
2410	44.12	1.1
2420	45.42	1.17
2430	47.86	1.26
2440	53.38	1.45
2450	49.86	0.74
2460	52.15	1.5
2470	50.25	1.43
2480	46.19	0.82
2490	45.48	0.61
2500	40.03	-0.16


2400.000MHz

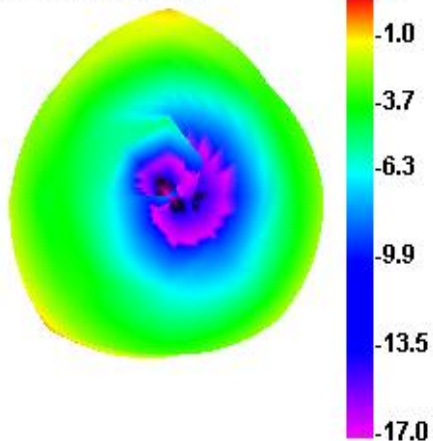


2400.000MHz H

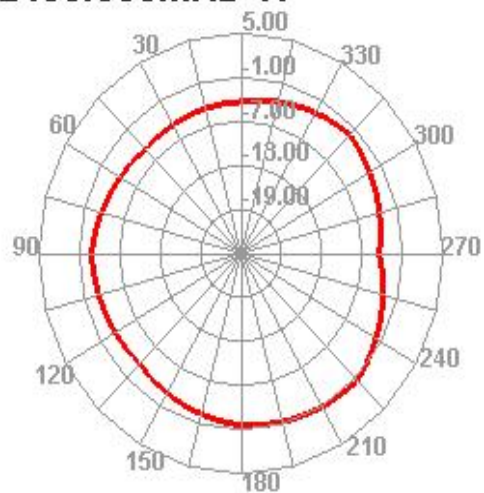


2400.000MHz E1

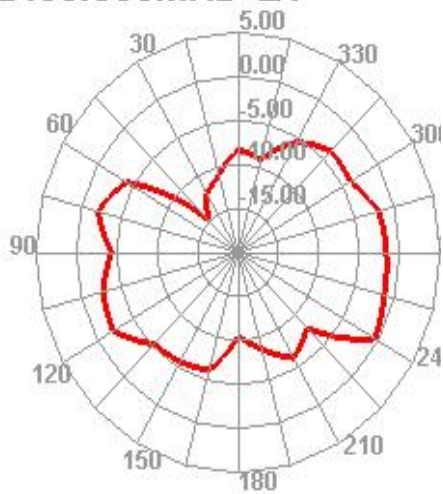




2400.000MHz E2

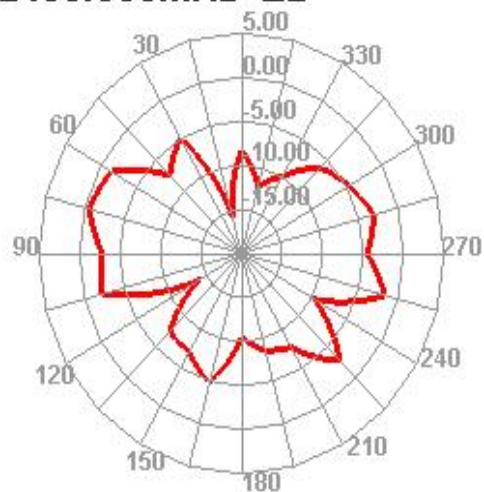


2450.000MHz

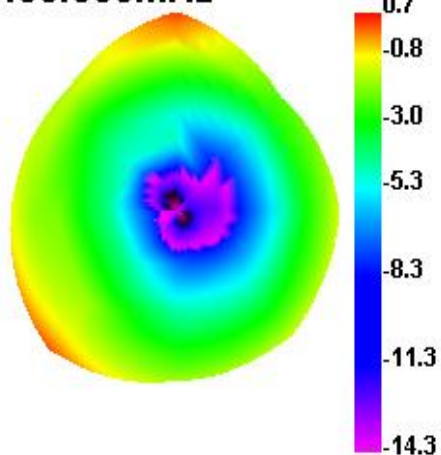


2450.000MHz H

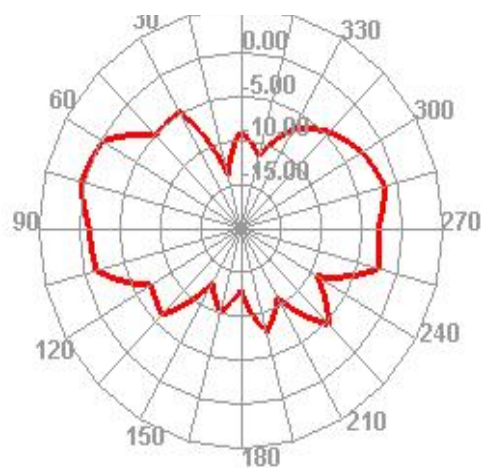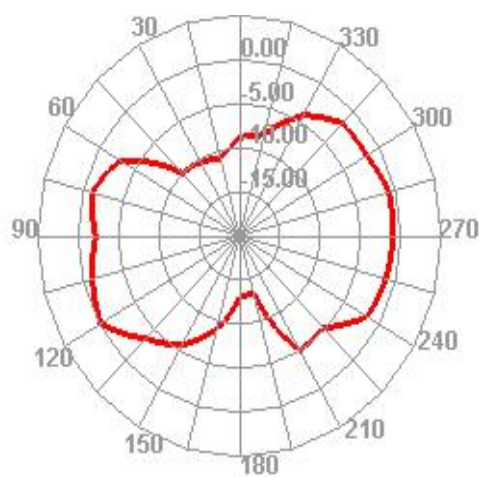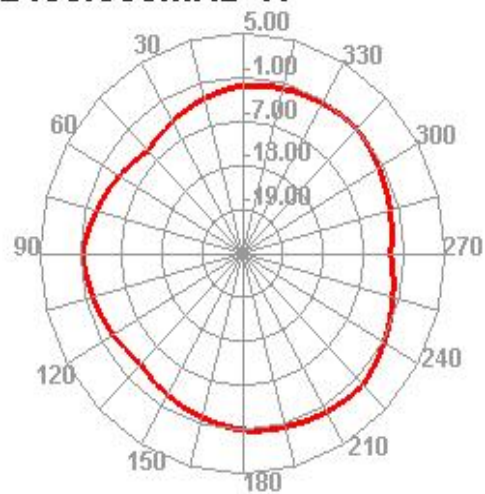


2500.000MHz

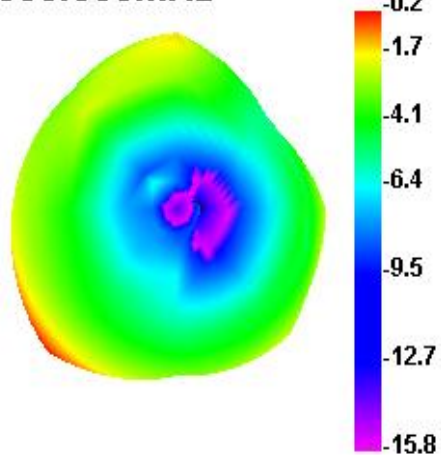


2500.000MHz H

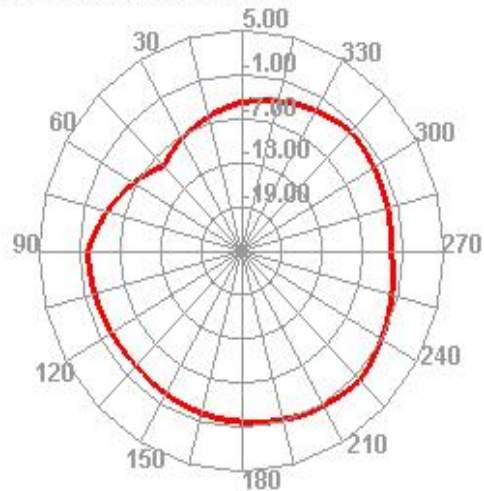

2500.000MHz E1

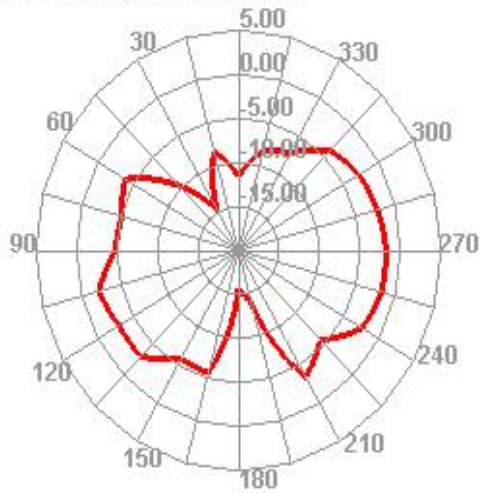


2500.000MHz E2

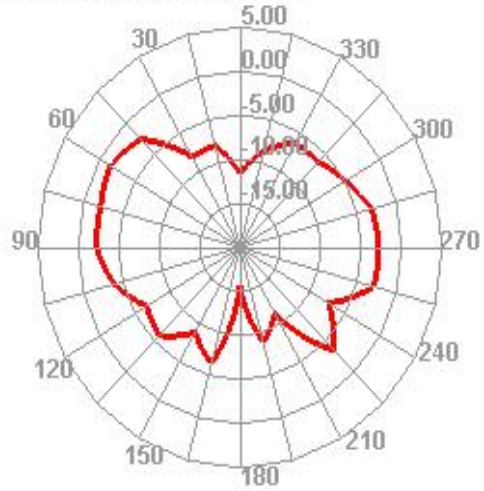

Wifi-5G

Design Specifications	Typical
Antenna Type*	Patch
Working Frequency	5GHz
Antenna Gain	1.5 dBi
Impedance	50 ohm
Overall Dimensions*	12.5mm * 4.23mm
Manufacturer's company name	Shenzhen keshijia electronics co.,ltd
Manufacturer Address	First floor, Building D, Zhongxi Industrial Park, Shajing Street, Bao'an District, Shenzhen


正视图

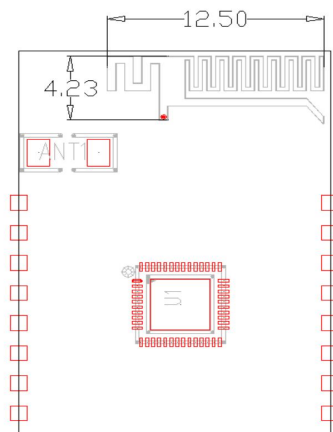


Passive Test For 5G		
Freq (MHz)	Effi (%)	Gain (dBi)
5000	29.11	-0.49
5020	37.29	1.23
5040	26.74	-1.05
5060	21.84	-2.04
5080	36.02	-0.17
5100	28.07	-0.54
5120	20.2	-0.36
5140	22.09	-1.91
5160	22.84	-2.29
5180	21.05	-2.92
5200	22.03	-1.7
5220	20.4	-1.42
5240	19.47	-2.22
5260	24.98	-1.59
5280	19.77	-1.3
5320	21.75	-2.09
5340	25.56	-1.01
5360	24.5	-1.34
5380	18.26	-3.21
5400	25.17	0.11
5420	36.06	-0.16
5440	26.2	-0.46
5460	22.01	-0.64
5480	32.44	1.43
5500	32.23	0.64
5520	31.36	1.44
5540	37.6	0.68
5560	36.32	1.18
5580	38.6	1.11
5600	39.81	0.86
5620	37.66	1.03
5640	42.75	1.02
5660	44.15	1.45
5670	30.01	0.67
5680	32.54	0.66
5700	35.7	1.15
5720	35.41	0.26
5740	48.92	0.89
5760	37.22	1.33
5780	34.45	1.02
5800	32.76	0.13
5820	44.19	1.04
5840	40.12	1.22

5860	44.05	1.14
5880	43.84	1.5
5900	38.48	0.89
5920	51.93	1.42
5940	78.52	1.49
5960	54.61	1.43
5980	60.05	1.34
6000	45.63	1.04


5720.000MHz

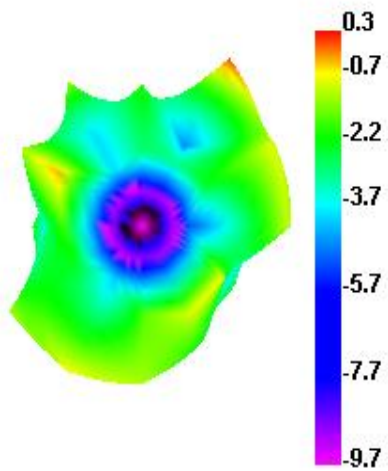


5720.000MHz H

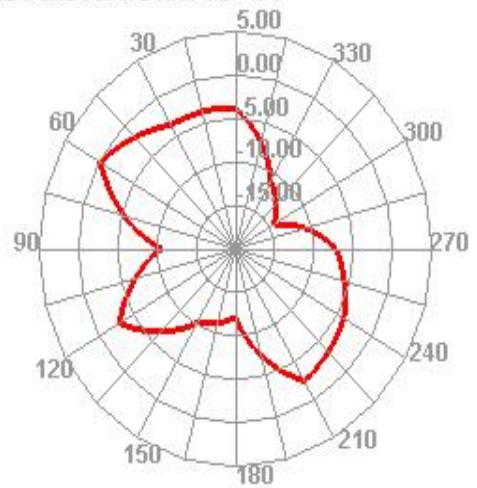


5720.000MHz E1

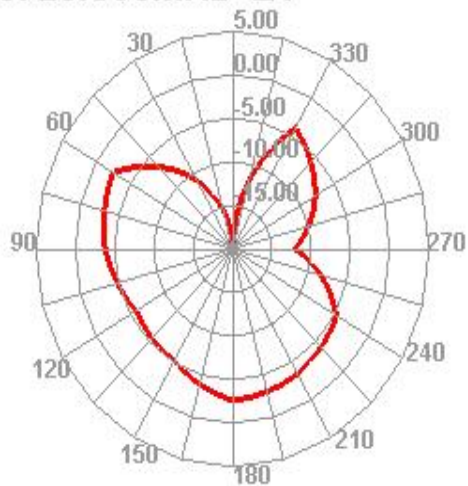


5770.000MHz

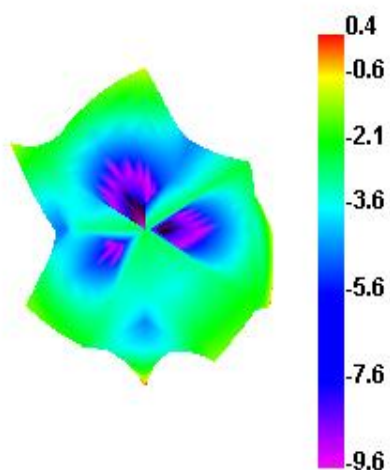


5770.000MHz H

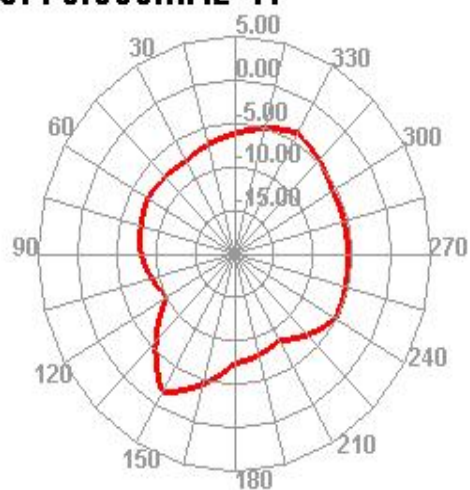


5770.000MHz E1

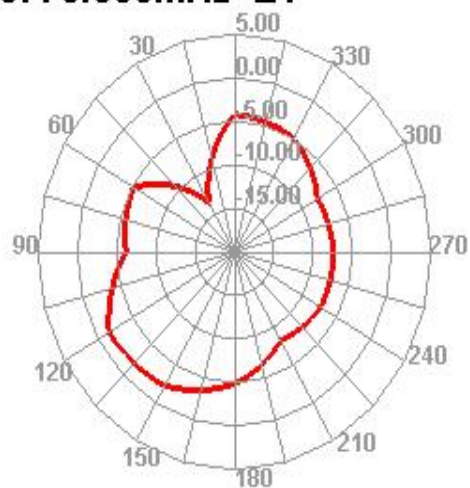


5880.000MHz

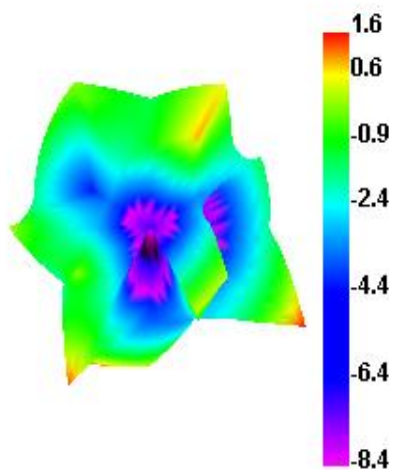

5880.000MHz H

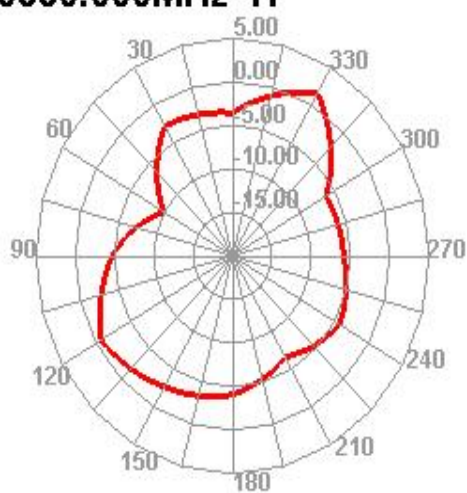


5880.000MHz E1

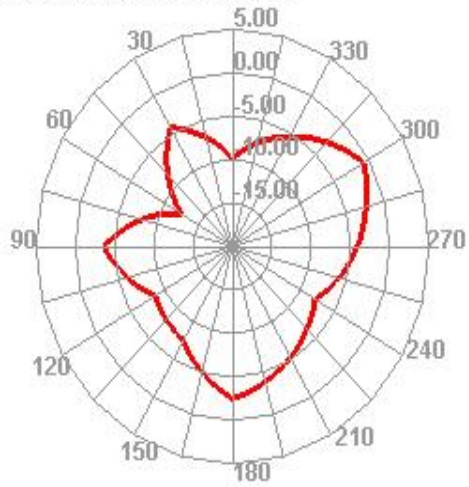


BLE-2.4G

Design Specifications	Typical
Antenna Type*	Ceramic Antenna
Working Frequency	2.4GHz
Antenna Gain	1.5 dBi
Impedance	50 ohm
Overall Dimensions*	L3.23mm * W1.66*T1.23mm
Manufacturer's company name	ONEWAVE TECHNOLOGY CO., LTD
Manufacturer Address	1F, 151 Ligong Street, Beitou District, Taipei, Taiwan, China 11261, China

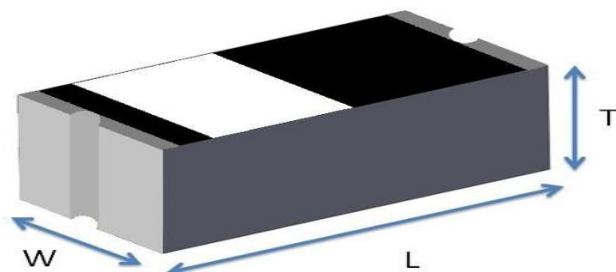


Passive Test For 2.4-2.5		
Freq (MHz)	Effi (%)	Gain (dBi)
2400	42.47	1.03
2410	45.68	1.32
2420	47.02	1.39
2430	50.38	1.5
2440	56.34	1.49
2450	47.89	0.44
2460	55.73	1.01
2470	53.89	1.46
2480	49.55	1.37
2490	49.07	1.22
2500	42.09	0.46


2400.000MHz

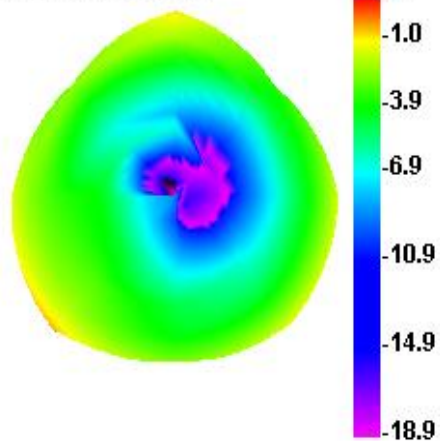


2400.000MHz H

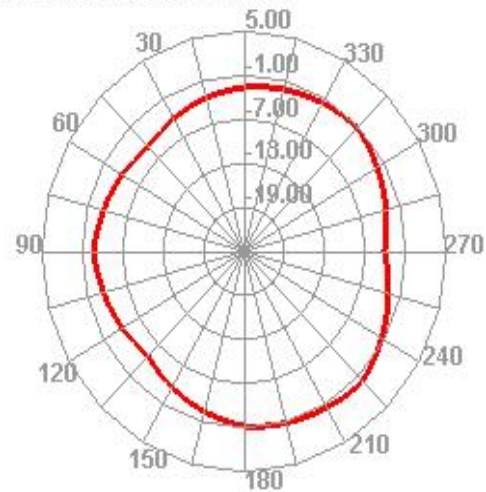



2400.000MHz E1

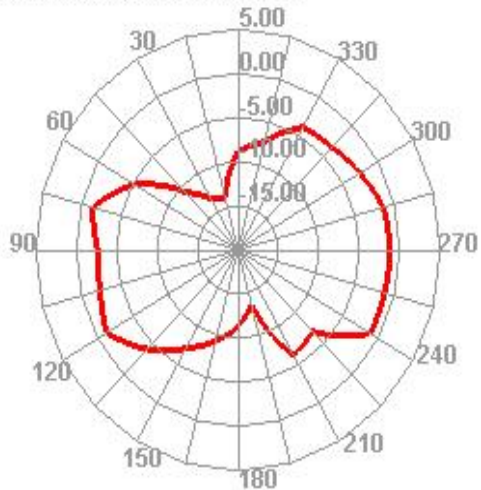


2400.000MHz E2

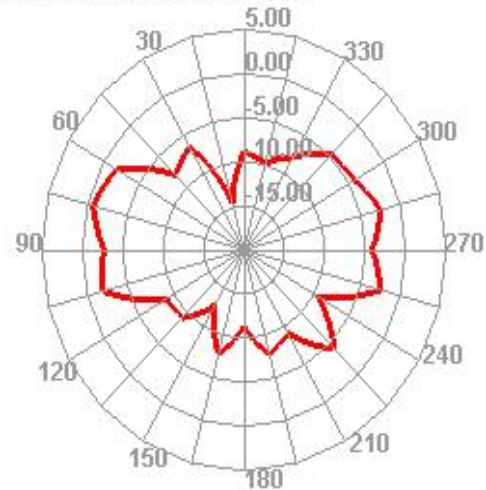


2450.000MHz

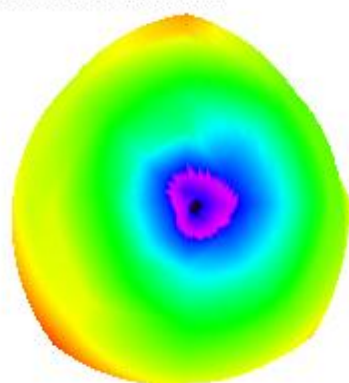


2450.000MHz H

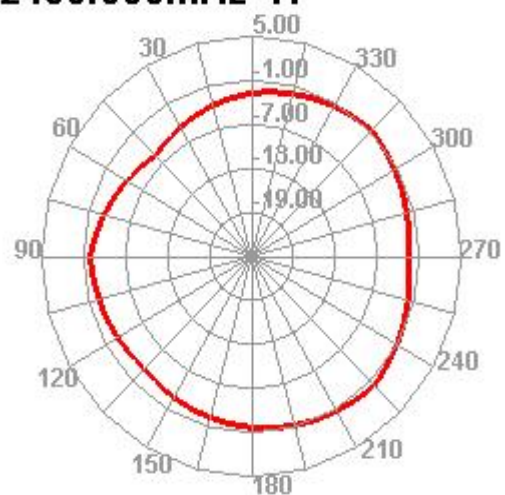


2450.000MHz E1

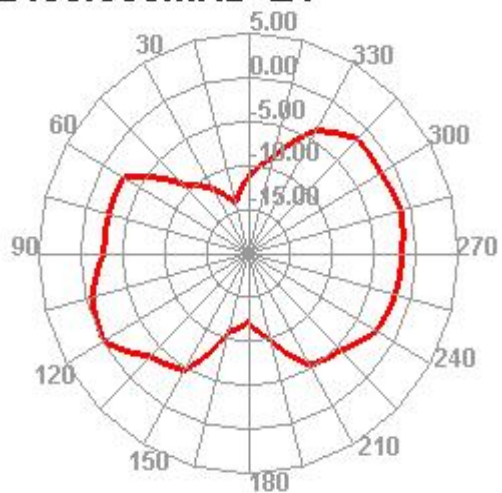


2450.000MHz E2

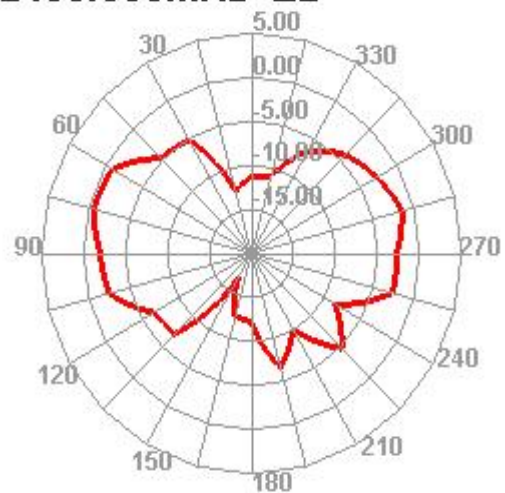


2500.000MHz

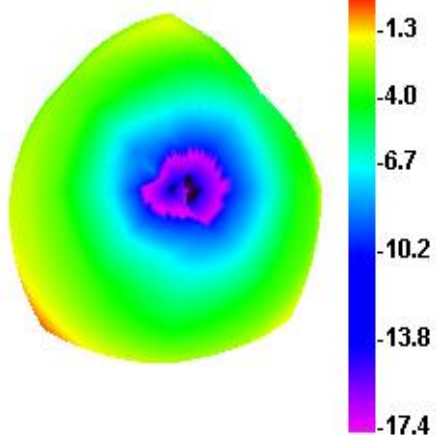

2500.000MHz H

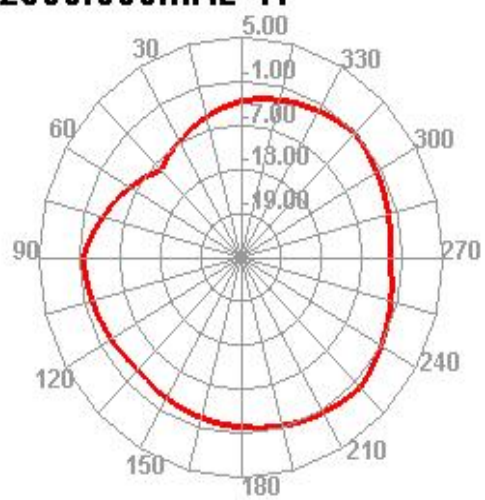

2500.000MHz E1

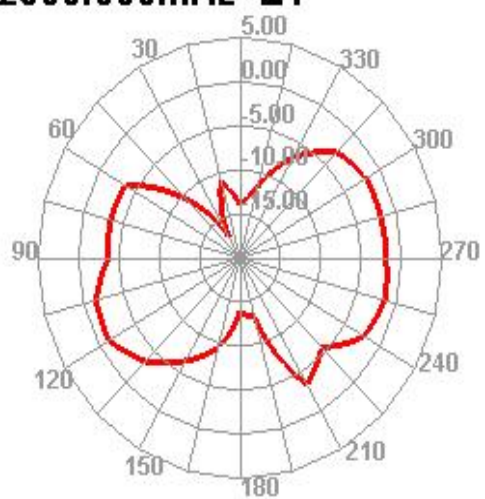

2500.000MHz E2

