




THANK YOU

Thank you for purchasing a Presentation Pilot Pro. So we may better serve you in the future, please take a few moments to register using the enclosed Registration Card or register online at www.interlinkelec.com/register.

Sincerely,

 E. Michael Thoben
 President, Chairman and CEO
 Interlink Electronics, Inc.

WARRANTY

- One Year, Limited Warranty
- A complete copy of your warranty is available at www.presentationpilot.com/warranty

FCC CERTIFICATION

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a CLASS B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential installation. This equipment generates, uses, can radiate radio frequency energy and if not installed and used in accordance with the instruction guide, may cause harmful interference to radio communications. However, there is no guarantee that this radio interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment on and off, the user is encouraged to try to correct the interference by one or more of the following measures:

Re-orient or relocate the receiving antenna.
 Increase the separation between the equipment and the receiver.

Consult the dealer or an experienced Radio-TV technician for help.

Notice: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. Extension cables are not recommended, if used, they must be shielded in order to comply with the emission limits.

IC CERTIFICATION

The term "IC" before the certification/registration number only signifies that the Industry Canada technical specifications were met.

DECLARATION OF CONFORMITY

Manufacturer: Interlink Electronics, Inc.
 546 Flynn Road, Camarillo, CA 93012 USA

We declare under our sole responsibility that the Presentation Pilot Pro conforms to the following directives and norms:

Directive 89/336/EEC, Amended by 93/68/EEC
 EMI: EN 55022 (1992) Class B
 EMC: EN 50082-1 (1992)
 Directive 73/23/EEC, Amended by 93/68/EEC
 Safety: EN 60950: 2000

November, 2004



INTERLINK
ELECTRONICS

www.interlinkelectronics.com
 546 Flynn Road, Camarillo, CA 93012 USA
 Ph: (888) 696-3500 • Fax: (805) 484-8989



FOLD

Presentation Pilot Pro


VP6450

PRESENT LIKE A PRO

- Move freely about the room to interact with your audience
- Control presentation slides and effects with ease
- Use laser pointer to highlight important points
- Shift audience attention from your slides to you with the Hide button



STORING THE RECEIVER IN THE REMOTE TURNS THE REMOTE OFF TO PRESERVE BATTERY LIFE

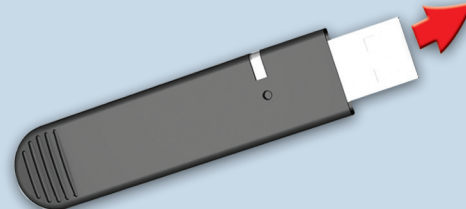

Specifications

- 50-foot Omni-Directional Range
- 2.4GHz RF (Radio Frequency)
- 4 Channels, 64,000 Addresses
- Uses CR2025 Coin Battery

System Requirements

- Windows 2000, ME, XP
- Mac 8.x and up
- Microsoft PowerPoint or Apple Keynote
- USB 1.1 or 2.0 interface

© 2004 Interlink Electronics, Inc.
 PresentationPilotPro, Interlink Electronics and the six dot logo are trademarks of Interlink Electronics, Inc. This device is protected by US patents 5,296,837; 5,302,936; 5,659,334; plus other US and foreign patents and patents pending.
 90-51121 Rev.B



FOLD

Presentation Pilot Pro

WIRELESS POWERPOINT® REMOTE WITH MOUSE AND LASER

50' RANGE



PC/MAC

INTERLINK
ELECTRONICS

USB






FOLD

FOLD




FIRST USE


1. Remove the receiver from the remote's receiver bay.
(When the receiver is in the receiver bay, it automatically turns the remote off to save power.)
Install battery in the remote.

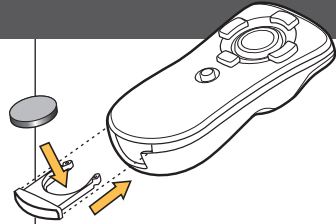

2. Plug in the USB Receiver (computer must be running).
(If your computer displays a "Found New Hardware" message, click Next until the driver install process is finished.)

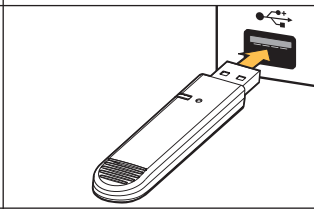

3. Initialize Presentation Pilot Pro by pressing the Hide button within 10 minutes of connecting the receiver.

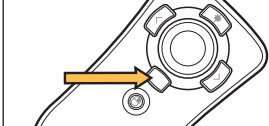

TROUBLE SHOOTING

FIRST USE TROUBLE

If remote does not communicate with your computer after First Use steps, follow the Train Receiver steps in this User's Guide.

RESOLVING INTERFERENCE

Several other types of products share the 2.4GHz radio band with Presentation Pilot Pro. Sometimes, this can cause interference. Presentation Pilot Pro comes with 4 different channels to help you avoid interference. If Presentation Pilot Pro is not working reliably in a particular location, try changing channels. This is a two-step process. First change the channel on the remote, then train the receiver. The process is detailed on the next pages.

OTHER TROUBLE SHOOTING

For other trouble shooting tips, see Frequently Asked Questions at www.presentationpilot.com/faq


CHANGE CHANNEL:

Action	LED Signal
1. Replace and remove the receiver from the receiver bay of the remote	
2. Hold the Previous button down for 10 seconds	
LED will blink the number of the current channel	Channel:
3. Press the Previous button to increase the channel by 1. Continue tapping until you reach the desired channel	Example: Channel 1 + 2 presses = Channel 3
LED will blink the number of the current channel	
4. Press the Next button to complete the channel selection	

TRAIN RECEIVER:

Action	LED Signal	LED Signal
5. Remove and replace the USB receiver		
6. Hold the Next button down for 10 seconds		
When Receiver LED stays on, release button		
Receiver LED will continue to blink slowly		
Receiver is trained.		
CHANGING THE KEY CODE USED TO HIDE SLIDE		
In certain language operating systems, a different key code may be needed to operate the Hide Slide feature on your computer. Three key codes are provided. To change between codes:		
<ul style="list-style-type: none">• Connect your receiver to a USB port.• Use a paper clip to press and release the recessed button on the receiver.• The LED on the receiver will turn orange.• Start a slide show and test the Hide Slide feature.		
For more information see Frequently Asked Questions at www.presentationpilot.com/faq		

PRESENTATIONPILOTPRO

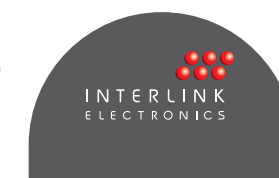

WWW.PRESENTATIONPILOT.COM



FOLD

FOLD