



TEST REPORT

Report Number. : R14275554-E1

Applicant : InfoBionic, Inc
400 Totten Pond Rd STE 315
Waltham, MA 02451, U.S.A.

Model : MoMe ARC Charger

FCC ID : 2AHLC01858

EUT Description : Charger Base

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C: 2022
ISED RSS-247 ISSUE 2: 2017
ISED RSS-GEN ISSUE 5 + A2: 2021

Date Of Issue:
2022-10-10

Prepared by:
UL LLC
12 Laboratory Dr.
Research Triangle Park, NC 27709 U.S.A.
TEL: (919) 549-1400



REPORT REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
V1	2022-10-10	Initial Issue	Charles Moody

TABLE OF CONTENTS

REPORT REVISION HISTORY	2
TABLE OF CONTENTS	3
1. ATTESTATION OF TEST RESULTS	5
2. TEST RESULTS SUMMARY	6
3. TEST METHODOLOGY	6
4. FACILITIES AND ACCREDITATION	6
5. DECISION RULES AND MEASUREMENT UNCERTAINTY	7
5.1. METROLOGICAL TRACEABILITY	7
5.2. DECISION RULES	7
5.3. MEASUREMENT UNCERTAINTY	7
5.4. SAMPLE CALCULATION	7
6. EQUIPMENT UNDER TEST	8
6.1. EUT DESCRIPTION	8
6.2. MAXIMUM OUTPUT POWER	8
6.3. DESCRIPTION OF AVAILABLE ANTENNAS	8
6.4. SOFTWARE AND FIRMWARE	8
6.5. WORST-CASE CONFIGURATION AND MODE	8
6.6. DESCRIPTION OF TEST SETUP	9
7. MEASUREMENT METHOD	10
8. TEST AND MEASUREMENT EQUIPMENT	11
9. ANTENNA PORT TEST RESULTS	13
9.1. ON TIME AND DUTY CYCLE	13
9.2. 99% BANDWIDTH	15
9.2.1. BLE (1Mbps)	15
9.2.1. BLE (2Mbps)	16
9.3. 6 dB BANDWIDTH	17
9.3.1. BLE (1Mbps)	17
9.3.1. BLE (2Mbps)	18
9.4. OUTPUT POWER	19
9.4.1. BLE (1Mbps)	19
9.4.1. BLE (2Mbps)	19
9.5. AVERAGE POWER	20

9.5.1.	BLE (1Mbps).....	20
9.5.2.	BLE (2Mbps).....	20
9.6.	<i>POWER SPECTRAL DENSITY</i>	21
9.6.1.	BLE (1Mbps).....	21
9.6.1.	BLE (2Mbps).....	22
9.7.	<i>CONDUCTED SPURIOUS EMISSIONS</i>	23
9.7.1.	BLE (1Mbps).....	24
9.7.1.	BLE (2Mbps).....	25
10.	RADIATED TEST RESULTS	26
10.1.	<i>LIMITS AND PROCEDURE</i>	26
10.2.	<i>TRANSMITTER ABOVE 1 GHz</i>	28
10.2.1.	BLE (1Mbps)	28
10.2.1.	BLE (2Mbps)	38
10.3.	<i>WORST CASE BELOW 30MHZ</i>	48
10.4.	<i>WORST CASE BELOW 1 GHZ</i>	49
10.5.	<i>WORST CASE 18-26 GHZ</i>	51
11.	AC POWER LINE CONDUCTED EMISSIONS	53
11.1.1.	AC Power Line Norm.....	54
12.	SETUP PHOTOS	56

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: InfoBionic, Inc
400 Totten Pond Rd STE 315
Waltham, MA 02451, U.S.A

EUT DESCRIPTION: Charger Base

MODEL: MoMe ARC Charger

SERIAL NUMBER: SIA2008, MIB2008, MIB1033

SAMPLE RECEIPT DATE: 2022-08-15

DATE TESTED: 2022-08-15, 2022-08-19, 2022-08-23, 2022-08-25


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C: 2022	Complies
ISED RSS-247 Issue 2: 2017	Complies
ISED RSS-GEN Issue 5 + A2: 2021	Complies

UL LLC tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL LLC and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL LLC will constitute fraud and shall nullify the document.

Approved & Released For
UL LLC By:



Brian Kiewra
Project Engineer
Consumer, Medical, and IT Segment
UL LLC

Prepared By:



Charles Moody
Electrical Engineer
Consumer, Medical, and IT Segment
UL LLC

2. TEST RESULTS SUMMARY

This report contains data provided by the applicant which can impact the validity of results. UL LLC is only responsible for the validity of results after the integration of the data provided by the customer.

FCC Clause	ISED Clause	Requirement	Result	Comment
See Comment		Duty Cycle	Reporting purposes only	ANSI C63.10 Section 11.6.
-	RSS-GEN 6.7	99% OBW	Reporting purposes only	ANSI C63.10 Section 6.9.3.
15.247 (a) (2)	RSS-247 5.2 (a)	6dB BW	Compliant	None.
15.247 (b) (3)	RSS-247 5.4 (d)	Output Power	Compliant	None.
See Comment		Average power	Reporting purposes only	Per ANSI C63.10, Section 11.9.2.3.2.
15.247 (e)	RSS-247 5.2 (b)	PSD	Compliant	None.
15.247 (d)	RSS-247 5.5	Conducted Spurious Emissions	Compliant	None.
15.209, 15.205	RSS-GEN 8.9, 8.10	Radiated Emissions	Compliant	None.
15.207	RSS-Gen 8.8	AC Mains Conducted Emissions	Compliant	None.

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 414788 D01 Radiated Test Site v01r01, RSS-GEN Issue 5 + A2, and RSS-247 Issue 2.

4. FACILITIES AND ACCREDITATION

UL LLC is accredited by A2LA, Certificate Number 0751.06, for all testing performed within the scope of this report. Testing was performed at the locations noted below.

	Address	ISED CABID	ISED Company Number	FCC Registration
☐	Building 12 Laboratory Dr RTP, NC 27709, U.S.A	US0067	2180C	825374
☒	Building 2800 Suite Perimeter Park Dr. Suite B Morrisville, NC 27560, U.S.A	US0067	27265	825374

5. DECISION RULES AND MEASUREMENT UNCERTAINTY

5.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

5.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U _{LAB}
Radio Frequency	141.2Hz
Occupied Bandwidth, conducted	1.22%
RF output power, conducted	1.3 dB (PK) 0.45 dB (AV)
Unwanted emissions, conducted	±1.94 dB
Power Spectral Density, conducted	±2.466 dB
All emissions, radiated	6.01 dB
Conducted Emissions (0.150-30MHz) - LISN	±3.40 dB
Humidity	±3.39 % RH
Temperature	±0.57°C
Time	±3.39 %

Uncertainty figures are valid to a confidence level of 95%.

5.4. SAMPLE CALCULATION

RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)
36.5 dBuV + 18.7 dB/m + 0.6 dB – 26.9 dB = 28.9 dBuV/m

MAINS CONDUCTED EMISSIONS

Where relevant, the following sample calculation is provided:

Final Voltage (dBuV) = Measured Voltage (dBuV) + Cable Loss (dB) + Limiter Factor (dB) + LISN Insertion Loss.
36.5 dBuV + 0 dB + 10.1 dB + 0 dB = 46.6 dBuV

6. EQUIPMENT UNDER TEST

6.1. EUT DESCRIPTION

The EUT is a charger of a three component ambulatory electro cardiogram that contains a WPT and BLE radio. This report covers full emissions testing for the BLE radio.

6.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	BLE	3.28	2.13

6.3. DESCRIPTION OF AVAILABLE ANTENNAS

The antenna(s) gain and type, as provided by the manufacturer' are as follows:

The radio utilizes an Abracon AMCA31-2R450G-S1F-T3 antenna, with a maximum gain of 0.5 dBi.

6.4. SOFTWARE AND FIRMWARE

The EUT firmware installed during testing was Charger Bootloader + App: V00.1355

The test utility software used during testing was Charger Bootloader + App: V00.13555

6.5. WORST-CASE CONFIGURATION AND MODE

Radiated emissions below 1GHz, above 18GHz, and power line conducted emission were performed with the EUT set to transmit at the channel and data rate with the worst-case power spectral density.

Band edge and radiated emissions between 1GHz and 18GHz were performed with the EUT set to transmit at the highest power on low and high channels. Additionally, the EUT was set to transmit at its highest power on mid channel for spurious emissions as well.

The EUT was stated by the manufacturer to operate in only one orthogonal orientation, X. Therefore, all final radiated testing was performed with the EUT in X orientation.

The EUT was also capable of transmitting in two data rates (1Mbps and 2Mbps).

6.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	HDP	HDP12-MD05024U	N/A	N/A

I/O CABLES

I/O Cable List						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	USB	1	USB	Shielded	<3m	Power Cable

TEST SETUP

Prior to testing, the transmitting channel and data rate were set by using built-in buttons on the EUT to control the BLE radio.

SETUP DIAGRAMS

Please refer to 14275554-EP1 for setup diagrams

7. MEASUREMENT METHOD

On Time and Duty Cycle: ANSI C63.10 Subclause -11.6

6 dB BW: ANSI C63.10 Subclause -11.8.1

Occupied BW (99%): ANSI C63.10-2013 Section 6.9.3

Output Power: ANSI C63.10 Subclause -11.9.1.3 Method PKPM1 Peak-reading power meter

Output Power: ANSI C63.10 Subclause -11.9.2.3.2 Method AVGPM-G (Measurement using a gated RF average-reading power meter)

PSD: ANSI C63.10 Subclause -11.10.2 Method PKPSD (peak PSD)

Radiated emissions non-restricted frequency bands: ANSI C63.10 Subclause -11.11 and 6.10.4

Radiated emissions restricted frequency bands: ANSI C63.10 Subclause -11.12.1 and 6.10.5

General Radiated Spurious Emissions: ANSI C63.10-2013, Section 6.3 to 6.6.

AC Power Line Conducted Emissions: ANSI C63.10-2013, Section 6.2.

8. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment Used - Wireless Conducted Measurement Equipment

Equipment ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
Conducted 1					
SA0025	Spectrum Analyzer	Keysight Technologies	N9030A	2022-05-02	2023-05-02
PWM003	Power Meter	Keysight Technologies	N1911A	2021-08-30	2022-08-30
HI0091	Environmental Meter	Fisher Scientific	15-077-963	2022-07-20	2023-07-20
PWS006	Power Sensor	Keysight Technologies	N1921A	2021-12-17	2022-12-17
208720	Callbox	Rohde & Schwarz	CMW 500	2022-05-02	2023-05-02
SOFTEMI	Antenna Port Software	UL	Version 2022.5.4		
Conducted 2					
SA0027	Spectrum Analyzer	Keysight Technologies	N9030A	2022-05-24	2023-05-24
HI0090	Environmental Meter	Fisher Scientific	15-077-963	2022-07-20	2023-07-20
PWM004	RF Power Meter	Keysight Technologies	N1911A	2021-08-17	2022-08-31
PWS007	Peak and Avg Power Sensor, 50MHz – 18GHz	Keysight Technologies	N1921A	2022-03-22	2023-03-22
SOFTEMI	Antenna Port Software	UL	Version 2022.5.4		

Test Equipment Used - Line-Conducted Emissions – Voltage (Morrisville – Conducted 1)

Equipment ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
CBL087	Coax cable, RG223, N-male to BNC-male, 20-ft.	Pasternack	PE3W06143-240	2022-04-05	2023-04-05
HI0091	Environmental Meter	Fisher Scientific	15-077-963	2022-07-20	2023-07-20
LISN003	LISN, 50-ohm/50-uH, 250uH 2-conductor, 25A	Fischer Custom Com.	FCC-LISN-50/250-25-2-01	2022-08-01	2023-08-01
75141	EMI Test Receiver 9kHz-7GHz	Rohde & Schwarz	ESCI 7	2022-08-03	2023-08-03
ATA222	Transient Limiter, 0.009-100MHz	Electro-Metrics	EM-7600	2022-04-05	2023-04-05
PS214	AC Power Source	Elgar	CW2501M	NA	NA
SOFTEMI	EMI Software	UL	Version 9.5 (04 Mar 2021)		

Test Equipment Used - Radiated Disturbance Emissions Test Equipment (Morrisville – Chamber 2)

Equip. ID	Description	Manufacturer/Brand	Model Number	Last Cal.	Next Cal.
	0.009-30MHz				
AT0079	Active Loop Antenna	ETS-Lindgren	6502	2021-08-19	2022-08-31
	30-1000 MHz				
AT0073	Hybrid Broadband Antenna	Sunol Sciences Corp.	JB3	2021-08-30	2022-08-30
	1-18 GHz				
206211	Double-Ridged Waveguide Horn Antenna, 1 to 18 GHz	ETS Lindgren	3117	2022-03-21	2023-03-21
	18-26 GHz				
AT0063	Horn Antenna, 18-26.5GHz	ARA	MWH-1826/B	2021-11-04	2022-11-04
	Gain-Loss Chains				
C2-SAC01	Gain-loss string: 0.009-30MHz	Various	Various	2022-05-10	2023-05-10
C2-SAC02	Gain-loss string: 25-1000MHz	Various	Various	2022-05-10	2023-05-10
C2-SAC03	Gain-loss string: 1-18GHz	Various	Various	2022-05-10	2023-05-10
C2-SAC04	Gain-loss string: 18-40GHz	Various	Various	2022-05-10	2023-05-10
	Receiver & Software				
197955	Spectrum Analyzer	Rohde & Schwarz	ESW44	2022-03-08	2023-03-08
SA0020	Spectrum Analyzer	Agilent	E4446A	2022-06-08	2023-06-08
SOFTEMI	EMI Software	UL	Version 9.5 (18 Oct 2021)		
	Additional Equipment used				
200540	Environmental Meter	Fisher Scientific	15-077-963 (s/n 181474409)	2021-09-27	2022-09-27

9. ANTENNA PORT TEST RESULTS

9.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.


PROCEDURE


KDB 558074 Zero-Span Spectrum Analyzer Method.
ANSI C63.10 Subclause – 11.6

ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
2.4GHz Band						
BLE (1Mbps)	100.000	100.000	1.000	100.00	0.00	0.010
BLE (2Mbps)	100.000	100.000	1.000	100.00	0.00	0.010

DUTY CYCLE PLOTS

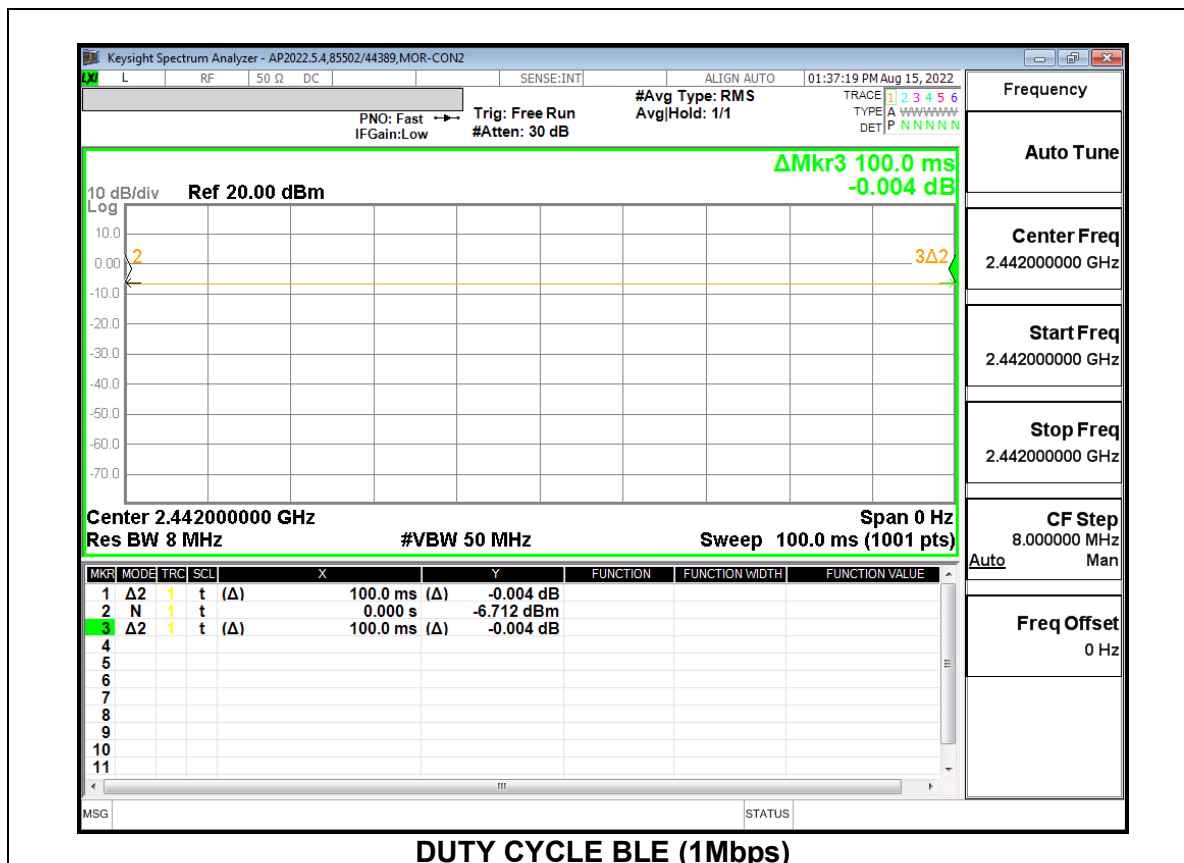

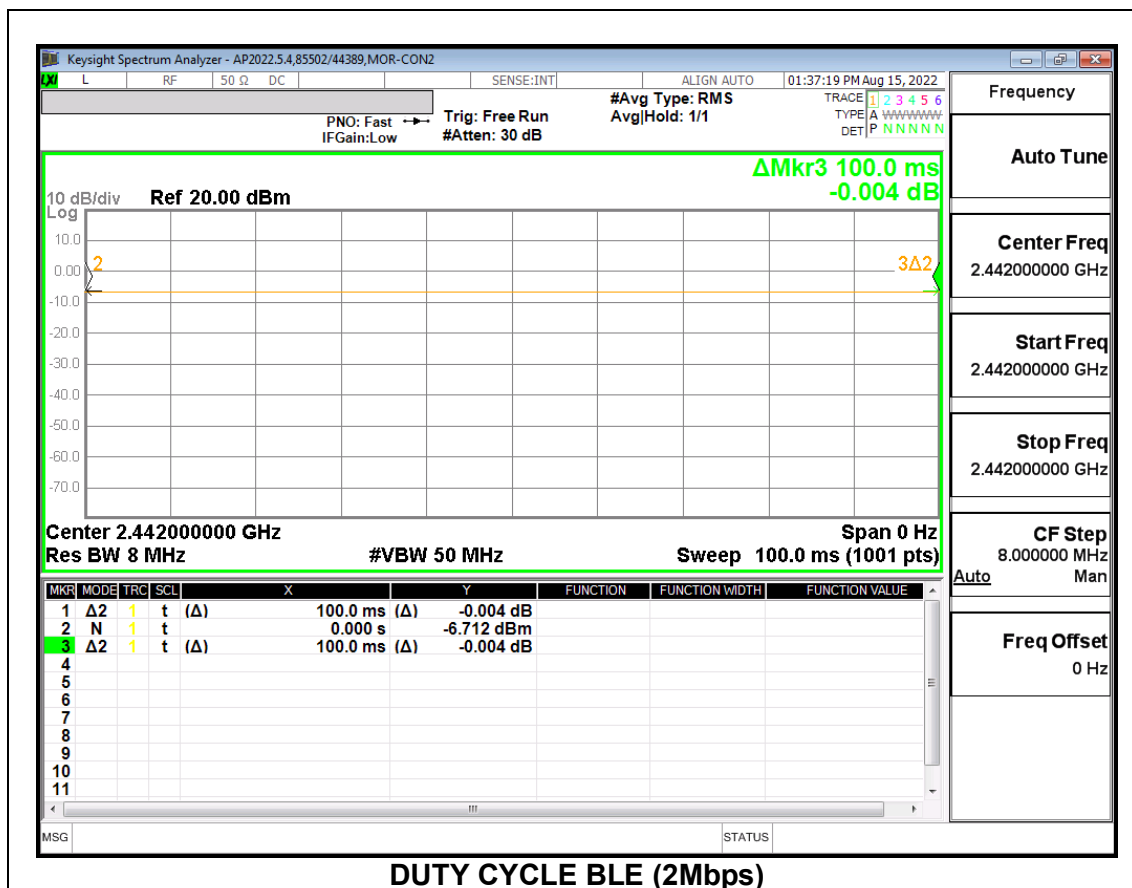

9.2. 99% BANDWIDTH


LIMITS

None; for reporting purposes only.

RESULTS

9.2.1. BLE (1Mbps)

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	1.0600
Middle	2442	1.0688
High	2480	1.0638

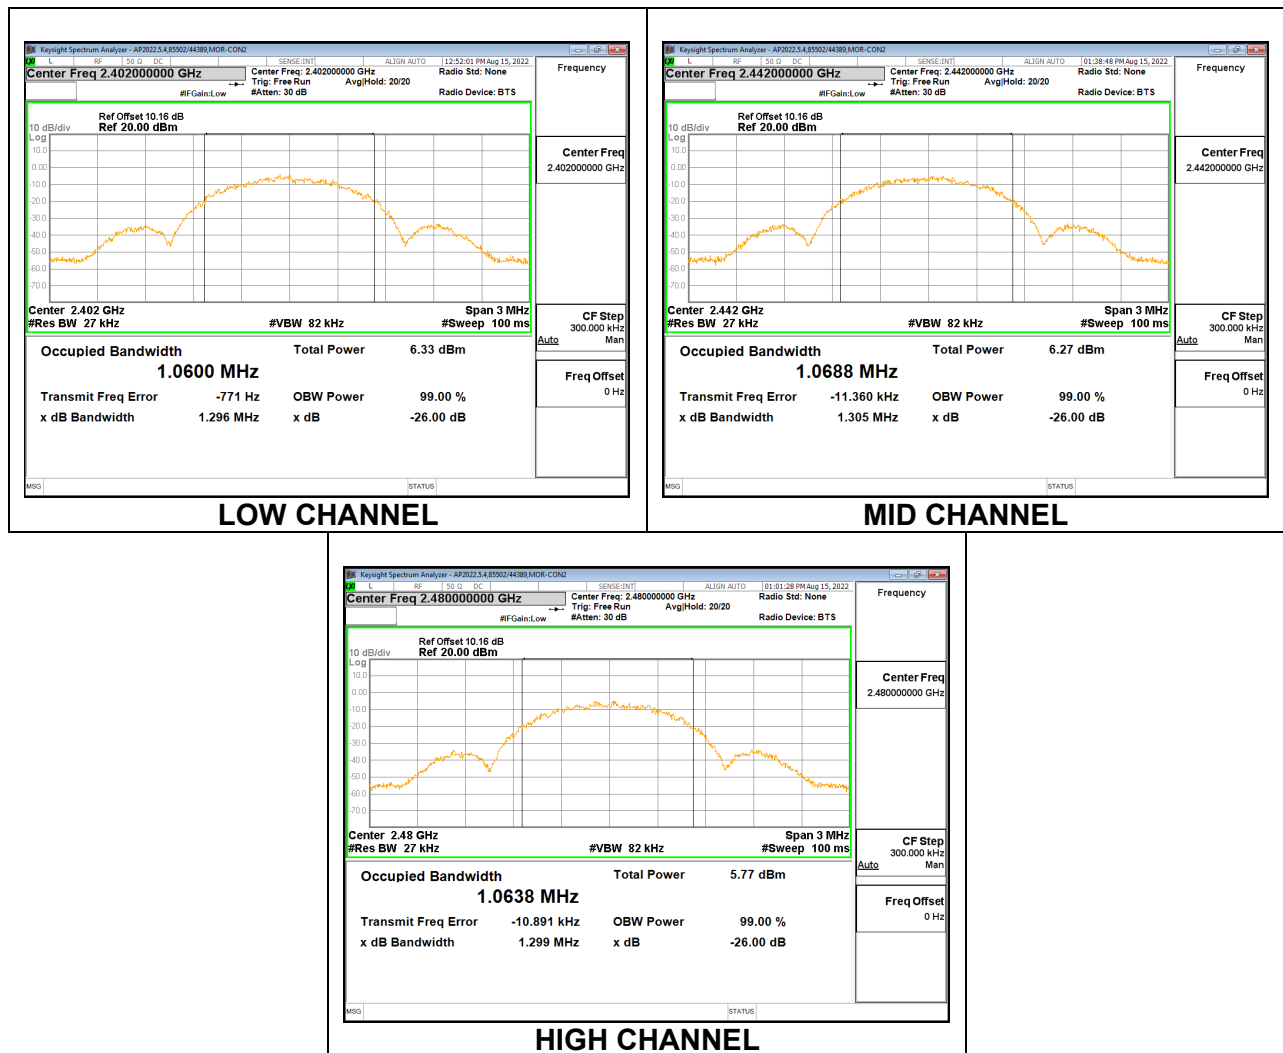

9.2.1. BLE (2Mbps)

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	2.0811
Middle	2442	2.0869
High	2480	2.0765



9.3. 6 dB BANDWIDTH

LIMITS


FCC §15.247 (a) (2)
RSS-247 5.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS


9.3.1. BLE (1Mbps)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2402	0.771	0.5
Middle	2442	0.729	0.5
High	2480	0.771	0.5

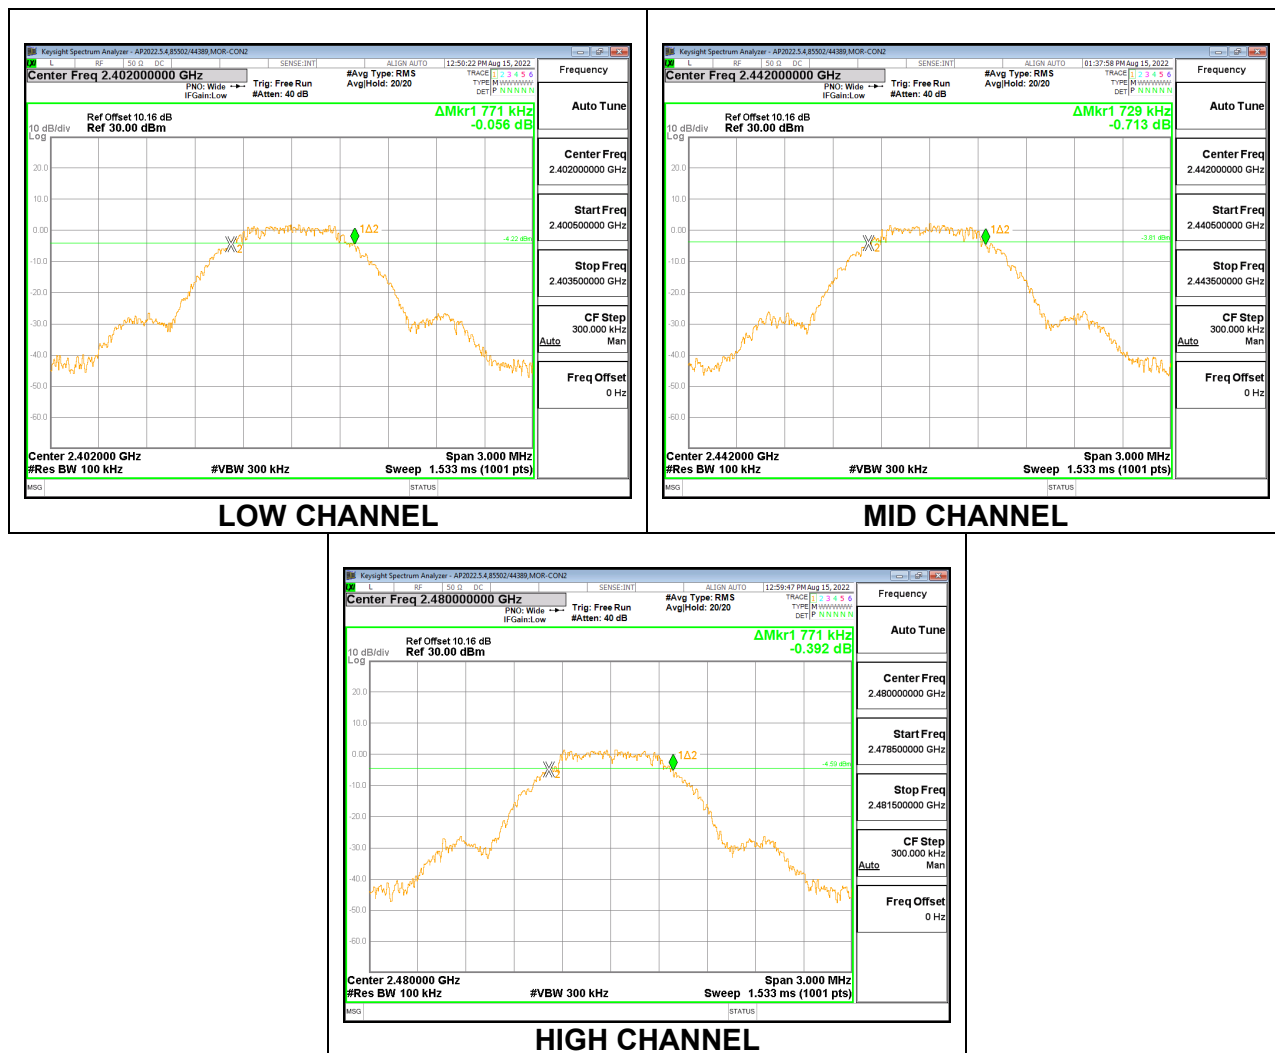

9.3.1. BLE (2Mbps)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2402	1.302	0.5
Middle	2442	1.152	0.5
High	2480	1.338	0.5

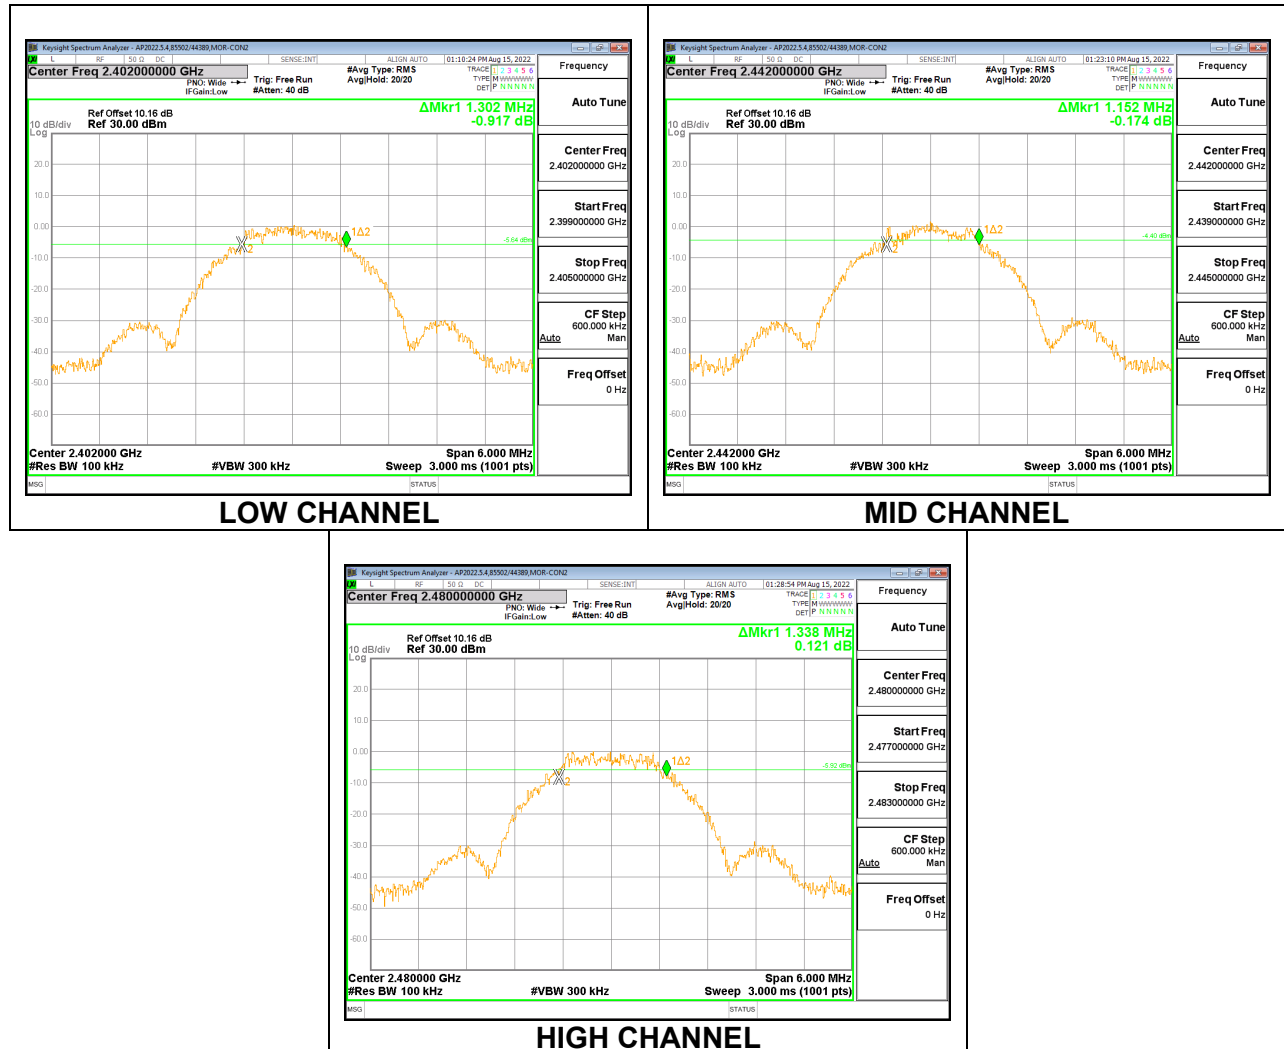

9.4. OUTPUT POWER

LIMITS

FCC §15.247 (b) (3)
RSS-247 5.4 (d)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 0.51 dB was entered as an offset in the power meter.

RESULTS

9.4.1. BLE (1Mbps)

Tested By:	27465/44389
Date:	8/15/2022

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2402	3.28	30	-26.72
Middle	2442	3.06	30	-26.94
High	2480	2.82	30	-27.18

9.4.1. BLE (2Mbps)

Tested By:	27465/44389
Date:	8/15/2022

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2402	3.27	30	-26.73
Middle	2442	3.01	30	-26.99
High	2480	2.79	30	-27.21

9.5. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a gated average power meter.

The cable assembly insertion loss of 0.51 dB was entered as an offset in the power meter.

RESULTS

9.5.1. BLE (1Mbps)

Tested By:	27465/44389
Date:	8/15/2022

Channel	Frequency (MHz)	AV power (dBm)
Low	2402	3.10
Middle	2442	2.80
High	2480	2.50

9.5.2. BLE (2Mbps)

Tested By:	27465/44389
Date:	8/15/2022

Channel	Frequency (MHz)	AV power (dBm)
Low	2402	3.00
Middle	2442	2.80
High	2480	2.50

RESULTS

9.6. POWER SPECTRAL DENSITY

LIMITS


FCC §15.247 (e)

RSS-247 (5.2) (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.




9.6.1. BLE (1Mbps)

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2402	-9.677	8	-17.677
Middle	2442	-10.858	8	-18.858
High	2480	-10.106	8	-18.106

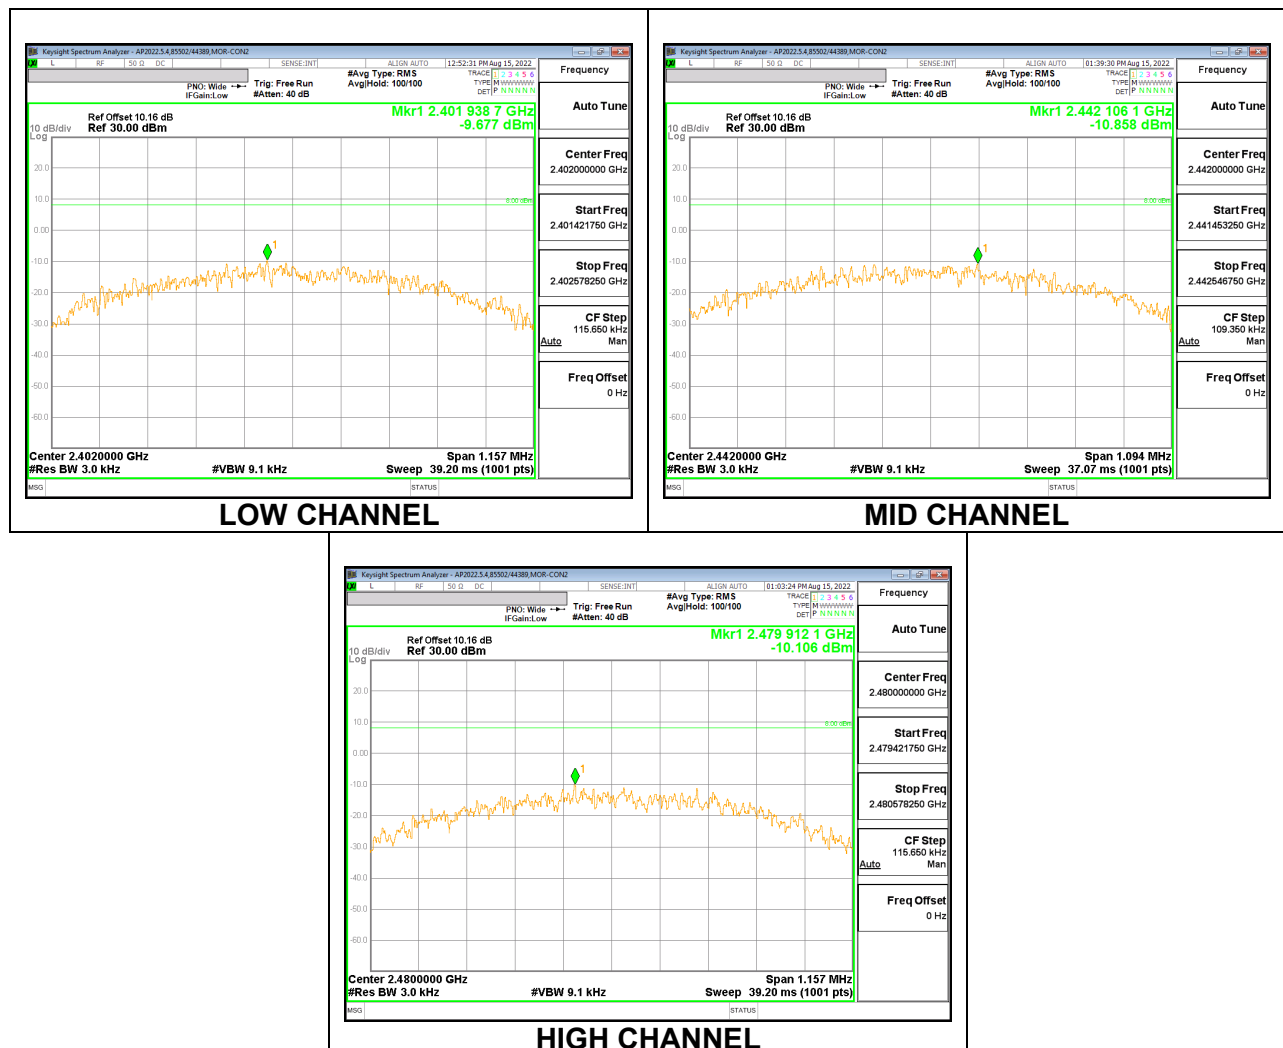

9.6.1. BLE (2Mbps)

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2402	-13.060	8	-21.060
Middle	2442	-13.165	8	-21.165
High	2480	-12.350	8	-20.350

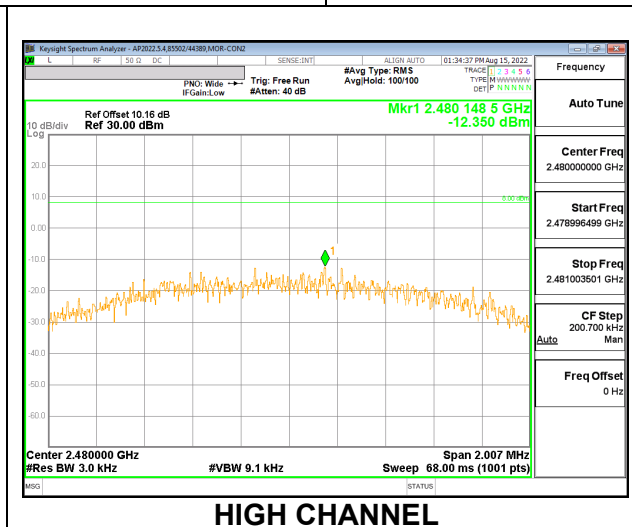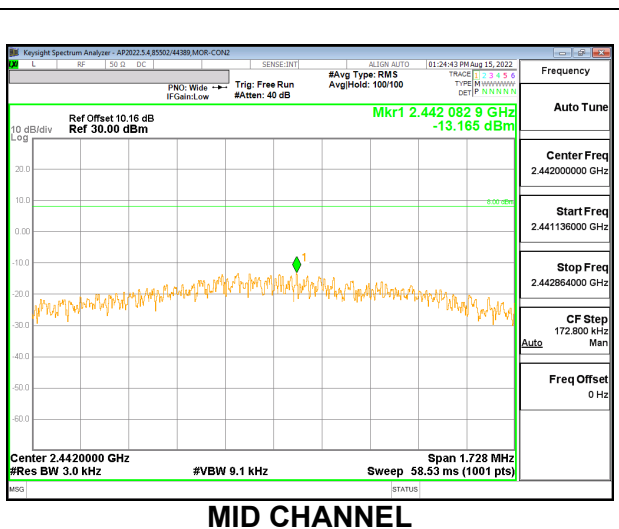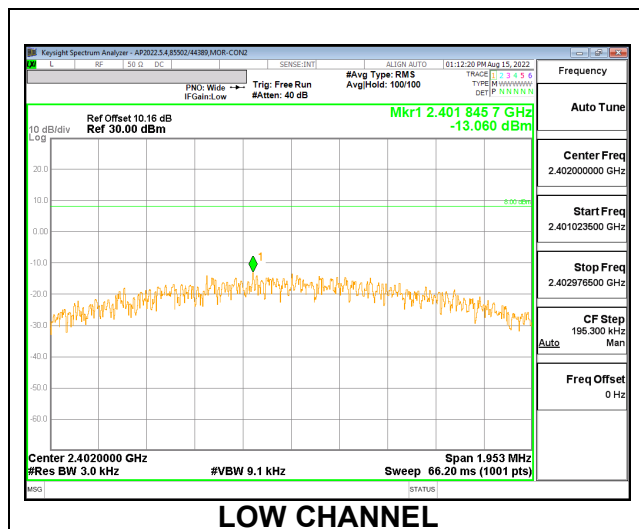

9.7. CONDUCTED SPURIOUS EMISSIONS


LIMITS

FCC §15.247 (d)
RSS-247 5.5


Output power was measured based on the use of a peak measurement, therefore the required attenuation is -20 dBc.

RESULTS

9.7.1. BLE (1Mbps)

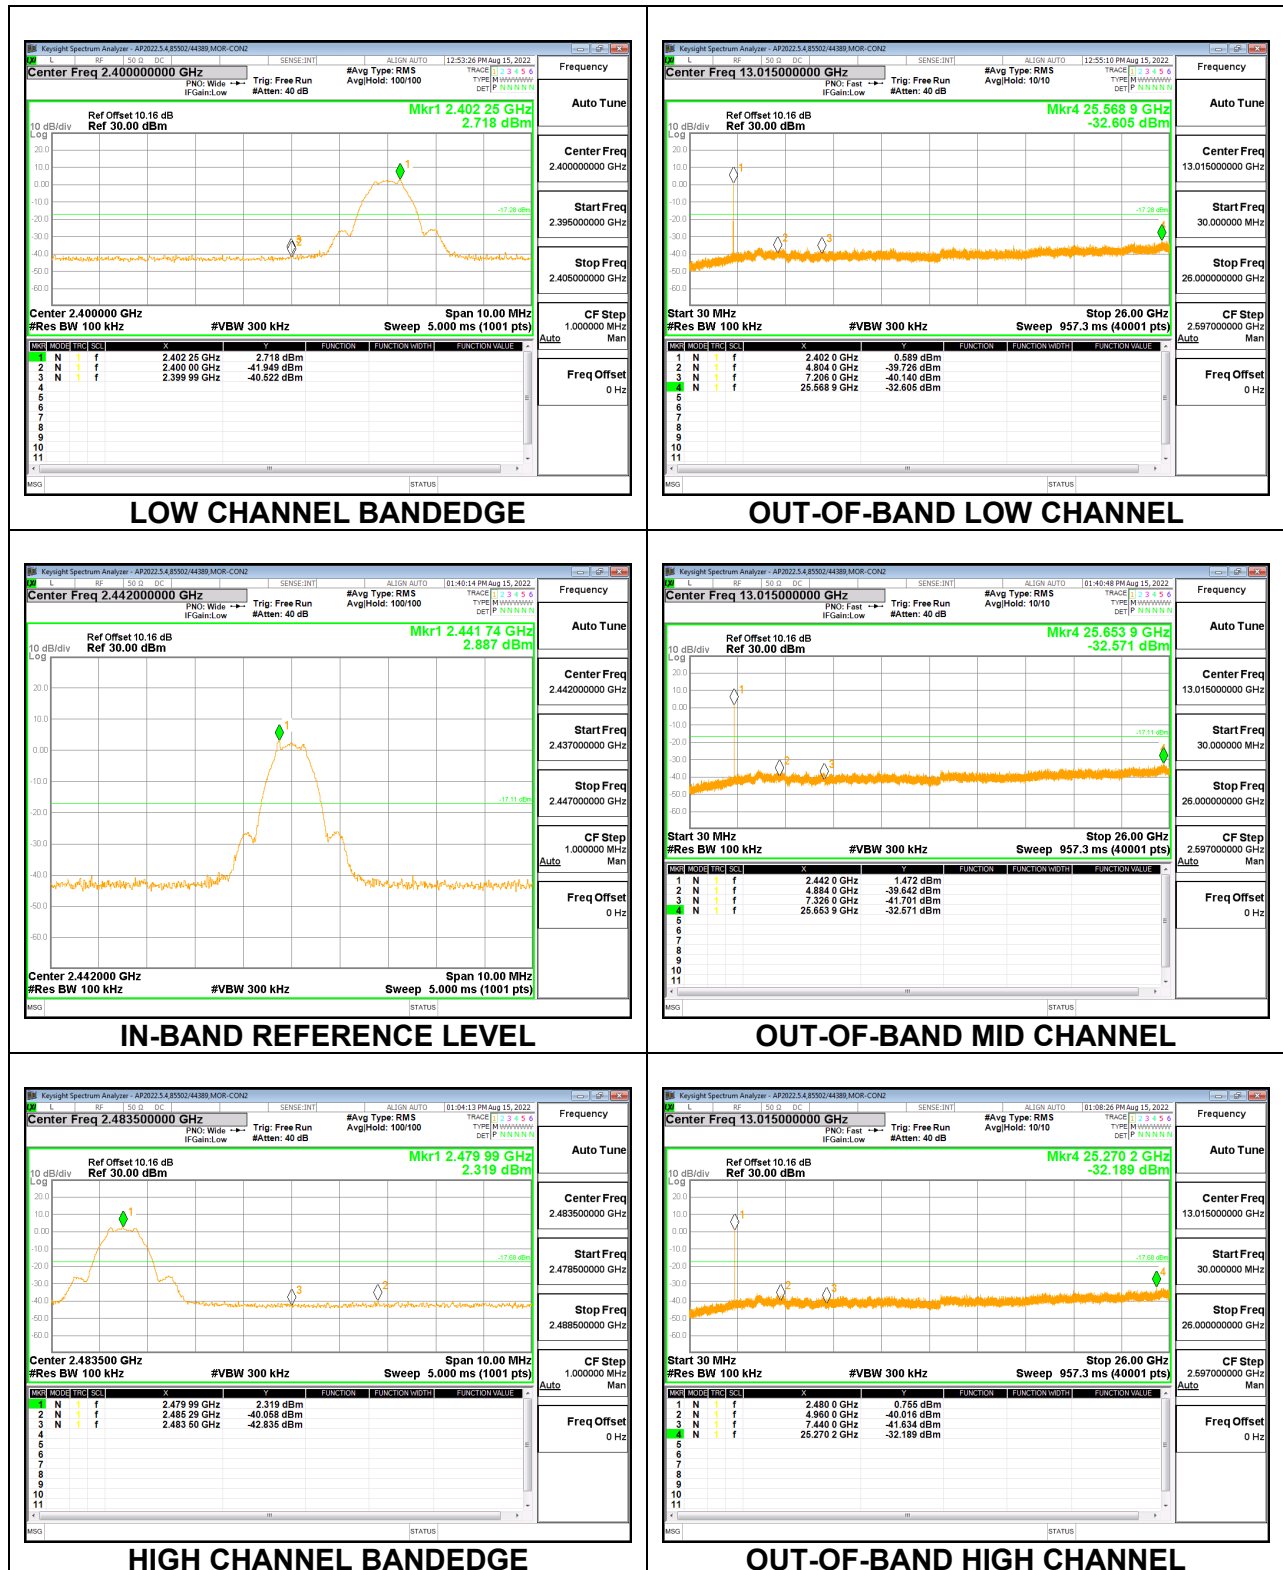

9.7.1. BLE (2Mbps)

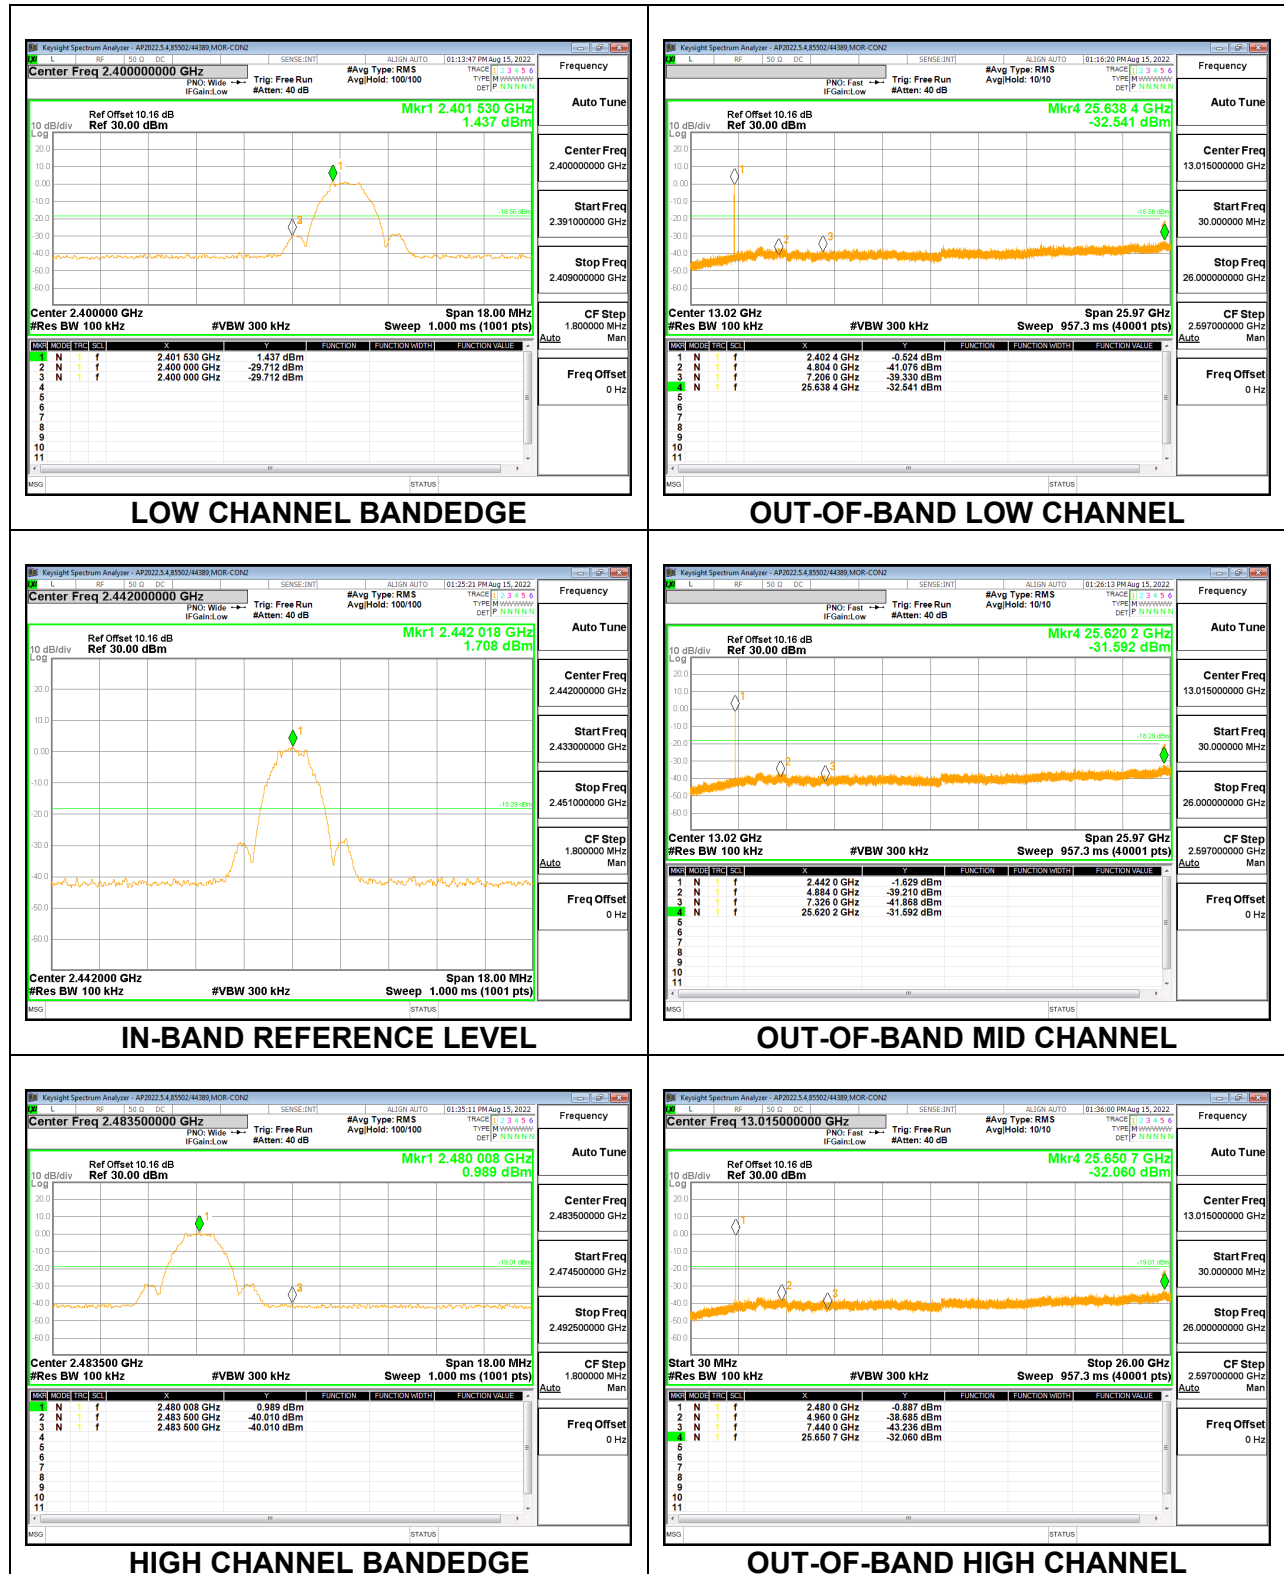

10. RADIATED TEST RESULTS

10.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
0.009-0.490	2400/F(kHz) @ 300 m	-
0.490-1.705	24000/F(kHz) @ 30 m	-
1.705 - 30	30 @ 30m	-
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

RSS-GEN, Section 8.9 and 8.10.

Frequency Range (MHz)	Field Strength Limit (uA/m) at 3 m	Field Strength Limit (dBuA/m) at 3 m
0.009-0.490	6.37/F(kHz) @ 300 m	-
0.490-1.705	6.37/F(kHz) @ 30 m	-
1.705 - 30	.08 @ 30m	-
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements in the 30-1000MHz range, 9kHz for peak and/or quasi-peak detection measurements in the 0.15-30MHz range and 200Hz for peak and/or quasi-peak detection measurements in the 9 to 150kHz range. Peak detection is used unless otherwise noted as quasi-peak or average (9-90kHz and 110-490kHz).

For pre-scans above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements.

For final measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and as applicable for average measurements. Linear Voltage Averaging was used.

For below 1GHz and above 18GHz emissions, the channel and data rate with the highest power spectral density, was tested.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

3D antenna use - For below 30MHz testing, investigation was done on three antenna orientations (parallel, perpendicular, and ground-parallel).

Based on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

KDB 414788 Open Field Site(OFS) and Chamber Correlation Justification


OFS and chamber correlation testing had been performed and chamber measured test result is the worst-case test result.

10.2. TRANSMITTER ABOVE 1 GHz

10.2.1. BLE (1Mbps)

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

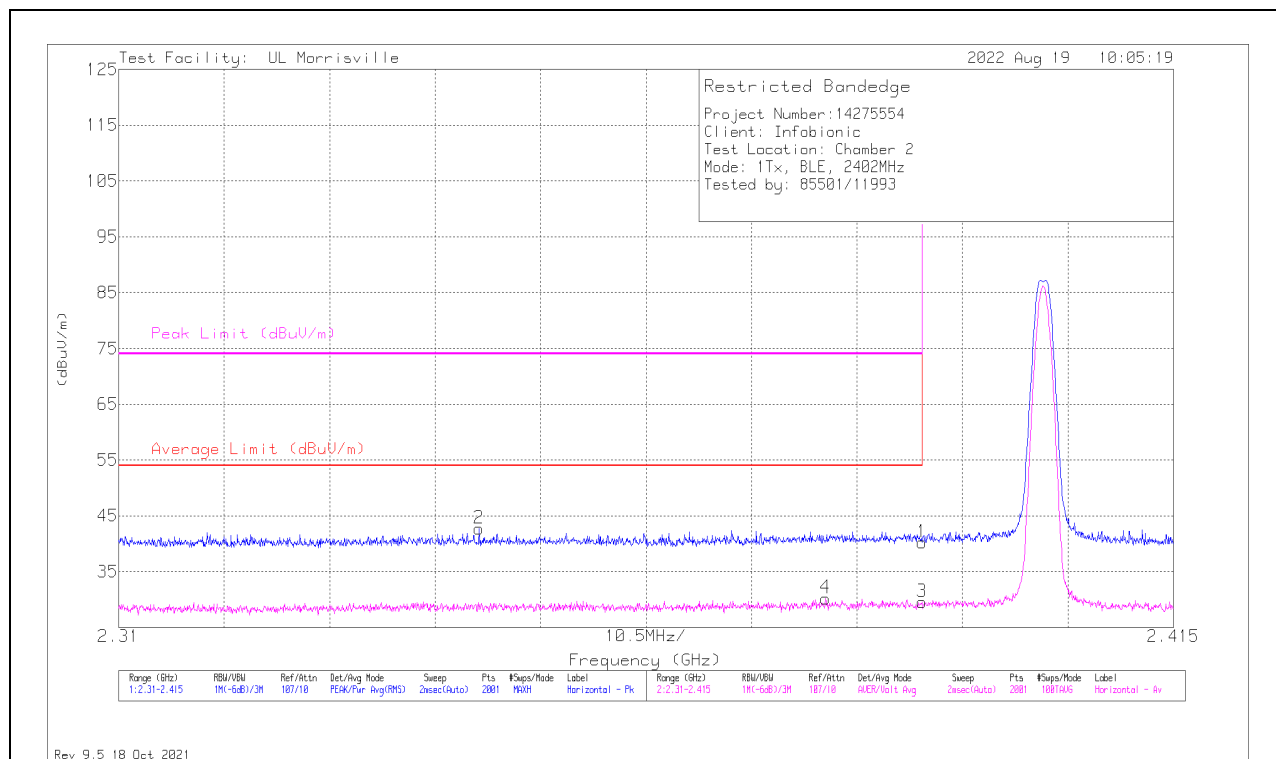

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.38996	32.07	Pk	32	-23.8	40.27	-	-	74	-33.73	192	111	H
2	*** 2.34586	34.77	Pk	31.9	-23.9	42.77	-	-	74	-31.23	192	111	H
3	*** 2.38996	21.38	ADV	32	-23.8	29.58	54	-24.42	-	-	192	111	H
4	*** 2.38035	22.04	ADV	32.1	-23.9	30.24	54	-23.76	-	-	192	111	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

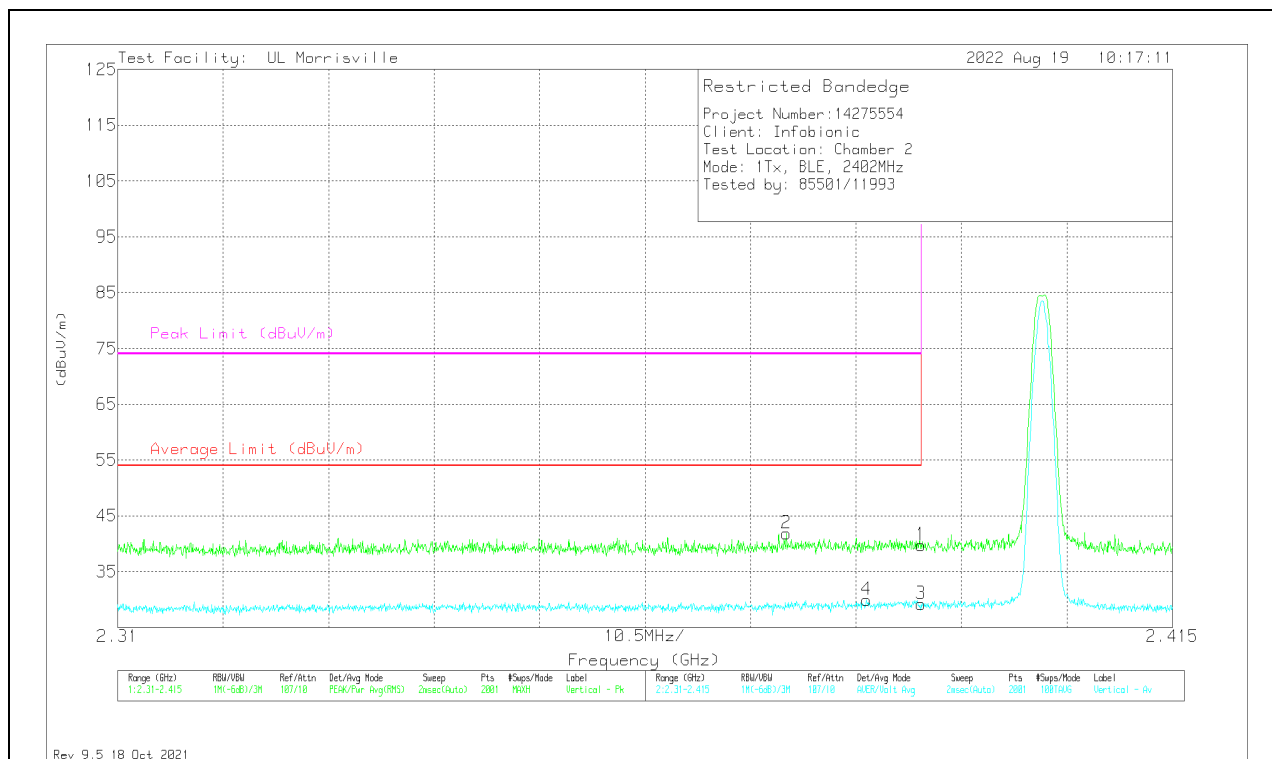

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.38996	31.54	Pk	32	-23.8	39.74	-	-	74	-34.26	319	394	V
2	* ** 2.37657	33.67	Pk	32.1	-23.9	41.87	-	-	74	-32.13	319	394	V
3	* ** 2.38996	20.99	ADV	32	-23.8	29.19	54	-24.81	-	-	319	394	V
4	* ** 2.38455	21.61	ADV	32.1	-23.8	29.91	54	-24.09	-	-	319	394	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

BANDEGE (HIGH CHANNEL)

HORIZONTAL RESULT

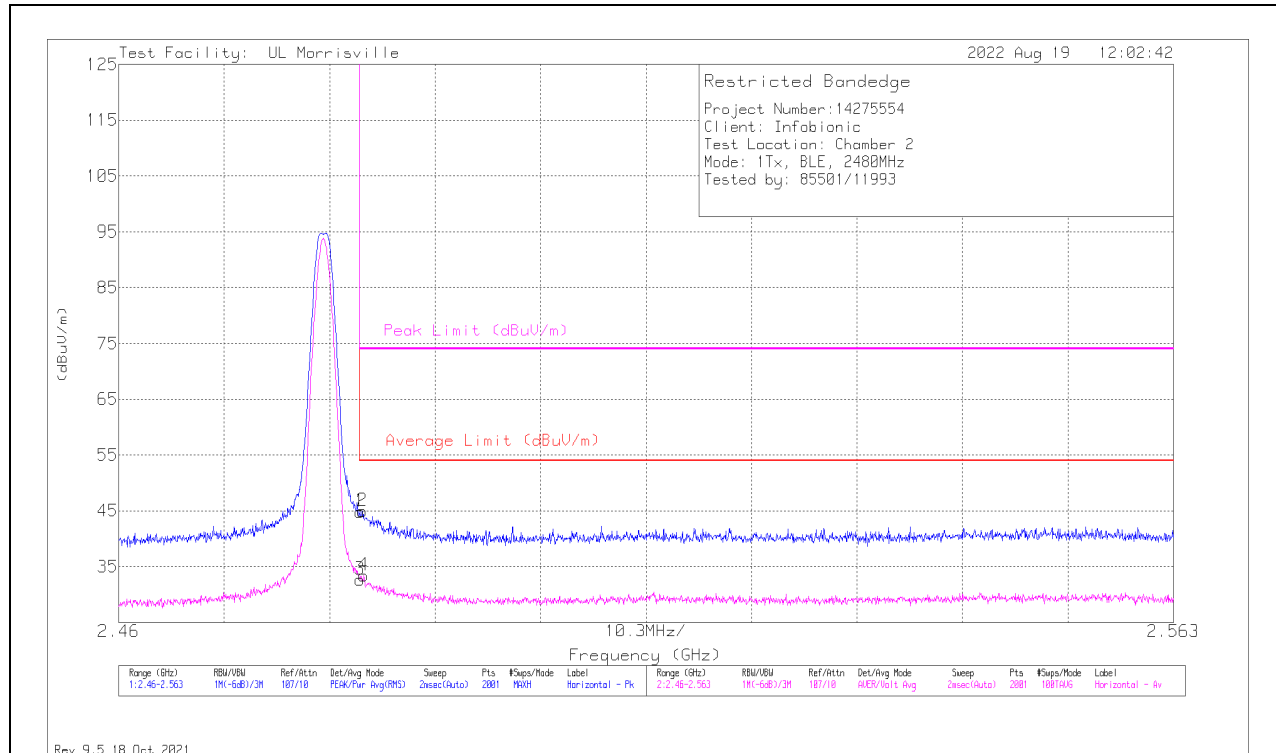

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.48354	36.87	Pk	32.3	-24.3	44.87	-	-	74	-29.13	67	115	H
2	* ** 2.48379	37	Pk	32.3	-24.4	44.9	-	-	74	-29.1	67	115	H
3	* ** 2.48354	24.67	ADV	32.3	-24.3	32.67	54	-21.33	-	-	67	115	H
4	* ** 2.48395	25.51	ADV	32.3	-24.4	33.41	54	-20.59	-	-	67	115	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

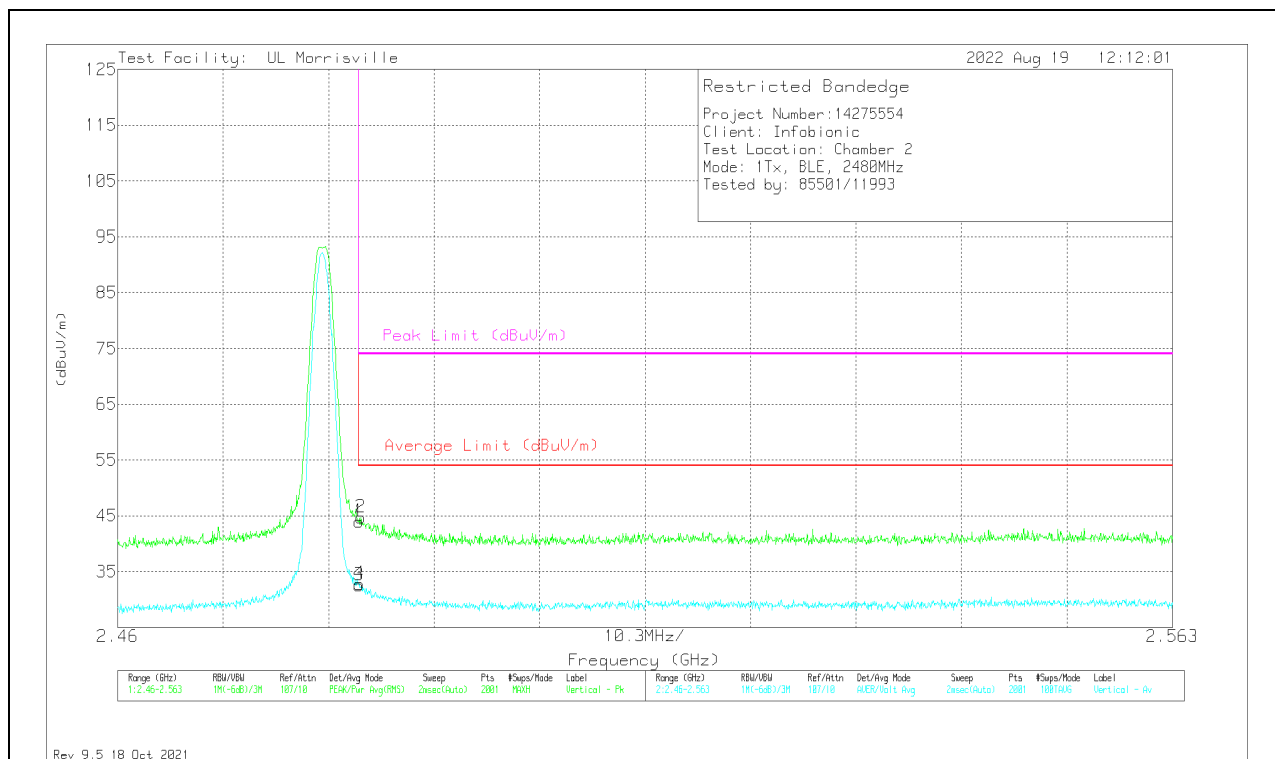

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.48354	35.92	Pk	32.3	-24.3	43.92	-	-	74	-30.08	298	374	V
2	* ** 2.48374	36.69	Pk	32.3	-24.3	44.69	-	-	74	-29.31	298	374	V
3	* ** 2.48354	24.57	ADV	32.3	-24.3	32.57	54	-21.43	-	-	298	374	V
4	* ** 2.48359	24.78	ADV	32.3	-24.3	32.78	54	-21.22	-	-	298	374	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band



** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

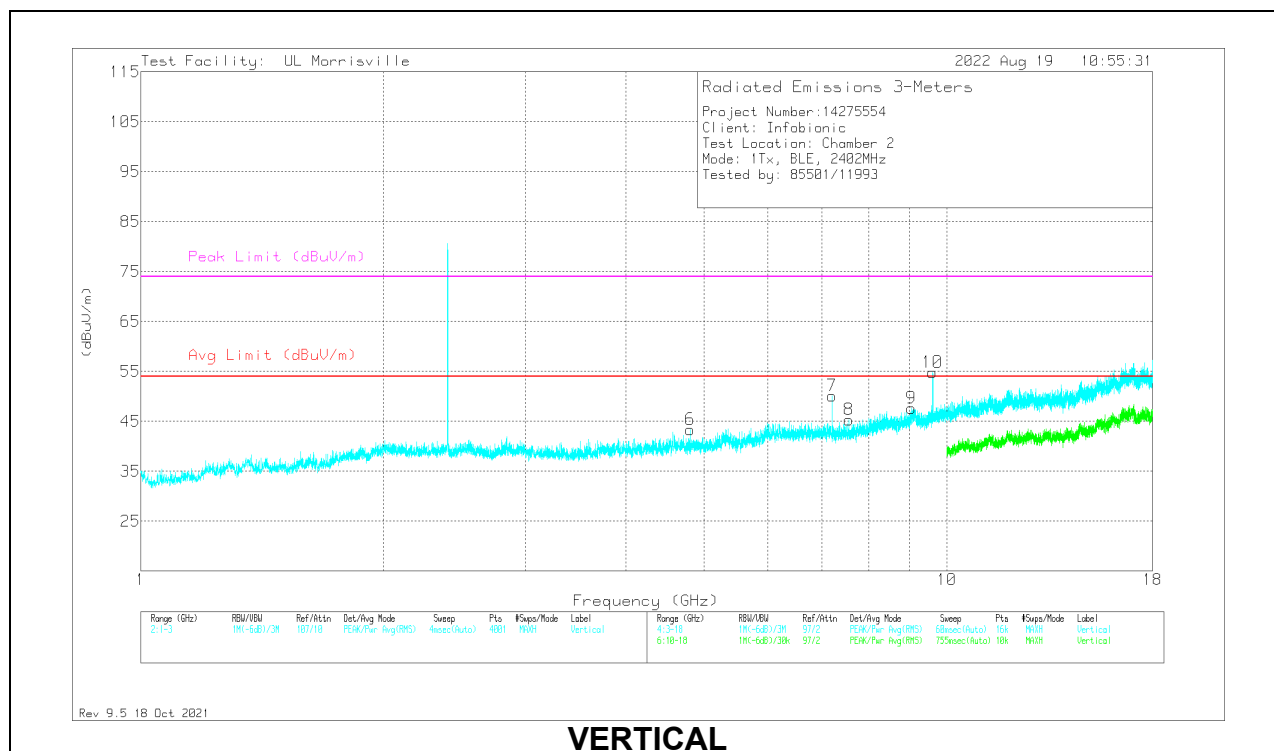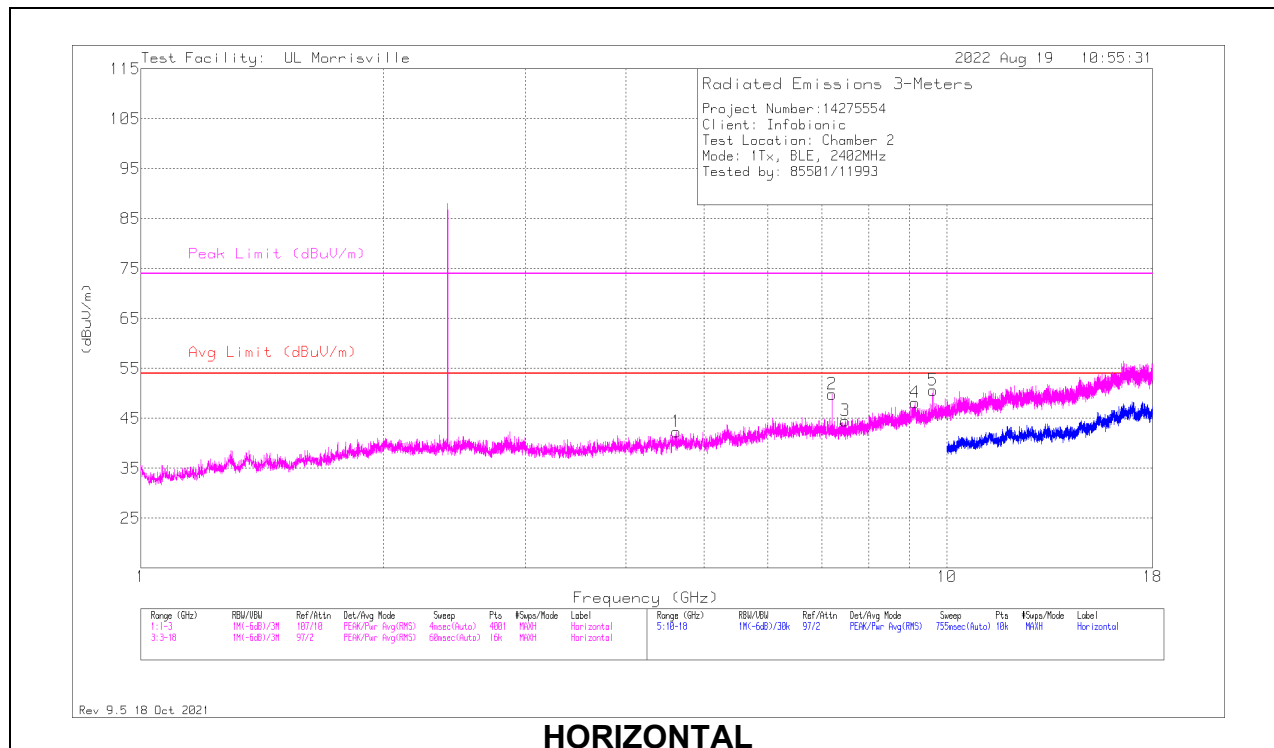

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 4.61531	39.57	Pk	34.2	-31.4	42.37	54	-11.63	74	-31.63	0-360	200	H
3	* ** 7.48125	36.44	Pk	35.7	-27.6	44.54	54	-9.46	74	-29.46	0-360	200	H
4	* ** 9.13758	38.14	PK2	36.2	-24.9	49.44	-	-	74	-24.56	196	233	H
	* ** 9.13705	25.59	ADV	36.2	-25	36.79	54	-17.21	-	-	196	233	H
6	* ** 4.80375	40.22	Pk	34	-30.9	43.32	54	-10.68	74	-30.68	0-360	101	V
8	* ** 7.55719	36.79	Pk	35.7	-27.2	45.29	54	-8.71	74	-28.71	0-360	101	V
9	* ** 9.03938	37.56	Pk	36	-25.9	47.66	54	-6.34	74	-26.34	0-360	101	V
7	7.20469	42.58	Pk	35.6	-28.1	50.08	-	-	-	-	0-360	101	V
2	7.20656	42.41	Pk	35.6	-28.1	49.91	-	-	-	-	0-360	101	H
10	9.60656	43.18	Pk	36.7	-25.1	54.78	-	-	-	-	0-360	101	V
5	9.60844	38.99	Pk	36.7	-25.1	50.59	-	-	-	-	0-360	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band



** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

PK2 - Maximum Peak

ADV - Linear Voltage Average

MID CHANNEL RESULTS

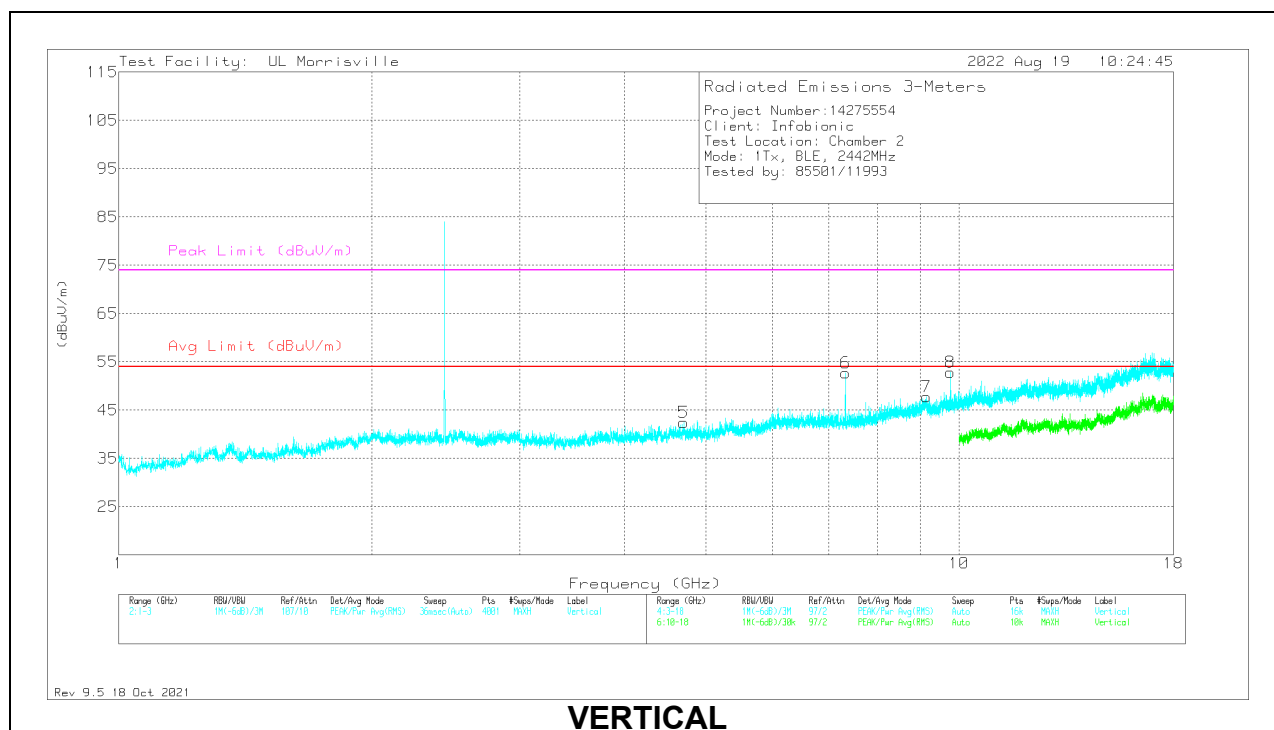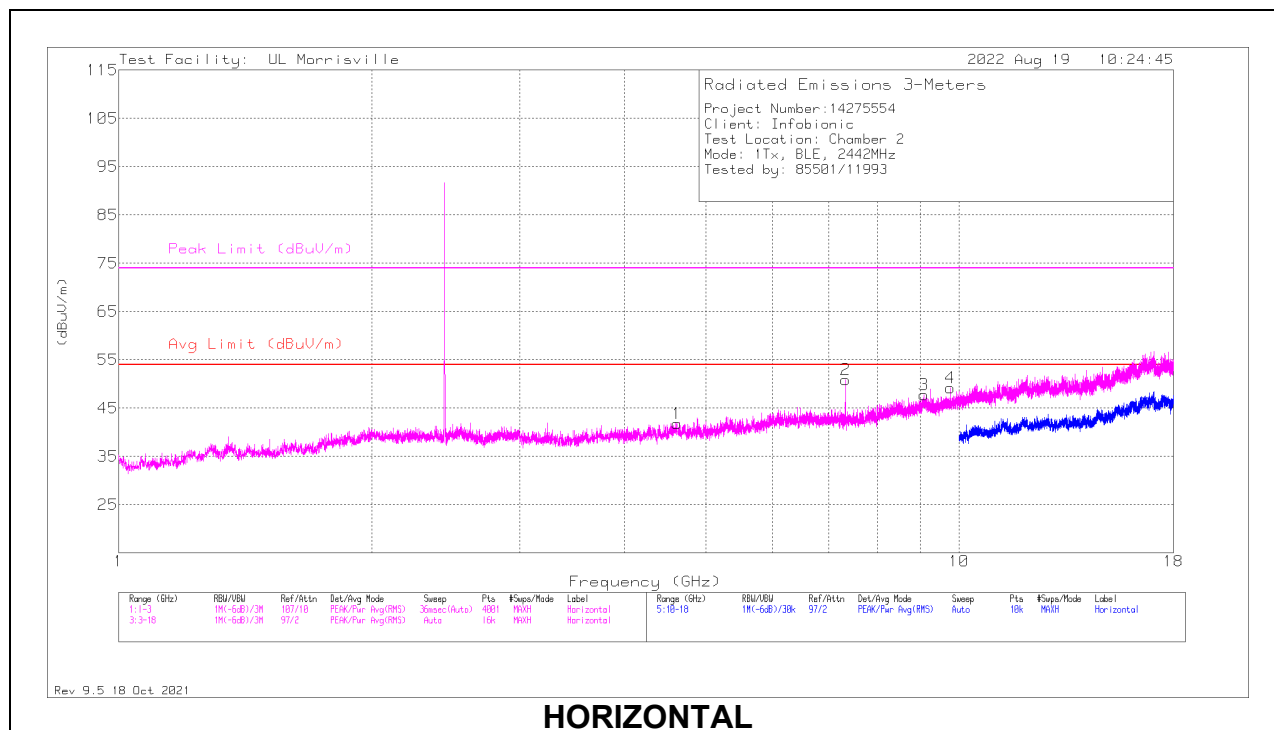

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 4.61813	38.87	Pk	34.2	-31.3	41.77	54	-12.23	74	-32.23	0-360	199	H
2	* ** 7.32528	43.95	PK2	35.6	-27	52.55	-	-	74	-21.45	85	101	H
	* ** 7.3265	36.46	ADV	35.6	-27.1	44.96	54	-9.04	-	-	85	101	H
3	* ** 9.08344	37.23	Pk	36.1	-25.5	47.83	54	-6.17	74	-26.17	0-360	199	H
5	* ** 4.7025	39.2	Pk	34.1	-30.9	42.4	54	-11.6	74	-31.6	0-360	101	V
6	* ** 7.32674	45.99	PK2	35.6	-27.1	54.49	-	-	74	-19.51	26	105	V
	* ** 7.32663	38.81	ADV	35.6	-27.1	47.31	54	-6.69	-	-	26	105	V
7	* ** 9.14438	36.92	Pk	36.2	-25.3	47.82	54	-6.18	74	-26.18	0-360	101	V
4	9.76875	37.45	Pk	36.8	-25	49.25	-	-	-	-	0-360	101	H
8	9.76875	41.04	Pk	36.8	-25	52.84	-	-	-	-	0-360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band



** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

PK2 - Maximum Peak

ADV - Linear Voltage Average

HIGH CHANNEL RESULTS

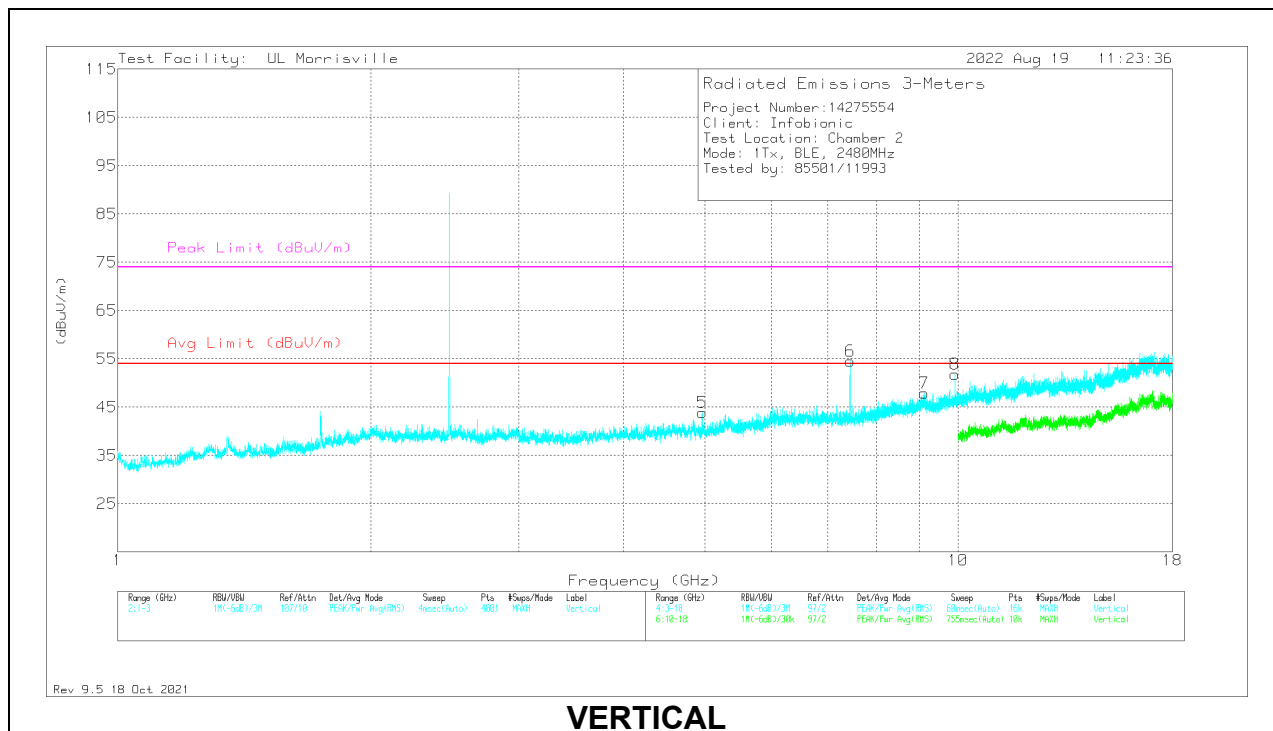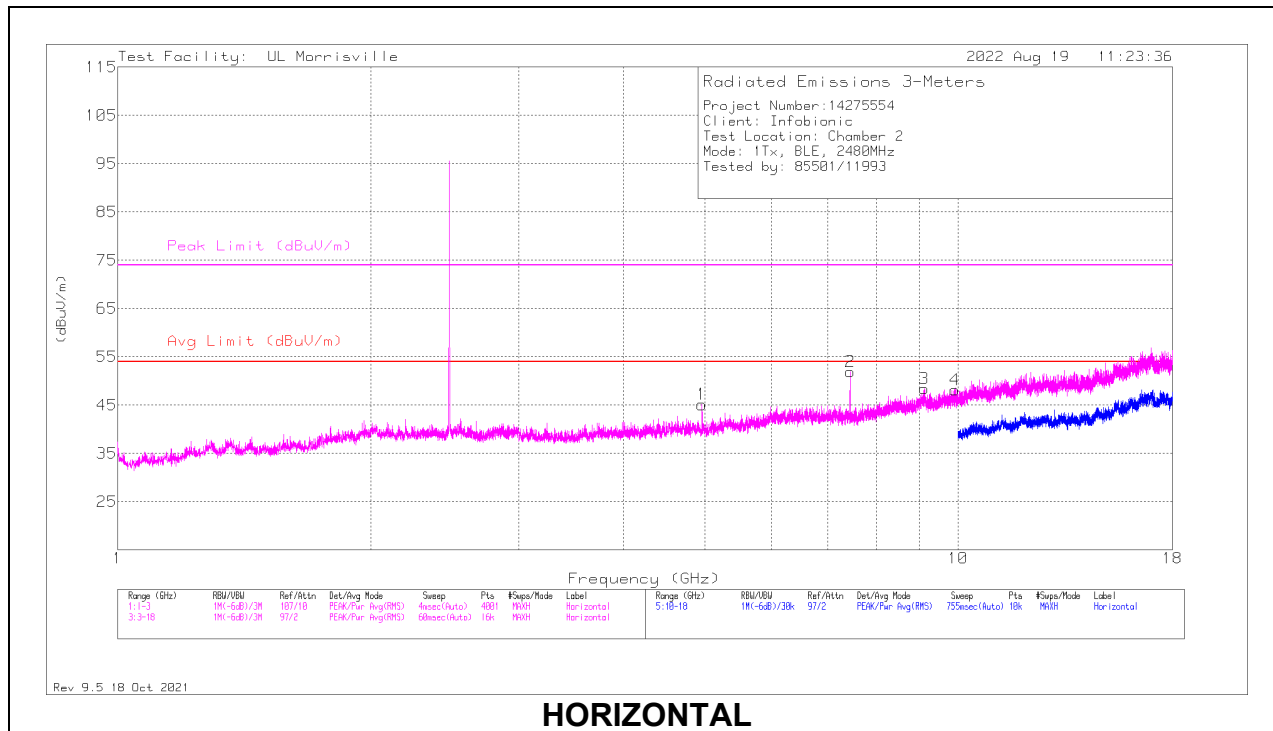

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 4.95938	42.12	Pk	33.9	-30.9	45.12	54	-8.88	74	-28.88	0-360	101	H
2	* ** 7.44062	45.86	PK2	35.6	-27.5	53.96	-	-	74	-20.04	299	101	H
	* ** 7.43941	38.58	ADV	35.6	-27.5	46.68	54	-7.32	-	-	299	101	H
3	* ** 9.12279	37.89	PK2	36.2	-25.2	48.89	-	-	74	-25.11	168	226	H
	* ** 9.12291	25.41	ADV	36.2	-25.2	36.41	54	-17.59	-	-	168	226	H
5	* ** 4.96031	40.84	Pk	33.9	-30.8	43.94	54	-10.06	74	-30.06	0-360	101	V
6	* ** 7.43916	46.17	PK2	35.6	-27.5	54.27	-	-	74	-19.73	1	112	V
	* ** 7.43928	38.66	ADV	35.6	-27.5	46.76	54	-7.24	-	-	1	112	V
7	* ** 9.11625	37.11	Pk	36.2	-25.4	47.91	54	-6.09	74	-26.09	0-360	199	V
8	9.91875	39.85	Pk	37	-25.1	51.75	-	-	-	-	0-360	101	V
4	9.92063	36.18	Pk	37	-25	48.18	-	-	-	-	0-360	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK2 - Maximum Peak

ADV - Linear Voltage Average

10.2.1. BLE (2Mbps)

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

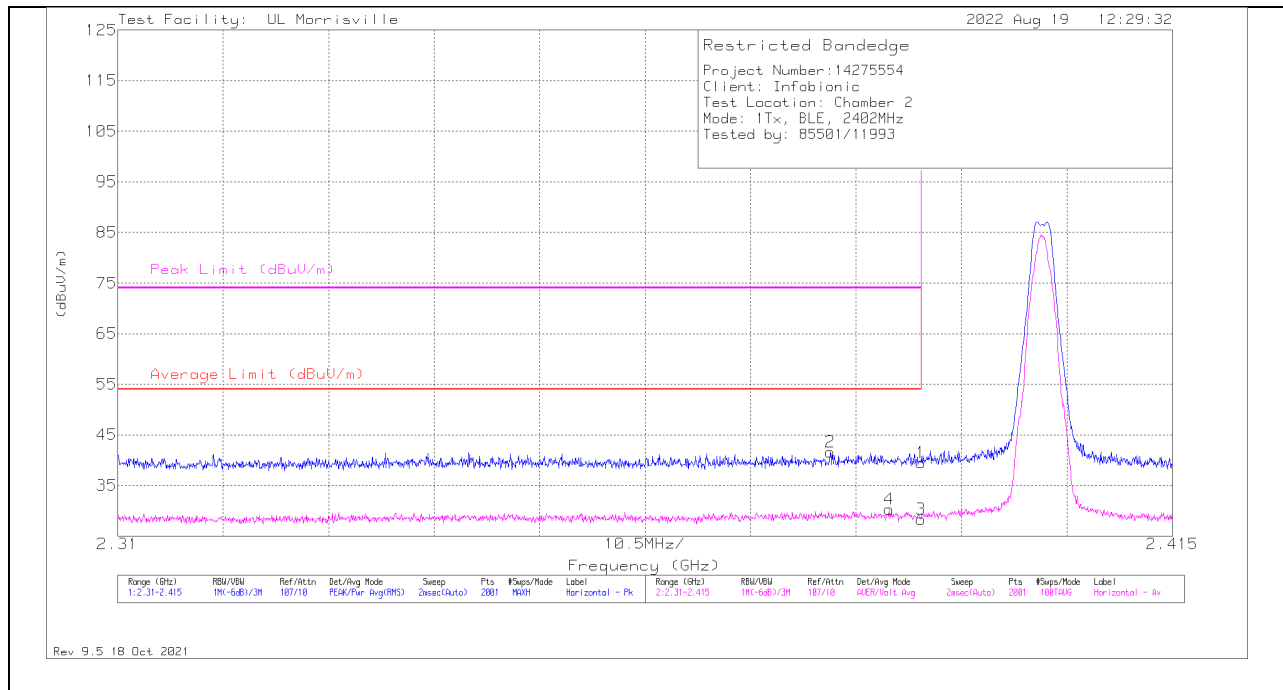

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.38996	31.31	Pk	32	-23.8	39.51	-	-	74	-34.49	88	122	H
2	* ** 2.38093	33.36	Pk	32.1	-23.9	41.56	-	-	74	-32.44	88	122	H
3	* ** 2.38996	20.09	ADV	32	-23.8	28.29	54	-25.71	-	-	88	122	H
4	* ** 2.38681	22.05	ADV	32	-23.8	30.25	54	-23.75	-	-	88	122	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

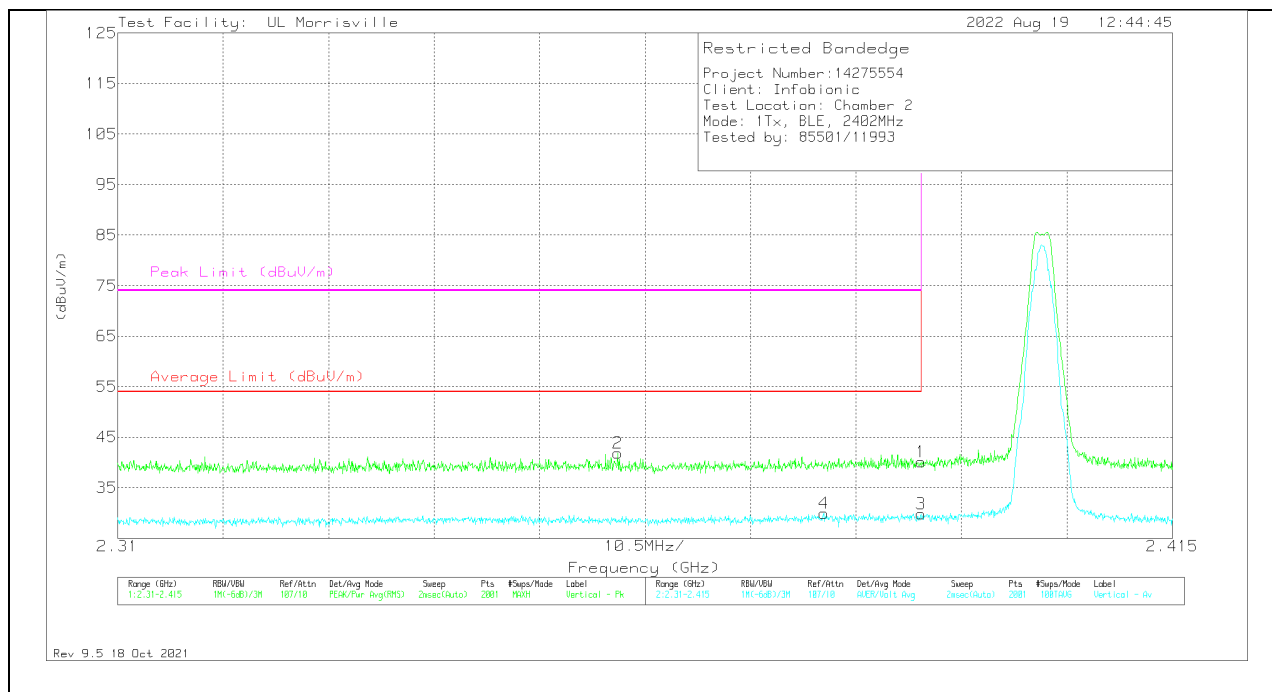

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.38996	31.92	Pk	32	-23.8	40.12	-	-	74	-33.88	294	315	V
2	* ** 2.35977	33.91	Pk	31.9	-24	41.81	-	-	74	-32.19	294	315	V
3	* ** 2.38996	21.6	ADV	32	-23.8	29.8	54	-24.2	-	-	294	315	V
4	* ** 2.3803	21.72	ADV	32.1	-23.9	29.92	54	-24.08	-	-	294	315	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

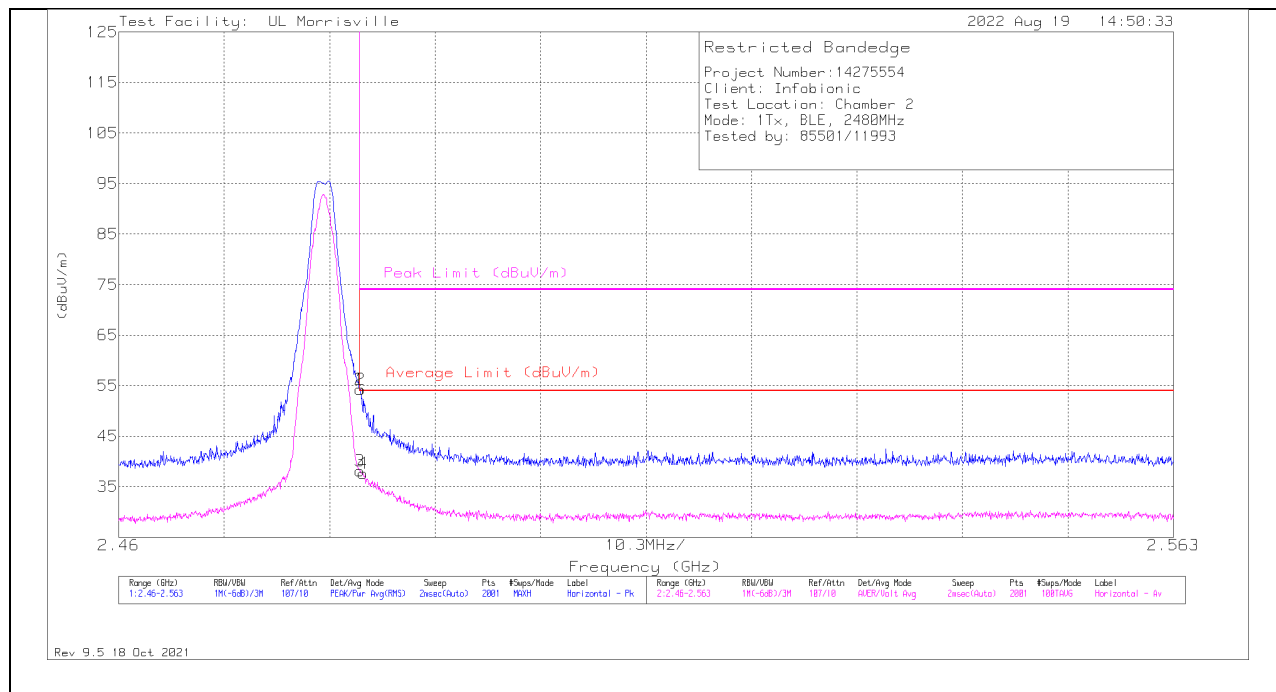

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.48354	46.26	Pk	32.3	-24.3	54.26	-	-	74	-19.74	51	115	H
2	* ** 2.48359	46.3	Pk	32.3	-24.3	54.3	-	-	74	-19.7	51	115	H
3	* ** 2.48354	30.16	ADV	32.3	-24.3	38.16	54	-15.84	-	-	51	114	H
4	* ** 2.48384	29.74	ADV	32.3	-24.4	37.64	54	-16.36	-	-	51	114	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

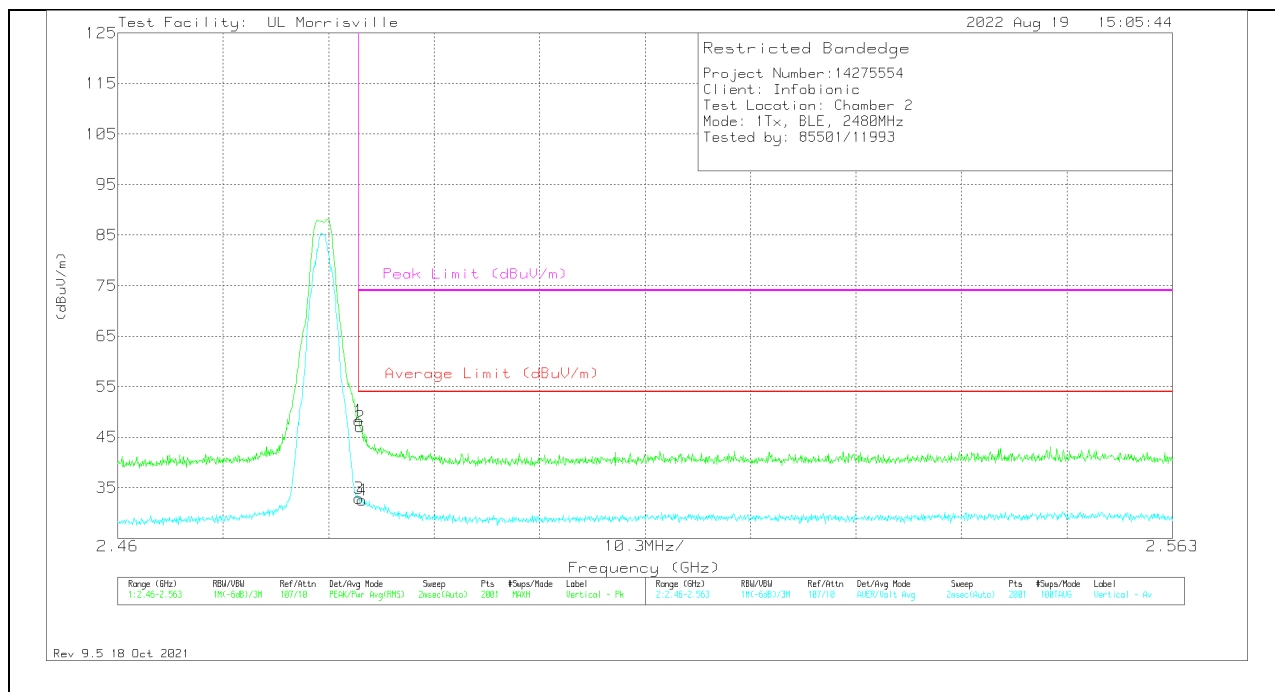

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.48354	40.29	Pk	32.3	-24.3	48.29	-	-	74	-25.71	358	347	V
2	* ** 2.48369	39.08	Pk	32.3	-24.3	47.08	-	-	74	-26.92	358	347	V
3	* ** 2.48354	24.9	ADV	32.3	-24.3	32.9	54	-21.1	-	-	358	347	V
4	* ** 2.48384	24.67	ADV	32.3	-24.4	32.57	54	-21.43	-	-	358	347	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band



** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

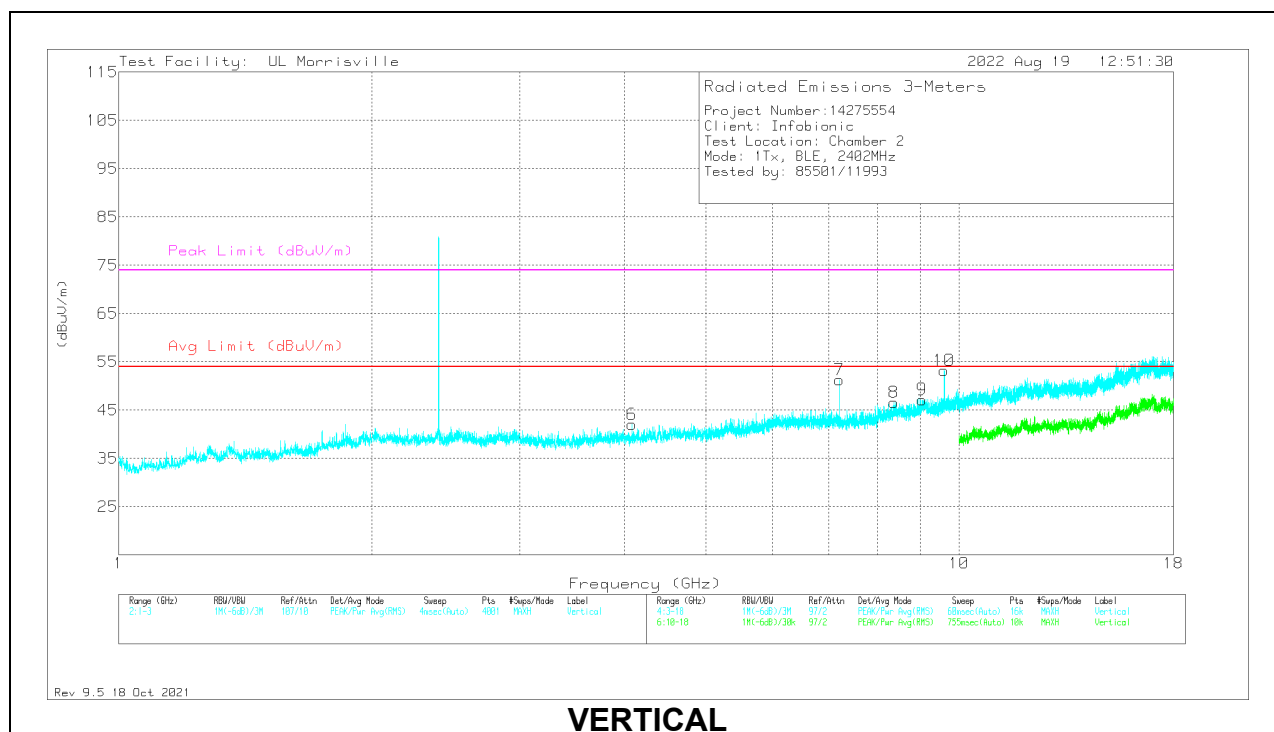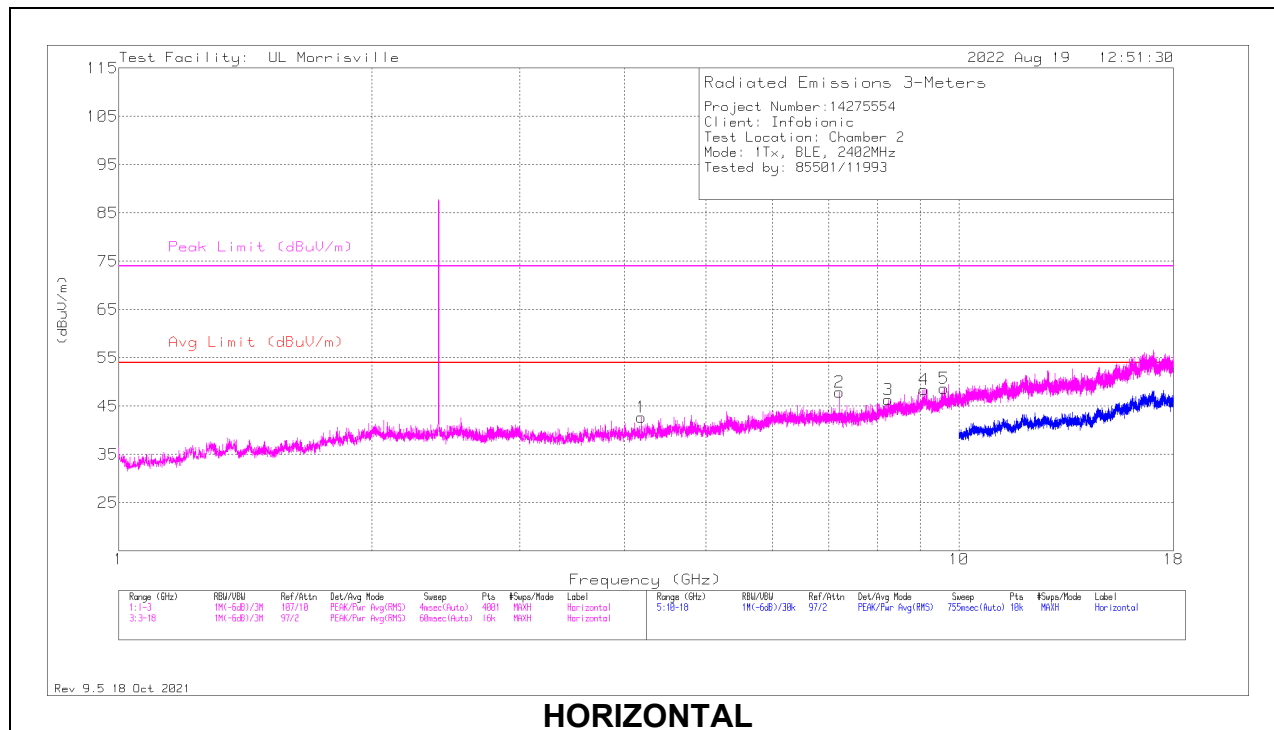

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 4.19063	40.39	Pk	33.2	-30.9	42.69	54	-11.31	74	-31.31	0-360	200	H
3	* ** 8.23219	37.58	Pk	35.8	-27	46.38	54	-7.62	74	-27.62	0-360	200	H
4	* ** 9.08718	38.45	PK2	36.1	-25.3	49.25	-	-	74	-24.75	121	253	H
	* ** 9.0909	25.79	ADV	36.1	-25.3	36.59	54	-17.41	-	-	121	253	H
6	* ** 4.08188	40.77	Pk	33.4	-32.1	42.07	54	-11.93	74	-31.93	0-360	200	V
8	* ** 8.36063	37.41	Pk	35.8	-26.6	46.61	54	-7.39	74	-27.39	0-360	200	V
9	* ** 9.04406	36.79	Pk	36	-25.6	47.19	54	-6.81	74	-26.81	0-360	101	V
2	7.2075	40.42	Pk	35.6	-28.1	47.92	-	-	-	-	0-360	101	H
7	7.2075	43.77	Pk	35.6	-28.1	51.27	-	-	-	-	0-360	101	V
5	9.60563	37.24	Pk	36.7	-25.2	48.74	-	-	-	-	0-360	101	H
10	9.60656	41.67	Pk	36.7	-25.1	53.27	-	-	-	-	0-360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band



** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

PK2 - Maximum Peak

ADV - Linear Voltage Average

MID CHANNEL RESULTS

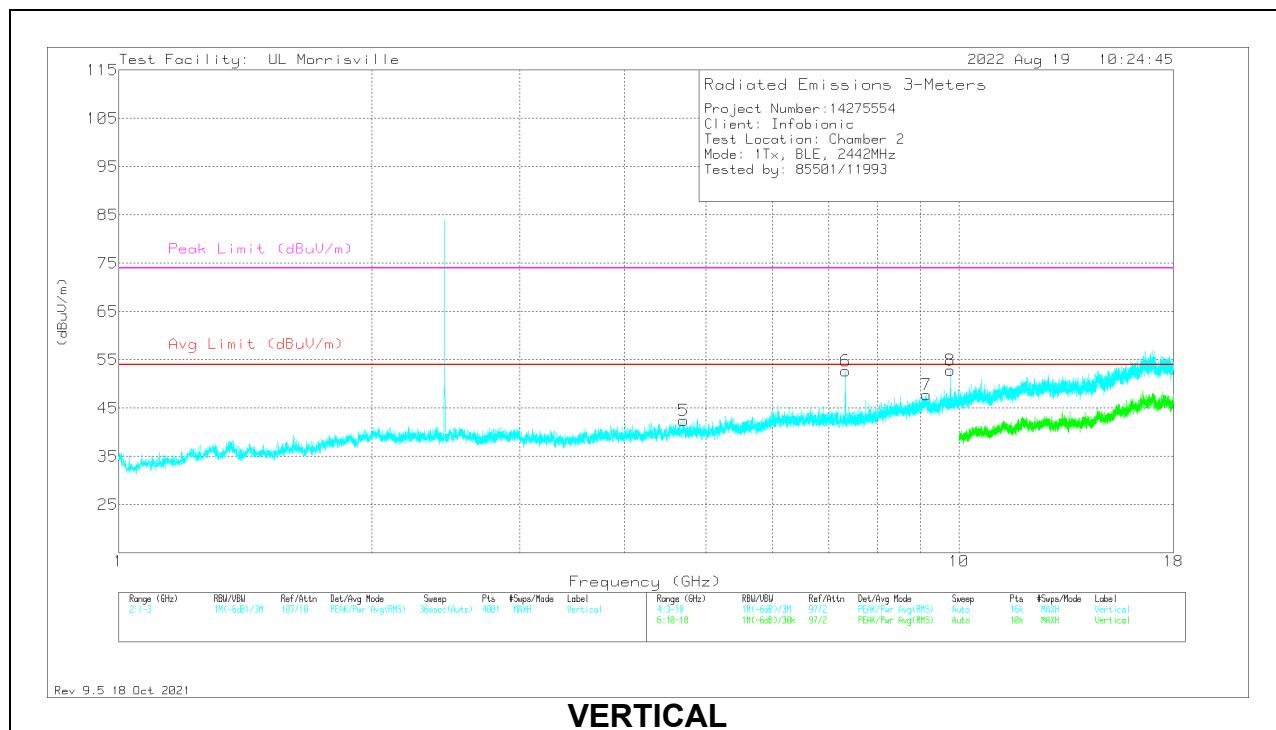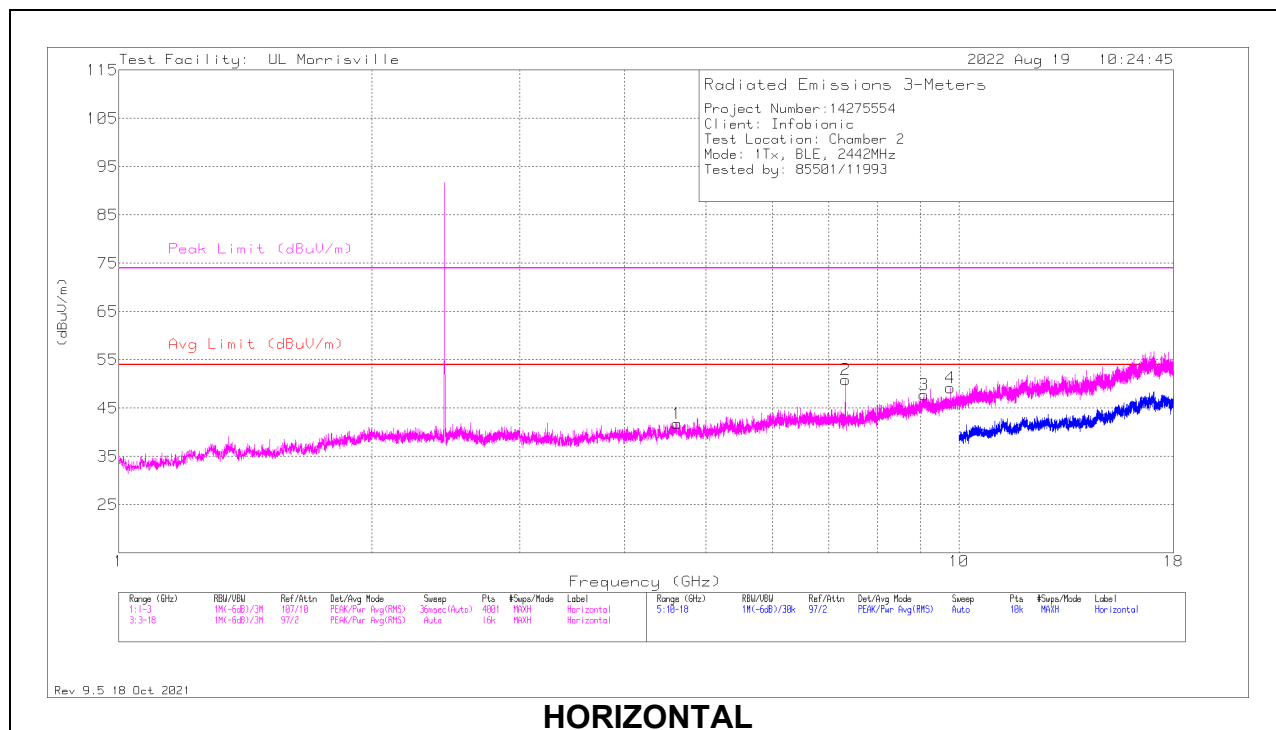

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 4.8825	39.89	Pk	33.9	-30.7	43.09	54	-10.91	74	-30.91	0-360	101	H
2	* ** 7.32756	44.3	PK2	35.6	-27.1	52.8	-	-	74	-21.2	298	120	H
	* ** 7.32728	35.94	ADV	35.6	-27.1	44.44	54	-9.56	-	-	298	120	H
3	* ** 9.09281	37.06	Pk	36.1	-25.3	47.86	54	-6.14	74	-26.14	0-360	199	H
5	* ** 4.88438	39.78	Pk	33.9	-30.6	43.08	54	-10.92	74	-30.92	0-360	199	V
6	* ** 7.32743	46.18	PK2	35.6	-27.1	54.68	-	-	74	-19.32	41	112	V
	* ** 7.32727	38.17	ADV	35.6	-27.1	46.67	54	-7.33	-	-	41	112	V
7	* ** 9.03094	38.11	Pk	36	-26.3	47.81	54	-6.19	74	-26.19	0-360	101	V
4	9.76594	36.73	Pk	36.8	-25	48.53	-	-	-	-	0-360	101	H
8	9.76969	40.92	Pk	36.8	-25.1	52.62	-	-	-	-	0-360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band



** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

PK2 - Maximum Peak

ADV - Linear Voltage Average

HIGH CHANNEL RESULTS

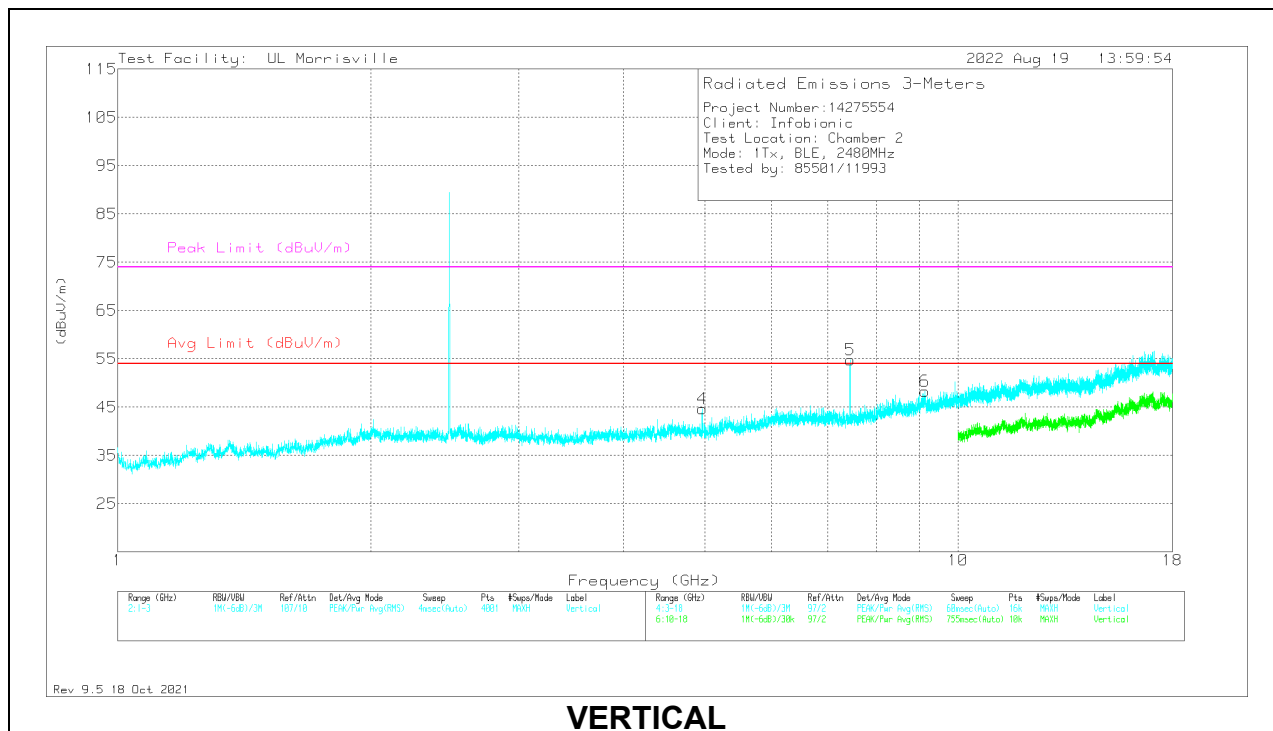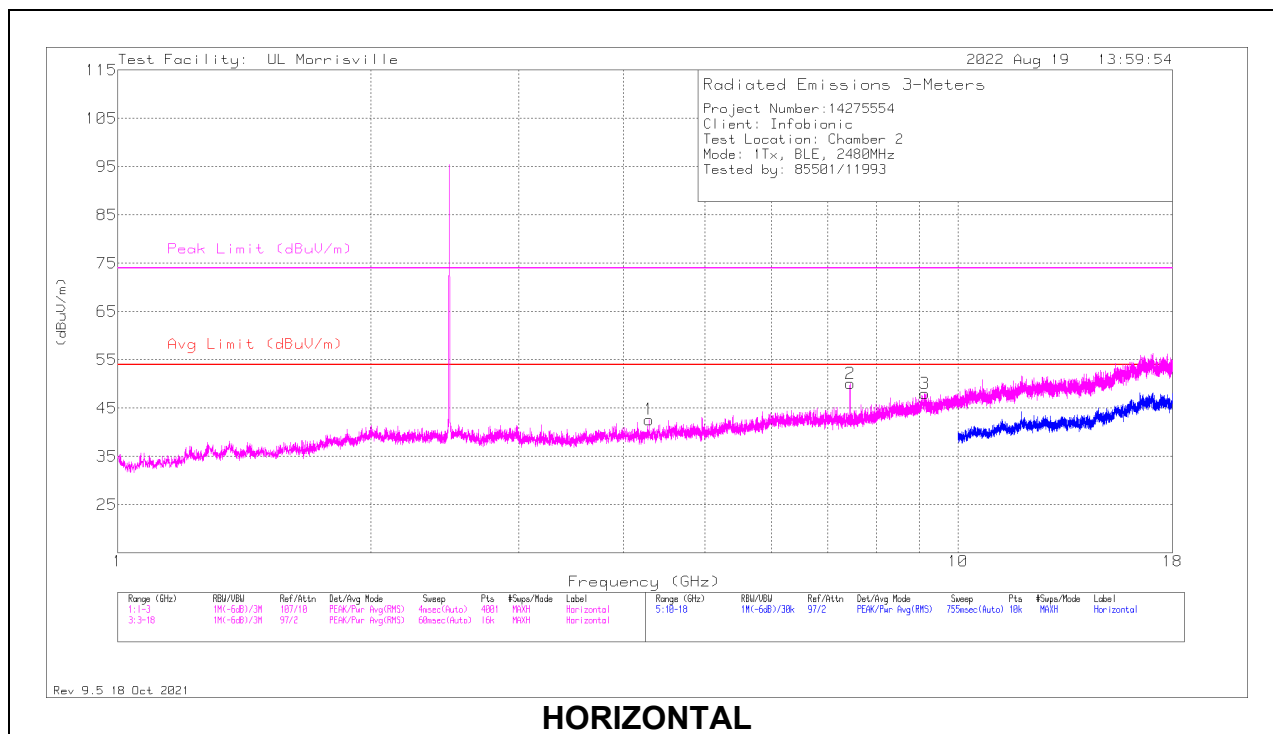

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 4.28906	40.05	Pk	33.4	-30.8	42.65	54	-11.35	74	-31.35	0-360	101	H
2	* ** 7.44146	44.95	PK2	35.6	-27.5	53.05	-	-	74	-20.95	314	106	H
	* ** 7.44133	36.46	ADV	35.6	-27.5	44.56	54	-9.44	-	-	314	106	H
3	* ** 9.13969	36.8	Pk	36.2	-25	48	54	-6	74	-26	0-360	199	H
4	* ** 4.96125	41.57	Pk	33.9	-30.8	44.67	54	-9.33	74	-29.33	0-360	101	V
5	* ** 7.44152	47.48	PK2	35.6	-27.5	55.58	-	-	74	-18.42	16	107	V
	* ** 7.44105	40.09	ADV	35.6	-27.5	48.19	54	-5.81	-	-	16	107	V
6	* ** 9.13934	38.26	PK2	36.2	-24.9	49.56	-	-	74	-24.44	51	106	V
	* ** 9.13937	25.56	ADV	36.2	-24.9	36.86	54	-17.14	-	-	51	106	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK2 - Maximum Peak

ADV - Linear Voltage Average

10.3. WORST CASE BELOW 30MHZ

SPURIOUS EMISSIONS BELOW 30 MHz (WORST-CASE CONFIGURATION)

Note: All measurements were made at a test distance of 3m. The measured data was extrapolated from the test distance (3m) to the specification distance (300 m from 9-490 kHz and 30 m from 490 kHz – 30 MHz) to clearly show the relative levels of fundamental and spurious emissions and demonstrate compliance with the requirement that the level of any spurious emissions be below the level of the intentionally transmitted signal. The extrapolation factor for the limits were 40*Log (test distance / specification distance).

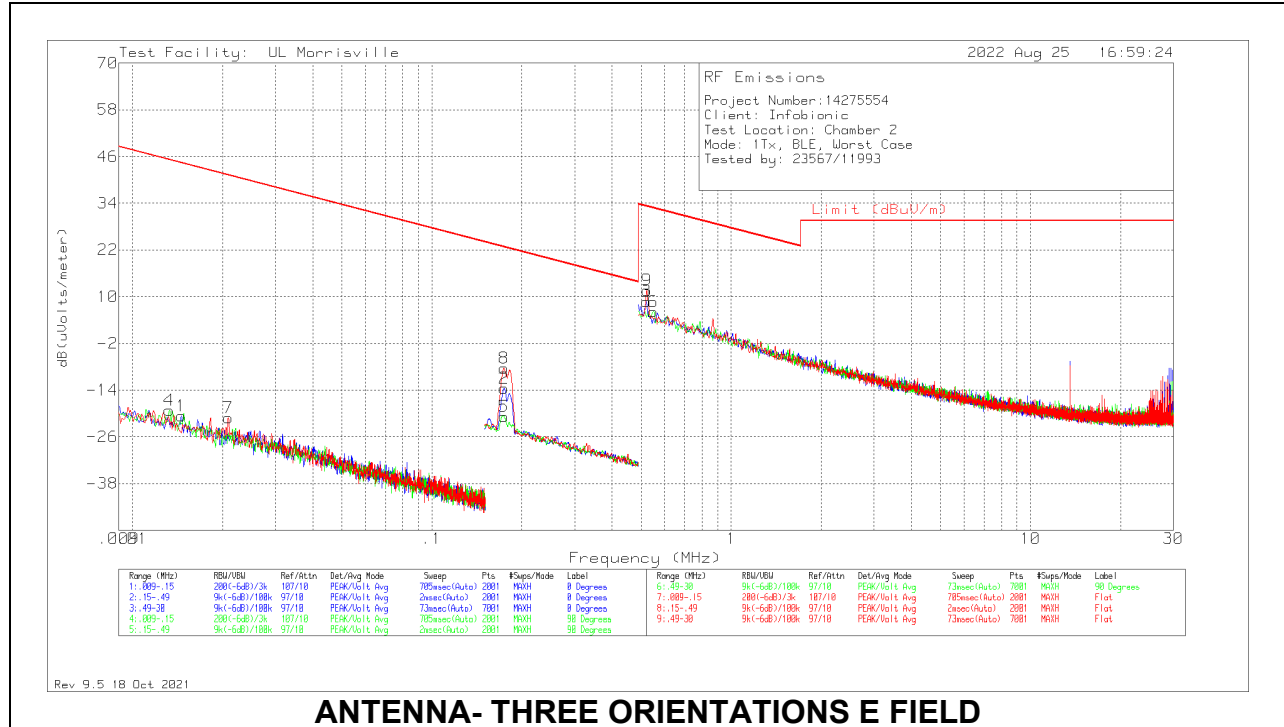

ANTENNA- THREE ORIENTATIONS E FIELD



Below 30MHz Data E FIELD

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AT0079 (dB/m)	Gain/Loss (dB)	Dist. Corr. Factor (dB)	Corrected Reading dB(uVolts/meter)	QP/AV Limit (dBuV/m)	PK Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Loop Angle
4	.01326	43.78	Pk	17	.1	-80	-19.12	45.15	65.15	-64.27	0-360	401	90 degs
1	.01454	42.88	Pk	16.4	.1	-80	-20.62	44.35	64.35	-64.97	0-360	401	0 degs
7	.02093	44.83	Pk	14	.1	-80	-21.07	41.19	61.19	-62.26	0-360	401	Flat
8	.17423	60.31	Pk	11.2	.1	-80	-8.39	22.78	42.78	-31.17	0-360	401	Flat
5	.17431	47.89	Pk	11.2	.1	-80	-20.81	22.78	42.78	-43.59	0-360	401	90 degs
2	.17448	55.14	Pk	11.2	.1	-80	-13.56	22.77	42.77	-36.33	0-360	401	0 degs
3	.51951	37.51	Pk	11.2	.1	-40	8.81	33.29	-	-24.48	0-360	401	0 degs
9	.52373	40.4	Pk	11.2	.1	-40	11.7	33.22	-	-21.52	0-360	401	Flat
6	.54902	34.79	Pk	11.2	.1	-40	6.09	32.81	-	-26.72	0-360	401	90 degs

Pk - Peak detector

10.4. WORST CASE BELOW 1 GHZ

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

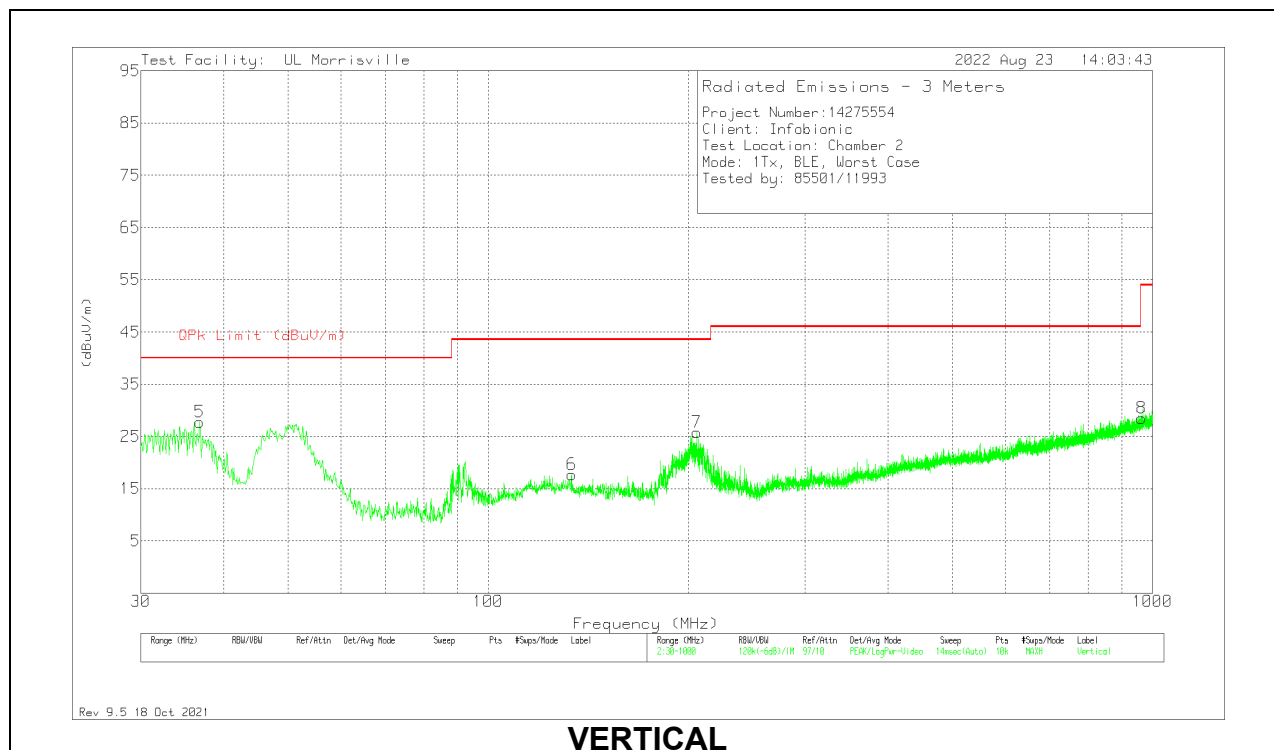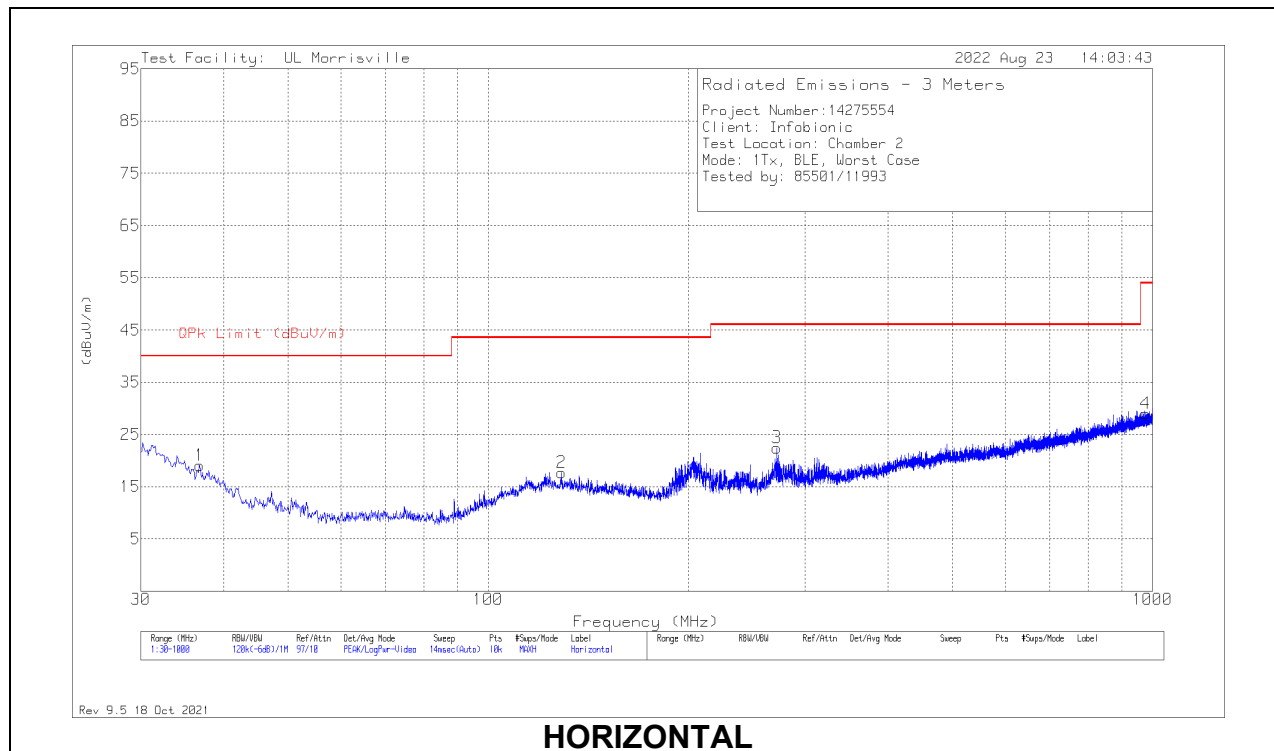

Below 1GHz Data

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AT0073 (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* ** 128.94	28.09	Pk	19.8	-30.2	17.69	43.52	-25.83	0-360	101	H
3	* ** 272.112	32.26	Pk	19.3	-29.1	22.46	46.02	-23.56	0-360	101	H
4	* ** 976.235	24.4	Pk	29.1	-24.5	29	53.97	-24.97	0-360	299	H
6	* ** 133.499	28.27	Pk	19.6	-30.2	17.67	43.52	-25.85	0-360	299	V
8	* ** 963.334	24.34	Pk	29.1	-24.9	28.54	53.97	-25.43	0-360	101	V
1	36.79	28.1	Pk	22.2	-31.3	19	40	-21	0-360	199	H
5	36.79	36.89	Pk	22.2	-31.3	27.79	40	-12.21	0-360	101	V
7	206.055	38.81	Pk	16.6	-29.6	25.81	43.52	-17.71	0-360	101	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

10.5. WORST CASE 18-26 GHZ

SPURIOUS EMISSIONS 18-26 GHz (WORST-CASE CONFIGURATION)

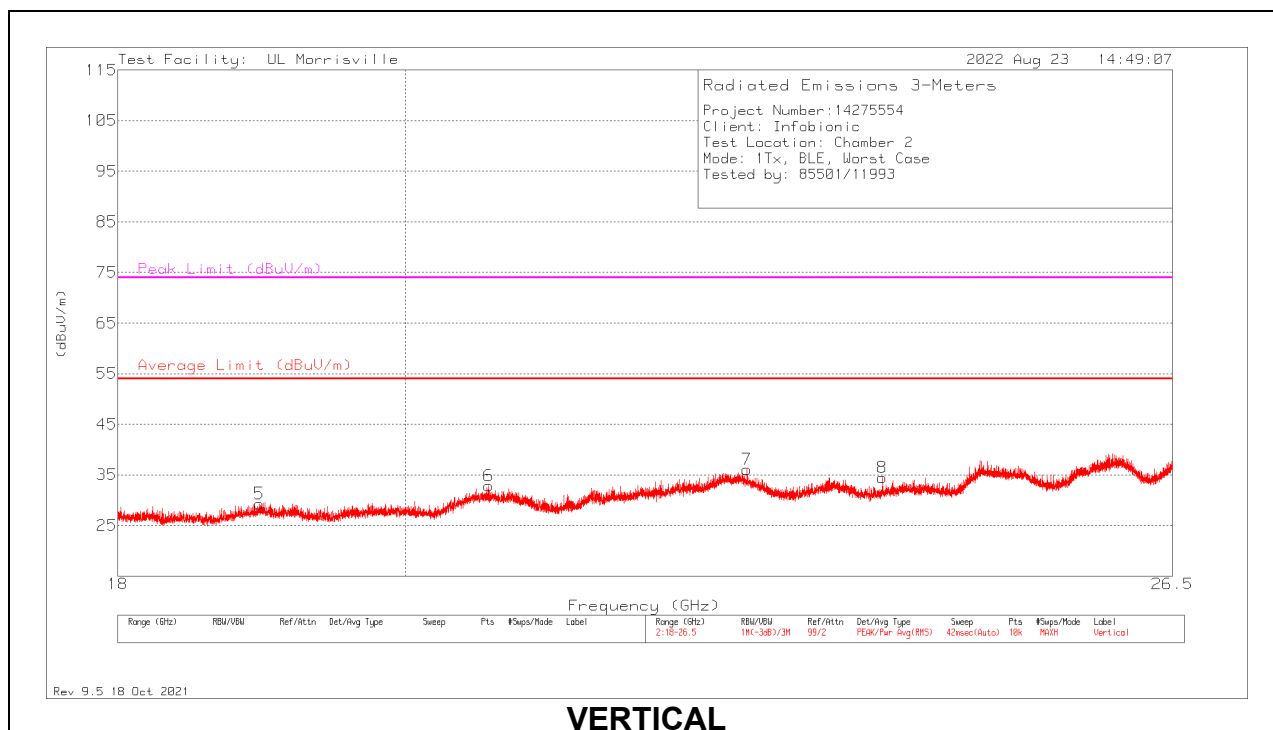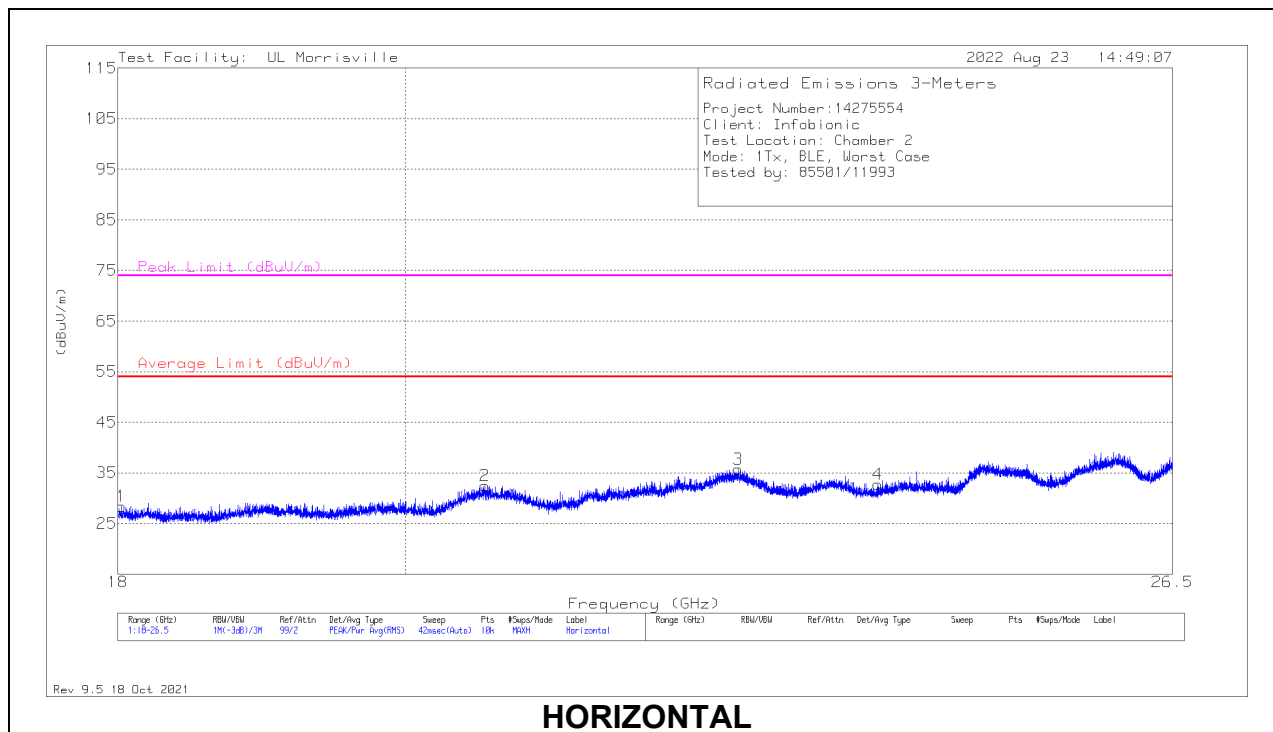

18 – 26GHz Data

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0063 (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 18.0238	33.85	Pk	33.2	-38.7	28.35	54	-25.65	74	-45.65	0-360	199	H
2	* ** 20.59479	37.11	Pk	33.9	-38.5	32.51	54	-21.49	74	-41.49	0-360	149	H
3	* ** 22.59889	37.47	Pk	36.3	-38.1	35.67	54	-18.33	74	-38.33	0-360	199	H
4	* ** 23.78877	35.4	Pk	34.9	-37.6	32.7	54	-21.3	74	-41.3	0-360	250	H
5	* ** 18.95785	34.3	Pk	33.3	-38.3	29.3	54	-24.7	74	-44.7	0-360	299	V
6	* ** 20.62114	37.43	Pk	33.9	-38.5	32.83	54	-21.17	74	-41.17	0-360	250	V
7	* ** 22.66943	38.03	Pk	36.1	-38.1	36.03	54	-17.97	74	-37.97	0-360	299	V
8	* ** 23.82617	37.12	Pk	34.9	-37.6	34.42	54	-19.58	74	-39.58	0-360	299	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

11. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)
RSS-Gen 8.8

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both lines.

RESULTS

11.1.1. AC Power Line Norm


LINE 1 RESULTS

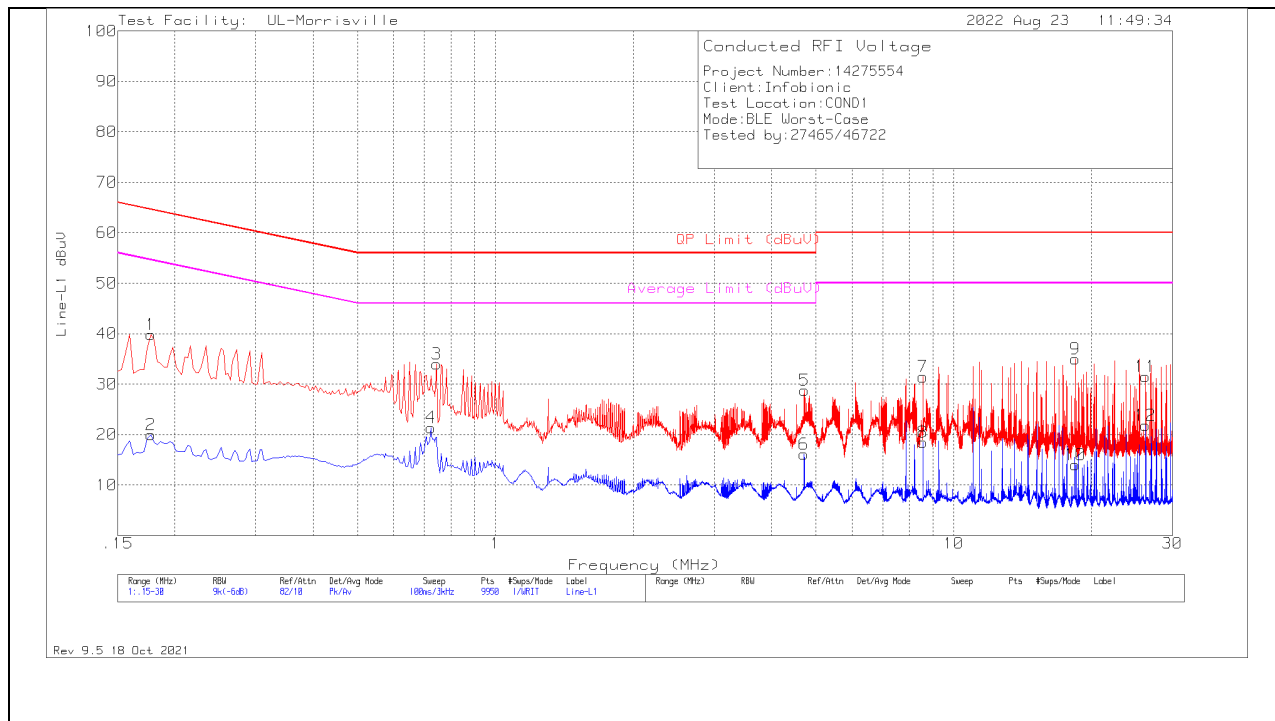

Range 1: Line-L1 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VCF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
1	.177	29.83	Pk	.2	9.8	39.83	64.63	-24.8	-	-
2	.177	10	Av	.2	9.8	20	-	-	54.63	-34.63
4	.723	11.58	Av	0	9.8	21.38	-	-	46	-24.62
3	.744	24.18	Pk	0	9.8	33.98	56	-22.02	-	-
6	4.716	6.26	Av	0	9.9	16.16	-	-	46	-29.84
5	4.719	18.86	Pk	0	9.9	28.76	56	-27.24	-	-
7	8.574	21.34	Pk	.1	10	31.44	60	-28.56	-	-
8	8.574	8.33	Av	.1	10	18.43	-	-	50	-31.57
9	18.435	24.76	Pk	.1	10.1	34.96	60	-25.04	-	-
10	18.435	3.82	Av	.1	10.1	14.02	-	-	50	-35.98
11	26.217	21.05	Pk	.3	10.2	31.55	60	-28.45	-	-
12	26.217	11.27	Av	.3	10.2	21.77	-	-	50	-28.23

Pk - Peak detector
Av - Average detection

LINE 2 RESULTS

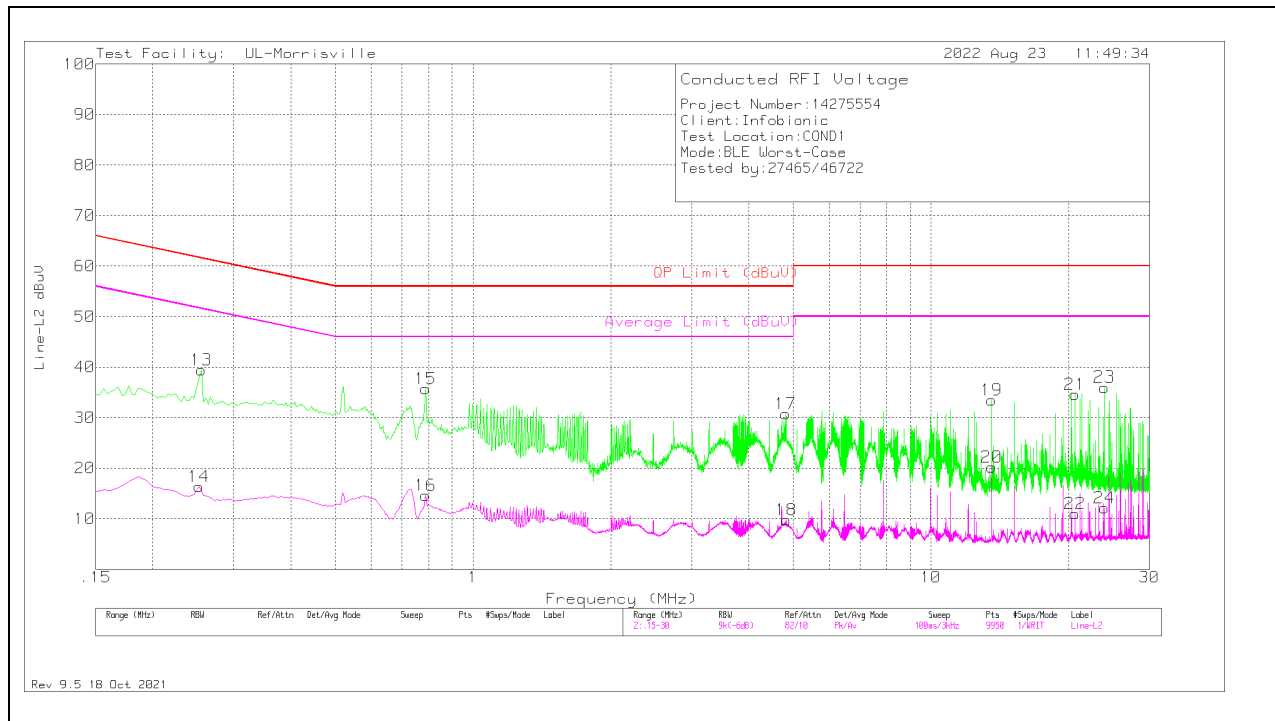

Range 2: Line-L2 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VCF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
14	.252	6.42	Av	.1	9.8	16.32	-	-	51.69	-35.37
13	.255	29.57	Pk	.1	9.8	39.47	61.59	-22.12	-	-
15	.789	25.87	Pk	0	9.8	35.67	56	-20.33	-	-
16	.789	4.79	Av	0	9.8	14.59	-	-	46	-31.41
17	4.812	20.91	Pk	0	9.9	30.81	56	-25.19	-	-
18	4.83	-15	Av	0	9.9	9.75	-	-	46	-36.25
20	13.56	10.1	Av	.1	10	20.2	-	-	50	-29.8
19	13.563	23.38	Pk	.1	10	33.48	60	-26.52	-	-
21	20.622	24.33	Pk	.2	10.1	34.63	60	-25.37	-	-
22	20.622	.7	Av	.2	10.1	11	-	-	50	-39
23	23.91	25.63	Pk	.2	10.2	36.03	60	-23.97	-	-
24	23.91	1.78	Av	.2	10.2	12.18	-	-	50	-37.82

Pk - Peak detector
Av - Average detection

12. SETUP PHOTOS

Please refer to 14275554-EP1 for setup photos.

END OF TEST REPORT