

Report No.: AGC03773220301FE05 Page 76 of 124






Report No.: AGC03773220301FE05 Page 77 of 124

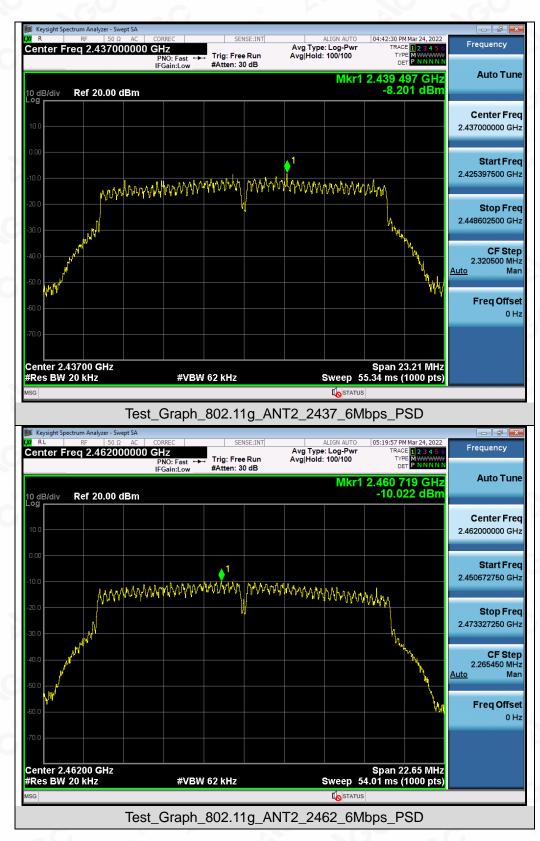

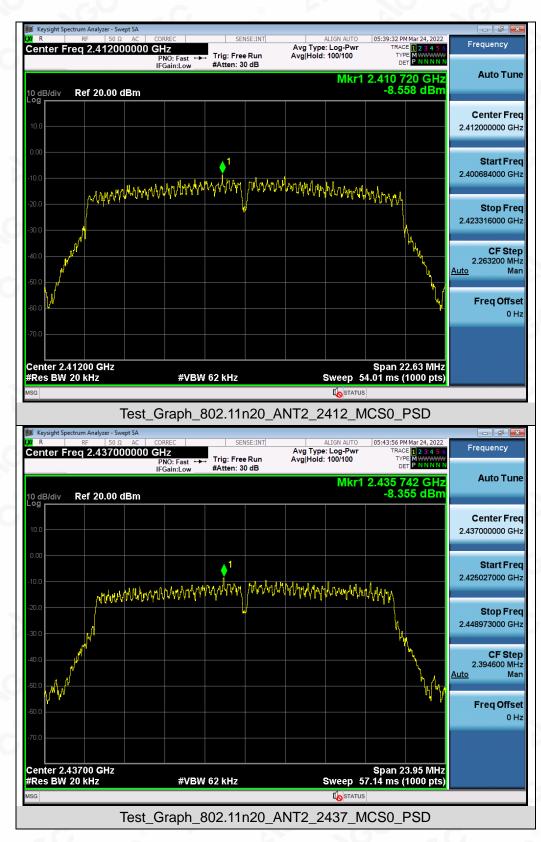


Report No.: AGC03773220301FE05 Page 78 of 124



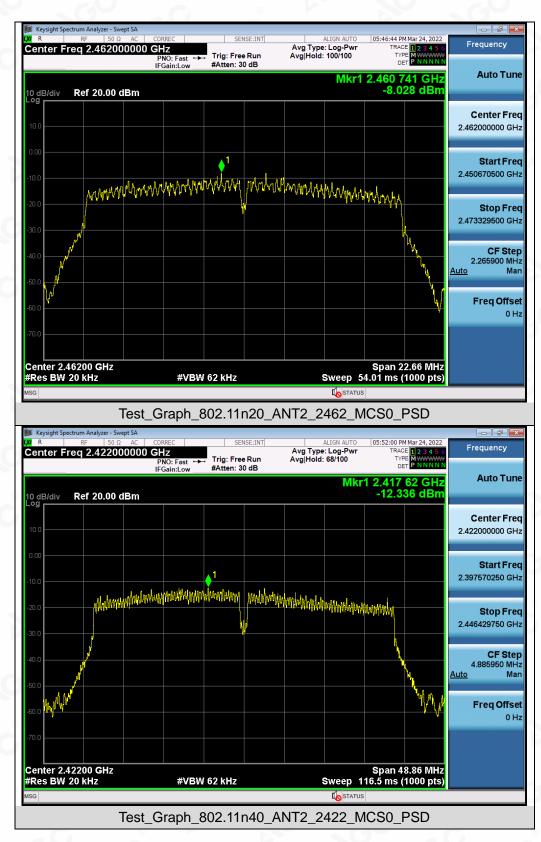

Report No.: AGC03773220301FE05 Page 79 of 124



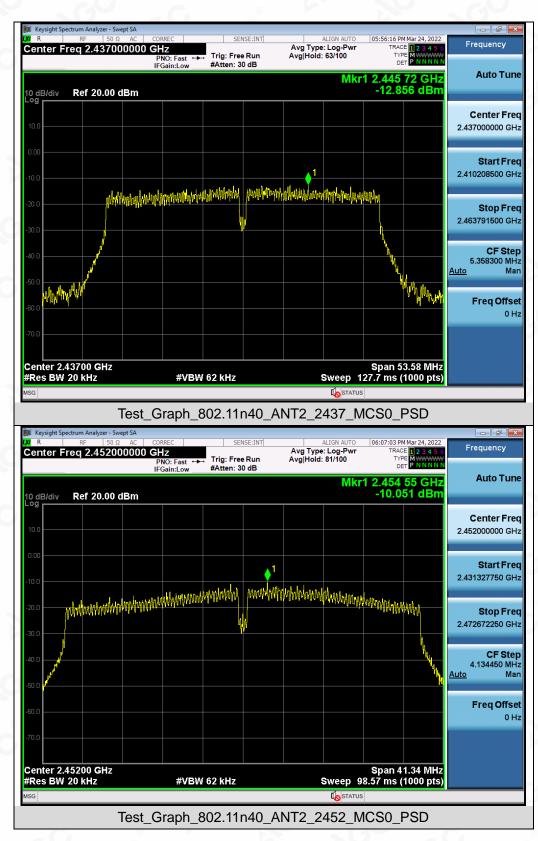



11. RADIATED EMISSION


11.1. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.




11.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

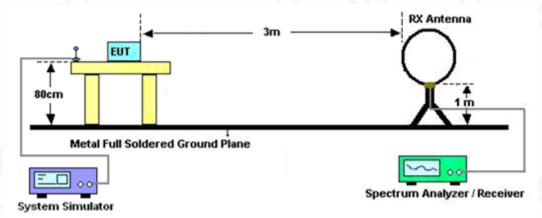

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

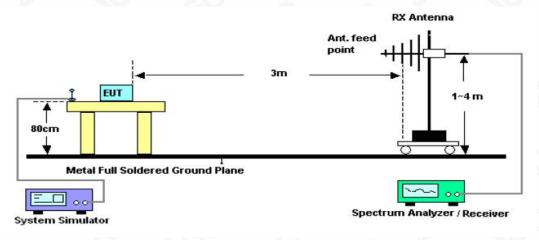

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

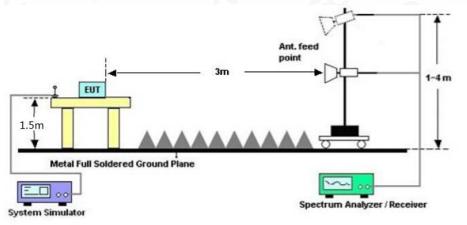

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the stand inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE in the test estimates and the test estimates and the test estimates are presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/

11.3. LIMITS AND MEASUREMENT RESULT

15.209(a) Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission,

the test records reported below are the worst result compared to other modes.

11.4. TEST RESULT

Radiated emission below 30MHz


The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the stand in the report is not permitted without the written authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



EUT	WiFi repeater with LAN port	Model Name	EP-2911S
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Horizontal

Radiated emission from 30MHz to 1000MHz

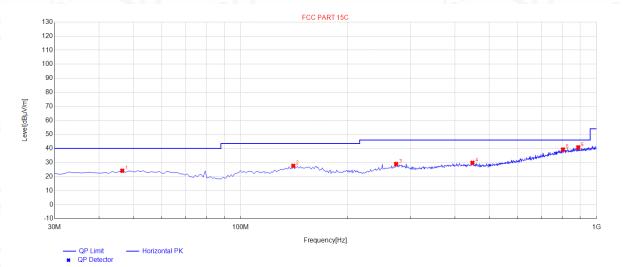


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	46.49	24.17	11.35	40.00	15.83	100	193	Horizontal
2	140.58	27.63	14.88	43.50	15.87	100	239	Horizontal
3	273.47	28.94	15.71	46.00	17.06	100	134	Horizontal
4	448.07	29.82	17.10	46.00	16.18	100	348	Horizontal
5	805.03	39.27	26.53	46.00	6.73	100	266	Horizontal
6	888.45	40.79	27.52	46.00	5.21	100	164	Horizontal

RESULT: PASS



Report No.: AGC03773220301FE05 Page 84 of 124

EUT	WiFi repeater with LAN port	Model Name	EP-2911S
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Vertical

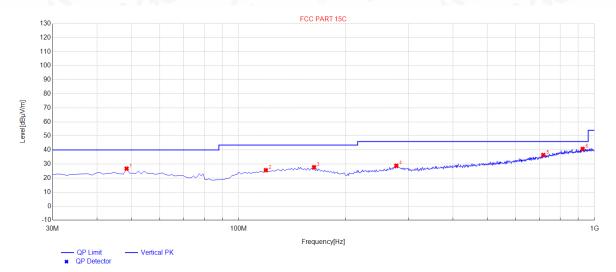

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	48.43	26.71	11.53	40.00	13.29	100	359	Vertical
2	119.24	25.59	13.39	43.50	17.91	100	159	Vertical
3	162.89	27.70	14.65	43.50	15.80	100	234	Vertical
4	277.35	28.80	16.05	46.00	17.20	100	357	Vertical
5	717.73	36.39	23.66	46.00	9.61	100	359	Vertical
6	926.28	40.75	27.99	46.00	5.25	100	51	Vertical

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Limit-Measurement.

2. The "Factor" value can be calculated automatically by software of measurement system.

3. All antennas are tested, the antenna 1 in 802.11b at low channel is the worst case and recorded

in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the stead of the test results of the report is not permitted without the written authorization of AGE the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Radiated emission above 1GHz

EUT	WiFi repeater with LAN port	Model Name	EP-2911S
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.000	52.36	0.08	52.44	74.00	-21.56	peak
4824.000	45.22	0.08	45.30	54.00	-8.70	AVG
7236.000	49.32	2.21	51.53	74.00	-22.47	peak
7236.000	41.11	2.21	43.32	54.00	-10.68	AVG
		8			C.	3
			8			
emark:		(0			10
actor = Anter	nna Factor + Cable	e Loss – Pre-	amplifier.	8		

EUT	WiFi repeater with LAN port	Model Name	EP-2911S
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.000	51.46	0.08	51.54	74.00	-22.46	peak
4824.000	46.37	0.08	46.45	54.00	-7.55	AVG
7236.000	48.54 💿	2.21	50.75	74.00	-23.25	peak
7236.000	42.05	2.21	44.26	54.00	-9.74	AVG
		-0-				6
emark:		00		8		C

Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Report No.: AGC03773220301FE05 Page 86 of 124

EUT	WiFi repeater with LAN port	Model Name	EP-2911S
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4874.000	55.25	0.14	55.39	74.00	-18.61	peak
4874.000	46.12	0.14	46.26	54.00	-7.74	AVG
7311.000	52.33	2.36	54.69	74.00	-19.31	peak
7311.000	42.53	2.36	44.89	54.00	-9.11 🔊	AVG
	C	®				0
			0			C
Remark:			0			50
actor = Anter	nna Factor + Cabl	e Loss – Pre-	amplifier.			

EUT	WiFi repeater with LAN port	Model Name	EP-2911S
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	 Value Type
4874.000	49.52	0.14	49.66	74.00	-24.34	peak
4874.000	43.58	0.14	43.72	54.00	-10.28	AVG
7311.000	46.47	2.36	48.83	74.00	-25.17	peak
7311.000	41.33	2.36	43.69	54.00	-10.31	AVG
		JOC-		6		69
emark:				C	8	

Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Report No.: AGC03773220301FE05 Page 87 of 124

EUT	WiFi repeater with LAN port	Model Name	EP-2911S
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4924.000	49.12	0.22	49.34	74.00	-24.66	peak
4924.000	42.33	0.22	42.55	54.00	-11.45	AVG
7386.000	48.38	2.64	0 51.02	74.00	-22.98	peak
7386.000	41.11	2.64	43.75	54.00	-10.25	AVG
			1			
Remark:						
actor = Anter	nna Factor + Cable	Loss - Pre-	amplifier.			

EUT	WiFi repeater with LAN port	Model Name	EP-2911S
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHz	Antenna	Vertical

(dB) 0.22 0.22 2.64	(dBµV/m) 48.54 43.86 52.08	(dBµV/m) 74.00 54.00	(dB) -25.46 -10.14	 Value Type peak AVG
0.22	43.86	54.00	-10.14	
				AVG
2.64	52.08	74.00		
	32.00	74.00	-21.92	peak
2.64	43.00	54.00	-11.00	AVG
				0

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RESULT: PASS

Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

All antennas had been tested. The 802.11b mode is the worst case and recorded in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated result of last of the stamped by the bedicated result of the bedicated result of the stamped by the bedicated result of the stamped by the bedicated result of the bedicated result of




Report No.: AGC03773220301FE05 Page 88 of 124


Ð	Test result for band edge emission at restricted bands-Ant 1					
						Q

EUT	WiFi repeater with LAN port	Model Name	EP-2911S
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHz	Antenna	Horizontal

Test Graph for Peak Measurement

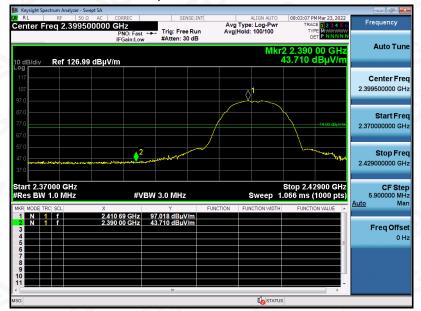

Test Graph for Average Measurement

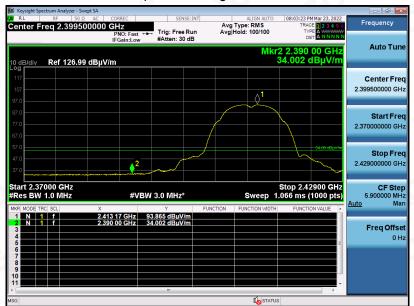

RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the test report in the report is not permitted without the written authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.


Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



Report No.: AGC03773220301FE05 Page 89 of 124

EUT	WiFi repeater with LAN port	Model Name	EP-2911S
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHz	Antenna	Vertical

Test Graph for Peak Measurement

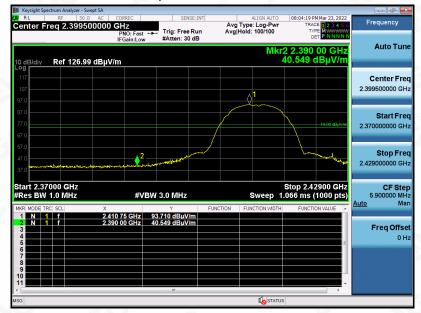

Test Graph for Average Measurement




RESULT: PASS




Report No.: AGC03773220301FE05 Page 90 of 124

EUT	WiFi repeater with LAN port	Model Name	EP-2911S
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHz	Antenna	Horizontal

Test Graph for Peak Measurement

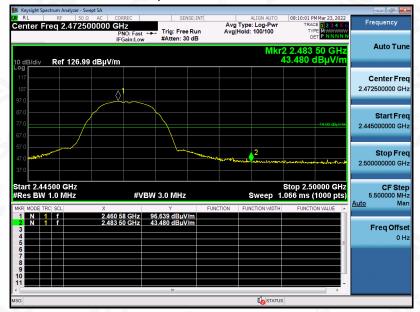

Test Graph for Average Measurement

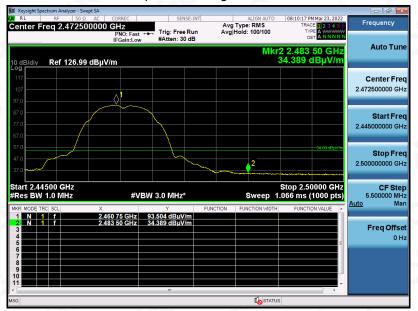


RESULT: PASS




Report No.: AGC03773220301FE05 Page 91 of 124

EUT	WiFi repeater with LAN port	Model Name	EP-2911S
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHz	Antenna	Vertical

Test Graph for Peak Measurement

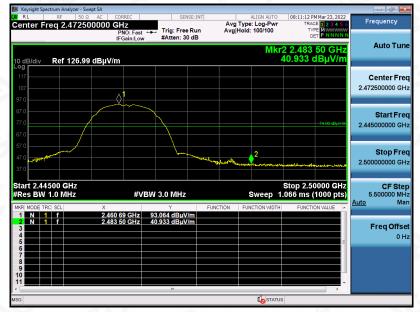

Test Graph for Average Measurement

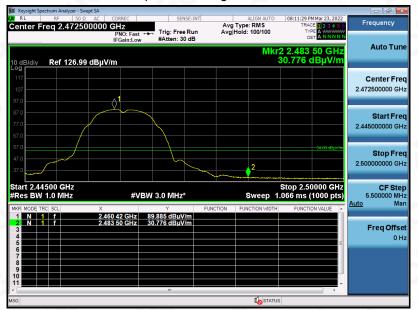

RESULT: PASS



Report No.: AGC03773220301FE05 Page 92 of 124

EUT	WiFi repeater with LAN port	Model Name	EP-2911S
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2412MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement




RESULT: PASS




Report No.: AGC03773220301FE05 Page 93 of 124

EUT	WiFi repeater with LAN port	Model Name	EP-2911S
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2412MHz	Antenna	Vertical

Test Graph for Peak Measurement

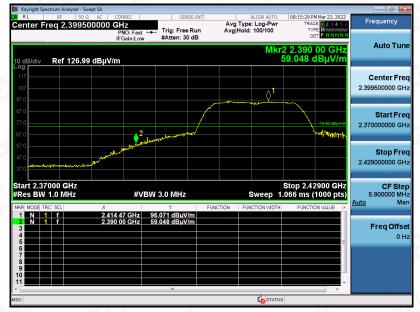

Test Graph for Average Measurement

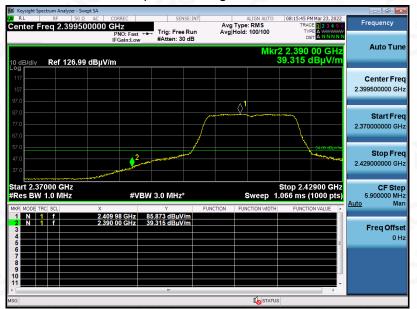

RESULT: PASS



Report No.: AGC03773220301FE05 Page 94 of 124

EUT	WiFi repeater with LAN port	Model Name	EP-2911S
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2462MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement



RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the stand inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE in the test estimates and the test estimates and the test estimates are presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



Report No.: AGC03773220301FE05 Page 95 of 124

EUT	WiFi repeater with LAN port	Model Name	EP-2911S
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2462MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement



RESULT: PASS




Report No.: AGC03773220301FE05 Page 96 of 124

EUT	WiFi repeater with LAN port	Model Name	EP-2911S
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2412MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

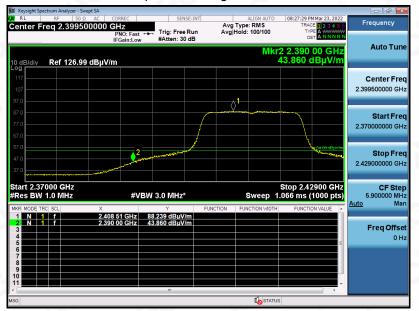

RESULT: PASS




Report No.: AGC03773220301FE05 Page 97 of 124

EUT	WiFi repeater with LAN port	Model Name	EP-2911S
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2412MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

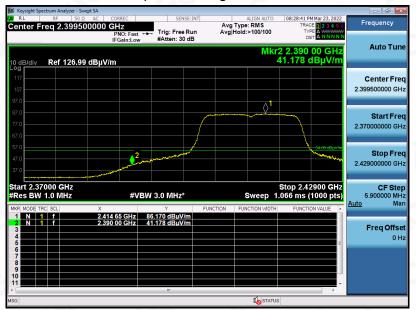

RESULT: PASS



Report No.: AGC03773220301FE05 Page 98 of 124

EUT	WiFi repeater with LAN port	Model Name	EP-2911S
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2462MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement



RESULT: PASS



Report No.: AGC03773220301FE05 Page 99 of 124

EUT	WiFi repeater with LAN port	Model Name	EP-2911S
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2462MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement




RESULT: PASS




Report No.: AGC03773220301FE05 Page 100 of 124

EUT	WiFi repeater with LAN port	Model Name	EP-2911S
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with data rate 13.5 2422MHz	Antenna	Horizontal

Test Graph for Peak Measurement

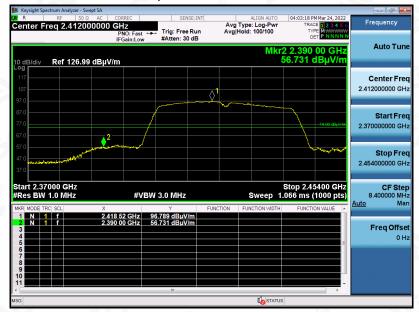

Test Graph for Average Measurement

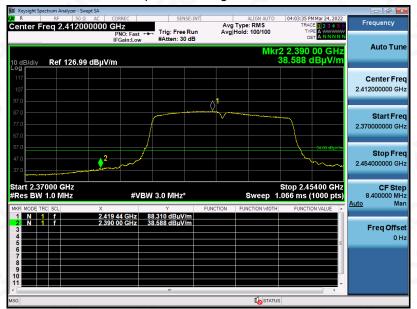

RESULT: PASS



Report No.: AGC03773220301FE05 Page 101 of 124

EUT	WiFi repeater with LAN port	Model Name	EP-2911S
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with data rate 13.5 2422MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement



RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the section (Inspection Stamp") is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



Report No.: AGC03773220301FE05 Page 102 of 124

EUT	WiFi repeater with LAN port	Model Name	EP-2911S
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with data rate 13.5 2452MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement



RESULT: PASS




Report No.: AGC03773220301FE05 Page 103 of 124

EUT	WiFi repeater with LAN port	Model Name	EP-2911S
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with data rate 13.5 2452MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

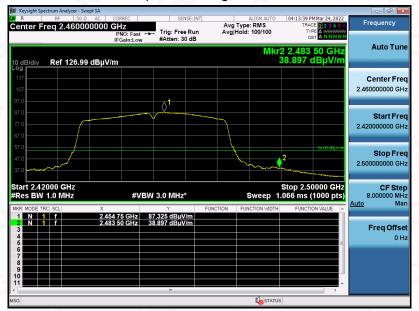

RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the stand inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE in the test estimates and the test estimates and the test estimates are presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.


Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/




.				
EUT	WiFi repeater with LAN port	Model Name	EP-2911S	
Temperature	25°C	Relative Humidity	60%	
Pressure	960hPa	Test Voltage	Normal Voltage	
Test Mode	802.11b with data rate 1 2412MHz	Antenna	Horizontal	

Test result for band edge emission at restricted bands-Ant 2

Test Graph for Peak Measurement

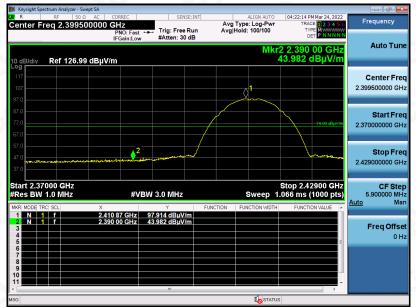

Test Graph for Average Measurement

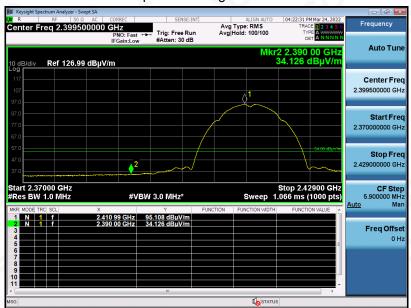

RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Pertug/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGE" he test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after he issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.


Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/




Report No.: AGC03773220301FE05 Page 105 of 124

EUT	WiFi repeater with LAN port	Model Name	EP-2911S
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHz	Antenna	Vertical

Test Graph for Peak Measurement

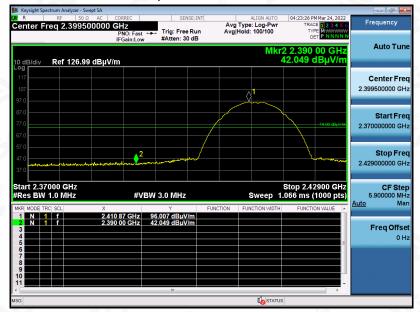

Test Graph for Average Measurement

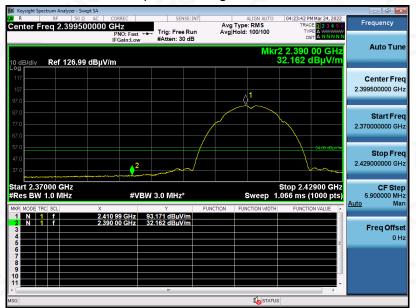


RESULT: PASS




Report No.: AGC03773220301FE05 Page 106 of 124

EUT	WiFi repeater with LAN port	Model Name	EP-2911S
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHz	Antenna	Horizontal

Test Graph for Peak Measurement

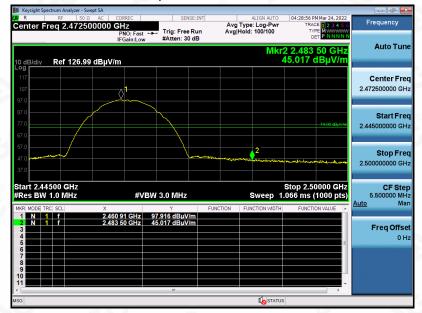

Test Graph for Average Measurement

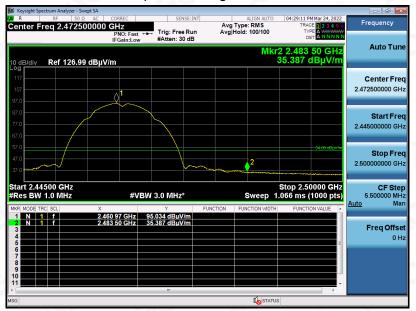


RESULT: PASS




Report No.: AGC03773220301FE05 Page 107 of 124

EUT	WiFi repeater with LAN port	Model Name	EP-2911S
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHz	Antenna	Vertical

Test Graph for Peak Measurement

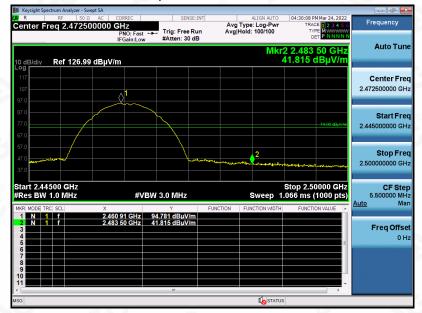

Test Graph for Average Measurement

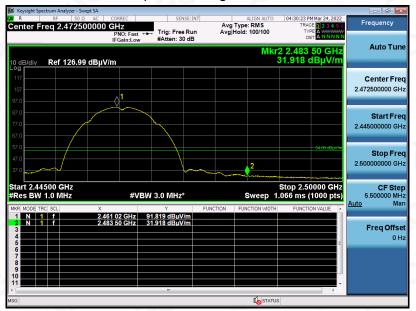

RESULT: PASS