

REPORT OF MEASUREMENTS  
GENERAL

Applicant: Bosch Security Systems  
Device: 10.525 GHz Field Disturbance Sensor  
Model: ISM-BLD1-P-F1  
Serial Number: N/A  
FCC ID: ESVD1  
Input Power Requirements: 10 to 14 VDC, 15 mA (12 VDC Nominal)  
Rule Section: Part 15, Subpart C, Section 15.245

TEST METHODS PERFORMED

15.245 (b) Radiated Emissions, Fundamental  
15.245 (b)(1) Radiated Emissions, Harmonics  
15.245 (b)(3) Radiated Emissions, Band Edges  
15.245 (b)(3) Radiated Emissions, Spurious Emissions, 30 MHz to 52.625 GHz

TEST RESULTS

15.245 (a) The device is an intentional radiator used as a field disturbance sensor.

15.245 (b) The device operates within the 10.500 to 10.550 GHz frequency band. The field strength of the fundamental emission did not exceed 2500 millivolts per meter, average.

15.245 (b)(1) The device does not produce harmonic emissions below 17.7 GHz.

15.245 (b)(1)(i) The device is intended to be used only within buildings and the field strength of harmonic emissions did not exceed 25.0 millivolts per meter.

15.245 (b)(2) All radiated emissions measurements were extrapolated to the specified 3 meter test distance.



**Retlif Testing Laboratories**  
Test Report Number R-10925-1  
FCC ID: ESVD1

15.245 (b)(3) The emissions radiated outside of the specified frequency band of 10.500 to 10.550 GHz did not exceed the general radiated emission limits of 15.209.

15.245 (b)(4) The requirements of 15.35 for averaging pulsed emissions and limiting peak emissions were met.

#### NOTES

15.31 (a)(b) All measurements were made in accordance with ANSI C63.4:2003.

15.31 (c) The device does not use swept frequency techniques.

15.31 (d) All testing was performed on Retlif Testing Laboratories Ronkonkoma, NY test site which has been listed with the FCC.

15.31 (e) Variation of the radiated signal level of the fundamental frequency component was performed with the supply voltage varied between 85 and 115% of nominal (12 VDC). This was also performed at 85% of the minimum and 115% of the maximum rated input voltage range.

15.31 (f)(1) Where testing was performed at distances other than the specified test distance, the obtained readings were extrapolated to the specified test distance using an inverse linear-distance extrapolation factor (20dB / decade) for measurements between 30 MHz and 40 GHz.

15.31 (f)(5) The device was rotated 360° in order to maximize the radiated emissions. The maximum field strength observed has been reported.

15.31 (g) All consumer accessible controls were adjusted in order to maximize emissions (MW Range Control).  
A one meter length of unshielded twisted pair wire was connected to each of the relay and tamper outputs.

15.31 (m) The device operates at a single frequency of 10.525 GHz.

15.31 (o) All emissions within 20 dB of the specified limits have been reported unless otherwise stated.

15.33 (a)(2) The device operates above 10 and below 30 GHz at a frequency of 10.525 GHz. Therefore radiated emissions measurements were made from 30 MHz to 52.625 GHz, the fifth harmonic.



**Retlif Testing Laboratories**

Test Report Number R-10925-1  
FCC ID: ESVD1

### DUTY CYCLE

Drive pulses are applied to Q99 via Q1 and are twenty microsecond (20 µSec) on time and nine hundred and eighty microseconds (980 µSec) off time. This yields a duty cycle of 2%, 20 µSec divided by 1000 µSec. This duty cycle was applied to the obtained peak readings in order to determine the average value of the emissions.

### TEST DISTANCES

In order to obtain adequate system sensitivity at the harmonic frequencies of interest, it was necessary to perform certain measurements at a distance less than 3 meters. Care was taken to ensure that all measurements were taken in the far field region. The antenna was determined to be in the far field IFF:

$$d \geq 2 D^2 / \lambda$$

Where:      d = Test Distance  
              D = Largest Antenna Length  
              λ = Wavelength at the Frequency of Interest

Solving for d yields the minimum test distances shown in the table below. Also shown is the actual test distance utilized.

<b>Frequency GHz</b>	<b>Minimum Test Distance Meters</b>	<b>Actual Test Distance Meters</b>
10.525	2.7	3
21.050	1.5	2
31.575	1.0	1
42.100	0.5	1
52.625	0.7	1

### SPECTRUM ANALYZER DESENSITIZATION CONSIDERATIONS

Due to the nature of the emissions being measured, care was taken to ensure that the resolution bandwidth of the spectrum analyzer was adequate to provide accurate peak field strength measurements. The following formula was utilized:

Pulse Desensitization (δ) = 20 log (Pulsewidth \* bandwidth \* 1.5)

Setting the above equal to zero and utilizing the 20.0 microsecond pulsewidth yields a minimum required bandwidth of 33.3 kHz. The 1 MHz bandwidth specified in ANSI C63.4 was utilized for all fundamental and harmonic measurements.



**Retlif Testing Laboratories**

Test Report Number R-10925-1  
FCC ID: ESVD1

TEST DATA  
RADIATED EMISSIONS, FUNDAMENTAL  
15.245 (b)



**Retlif Testing Laboratories**

Test Report Number R-10925-1  
FCC ID: ESVD1

TEST SAMPLE: 10.525 GHz Field Disturbance Sensor  
 FCC ID: ESVD1  
 APPLICANT: Bosch Security Systems  
 TEST METHOD: Radiated Emissions, Fundamental  
 SPECIFICATION: FCC Part 15, Section 15.245 (b)  
 PERFORMED BY: D. Lerner/R. Soodoo  
 DATE: May 3, 2005

### Field Strength of Fundamental

Frequency GHz	Antenna Position H / V	EUT Orientatio n X / Y / Z	Meter Reading dBuV	Antenna Factor +dB	Corrected Reading dBuV/m		Converted Reading mV/m	Limit at 3 Meters mV/m
10.525	H-1.4	X	63.5	30.0	93.5		47.3	2,500
	V-1.4	X	72.0	30.0	102.0		125.9	2,500
	H-1.3	Y	77.4	30.0	107.4		234.4	2,500
	V-1.3	Y	62.9	30.0	92.9		44.2	2,500
	H-1.3	Z	65.7	30.0	95.7		60.9	2,500
	V-1.4	Z	73.8	30.0	103.8		154.9	2,500

Detector Function: Peak  
 Test Distance: 3 Meters  
 Resolution Bandwidth: 1 MHz  
 Video Bandwidth: 3 MHz



**Retlif Testing Laboratories**  
 Test Report Number R-10925-1  
 FCC ID: ESVD1

TEST SAMPLE: 10.525 GHz Field Disturbance Sensor

FCC ID: ESVD1

APPLICANT: Bosch Security Systems

TEST METHOD: Radiated Emissions, Fundamental, Input Voltage Variation

SPECIFICATION: FCC Part 15, Section 15.245 (b), 15.31(e)

PERFORMED BY: D. Lerner/R. Soodoo

DATE: May 3, 2005

### Input Voltage Variation

Frequency GHz	Test Voltage % Nominal	Test Voltage VDC	Meter Reading dBuV	Antenna Factor +dB	Corrected Reading dBuV/m		Converted Reading mV/m	Limit at 3 Meters mV/m
10.525	85% (Vmin)	8.5	76.6	30.0	106.6		213.8	2,500
	85% (Vnom)	10.2	76.5	30.0	106.5		211.3	2,500
	100% (Vnom)	12.0	76.9	30.0	106.9		221.3	2,500
	115% (Vnom)	13.8	76.6	30.0	106.6		213.8	2,500
	115% (Vmax)	17.25	76.8	30.0	106.8		218.8	2,500

Detector Function: Peak  
Test Distance: 3 Meters  
Resolution Bandwidth: 1 MHz  
Video Bandwidth: 3 MHz



**Retlif Testing Laboratories**

Test Report Number R-10925-1  
FCC ID: ESVD1

TEST DATA  
RADIATED EMISSIONS, HARMONICS  
15.245 (b)(1)



**Retlif Testing Laboratories**

Test Report Number R-10925-1  
FCC ID: ESVD1

TEST SAMPLE: 10.525 GHz Field Disturbance Sensor  
 FCC ID: ESVD1  
 APPLICANT: Bosch Security Systems  
 TEST METHOD: Radiated Emissions, Harmonics  
 SPECIFICATION: FCC Part 15, Section 15.245 (b)(1)  
 PERFORMED BY: D. Lerner/R. Soodoo  
 DATE: May 3, 2005

Field Strength of Harmonics - Peak

Frequency GHz	Antenna Position & Distance H / V	EUT Orientatio n X / Y / Z	Meter Reading dBuV	Antenna Factor dB	Test Distance Correction dB	Corrected Reading dBuV/m	Converted Reading uV/m	Peak Limit at 3 Meters uV/m
21.1	H - 1.0	X	58.2	20.7	-3.5	75.4	5888.0	250000.0
	V - 1.1	X	60.6	20.7	-3.5	77.8	7762.0	
	H - 1.0	Y	58.8	20.7	-3.5	76.0	6390.0	
	V - 1.2	Y	61.5	20.7	-3.5	78.7	8609.0	
	H - 1.0	Z	61.0	20.7	-3.5	78.2	8128.0	
	V - 1.0	Z	58.7	20.7	-3.5	75.9	6237.0	
31.6	H - 1.0	X	61.8	35.8	-9.5	88.1	25409.0	
	V - 1.0	X	53.8	35.8	-9.5	80.1	10116.0	
	H - 1.0	Y	57.8	35.8	-9.5	84.1	16032.0	
	V - 1.0	Y	61.1	35.8	-9.5	87.4	23442.0	
	H - 1.0	Z	57.7	35.8	-9.5	84.0	15849.0	
	V - 1.0	Z	55.5	35.8	-9.5	81.8	12303.0	
42.1	H - 1.0	X	34.2	39.9	-9.5	64.6	1698 *	
	V - 1.0	X	34.2	39.9	-9.5	64.6	1698 *	250000.0



**Retlif Testing Laboratories**

Test Report Number R-10925-1  
 FCC ID: ESVD1



	H - 1.0	Y	34.2	39.9	-9.5	64.6	1698 *	250000.0
	V - 1.0	Y	34.2	39.9	-9.5	64.6	1698 *	
	H - 1.0	Z	34.2	39.9	-9.5	64.6	1698 *	
	V - 1.0	Z	34.2	39.9	-9.5	64.6	1698 *	
52.6	H - 1.0	X	32.7	41.1	-9.5	64.3	1640 *	
	V - 1.0	X	32.7	41.1	-9.5	64.3	1640 *	
	H - 1.0	Y	32.7	41.1	-9.5	64.3	1640 *	
	V - 1.0	Y	32.7	41.1	-9.5	64.3	1640 *	
	H - 1.0	Z	32.7	41.1	-9.5	64.3	1640 *	
	V - 1.0	Z	32.7	41.1	-9.5	64.3	1640 *	250000.0

\* Denotes Minimum Sensitivity of Measurement System.

### Field Strength of Harmonics - Average

Frequency GHz	Antenna Position H / V	EUT Orientatio n X / Y / Z	Peak Reading uV/m	Duty Cycle %		Average Reading uV/m	Limit at 3 Meters uV/m
21.050	H - 1.0	X	5888	2.0		117.6	25,000
	V - 1.1	X	7762	2.0		115.2	
	H - 1.0	Y	6390	2.0		127.8	
	V - 1.2	Y	8609	2.0		172.2	
	H - 1.0	Z	8128	2.0		162.6	
	V - 1.0	Z	6237	2.0		124.7	
31.575	H - 1.0	X	25409	2.0		508.0	



**Retlif Testing Laboratories**

Test Report Number R-10925-1

FCC ID: ESVD1

	V - 1.0	X	10116	2.0		202.3	25000
	H - 1.0	Y	16032	2.0		320.6	25000
	V - 1.0	Y	23442	2.0		468.8	
	H - 1.0	Z	15849	2.0		317.0	
	V - 1.0	Z	12303	2.0		246.1	
42.100	H - 1.0	X	1698	2.0		34.0 *	
	V - 1.0	X	1698	2.0		34.0 *	
	H - 1.0	Y	1698	2.0		34.0 *	
	V - 1.0	Y	1698	2.0		34.0 *	
	H - 1.0	Z	1698	2.0		34.0 *	
	V - 1.0	Z	1698	2.0		34.0 *	
52.625	H - 1.0	X	1640	2.0		32.8 *	
	V - 1.0	X	1640	2.0		32.8 *	
	H - 1.0	Y	1640	2.0		32.8 *	
	V - 1.0	Y	1640	2.0		32.8 *	
	H - 1.0	Z	1640	2.0		32.8 *	
	V - 1.0	Z	1640	2.0		32.8 *	25,000

Detector Function: Peak / Duty Cycle Applied to Obtain Average Levels  
 Test Distance: As Specified for each frequency  
 Resolution Bandwidth: 1 MHz  
 Video Bandwidth: 3 MHz



**Retlif Testing Laboratories**  
 Test Report Number R-10925-1  
 FCC ID: ESVD1

TEST DATA  
RADIATED EMISSIONS, BAND EDGES  
15.245 (b)(3)



**Retlif Testing Laboratories**

Test Report Number R-10925-1  
FCC ID: ESVD1

TEST SAMPLE: 10.525 GHz Field Disturbance Sensor  
FCC ID: ESVD1  
APPLICANT: Bosch Security Systems  
TEST METHOD: Radiated Emissions, Band Edges  
SPECIFICATION: FCC Part 15, Section 15.245 (b)(3)  
PERFORMED BY: D. Lerner/R. Soodoo  
DATE: May 3, 2005

The emission at the Lower (10.5GHz) and Upper (10.55GHz) Band edge were attenuated by 50dB. See attached plot.



**Retlif Testing Laboratories**


Test Report Number R-10925-1  
FCC ID: ESVD1

TEST DATA  
OCCUPIED BANDWIDTH  
15.245 (b)



**Retlif Testing Laboratories**

Test Report Number R-10925-1  
FCC ID: ESVD1

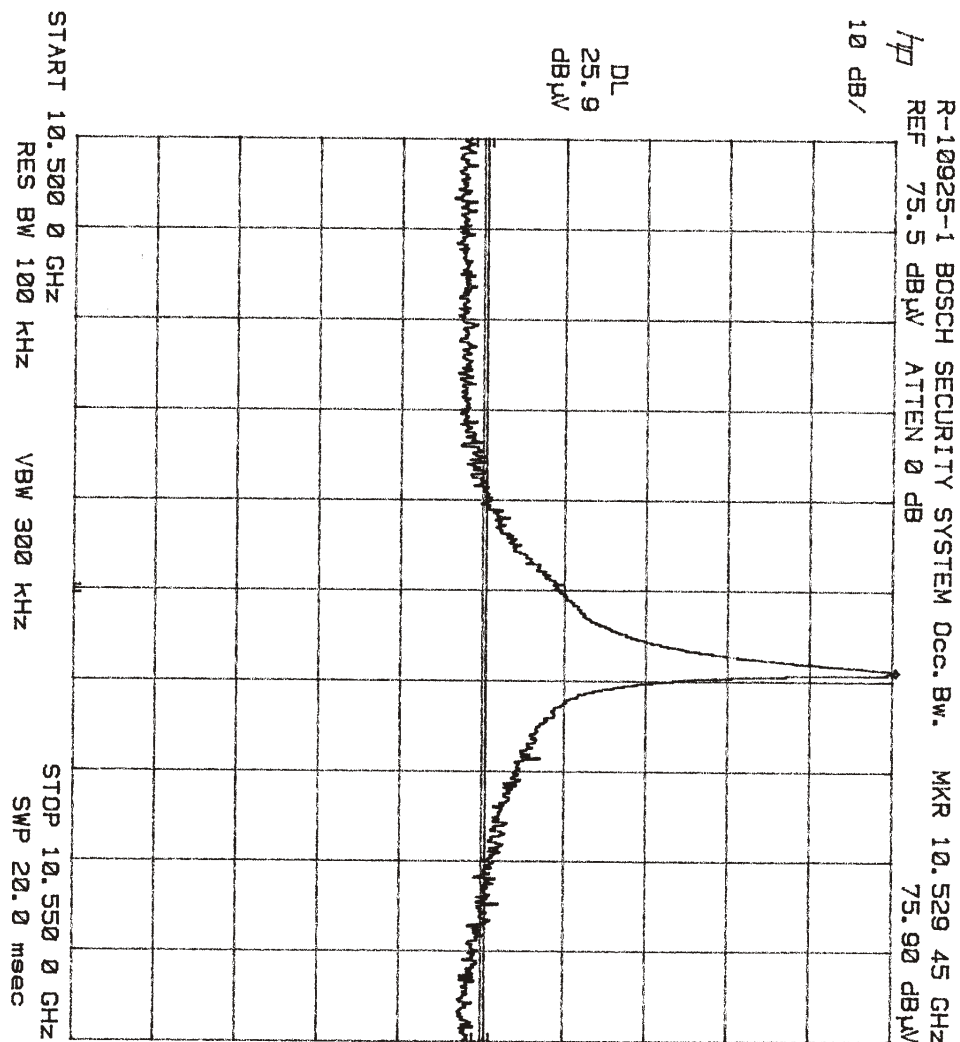

Customer: Bosch Security Systems  
 Test Sample: 10.525 GHz Field Disturbance Sensor  
 Model Number: ISM-BLD1-P-F1  
 Test Method: FCC 15.245(b) Occupied Bandwidth 10.5-10.55 GHz band  
 Notes: The emissions radiating outside the band are attenuated by >50 dB

Date: May 03, 2005  
 Technician: D. Lerner / R. Soodoo  
 Sheet 1 of 1



**Retlif Testing Laboratories**

Test Report Number R-10925-1  
 FCC ID: ESVD1

TEST DATA  
RADIATED EMISSIONS, SPURIOUS  
15.245 (b)(3)



**Retlif Testing Laboratories**

Test Report Number R-10925-1  
FCC ID: ESVD1

TEST SAMPLE: 10.525 GHz Field Disturbance Sensor  
 FCC ID: ESVD1  
 APPLICANT: Bosch Security Systems  
 TEST METHOD: Spurious Emissions, 30 MHz to 52.625 GHz  
 SPECIFICATION: FCC Part 15, Section 15.245 (b)(3)  
 PERFORMED BY: D. Lerner/R. Soodoo  
 DATE: May 3, 2005

Frequency GHz	Antenna Distance Meters		Meter Reading dBuV	Antenna Factor +dB	Test Distance Correction -dB	Corrected Reading dBuV/m	Converted Reading uV/m	Limit at 3 Meters uV/m
0.030	3		-					100 QP
0.088	3		-					100 / 150
0.216	3		-					150 / 200
0.960	3		-					200 / 500
1.0	3		-					500
1.0	1		-					5000 Pk 500 Ave
52.625	1		-					5000 Pk 500 Ave

The frequency range was scanned from 30 MHz to 52.625 GHz. No spurious emissions were observed within 20 dB of the specified limit in the 30 MHz to 40 GHz range. No spurious emissions were observed within 10 dB of the specified limit above 40 GHz.

	For F < 1 GHz	For F > 1 GHz
Resolution Bandwidth:	100 kHz	1 MHz
Video Bandwidth:	300 kHz	3 MHz
Detector:	Quasi-Peak	Peak / Average



**Retlif Testing Laboratories**  
 Test Report Number R-10925-1  
 FCC ID: ESVD1



## EQUIPMENT LIST

### FCC 15.245 Compliance Testing

EN	Type	Manufacturer	Description	Model No.	Cal Date	Due
128	Double Ridged Guide	Electro-Mechanics	1 GHz - 18 GHz	3105	3/9/2005	3/9/2006
129E	High Gain Horn Antenna	Microlab/FXR	18 GHz - 26.5 GHz	K638A	9/15/2004	9/15/2005
129G	High Gain Horn Antenna	Microlab/FXR	26.5 GHz - 40 GHz	U638A	9/15/2004	9/15/2005
133	Broadband Pre-Amplifier	Electro-Metrics	10 kHz - 1 GHz, 26dB	BPA-1000	6/12/2004	6/12/2005
141	Spectrum Analyzer	Hewlett Packard	100 Hz - 40 GHz	8566B	2/15/2005	8/15/2005
141A	Graphics Plotter	Hewlett Packard	N/A	7470A	2/9/2005	2/9/2006
141B	Quasi-Peak Adaptor	Hewlett Packard	100 Hz - 1 GHz	85650A	2/15/2005	8/15/2005
206B	6.0 dB Attenuator	Texscan	0 - 1.0 GHz	FP-50 - 6 dB	6/12/2004	6/12/2005
420	Amplifier	Hewlett Packard	2.0 GHz - 18 GHz	11975A	10/11/2004	10/11/2005
421	Harmonic Mixer	Hewlett Packard	18 GHz - 26.5 GHz	11970K	9/29/2003	9/29/2006
421A	Harmonic Mixer	Hewlett Packard	26.5 GHz - 40 GHz	11970A	9/29/2003	9/29/2006
421B	Harmonic Mixer	Hewlett Packard	40 GHz - 60 GHz	11970U	9/29/2003	9/29/2006
543	Preamplifier	Hewlett Packard	1.0 GHz - 26.5 GHz	8449B	7/27/2004	7/27/2005
703	DC Power Supply	EPSCO INC.	16V8A/32V4A	EFB	1/12/2005	1/12/2006
767	Biconilog	EMCO	26 - 2000 MHz	3142B	10/7/2004	10/7/2005



**Retlif Testing Laboratories**

Test Report Number R-10925-1

FCC ID: ESVD1