ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

Applicant:	GOOGLE LLC 1600 Amphitheatre Parkway Mountain View, CA 94043
Product Name:	Wireless Streaming Device
Brand Name:	GOOGLE
Model No.:	GJQ9T
Model Difference:	N/A
Report Number:	ER/2021/40062
FCC ID:	A4RGJQ9T
IC:	10395A-GJQ9T
Issue Date:	July 7, 2021
Date of Test:	April 21, 2021 ~ May 10, 2021
Date of EUT Received:	February 19, 2021

Approved By _____
Blue Yang

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Central RF Lab The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT comply with FCC rule part §15.247, ISED RSS-247.

The results of this report relate only to the sample identified in this report.

Revision History

Report Number	Revision	Description	Issue Date	Revised By
ER/2021/40062	00	Original.	July 7, 2021	Elle Chang

Table of Contents

1 GENERAL INFORMATION

1.1 Product Description

Product Name:	Wireless Streaming Device
Brand Name:	GOOGLE
Model No.:	GJQ9T
Model Difference:	N/A
Hardware Version:	N/A
Firmware Version:	N/A
EUT Series No.:	Conducted: G1878051 Radiated: G1878050
Power Supply:	USB 5V

1.2 RF Specification

Wi-Fi 802.11	Frequency Range	Channels	Rated Power (dBm)	Modulation Technology
b	2412-2462	11	22.02	DSSS,
g			26.16	OFDM
n_HT20			26.08	
Modulation type:	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM			
Transistion Rate	802.11 b: 1/2/5.5/11 Mbps 802.11 g: 6/9/12/18/24/36/48/54 Mbps 802.11 n_HT20MHz: 6.5 – 72.2 Mbps			

1.3 Antenna Designation

Antenna Type	**Freq. (MHz)**	**Peak Antenna Gain (dBi)**	**Worst Antenna Gain**
Dipole	2.4GHz	2.13	-
Note: Antenna information is provided by the applicant.			

1.4 Test Methodology of Applied Standards

FCC Part 15, Subpart C §15.247
FCC KDB 558074 D01 15.247 Meas Guidance v05r02
RSS-247 issue 2 Feb. 2017
RSS-Gen Issue 5, Amendment 2, February 2021
ANSI C63.10:2013

1.5 Test Facility

Laboratory	Test Site Address	Test Site Name	FCC Designation number	IC CAB identifier
SGS Taiwan Ltd. Central RF Lab. (TAF code 3702)	No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan.	SAC 1	TW0027	TW3702
		SAC 3		
		Conduction 1		
		Conducted 1		
		Conducted 2		
		Conducted 3		
		Conducted 4		
		Conducted 5		
		Conducted 6		
	No.2, Keji 1st Rd., Guishan District, Taoyuan City, Taiwan 333	Conduction A	TW0028	
		SAC C		
		SAC D		
		SAC G		
		Conducted A		
		Conducted B		
		Conducted C		
		Conducted D		
		Conducted E		
		Conducted F		
		Conducted G		
Note: Test site name is remarked on the equipment list in each section of this report as an indication where measurements occurred in specific test site and address.				

1.6 Special Accessories

There are no special accessories used while test was conducted.

1.7 Equipment Modifications

There was no modification incorporated into the EUT.

2 SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on a table which is 0.8 m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz. The CISPR Quasi-Peak and Average detector mode is employed. The two LISNs provide 50uH/50 ohm of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Conducted Test (RF)

The active antenna port of the unlicensed wireless device is connected to the spectrum analyzer with attenuator to protect the instrumentation. If a second antenna port is available, it is tested at one operating frequency, with other port(s) appropriately terminated, to verify it has similar output characteristics as the fully tested port.

2.3.3 Radiated Emissions

The EUT is a placed on a turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” is still within the 3dB illumination BW of the measurement antenna.

2.4 Measurement Results Explanation Example

2.4.1 Radiated Emission Test Sites For Measurements From 9 kHz To 30 MHz

Radiated emission below 30MHz is measured in a 9m*9m*6m semi-anechoic chamber, the measurements correspond to those obtained at an open-field test site.
There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

2.4.2 For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

2.5 Configuration of Tested System

Fig. 2-1 Conducted (Antenna Port) Emission Configuration

Fig 2-2 Radiated Emission

Fig 2-3 Conduction (AC Power Line) Radiated Emission



Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	WLAN Test Software	N/A	N/A	N/A	N/A	N/A
2.	Notebook	Lenovo	T440P	PC-014TAK	N/A	N/A
3.	Notebook	Lenovo	T440P	PC-083PVC 15/10	N/A	N/A

3 SUMMARY OF TEST RESULTS

FCC Rules	IC Rules	Description Of Test	Result
§15.207(a)	RSS-Gen §8.8	AC Power Line Conducted Emission	Compliant
§15.247(b) (3)	RSS-247 §5.4 d	Peak Output Power	Compliant
§15.247(a)(2)	RSS-247 §5.2 a RSS-Gen §6.7	Emission Bandwidth	Compliant
§15.205 §15.209 §15.247(d)	RSS-247 §5.5 RSS-Gen §8.9 RSS-Gen §8.10 RSS-Gen §6.13	Radiated & Conducted Band Edge and Spurious Emission	Compliant
§15.247(e)	RSS-247 §5.2 b	Power Spectral Density	Compliant
§15.203 §15.247(b)	N/A	Antenna Requirement	Compliant

4 DESCRIPTION OF TEST MODES

4.1 Operated in 2400 ~ 2483.5MHz Band

11 channels are provided for 802.11b/g/n 20M.

CHANNEL	FREQUENCY (MHz)
1	2412
2	2417
3	2422
4	2427
5	2432
6	2437
7	2442
8	2447
9	2452
10	2457
11	2462

4.2 The Worst Test Modes and Channel Details

1. The EUT has been tested under operating condition.
2. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.
3. Investigation has been done on all the possible configurations for searching the worst case.

   The gevin UE is pre-scanned among below modes.

Modulation	Transmission Chain				Single Transmission Spatial	Multiple Transmission Spatial
☒ 802.11 b	☒ Ch0	☐ Ch1	☐ Ch2	☐ Ch3	☒ 1TX	☐ 2TX
☒ 802.11 g	☒ Ch0	☐ Ch1	☐ Ch2	☐ Ch3	☒ 1TX	☐ 2TX
☒ 802.11 n	☒ Ch0	☐ Ch1	☐ Ch2	☐ Ch3	☒ SISO	☐ MIMO
☐ 802.11 ax	☐ Ch0	☐ Ch1	☐ Ch2	☐ Ch3	☐ SISO	☐ MIMO

4. Therefore, below summary is the modes of test configuration that yield the highest reading and generate the highest emission chosen to carry out the relevantly mandatory test items.

4.3 Radiated Emission Test:

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)	ANTENNA PORT
RADIATED EMISSION TEST (BELOW 1 GHz)					
802.11g	1 to 11	6	OFDM	6	Ch0
RADIATED EMISSION TEST (ABOVE 1 GHz)					
802.11b	1 to 11	1, 6, 11	DSSS	1	Ch0
802.11g	1 to 11	1, 6, 11	OFDM	6	Ch0
802.11n 20M	1 to 11	1, 6, 11	OFDM	MCS 0	Ch0

Note: The field strength of radiation emission was measured as EUT three orthogonal plans, E1 / E2 / H, are positioned to pre-scan the emission generating the highest one. The worst position is tested, and recorded.

4.4 Antenna Port Conducted Mesurement:

CONDUCTED TEST					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)	ANTENNA PORT
802.11b	1 to 11	1, 6, 11	DSSS	1	Ch0
802.11g	1 to 11	1, 6, 11	OFDM	6	Ch0
802.11n 20M	1 to 11	1, 6, 11	OFDM	MCS 0	Ch0

5 MEASUREMENT UNCERTAINTY

Test Items	Uncertainty		
AC Power Line Conducted Emission	+/-	2.34	dB
Peak Output Power	+/-	1	dB
6dB Bandwidth & 99% Bandwidth	+/-	1.53	Hz
100 KHz Bandwidth Of Frequency Band Edges	+/-	1.69	dB
Peak Power Density	+/-	1.53	dB
Temperature	+/-	0.4	°C
Humidity	+/-	3.5	%
DC / AC Power Source	+/-	1	%

Radiated Spurious Emission Measurement Uncertainty				
Polarization: Vertical	**+/-**	**2.64**	**dB**	9kHz~30MHz
	+/-	**4.93**	**dB**	30MHz - 1000MHz
	+/-	**4.81**	**dB**	1GHz - 18GHz
	+/-	**4.52**	**dB**	18GHz - 40GHz
Polarization: Horizontal	**+/-**	**2.64**	**dB**	9kHz~30MHz
	+/-	**4.45**	**dB**	30MHz - 1000MHz
	+/-	**4.81**	**dB**	1GHz - 18GHz
	+/-	**4.52**	**dB**	18GHz - 40GHz

Note:

1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
2. The conformity assessment statement in this report is based solely on the test results, measurement uncertainty is excluded.

6 CONDUCTED EMISSION TEST

6.1 Standard Applicable

Frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

Frequency range MHz	Limits dB(uV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50
Note 1.The lower limit shall apply at the transition frequencies 2.The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.		

6.2 Measurement Equipment Used

Radiated Emission Test Site: Conduction 1					
EQUIPMENT TYPE	**MFR**	**MODEL NUMBER**	**SERIAL NUMBER**	**LAST CAL.**	**CAL DUE.**
EMI Test Receiver	R&S	ESCI 7	100759	07/13/2020	07/12/2021
LISN	SCHWARZBECK	NSLK 8127	8127-465	04/09/2021	04/08/2022
Coaxial Cables	N/A	Coaxial Cable	161207	12/07/2020	12/06/2021
Test Software	audix	e3	Ver. 6.11-20180413	N.C.R	N.C.R

6.3 EUT Setup

1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.10:2013.
2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
3. The LISN was connected with 120Vac/60Hz power source.

6.4 Test SET-UP (Block Diagram of Configuration)

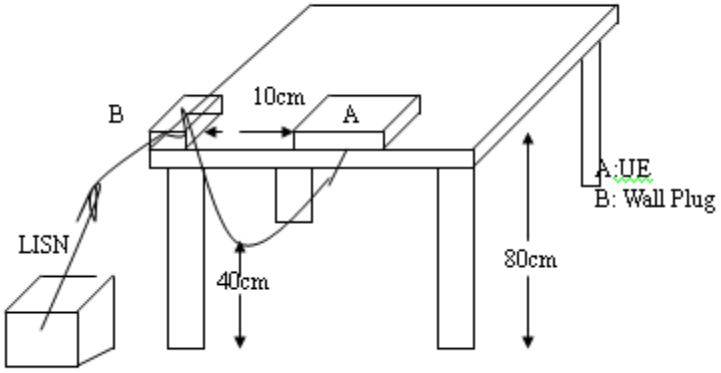

6.5 Measurement Procedure

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all phases of power being supplied by given UE are completed

6.6 Measurement Result

Note: Refer to next page for measurement data and plots.

Note2: The * reveals the worst-case results that closet to the limit.

.

AC POWER LINE CONDUCTED EMISSION TEST DATA

Report Number	:ER-2021-40062	Test Site	:Conduction 6F
Test Mode	:WLAN 2.4G	Test Date	:2021-04-23
Power	:AC 120V/60Hz	Temp./Humi.	:25.1/62
Probe	:L	Engineer	:Ricky Chen
Note:	:		

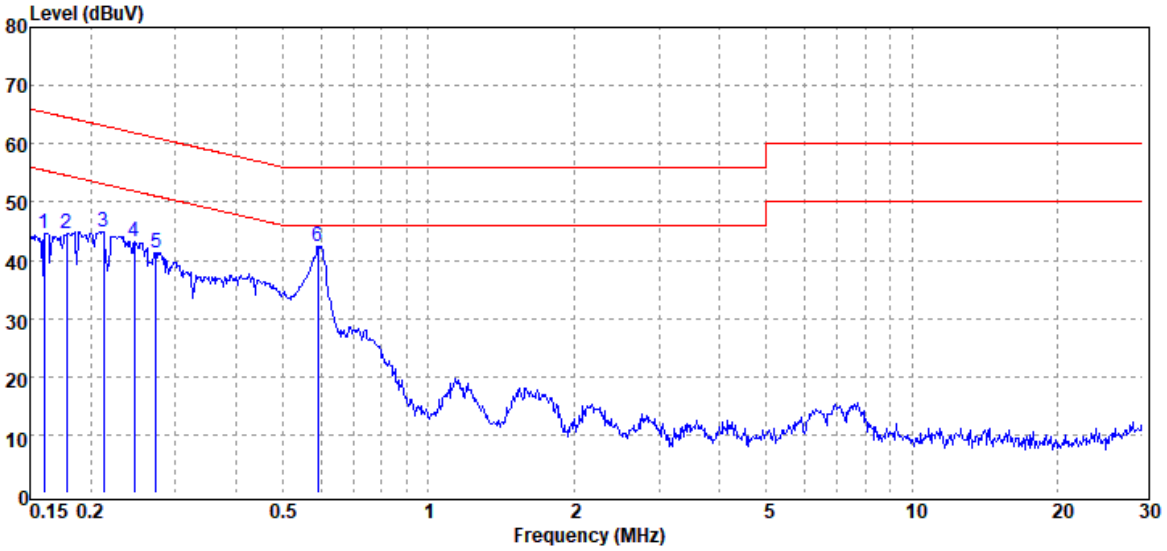

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV	dBµV	dB
0.16	Peak	44.47	0.04	44.51	65.43	-20.92
0.18	Peak	44.57	0.04	44.61	64.55	-19.94
0.21	Peak	44.93	0.04	44.97	63.10	-18.13
0.25	Peak	43.05	0.04	43.09	61.86	-18.77
0.27	Peak	41.33	0.04	41.37	61.03	-19.66
0.59	Peak	42.28	0.14	42.42	56.00	-13.58

Report Number	:ER-2021-40062	Test Site	:Conduction 6F
Test Mode	:WLAN 2.4G	Test Date	:2021-04-23
Power	:AC 120V/60Hz	Temp./Humi.	:25.1/62
Probe	:N	Engineer	:Ricky Chen
Note:	:		

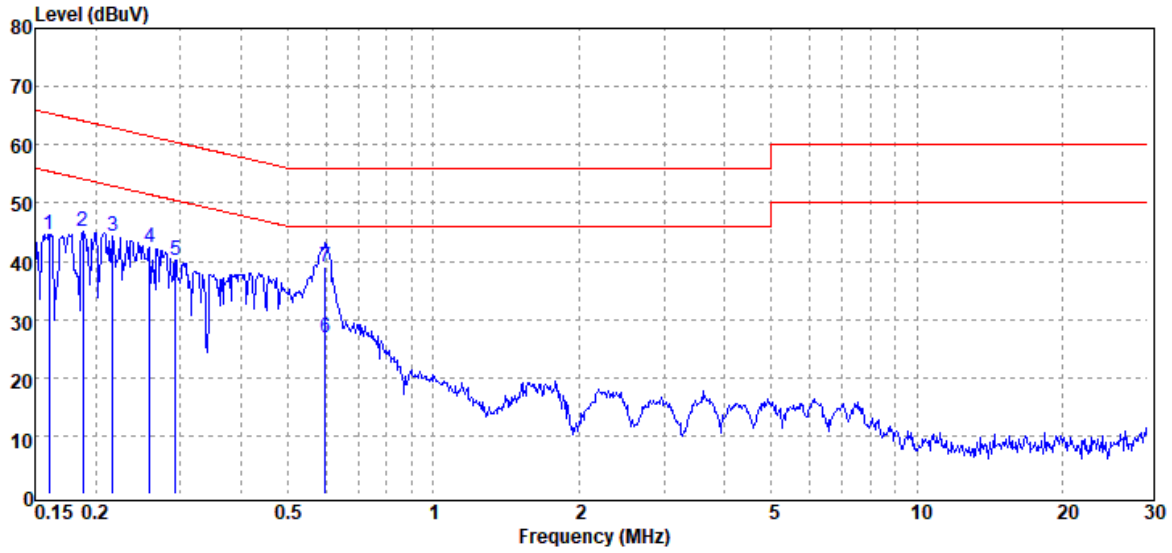

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV	dBµV	dB
0.16	Peak	44.61	0.10	44.71	65.43	-20.72
0.19	Peak	45.11	0.10	45.21	64.11	-18.90
0.22	Peak	44.14	0.10	44.24	62.92	-18.68
0.26	Peak	42.25	0.10	42.35	61.47	-19.12
0.29	Peak	39.95	0.11	40.06	60.46	-20.40
0.60	Average	26.57	0.18	26.75	46.00	-19.25
0.60	QP	38.83	0.18	39.01	56.00	-16.99

7 DUTY CYCLE OF TEST SIGNAL

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle.

All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

7.1 Measurement Procedure:

1. Set span = Zero
2. RBW = 8MHz
3. VBW = 8MHz,
4. Detector = Peak

7.2 Duty Cycle:

	Duty Cycle (%) = Ton / (Ton+Toff)	Duty Factor (dB) =10*log (1/Duty Cycle)	1/T (kHz)	VBW setting (kHz)
802.11b	98.90	0.05	0.12	0.01
802.11g	93.27	0.30	0.70	1.00
802.11n_20	92.84	0.32	0.75	1.00

7.3 Duty Cycle test plots

802.11b_20MHz_Chain0_2412MHz

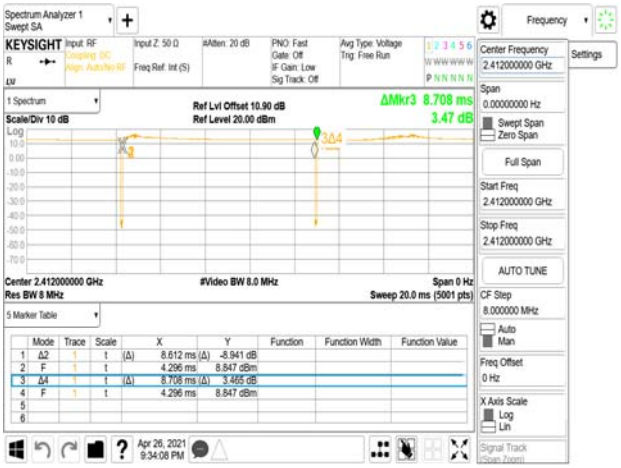

802.11g_20MHz_Chain0_2412MHz

802.11n_20MHz_Chain0_2412MHz

8 PEAK OUTPUT POWER MEASUREMENT

8.1 Standard Applicable

For systems using digital modulation in the 2400-2483.5 MHz bands, the limit for peak output power is 1Watt and the e.i.r.p. shall not exceed 4 W.

If the transmitting antenna of directional gain greater than 6dBi are used the peak output power form the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6dBi.

In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of Antenna exceeds 6dBi.

8.2 Measurement Equipment Used

Conducted Emission Test Site: Conducted 2					
EQUIPMENT TYPE	**MFR**	**MODEL NUMBER**	**SERIAL NUMBER**	**LAST CAL.**	**CAL DUE.**
Power Meter	Anritsu	ML2496A	1804001	03/02/2021	03/01/2022
Power Sensor	Anritsu	MA2411B	1726104	03/02/2021	03/01/2022
Power Sensor	Anritsu	MA2411B	1726107	03/02/2021	03/01/2022
Attenuator	Mini-Circuit	BW-S10W2+	2	12/16/2020	12/15/2021

8.3 Test Set-up

Power Meter:

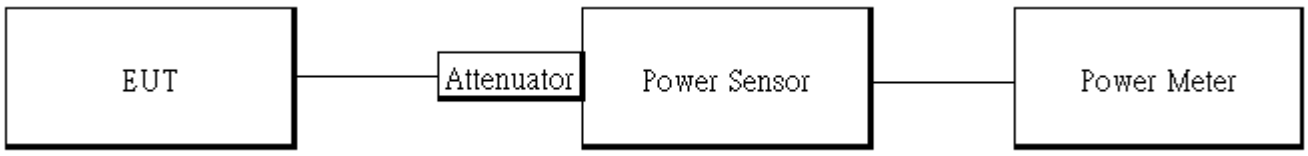

8.4 Measurement Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance .
3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.

   Power Meter:

   It is used as the auxiliary test equipment to conduct the output power measurement.
4. Record the max. Reading as observed from Spectrum or Power Meter.

**** Note: The duty cycle factor is compensated to obtain the maximum value of measurement in average.***

8.5 Measurement Result

8.5.1 Peak & Avg

802.11b Ch0					
CH	Freq. (MHz)	Data Rate	Peak Output Power (dBm)	Limit (dBm)	RESULT
1	2412	1	20.65	30.00	PASS
2	2417	1	21.94	30.00	PASS
6	2437	1	21.91	30.00	PASS
10	2457	1	22.02	30.00	PASS
11	2462	1	19.57	30.00	PASS
802.11b Ch0					
CH	Freq. (MHz)	Data Rate	Avg. Output Power (dBm)	Limit (dBm)	RESULT
1	2412	1	17.80	30.00	PASS
2	2417	1	19.15	30.00	PASS
6	2437	1	19.12	30.00	PASS
10	2457	1	19.16	30.00	PASS
11	2462	1	16.61	30.00	PASS

802.11g Ch0					
CH	Freq. (MHz)	Data Rate	Peak Output Power (dBm)	Limit (dBm)	RESULT
1	2412	6	25.77	30.00	PASS
2	2417	6	25.97	30.00	PASS
3	2422	6	26.12	30.00	PASS
6	2437	6	26.10	30.00	PASS
9	2452	6	26.16	30.00	PASS
10	2457	6	26.07	30.00	PASS
11	2462	6	25.32	30.00	PASS

802.11g Ch0					
CH	Freq. (MHz)	Data Rate	Avg. Output Power (dBm)	Limit (dBm)	RESULT
1	2412	6	16.07	30.00	PASS
2	2417	6	16.92	30.00	PASS
3	2422	6	18.12	30.00	PASS
6	2437	6	18.10	30.00	PASS
9	2452	6	18.15	30.00	PASS
10	2457	6	17.14	30.00	PASS
11	2462	6	15.24	30.00	PASS

802.11n_HT20M Ch0					
CH	Freq. (MHz)	Data Rate	Peak Output Power (dBm)	Limit (dBm)	RESULT
1	2412	MCS0	24.63	30.00	PASS
2	2417	MCS0	25.47	30.00	PASS
3	2422	MCS0	26.02	30.00	PASS
6	2437	MCS0	25.93	30.00	PASS
9	2452	MCS0	26.08	30.00	PASS
10	2457	MCS0	25.81	30.00	PASS
11	2462	MCS0	24.84	30.00	PASS
802.11n_HT20M Ch0					
CH	Freq. (MHz)	Data Rate	Avg. Output Power (dBm)	Limit (dBm)	RESULT
1	2412	MCS0	14.90	30.00	PASS
2	2417	MCS0	15.68	30.00	PASS
3	2422	MCS0	18.00	30.00	PASS
6	2437	MCS0	17.71	30.00	PASS
9	2452	MCS0	17.90	30.00	PASS
10	2457	MCS0	16.60	30.00	PASS
11	2462	MCS0	14.87	30.00	PASS

8.5.2 EIRP

802.11b Ch0							
CH	Freq. (MHz)	Data Rate	Avg. Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	RESULT
1	2412	1	17.80	2.13	19.93	36	PASS
2	2417	1	19.15	2.13	21.28	36	PASS
6	2437	1	19.12	2.13	21.25	36	PASS
10	2457	1	19.16	2.13	21.29	36	PASS
11	2462	1	16.61	2.13	18.74	36	PASS

802.11g Ch0							
CH	Freq. (MHz)	Data Rate	Avg. Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	RESULT
1	2412	6	16.07	2.13	18.20	36	PASS
2	2417	6	16.92	2.13	19.05	36	PASS
3	2422	6	18.12	2.13	20.25	36	PASS
6	2437	6	18.10	2.13	20.23	36	PASS
9	2452	6	18.15	2.13	20.28	36	PASS
10	2457	6	17.14	2.13	19.27	36	PASS
11	2462	6	15.24	2.13	17.37	36	PASS

802.11n_HT20M Ch0							
CH	Freq. (MHz)	Data Rate	Avg. Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	RESULT
1	2412	MCS0	14.90	2.13	17.03	36	PASS
2	2417	MCS0	15.68	2.13	17.81	36	PASS
3	2422	MCS0	18.00	2.13	20.13	36	PASS
6	2437	MCS0	17.71	2.13	19.84	36	PASS
9	2452	MCS0	17.90	2.13	20.03	36	PASS
10	2457	MCS0	16.60	2.13	18.73	36	PASS
11	2462	MCS0	14.87	2.13	17.00	36	PASS

9 EMISSION BANDWIDTH MEASUREMENT

9.1 Standard Applicable

The minimum 6 dB bandwidth shall be at least 500 kHz.

9.2 Measurement Equipment Used

Conducted Emission Test Site: Conducted 2					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
EXA Spectrum Analyzer	KEYSIGHT	N9010B	MY60240503	12/11/2020	12/10/2021
Attenuator	Mini-Circuit	BW-S10W2+	2	12/16/2020	12/15/2021
DC Block	Mini-Circuits	BLK-18-S+	1	12/16/2020	12/15/2021

9.3 Test Set-up

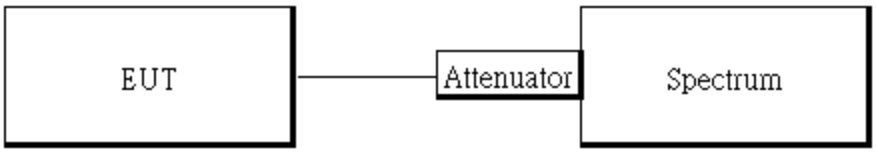

9.4 Measurement Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance .
3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
4. Set the spectrum analyzer as
   RBW= 100kHz ,
   VBW = 3 X RBW,
   Span= 2 to 5 times of the OBW,
   Sweep=auto,
   Detector = Peak, and Max hold for -6dB Bandwidth test.
5. Set the spectrum analyzer as
   RBW= 1 % to 5% of 99% Bandwidth ,
   VBW ≥ 3 X RBW,
   Span= large enough to capture all products of the modulation process,
   Sweep=auto,
   Detector = Peak, and Max hold for 99% Bandwidth test.
6. Turn on the 99% bandwidth function, max reading.
7. Repeat above procedures until all test default channel is completed

9.5 6dB Bandwidth

802.11b Ch0

Freq. (MHz)	6dB BW (kHz)	Limit (kHz)	Result
2412	9048.00	> 500	PASS
2437	9065.00	> 500	PASS
2462	**9067.00**	> 500	PASS

802.11g Ch0

Freq. (MHz)	6dB BW (kHz)	Limit (kHz)	Result
2412	15220.00	> 500	PASS
2437	**16300.00**	> 500	PASS
2462	15210.00	> 500	PASS

802.11_n_HT20 Ch0

Freq. (MHz)	6dB BW (kHz)	Limit (kHz)	Result
2412	15220.00	> 500	PASS
2437	**17320.00**	> 500	PASS
2462	15200.00	> 500	PASS

Refer to next page for plots

802.11b_20MHz_Chain0_2412MHz

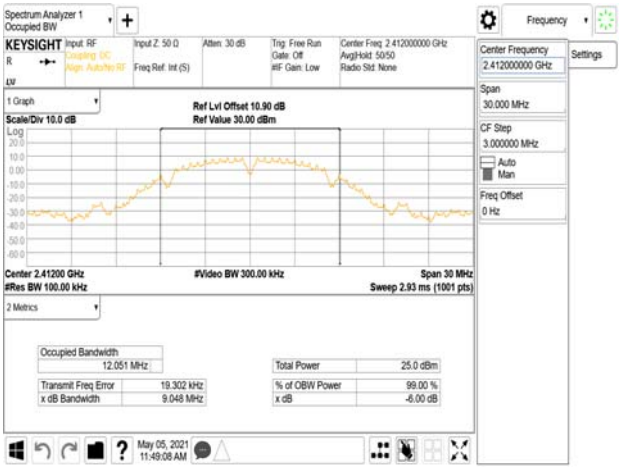

802.11g_20MHz_Chain0_2412MHz

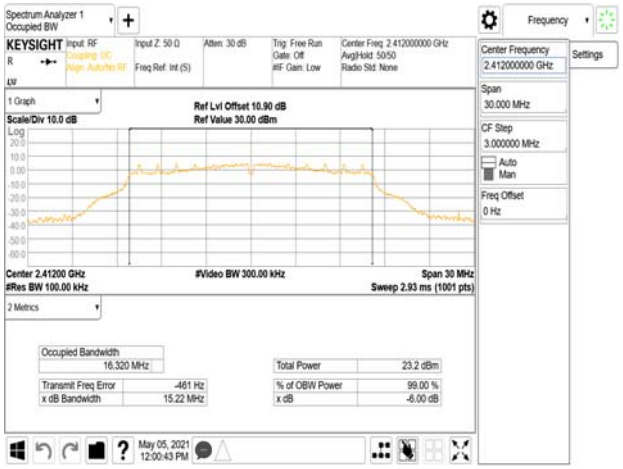

802.11b_20MHz_Chain0_2437MHz

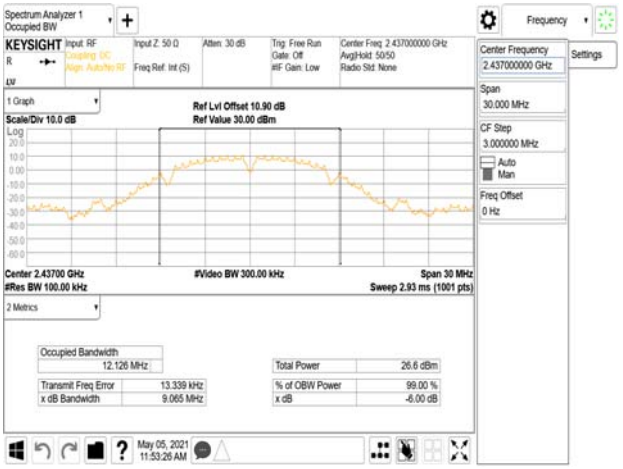

802.11g_20MHz_Chain0_2437MHz

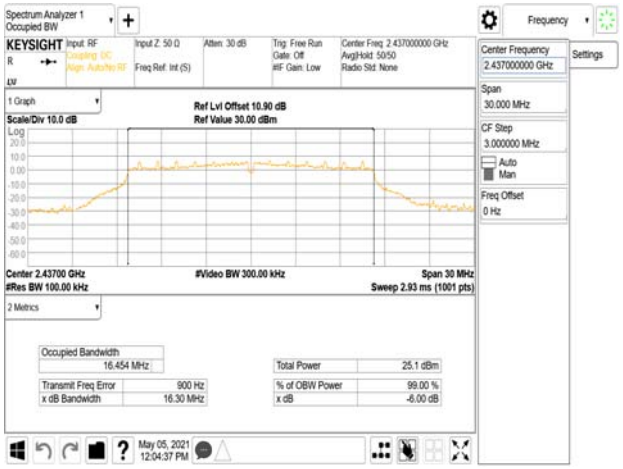

802.11b_20MHz_Chain0_2462MHz

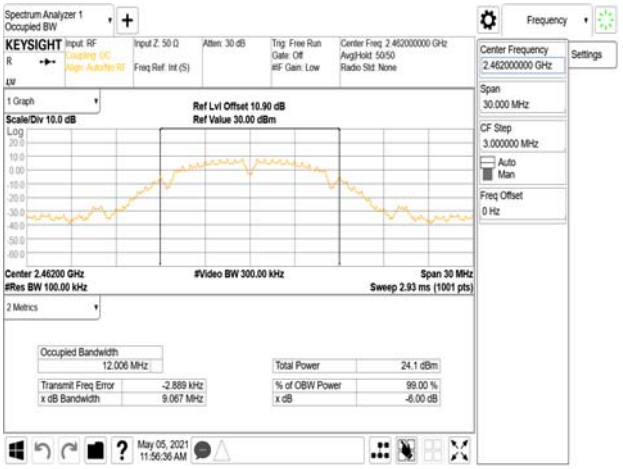

802.11g_20MHz_Chain0_2462MHz

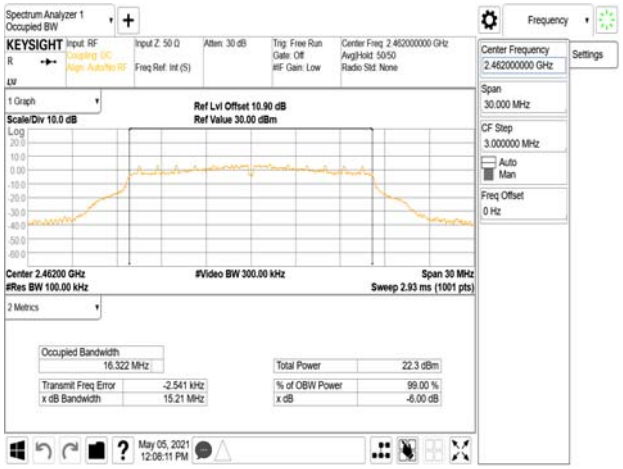

802.11n_20MHz_Chain0_2412MHz

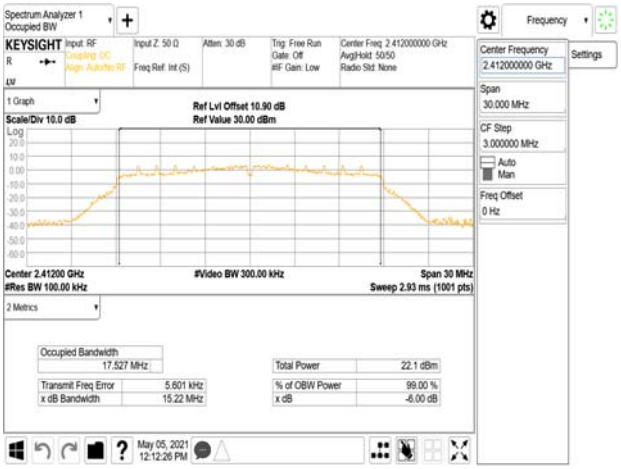

802.11n_20MHz_Chain0_2437MHz

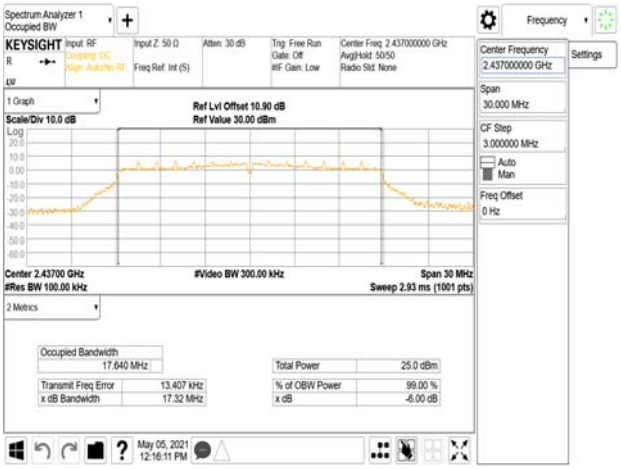

802.11n_20MHz_Chain0_2462MHz

9.6 99% Bandwidth

802.11b Ch0

Freq. (MHz)	99% BW (MHz)
2412	12.082
2437	12.167
2462	12.016

802.11g Ch0

Freq. (MHz)	99% BW (MHz)
2412	16.694
2437	16.945
2462	16.663

802.11n_HT20M Ch0

Freq. (MHz)	99% BW (MHz)
2412	17.752
2437	17.994
2462	17.752

Refer to next page for plots

802.11b_20MHz_Chain0_2412MHz

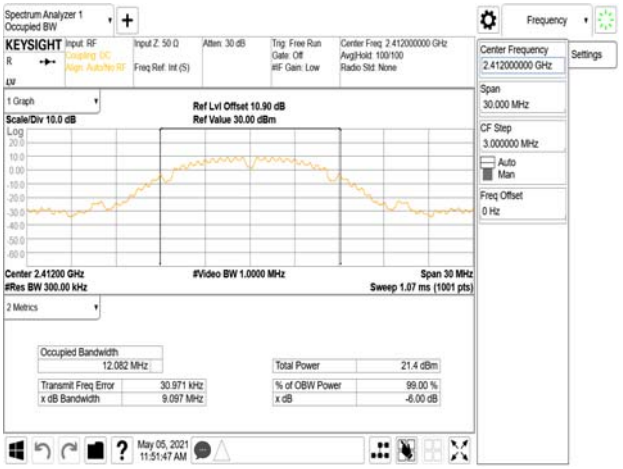

802.11g_20MHz_Chain0_2412MHz

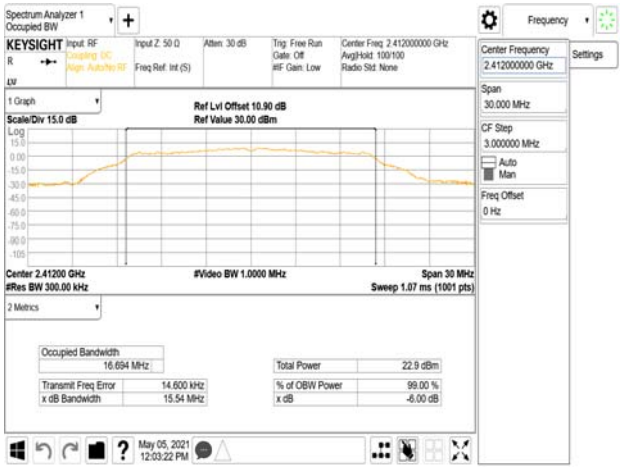

802.11b_20MHz_Chain0_2437MHz

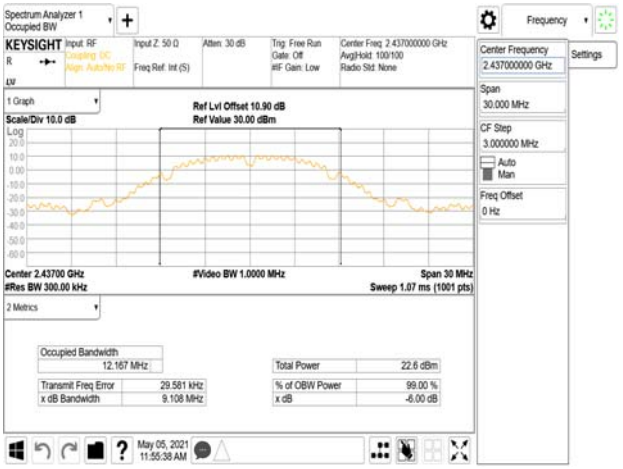

802.11g_20MHz_Chain0_2437MHz

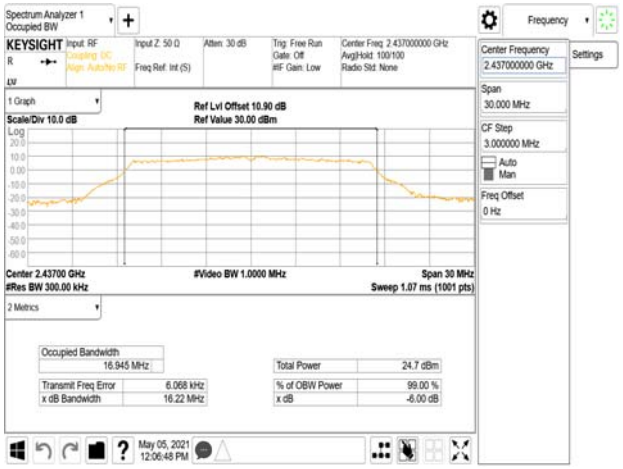

802.11b_20MHz_Chain0_2462MHz

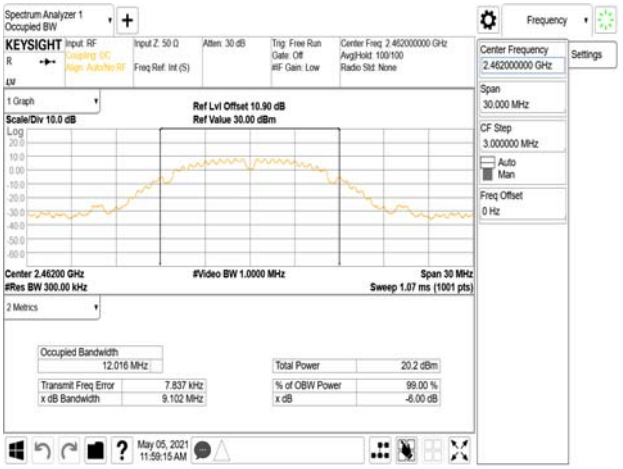

802.11g_20MHz_Chain0_2462MHz

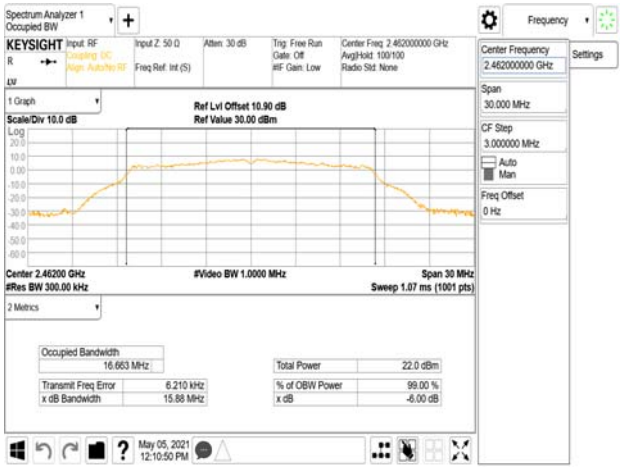

802.11n_20MHz_Chain0_2412MHz

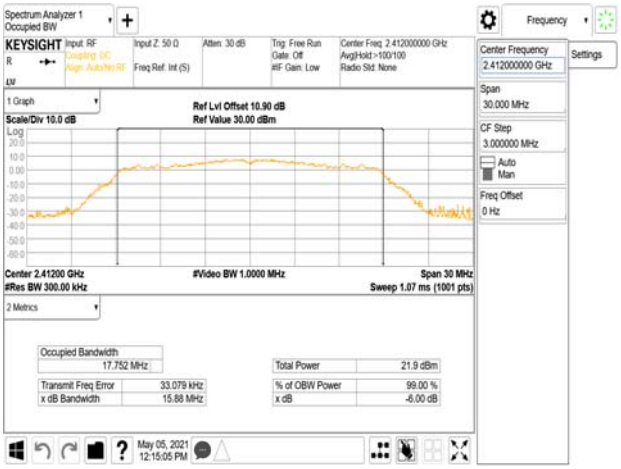

802.11n_20MHz_Chain0_2437MHz

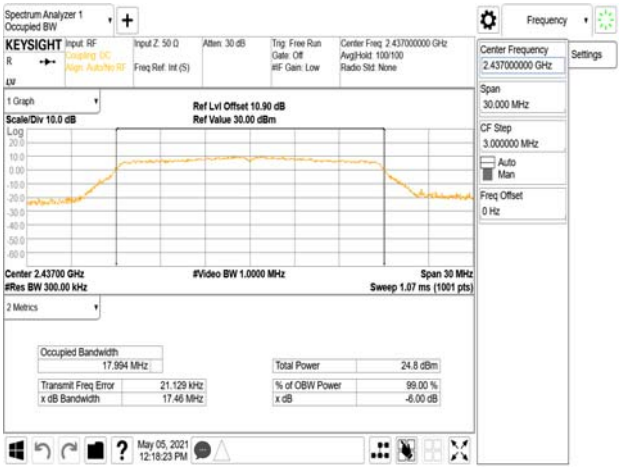

802.11n_20MHz_Chain0_2462MHz

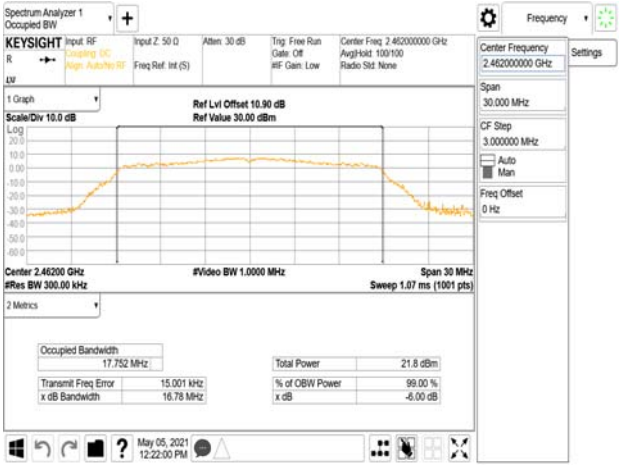

10 CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT

10.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a) & RSS-Gen §8.10, must also comply with the radiated emission limits specified in §15.209(a) & RSS-Gen §8.9.

10.2 Measurement Equipment Used

Conducted Emission Test Site: Conducted 2					
EQUIPMENT TYPE	**MFR**	**MODEL NUMBER**	**SERIAL NUMBER**	**LAST CAL.**	**CAL DUE.**
EXA Spectrum Analyzer	KEYSIGHT	N9010B	MY60240503	12/11/2020	12/10/2021
Attenuator	Mini-Circuit	BW-S10W2+	2	12/16/2020	12/15/2021
DC Block	Mini-Circuits	BLK-18-S+	1	12/16/2020	12/15/2021

10.3 Test SET-UP

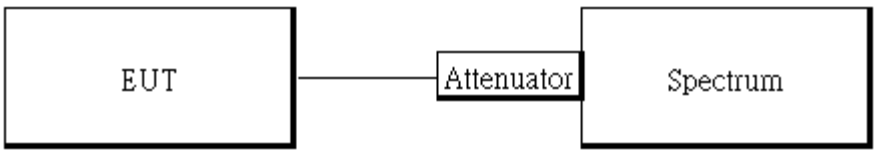

10.4 Measurement Procedure

Reference Level of Emission Limit:

1. Set analyzer center frequency to DTS channel center frequency.
2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance .
3. Set the span to 1.5 times the DTS channel bandwidth.
4. Set the RBW = 100kHz & VBW = 300 kHz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.

Conducted Band Edge:

1. To connect Antenna Port of EUT to Spectrum.
2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance .
3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
4. Set start to edge frequency, and stop frequency of spectrum analyzer so as to encompass the spectrum to be examined.
5. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Detector = Peak, Sweep = auto
6. Mark the highest reading of the emission as the reference level measurement.
7. Set DL as the limit = reading on marker of reference level measurement – 20dBm
8. Mark the highest readings of the emissions outside of 2400MHz~2483.5MHz.
9. Repeat above procedures until all default test channel (low, middle, and high) was complete.

Conducted Spurious Emission:

1. To connect Antenna Port of EUT to Spectrum
2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance .
3. Set RBW = 100 kHz & VBW= 300 kHz, Detector =Peak, Sweep = Auto.
4. Allow trace to fully stabilize.
5. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
6. Repeat above procedures until all default test channel measured were complete.

10.5 Measurement Result

Reference Level of Limit 802.11b mode		
Freq. (MHz)	PSD (dBm)	Reference Level of Limit (dBm)
2412	9.17	-10.83
2437	10.60	-9.40
2462	8.19	-11.81

Reference Level of Limit 802.11g mode		
Freq. (MHz)	PSD (dBm)	Reference Level of Limit (dBm)
2412	4.82	-15.18
2437	6.73	-13.27
2462	3.89	-16.11

Reference Level of Limit 802.11n20 mode		
Freq. (MHz)	PSD (dBm)	Reference Level of Limit (dBm)
2412	3.79	-16.21
2437	6.93	-13.07
2462	4.10	-15.90

Band Edge

802.11b_20MHz_Chain0_2412MHz

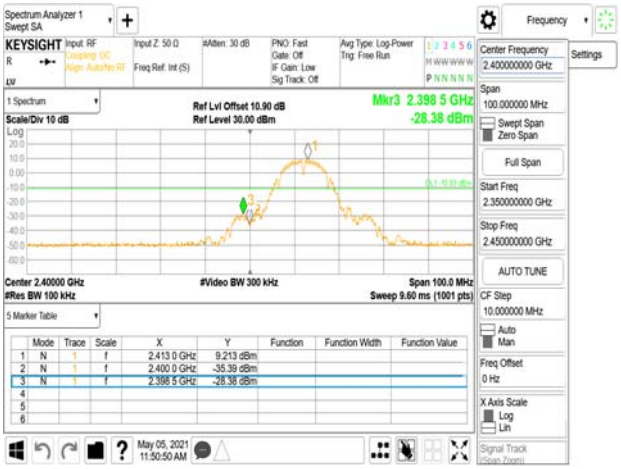

802.11g_20MHz_Chain0_2462MHz

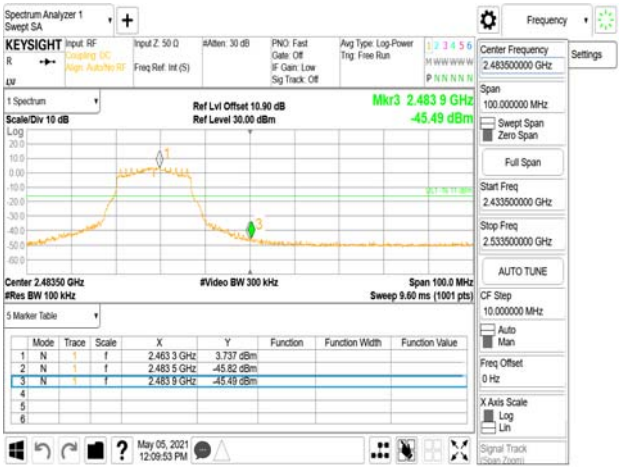

802.11b_20MHz_Chain0_2462MHz

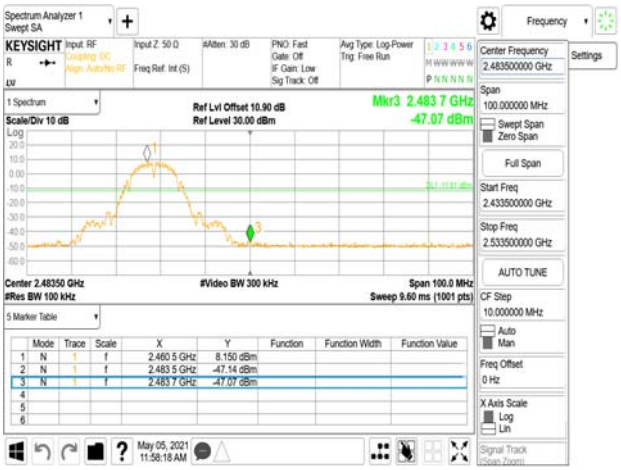

802.11n_20MHz_Chain0_2412MHz

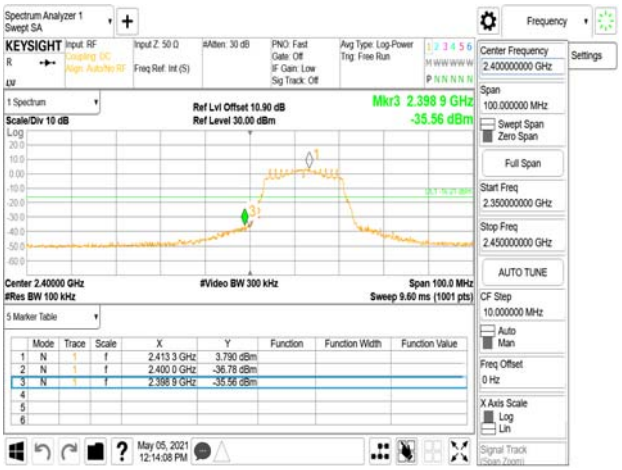

802.11g_20MHz_Chain0_2412MHz

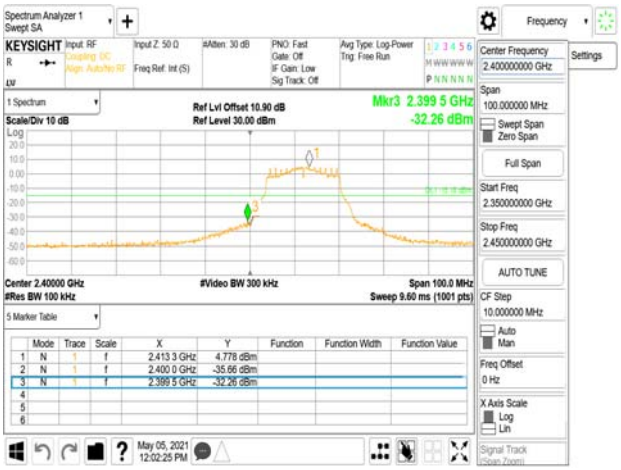

802.11n_20MHz_Chain0_2462MHz

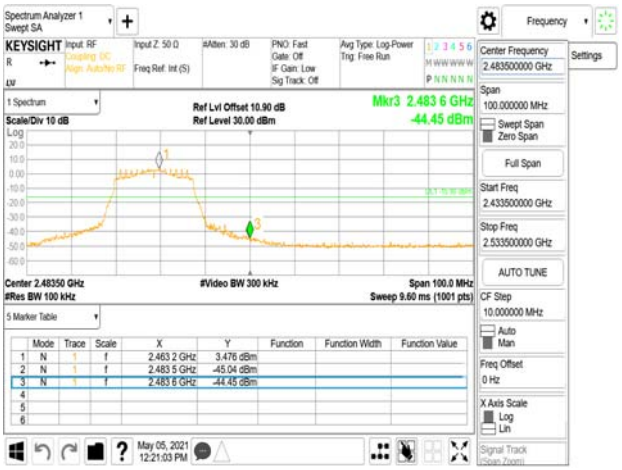

Reference Level

802.11b_20MHz_Chain0_2412MHz

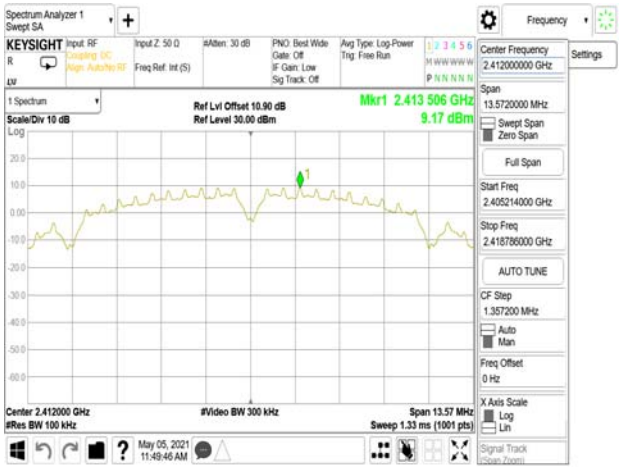

802.11g_20MHz_Chain0_2412MHz

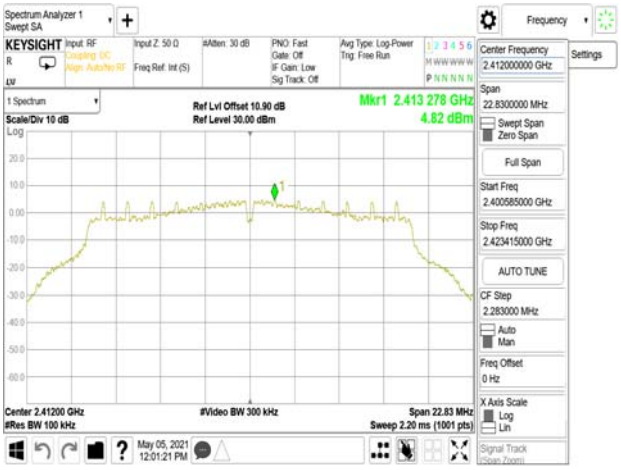

802.11b_20MHz_Chain0_2437MHz

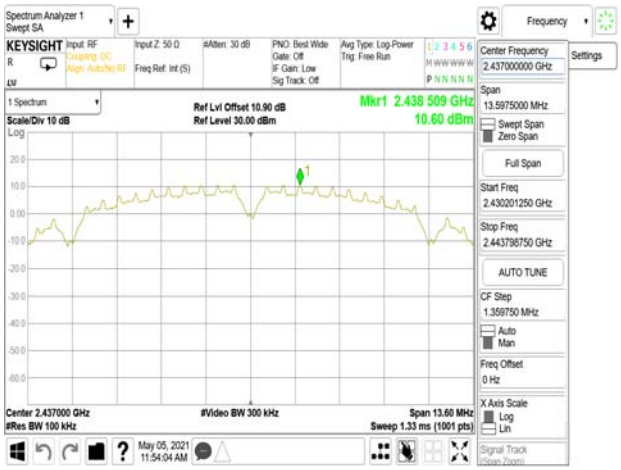

802.11g_20MHz_Chain0_2437MHz

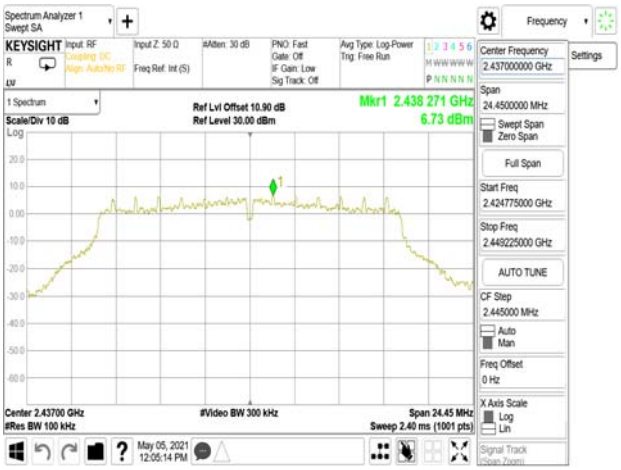

802.11b_20MHz_Chain0_2462MHz

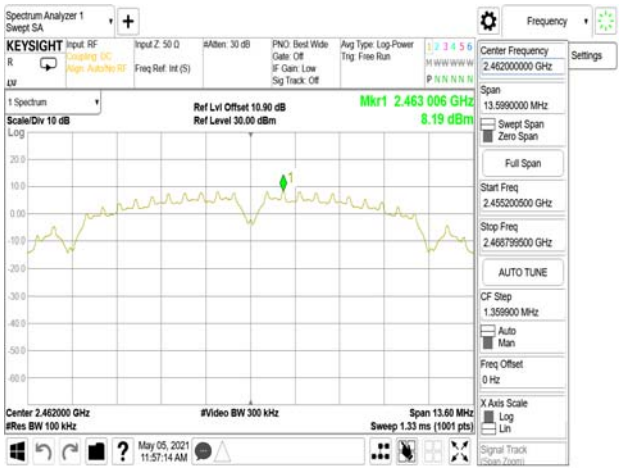

802.11g_20MHz_Chain0_2462MHz

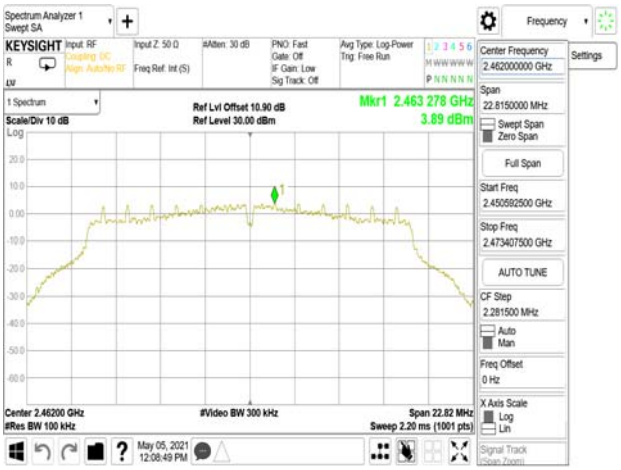

802.11n_20MHz_Chain0_2412MHz

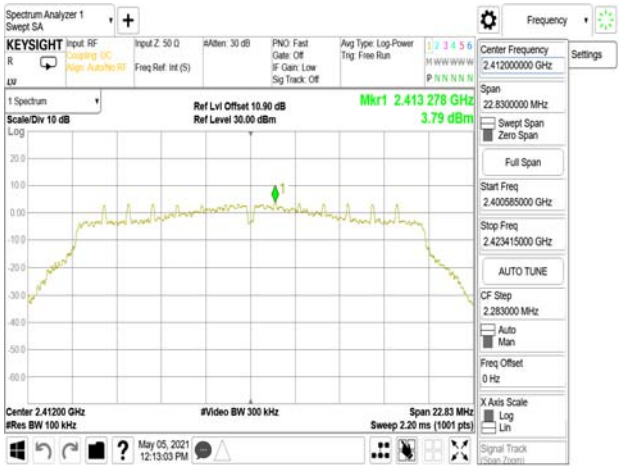

802.11n_20MHz_Chain0_2437MHz

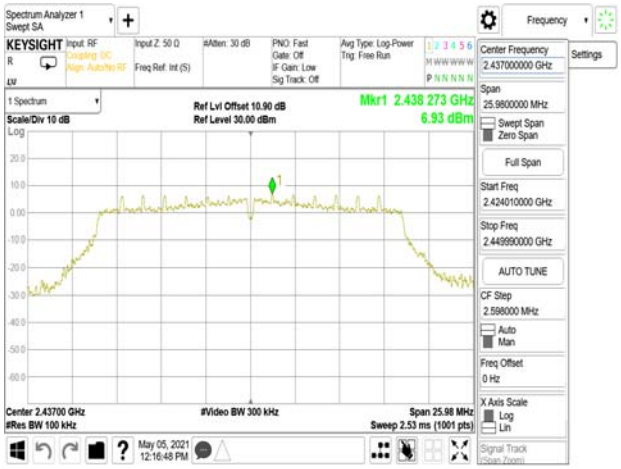

802.11n_20MHz_Chain0_2462MHz

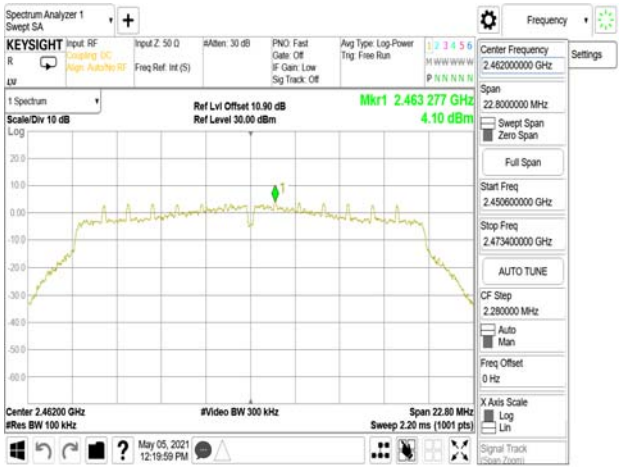

Spurious Emission

802.11b_20MHz_Chain0_2412MHz

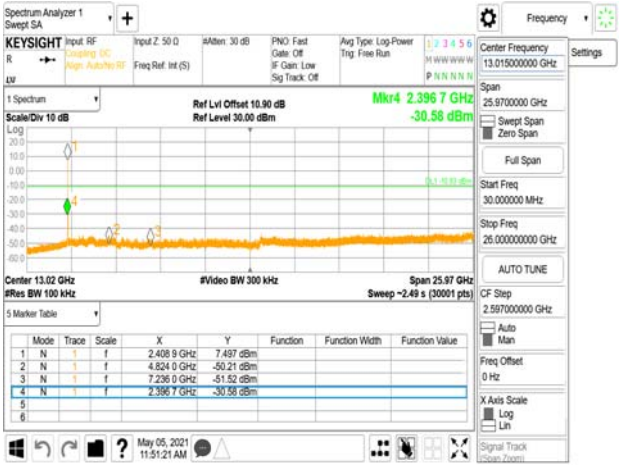

802.11g_20MHz_Chain0_2412MHz

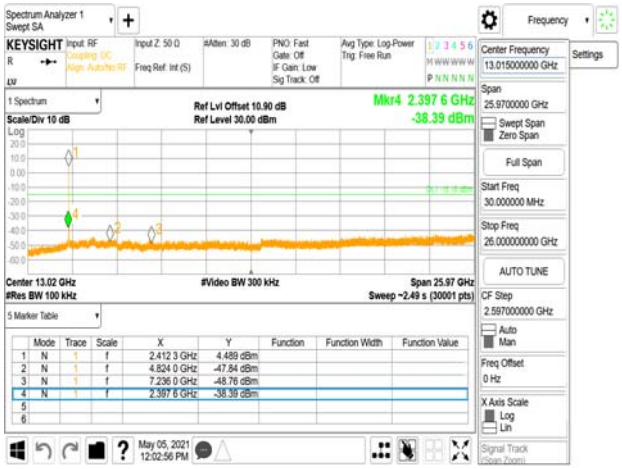

802.11b_20MHz_Chain0_2437MHz

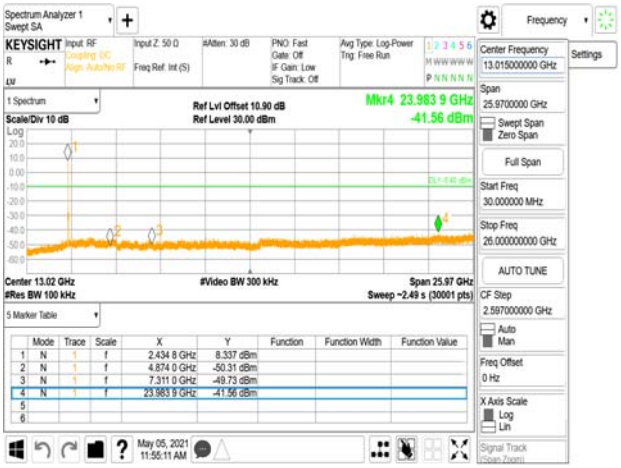

802.11g_20MHz_Chain0_2437MHz

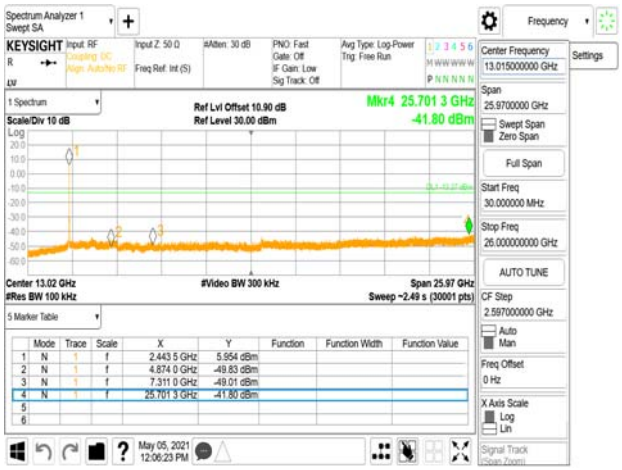

802.11b_20MHz_Chain0_2462MHz

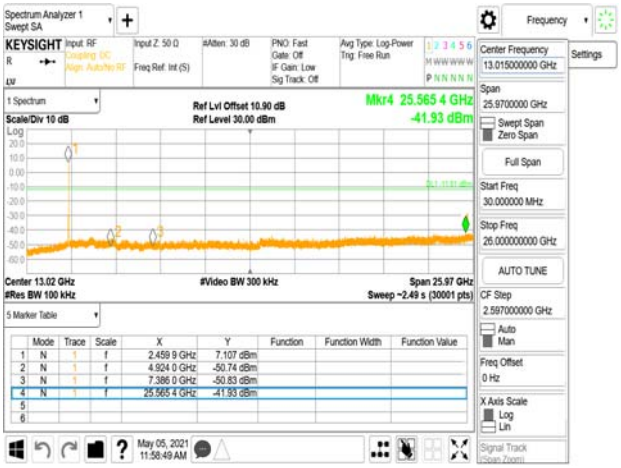

802.11g_20MHz_Chain0_2462MHz

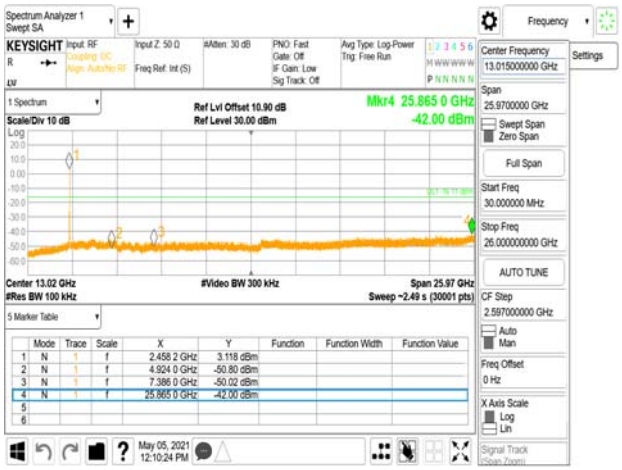

802.11n_20MHz_Chain0_2412MHz

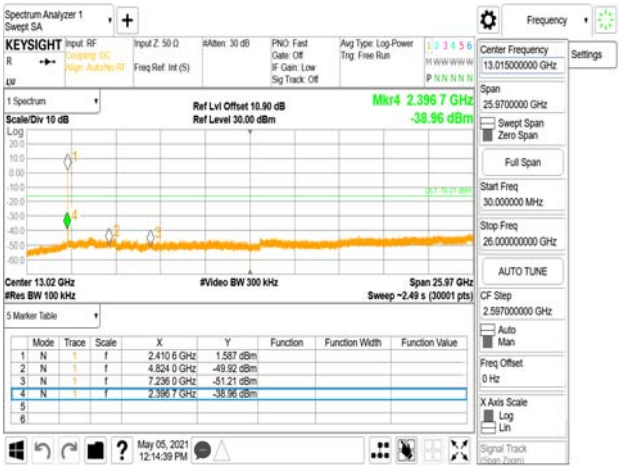

802.11n_20MHz_Chain0_2437MHz

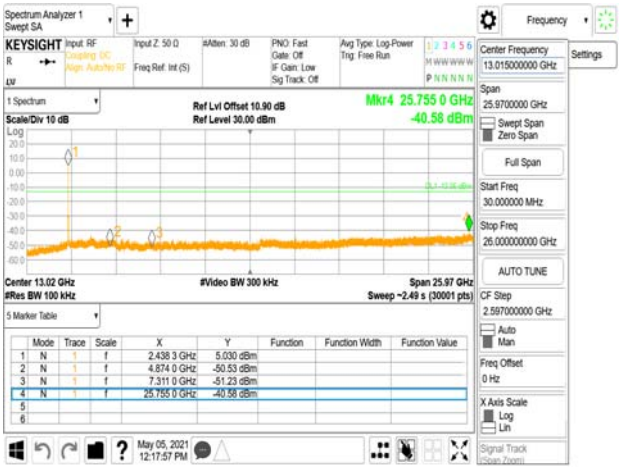

802.11n_20MHz_Chain0_2462MHz

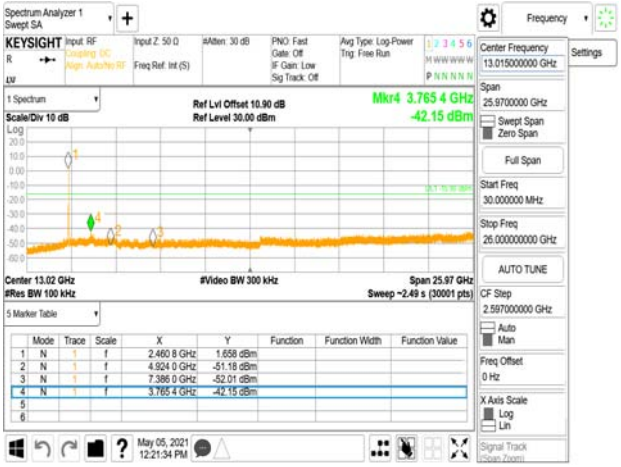

11 RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT

11.1 Standard Applicable

Radiated emissions which fall in the restricted bands must also comply with the §15.209 and RSS-Gen §8.9 Table 5 and 6 limit as below.

And according to §15.33(a) (1) & RSS-Gen §6.13.2.a, for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBμV/m) = 20 log Emission level (μV/m)

11.2 Measurement Equipment Used:

Radiated Emission Test Site: SAC 3					
EQUIPMENT TYPE	**MFR**	**MODEL NUMBER**	**SERIAL NUM-BER**	**LAST CAL.**	**CAL DUE.**
Horn Antenna	Schwarzbeck	BBHA9170	184	12/11/2020	12/10/2021
Horn Antenna	Schwarzbeck	BBHA9120D	1441	10/16/2020	10/15/2021
Bi-log Antenna	SCHWAZBECK	VULB9168	378	08/06/2020	08/05/2021
Loop Antenna	ETS.LIND-GREN	6502	148045	10/19/2020	10/18/2021
EXA Spectrum Analyzer	KEYSIGHT	N9010B	MY60240503	12/11/2020	12/10/2021
EMI Test Receiver	R&S	ESCI 7	100759	07/13/2020	07/12/2021
Pre-Amplifier	HP	8449B	3008A00578	12/16/2020	12/15/2021
Pre-Amplifier	EMC Instru-ments	EMC184045B	980135	12/16/2020	12/15/2021
Pre-Amplifier	HP	8447D	2944A07676	12/16/2020	12/15/2021
Attenuator	Mini-Circuit	BW-S10W2+	4	12/16/2020	12/15/2021
Filter 2400-2483.5 MHz	EWT	EWT-14-0166	M1	12/16/2020	12/15/2021
High Pass Filter	WI	WHKX4.0/18G-10SS	22	12/16/2020	12/15/2021
Coaxial Cable	Huber Suhner	SUCOFLEX 102	MY2636/2	12/16/2020	12/15/2021
Coaxial Cable	Huber Suhner	SUCOFLEX 104	340057/4	12/16/2020	12/15/2021
Coaxial Cable	Huber Suhner	SUCOFLEX 104PEA	800052/2	12/16/2020	12/15/2021
Coaxial Cable	Huber Suhner	SUCOFLEX 102	MY2621/2	12/16/2020	12/15/2021
Coaxial Cable	Huber Suhner	SUCOFLEX 102	MY2617/2	12/16/2020	12/15/2021
Coaxial Cable	Huber Suhner	SUCOFLEX 102	MY2630/2	12/16/2020	12/15/2021
Coaxial Cable	Huber Suhner	SUCOFLEX 102	MY22962/2	12/16/2020	12/15/2021
Site Cal	SGS	SAC III chamber	N/A	01/01/2021	12/31/2021
Test Software	audix	e3	Ver. 6.11-20180413	N.C.R	N.C.R

NOTE: N.C.R refers to Not Calibrated Required.

11.3 Test SET-UP

(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

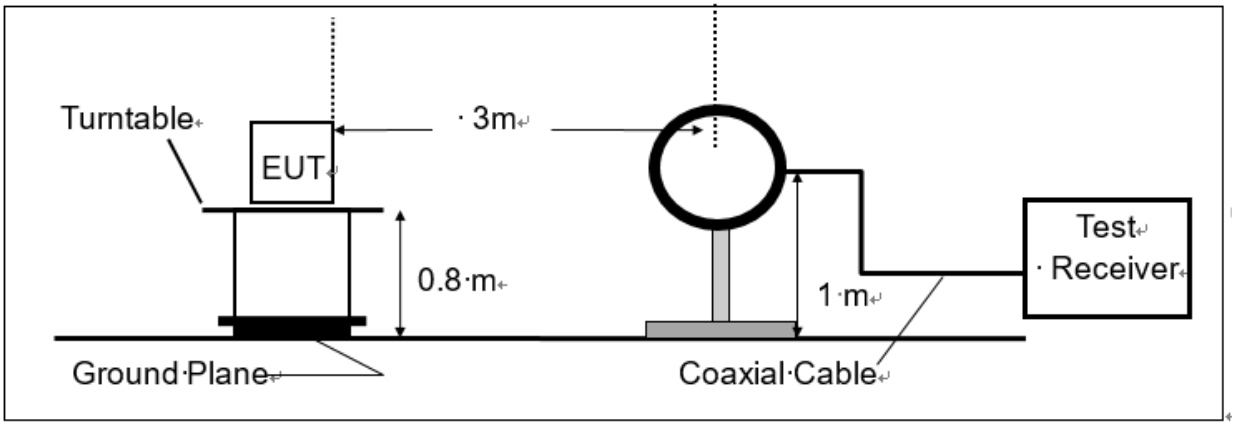

(B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

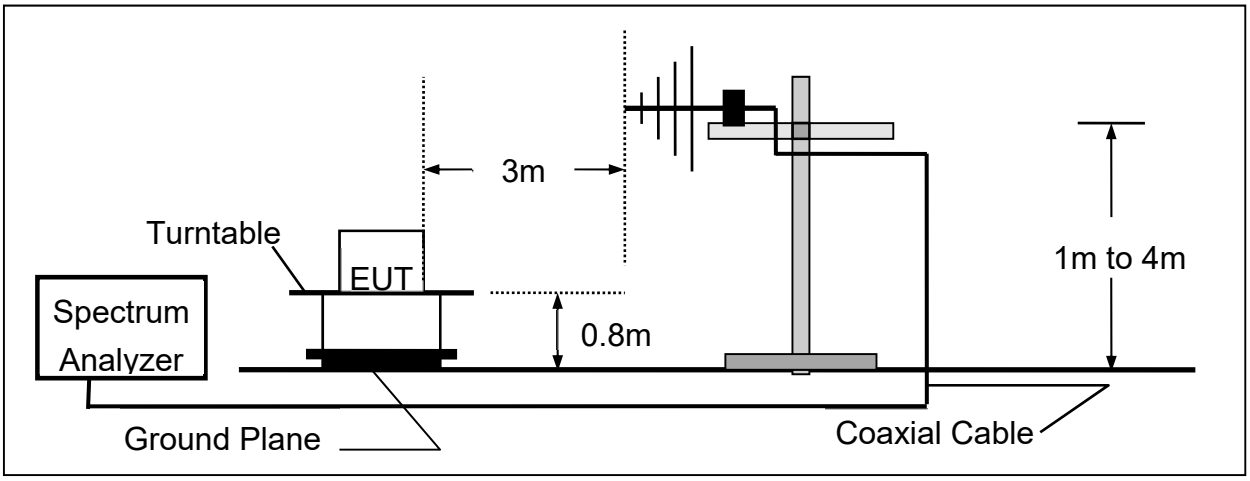

(C) Radiated Emission Test Set-UP Frequency Over 1 GHz

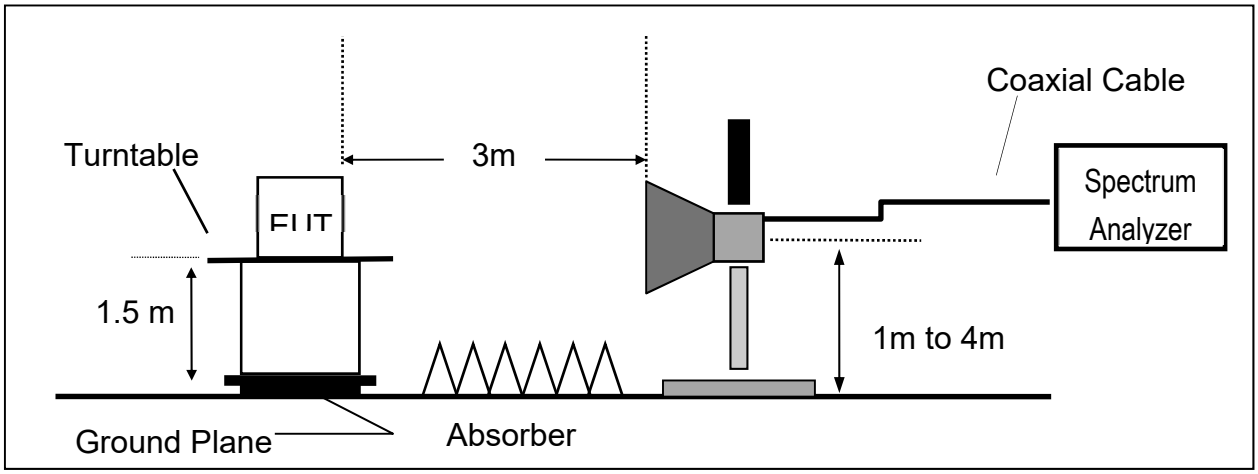

11.4 Measurement Procedure

1. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance .
2. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 1.5m for frequency> 1GHz above ground plane.
3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
5. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” is still within the 3dB illumination BW of the measurement antenna.
6. Set the spectrum analyzer as RBW=120 kHz and VBW=300 kHz for Peak Detector (PK) and Quasi-peak (QP) at frequency below 1 GHz.
7. Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Peak Detector at frequency above 1 GHz.
8. Set the spectrum analyzer as RBW=1 MHz, VBW=10 Hz (Duty cycle > 98%) or VBW ≥ 1/T (Duty cycle < 98%) for Average Detector at frequency above 1 GHz.
9. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
10. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
11. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. On spectrum, change spectrum mode in linear display mode, and reduce VBW = 10Hz if average reading is measured.
12. Repeat above procedures until all default test channel measured were complete.

11.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where *FS = Field Strength* *CL = Cable Attenuation Factor (Cable Loss)*

RA = Reading Amplitude *AG = Amplifier Gain*

AF = Antenna Factor

*The limit of the emission level is expressed in dBuV/m, which converts 20*log(uV/m)*

Actual FS(dBμV/m) = SPA. Reading level(dBμV) + Factor(dB)

Factor(dB) = Antenna Factor(dBμV/m) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

11.6 Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) & RSS-GEN §6.13.2 was not reported.

11.7 Measurement Result

Note:

1. *Refer to next page spectrum analyzer data chart and tabular data sheets.*
2. *Measurements are completed at peak and average level, the mark of average is the highest emission in restricted bands*

11.7.1 Radiated Band Edge Measurement Result

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11b	Test Date	:2021-04-22
Test Frequency	:2412 MHz	Temp./Humi.	:24.1/63
Test Mode	:Bandedge CH Low	Antenna Pol.	:VERTICAL
EUT Pol	:H Plane	Engineer	:Nick Lin

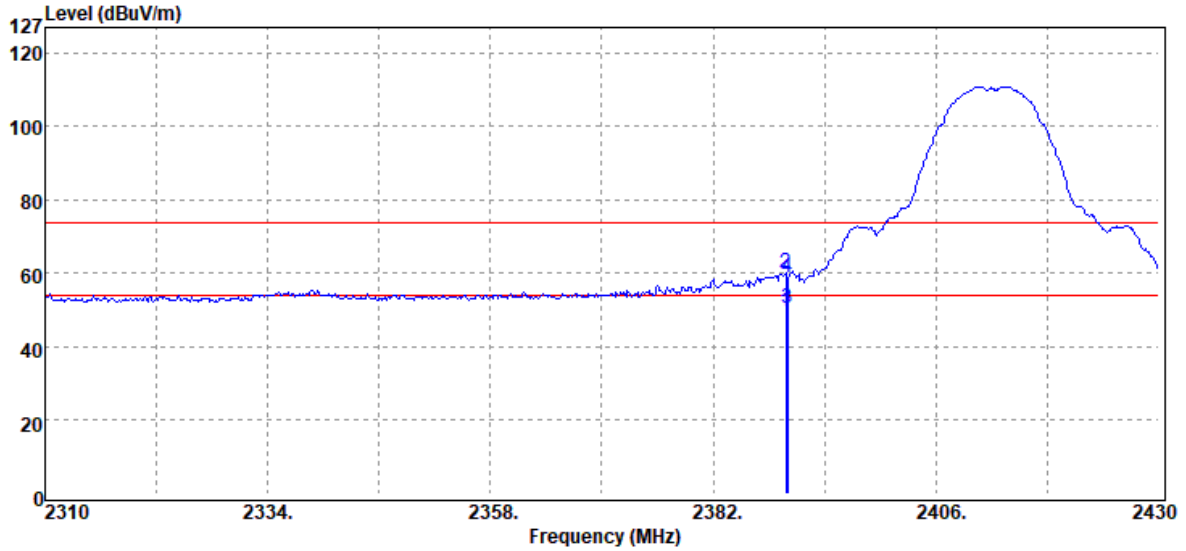

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2389.80	Average	48.78	0.76	49.54	54.00	-4.46
2389.80	Peak	59.63	0.76	60.39	74.00	-13.61
2390.00	Average	49.57	0.76	50.33	54.00	-3.67
2390.00	Peak	58.06	0.76	58.82	74.00	-15.18

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11b	Test Date	:2021-04-22
Test Frequency	:2412 MHz	Temp./Humi.	:24.1/63
Test Mode	:Bandedge CH Low	Antenna Pol.	:HORIZONTAL
EUT Pol	:H Plane	Engineer	:Nick Lin

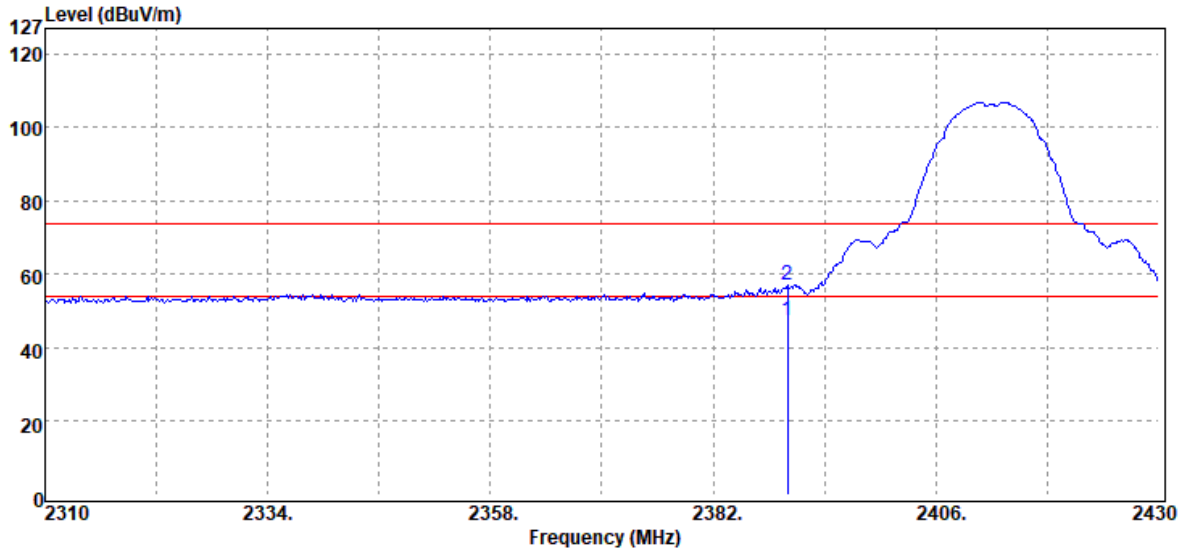

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	46.61	0.76	47.37	54.00	-6.63
2390.00	Peak	56.18	0.76	56.94	74.00	-17.06

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11b	Test Date	:2021-04-22
Test Frequency	:2417 MHz	Temp./Humi.	:24.1/63
Test Mode	:Bandedge CH Low	Antenna Pol.	:VERTICAL
EUT Pol	:H Plane	Engineer	:Nick Lin

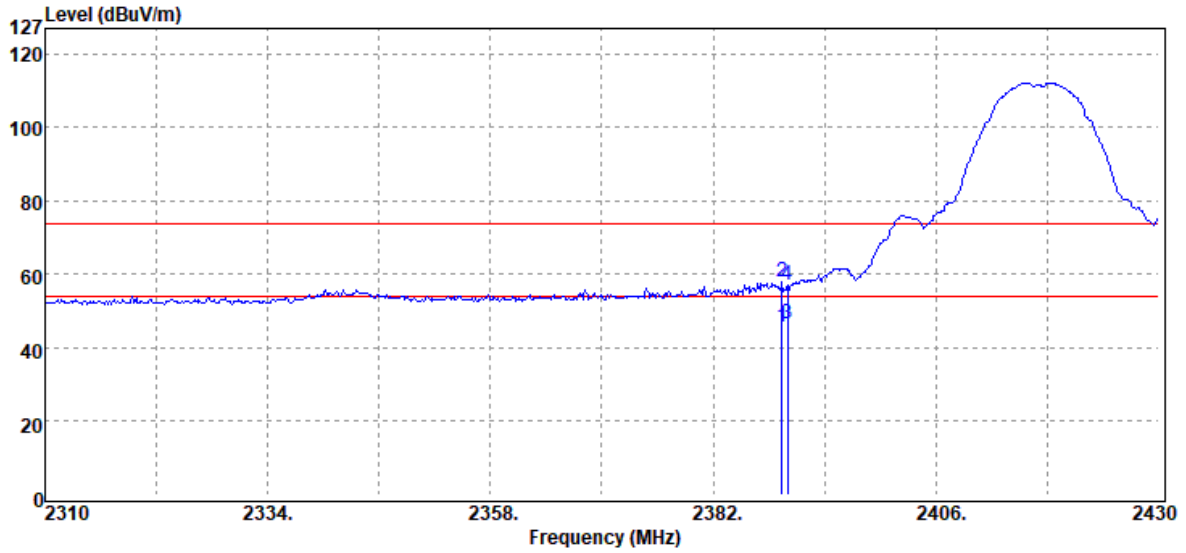

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2389.44	Average	44.77	0.76	45.53	54.00	-8.47
2389.44	Peak	57.42	0.76	58.18	74.00	-15.82
2390.00	Average	46.03	0.76	46.79	54.00	-7.21
2390.00	Peak	56.32	0.76	57.08	74.00	-16.92

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11b	Test Date	:2021-04-22
Test Frequency	:2417 MHz	Temp./Humi.	:24.1/63
Test Mode	:Bandedge CH Low	Antenna Pol.	:HORIZONTAL
EUT Pol	:H Plane	Engineer	:Nick Lin

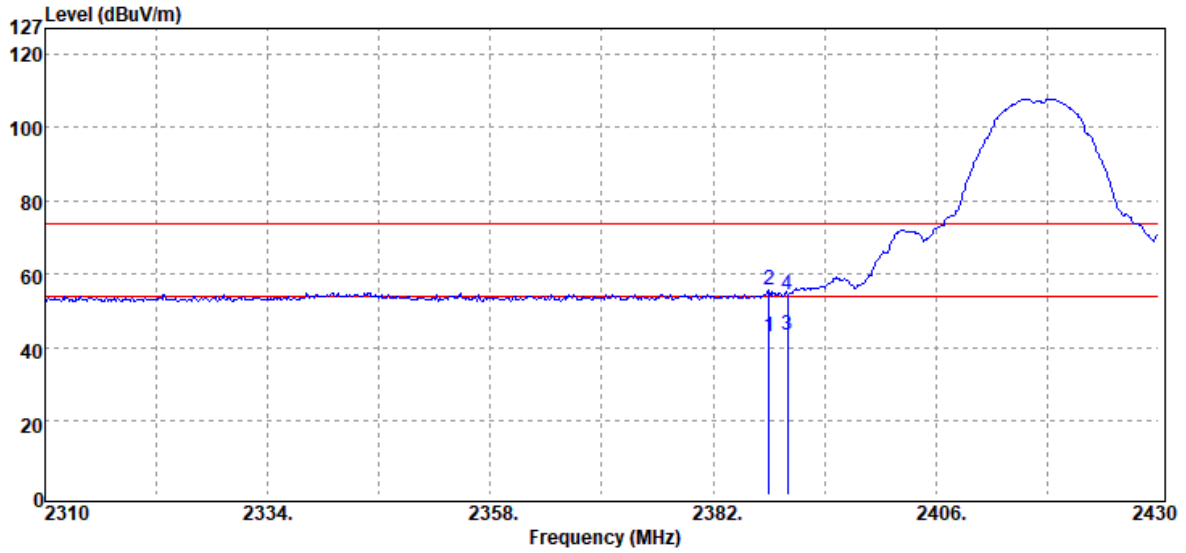

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2388.00	Average	42.17	0.76	42.93	54.00	-11.07
2388.00	Peak	54.86	0.76	55.62	74.00	-18.38
2390.00	Average	42.82	0.76	43.58	54.00	-10.42
2390.00	Peak	53.85	0.76	54.61	74.00	-19.39

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11b	Test Date	:2021-04-22
Test Frequency	:2457 MHz	Temp./Humi.	:24.1/63
Test Mode	:Bandedge CH High	Antenna Pol.	:VERTICAL
EUT Pol	:H Plane	Engineer	:Nick Lin

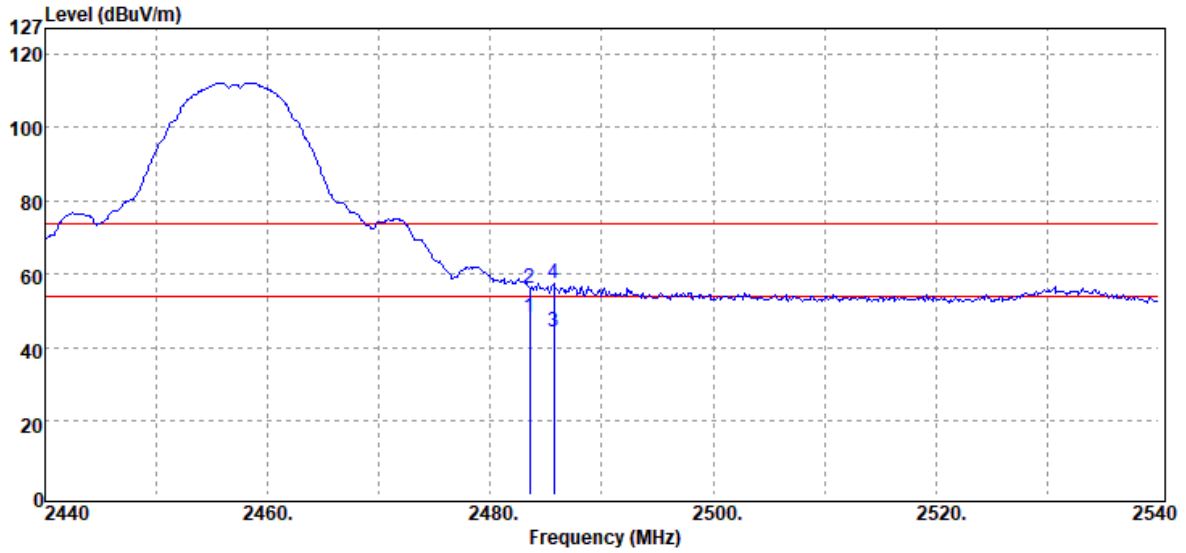

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	47.70	0.54	48.24	54.00	-5.76
2483.50	Peak	55.79	0.54	56.33	74.00	-17.67
2485.70	Average	44.05	0.54	44.59	54.00	-9.41
2485.70	Peak	57.18	0.54	57.72	74.00	-16.28

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11b	Test Date	:2021-04-22
Test Frequency	:2457 MHz	Temp./Humi.	:24.1/63
Test Mode	:Bandedge CH High	Antenna Pol.	:HORIZONTAL
EUT Pol	:H Plane	Engineer	:Nick Lin

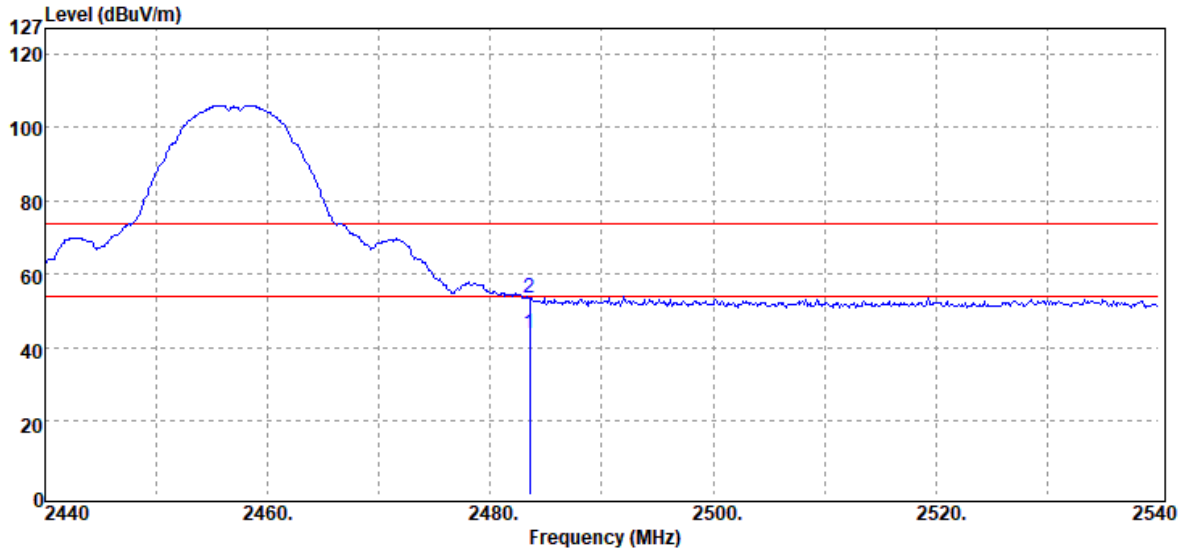

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	43.31	0.54	43.85	54.00	-10.15
2483.50	Peak	52.86	0.54	53.40	74.00	-20.60

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11b	Test Date	:2021-04-22
Test Frequency	:2462 MHz	Temp./Humi.	:24.1/63
Test Mode	:Bandedge CH High	Antenna Pol.	:VERTICAL
EUT Pol	:H Plane	Engineer	:Nick Lin

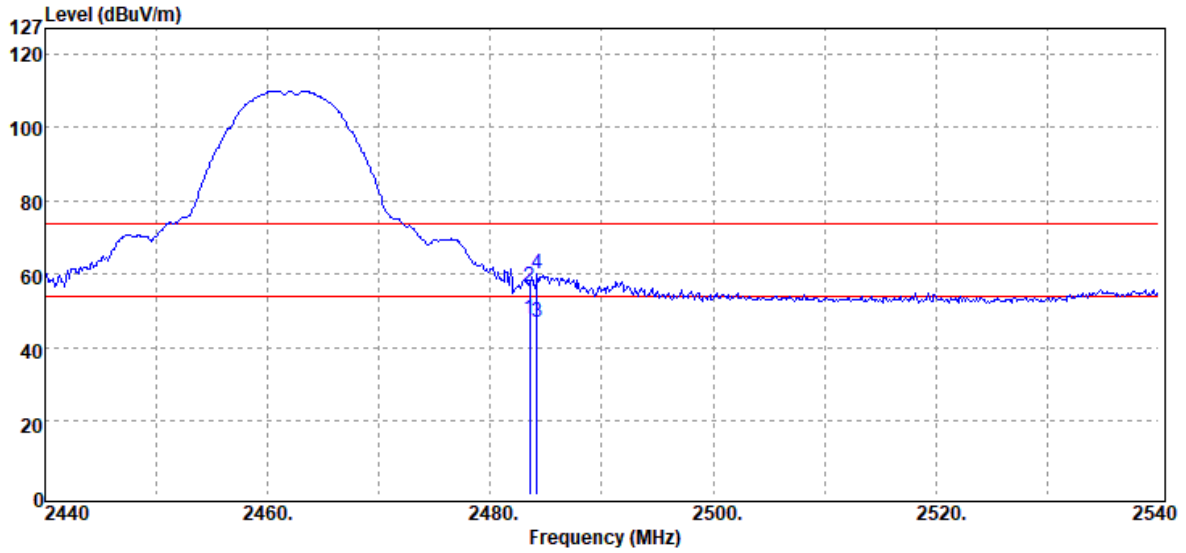

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	47.48	0.54	48.02	54.00	-5.98
2483.50	Peak	56.13	0.54	56.67	74.00	-17.33
2484.20	Average	46.48	0.54	47.02	54.00	-6.98
2484.20	Peak	59.73	0.54	60.27	74.00	-13.73

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11b	Test Date	:2021-04-22
Test Frequency	:2462 MHz	Temp./Humi.	:24.1/63
Test Mode	:Bandedge CH High	Antenna Pol.	:HORIZONTAL
EUT Pol	:H Plane	Engineer	:Nick Lin

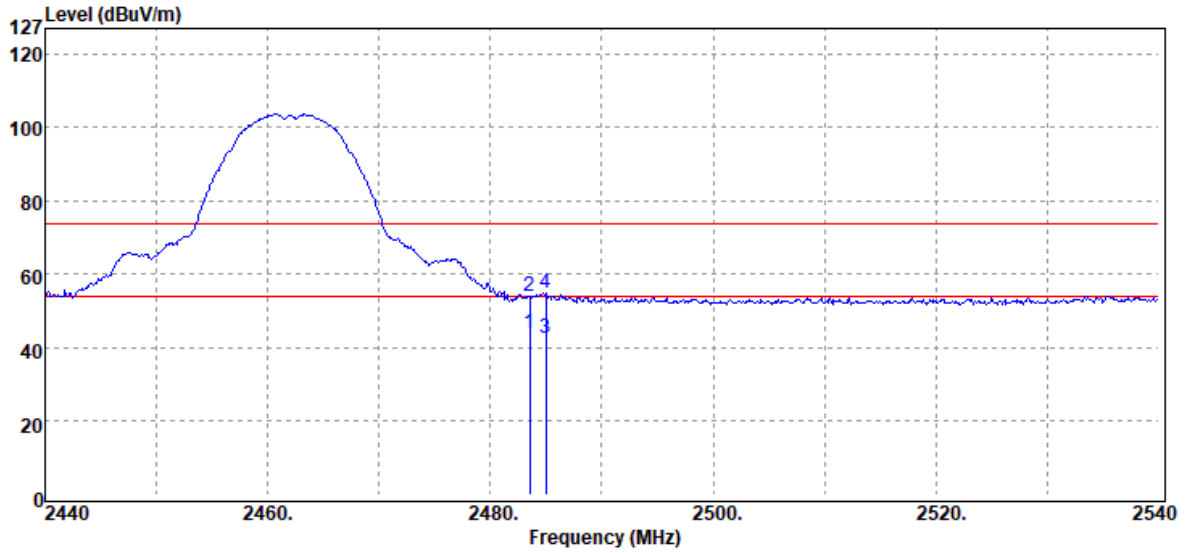

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	43.19	0.54	43.73	54.00	-10.27
2483.50	Peak	53.57	0.54	54.11	74.00	-19.89
2485.00	Average	42.19	0.54	42.73	54.00	-11.27
2485.00	Peak	54.39	0.54	54.93	74.00	-19.07

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11g	Test Date	:2021-04-22
Test Frequency	:2412 MHz	Temp./Humi.	:24.1/63
Test Mode	:Bandedge CH Low	Antenna Pol.	:VERTICAL
EUT Pol	:H Plane	Engineer	:Nick Lin

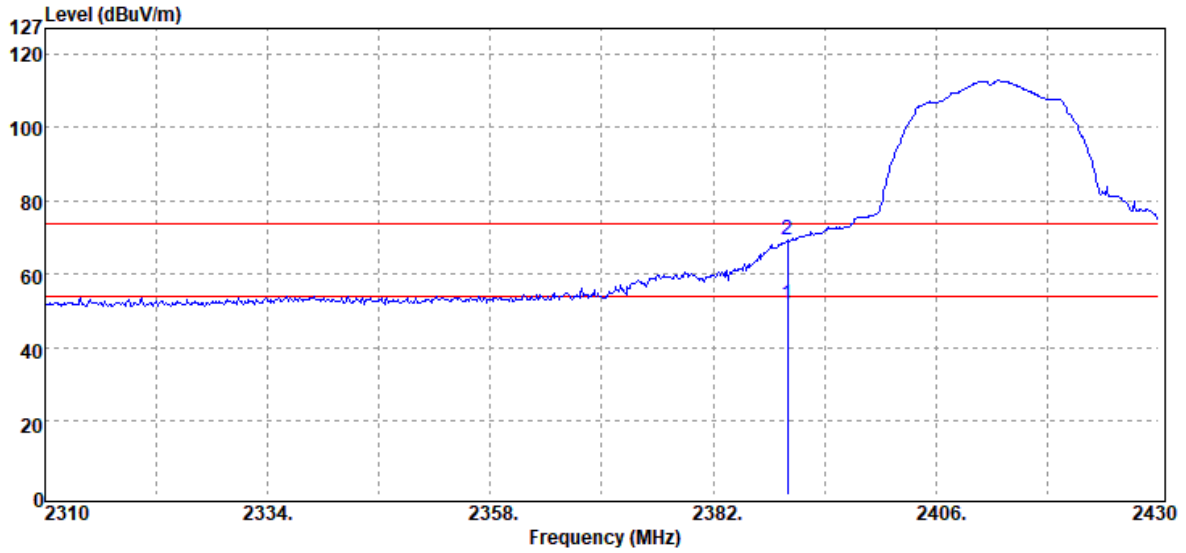

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	51.08	0.76	51.84	54.00	-2.16
2390.00	Peak	68.52	0.76	69.28	74.00	-4.72

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11g	Test Date	:2021-04-22
Test Frequency	:2412 MHz	Temp./Humi.	:24.1/63
Test Mode	:Bandedge CH Low	Antenna Pol.	:HORIZONTAL
EUT Pol	:H Plane	Engineer	:Nick Lin

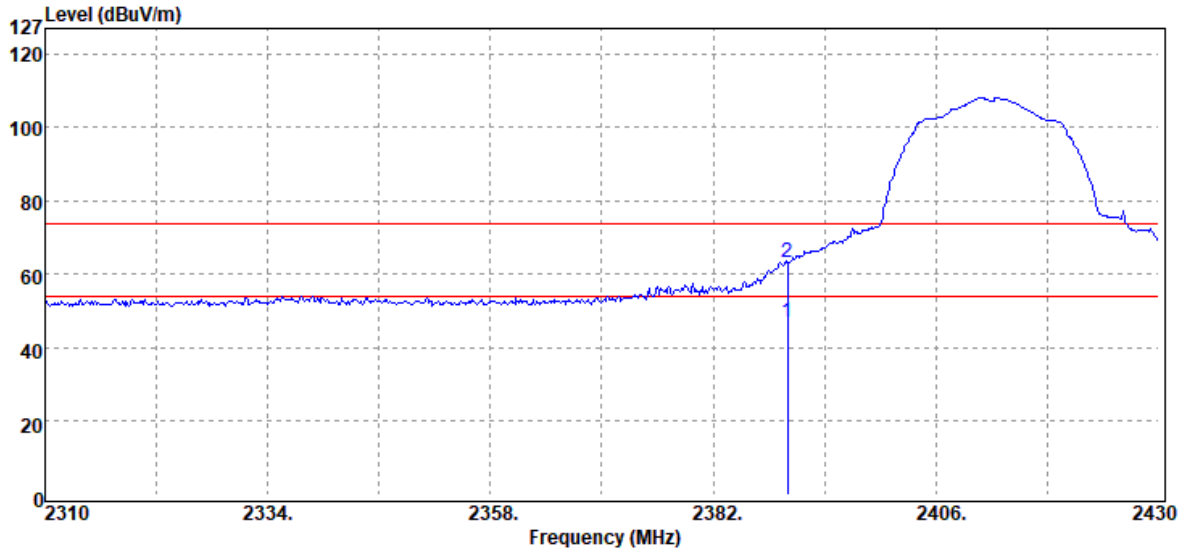

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	46.39	0.76	47.15	54.00	-6.85
2390.00	Peak	62.55	0.76	63.31	74.00	-10.69

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11g	Test Date	:2021-04-22
Test Frequency	:2417 MHz	Temp./Humi.	:24.1/63
Test Mode	:Bandedge CH Low	Antenna Pol.	:VERTICAL
EUT Pol	:H Plane	Engineer	:Nick Lin

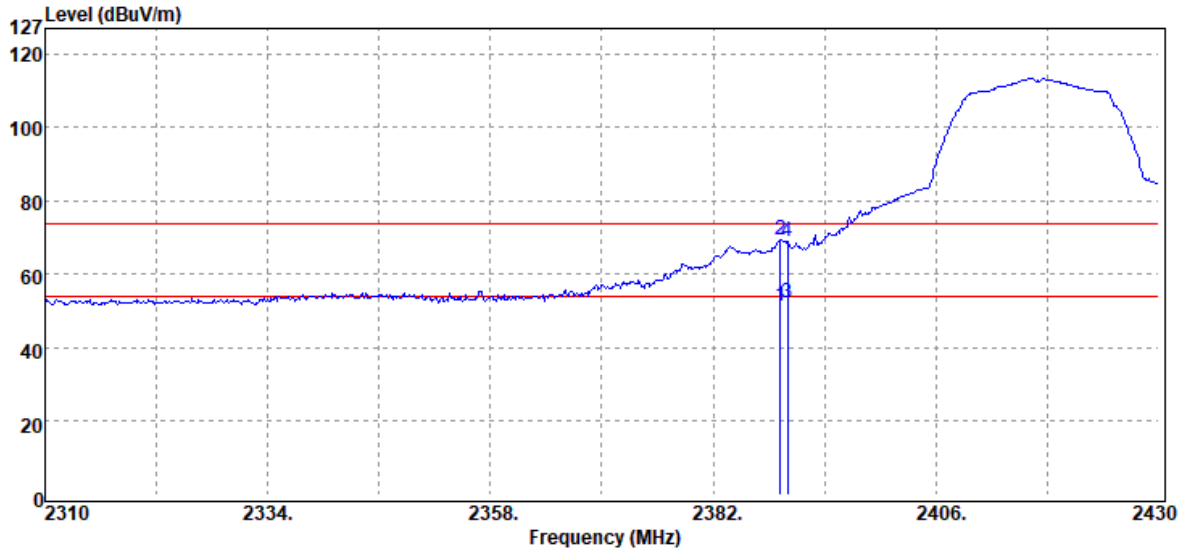

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2389.20	Average	50.72	0.76	51.48	54.00	-2.52
2389.20	Peak	68.72	0.76	69.48	74.00	-4.52
2390.00	Average	51.33	0.76	52.09	54.00	-1.91
2390.00	Peak	68.25	0.76	69.01	74.00	-4.99

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11g	Test Date	:2021-04-22
Test Frequency	:2417 MHz	Temp./Humi.	:24.1/63
Test Mode	:Bandedge CH Low	Antenna Pol.	:HORIZONTAL
EUT Pol	:H Plane	Engineer	:Nick Lin

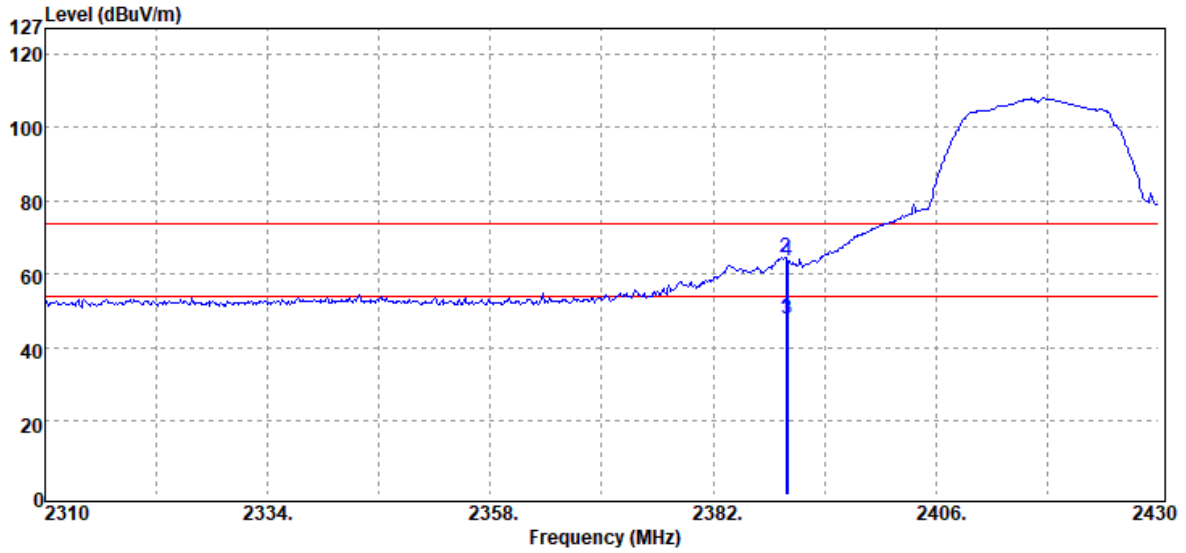

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2389.80	Average	47.01	0.76	47.77	54.00	-6.23
2389.80	Peak	63.93	0.76	64.69	74.00	-9.31
2390.00	Average	47.29	0.76	48.05	54.00	-5.95
2390.00	Peak	62.84	0.76	63.60	74.00	-10.40

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11g	Test Date	:2021-04-22
Test Frequency	:2422 MHz	Temp./Humi.	:24.1/63
Test Mode	:Bandedge CH Low	Antenna Pol.	:VERTICAL
EUT Pol	:H Plane	Engineer	:Nick Lin

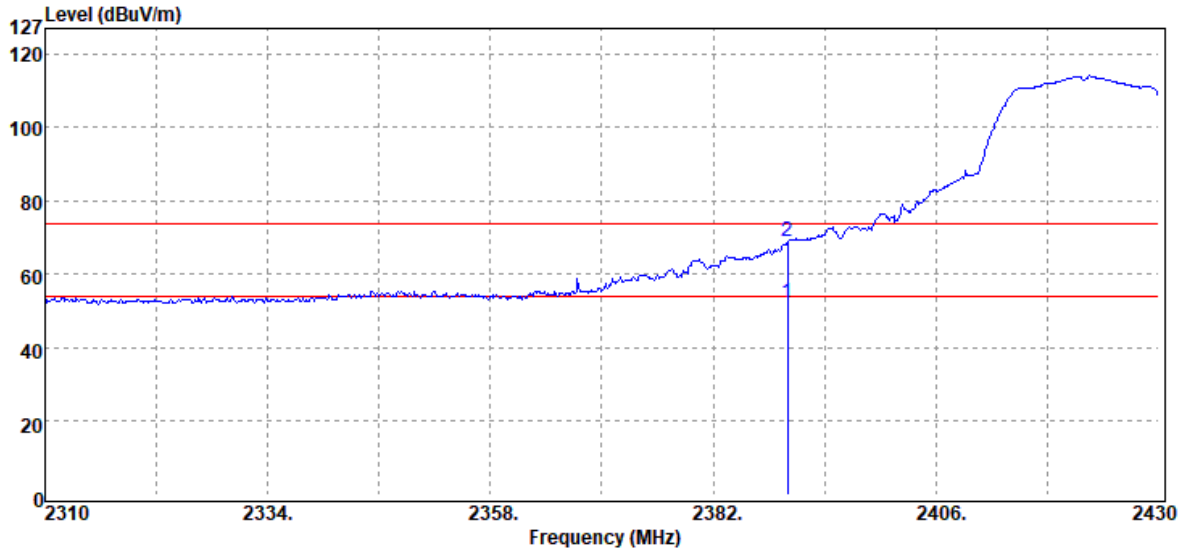

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	51.35	0.76	52.11	54.00	-1.89
2390.00	Peak	68.05	0.76	68.81	74.00	-5.19

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11g	Test Date	:2021-04-22
Test Frequency	:2422 MHz	Temp./Humi.	:24.1/63
Test Mode	:Bandedge CH Low	Antenna Pol.	:HORIZONTAL
EUT Pol	:H Plane	Engineer	:Nick Lin

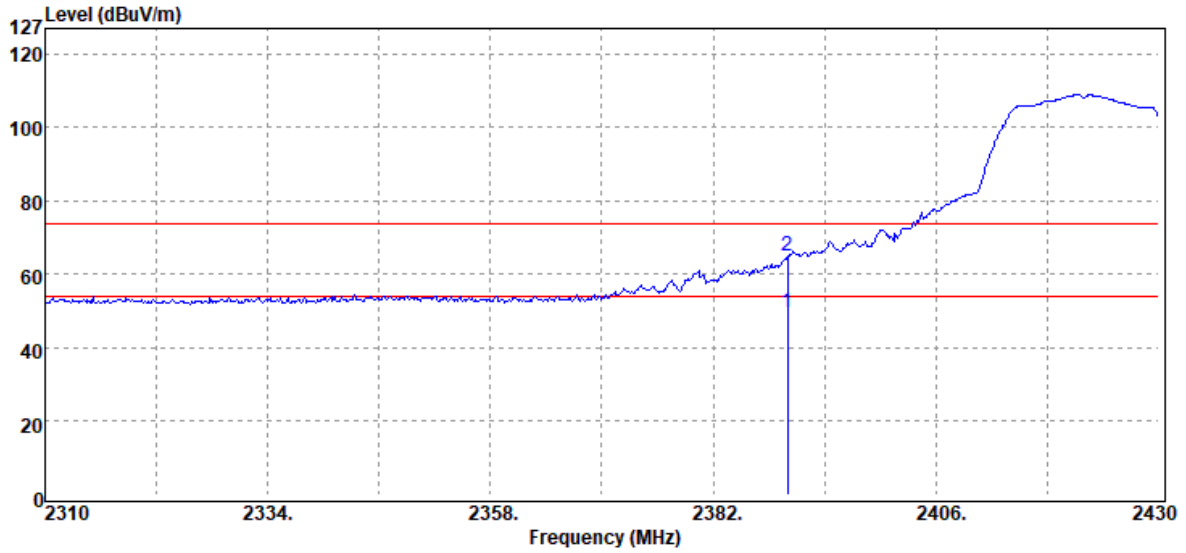

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	48.82	0.76	49.58	54.00	-4.42
2390.00	Peak	64.14	0.76	64.90	74.00	-9.10

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11g	Test Date	:2021-04-22
Test Frequency	:2452 MHz	Temp./Humi.	:24.1/63
Test Mode	:Bandedge CH High	Antenna Pol.	:VERTICAL
EUT Pol	:H Plane	Engineer	:Nick Lin

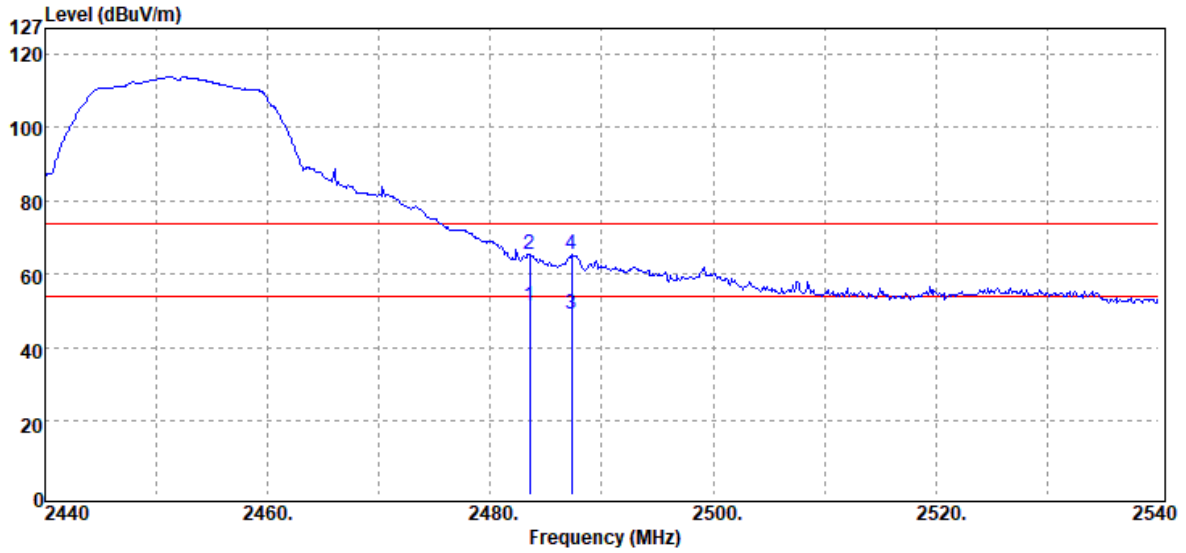

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	50.90	0.54	51.44	54.00	-2.56
2483.50	Peak	64.85	0.54	65.39	74.00	-8.61
2487.30	Average	48.82	0.54	49.36	54.00	-4.64
2487.30	Peak	64.86	0.54	65.40	74.00	-8.60

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11g	Test Date	:2021-04-22
Test Frequency	:2452 MHz	Temp./Humi.	:24.1/63
Test Mode	:Bandedge CH High	Antenna Pol.	:HORIZONTAL
EUT Pol	:H Plane	Engineer	:Nick Lin

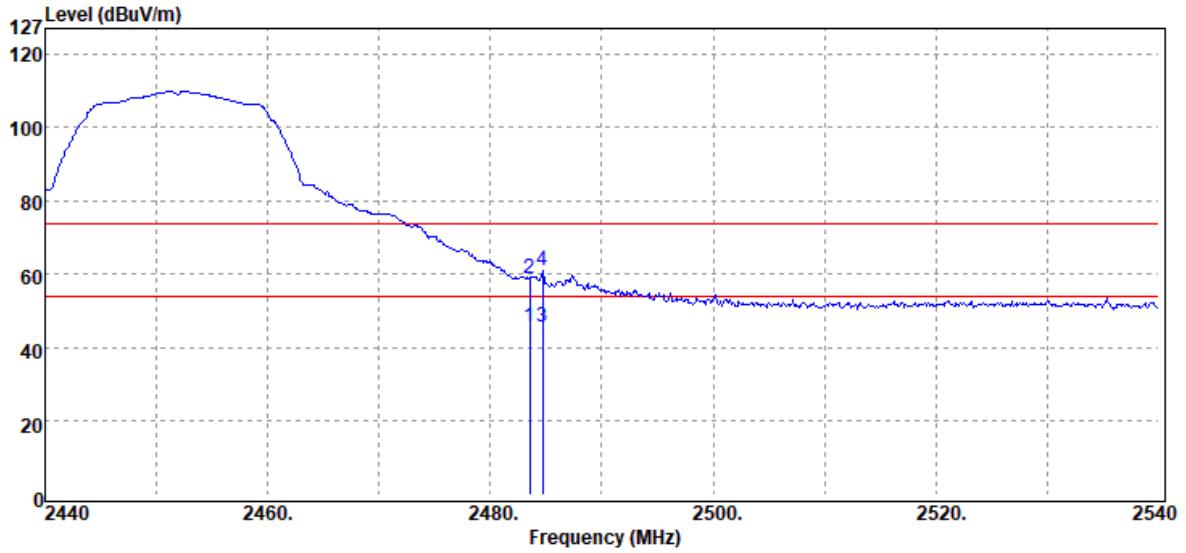

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	45.31	0.54	45.85	54.00	-8.15
2483.50	Peak	58.50	0.54	59.04	74.00	-14.96
2484.70	Average	44.96	0.54	45.50	54.00	-8.50
2484.70	Peak	60.35	0.54	60.89	74.00	-13.11

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11g	Test Date	:2021-04-22
Test Frequency	:2457 MHz	Temp./Humi.	:24.1/63
Test Mode	:Bandedge CH High	Antenna Pol.	:VERTICAL
EUT Pol	:H Plane	Engineer	:Nick Lin

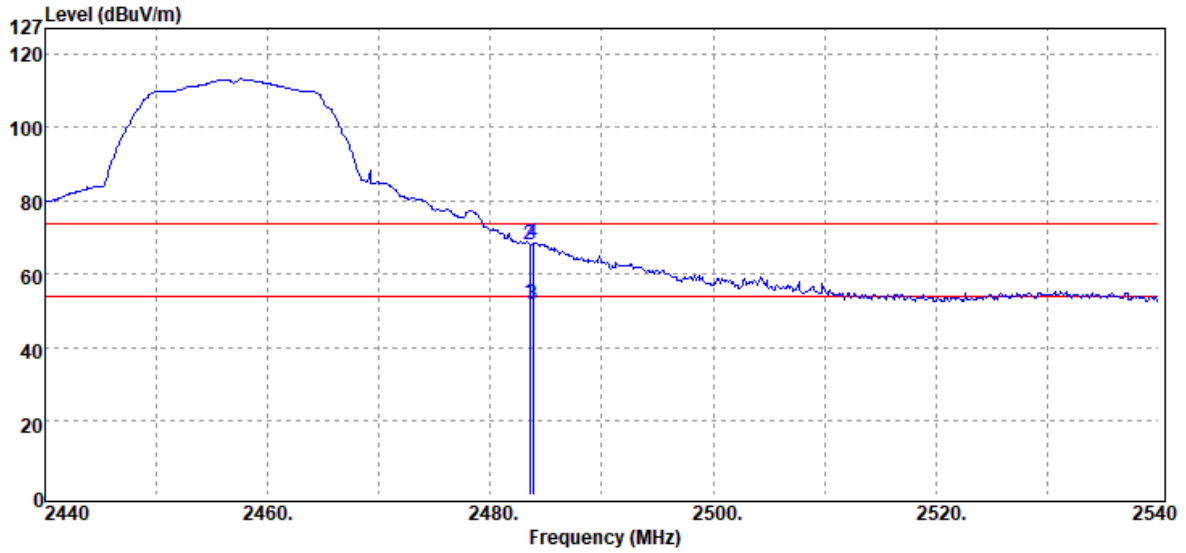

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	51.54	0.54	52.08	54.00	-1.92
2483.50	Peak	67.67	0.54	68.21	74.00	-5.79
2483.80	Average	51.42	0.54	51.96	54.00	-2.04
2483.80	Peak	68.17	0.54	68.71	74.00	-5.29

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11g	Test Date	:2021-04-22
Test Frequency	:2457 MHz	Temp./Humi.	:24.1/63
Test Mode	:Bandedge CH High	Antenna Pol.	:HORIZONTAL
EUT Pol	:H Plane	Engineer	:Nick Lin

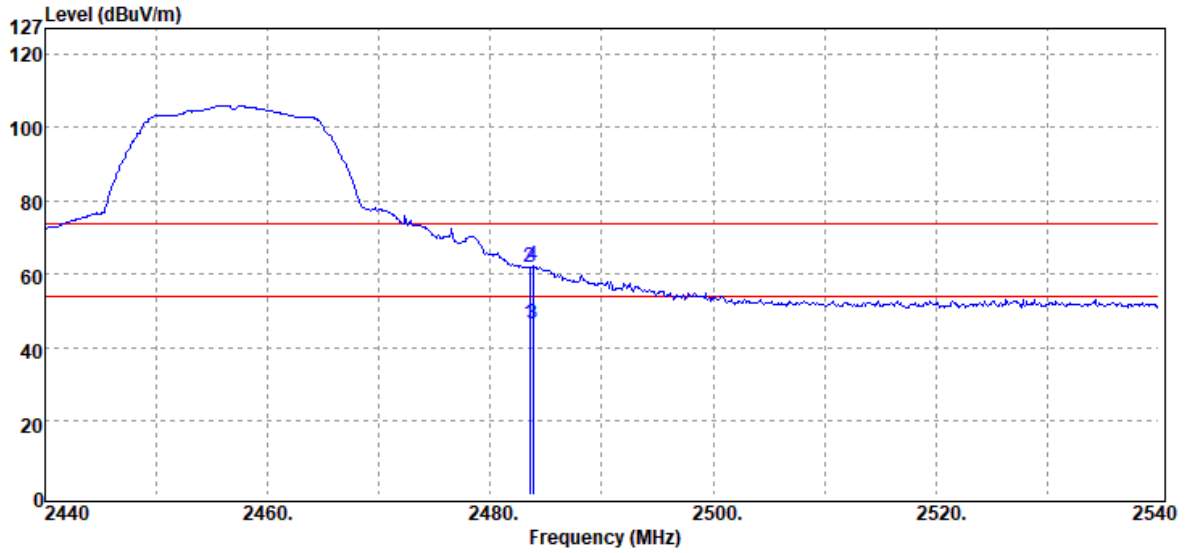

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	45.83	0.54	46.37	54.00	-7.63
2483.50	Peak	61.59	0.54	62.13	74.00	-11.87
2483.80	Average	45.95	0.54	46.49	54.00	-7.51
2483.80	Peak	61.77	0.54	62.31	74.00	-11.69

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11g	Test Date	:2021-04-22
Test Frequency	:2462 MHz	Temp./Humi.	:24.1/63
Test Mode	:Bandedge CH High	Antenna Pol.	:VERTICAL
EUT Pol	:H Plane	Engineer	:Nick Lin

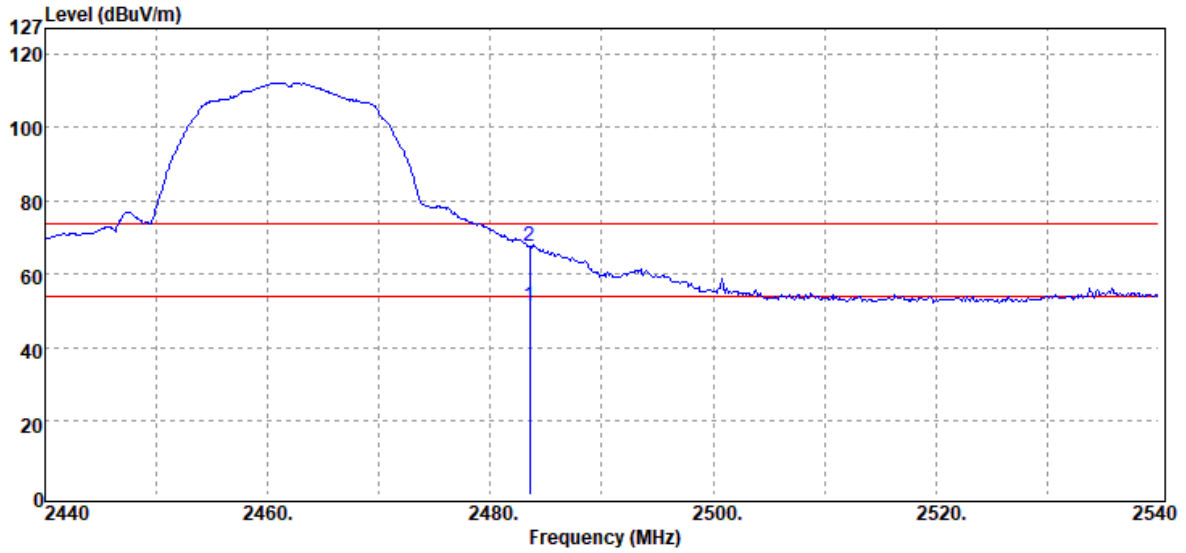

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	50.79	0.54	51.33	54.00	-2.67
2483.50	Peak	66.96	0.54	67.50	74.00	-6.50

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11g	Test Date	:2021-04-22
Test Frequency	:2462 MHz	Temp./Humi.	:24.1/63
Test Mode	:Bandedge CH High	Antenna Pol.	:HORIZONTAL
EUT Pol	:H Plane	Engineer	:Nick Lin

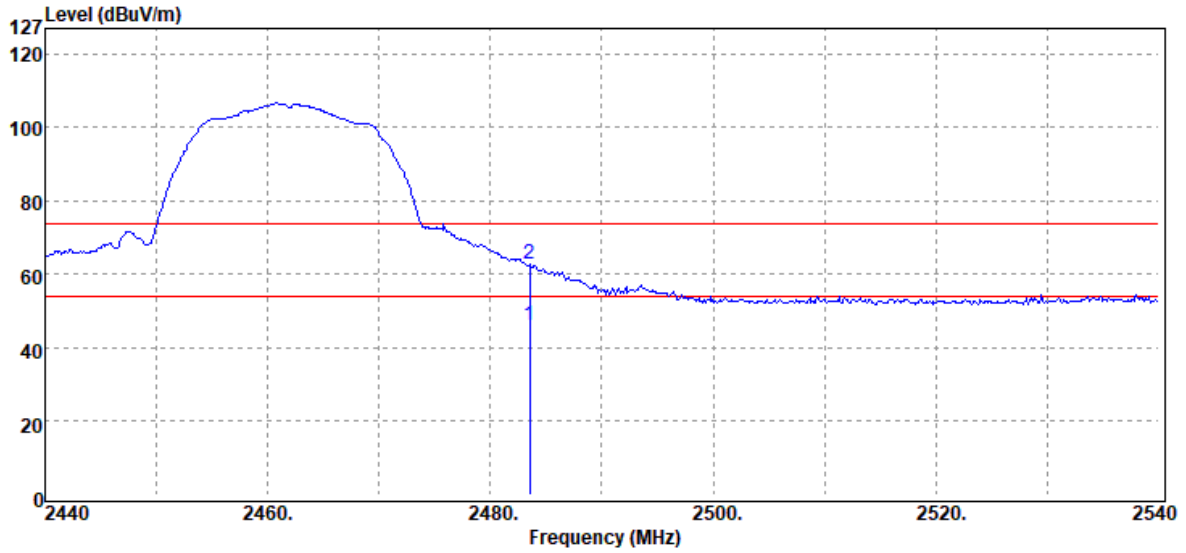

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	45.66	0.54	46.20	54.00	-7.80
2483.50	Peak	62.17	0.54	62.71	74.00	-11.29

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11n20	Test Date	:2021-04-22
Test Frequency	:2412 MHz	Temp./Humi.	:24.1/63
Test Mode	:Bandedge CH Low	Antenna Pol.	:VERTICAL
EUT Pol	:H Plane	Engineer	:Nick Lin

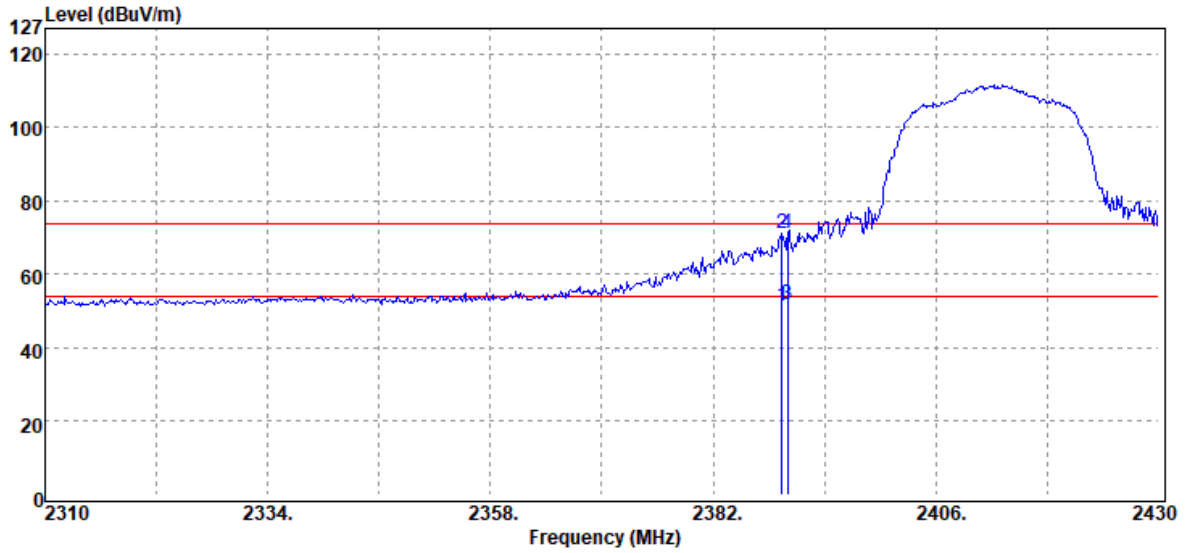

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2389.44	Average	50.58	0.76	51.34	54.00	-2.66
2389.44	Peak	70.27	0.76	71.03	74.00	-2.97
2390.00	Average	51.19	0.76	51.95	54.00	-2.05
2390.00	Peak	70.28	0.76	71.04	74.00	-2.96

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11n20	Test Date	:2021-04-22
Test Frequency	:2412 MHz	Temp./Humi.	:24.1/63
Test Mode	:Bandedge CH Low	Antenna Pol.	:HORIZONTAL
EUT Pol	:H Plane	Engineer	:Nick Lin

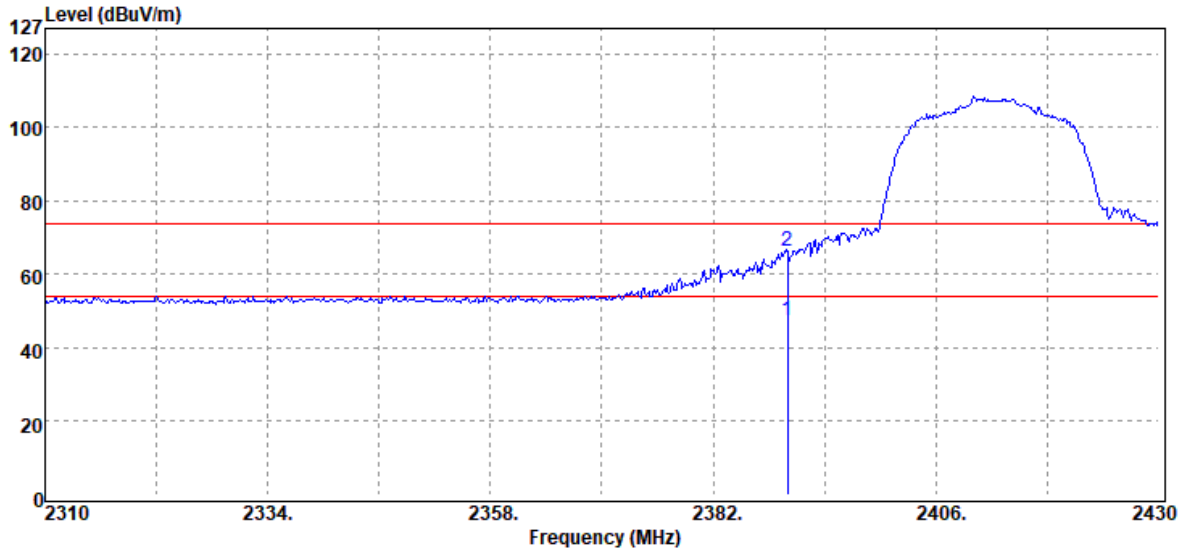

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	46.60	0.76	47.36	54.00	-6.64
2390.00	Peak	65.44	0.76	66.20	74.00	-7.80

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11n20	Test Date	:2021-04-22
Test Frequency	:2417 MHz	Temp./Humi.	:24.1/63
Test Mode	:Bandedge CH Low	Antenna Pol.	:VERTICAL
EUT Pol	:H Plane	Engineer	:Nick Lin

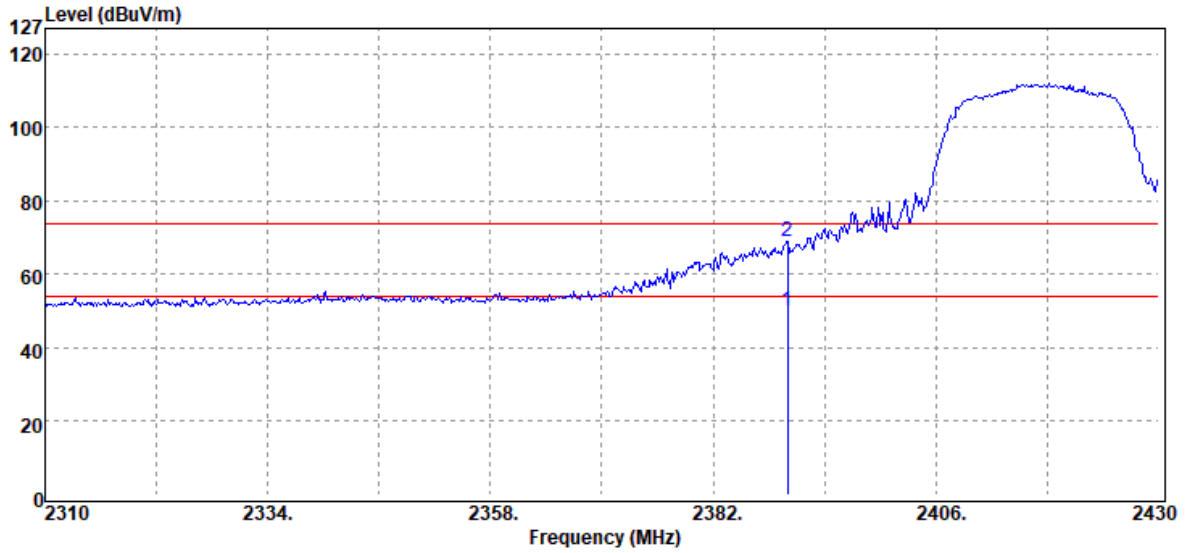

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	49.42	0.76	50.18	54.00	-3.82
2390.00	Peak	68.45	0.76	69.21	74.00	-4.79

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11n20	Test Date	:2021-04-22
Test Frequency	:2417 MHz	Temp./Humi.	:24.1/63
Test Mode	:Bandedge CH Low	Antenna Pol.	:HORIZONTAL
EUT Pol	:H Plane	Engineer	:Nick Lin

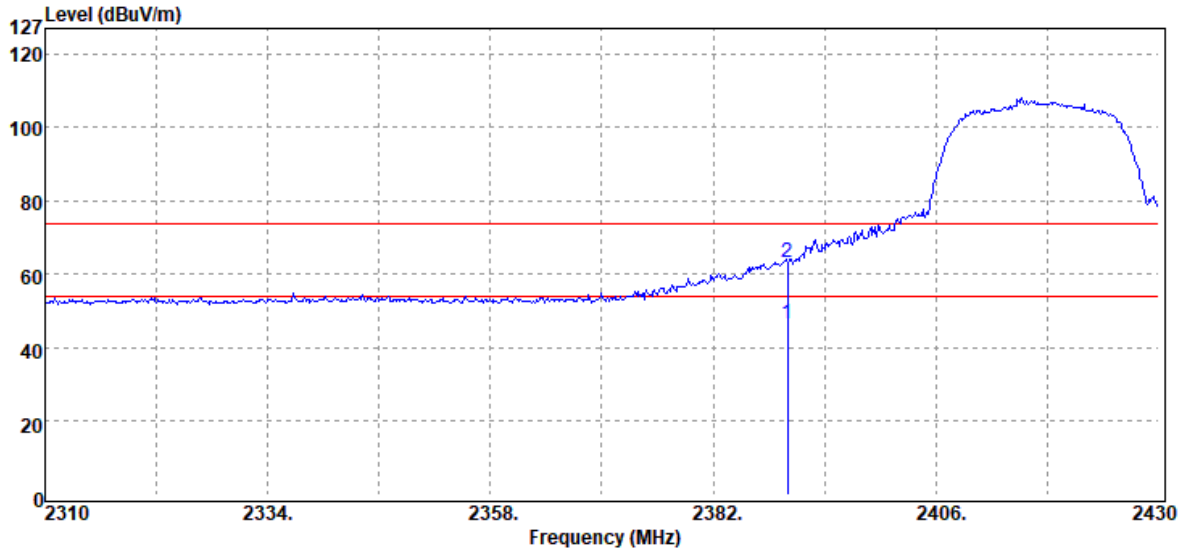

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	45.61	0.76	46.37	54.00	-7.63
2390.00	Peak	62.41	0.76	63.17	74.00	-10.83

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11n20	Test Date	:2021-04-22
Test Frequency	:2422 MHz	Temp./Humi.	:24.1/63
Test Mode	:Bandedge CH Low	Antenna Pol.	:VERTICAL
EUT Pol	:H Plane	Engineer	:Nick Lin

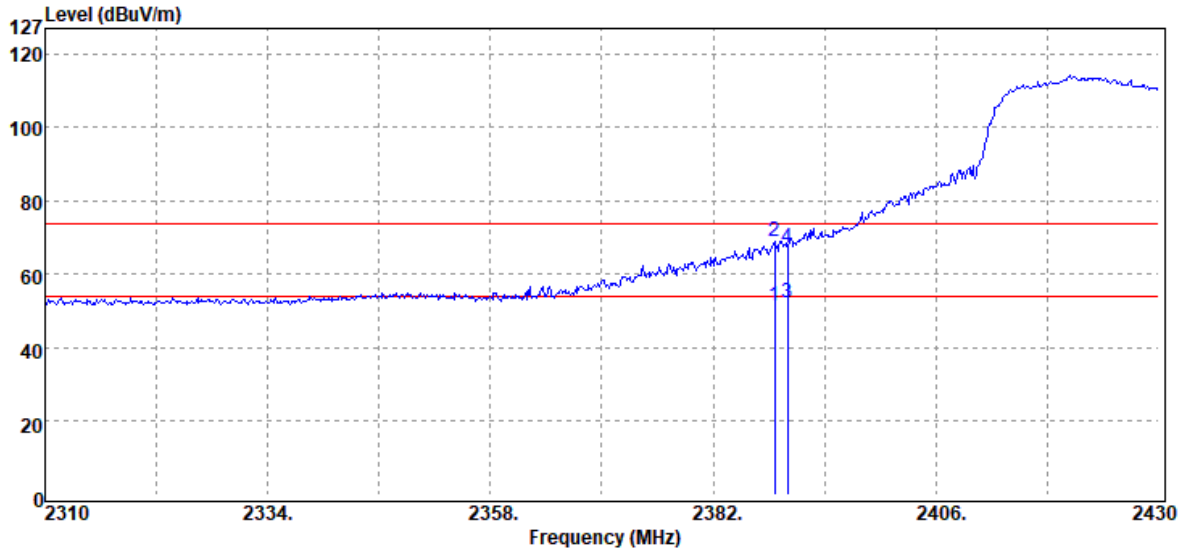

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2388.60	Average	50.85	0.76	51.61	54.00	-2.39
2388.60	Peak	68.40	0.76	69.16	74.00	-4.84
2390.00	Average	51.65	0.76	52.41	54.00	-1.59
2390.00	Peak	66.62	0.76	67.38	74.00	-6.62

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11n20	Test Date	:2021-04-22
Test Frequency	:2422 MHz	Temp./Humi.	:24.1/63
Test Mode	:Bandedge CH Low	Antenna Pol.	:HORIZONTAL
EUT Pol	:H Plane	Engineer	:Nick Lin

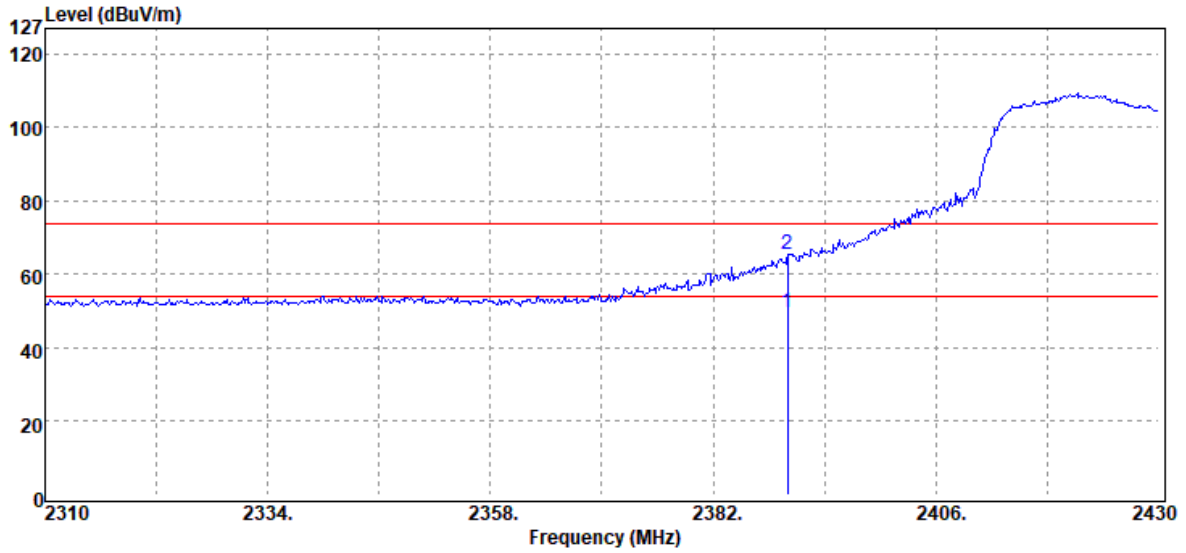

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	48.80	0.76	49.56	54.00	-4.44
2390.00	Peak	64.60	0.76	65.36	74.00	-8.64

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11n20	Test Date	:2021-04-22
Test Frequency	:2452 MHz	Temp./Humi.	:24.1/63
Test Mode	:Bandedge CH High	Antenna Pol.	:VERTICAL
EUT Pol	:H Plane	Engineer	:Nick Lin

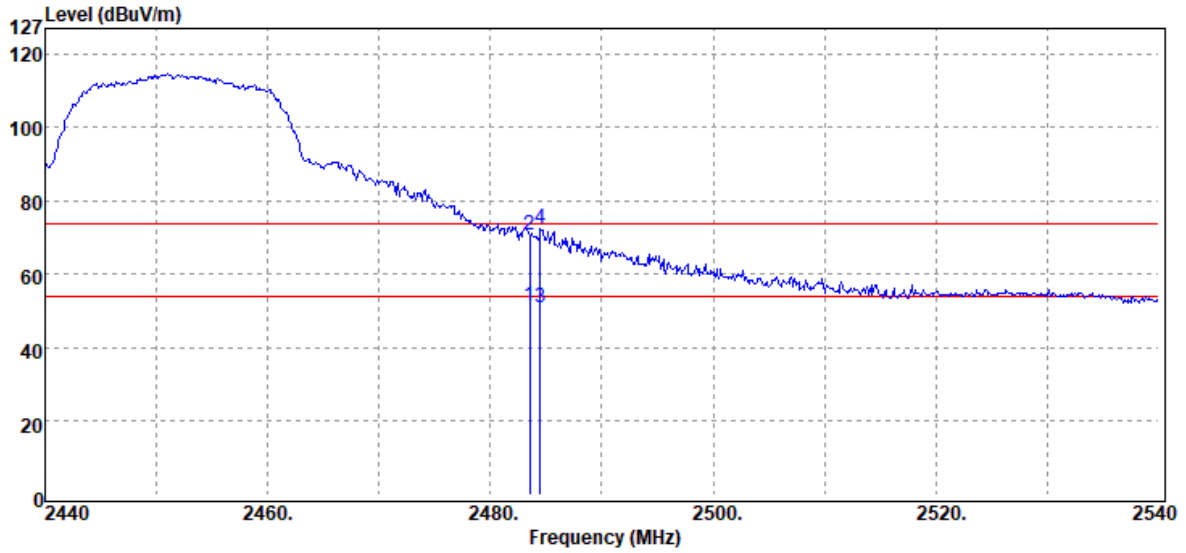

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	50.86	0.54	51.40	54.00	-2.60
2483.50	Peak	70.13	0.54	70.67	74.00	-3.33
2484.50	Average	50.23	0.54	50.77	54.00	-3.23
2484.50	Peak	71.79	0.54	72.33	74.00	-1.67

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11n20	Test Date	:2021-04-22
Test Frequency	:2452 MHz	Temp./Humi.	:24.1/63
Test Mode	:Bandedge CH High	Antenna Pol.	:HORIZONTAL
EUT Pol	:H Plane	Engineer	:Nick Lin

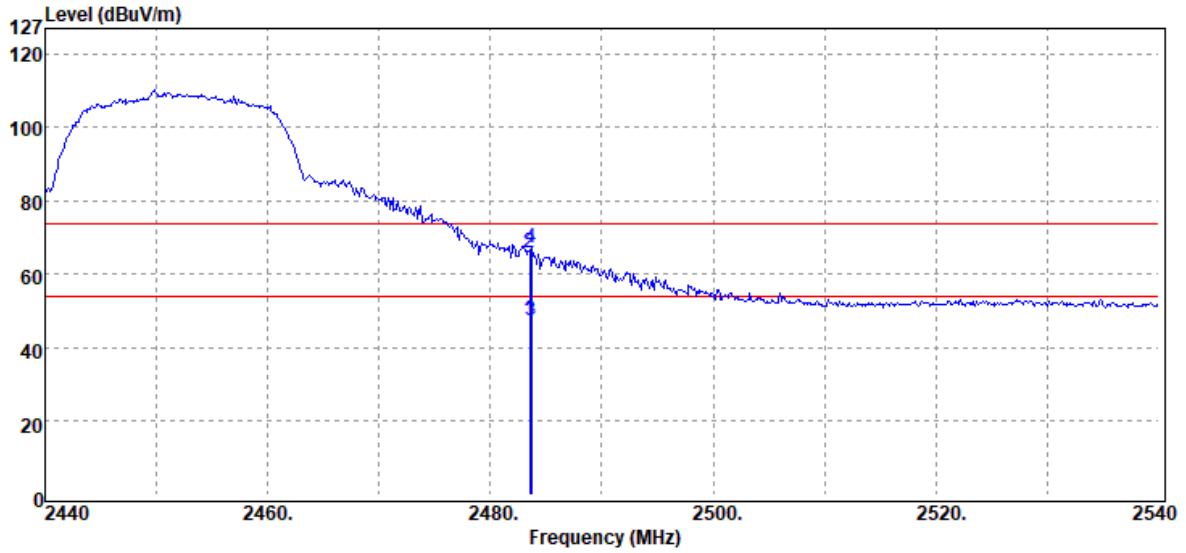

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	46.73	0.54	47.27	54.00	-6.73
2483.50	Peak	65.36	0.54	65.90	74.00	-8.10
2483.70	Average	46.80	0.54	47.34	54.00	-6.66
2483.70	Peak	66.87	0.54	67.41	74.00	-6.59

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11n20	Test Date	:2021-04-22
Test Frequency	:2457 MHz	Temp./Humi.	:24.1/63
Test Mode	:Bandedge CH High	Antenna Pol.	:VERTICAL
EUT Pol	:H Plane	Engineer	:Nick Lin

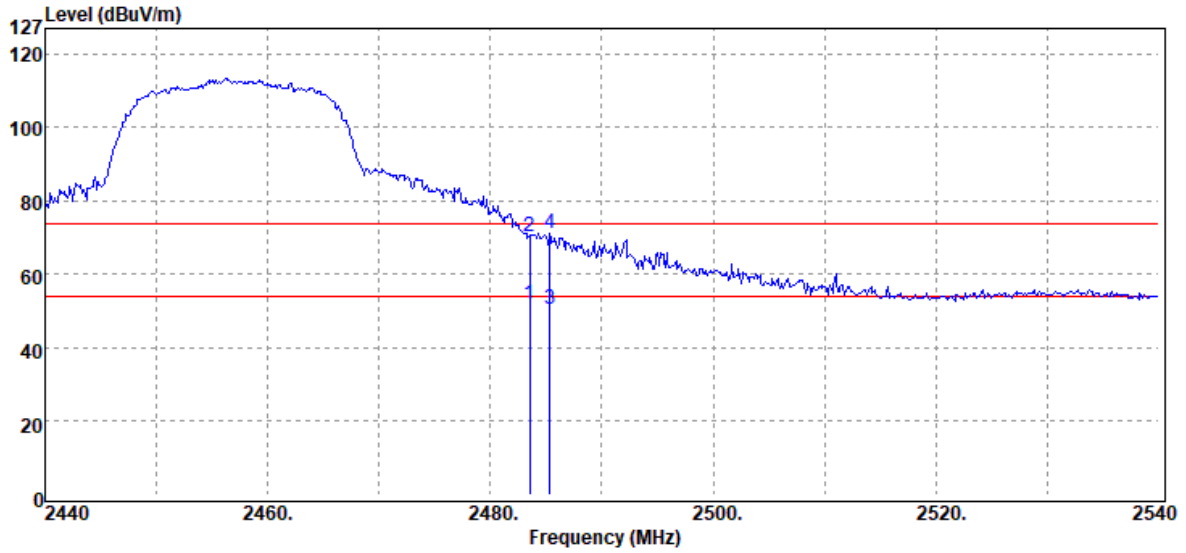

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	51.44	0.54	51.98	54.00	-2.02
2483.50	Peak	69.87	0.54	70.41	74.00	-3.59
2485.30	Average	49.91	0.54	50.45	54.00	-3.55
2485.30	Peak	70.62	0.54	71.16	74.00	-2.84

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11n20	Test Date	:2021-04-22
Test Frequency	:2457 MHz	Temp./Humi.	:24.1/63
Test Mode	:Bandedge CH High	Antenna Pol.	:HORIZONTAL
EUT Pol	:H Plane	Engineer	:Nick Lin

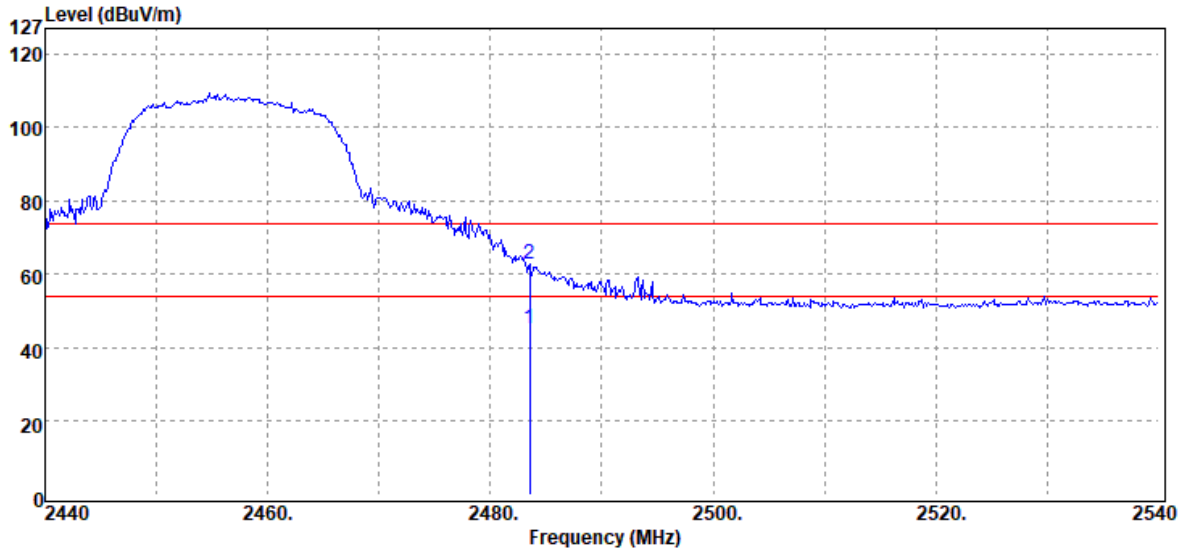

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	44.93	0.54	45.47	54.00	-8.53
2483.50	Peak	62.38	0.54	62.92	74.00	-11.08

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11n20	Test Date	:2021-04-22
Test Frequency	:2462 MHz	Temp./Humi.	:24.1/63
Test Mode	:Bandedge CH High	Antenna Pol.	:VERTICAL
EUT Pol	:H Plane	Engineer	:Nick Lin

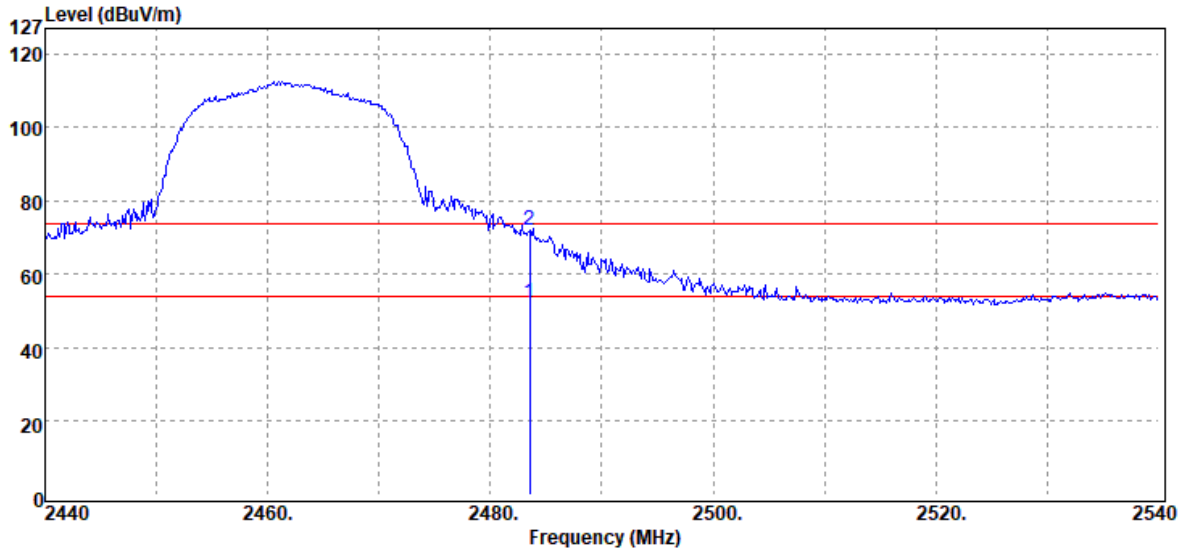

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	51.67	0.54	52.21	54.00	-1.79
2483.50	Peak	71.74	0.54	72.28	74.00	-1.72

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11n20	Test Date	:2021-04-22
Test Frequency	:2462 MHz	Temp./Humi.	:24.1/63
Test Mode	:Bandedge CH High	Antenna Pol.	:HORIZONTAL
EUT Pol	:H Plane	Engineer	:Nick Lin

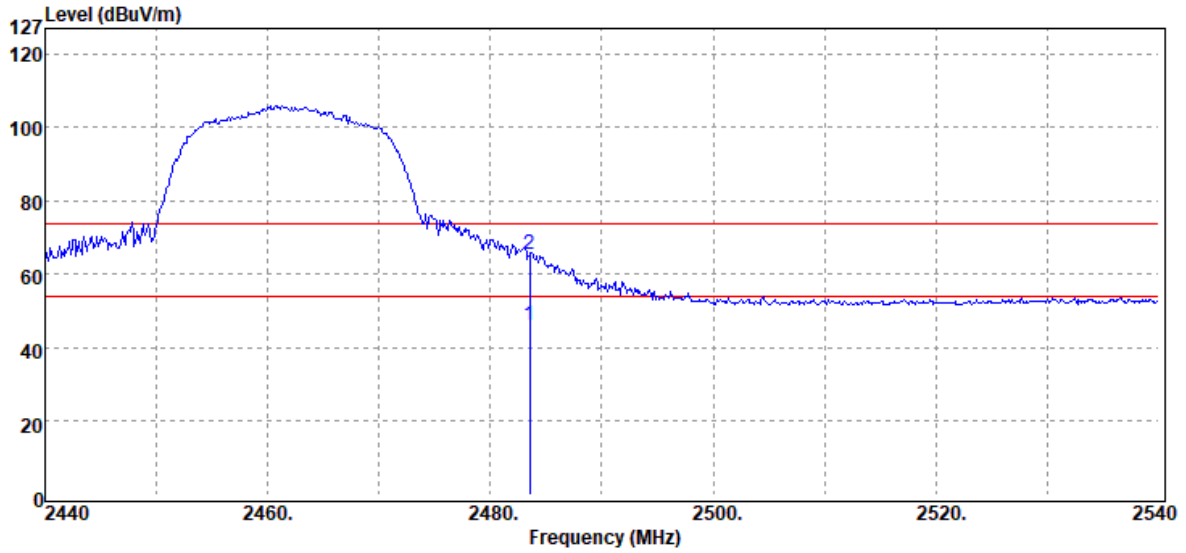

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	45.76	0.54	46.30	54.00	-7.70
2483.50	Peak	64.88	0.54	65.42	74.00	-8.58

11.7.2 Below 1GHz Worst-Case Emission:

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11g	Test Date	:2021-04-22
Test Frequency	:2437 MHz	Temp./Humi.	:24.1/63
Test Mode	:Tx CH Mid	Antenna Pol.	:VERTICAL
EUT Pol	:H Plane	Engineer	:Ricky Chen

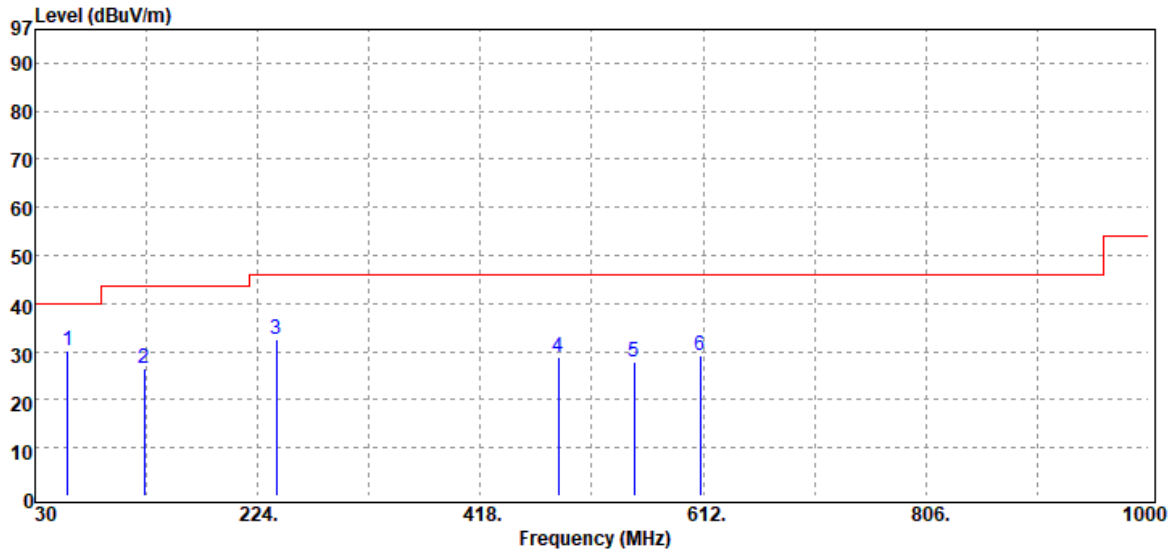

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
58.13	Peak	39.36	-9.10	30.26	40.00	-9.74
125.06	Peak	35.92	-9.37	26.55	43.50	-16.95
240.49	Peak	41.42	-8.80	32.62	46.00	-13.38
485.90	Peak	31.68	-2.97	28.71	46.00	-17.29
551.86	Peak	29.34	-1.46	27.88	46.00	-18.12
609.09	Peak	28.52	0.72	29.24	46.00	-16.76

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11g	Test Date	:2021-04-22
Test Frequency	:2437 MHz	Temp./Humi.	:24.1/63
Test Mode	:Tx CH Mid	Antenna Pol.	:HORIZONTAL
EUT Pol	:H Plane	Engineer	:Ricky Chen

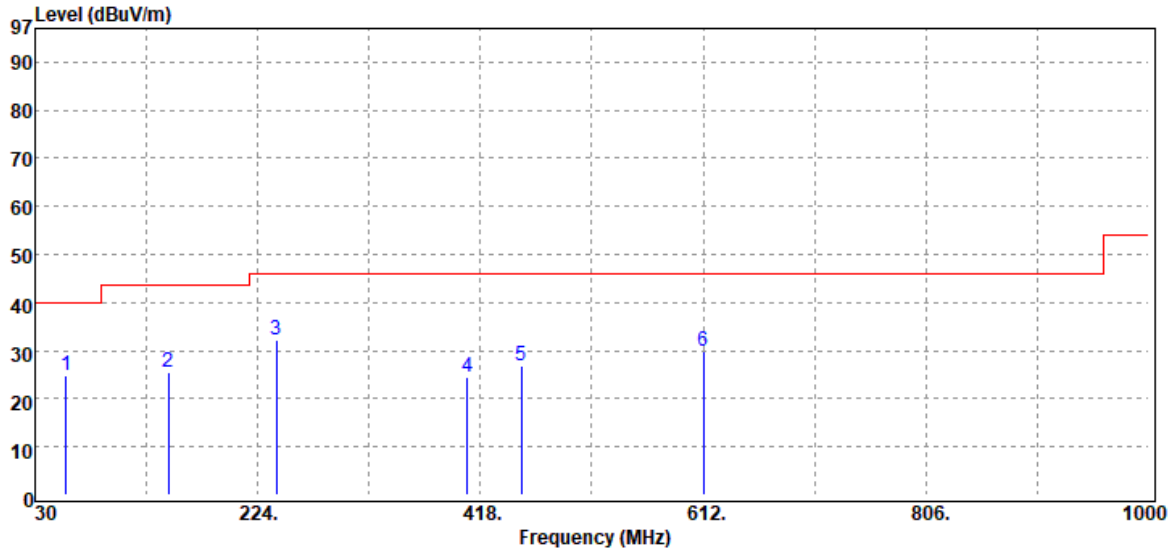

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
57.16	Peak	33.78	-8.99	24.79	40.00	-15.21
146.40	Peak	33.54	-7.87	25.67	43.50	-17.83
240.49	Peak	40.93	-8.80	32.13	46.00	-13.87
406.36	Peak	29.22	-4.60	24.62	46.00	-21.38
453.89	Peak	29.34	-2.65	26.69	46.00	-19.31
612.00	Peak	29.36	0.62	29.98	46.00	-16.02

11.7.3 Above 1GHz Emission:

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11b	Test Date	:2021-04-22
Test Frequency	:2412 MHz	Temp./Humi.	:24.1/63
Test Mode	:Tx CH Low	Antenna Pol.	:VERTICAL
EUT Pol	:H Plane	Engineer	:Ricky Chen

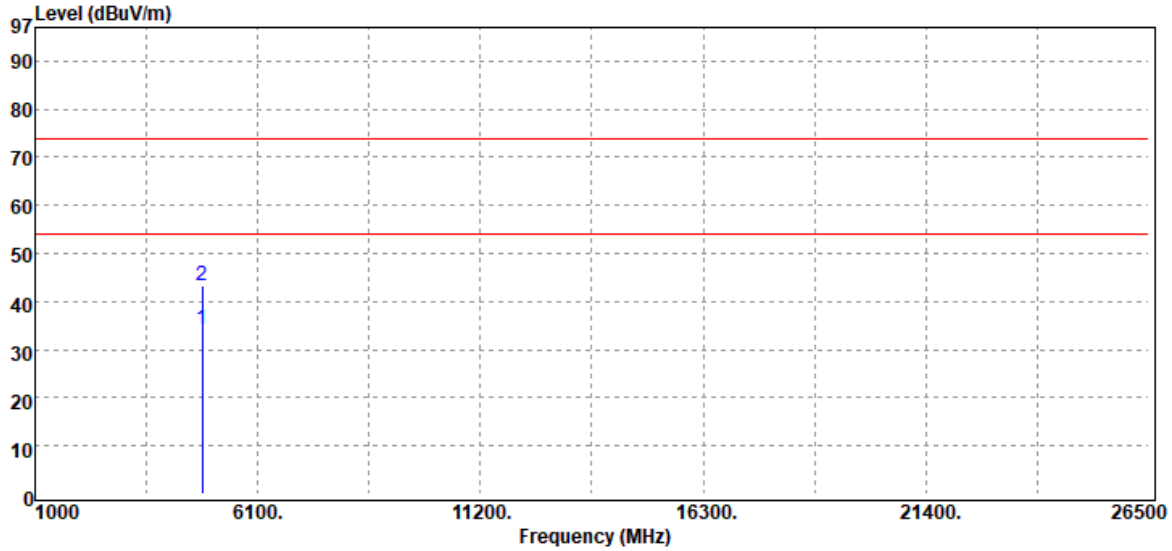

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4824.00	Average	26.92	7.38	34.30	54.00	-19.70
4824.00	Peak	35.97	7.38	43.35	74.00	-30.65

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11b	Test Date	:2021-04-22
Test Frequency	:2412 MHz	Temp./Humi.	:24.1/63
Test Mode	:Tx CH Low	Antenna Pol.	:HORIZONTAL
EUT Pol	:H Plane	Engineer	:Ricky Chen

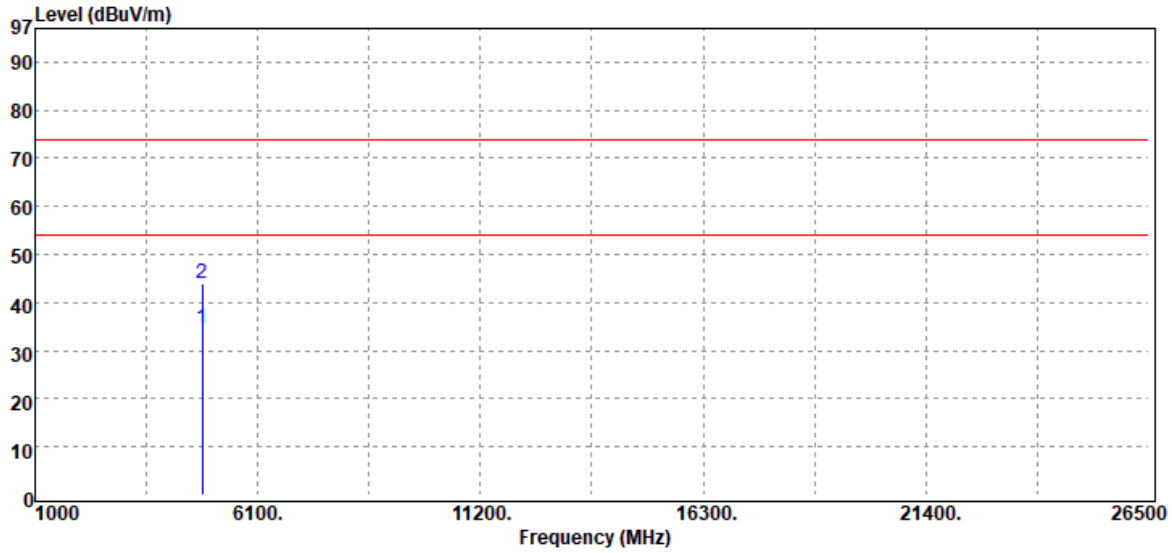

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4824.00	Average	27.21	7.38	34.59	54.00	-19.41
4824.00	Peak	36.58	7.38	43.96	74.00	-30.04

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11b	Test Date	:2021-04-22
Test Frequency	:2437 MHz	Temp./Humi.	:24.1/63
Test Mode	:Tx CH Mid	Antenna Pol.	:VERTICAL
EUT Pol	:H Plane	Engineer	:Ricky Chen

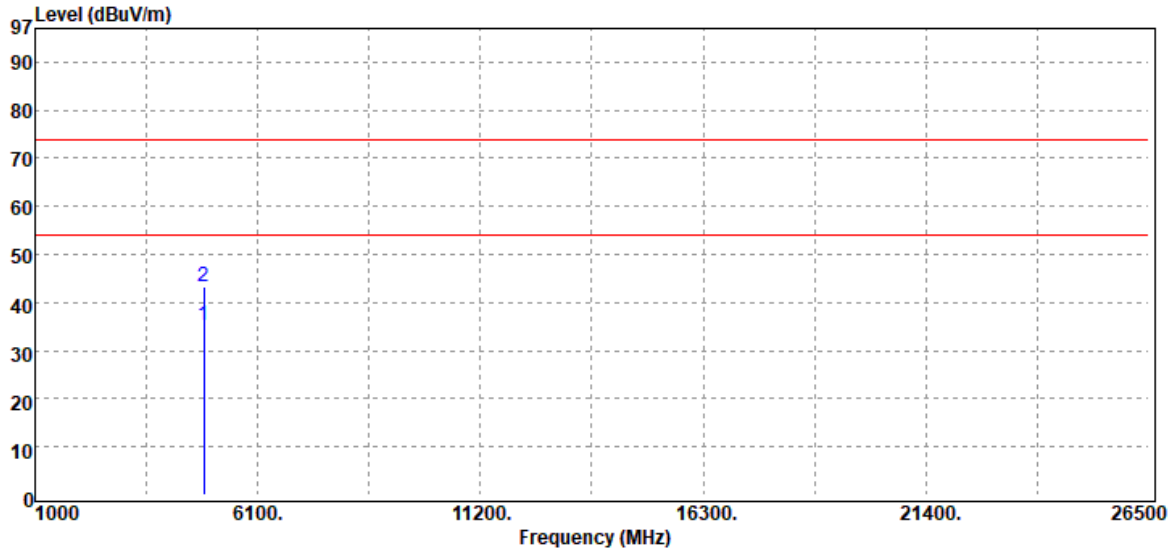

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4874.00	Average	28.06	7.09	35.15	54.00	-18.85
4874.00	Peak	36.16	7.09	43.25	74.00	-30.75

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11b	Test Date	:2021-04-22
Test Frequency	:2437 MHz	Temp./Humi.	:24.1/63
Test Mode	:Tx CH Mid	Antenna Pol.	:HORIZONTAL
EUT Pol	:H Plane	Engineer	:Ricky Chen

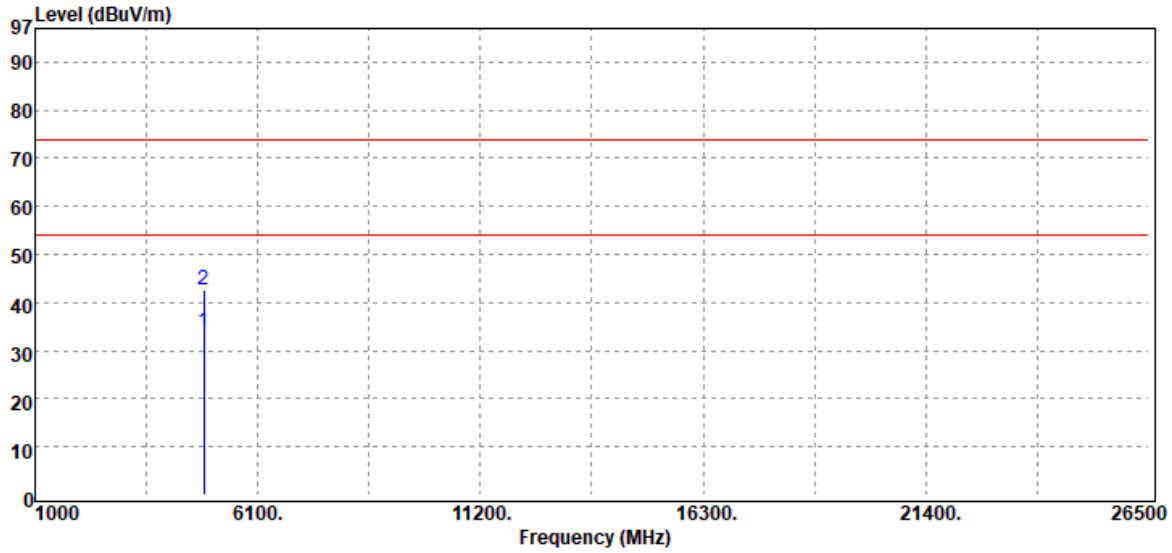

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4874.00	Average	26.89	7.09	33.98	54.00	-20.02
4874.00	Peak	35.58	7.09	42.67	74.00	-31.33

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11b	Test Date	:2021-04-22
Test Frequency	:2462 MHz	Temp./Humi.	:24.1/63
Test Mode	:Tx CH High	Antenna Pol.	:VERTICAL
EUT Pol	:H Plane	Engineer	:Ricky Chen

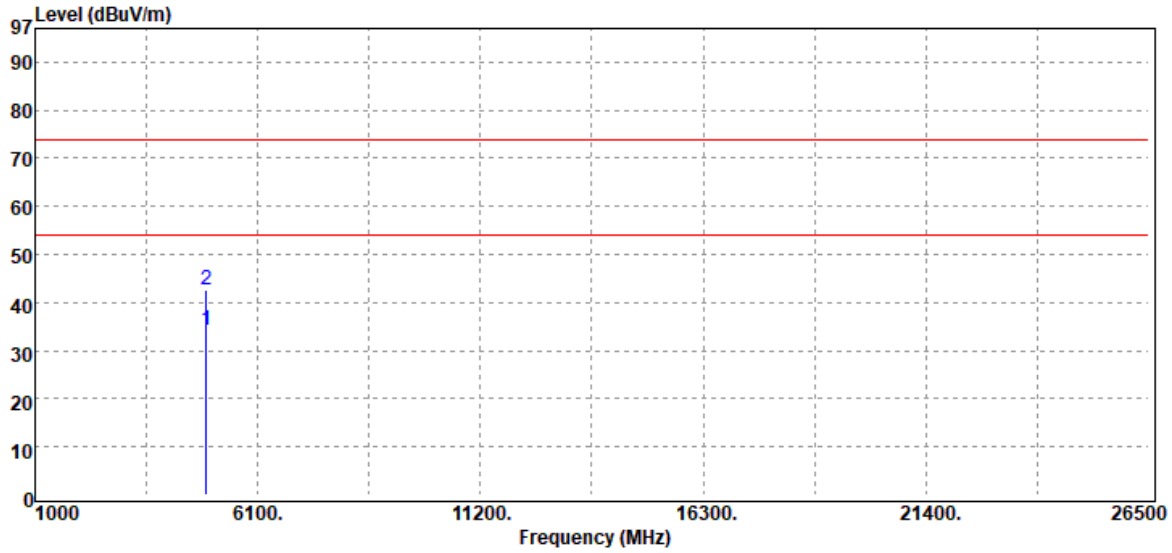

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4924.00	Average	27.13	7.06	34.19	54.00	-19.81
4924.00	Peak	35.57	7.06	42.63	74.00	-31.37

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11b	Test Date	:2021-04-22
Test Frequency	:2462 MHz	Temp./Humi.	:24.1/63
Test Mode	:Tx CH High	Antenna Pol.	:HORIZONTAL
EUT Pol	:H Plane	Engineer	:Ricky Chen

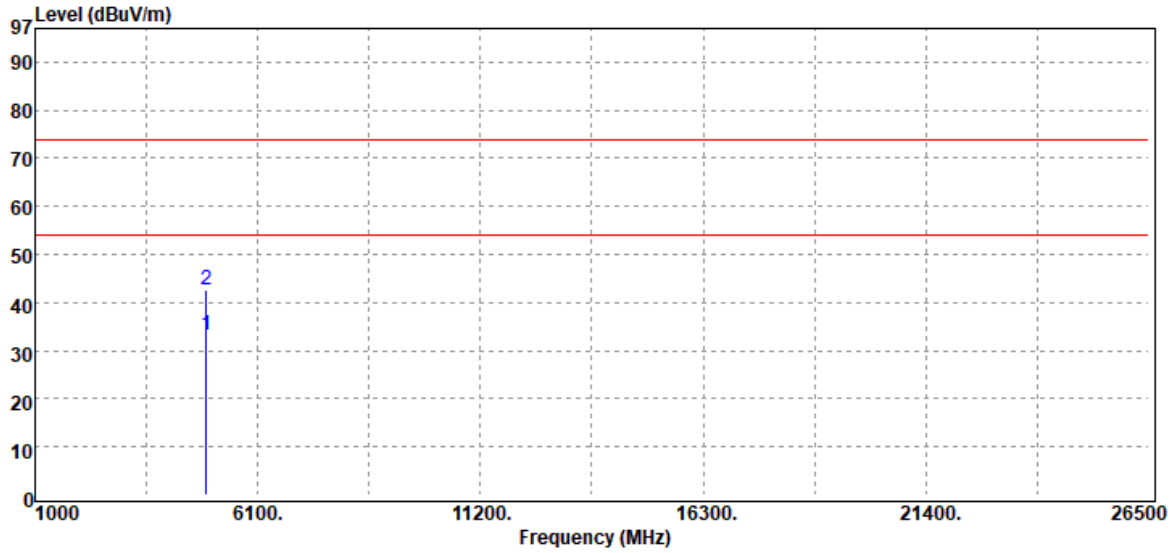

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4924.00	Average	26.09	7.06	33.15	54.00	-20.85
4924.00	Peak	35.60	7.06	42.66	74.00	-31.34

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11g	Test Date	:2021-04-22
Test Frequency	:2412 MHz	Temp./Humi.	:24.1/63
Test Mode	:Tx CH Low	Antenna Pol.	:VERTICAL
EUT Pol	:H Plane	Engineer	:Ricky Chen

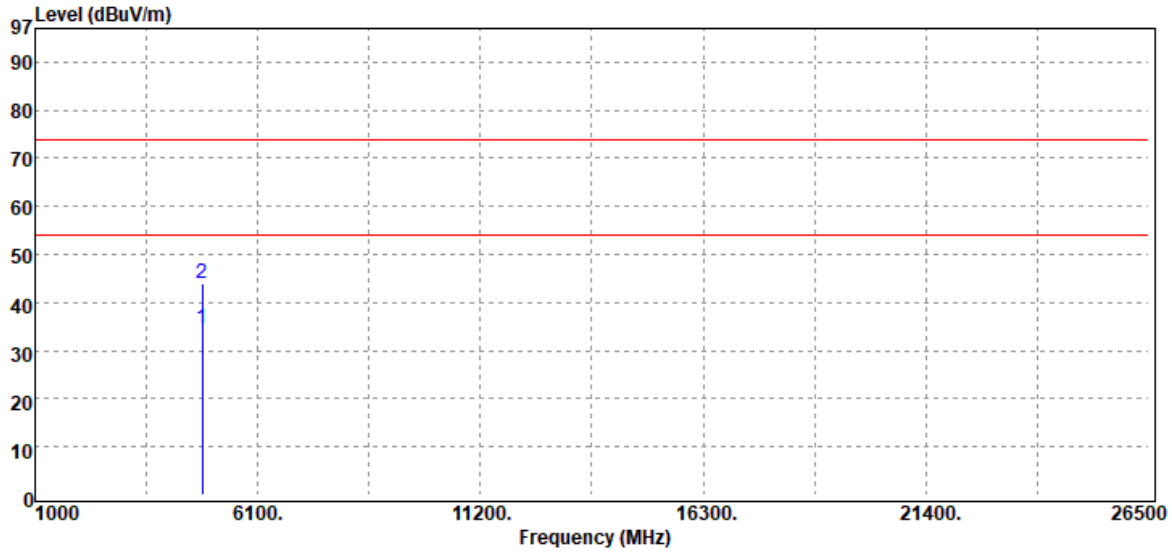

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4824.00	Average	27.14	7.38	34.52	54.00	-19.48
4824.00	Peak	36.56	7.38	43.94	74.00	-30.06

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11g	Test Date	:2021-04-22
Test Frequency	:2412 MHz	Temp./Humi.	:24.1/63
Test Mode	:Tx CH Low	Antenna Pol.	:HORIZONTAL
EUT Pol	:H Plane	Engineer	:Ricky Chen

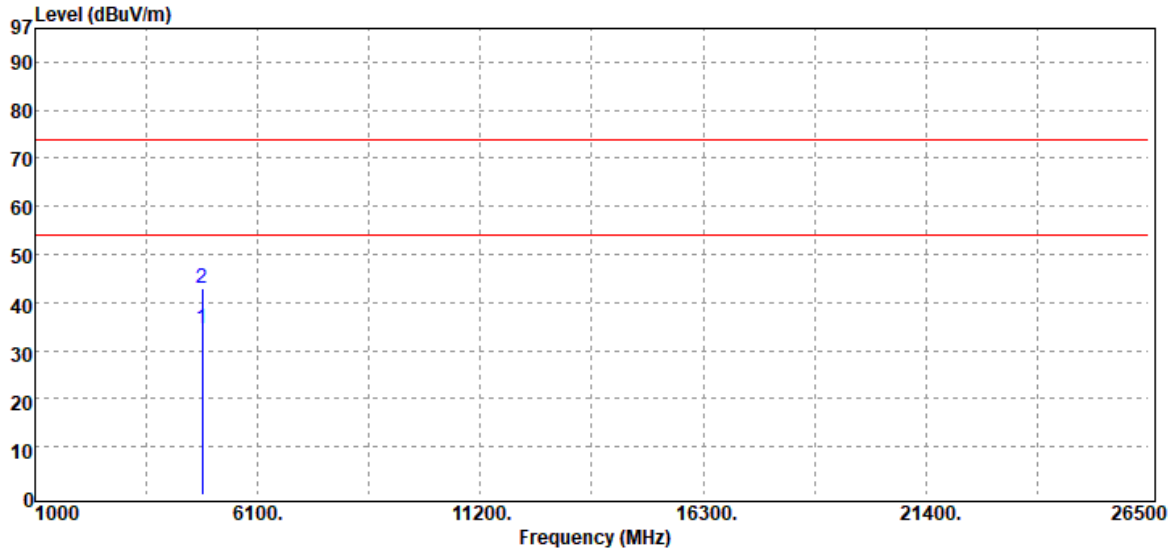

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4824.00	Average	27.26	7.38	34.64	54.00	-19.36
4824.00	Peak	35.69	7.38	43.07	74.00	-30.93

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11g	Test Date	:2021-04-22
Test Frequency	:2437 MHz	Temp./Humi.	:24.1/63
Test Mode	:Tx CH Mid	Antenna Pol.	:VERTICAL
EUT Pol	:H Plane	Engineer	:Ricky Chen

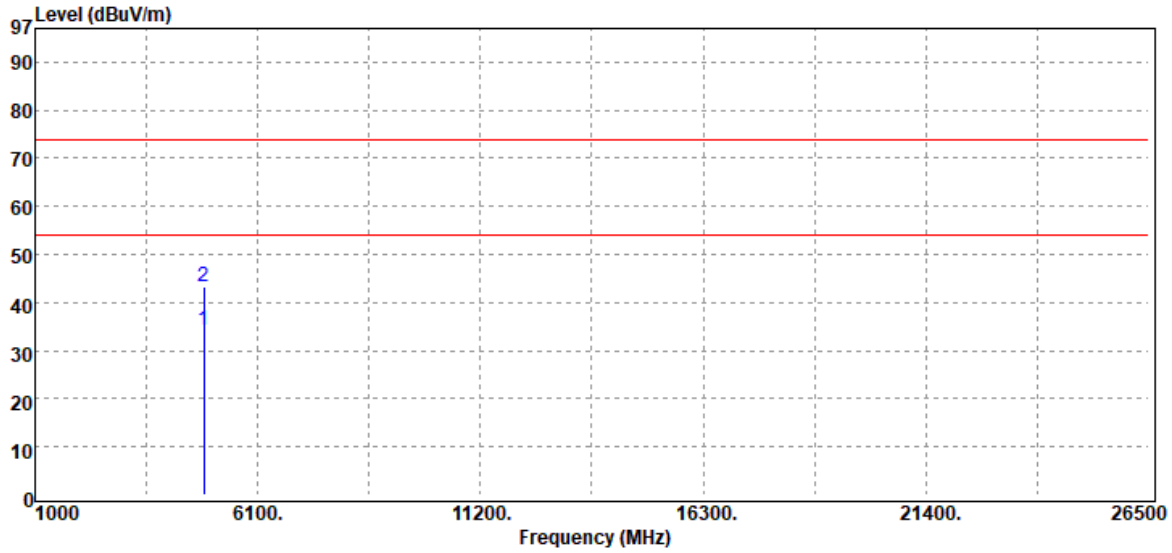

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4874.00	Average	27.26	7.09	34.35	54.00	-19.65
4874.00	Peak	36.32	7.09	43.41	74.00	-30.59

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11g	Test Date	:2021-04-22
Test Frequency	:2437 MHz	Temp./Humi.	:24.1/63
Test Mode	:Tx CH Mid	Antenna Pol.	:HORIZONTAL
EUT Pol	:H Plane	Engineer	:Ricky Chen

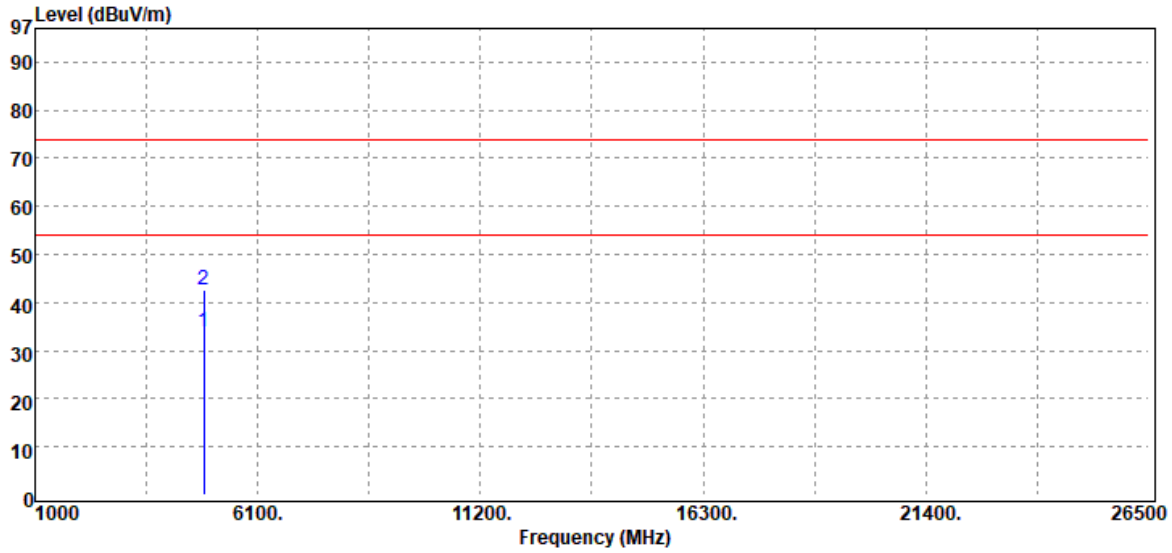

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4874.00	Average	26.97	7.09	34.06	54.00	-19.94
4874.00	Peak	35.51	7.09	42.60	74.00	-31.40

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11g	Test Date	:2021-04-22
Test Frequency	:2462 MHz	Temp./Humi.	:24.1/63
Test Mode	:Tx CH High	Antenna Pol.	:VERTICAL
EUT Pol	:H Plane	Engineer	:Ricky Chen

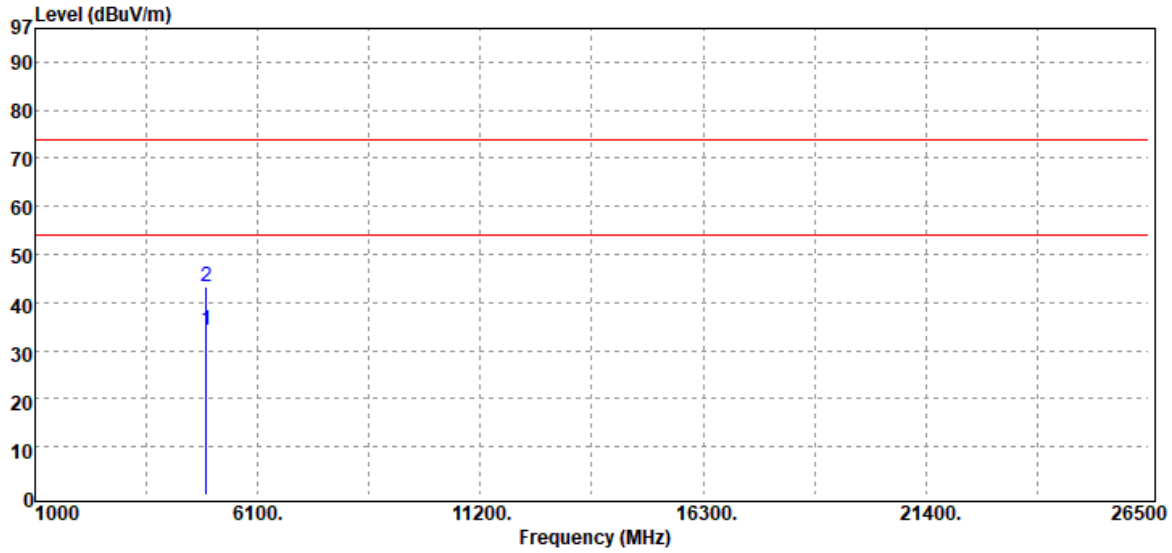

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4924.00	Average	27.12	7.06	34.18	54.00	-19.82
4924.00	Peak	36.27	7.06	43.33	74.00	-30.67

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11g	Test Date	:2021-04-22
Test Frequency	:2462 MHz	Temp./Humi.	:24.1/63
Test Mode	:Tx CH High	Antenna Pol.	:HORIZONTAL
EUT Pol	:H Plane	Engineer	:Ricky Chen

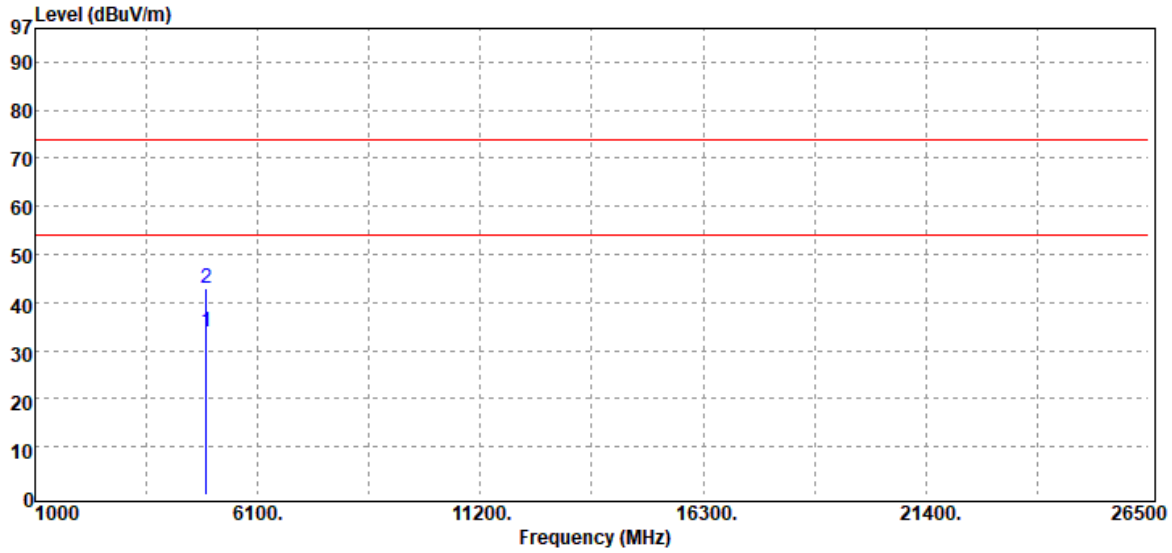

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4924.00	Average	26.96	7.06	34.02	54.00	-19.98
4924.00	Peak	35.91	7.06	42.97	74.00	-31.03

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11n20	Test Date	:2021-04-22
Test Frequency	:2412 MHz	Temp./Humi.	:24.1/63
Test Mode	:Tx CH Low	Antenna Pol.	:VERTICAL
EUT Pol	:H Plane	Engineer	:Ricky Chen

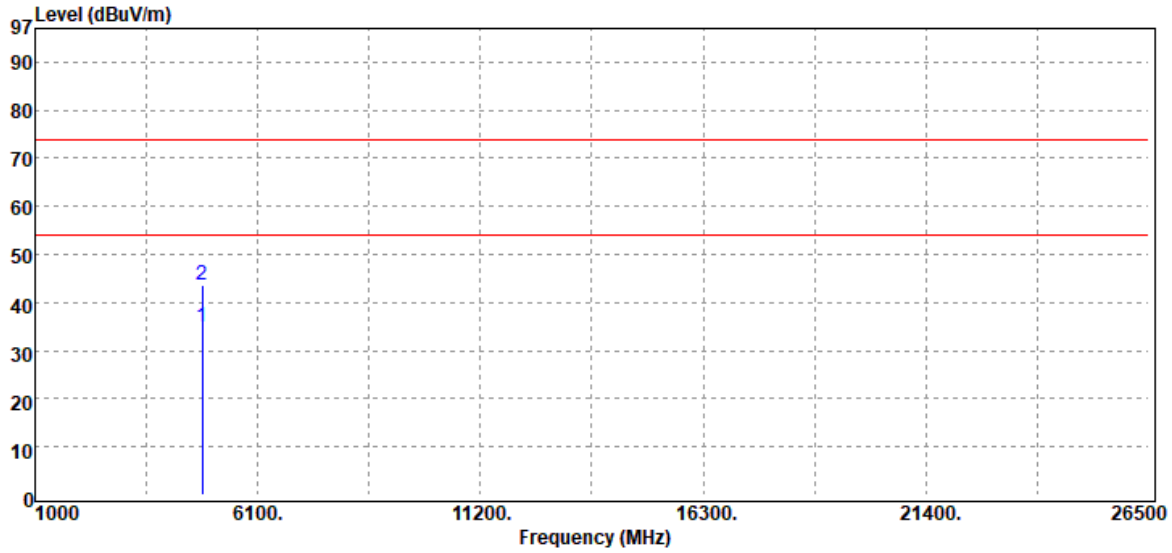

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4824.00	Average	27.55	7.38	34.93	54.00	-19.07
4824.00	Peak	36.18	7.38	43.56	74.00	-30.44

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11n20	Test Date	:2021-04-22
Test Frequency	:2412 MHz	Temp./Humi.	:24.1/63
Test Mode	:Tx CH Low	Antenna Pol.	:HORIZONTAL
EUT Pol	:H Plane	Engineer	:Ricky Chen

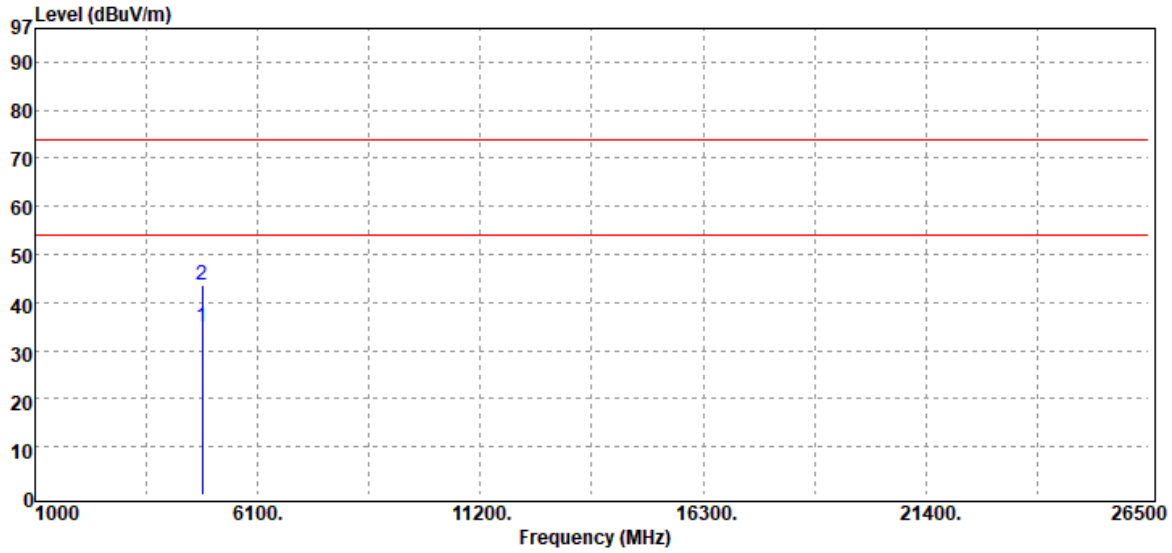

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4824.00	Average	27.36	7.38	34.74	54.00	-19.26
4824.00	Peak	36.31	7.38	43.69	74.00	-30.31

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11n20	Test Date	:2021-04-22
Test Frequency	:2437 MHz	Temp./Humi.	:24.1/63
Test Mode	:Tx CH Mid	Antenna Pol.	:VERTICAL
EUT Pol	:H Plane	Engineer	:Ricky Chen

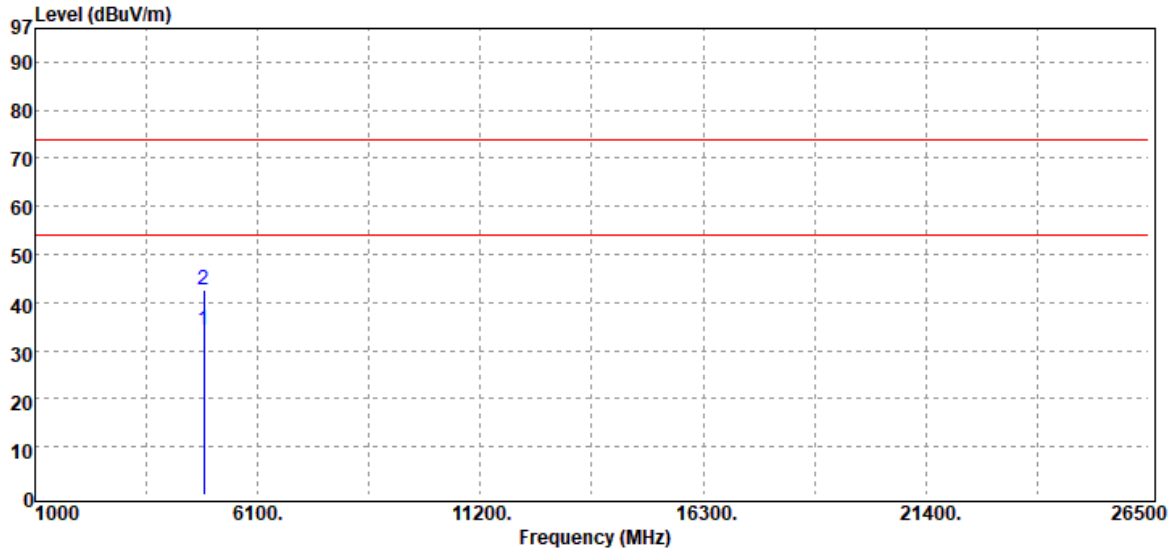

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4874.00	Average	27.23	7.09	34.32	54.00	-19.68
4874.00	Peak	35.65	7.09	42.74	74.00	-31.26

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11n20	Test Date	:2021-04-22
Test Frequency	:2437 MHz	Temp./Humi.	:24.1/63
Test Mode	:Tx CH Mid	Antenna Pol.	:HORIZONTAL
EUT Pol	:H Plane	Engineer	:Ricky Chen

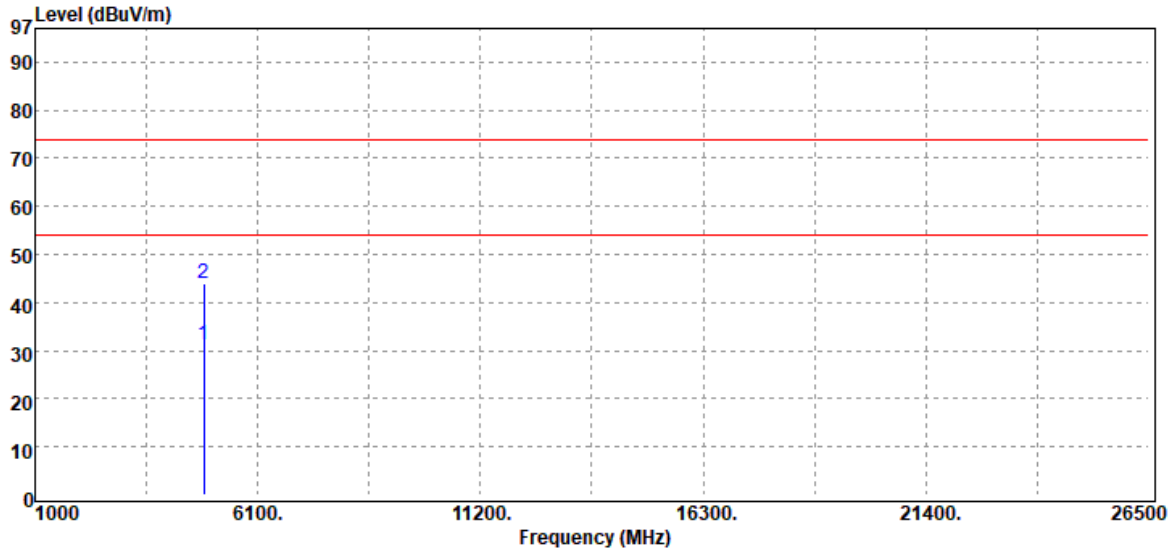

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4874.00	Average	24.09	7.09	31.18	54.00	-22.82
4874.00	Peak	36.99	7.09	44.08	74.00	-29.92

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11n20	Test Date	:2021-04-22
Test Frequency	:2462 MHz	Temp./Humi.	:24.1/63
Test Mode	:Tx CH High	Antenna Pol.	:VERTICAL
EUT Pol	:H Plane	Engineer	:Ricky Chen

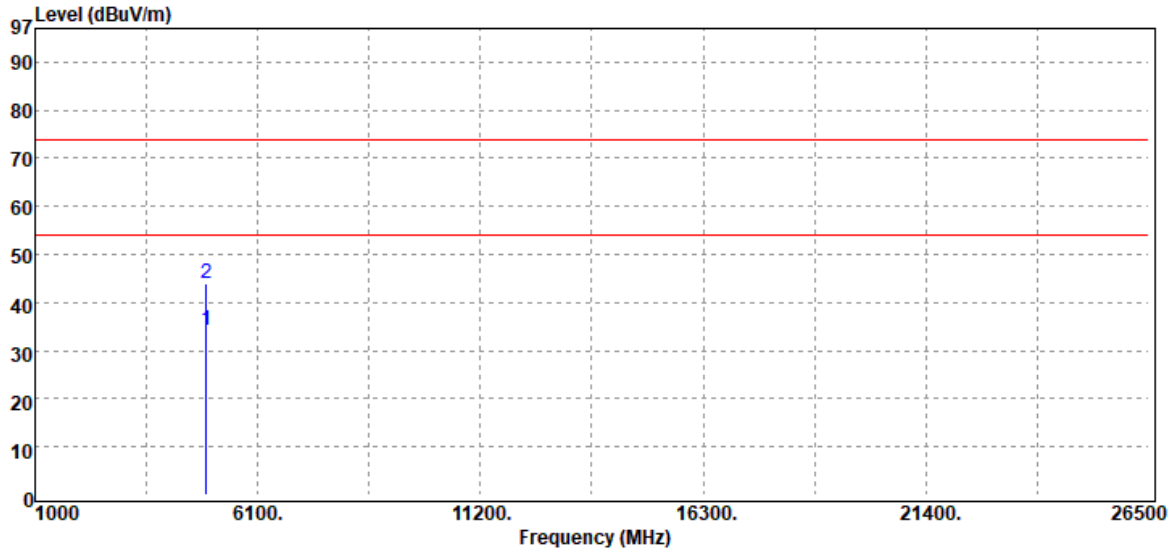

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4924.00	Average	27.19	7.06	34.25	54.00	-19.75
4924.00	Peak	36.90	7.06	43.96	74.00	-30.04

Report Number	:ER-2021-40062	Test Site	:SAC III Chamber
Operation Mode	:802.11n20	Test Date	:2021-04-22
Test Frequency	:2462 MHz	Temp./Humi.	:24.1/63
Test Mode	:Tx CH High	Antenna Pol.	:HORIZONTAL
EUT Pol	:H Plane	Engineer	:Ricky Chen

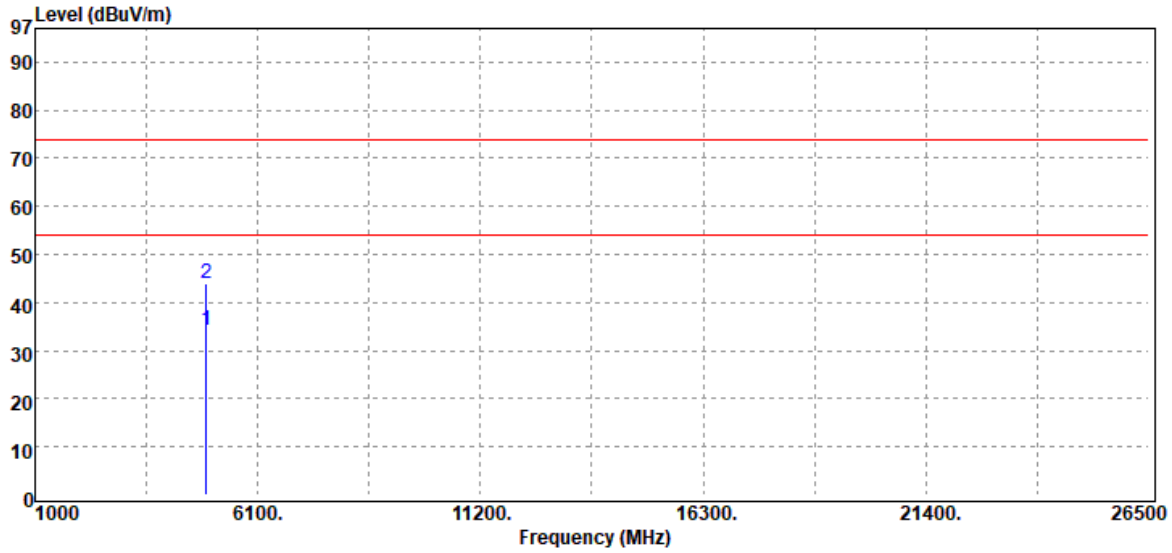

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4924.00	Average	27.18	7.06	34.24	54.00	-19.76
4924.00	Peak	37.00	7.06	44.06	74.00	-29.94

12 POWER SPECTRAL DENSITY

12.1 Standard Applicable

Per Part 15.247 (e)

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

12.2 Measurement Equipment Used

Conducted Emission Test Site: Conducted 2					
EQUIPMENT TYPE	**MFR**	**MODEL NUMBER**	**SERIAL NUMBER**	**LAST CAL.**	**CAL DUE.**
EXA Spectrum Analyzer	KEYSIGHT	N9010B	MY60240503	12/11/2020	12/10/2021
Attenuator	Mini-Circuit	BW-S10W2+	2	12/16/2020	12/15/2021
DC Block	Mini-Circuits	BLK-18-S+	1	12/16/2020	12/15/2021

12.3 Test Set-up

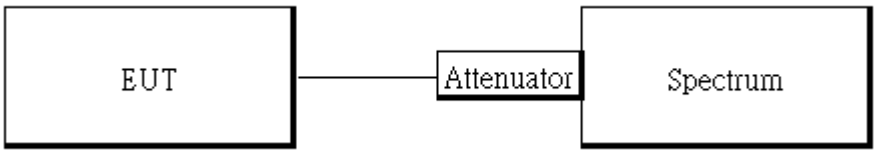

12.4 Measurement Procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance .
3. Set the span to 1.5 times the DTS channel bandwidth.
4. Set the RBW = 3 kHz & VBW = 10 kHz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.

12.5 Measurement Result

12.5.1 Power spectral density

POWER DENSITY 802.11b				
Freq. (MHz)	Ch0 PSD	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412	-4.35	-4.35	8.00	PASS
2437	-3.27	-3.27	8.00	PASS
2462	-6.01	-6.01	8.00	PASS

POWER DENSITY 802.11g				
Freq. (MHz)	Ch0 PSD	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412	-8.07	-8.07	8.00	PASS
2437	-6.13	-6.13	8.00	PASS
2462	-8.7	-8.70	8.00	PASS

POWER DENSITY 802.11n HT20				
Freq. (MHz)	Ch0 PSD	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412	-8.78	-8.78	8.00	PASS
2437	-6.59	-6.59	8.00	PASS
2462	-8.81	-8.81	8.00	PASS

Refer to next page for plots

802.11b_20MHz_Chain0_2412MHz

802.11g_20MHz_Chain0_2412MHz

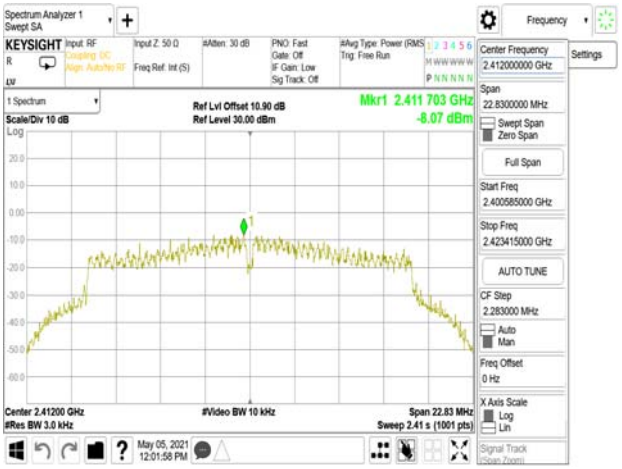

802.11b_20MHz_Chain0_2437MHz

802.11g_20MHz_Chain0_2437MHz

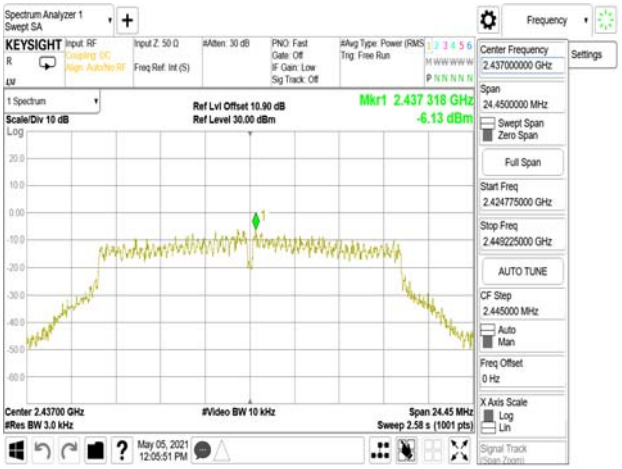

802.11b_20MHz_Chain0_2462MHz

802.11g_20MHz_Chain0_2462MHz

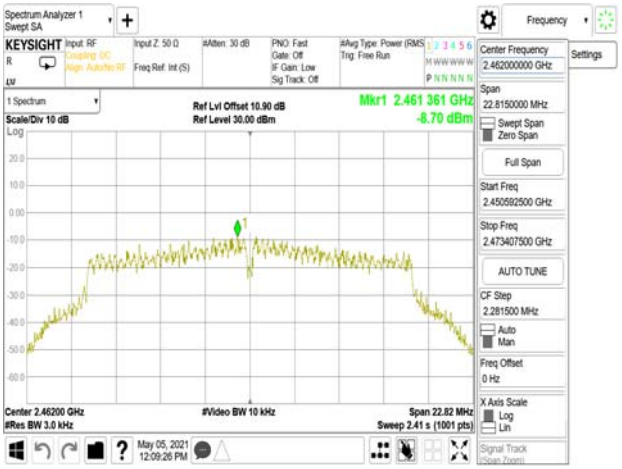

802.11n_20MHz_Chain0_2412MHz

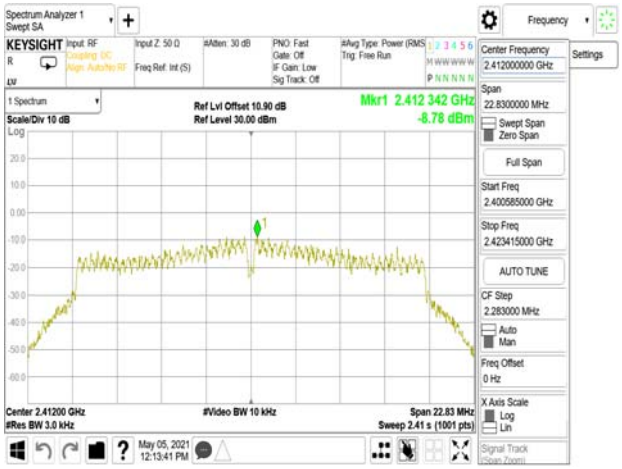

802.11n_20MHz_Chain0_2437MHz

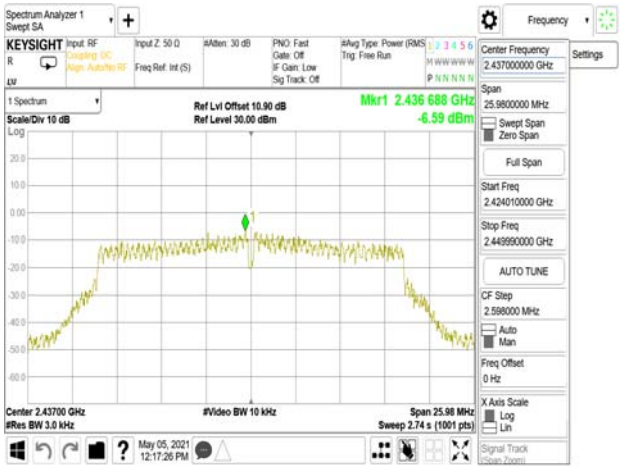

802.11n_20MHz_Chain0_2462MHz

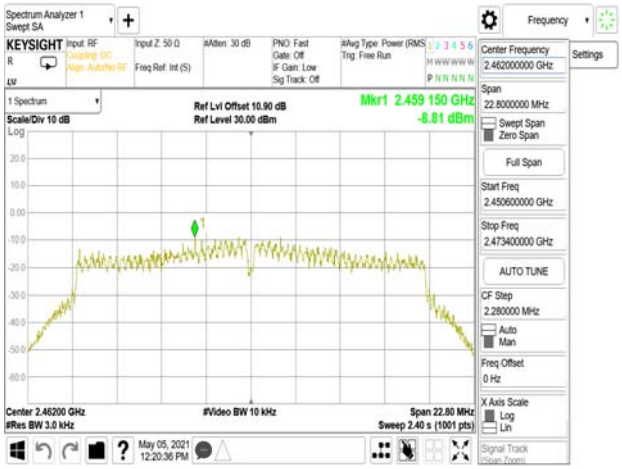

13 ANTENNA REQUIREMENT

13.1 Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

If the transmitting antenna is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

13.2 Antenna Connected Construction

The antenna is designed with unique RF connector and no consideration of replacement. Please see EUT photo for details.

~ End of Report ~