



## FCC TEST REPORT

For

INNOVATIVE CONCEPTS AND DESIGN LLC

Microphone

Test Model: GRV-MIC

Prepared for : INNOVATIVE CONCEPTS AND DESIGN LLC  
Address : 458 FLORIDA GROVE RD PERTH AMBOY, NJ 08861

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.  
Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei,  
Shajing Street, Baoan District, Shenzhen, 518000, China  
Tel : (+86)755-82591330  
Fax : (+86)755-82591332  
Web : www.LCS-cert.com  
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : October 12, 2023  
Number of tested samples : 2  
Sample No : A10123089-1, A10123089-2  
Serial number : Prototype  
Date of Test : October 12, 2023 ~ November 09, 2023  
Date of Report : November 09, 2023



Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,  
518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity

**FCC TEST REPORT**  
**FCC CFR 47 PART 74****Report Reference No. .... : LCSA10123089EA**

Date of Issue..... : November 09, 2023

**Testing Laboratory Name..... : Shenzhen LCS Compliance Testing Laboratory Ltd.**Address..... : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei,  
Shajing Street, Baoan District, Shenzhen, 518000, ChinaTesting Location/ Procedure..... : Full application of Harmonised standards ■  
Partial application of Harmonised standards □  
Other standard testing method □**Applicant's Name..... : INNOVATIVE CONCEPTS AND DESIGN LLC**

Address..... : 458 FLORIDA GROVE RD PERTH AMBOY, NJ 08861

**Test Specification**

Standard..... : FCC CFR 47 PART 74

**Test Report Form No..... : LCSEMC-1.0**

TRF Originator..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF..... : Dated 2011-03

**Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**EUT Description..... : Microphone**

Trade Mark..... : gemini

Test Model ..... : GRV-MIC

Ratings..... : DC 3.0V by 2\*AA Batteries

**Result ..... : Positive****Compiled by:**

Li Huan/Administrator

**Supervised by:**

Cary Luo/ Technique principal

**Approved by:**

Gavin Liang/ Manager



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,  
518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**FCC -- TEST REPORT**

|                                         |                                           |
|-----------------------------------------|-------------------------------------------|
| <b>Test Report No. :</b> LCSA10123089EA | <u>November 09, 2023</u><br>Date of issue |
|-----------------------------------------|-------------------------------------------|

|                          |                                                                                                 |
|--------------------------|-------------------------------------------------------------------------------------------------|
| Test Model.....          | : GRV-MIC                                                                                       |
| EUT.....                 | : Microphone                                                                                    |
| <b>Applicant.....</b>    | <b>: INNOVATIVE CONCEPTS AND DESIGN LLC</b>                                                     |
| Address.....             | : 458 FLORIDA GROVE RD PERTH AMBOY, NJ 08861                                                    |
| Telephone.....           | : /                                                                                             |
| Fax.....                 | : /                                                                                             |
| <b>Manufacturer.....</b> | <b>: Guangzhou Jie Li Electron Co.,Ltd.</b>                                                     |
| Address.....             | : No.5, Xinke Kejia Yuanxing Rd., Jiahe Street, Baiyun District,<br>Guangzhou, Guangzhou, China |
| Telephone.....           | : /                                                                                             |
| Fax.....                 | : /                                                                                             |
| <b>Factory.....</b>      | <b>: Guangzhou Jie Li Electron Co.,Ltd.</b>                                                     |
| Address.....             | : No.5, Xinke Kejia Yuanxing Rd., Jiahe Street, Baiyun District,<br>Guangzhou, Guangzhou, China |
| Telephone.....           | : /                                                                                             |
| Fax.....                 | : /                                                                                             |

|                    |                 |
|--------------------|-----------------|
| <b>Test Result</b> | <b>Positive</b> |
|--------------------|-----------------|

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,  
518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity



Revision History

| Revision | Issue Date        | Revision Content | Revised By |
|----------|-------------------|------------------|------------|
| 000      | November 09, 2023 | Initial Issue    | --         |
|          |                   |                  |            |
|          |                   |                  |            |





## TABLE OF CONTENTS

|                                                            |           |
|------------------------------------------------------------|-----------|
| <b>1. GENERAL INFORMATION</b>                              | <b>6</b>  |
| 1.1. DESCRIPTION OF DEVICE (EUT)                           | 6         |
| 1.2. SUPPORT EQUIPMENT LIST                                | 6         |
| 1.3. EXTERNAL I/O CABLE                                    | 6         |
| 1.4. DESCRIPTION OF TEST FACILITY                          | 6         |
| 1.5. STATEMENT OF THE MEASUREMENT UNCERTAINTY              | 7         |
| 1.6. MEASUREMENT UNCERTAINTY                               | 7         |
| 1.7. DESCRIPTION OF TEST MODES                             | 7         |
| <b>2. TEST METHODOLOGY</b>                                 | <b>8</b>  |
| 2.1. EUT CONFIGURATION                                     | 8         |
| 2.2. EUT EXERCISE                                          | 8         |
| 2.3. GENERAL TEST PROCEDURES                               | 8         |
| <b>3. SYSTEM TEST CONFIGURATION</b>                        | <b>9</b>  |
| 3.1. JUSTIFICATION                                         | 9         |
| 3.2. EUT EXERCISE SOFTWARE                                 | 9         |
| 3.3. SPECIAL ACCESSORIES                                   | 9         |
| 3.4. BLOCK DIAGRAM/SCHEMATICS                              | 9         |
| 3.5. EQUIPMENT MODIFICATIONS                               | 9         |
| 3.6. TEST SETUP                                            | 9         |
| <b>4. SUMMARY OF TEST RESULTS</b>                          | <b>10</b> |
| <b>5. TEST RESULT</b>                                      | <b>11</b> |
| 5.1. TRANSMITTER OUTPUT POWER                              | 11        |
| 5.2. OCCUPIED BANDWIDTH AND EMISSION MASK                  | 13        |
| 5.3. TRANSMITTER UNWANTED EMISSIONS(RADIATED OR CONDUCTED) | 15        |
| 5.5.FREQUENCY STABILITY                                    | 19        |
| 5.6.NECESSARY BANDWIDTH (BN) FOR DIGITAL SYSTEMS           | 21        |
| <b>6. LIST OF MEASURING EQUIPMENTS</b>                     | <b>24</b> |
| <b>7. TEST SETUP PHOTOGRAPHS OF EUT</b>                    | <b>25</b> |
| <b>8. EXTERIOR PHOTOGRAPHS OF THE EUT</b>                  | <b>25</b> |
| <b>9. INTERIOR PHOTOGRAPHS OF THE EUT</b>                  | <b>25</b> |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## 1. GENERAL INFORMATION

### 1.1. Description of Device (EUT)

EUT : Microphone  
Test Model : GRV-MIC  
Power Supply : DC 3.0V by 2\*AA Batteries  
Hardware Version : RTZ-100TX V1.5B  
Software Version : /

#### UHF

Operation frequency : 525.8MHz  
Modulation Type : GFSK  
Antenna Type : Internal Antenna  
Antenna Gain : 6.0dBi  
Extreme temp. Tolerance : -30°C to +50°C

### 1.2. Support Equipment List

| Manufacturer | Description | Model | Serial Number | Certificate |
|--------------|-------------|-------|---------------|-------------|
| --           | --          | --    | --            | --          |

### 1.3. External I/O Cable

| I/O Port Description | Quantity | Cable |
|----------------------|----------|-------|
| --                   | --       | --    |

### 1.4. Description of Test Facility

NVLAP Accreditation Code is 600167-0.

FCC Designation Number is CN5024.

Test Firm Registration Number: 254912

CAB identifier is CN0071.

CNAS Registration Number is L4595.

Test Firm Registration Number: 254912.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## 1.5. Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

## 1.6. Measurement Uncertainty

| Test Item                  | Frequency Range | Uncertainty | Note |
|----------------------------|-----------------|-------------|------|
| Radiation Uncertainty      | 9KHz~30MHz      | ±3.10dB     | (1)  |
|                            | 30MHz~200MHz    | ±2.96dB     | (1)  |
|                            | 200MHz~1000MHz  | ±3.10dB     | (1)  |
|                            | 1GHz~26.5GHz    | ±3.80dB     | (1)  |
|                            | 26.5GHz~40GHz   | ±3.90dB     | (1)  |
| Conduction Uncertainty     | 150kHz~30MHz    | ±1.63dB     | (1)  |
| Power disturbance          | 30MHz~300MHz    | ±1.60dB     | (1)  |
| Occupied Channel Bandwidth | 1GHz-40GHz      | ±5%         | (1)  |

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 1.7. Description of Test Modes

The EUT has been tested under operating condition.

This test was performed with EUT in X, Y, Z position and the worst case was found when EUT in X position.

Worst-case mode and channel used for 150 kHz-30 MHz power line conducted emissions was the mode and channel with the highest output power, which was determined to be (HCH).

Worst-case mode and channel used for 9kHz-1000 MHz radiated emissions was the mode and channel with the highest output power, that was determined to be (HCH).

Worst-Case data rates were utilized from preliminary testing of the Chipset, worst-case data rates used during the testing are as follows:

| Modulation Type | Test Channel | Test Frequency (MHz) |
|-----------------|--------------|----------------------|
| Channel         | 1            | 525.8                |







## 2. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.26-2015: American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen LCS Compliance Testing Laboratory Ltd.

### 2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### 2.2. EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section FCC Rules Part 74.

### 2.3. General Test Procedures

#### 2.3.1 Power Line Conducted Emissions(N/A)

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2.1 of ANSI C63.4-2014 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

#### 2.3.2 Radiated Emissions

please refer to radiated emission



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity





### 3. SYSTEM TEST CONFIGURATION

#### 3.1. Justification

The system was configured for testing in a continuous transmits condition.

#### 3.2. EUT Exercise Software

The system was configured for testing in a continuous transmits condition; and transmission frequency by switch button control.

#### 3.3. Special Accessories

N/A

#### 3.4. Block Diagram/Schematics

Please refer to the related document

#### 3.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

#### 3.6. Test Setup

Please refer to the test setup photo.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



#### 4. SUMMARY OF TEST RESULTS

| Applied Standard: FCC Part 74                |                                                       |           |
|----------------------------------------------|-------------------------------------------------------|-----------|
| FCC Rules                                    | Description of Test                                   | Result    |
| FCC Part 74.861(e)(1)(ii)<br>FCC Part 2.1046 | Maximum Conducted Output Power                        | Compliant |
| FCC Part 74.861 (e)(5)<br>FCC Part 2.1049    | Occupied Bandwidth                                    | Compliant |
| FCC Part 74.861 (e)(4)<br>FCC Part 2.1055    | Frequency error                                       | Compliant |
| FCC Part 74.861(e)(6)<br>2.1053              | Transmitter unwanted emissions(radiated or conducted) | Compliant |
| FCC Part 2.1049<br>FCC Part 2.1047           | Modulation characteristic                             | N/A       |
| FCC Part 74.861 (e)(7)<br>FCC Part 2.1049    | Necessary bandwidth (BN) for digital systems          | Compliant |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## 5. TEST RESULT

### 5.1. Transmitter output power

#### 5.1.1. Measurement description:

The power may not exceed the following values.

(i) 54-72, 76-88, and 174-216 MHz bands: 50 mW EIRP

(ii) 470-608 and 614-698: 250 mW conducted power

(iii) 600 MHz duplex gap: 20 mW EIRP

#### 5.1.2. Measurement:

| Measurement parameter |                                                                                                                                                                                                                                                               |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Detector:             | Peak (worst case) / Average (RMS)                                                                                                                                                                                                                             |
| Sweep time:           | Auto / 20s                                                                                                                                                                                                                                                    |
| Resolution bandwidth: | > emission bandwidth                                                                                                                                                                                                                                          |
| Video bandwidth:      | > resolution bandwidth                                                                                                                                                                                                                                        |
| Span:                 | > 2 times emissions bandwidth                                                                                                                                                                                                                                 |
| Trace mode:           | Max. hold                                                                                                                                                                                                                                                     |
| EUT configuration:    | Peak:<br>Unmodulated carrier<br>RMS:<br>Modulate the transmitter with a 2.5 kHz tone at a level 16 dB higher than that required to produce a frequency deviation of $\pm 75$ kHz, or to produce 50% of the manufacturer's rated deviation, whichever is less. |

#### 5.1.3. Limits:

| FCC                                                    |
|--------------------------------------------------------|
| 470 MHz to 608 MHz 250 mW (average) / 24 dBm (average) |

#### 5.1.4. Test result:

The EUT was programmed to be in continuously transmitting mode.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## 5.1.5. Test result

| Test Mode | Frequency (MHz) | Measured Maximum Peak Power(dBm) | Measured Maximum Average Power(dBm) | Limits Average (dBm) | Verdict |
|-----------|-----------------|----------------------------------|-------------------------------------|----------------------|---------|
| FM        | 525.8           | /                                | 9.826                               | 24                   | PASS    |

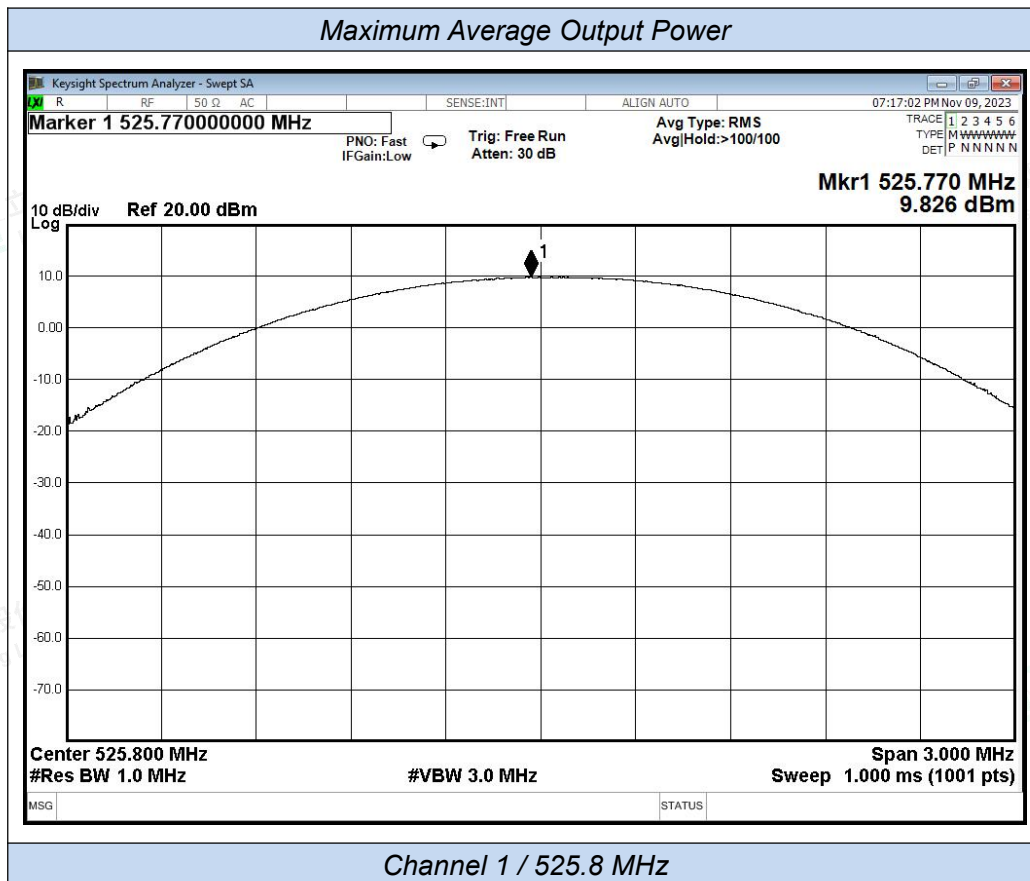

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## 5.2. Occupied bandwidth and Emission Mask

### 5.2.1. Measurement description:

The operating bandwidth shall not exceed 200 kHz.

The mean power of emissions shall be attenuated below the mean output power of the transmitter in accordance with the following schedule:

- (i) On any frequency removed from the operating frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: at least 25 dB;
- (ii) On any frequency removed from the operating frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth: at least 35 dB;
- (iii) On any frequency removed from the operating frequency by more than 250 percent of the authorized bandwidth: at least  $43 + 10\log_{10}$  (mean output power in watts) dB.


### 5.2.2. Measurement:

| Measurement parameter |                                                |
|-----------------------|------------------------------------------------|
| Detector:             | Peak                                           |
| Sweep time:           | Auto                                           |
| Resolution bandwidth: | 1 % to 5 % of the occupied bandwidth           |
| Video bandwidth:      | 3 x resolution bandwidth                       |
| Span:                 | 2 x emission bandwidth                         |
| Trace mode:           | Max. hold                                      |
| Analyzer function:    | 99% power occupied bandwidth function          |
| EUT:                  | Modulated signal with max. frequency deviation |

### 5.2.3. Result:

| Test Mode | Frequency (MHz) | 99% Bandwidth (KHz) | Limits (KHz) | Verdict |
|-----------|-----------------|---------------------|--------------|---------|
| FM        | 525.8           | 147.36              | 200          | PASS    |



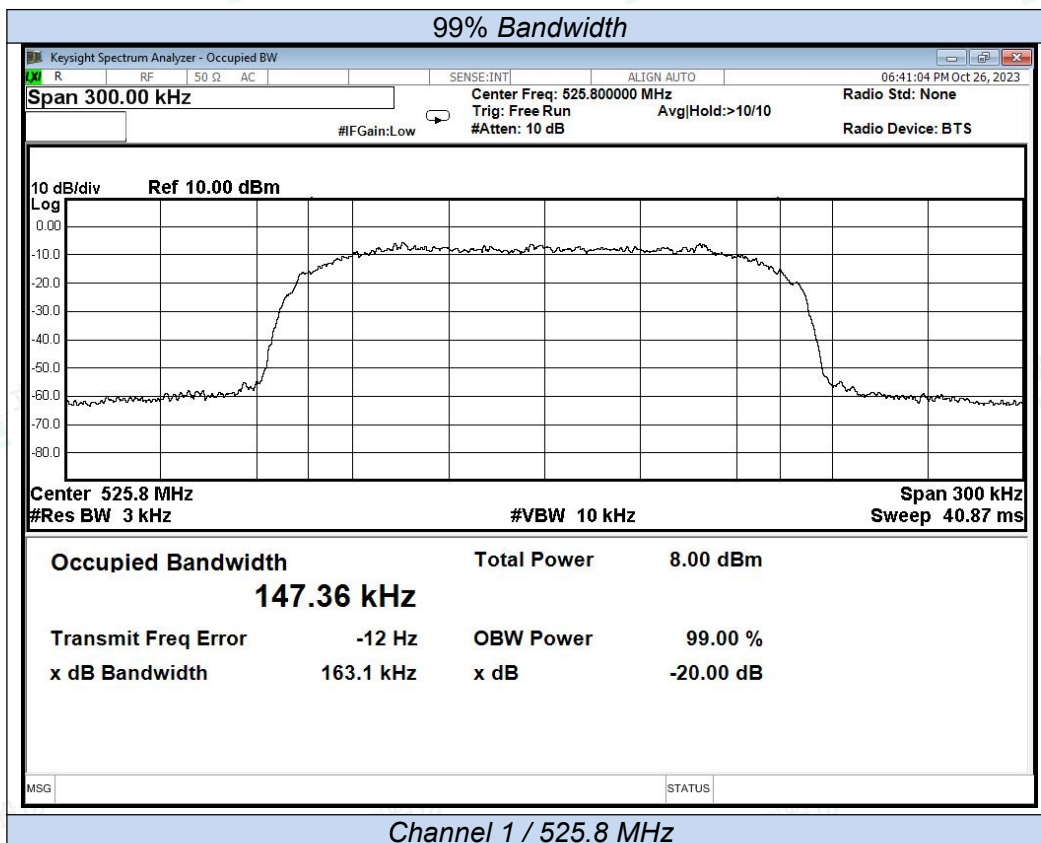

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity






### 5.3. Transmitter unwanted emissions(radiated or conducted)

#### 5.3.1. Measurement description:

##### TEST CONFIGURATION

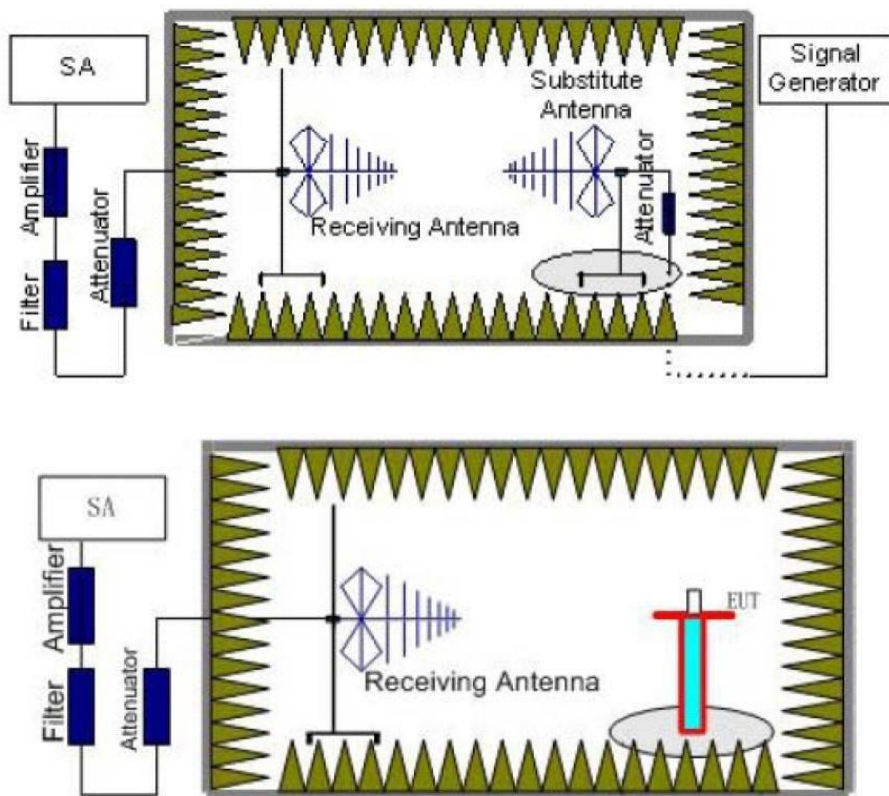

### TEST PROCEDURE

1. EUT was placed on a 1.50 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.50 m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as ( $P_r$ ).



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity





4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss ( $P_{cl}$ ), the Substitution Antenna Gain ( $G_a$ ) and the Amplifier Gain ( $P_{Ag}$ ) should be recorded after test.  
The measurement results are obtained as described below:  
$$\text{Power(EIRP)} = P_{Mea} - P_{Ag} - P_{cl} + G_a$$
6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
7. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dBi}$ .
8. In order to make sure test results more clearly, we set frequency range and sweep time for difference frequency range as follows table:

### TEST LIMITS

| FCC & IC (according to ETSI EN 300 422-1 V2.1.2 (2017-01)) |                                                               |                                 |                               |
|------------------------------------------------------------|---------------------------------------------------------------|---------------------------------|-------------------------------|
| State                                                      | Max. spurious level                                           |                                 |                               |
|                                                            | 47 MHz to 74 MHz<br>87.5 MHz to 118 MHz<br>174 MHz to 230 MHz | Other frequencies<br>≤ 1000 MHz | All frequencies<br>> 1000 MHz |
| Operating                                                  | 4.0 nW                                                        | 250 nW                          | 1.00 μW                       |
| Standby                                                    | 2.0 nW                                                        | 2.0 nW                          | 20.0 nW                       |

| FCC & IC                                                                                                                                  |                                                    |
|-------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|
| The mean power of emissions shall be attenuated below the mean output power of the transmitter in accordance with the following schedule: |                                                    |
| On any frequency removed from the operating frequency by more than 50 percent up to and including 100 percent of the                      | 25 dB                                              |
| On any frequency removed from the operating frequency by more than 100 percent up to and including 250 percent of                         | 35 dB                                              |
| On any frequency removed from the operating frequency by more than 250 percent of the authorized bandwidth: at least                      | $43 + 10\log_{10}$ (mean output power in watts) dB |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## 5.3.2. Results for Radiated Emissions

| Frequency (MHz) | Polarization (H/V) | Measure Level (dBm) | Limit (dBm) | Margin (dB) | Detector |
|-----------------|--------------------|---------------------|-------------|-------------|----------|
| 525.8MHz        |                    |                     |             |             |          |
| 149.99          | H                  | -44.52              | -36.00      | -8.52       | PK       |
| 65.43           | V                  | -58.47              | -54.00      | -4.47       | PK       |
| 1051.62         | H                  | -41.83              | -30.00      | -11.83      | PK       |
| 1051.66         | V                  | -61.03              | -30.00      | -31.03      | PK       |
| 1577.43         | H                  | -41.20              | -30.00      | -11.20      | PK       |
| 1577.40         | V                  | -33.98              | -30.00      | -3.98       | PK       |
| 2103.25         | H                  | -35.56              | -30.00      | -5.56       | PK       |
| 2103.22         | V                  | -42.20              | -30.00      | -12.20      | PK       |
| 4925.07         | H                  | -36.25              | -30.00      | -6.25       | PK       |
| 4928.03         | V                  | -41.58              | -30.00      | -11.58      | PK       |
| 5387.36         | H                  | -38.21              | -30.00      | -8.21       | PK       |
| 5388.75         | V                  | -45.17              | -30.00      | -15.17      | PK       |

Note: 1, All detected emissions are more than 20 dB below the limit, In addition to main frequency.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



#### 5.4. Conducted spurious emission

##### 5.4.1. Description:

Measurement of the conducted spurious emissions in transmit mode below 30 MHz. The EUT is set to channel 6. This measurement is repeated for DSSS and OFDM modulation. If peaks are found channel 1 and channel 11 will be measured too. The measurement is performed with the data rate producing the highest output power. Both power lines, phase and neutral line, are measured. Found peaks are re-measured with average and quasi peak detection to show compliance to the limits.

##### 5.4.2. Measurement:

| Measurement parameter |                                            |
|-----------------------|--------------------------------------------|
| Detector:             | Peak - Quasi Peak / Average                |
| Sweep time:           | Auto                                       |
| Resolution bandwidth: | F < 150 kHz: 200 Hz<br>F > 150 kHz: 9 kHz  |
| Video bandwidth:      | F < 150 kHz: 1 kHz<br>F > 150 kHz: 100 kHz |
| Span:                 | 9 kHz to 30 MHz                            |
| Trace mode:           | Max Hold                                   |

##### 5.4.3. Limits:

| FCC             |                           |                        |
|-----------------|---------------------------|------------------------|
| Frequency (MHz) | Quasi-Peak (dB $\mu$ V/m) | Average (dB $\mu$ V/m) |
| 0.15 – 0.5      | 66 to 56*                 | 56 to 46*              |
| 0.5 – 5         | 56                        | 46                     |
| 5 – 30.0        | 60                        | 50                     |

##### 5.4.4. Results:

Not Applicable.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



### 5.5.Frequency Stability

Test Requirement:FCC CFR 47 Part 74.e) 4)

Test Method:FCC CFR 47 Part 2.1055

Requirements:+/-50 ppm

(e) For low power auxiliary stations operating in the bands allocated for TV broadcasting, the following technical requirements apply:

(4) The frequency tolerance of the transmitter shall be 0.005 percent.

Test Procedure:


Frequency stability versus Environmental Temperature

The equipment under test was connected to an external DC power supply and the RF output was connected to a frequency counter via feed through attenuators.

The EUT was placed inside the temperature chamber. After the temperature stabilized for approximately 20 minutes, the frequency of the output signal was recorded from the counter.

Frequency Stability versus Input Voltage

At room temperature ( $25 \pm 5^{\circ}\text{C}$ ), an external variable DC power supply was connected to the EUT. The frequency of the transmitter was measured for 115%, 100% and 85% of the nominal operating input voltage. For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

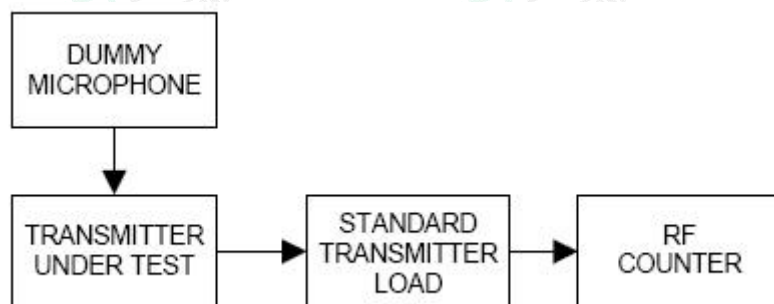

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## Test Result:

| Assigned Frequency: 525.8 MHz |                      |                                                                                 |
|-------------------------------|----------------------|---------------------------------------------------------------------------------|
| Environment Temperature (°C)  | Power Supplied (Vdc) | Frequency Measure with Time Elapsed<br>Total emission within +/- 28.025 kHz     |
| 50                            | 3.0                  | +2.76                                                                           |
| 40                            | 3.0                  | +2.32                                                                           |
| 30                            | 3.0                  | +2.08                                                                           |
| 20                            | 3.0                  | +1.77                                                                           |
| 10                            | 3.0                  | -1.02                                                                           |
| 0                             | 3.0                  | -1.55                                                                           |
| -10                           | 3.0                  | -1.94                                                                           |
| -20                           | 3.0                  | -2.22                                                                           |
| -30                           | 3.0                  | -2.37                                                                           |
| Environment Temperature (°C)  | Power Supplied (Vdc) | Frequency Measure with Time Elapsed<br>Total emission within Max +/- 28.025 kHz |
| 25                            | 3.3                  | +2.02                                                                           |
| 25                            | 3.0                  | -1.73                                                                           |
| 25                            | 2.7                  | -2.14                                                                           |

Battery end point: 3.0Vdc

The results: The unit does meet the FCC requirements.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## 5.6. Necessary bandwidth (BN) for digital systems

### 5.6.1. Measurement:

| Measurement parameter |                             |
|-----------------------|-----------------------------|
| Detector:             | Peak - Quasi Peak / Average |
| Sweep time:           | Auto                        |
| Resolution bandwidth: | 1 kHz                       |
| Video bandwidth:      | 1 kHz                       |
| Span:                 | Fc-1MHz to fc+1MHz(2MHz)    |
| Trace mode:           | Max Hold                    |

#### Method of Measurement

Principal Spectrum Mask measuring method for digital transmitters:

- Spectrum mask below 1 GHz, see figure 4; for the spectrum mask above 1 GHz, see figure 5.

NOTE: This parameter also includes the limits for spectral components within the out-of-band region.

The transmitter shall be modulated with the test signals defined in clause 7.1.2. In any case the mask shall not be exceeded.

- Step 1: Measure the "Carrier Power" with the spectrum analyser setup:

- Centre Frequency =  $f_c$
- Span = Zero span
- Detector = RMS
- Trace Mode = Average
- RBW&VBW =  $5 \times B$
- Sweep time  $\geq 2$  s

Step 2: Measure the "Maximum Relative Level (dBc) at Specified Carrier Offsets" with the following spectrum analyser setup:

- Centre Frequency =  $f_c$
- Span  $\geq 5 \times B$
- Detector = RMS
- Trace Mode = Peak Hold
- RBW&VBW = 1 kHz
- Sweep time  $\geq 2$  s

Limits:

- Step 3: Measure the "transmitter wide band noise floor":
- The measurement of transmitter broad band noise floor shall be carried out according to clause 8.3.2.1.

- Step 3a: Measure the "lower frequency transmitter wide band noise floor":

- Start Frequency =  $f_c - 5 \times B$
- Stop Frequency =  $f_c - 1,75 \times B$
- Detector = RMS
- Trace Mode = Average
- RBW&VBW = 1 kHz



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity





- Sweep time = 2 s per 200 kHz

Step 3b: Measure the "upper frequency transmitter wide band noise floor":

- Start Frequency =  $f_c + 1,75 \times B$

Stop Frequency =  $f_c + 5 \times B$


- Detector = RMS

- Trace Mode = Average

- RBW&VBW = 1 kHz

- Sweep time = 2 s per 200 kHz

5.6.2.Limits:

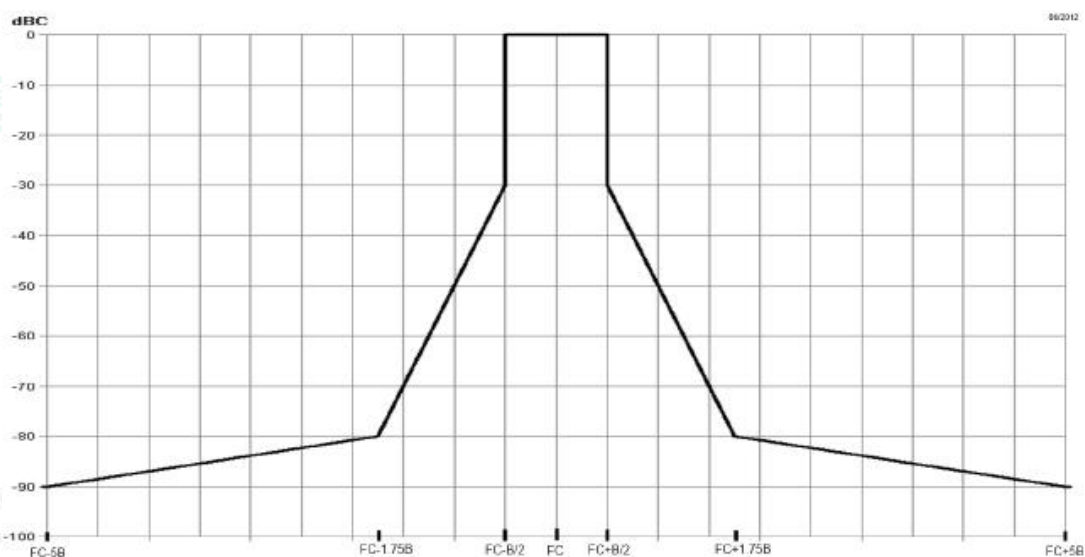

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## 5.6.3. Results:

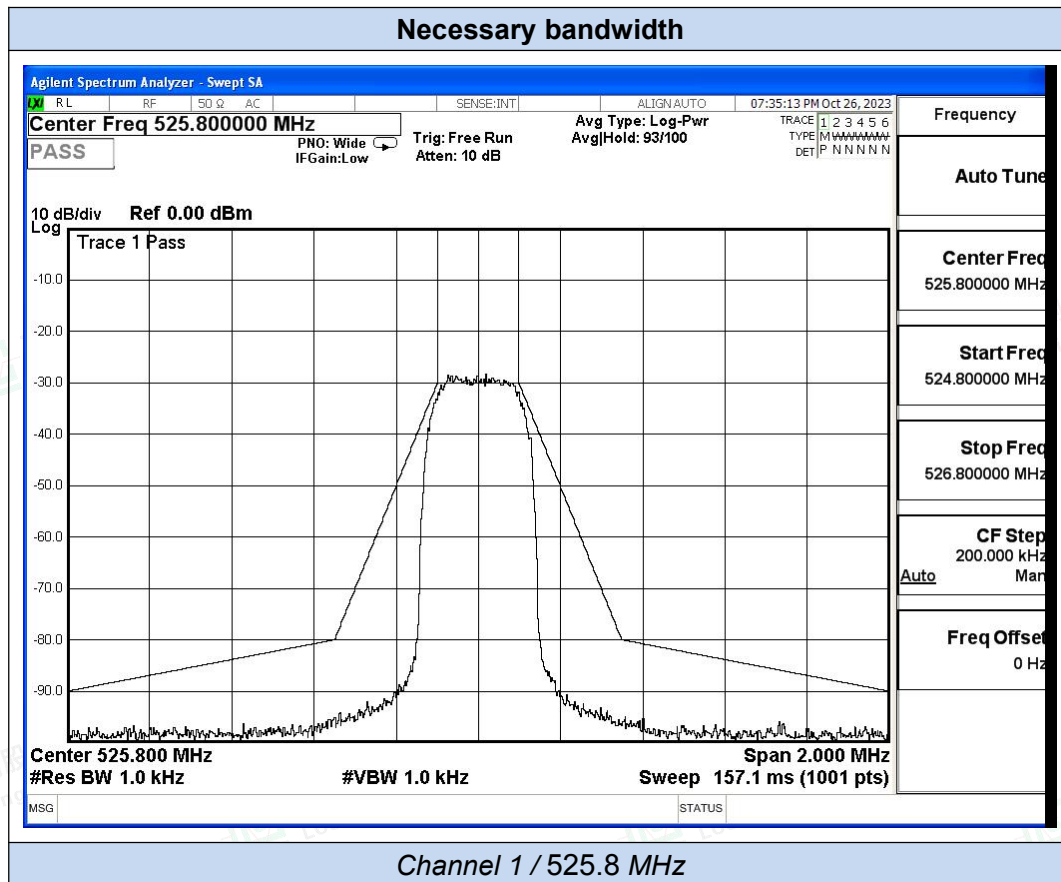

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## 6. LIST OF MEASURING EQUIPMENTS

| Item | Equipment                      | Manufacturer      | Model No.   | Serial No.      | Cal Date                 | Due Date                 |
|------|--------------------------------|-------------------|-------------|-----------------|--------------------------|--------------------------|
| 1    | MXA Signal Analyzer            | Agilent           | N9020A      | MY49100060      | 2022-10-29<br>2023-10-28 | 2023-10-28<br>2024-10-27 |
| 2    | DC Power Supply                | Agilent           | E3642A      | N/A             | 2022-10-29<br>2023-10-28 | 2023-10-28<br>2024-10-27 |
| 3    | Temperature & Humidity Chamber | GUANGZHOU GOGNWEN | GDS-100     | 70932           | 2023-10-05               | 2024-10-04               |
| 4    | EMI Test Software              | AUDIX             | E3          | /               | N/A                      | N/A                      |
| 5    | 3m Semi Anechoic Chamber       | SIDT FRANKONIA    | SAC-3M      | 03CH03-HY       | 2023-06-09               | 2024-06-08               |
| 6    | Positioning Controller         | Max-Full          | MF7802BS    | MF780208586     | N/A                      | N/A                      |
| 7    | Active Loop Antenna            | SCHWARZBECK       | FMZB 1519B  | 00005           | 2021-08-29               | 2024-08-28               |
| 8    | By-log Antenna                 | SCHWARZBECK       | VULB9163    | 9163-470        | 2021-09-12               | 2024-09-11               |
| 9    | Horn Antenna                   | SCHWARZBECK       | BBHA 9120D  | 9120D-1925      | 2021-09-05               | 2024-09-04               |
| 10   | EMI Test Receiver              | R&S               | ESR 7       | 101181          | 2023-06-09               | 2024-06-08               |
| 11   | RS SPECTRUM ANALYZER           | R&S               | FSP40       | 100503          | 2022-10-29<br>2023-10-28 | 2023-10-28<br>2024-10-27 |
| 12   | Broadband Preamplifier         | /                 | BP-01M18G   | P190501         | 2023-06-09               | 2024-06-08               |
| 13   | EMI Test Receiver              | R&S               | ESPI        | 101940          | 2023-08-15               | 2024-08-14               |
| 14   | Artificial Mains               | R&S               | ENV216      | 101288          | 2023-06-09               | 2024-06-08               |
| 15   | 10dB Attenuator                | SCHWARZBECK       | MTS-IMP-136 | 261115-001-0032 | 2023-06-09               | 2024-06-08               |
| 16   | EMI Test Software              | Farad             | EZ          | /               | N/A                      | N/A                      |





## 7. TEST SETUP PHOTOGRAPHS OF EUT

Please refer to separated files for Test Setup Photos of the EUT.

## 8. EXTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for External Photos of the EUT.

## 9. INTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for Internal Photos of the EUT.

-----THE END OF REPORT-----



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity