

# MEASUREMENT REPORT

## FCC PART 15 Subpart C WLAN 802.11b/g/n/ax

---

**FCC ID:** TE7AX50

**APPLICANT:** TP-Link Technologies Co., Ltd.

**Application Type:** CLASS II PERMISSIVE CHANGE

**Product:** AX3000 Gigabit Wi-Fi 6 Router

**Model No.:** Archer AX50, Archer AX3000

**Brand Name:** tp-link

**FCC Classification:** Digital Transmission System (DTS)

**FCC Rule Part(s):** Part15 Subpart C (Section 15.247)

**Test Procedure(s):** ANSI C63.10-2013, KDB 558074 D01v05r02  
KDB 662911 D01v02r01

**Test Date:** April 25 ~ December 20, 2019

Reviewed By:   
( Paddy Chen )

Approved By:   
(Chenz Ker)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Taiwan) Co., Ltd.

## Revision History

| Report No.    | Version | Description    | Issue Date | Note  |
|---------------|---------|----------------|------------|-------|
| 1912TW0111-U1 | Rev. 01 | Initial Report | 12-20-2019 | Valid |
|               |         |                |            |       |

Note: This report is prepared for FCC Class II permissive change supplement to MRT original “1905TW0114-U1” report adding beamforming function by software control and adding related data.

## CONTENTS

| Description                                                | Page      |
|------------------------------------------------------------|-----------|
| <b>§2.1033 General Information.....</b>                    | <b>5</b>  |
| <b>1. INTRODUCTION .....</b>                               | <b>6</b>  |
| 1.1. Scope.....                                            | 6         |
| 1.2. MRT Test Location .....                               | 6         |
| <b>2. PRODUCT INFORMATION .....</b>                        | <b>7</b>  |
| 2.1. Feature of Equipment under Test .....                 | 7         |
| 2.2. Product Specification Subjective to this Report ..... | 7         |
| 2.3. Working Frequencies for this report.....              | 8         |
| 2.4. Description of Available Antennas.....                | 8         |
| 2.5. Description of Antenna RF Port .....                  | 9         |
| 2.6. Test Mode .....                                       | 9         |
| 2.7. Description of Test Software.....                     | 10        |
| 2.8. Device Capabilities .....                             | 11        |
| 2.9. Test Configuration .....                              | 12        |
| 2.10. EMI Suppression Device(s)/Modifications.....         | 12        |
| 2.11. Labeling Requirements.....                           | 12        |
| <b>3. DESCRIPTION of TEST.....</b>                         | <b>13</b> |
| 3.1. Evaluation Procedure .....                            | 13        |
| 3.2. AC Line Conducted Emissions .....                     | 13        |
| 3.3. Radiated Emissions.....                               | 14        |
| <b>4. ANTENNA REQUIREMENTS.....</b>                        | <b>15</b> |
| <b>5. TEST EQUIPMENT CALIBRATION DATE.....</b>             | <b>16</b> |
| <b>6. MEASUREMENT UNCERTAINTY .....</b>                    | <b>17</b> |
| <b>7. TEST RESULT .....</b>                                | <b>18</b> |
| 7.1. Summary .....                                         | 18        |
| 7.2. Output Power Measurement.....                         | 19        |
| 7.2.1. Test Limit .....                                    | 19        |
| 7.2.2. Test Procedure Used .....                           | 19        |
| 7.2.3. Test Setting.....                                   | 19        |
| 7.2.4. Test Setup .....                                    | 19        |
| 7.2.5. Test Result.....                                    | 20        |
| 7.3. Radiated Spurious Emission Measurement .....          | 24        |

|           |                                                 |           |
|-----------|-------------------------------------------------|-----------|
| 7.3.1.    | Test Limit .....                                | 24        |
| 7.3.2.    | Test Procedure Used .....                       | 24        |
| 7.3.3.    | Test Setting.....                               | 24        |
| 7.3.4.    | Test Setup .....                                | 26        |
| 7.3.5.    | Test Result.....                                | 27        |
| 7.4.      | Radiated Restricted Band Edge Measurement.....  | 35        |
| 7.4.1.    | Test Limit .....                                | 35        |
| 7.4.2.    | Test Procedure Used .....                       | 36        |
| 7.4.3.    | Test Setting.....                               | 36        |
| 7.4.4.    | Test Setup .....                                | 37        |
| 7.4.5.    | Test Result.....                                | 38        |
| <b>8.</b> | <b>CONCLUSION .....</b>                         | <b>86</b> |
|           | <b>Appendix A - Test Setup Photograph .....</b> | <b>87</b> |
|           | <b>Appendix B - EUT Photograph.....</b>         | <b>88</b> |

## §2.1033 General Information

|                                |                                                                                                                                 |
|--------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| <b>Applicant:</b>              | TP-Link Technologies Co., Ltd.                                                                                                  |
| <b>Applicant Address:</b>      | Building 24 (floors 1,3,4,5) and 28 (floors1-4), Central Science and Technology Park,Nanshan Shenzhen, 518057 China             |
| <b>Manufacturer:</b>           | TP-Link Technologies Co., Ltd.                                                                                                  |
| <b>Manufacturer Address:</b>   | Building 24 (floors 1,3,4,5) and 28 (floors1-4), Central Science and Technology Park,Nanshan Shenzhen, 518057 China             |
| <b>Test Site:</b>              | MRT Technology (Taiwan) Co., Ltd                                                                                                |
| <b>Test Site Address:</b>      | No. 38, Fuxing Second Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C)                                                      |
| <b>Test Device Serial No.:</b> | N/A <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering |

### Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Fuxing Rd., Taoyuan, Taiwan ( R.O.C )

- MRT facility is a FCC registered (Reg. No. 153292 and 291082) test facility with the site description report on file and is designated by the FCC as an Accredited Test Firm.
- MRT facility is an IC registered (MRT Reg. No. 21723-1) test laboratory with the site description on file at Industry Canada.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (TAF) under the American Association for Laboratory Accreditation Program (TAF Cert. No. 3261) in EMC, Telecommunications and Radio testing for FCC, Industry Taiwan, EU and TELEC Rules.


## 1. INTRODUCTION

### 1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

### 1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taoyuan City. These measurement tests were conducted at the MRT Technology (Taiwan) Co., Ltd. Facility located at No.38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan (R.O.C).

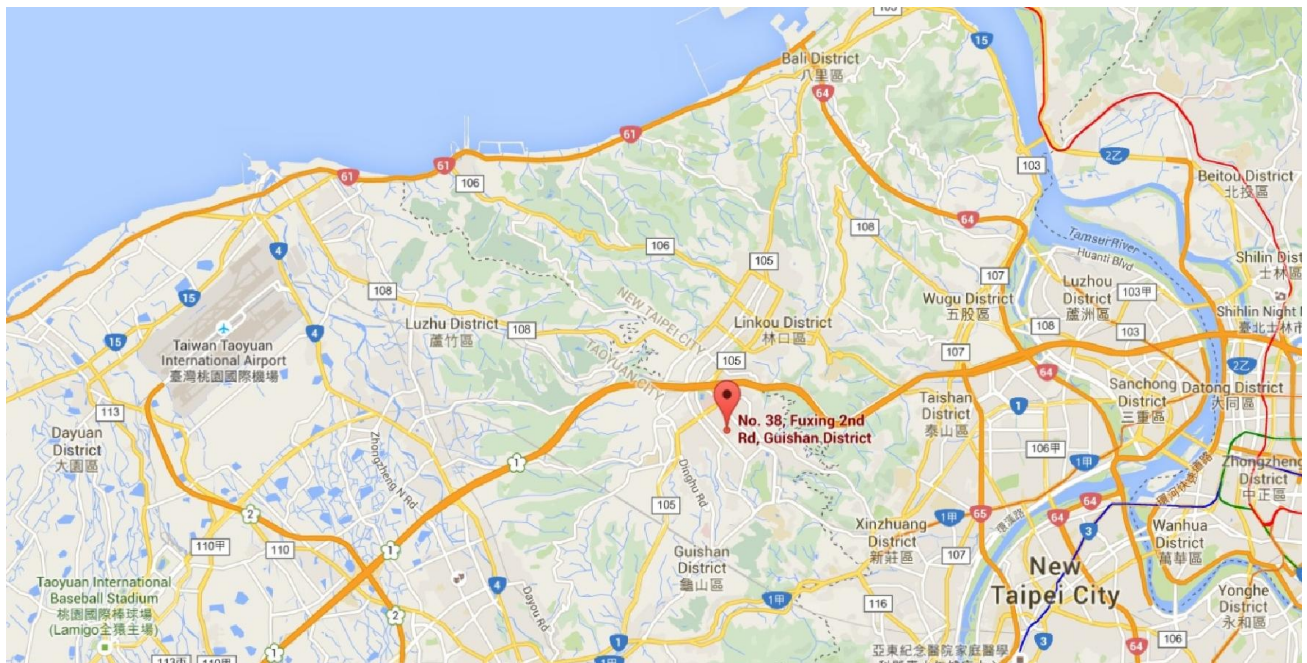

## 2. PRODUCT INFORMATION

### 2.1. Feature of Equipment under Test

|                      |                               |
|----------------------|-------------------------------|
| Product Name:        | AX3000 Gigabit Wi-Fi 6 Router |
| Model No.:           | Archer AX50, Archer AX3000    |
| Brand Name:          | tp-link                       |
| Wi-Fi Specification: | 802.11a/b/g/n/ax              |

Note: These models are different in the USB interface, “Archer AX50” supports USB 3.0, “Archer AX3000” supports USB2.0. Other circuits are the same. So Archer AX50 is chosen for the tests.

### 2.2. Product Specification Subjective to this Report

|                     |                                                                                                                    |
|---------------------|--------------------------------------------------------------------------------------------------------------------|
| Frequency Range:    | 802.11b/g/n-HT20/ax-HE20: 2412 ~ 2462MHz<br>802.11n-HT40/ax-HE40: 2422 ~ 2452MHz                                   |
| Channel Number:     | 802.11b/g/n-HT20/ax-HE20: 11<br>802.11n-HT40/ax-HE40: 7                                                            |
| Type of Modulation: | 802.11b: DSSS<br>802.11g/n: OFDM<br>802.11ax: OFDMA                                                                |
| Data Rate:          | 802.11b: 1/2/5.5/11Mbps<br>802.11g: 6/9/12/18/24/36/48/54Mbps<br>802.11n: up to 300Mbps<br>802.11ax: up to 574Mbps |

Note: For other features of this EUT, test report will be issued separately.

### 2.3. Working Frequencies for this report

802.11b/g/ax-HE20

| Channel | Frequency | Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|---------|-----------|
| 01      | 2412 MHz  | 02      | 2417 MHz  | 03      | 2422 MHz  |
| 04      | 2427 MHz  | 05      | 2432 MHz  | 06      | 2437 MHz  |
| 07      | 2442 MHz  | 08      | 2447 MHz  | 09      | 2452 MHz  |
| 10      | 2457 MHz  | 11      | 2462 MHz  | --      | --        |

802.11n-HT40/ax-HE40

| Channel | Frequency | Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|---------|-----------|
| 03      | 2422 MHz  | 04      | 2427 MHz  | 05      | 2432 MHz  |
| 06      | 2437 MHz  | 07      | 2442 MHz  | 08      | 2447 MHz  |
| 09      | 2452 MHz  | --      | --        | --      | --        |

### 2.4. Description of Available Antennas

| Antenna Type   | Frequency Band (MHz) | TX Paths | Max Antenna Gain (dBi) | BF Directional Gain (dBi) | CDD Directional Gain (dBi) |         |
|----------------|----------------------|----------|------------------------|---------------------------|----------------------------|---------|
|                |                      |          |                        |                           | For Power                  | For PSD |
| Dipole Antenna | 2400 ~ 2500          | 2        | 2.0                    | 5.01                      | 2.0                        | 5.01    |
|                | 5150 ~ 5850          | 2        | 3.0                    | 6.01                      | 3.0                        | 6.01    |

Note:

1. The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.

For CDD transmissions, directional gain is calculated as follows,  $N_{ANT} = 2$ ,  $N_{SS} = 1$ .

If all antennas have the same gain,  $G_{ANT}$ , Directional gain =  $G_{ANT} + \text{Array Gain}$ , where Array Gain is as follows.

- For power spectral density (PSD) measurements on all devices,


Array Gain =  $10 \log (N_{ANT} / N_{SS})$  dB = 3.01;

- For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB for  $N_{ANT} \leq 4$ ;

2. The EUT also supports Beam Forming mode, and the Beam Forming support 802.11ac/ax, not include 802.11a/b/g/n. BF Directional gain =  $G_{ANT} + 10 \log (N_{ANT})$ .

## 2.5. Description of Antenna RF Port
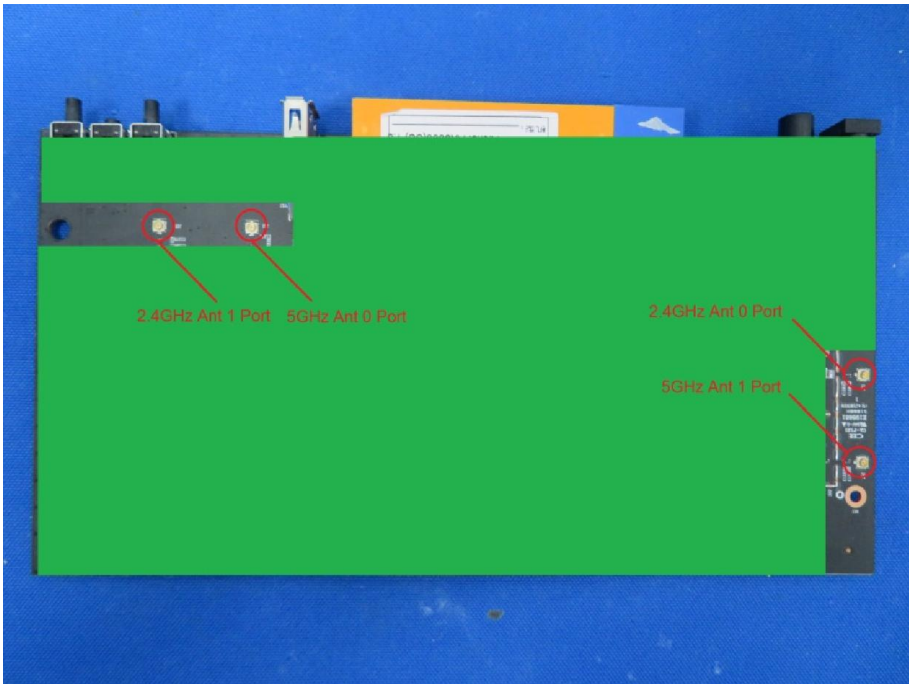
| Antenna RF Port                                                                     |                |       |              |       |
|-------------------------------------------------------------------------------------|----------------|-------|--------------|-------|
| Software<br>Control Port                                                            | 2.4GHz RF Port |       | 5GHz RF Port |       |
|                                                                                     | Ant 0          | Ant 1 | Ant 0        | Ant 1 |
|  |                |       |              |       |

## 2.6. Test Mode

|           |                                                    |
|-----------|----------------------------------------------------|
| Test Mode | Mode 1: Transmit by 802.11ax-HE20 (MCS0) (BF Mode) |
|           | Mode 2: Transmit by 802.11ax-HE40 (MCS0) (BF Mode) |

## 2.7. Description of Test Software

The test utility software used during testing was “DUT\_GUI.exe”.

### Power Parameter Value for Beam-Forming Mode

| Test Mode | Test Frequency (MHz) | Power Parameter Value | Test Mode | Test Frequency (MHz) | Power Parameter Value |
|-----------|----------------------|-----------------------|-----------|----------------------|-----------------------|
| 11ax-HE20 | 2412                 | 10.5                  | 11ax-HE40 | 2422                 | 16.0                  |
|           | 2417                 | 18.0                  |           | 2427                 | 16.0                  |
|           | 2422                 | 20.5                  |           | 2437                 | 18.5                  |
|           | 2437                 | 22.0                  |           | 2447                 | 17.5                  |
|           | 2452                 | 22.5                  |           | 2452                 | 17.5                  |
|           | 2457                 | 21.0                  | --        |                      |                       |
|           | 2462                 | 12.0                  |           |                      |                       |


## 2.8. Device Capabilities

This device contains the following capabilities:

2.4GHz WLAN (DTS), 5GHz WLAN (NII)

**Note:** 2.4GHz WLAN (DTS) operation is possible in 20MHz and 40MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

| Model No.   | Test Mode     | Duty Cycle |
|-------------|---------------|------------|
| Archer AX50 | 802.11ax-HE20 | 100.00%    |
|             | 802.11ax-HE40 | 100.00%    |

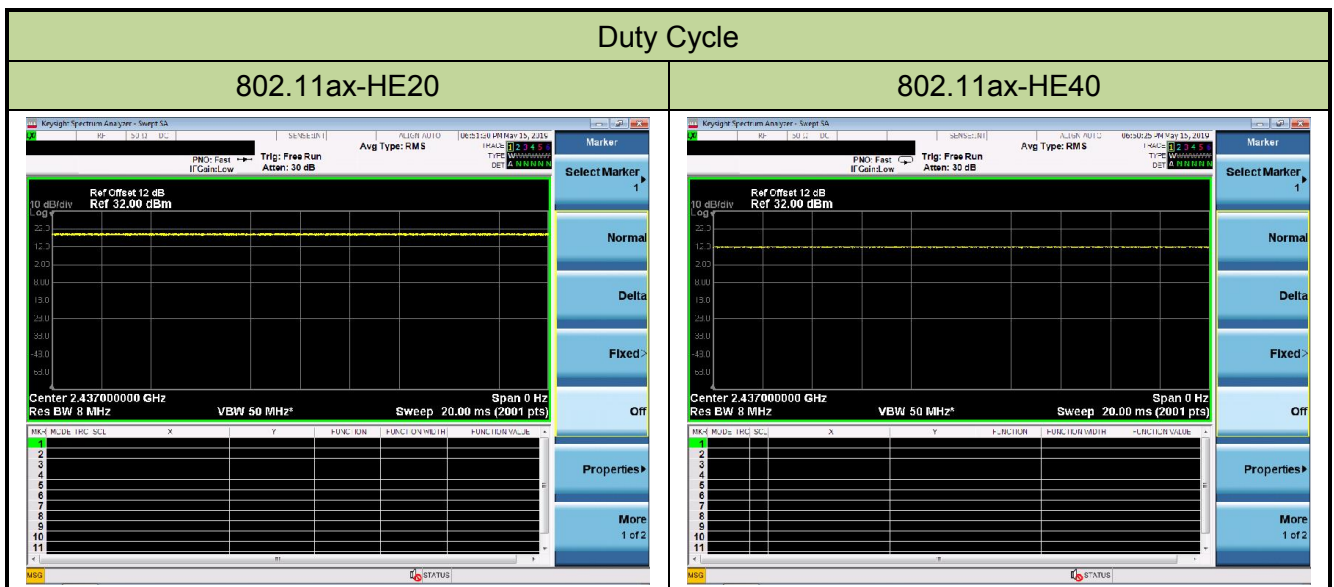

## **2.9. Test Configuration**

The device was tested per the guidance of ANSI C63.10-2013. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

## **2.10. EMI Suppression Device(s)/Modifications**

No EMI suppression device(s) were added and/or no modifications were made during testing.

## **2.11. Labeling Requirements**

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

### 3. DESCRIPTION of TEST

#### 3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance was used in the measurement.

**Deviation from measurement procedure.....None**

#### 3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

### **3.3. Radiated Emissions**

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

## 4. ANTENNA REQUIREMENTS

### **Excerpt from §15.203 of the FCC Rules/Regulations:**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

### **Conclusion:**

The unit complies with the requirement of §15.203.

## 5. TEST EQUIPMENT CALIBRATION DATE

### Conducted Emissions

| Instrument                 | Manufacturer | Type No.      | Asset No.   | Cali. Interval | Cali. Due Date |
|----------------------------|--------------|---------------|-------------|----------------|----------------|
| Two-Line V-Network         | R&S          | ENV216        | MRTTWA00019 | 1 year         | 2020/03/25     |
| Two-Line V-Network         | R&S          | ENV216        | MRTTWA00020 | 1 year         | 2020/04/25     |
| 8-Wire ISN (T8)            | R&S          | ENY81         | MRTTWA00018 | 1 year         | 2020/04/23     |
| EMI Test Receiver          | R&S          | ESR3          | MRTTWA00009 | 1 year         | 2020/03/25     |
| Temperature/Humidity Meter | TFA          | 35.1078.10.IT | MRTTWA00033 | 1 year         | 2020/05/20     |

### Radiated Emissions

| Instrument                 | Manufacturer | Type No.      | Asset No.   | Cali. Interval | Cali. Due Date |
|----------------------------|--------------|---------------|-------------|----------------|----------------|
| Active Loop Antenna        | SCHWARZBECK  | FMZB 1519B    | MRTTWA00002 | 1 year         | 2020/04/29     |
| Broadband TRILOG Antenna   | SCHWARZBECK  | VULB 9162     | MRTTWA00001 | 1 year         | 2020/05/22     |
| Broadband Hornantenna      | SCHWARZBECK  | BBHA 9120D    | MRTTWA00003 | 1 year         | 2020/04/22     |
| Breitband Hornantenna      | SCHWARZBECK  | BBHA 9170     | MRTTWA00004 | 1 year         | 2020/04/23     |
| Broadband Preamplifier     | SCHWARZBECK  | BBV 9718      | MRTTWA00005 | 1 year         | 2020/04/24     |
| Broadband Amplifier        | SCHWARZBECK  | BBV 9721      | MRTTWA00006 | 1 year         | 2020/04/24     |
| Signal Analyzer            | R&S          | FSV40         | MRTTWA00007 | 1 year         | 2020/03/26     |
| EMI Test Receiver          | R&S          | ESR3          | MRTTWA00009 | 1 year         | 2020/03/25     |
| EXA Signal Analyzer        | KEYSIGHT     | N9010A        | MRTTWA00012 | 1 year         | 2020/07/30     |
| Antenna Cable              | HUBERSUHNER  | SF106         | MRTTWE00010 | 1 year         | 2020/06/18     |
| Temperature/Humidity Meter | TFA          | 35.1078.10.IT | MRTTWA00032 | 1 year         | 2020/05/20     |

### Conducted Test Equipment

| Instrument                                 | Manufacturer | Type No.      | Asset No.   | Cali. Interval | Cali. Due Date |
|--------------------------------------------|--------------|---------------|-------------|----------------|----------------|
| X-Series USB Peak and Average Power Sensor | KEYSIGHT     | U2021XA       | MRTTWA00014 | 1 year         | 2020/04/22     |
| Wideband Radio Communication Taster        | R&S          | CMW 500       | MRTTWA00041 | 1 year         | 2020/01/28     |
| EXA Signal Analyzer                        | KEYSIGHT     | N9010A        | MRTTWA00012 | 1 year         | 2020/07/30     |
| EXA Signal Analyzer                        | KEYSIGHT     | N9010B        | MRTSUE06457 | 1 year         | 2020/07/19     |
| Signal Analyzer                            | R&S          | FSV40         | MRTTWA00007 | 1 year         | 2020/03/26     |
| Temperature/Humidity Meter                 | TFA          | 35.1078.10.IT | MRTTWA00033 | 1 year         | 2020/05/20     |

| Software | Version   | Function          |
|----------|-----------|-------------------|
| e3       | 9.160520a | EMI Test Software |

## 6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

|                                                                                                                        |
|------------------------------------------------------------------------------------------------------------------------|
| AC Conducted Emission Measurement - SR2                                                                                |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2U_c(y)$ ):<br>150kHz~30MHz: 2.53dB                        |
| Radiated Emission Measurement - AC1                                                                                    |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2U_c(y)$ ):<br>9kHz ~ 1GHz: 4.25dB<br>1GHz ~ 25GHz: 4.45dB |

## 7. TEST RESULT

### 7.1. Summary

| FCC Section(s)   | Test Description                                                              | Test Limit                                                                     | Test Condition | Test Result | Reference         |
|------------------|-------------------------------------------------------------------------------|--------------------------------------------------------------------------------|----------------|-------------|-------------------|
| 15.247(b)(3)     | Output Power                                                                  | $\leq 30\text{dBm}$                                                            | Conducted      | Pass        | Section 7.2       |
| 15.205<br>15.209 | General Field Strength Limits (Restricted Bands and Radiated Emission Limits) | Emissions in restricted bands must meet the radiated limits detailed in 15.209 | Radiated       | Pass        | Section 7.3 & 7.4 |

#### Notes:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- 3) Due to the power setting of Beam-Forming mode is less than the CDD mode, so we only verify RF output power under CDD mode and assess RF output power and Radiated Emission testing under Beam-Forming mode.

## 7.2. Output Power Measurement

### 7.2.1. Test Limit

The maximum output power shall be less 1 Watt (30dBm).

The conducted output power limit specified in paragraph FCC Part 15.247(b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs FCC Part 15.247(b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 7.2.2. Test Procedure Used


ANSI C63.10 Section 11.9.2.3.2

### 7.2.3. Test Setting

#### Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

### 7.2.4. Test Setup

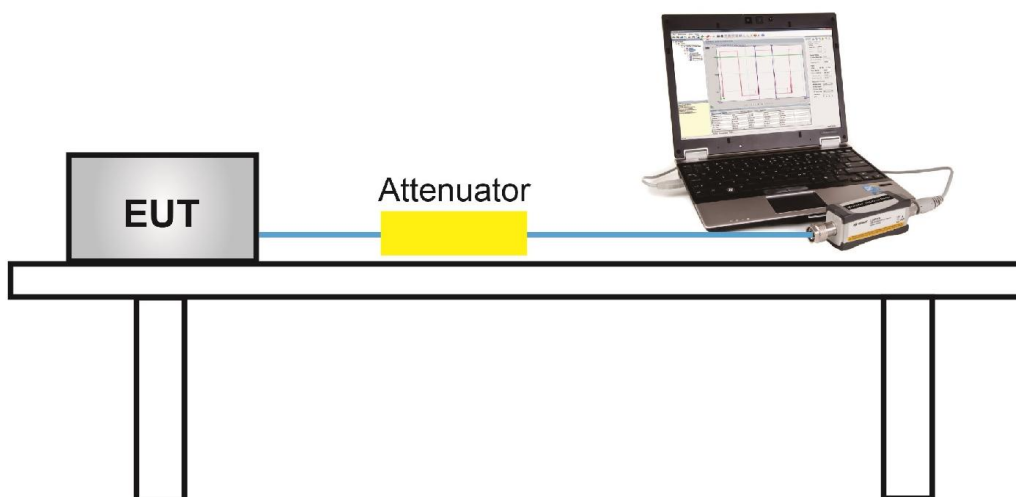

### 7.2.5.Test Result

Power output test was verified over all data rates of each mode shown as below table, and then choose the maximum power output (gray marker) for final test of each channel.

Pre-Test RF Output Power at various data rates for Ant 0.

| Ant 0 / Ant 0+1 - 802.11ax-HE20 - Channel 06 (2437MHz) |          |          |          |          |          |          |          |          |          |          |           |           |
|--------------------------------------------------------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|-----------|-----------|
| Date Rate                                              | MCS<br>0 | MCS<br>1 | MCS<br>2 | MCS<br>3 | MCS<br>4 | MCS<br>5 | MCS<br>6 | MCS<br>7 | MCS<br>8 | MCS<br>9 | MCS<br>10 | MCS<br>11 |
| Power<br>(dBm)                                         | 21.95    | 21.88    | 21.80    | 21.74    | 21.72    | 21.68    | 21.61    | 21.55    | 21.50    | 21.43    | 21.35     | 21.29     |

| Ant 0 / Ant 0+1 - 802.11ax-HE40 - Channel 06 (2437MHz) |          |          |          |          |          |          |          |          |          |          |           |           |
|--------------------------------------------------------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|-----------|-----------|
| Date Rate                                              | MCS<br>0 | MCS<br>1 | MCS<br>2 | MCS<br>3 | MCS<br>4 | MCS<br>5 | MCS<br>6 | MCS<br>7 | MCS<br>8 | MCS<br>9 | MCS<br>10 | MCS<br>11 |
| Power<br>(dBm)                                         | 18.87    | 18.85    | 18.80    | 18.76    | 18.67    | 18.62    | 18.54    | 18.47    | 18.33    | 18.32    | 18.26     | 18.21     |

Note: All modes of operation and data rates were investigated, so all RF test requirements shall be executed at low data rates.

|               |                               |                   |            |
|---------------|-------------------------------|-------------------|------------|
| Product       | AX3000 Gigabit Wi-Fi 6 Router | Temperature       | 22 ~ 25°C  |
| Test Engineer | Kevin Ker                     | Relative Humidity | 46 ~ 56%   |
| Test Site     | SR1                           | Test Date         | 2019/12/18 |

| Test Mode         | Data Rate/<br>MCS | Channel<br>No. | Freq.<br>(MHz) | Ant 0<br>Average<br>Power (dBm) | Ant 1<br>Average<br>Power (dBm) | Total<br>Average<br>Power (dBm) | Limit<br>(dBm) | Result |
|-------------------|-------------------|----------------|----------------|---------------------------------|---------------------------------|---------------------------------|----------------|--------|
| Beam-Forming Mode |                   |                |                |                                 |                                 |                                 |                |        |
| 802.11ax-HE20     | MCS0              | 01             | 2412           | 9.01                            | 8.76                            | 11.90                           | ≤ 30.00        | Pass   |
| 802.11ax-HE20     | MCS0              | 02             | 2417           | 18.06                           | 17.94                           | 21.01                           | ≤ 30.00        | Pass   |
| 802.11ax-HE20     | MCS0              | 03             | 2422           | 20.27                           | 18.41                           | 22.45                           | ≤ 30.00        | Pass   |
| 802.11ax-HE20     | MCS0              | 06             | 2437           | 21.95                           | 22.56                           | 25.28                           | ≤ 30.00        | Pass   |
| 802.11ax-HE20     | MCS0              | 09             | 2452           | 22.52                           | 21.58                           | 25.09                           | ≤ 30.00        | Pass   |
| 802.11ax-HE20     | MCS0              | 10             | 2457           | 21.06                           | 21.09                           | 24.09                           | ≤ 30.00        | Pass   |
| 802.11ax-HE20     | MCS0              | 11             | 2462           | 10.65                           | 11.00                           | 13.84                           | ≤ 30.00        | Pass   |
| 802.11ax-HE40     | MCS0              | 03             | 2422           | 16.09                           | 15.65                           | 18.89                           | ≤ 30.00        | Pass   |
| 802.11ax-HE40     | MCS0              | 04             | 2427           | 16.10                           | 15.78                           | 18.95                           | ≤ 30.00        | Pass   |
| 802.11ax-HE40     | MCS0              | 06             | 2437           | 18.87                           | 18.46                           | 21.68                           | ≤ 30.00        | Pass   |
| 802.11ax-HE40     | MCS0              | 08             | 2447           | 18.02                           | 15.73                           | 20.03                           | ≤ 30.00        | Pass   |
| 802.11ax-HE40     | MCS0              | 09             | 2452           | 17.59                           | 16.27                           | 19.99                           | ≤ 30.00        | Pass   |

Note: Total Average Power (dBm) =  $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\}$

|               |                               |                   |            |
|---------------|-------------------------------|-------------------|------------|
| Product       | AX3000 Gigabit Wi-Fi 6 Router | Temperature       | 22 ~ 25°C  |
| Test Engineer | Kevin Ker                     | Relative Humidity | 46 ~ 56%   |
| Test Site     | SR1                           | Test Date         | 2019/12/18 |

#### Verify CDD Mode Conducted Power

| Test Mode     | Data Rate/<br>MCS | Channel<br>No. | Freq.<br>(MHz) | Ant 0<br>Average<br>Power (dBm) | Ant 1<br>Average<br>Power (dBm) | Total<br>Average<br>Power (dBm) | Limit<br>(dBm) | Result |
|---------------|-------------------|----------------|----------------|---------------------------------|---------------------------------|---------------------------------|----------------|--------|
| 802.11b       | 1Mbps             | 01             | 2412           | 25.32                           | --                              | 25.32                           | ≤ 30.00        | Pass   |
| 802.11b       | 1Mbps             | 06             | 2437           | 25.00                           | --                              | 25.00                           | ≤ 30.00        | Pass   |
| 802.11b       | 1Mbps             | 11             | 2462           | 25.82                           | --                              | 25.82                           | ≤ 30.00        | Pass   |
| 802.11g       | 6Mbps             | 01             | 2412           | 20.11                           | 20.44                           | 23.29                           | ≤ 30.00        | Pass   |
| 802.11g       | 6Mbps             | 02             | 2417           | 21.38                           | 21.53                           | 24.47                           | ≤ 30.00        | Pass   |
| 802.11g       | 6Mbps             | 03             | 2422           | 23.88                           | 22.45                           | 26.23                           | ≤ 30.00        | Pass   |
| 802.11g       | 6Mbps             | 06             | 2437           | 25.42                           | 25.16                           | 28.30                           | ≤ 30.00        | Pass   |
| 802.11g       | 6Mbps             | 09             | 2452           | 23.89                           | 23.55                           | 26.73                           | ≤ 30.00        | Pass   |
| 802.11g       | 6Mbps             | 10             | 2457           | 22.07                           | 21.88                           | 24.99                           | ≤ 30.00        | Pass   |
| 802.11g       | 6Mbps             | 11             | 2462           | 20.27                           | 20.34                           | 23.32                           | ≤ 30.00        | Pass   |
| 802.11n-HT20  | MCS0              | 01             | 2412           | 20.04                           | 21.05                           | 23.58                           | ≤ 30.00        | Pass   |
| 802.11n-HT20  | MCS0              | 02             | 2417           | 21.39                           | 21.32                           | 24.37                           | ≤ 30.00        | Pass   |
| 802.11n-HT20  | MCS0              | 03             | 2422           | 22.76                           | 21.72                           | 25.28                           | ≤ 30.00        | Pass   |
| 802.11n-HT20  | MCS0              | 06             | 2437           | 25.79                           | 24.72                           | 28.30                           | ≤ 30.00        | Pass   |
| 802.11n-HT20  | MCS0              | 09             | 2452           | 24.60                           | 24.30                           | 27.46                           | ≤ 30.00        | Pass   |
| 802.11n-HT20  | MCS0              | 10             | 2457           | 22.61                           | 22.51                           | 25.57                           | ≤ 30.00        | Pass   |
| 802.11n-HT20  | MCS0              | 11             | 2462           | 19.92                           | 19.89                           | 22.92                           | ≤ 30.00        | Pass   |
| 802.11n-HT40  | MCS0              | 03             | 2422           | 16.95                           | 17.90                           | 20.46                           | ≤ 30.00        | Pass   |
| 802.11n-HT40  | MCS0              | 04             | 2427           | 19.80                           | 19.30                           | 22.57                           | ≤ 30.00        | Pass   |
| 802.11n-HT40  | MCS0              | 06             | 2437           | 18.95                           | 20.51                           | 22.81                           | ≤ 30.00        | Pass   |
| 802.11n-HT40  | MCS0              | 08             | 2447           | 21.05                           | 20.69                           | 23.88                           | ≤ 30.00        | Pass   |
| 802.11n-HT40  | MCS0              | 09             | 2452           | 18.71                           | 17.77                           | 21.28                           | ≤ 30.00        | Pass   |
| 802.11ax-HE20 | MCS0              | 01             | 2412           | 17.09                           | 16.85                           | 19.98                           | ≤ 30.00        | Pass   |
| 802.11ax-HE20 | MCS0              | 02             | 2417           | 19.88                           | 19.37                           | 22.64                           | ≤ 30.00        | Pass   |
| 802.11ax-HE20 | MCS0              | 03             | 2422           | 22.93                           | 22.87                           | 25.91                           | ≤ 30.00        | Pass   |
| 802.11ax-HE20 | MCS0              | 06             | 2437           | 25.22                           | 26.28                           | 28.79                           | ≤ 30.00        | Pass   |
| 802.11ax-HE20 | MCS0              | 09             | 2452           | 24.13                           | 23.20                           | 26.70                           | ≤ 30.00        | Pass   |
| 802.11ax-HE20 | MCS0              | 10             | 2457           | 21.64                           | 21.30                           | 24.48                           | ≤ 30.00        | Pass   |
| 802.11ax-HE20 | MCS0              | 11             | 2462           | 19.44                           | 19.69                           | 22.58                           | ≤ 30.00        | Pass   |

| Test Mode     | Data Rate/<br>MCS | Channel<br>No. | Freq.<br>(MHz) | Ant 0<br>Average<br>Power (dBm) | Ant 1<br>Average<br>Power (dBm) | Total<br>Average<br>Power (dBm) | Limit<br>(dBm) | Result |
|---------------|-------------------|----------------|----------------|---------------------------------|---------------------------------|---------------------------------|----------------|--------|
| 802.11ax-HE40 | MCS0              | 03             | 2422           | 16.93                           | 16.47                           | 19.72                           | ≤ 30.00        | Pass   |
| 802.11ax-HE40 | MCS0              | 04             | 2427           | 17.05                           | 17.63                           | 20.36                           | ≤ 30.00        | Pass   |
| 802.11ax-HE40 | MCS0              | 06             | 2437           | 19.41                           | 18.97                           | 22.21                           | ≤ 30.00        | Pass   |
| 802.11ax-HE40 | MCS0              | 08             | 2447           | 18.11                           | 18.69                           | 21.42                           | ≤ 30.00        | Pass   |
| 802.11ax-HE40 | MCS0              | 09             | 2452           | 17.14                           | 17.12                           | 20.14                           | ≤ 30.00        | Pass   |

Note: For 802.11b

Total Average Power (dBm) = Ant 0 Average Power (dBm)

For 802.11g/n-HT20/n-HT40/ax-HE20/ax-HE40

Total Average Power (dBm) =  $10 \cdot \log \{ 10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)} \}$

### 7.3. Radiated Spurious Emission Measurement

#### 7.3.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

| FCC Part 15 Subpart C Paragraph 15.209 |                          |                               |
|----------------------------------------|--------------------------|-------------------------------|
| Frequency<br>[MHz]                     | Field Strength<br>[uV/m] | Measured Distance<br>[Meters] |
| 0.009 - 0.490                          | 2400/F (kHz)             | 300                           |
| 0.490 - 1.705                          | 24000/F (kHz)            | 30                            |
| 1.705 - 30                             | 30                       | 30                            |
| 30 - 88                                | 100                      | 3                             |
| 88 - 216                               | 150                      | 3                             |
| 216 - 960                              | 200                      | 3                             |
| Above 960                              | 500                      | 3                             |

#### 7.3.2. Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

#### 7.3.3. Test Setting

**Table 1 - RBW as a function of frequency**

| Frequency     | RBW           |
|---------------|---------------|
| 9 ~ 150 kHz   | 200 ~ 300 Hz  |
| 0.15 ~ 30 MHz | 9 ~ 10 kHz    |
| 30 ~ 1000 MHz | 100 ~ 120 kHz |
| > 1000MHz     | 1MHz          |

**Quasi-Peak Measurements below 1GHz**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

**Peak Measurements above 1GHz**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

**Average Measurements above 1GHz (Method VB)**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle  $\geq 98\%$ , set VBW = 10 Hz.  
If the EUT duty cycle is  $< 98\%$ , set VBW  $\geq 1/T$ . T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

### 7.3.4.Test Setup

#### Below 1GHz Test Setup:

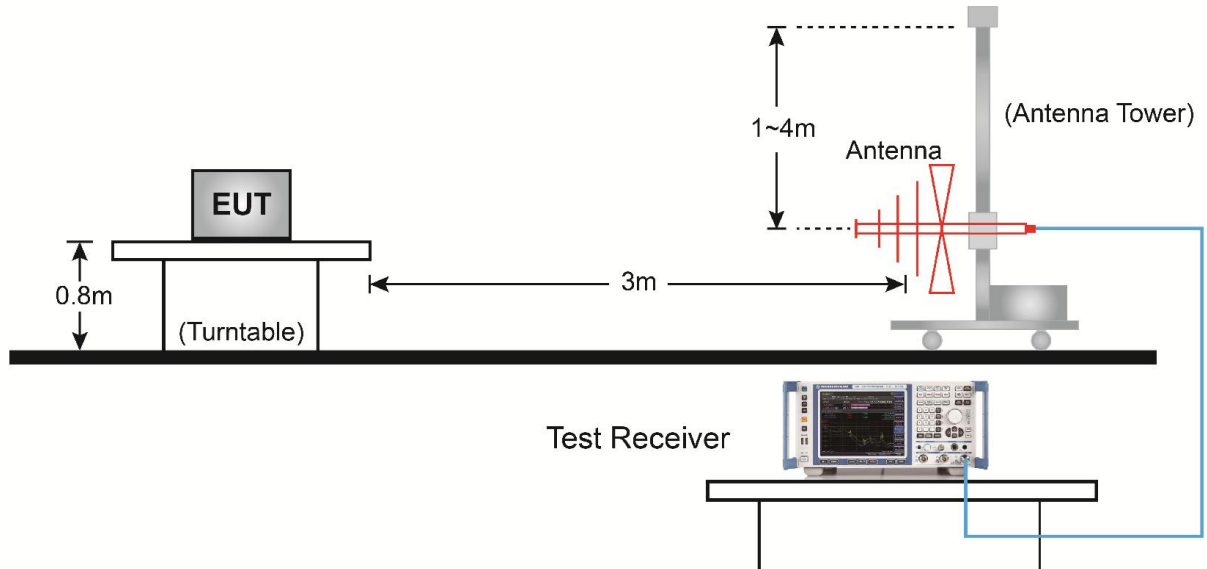

#### Above 1GHz Test Setup:

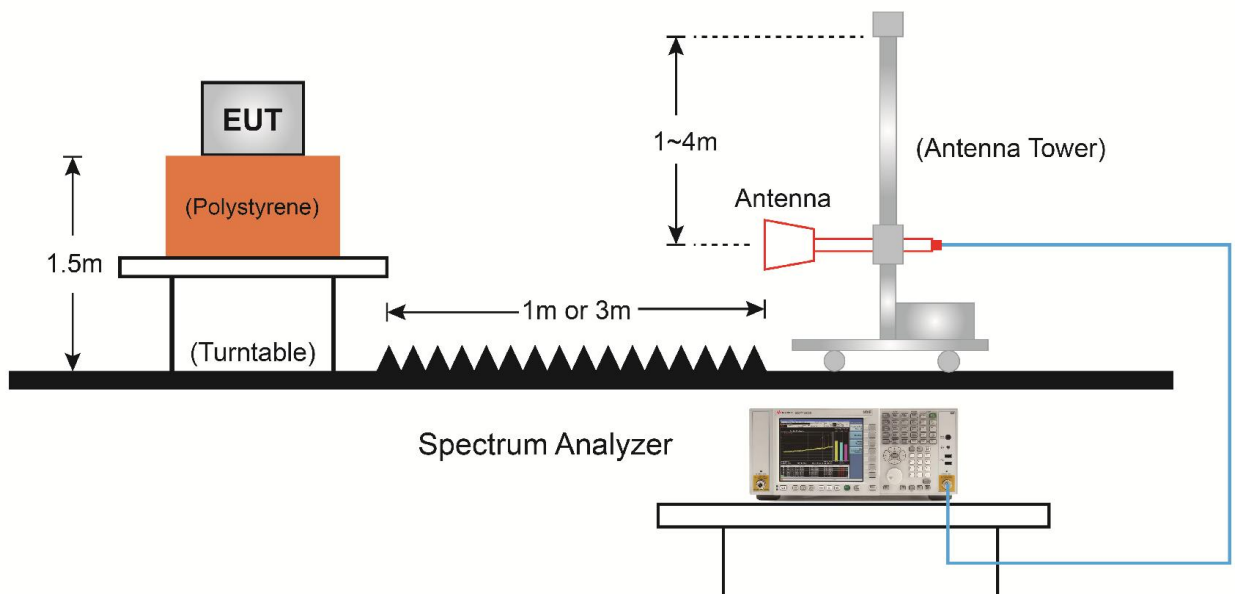

### 7.3.5. Test Result

|               |                                                                                                                                                                                   |                   |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------|
| Product       | AX3000 Gigabit Wi-Fi 6 Router                                                                                                                                                     | Temperature       | 25°C       |
| Test Engineer | Kevin Ker                                                                                                                                                                         | Relative Humidity | 52%        |
| Test Site     | AC1                                                                                                                                                                               | Test Date         | 2019/11/08 |
| Test Mode     | 802.11ax-HE20 - Ant 0+1<br>(Beam-Forming Mode)                                                                                                                                    | Test Channel      | 01         |
| Note          | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |                   |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
|      | 3839.0          | 43.5                 | -0.3        | 43.2                   | 74.0           | -30.8       | Peak     | Horizontal   |
|      | 4825.0          | 40.4                 | 3.2         | 43.6                   | 74.0           | -30.4       | Peak     | Horizontal   |
| *    | 6431.5          | 38.0                 | 7.4         | 45.4                   | 82.2           | -36.8       | Peak     | Horizontal   |
| *    | 8871.0          | 35.9                 | 13.4        | 49.3                   | 82.2           | -32.9       | Peak     | Horizontal   |
|      | 3839.0          | 45.9                 | -0.3        | 45.6                   | 74.0           | -28.4       | Peak     | Vertical     |
|      | 4825.0          | 47.5                 | 3.2         | 50.7                   | 74.0           | -23.3       | Peak     | Vertical     |
| *    | 6627.0          | 38.0                 | 8.4         | 46.4                   | 82.2           | -35.8       | Peak     | Vertical     |
| *    | 10086.5         | 35.7                 | 15.5        | 51.2                   | 82.2           | -31.0       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is 30dBc of the fundamental emission level (112.2dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|               |                                                                                                                                                                                   |                   |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------|
| Product       | AX3000 Gigabit Wi-Fi 6 Router                                                                                                                                                     | Temperature       | 25°C       |
| Test Engineer | Kevin Ker                                                                                                                                                                         | Relative Humidity | 52%        |
| Test Site     | AC1                                                                                                                                                                               | Test Date         | 2019/11/08 |
| Test Mode     | 802.11ax-HE20 - Ant 0+1<br>(Beam-Forming Mode)                                                                                                                                    | Test Channel      | 06         |
| Note          | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |                   |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
|      | 4289.5          | 40.1                 | 1.5         | 41.6                   | 74.0           | -32.4       | Peak     | Horizontal   |
|      | 4825.0          | 39.7                 | 3.2         | 42.9                   | 74.0           | -31.1       | Peak     | Horizontal   |
| *    | 6491.0          | 37.8                 | 7.7         | 45.5                   | 84.5           | -39.0       | Peak     | Horizontal   |
| *    | 8709.5          | 37.0                 | 13.0        | 50.0                   | 84.5           | -34.5       | Peak     | Horizontal   |
|      | 3839.0          | 46.0                 | -0.3        | 45.7                   | 74.0           | -28.3       | Peak     | Vertical     |
|      | 4876.0          | 44.1                 | 3.3         | 47.4                   | 74.0           | -26.6       | Peak     | Vertical     |
| *    | 5913.0          | 38.7                 | 5.5         | 44.2                   | 84.5           | -40.3       | Peak     | Vertical     |
| *    | 6763.0          | 36.4                 | 9.2         | 45.6                   | 84.5           | -38.9       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is 30dBc of the fundamental emission level (114.5dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|               |                                                                                                                                                                                   |                   |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------|
| Product       | AX3000 Gigabit Wi-Fi 6 Router                                                                                                                                                     | Temperature       | 25°C       |
| Test Engineer | Kevin Ker                                                                                                                                                                         | Relative Humidity | 52%        |
| Test Site     | AC1                                                                                                                                                                               | Test Date         | 2019/11/08 |
| Test Mode     | 802.11ax-HE20 - Ant 0+1<br>(Beam-Forming Mode)                                                                                                                                    | Test Channel      | 11         |
| Note          | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |                   |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
|      | 3839.0          | 42.6                 | -0.3        | 42.3                   | 74.0           | -31.7       | Peak     | Horizontal   |
|      | 4774.0          | 40.1                 | 3.1         | 43.2                   | 74.0           | -30.8       | Peak     | Horizontal   |
| *    | 5802.5          | 38.9                 | 5.0         | 43.9                   | 86.0           | -42.1       | Peak     | Horizontal   |
| *    | 6593.0          | 37.4                 | 8.2         | 45.6                   | 86.0           | -40.4       | Peak     | Horizontal   |
|      | 3839.0          | 46.1                 | -0.3        | 45.8                   | 74.0           | -28.2       | Peak     | Vertical     |
|      | 4927.0          | 43.9                 | 3.4         | 47.3                   | 74.0           | -26.7       | Peak     | Vertical     |
| *    | 7230.5          | 37.2                 | 11.1        | 48.3                   | 86.0           | -37.7       | Peak     | Vertical     |
| *    | 8548.0          | 37.3                 | 12.6        | 49.9                   | 86.0           | -36.1       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is 30dBc of the fundamental emission level (116.0dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|               |                                                                                                                                                                                   |                   |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------|
| Product       | AX3000 Gigabit Wi-Fi 6 Router                                                                                                                                                     | Temperature       | 25°C       |
| Test Engineer | Kevin Ker                                                                                                                                                                         | Relative Humidity | 52%        |
| Test Site     | AC1                                                                                                                                                                               | Test Date         | 2019/11/08 |
| Test Mode     | 802.11ax-HE40 - Ant 0+1<br>(Beam-Forming Mode)                                                                                                                                    | Test Channel      | 03         |
| Note          | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |                   |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
|      | 3839.0          | 41.9                 | -0.3        | 41.6                   | 74.0           | -32.4       | Peak     | Horizontal   |
|      | 4893.0          | 39.1                 | 3.3         | 42.4                   | 74.0           | -31.6       | Peak     | Horizontal   |
| *    | 6652.5          | 37.1                 | 8.6         | 45.7                   | 76.9           | -31.2       | Peak     | Horizontal   |
| *    | 8658.5          | 35.9                 | 12.9        | 48.8                   | 76.9           | -28.1       | Peak     | Horizontal   |
|      | 3839.0          | 45.4                 | -0.3        | 45.1                   | 74.0           | -28.9       | Peak     | Vertical     |
|      | 4995.0          | 39.3                 | 3.5         | 42.8                   | 74.0           | -31.2       | Peak     | Vertical     |
| *    | 6261.5          | 37.5                 | 6.8         | 44.3                   | 76.9           | -32.6       | Peak     | Vertical     |
| *    | 6567.5          | 37.7                 | 8.1         | 45.8                   | 76.9           | -31.1       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is 30dBc of the fundamental emission level (106.9dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|               |                                                                                                                                                                                   |                   |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------|
| Product       | AX3000 Gigabit Wi-Fi 6 Router                                                                                                                                                     | Temperature       | 25°C       |
| Test Engineer | Kevin Ker                                                                                                                                                                         | Relative Humidity | 52%        |
| Test Site     | AC1                                                                                                                                                                               | Test Date         | 2019/11/08 |
| Test Mode     | 802.11ax-HE40 - Ant 0+1<br>(Beam-Forming Mode)                                                                                                                                    | Test Channel      | 06         |
| Note          | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |                   |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
|      | 3839.0          | 42.4                 | -0.3        | 42.1                   | 74.0           | -31.9       | Peak     | Horizontal   |
|      | 5080.0          | 40.9                 | 3.6         | 44.5                   | 74.0           | -29.5       | Peak     | Horizontal   |
| *    | 6457.0          | 38.2                 | 7.5         | 45.7                   | 78.3           | -32.6       | Peak     | Horizontal   |
| *    | 6703.5          | 37.8                 | 8.9         | 46.7                   | 78.3           | -31.6       | Peak     | Horizontal   |
|      | 3839.0          | 44.8                 | -0.3        | 44.5                   | 74.0           | -29.5       | Peak     | Vertical     |
|      | 5054.5          | 40.1                 | 3.6         | 43.7                   | 74.0           | -30.3       | Peak     | Vertical     |
| *    | 6414.5          | 38.4                 | 7.4         | 45.8                   | 78.3           | -32.5       | Peak     | Vertical     |
| *    | 7001.0          | 36.9                 | 10.6        | 47.5                   | 78.3           | -30.8       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is 30dBc of the fundamental emission level (108.3dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|               |                                                                                                                                                                                   |                   |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------|
| Product       | AX3000 Gigabit Wi-Fi 6 Router                                                                                                                                                     | Temperature       | 25°C       |
| Test Engineer | Kevin Ker                                                                                                                                                                         | Relative Humidity | 52%        |
| Test Site     | AC1                                                                                                                                                                               | Test Date         | 2019/11/08 |
| Test Mode     | 802.11ax-HE40 - Ant 0+1<br>(Beam-Forming Mode)                                                                                                                                    | Test Channel      | 09         |
| Note          | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |                   |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
|      | 3873.0          | 41.7                 | -0.3        | 41.4                   | 74.0           | -32.6       | Peak     | Horizontal   |
|      | 4918.5          | 40.1                 | 3.4         | 43.5                   | 74.0           | -30.5       | Peak     | Horizontal   |
| *    | 6465.5          | 38.4                 | 7.6         | 46.0                   | 78.2           | -32.2       | Peak     | Horizontal   |
| *    | 7103.0          | 37.5                 | 10.8        | 48.3                   | 78.2           | -29.9       | Peak     | Horizontal   |
|      | 3839.0          | 44.9                 | -0.3        | 44.6                   | 74.0           | -29.4       | Peak     | Vertical     |
|      | 5122.5          | 40.4                 | 3.6         | 44.0                   | 74.0           | -30.0       | Peak     | Vertical     |
| *    | 6312.5          | 38.5                 | 7.0         | 45.5                   | 78.2           | -32.7       | Peak     | Vertical     |
| *    | 7179.5          | 37.4                 | 11.0        | 48.4                   | 78.2           | -29.8       | Peak     | Vertical     |


Note 1: "\*" is not in restricted band, its limit is 30dBc of the fundamental emission level (108.2dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

### The Worst Case of Radiated Emission below 1GHz:

|                                                                                    |                          |
|------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                          | Time: 2019/12/16 - 17:44 |
| Limit: FCC_Part15.209_RSE(3m)                                                      | Engineer: Kevin Ker      |
| Probe: TW VULB 9162 30MHz-8GHz_2019                                                | Polarity: Horizontal     |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                                 | Power: AC 120V/60Hz      |
| <b>Worst Case Mode: There is the worst case within frequency range 30MHz~1GHz.</b> |                          |

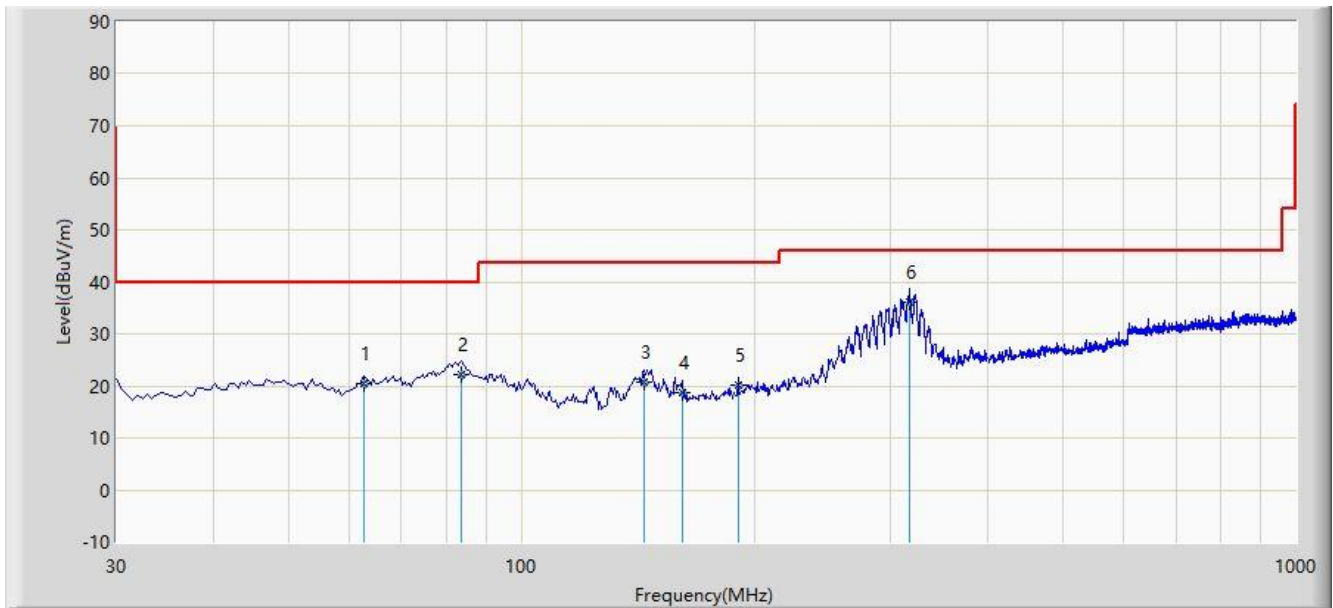


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 62.626          | 20.416                 | 1.260                | -19.584     | 40.000         | 19.156      | QP   |
| 2  |      |      | 83.626          | 22.054                 | 6.950                | -17.946     | 40.000         | 15.104      | QP   |
| 3  |      |      | 143.959         | 20.597                 | 5.030                | -22.903     | 43.500         | 15.567      | QP   |
| 4  |      |      | 161.669         | 18.778                 | 2.620                | -24.722     | 43.500         | 16.158      | QP   |
| 5  |      |      | 190.362         | 20.043                 | 1.320                | -23.457     | 43.500         | 18.723      | QP   |
| 6  |      | *    | 317.610         | 36.145                 | 14.030               | -9.855      | 46.000         | 22.115      | QP   |

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

|                                                                                    |                          |
|------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                          | Time: 2019/12/16 - 17:44 |
| Limit: FCC_Part15.209_RSE(3m)                                                      | Engineer: Kevin Ker      |
| Probe: TW VULB 9162 30MHz-8GHz_2019                                                | Polarity: Vertical       |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                                 | Power: AC 120V/60Hz      |
| <b>Worst Case Mode: There is the worst case within frequency range 30MHz~1GHz.</b> |                          |

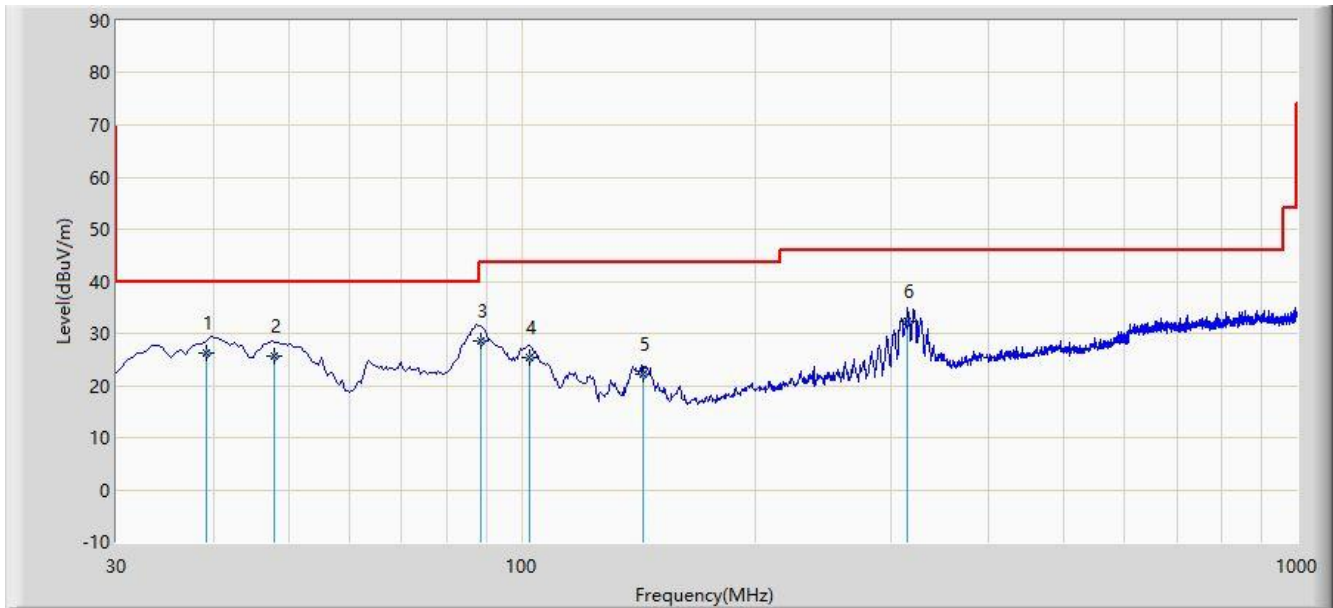

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 39.158          | 26.234                 | 5.850                | -13.766     | 40.000         | 20.385      | QP   |
| 2  |      |      | 47.946          | 25.772                 | 4.230                | -14.228     | 40.000         | 21.543      | QP   |
| 3  |      |      | 88.656          | 28.682                 | 12.090               | -14.818     | 43.500         | 16.592      | QP   |
| 4  |      |      | 102.265         | 25.331                 | 5.890                | -18.169     | 43.500         | 19.441      | QP   |
| 5  |      |      | 143.624         | 22.145                 | 6.590                | -21.355     | 43.500         | 15.555      | QP   |
| 6  |      | *    | 314.626         | 32.254                 | 10.260               | -13.746     | 46.000         | 21.994      | QP   |

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

## 7.4. Radiated Restricted Band Edge Measurement

### 7.4.1. Test Limit

#### For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

| Frequency<br>(MHz)         | Frequency<br>(MHz)    | Frequency<br>(MHz) | Frequency<br>(GHz) |
|----------------------------|-----------------------|--------------------|--------------------|
| 0.090 - 0.110              | 16.42 - 16.423        | 399.9 - 410        | 4.5 - 5.15         |
| <sup>1</sup> 0.495 - 0.505 | 16.69475 - 16.69525   | 608 - 614          | 5.35 - 5.46        |
| 2.1735 - 2.1905            | 16.80425 - 16.80475   | 960 - 1240         | 7.25 - 7.75        |
| 4.125 - 4.128              | 25.5 - 25.67          | 1300 - 1427        | 8.025 - 8.5        |
| 4.17725 - 4.17775          | 37.5 - 38.25          | 1435 - 1626.5      | 9.0 - 9.2          |
| 4.20725 - 4.20775          | 73 - 74.6             | 1645.5 - 1646.5    | 9.3 - 9.5          |
| 6.215 - 6.218              | 74.8 - 75.2           | 1660 - 1710        | 10.6 - 12.7        |
| 6.26775 - 6.26825          | 108 - 121.94          | 1718.8 - 1722.2    | 13.25 - 13.4       |
| 6.31175 - 6.31225          | 123 - 138             | 2200 - 2300        | 14.47 - 14.5       |
| 8.291 - 8.294              | 149.9 - 150.05        | 2310 - 2390        | 15.35 - 16.2       |
| 8.362 - 8.366              | 156.52475 - 156.52525 | 2483.5 - 2500      | 17.7 - 21.4        |
| 8.37625 - 8.38675          | 156.7 - 156.9         | 2690 - 2900        | 22.01 - 23.12      |
| 8.41425 - 8.41475          | 162.0125 - 167.17     | 3260 - 3267        | 23.6 - 24.0        |
| 12.29 - 12.293             | 167.72 - 173.2        | 3332 - 3339        | 31.2 - 31.8        |
| 12.51975 - 12.52025        | 240 - 285             | 3345.8 - 3358      | 36.43 - 36.5       |
| 12.57675 - 12.57725        | 322 - 335.4           | 3600 - 4400        | ( <sup>2</sup> )   |
| 13.36 - 13.41              | --                    | --                 | --                 |

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

| FCC Part 15 Subpart C Paragraph 15.209 Limits |                          |                               |
|-----------------------------------------------|--------------------------|-------------------------------|
| Frequency<br>[MHz]                            | Field Strength<br>[uV/m] | Measured Distance<br>[Meters] |
| 0.009 - 0.490                                 | 2400/F (kHz)             | 300                           |
| 0.490 - 1.705                                 | 24000/F (kHz)            | 30                            |
| 1.705 - 30                                    | 30                       | 30                            |
| 30 - 88                                       | 100                      | 3                             |
| 88 - 216                                      | 150                      | 3                             |
| 216 - 960                                     | 200                      | 3                             |
| Above 960                                     | 500                      | 3                             |

#### 7.4.2.Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

#### 7.4.3.Test Setting


##### Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

### **Average Measurements above 1GHz (Method VB)**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle  $\geq 98\%$ , set VBW = 10 Hz.  
If the EUT duty cycle is  $< 98\%$ , set VBW  $\geq 1/T$ . T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

#### **7.4.4.Test Setup**

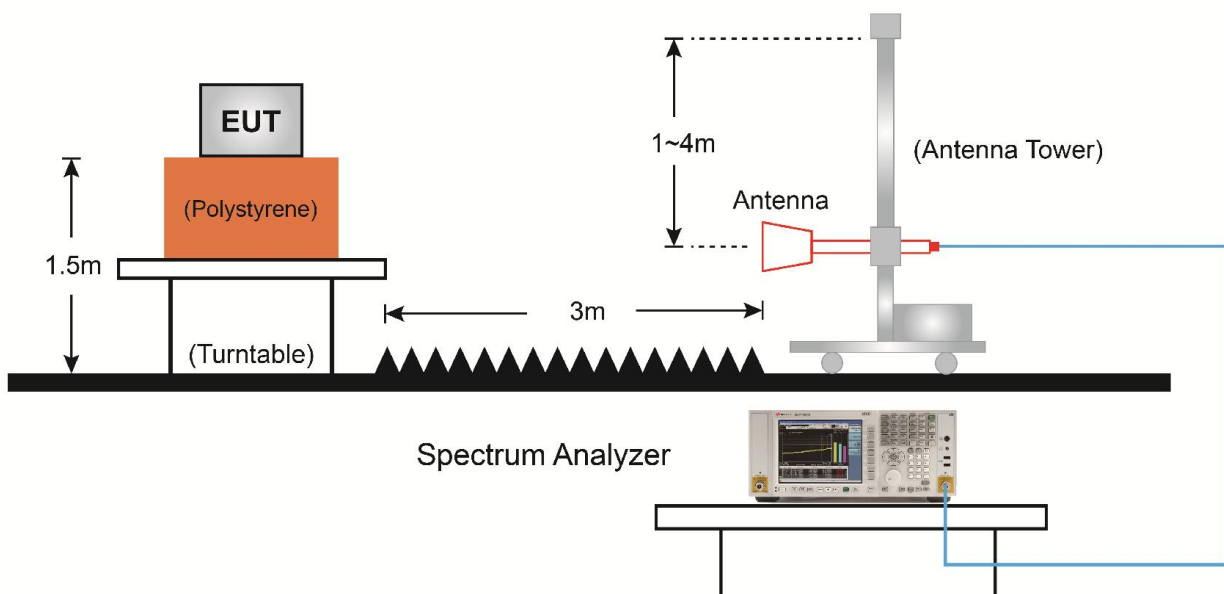

### 7.4.5. Test Result

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2019/11/08 - 19:18 |
| Limit: FCC_Part15.209_RSE(3m)                                               | Engineer: Kevin Ker      |
| Probe: TW BBHA 9120D_1-18GHz_2019                                           | Polarity: Horizontal     |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 2412MHz (Beam-Forming Mode) |                          |

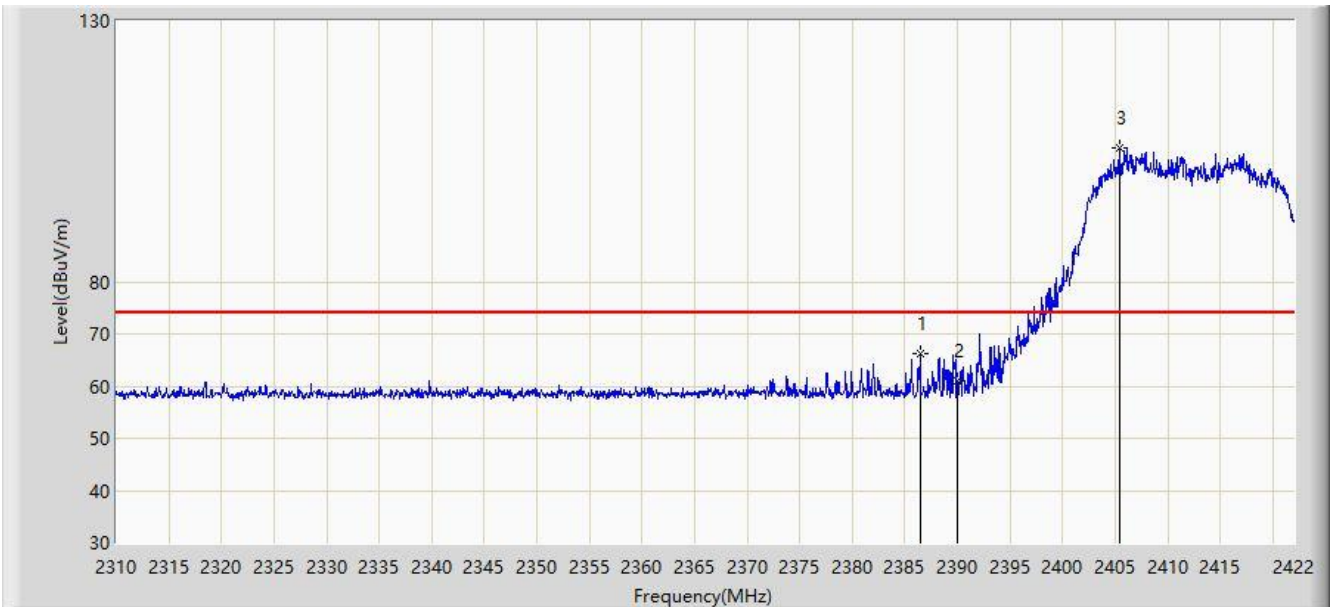


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2386.440        | 66.161                 | 33.903               | -7.839      | 74.000         | 32.258      | PK   |
| 2  |      |      | 2390.000        | 60.947                 | 28.673               | -13.053     | 74.000         | 32.274      | PK   |
| 3  |      | *    | 2405.424        | 105.539                | 73.194               | N/A         | N/A            | 32.344      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2019/11/08 - 19:18 |
| Limit: FCC_Part15.209_RSE(3m)                                               | Engineer: Kevin Ker      |
| Probe: TW BBHA 9120D_1-18GHz_2019                                           | Polarity: Horizontal     |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 2412MHz (Beam-Forming Mode) |                          |

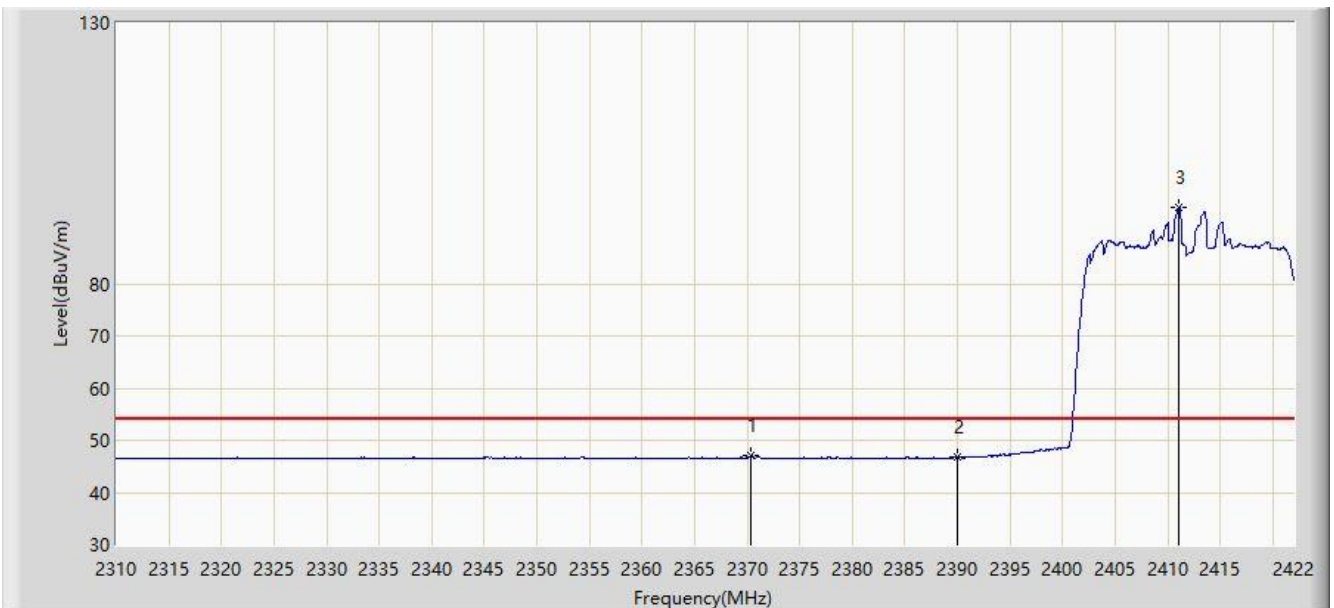


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2370.368        | 46.960                 | 14.776               | -7.040      | 54.000         | 32.183      | AV   |
| 2  |      |      | 2390.000        | 46.799                 | 14.525               | -7.201      | 54.000         | 32.274      | AV   |
| 3  |      | *    | 2411.080        | 94.597                 | 62.227               | N/A         | N/A            | 32.370      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2019/11/08 - 19:18 |
| Limit: FCC_Part15.209_RSE(3m)                                               | Engineer: Kevin Ker      |
| Probe: TW BBHA 9120D_1-18GHz_2019                                           | Polarity: Vertical       |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 2412MHz (Beam-Forming Mode) |                          |

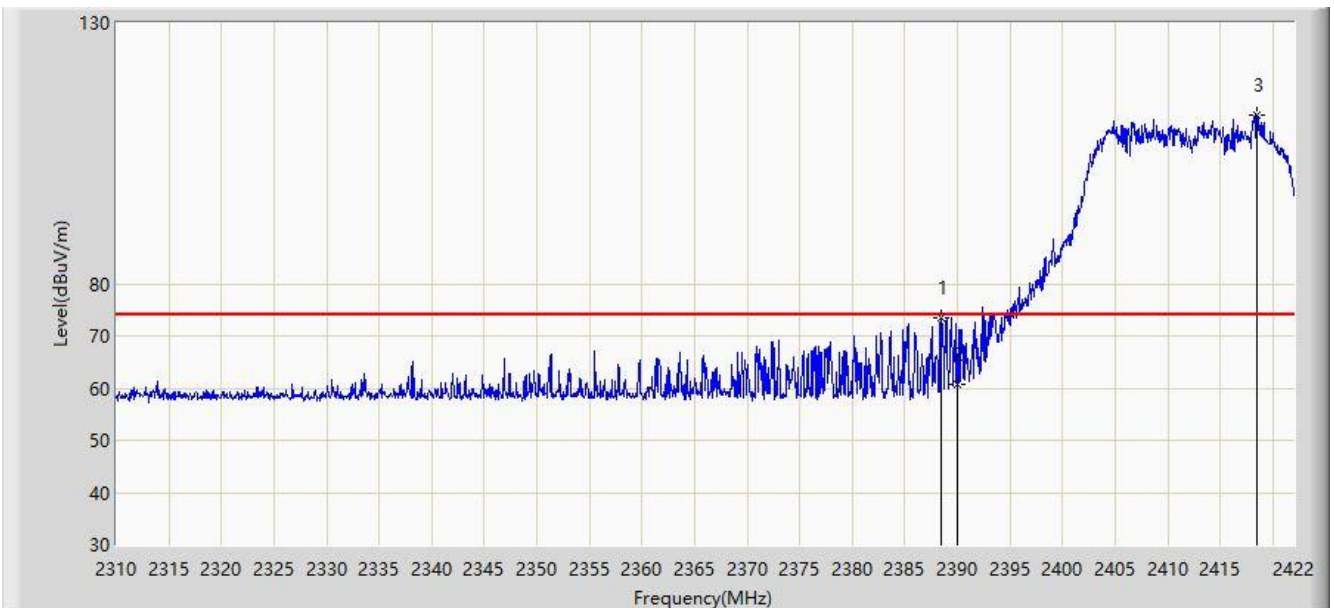


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2388.400        | 73.571                 | 41.304               | -0.429      | 74.000         | 32.267      | PK   |
| 2  |      |      | 2390.000        | 60.589                 | 28.315               | -13.411     | 74.000         | 32.274      | PK   |
| 3  |      | *    | 2418.528        | 112.225                | 79.820               | N/A         | N/A            | 32.405      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2019/11/08 - 19:18 |
| Limit: FCC_Part15.209_RSE(3m)                                               | Engineer: Kevin Ker      |
| Probe: TW BBHA 9120D_1-18GHz_2019                                           | Polarity: Vertical       |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 2412MHz (Beam-Forming Mode) |                          |

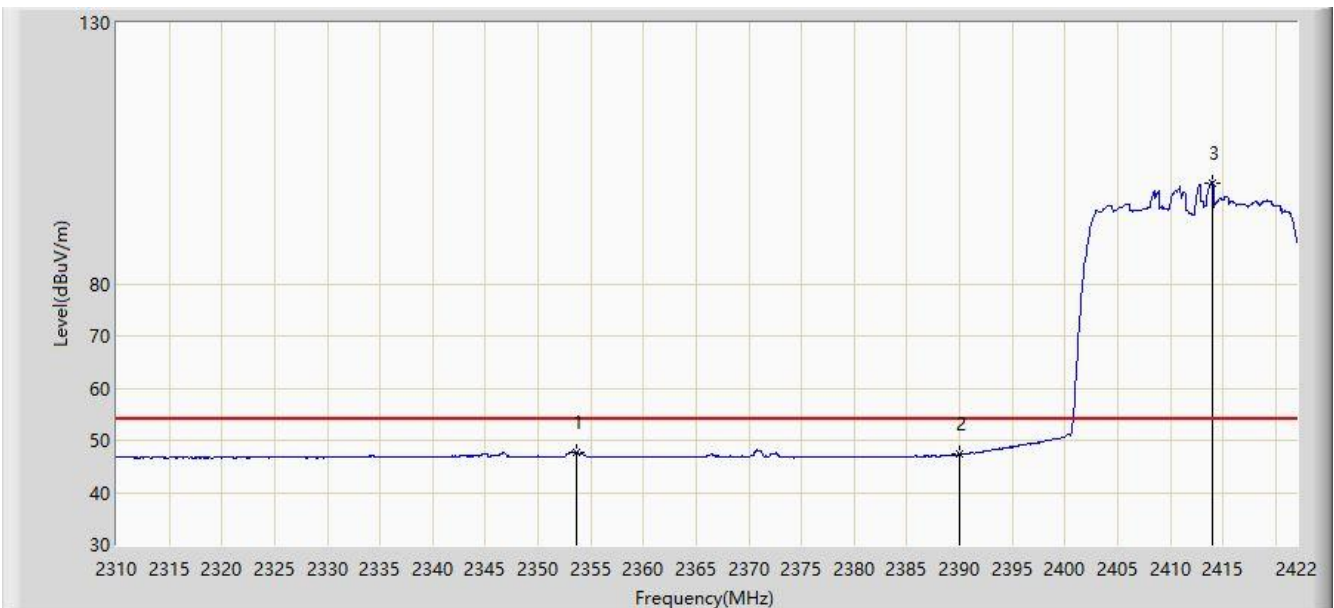


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2353.680        | 47.792                 | 15.685               | -6.208      | 54.000         | 32.107      | AV   |
| 2  |      |      | 2390.000        | 47.368                 | 15.094               | -6.632      | 54.000         | 32.274      | AV   |
| 3  |      | *    | 2413.992        | 99.411                 | 67.027               | N/A         | N/A            | 32.383      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2019/11/09 - 13:22 |
| Limit: FCC_Part15.209_RSE(3m)                                               | Engineer: Kevin Ker      |
| Probe: TW BBHA 9120D_1-18GHz_2019                                           | Polarity: Horizontal     |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 2417MHz (Beam-Forming Mode) |                          |

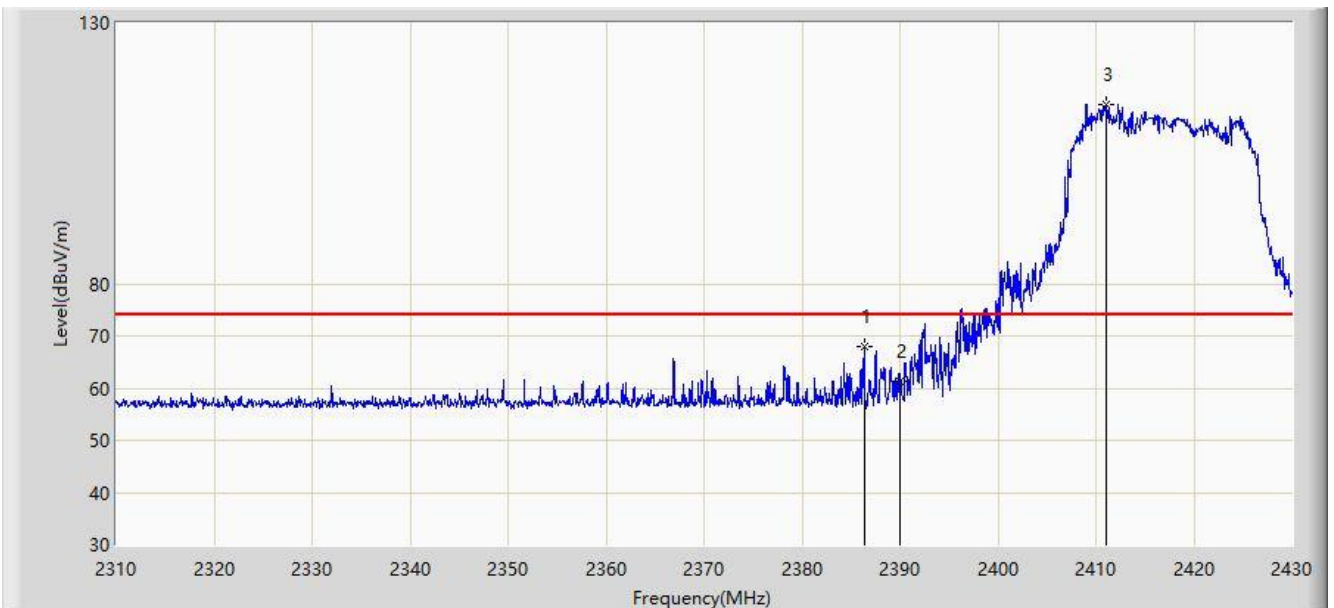


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2386.320        | 67.961                 | 35.704               | -6.039      | 74.000         | 32.258      | PK   |
| 2  |      |      | 2390.000        | 61.247                 | 28.973               | -12.753     | 74.000         | 32.274      | PK   |
| 3  |      | *    | 2410.980        | 114.294                | 81.924               | N/A         | N/A            | 32.370      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2019/11/09 - 13:23 |
| Limit: FCC_Part15.209_RSE(3m)                                               | Engineer: Kevin Ker      |
| Probe: TW BBHA 9120D_1-18GHz_2019                                           | Polarity: Horizontal     |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 2417MHz (Beam-Forming Mode) |                          |

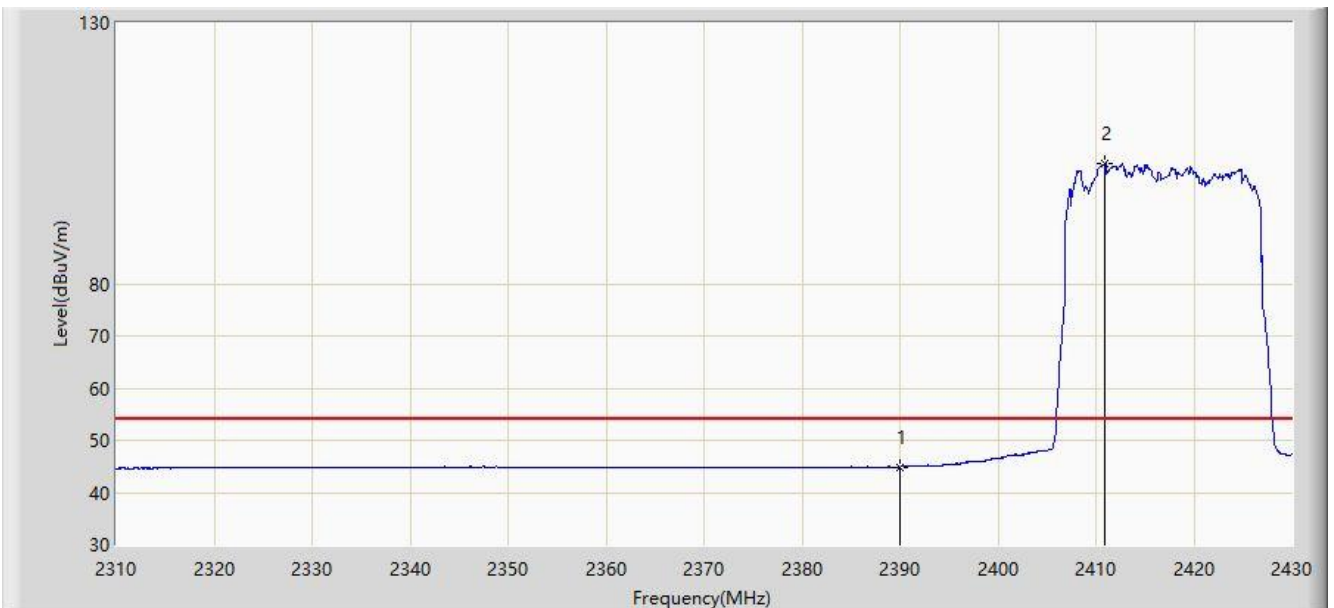


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 44.911                 | 12.637               | -9.089      | 54.000         | 32.274      | AV   |
| 2  |      | *    | 2410.920        | 102.923                | 70.554               | N/A         | N/A            | 32.370      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2019/11/09 - 13:25 |
| Limit: FCC_Part15.209_RSE(3m)                                               | Engineer: Kevin Ker      |
| Probe: TW BBHA 9120D_1-18GHz_2019                                           | Polarity: Vertical       |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 2417MHz (Beam-Forming Mode) |                          |

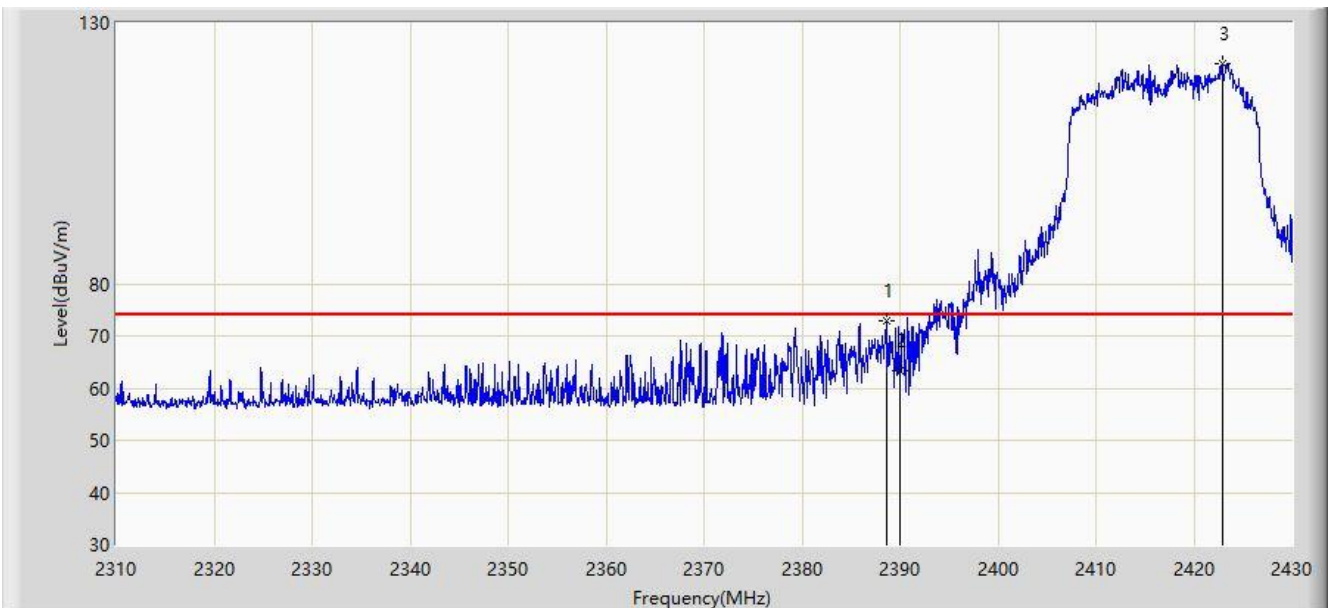


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2388.600        | 72.962                 | 40.694               | -1.038      | 74.000         | 32.268      | PK   |
| 2  |      |      | 2390.000        | 63.412                 | 31.138               | -10.588     | 74.000         | 32.274      | PK   |
| 3  |      | *    | 2422.860        | 122.117                | 89.692               | N/A         | N/A            | 32.424      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2019/11/09 - 13:27 |
| Limit: FCC_Part15.209_RSE(3m)                                               | Engineer: Kevin Ker      |
| Probe: TW BBHA 9120D_1-18GHz_2019                                           | Polarity: Vertical       |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 2417MHz (Beam-Forming Mode) |                          |

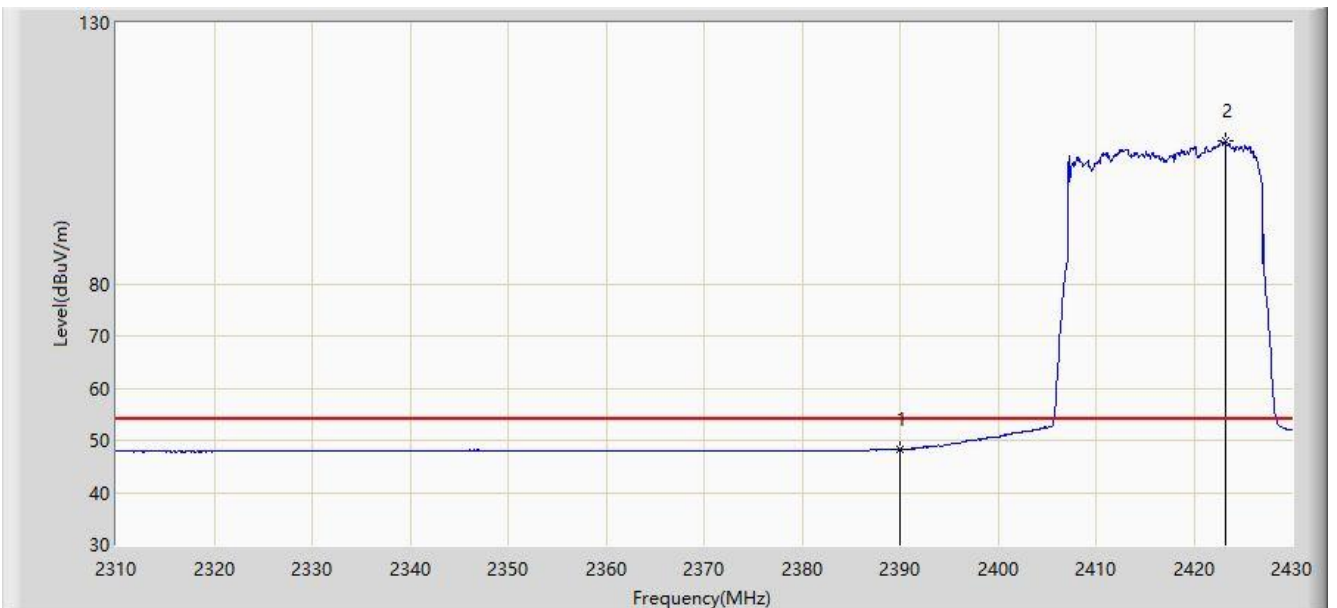


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 48.226                 | 15.952               | -5.774      | 54.000         | 32.274      | AV   |
| 2  |      | *    | 2423.220        | 107.286                | 74.860               | N/A         | N/A            | 32.427      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2019/11/09 - 13:29 |
| Limit: FCC_Part15.209_RSE(3m)                                               | Engineer: Kevin Ker      |
| Probe: TW BBHA 9120D_1-18GHz_2019                                           | Polarity: Horizontal     |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 2422MHz (Beam-Forming Mode) |                          |

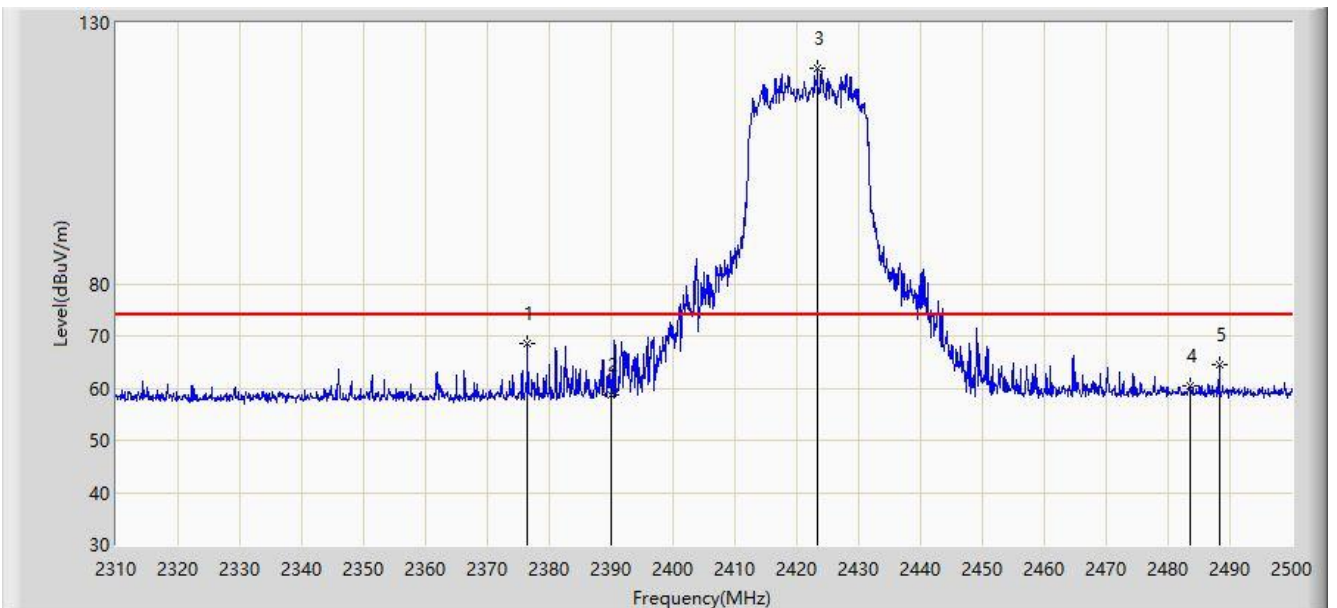


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2376.405        | 68.415                 | 36.204               | -5.585      | 74.000         | 32.211      | PK   |
| 2  |      |      | 2390.000        | 58.661                 | 26.387               | -15.339     | 74.000         | 32.274      | PK   |
| 3  |      | *    | 2423.335        | 121.223                | 88.796               | N/A         | N/A            | 32.427      | PK   |
| 4  |      |      | 2483.500        | 60.293                 | 27.589               | -13.707     | 74.000         | 32.704      | PK   |
| 5  |      |      | 2488.220        | 64.590                 | 31.864               | -9.410      | 74.000         | 32.726      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2019/11/09 - 13:31 |
| Limit: FCC_Part15.209_RSE(3m)                                               | Engineer: Kevin Ker      |
| Probe: TW BBHA 9120D_1-18GHz_2019                                           | Polarity: Horizontal     |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 2422MHz (Beam-Forming Mode) |                          |

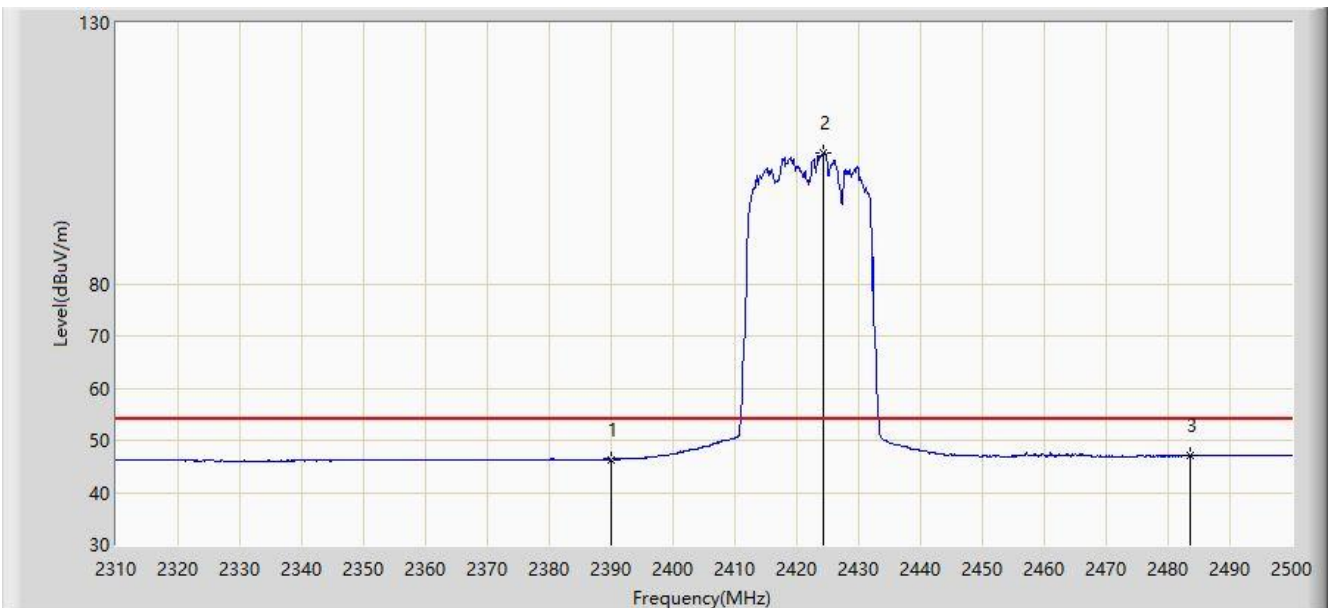


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 46.373                 | 14.099               | -7.627      | 54.000         | 32.274      | AV   |
| 2  |      | *    | 2424.380        | 105.028                | 72.596               | N/A         | N/A            | 32.432      | AV   |
| 3  |      |      | 2483.500        | 46.997                 | 14.293               | -7.003      | 54.000         | 32.704      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2019/11/09 - 13:33 |
| Limit: FCC_Part15.209_RSE(3m)                                               | Engineer: Kevin Ker      |
| Probe: TW BBHA 9120D_1-18GHz_2019                                           | Polarity: Vertical       |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 2422MHz (Beam-Forming Mode) |                          |

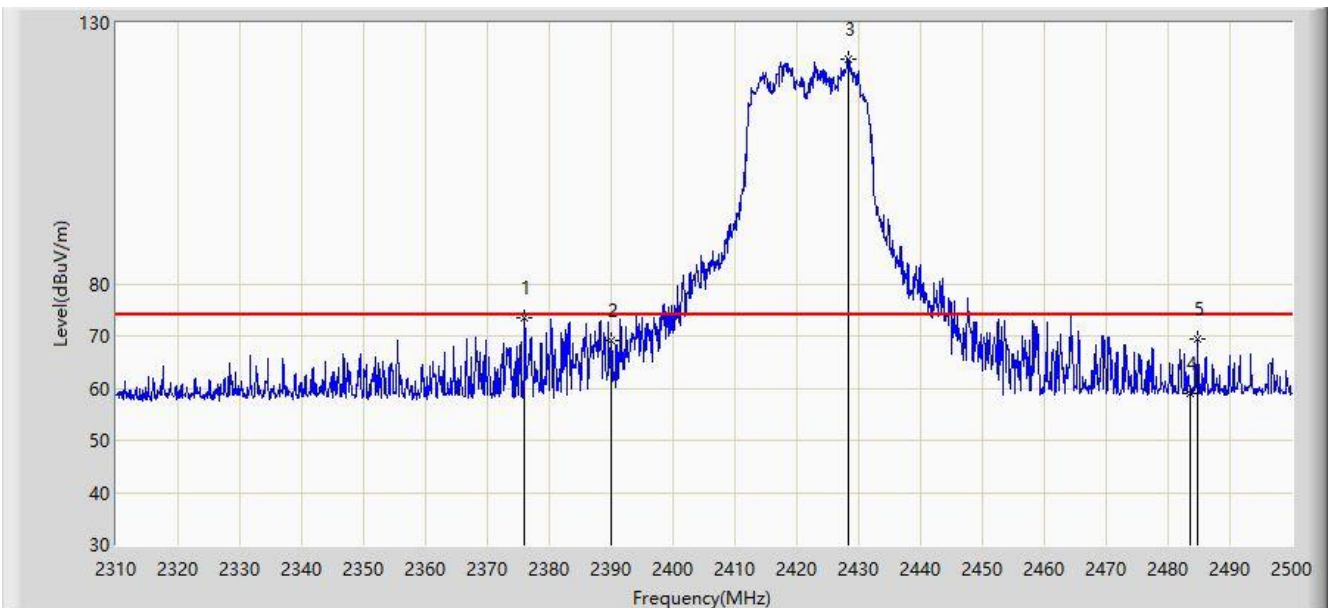


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2376.025        | 73.438                 | 41.228               | -0.562      | 74.000         | 32.210      | PK   |
| 2  |      |      | 2390.000        | 69.015                 | 36.741               | -4.985      | 74.000         | 32.274      | PK   |
| 3  |      | *    | 2428.275        | 123.133                | 90.683               | N/A         | N/A            | 32.450      | PK   |
| 4  |      |      | 2483.500        | 59.124                 | 26.420               | -14.876     | 74.000         | 32.704      | PK   |
| 5  |      |      | 2484.800        | 69.300                 | 36.590               | -4.700      | 74.000         | 32.710      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2019/11/09 - 13:40 |
| Limit: FCC_Part15.209_RSE(3m)                                               | Engineer: Kevin Ker      |
| Probe: TW BBHA 9120D_1-18GHz_2019                                           | Polarity: Vertical       |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 2422MHz (Beam-Forming Mode) |                          |

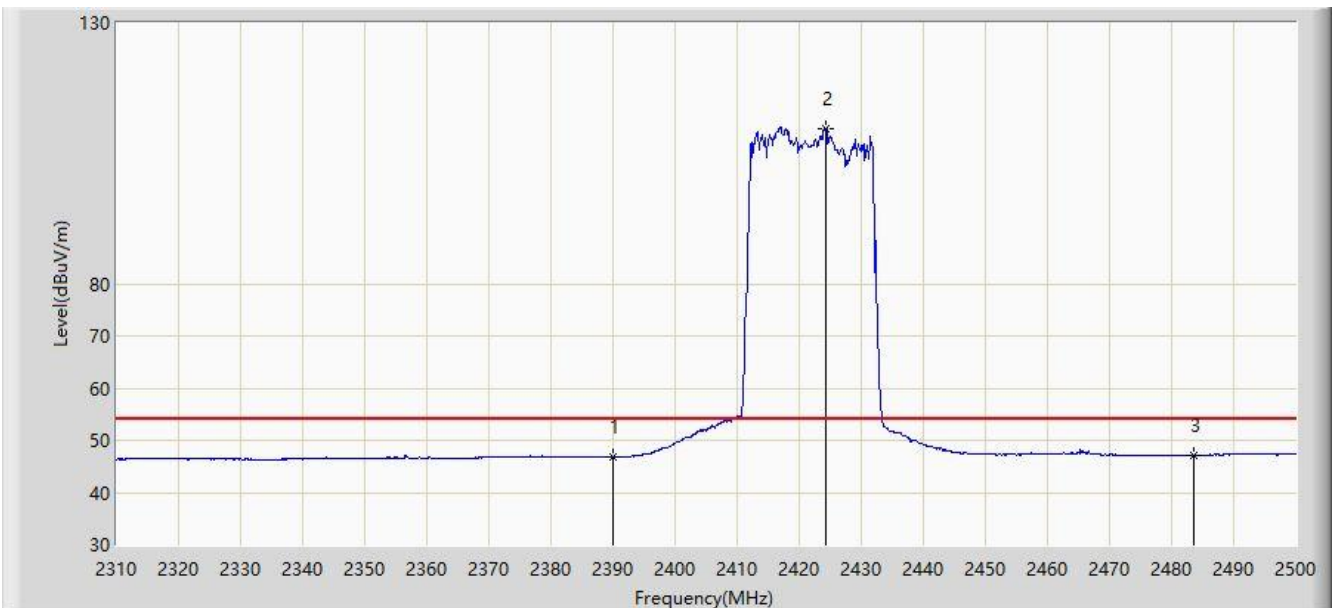


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 46.760                 | 14.486               | -7.240      | 54.000         | 32.274      | AV   |
| 2  | X    | *    | 2424.285        | 109.759                | 77.328               | N/A         | N/A            | 32.431      | AV   |
| 3  |      |      | 2483.500        | 47.193                 | 14.489               | -6.807      | 54.000         | 32.704      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2019/11/09 - 13:42 |
| Limit: FCC_Part15.209_RSE(3m)                                               | Engineer: Kevin Ker      |
| Probe: TW BBHA 9120D_1-18GHz_2019                                           | Polarity: Horizontal     |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 2437MHz (Beam-Forming Mode) |                          |

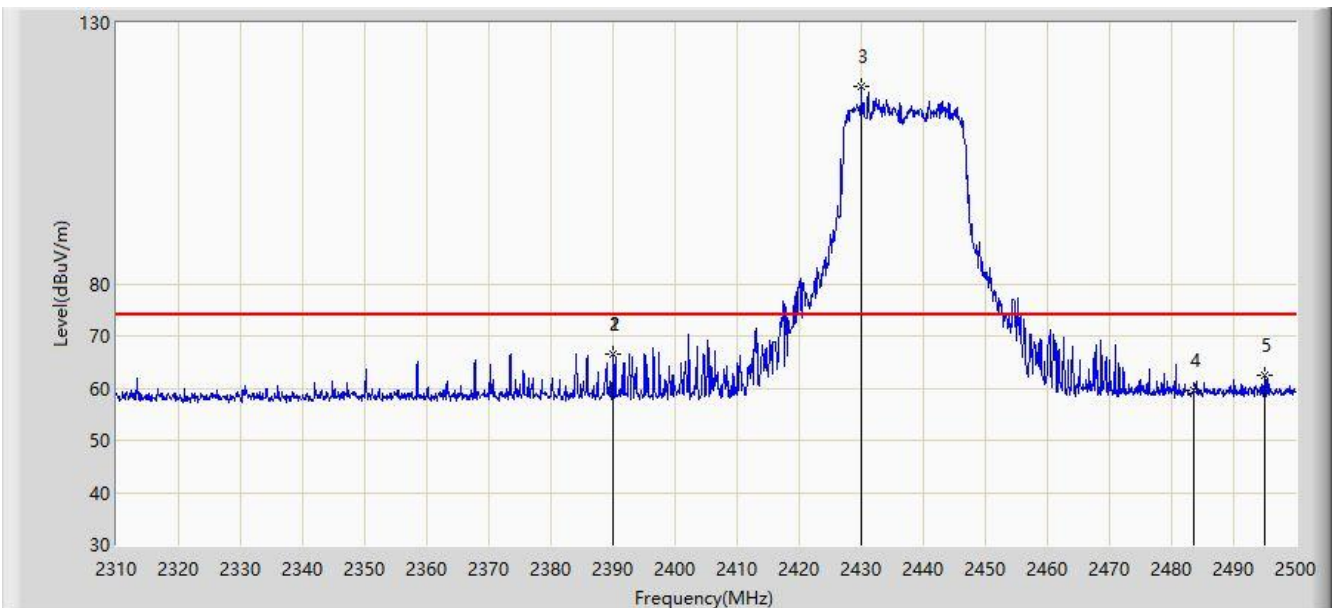


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2389.990        | 66.584                 | 34.310               | -7.416      | 74.000         | 32.274      | PK   |
| 2  |      |      | 2390.000        | 66.575                 | 34.301               | -7.425      | 74.000         | 32.274      | PK   |
| 3  |      | *    | 2429.985        | 117.845                | 85.387               | N/A         | N/A            | 32.458      | PK   |
| 4  |      |      | 2483.500        | 59.508                 | 26.804               | -14.492     | 74.000         | 32.704      | PK   |
| 5  |      |      | 2494.965        | 62.370                 | 29.614               | -11.630     | 74.000         | 32.757      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2019/11/09 - 13:43 |
| Limit: FCC_Part15.209_RSE(3m)                                               | Engineer: Kevin Ker      |
| Probe: TW BBHA 9120D_1-18GHz_2019                                           | Polarity: Horizontal     |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 2437MHz (Beam-Forming Mode) |                          |

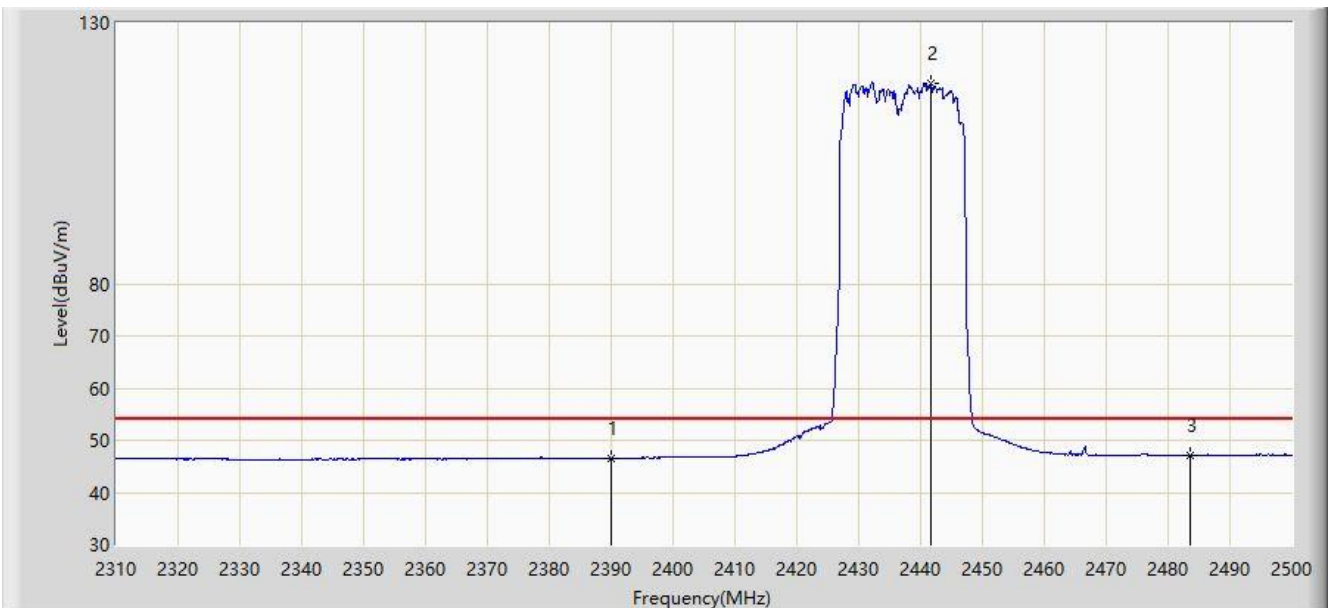


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 46.553                 | 14.279               | -7.447      | 54.000         | 32.274      | AV   |
| 2  | X    | *    | 2441.670        | 118.376                | 85.864               | N/A         | N/A            | 32.512      | AV   |
| 3  |      |      | 2483.500        | 47.162                 | 14.458               | -6.838      | 54.000         | 32.704      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2019/11/09 - 13:59 |
| Limit: FCC_Part15.209_RSE(3m)                                               | Engineer: Kevin Ker      |
| Probe: TW BBHA 9120D_1-18GHz_2019                                           | Polarity: Vertical       |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 2437MHz (Beam-Forming Mode) |                          |

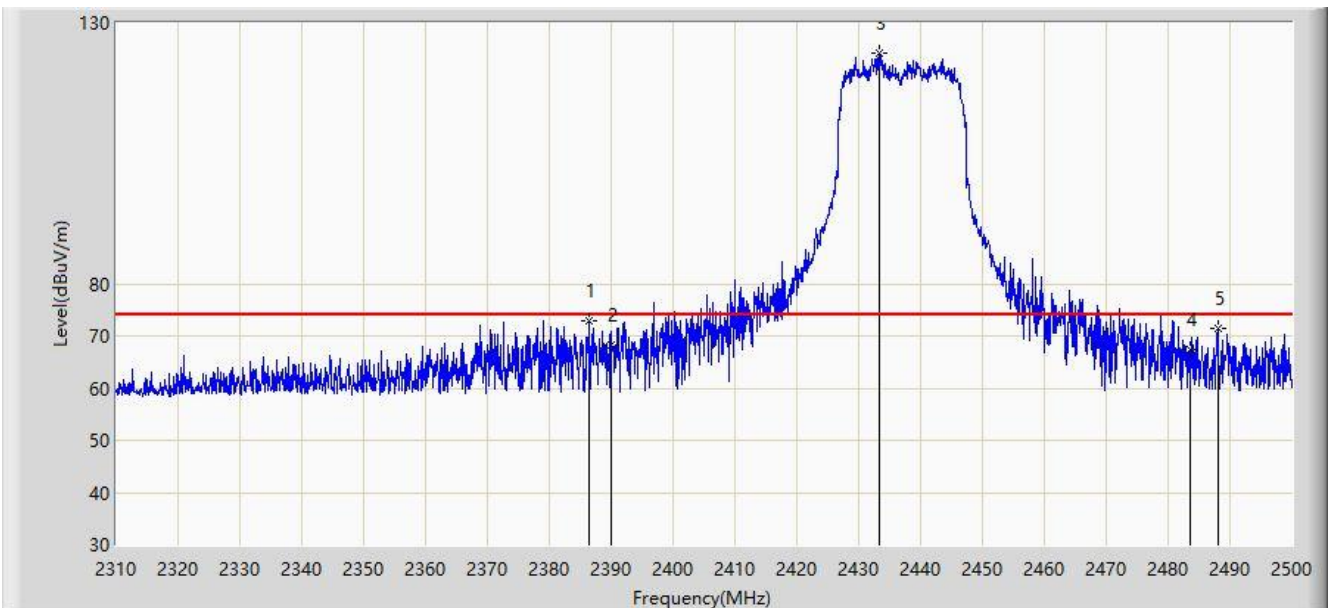


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2386.380        | 72.765                 | 40.507               | -1.235      | 74.000         | 32.258      | PK   |
| 2  |      |      | 2390.000        | 68.158                 | 35.884               | -5.842      | 74.000         | 32.274      | PK   |
| 3  |      | *    | 2433.310        | 124.101                | 91.628               | N/A         | N/A            | 32.473      | PK   |
| 4  |      |      | 2483.500        | 67.299                 | 34.595               | -6.701      | 74.000         | 32.704      | PK   |
| 5  |      |      | 2488.030        | 71.526                 | 38.801               | -2.474      | 74.000         | 32.725      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2019/11/09 - 14:04 |
| Limit: FCC_Part15.209_RSE(3m)                                               | Engineer: Kevin Ker      |
| Probe: TW BBHA 9120D_1-18GHz_2019                                           | Polarity: Vertical       |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 2437MHz (Beam-Forming Mode) |                          |

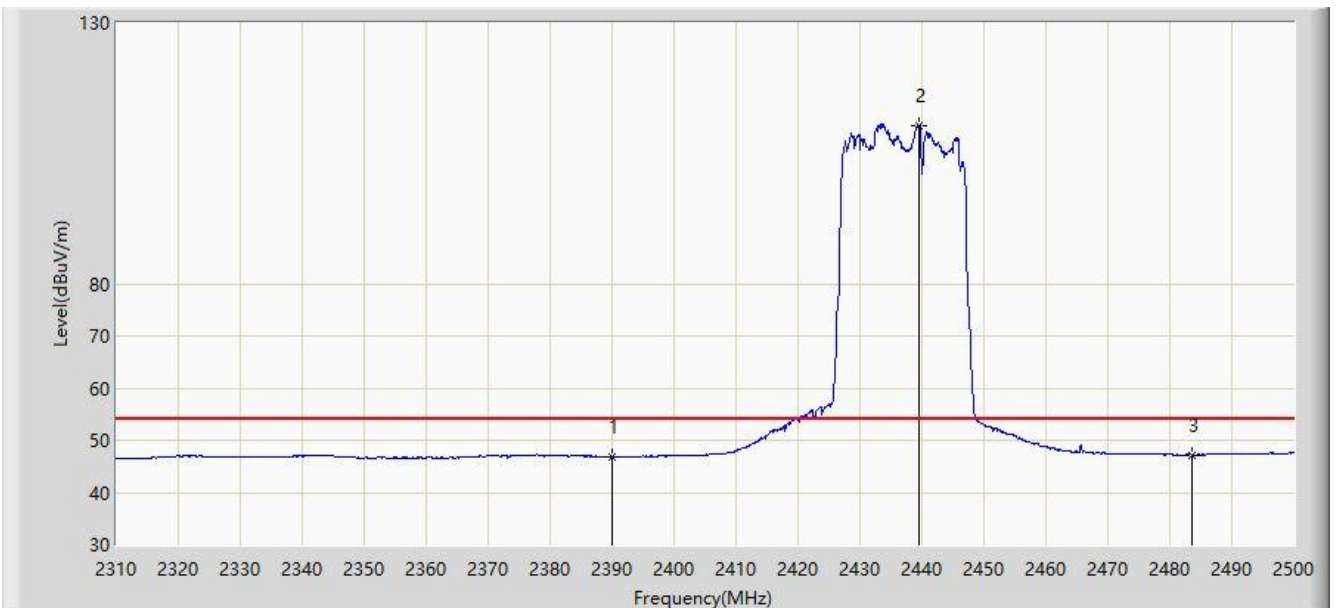


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 46.859                 | 14.585               | -7.141      | 54.000         | 32.274      | AV   |
| 2  | X    | *    | 2439.485        | 110.377                | 77.875               | N/A         | N/A            | 32.502      | AV   |
| 3  |      |      | 2483.500        | 47.225                 | 14.521               | -6.775      | 54.000         | 32.704      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2019/11/09 - 14:06 |
| Limit: FCC_Part15.209_RSE(3m)                                               | Engineer: Kevin Ker      |
| Probe: TW BBHA 9120D_1-18GHz_2019                                           | Polarity: Horizontal     |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 2452MHz (Beam-Forming Mode) |                          |

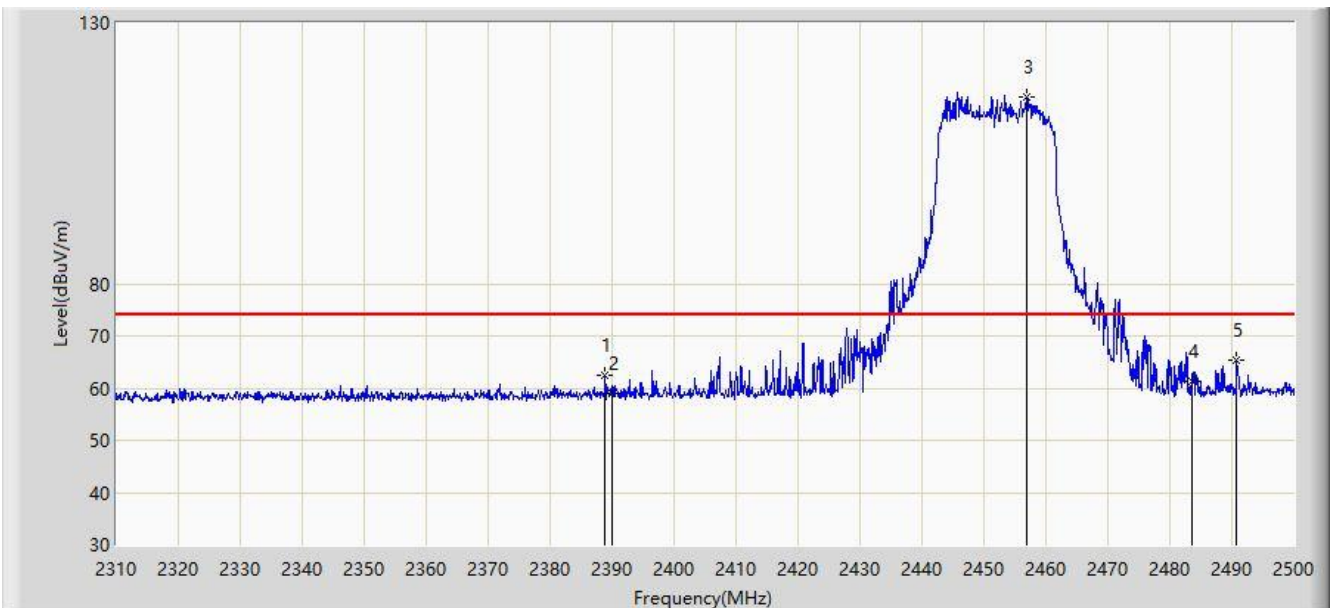


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2388.850        | 62.404                 | 30.135               | -11.596     | 74.000         | 32.269      | PK   |
| 2  |      |      | 2390.000        | 58.959                 | 26.685               | -15.041     | 74.000         | 32.274      | PK   |
| 3  |      | *    | 2456.965        | 115.917                | 83.335               | N/A         | N/A            | 32.582      | PK   |
| 4  |      |      | 2483.500        | 61.245                 | 28.541               | -12.755     | 74.000         | 32.704      | PK   |
| 5  |      |      | 2490.785        | 65.473                 | 32.736               | -8.527      | 74.000         | 32.738      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2019/11/09 - 14:06 |
| Limit: FCC_Part15.209_RSE(3m)                                               | Engineer: Kevin Ker      |
| Probe: TW BBHA 9120D_1-18GHz_2019                                           | Polarity: Horizontal     |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 2452MHz (Beam-Forming Mode) |                          |

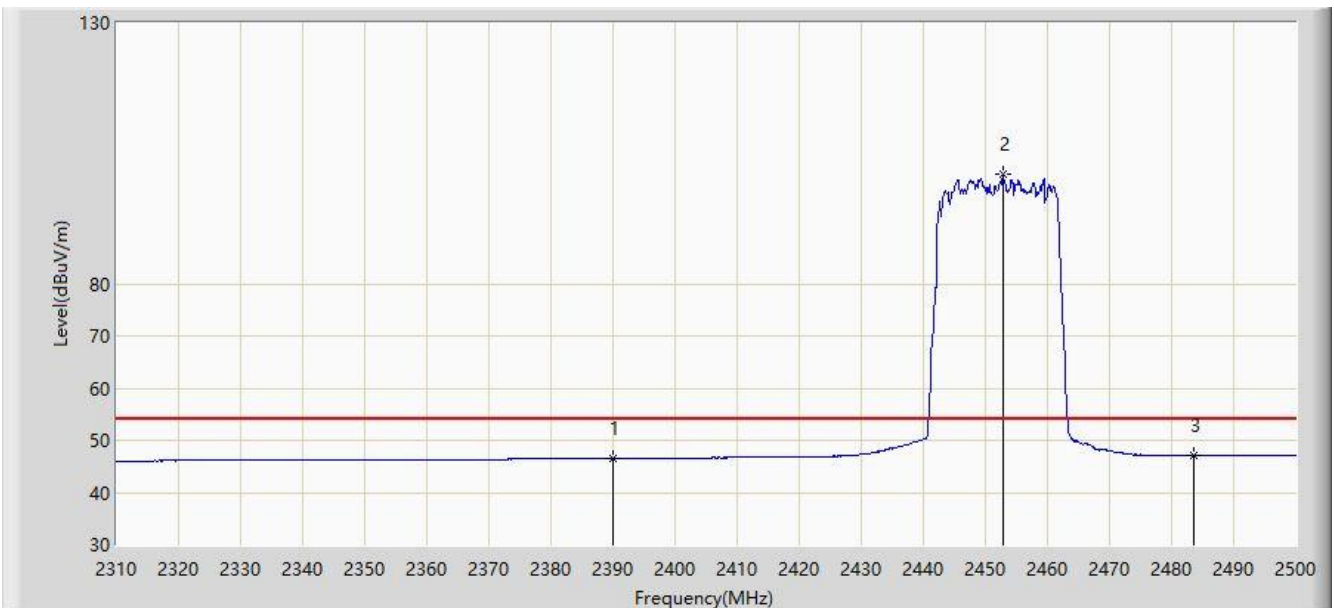


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 46.489                 | 14.215               | -7.511      | 54.000         | 32.274      | AV   |
| 2  |      | *    | 2452.785        | 101.143                | 68.580               | N/A         | N/A            | 32.564      | AV   |
| 3  |      |      | 2483.500        | 47.061                 | 14.357               | -6.939      | 54.000         | 32.704      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2019/11/09 - 14:07 |
| Limit: FCC_Part15.209_RSE(3m)                                               | Engineer: Kevin Ker      |
| Probe: TW BBHA 9120D_1-18GHz_2019                                           | Polarity: Vertical       |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 2452MHz (Beam-Forming Mode) |                          |

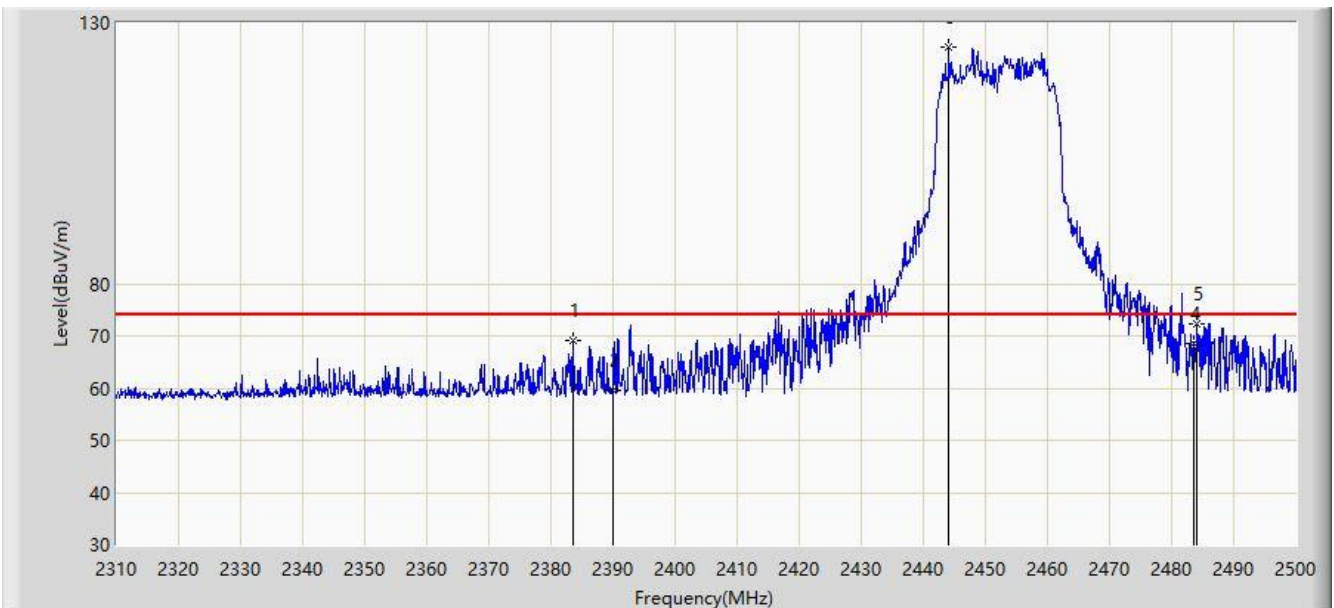


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2383.530        | 69.240                 | 36.996               | -4.760      | 74.000         | 32.244      | PK   |
| 2  |      |      | 2390.000        | 59.682                 | 27.408               | -14.318     | 74.000         | 32.274      | PK   |
| 3  |      | *    | 2444.140        | 125.299                | 92.776               | N/A         | N/A            | 32.523      | PK   |
| 4  |      |      | 2483.500        | 68.628                 | 35.924               | -5.372      | 74.000         | 32.704      | PK   |
| 5  |      |      | 2484.040        | 72.287                 | 39.580               | -1.713      | 74.000         | 32.707      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2019/11/09 - 14:07 |
| Limit: FCC_Part15.209_RSE(3m)                                               | Engineer: Kevin Ker      |
| Probe: TW BBHA 9120D_1-18GHz_2019                                           | Polarity: Vertical       |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 2452MHz (Beam-Forming Mode) |                          |

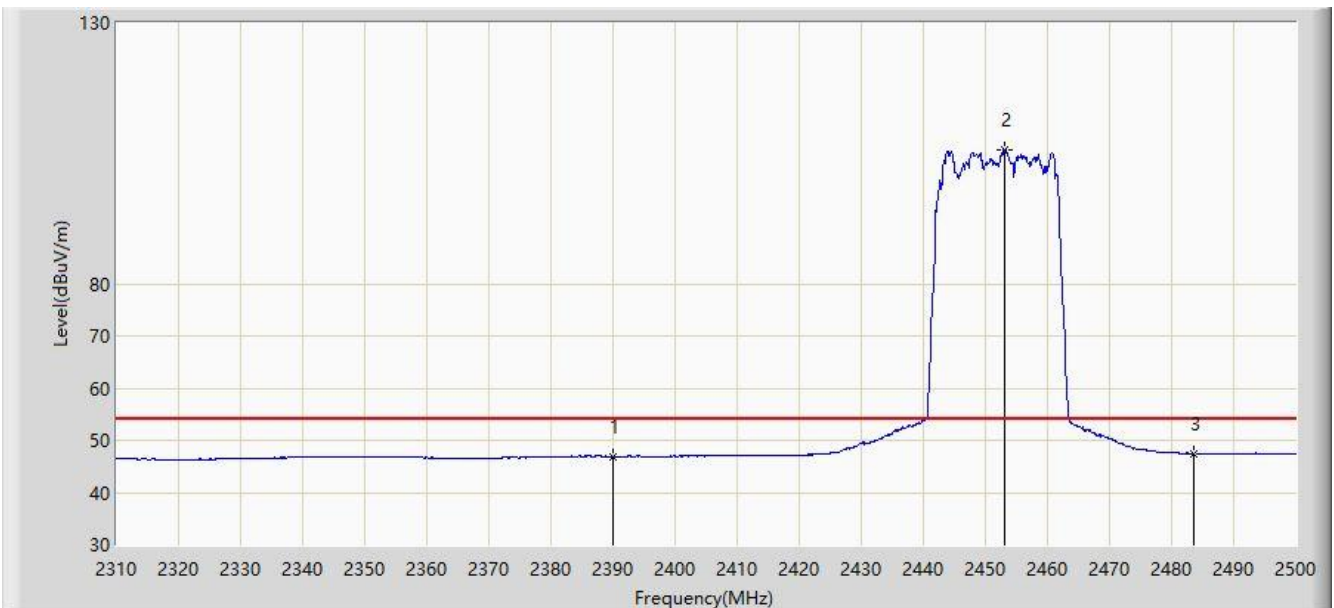


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 46.901                 | 14.627               | -7.099      | 54.000         | 32.274      | AV   |
| 2  |      | *    | 2453.165        | 105.640                | 73.075               | N/A         | N/A            | 32.565      | AV   |
| 3  |      |      | 2483.500        | 47.476                 | 14.772               | -6.524      | 54.000         | 32.704      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2019/11/09 - 14:09 |
| Limit: FCC_Part15.209_RSE(3m)                                               | Engineer: Kevin Ker      |
| Probe: TW BBHA 9120D_1-18GHz_2019                                           | Polarity: Horizontal     |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 2457MHz (Beam-Forming Mode) |                          |

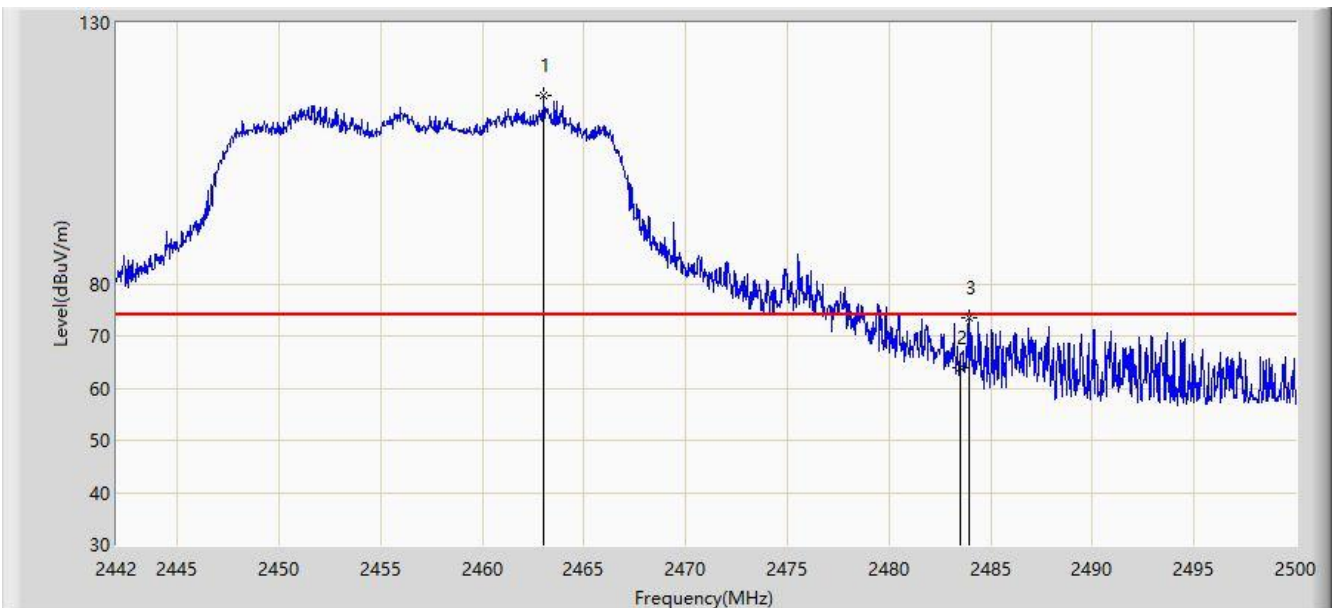


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2463.025        | 115.996                | 83.386               | N/A         | N/A            | 32.610      | PK   |
| 2  |      |      | 2483.500        | 63.993                 | 31.289               | -10.007     | 74.000         | 32.704      | PK   |
| 3  |      |      | 2483.905        | 73.408                 | 40.702               | -0.592      | 74.000         | 32.706      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2019/11/09 - 14:11 |
| Limit: FCC_Part15.209_RSE(3m)                                               | Engineer: Kevin Ker      |
| Probe: TW BBHA 9120D_1-18GHz_2019                                           | Polarity: Horizontal     |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 2457MHz (Beam-Forming Mode) |                          |

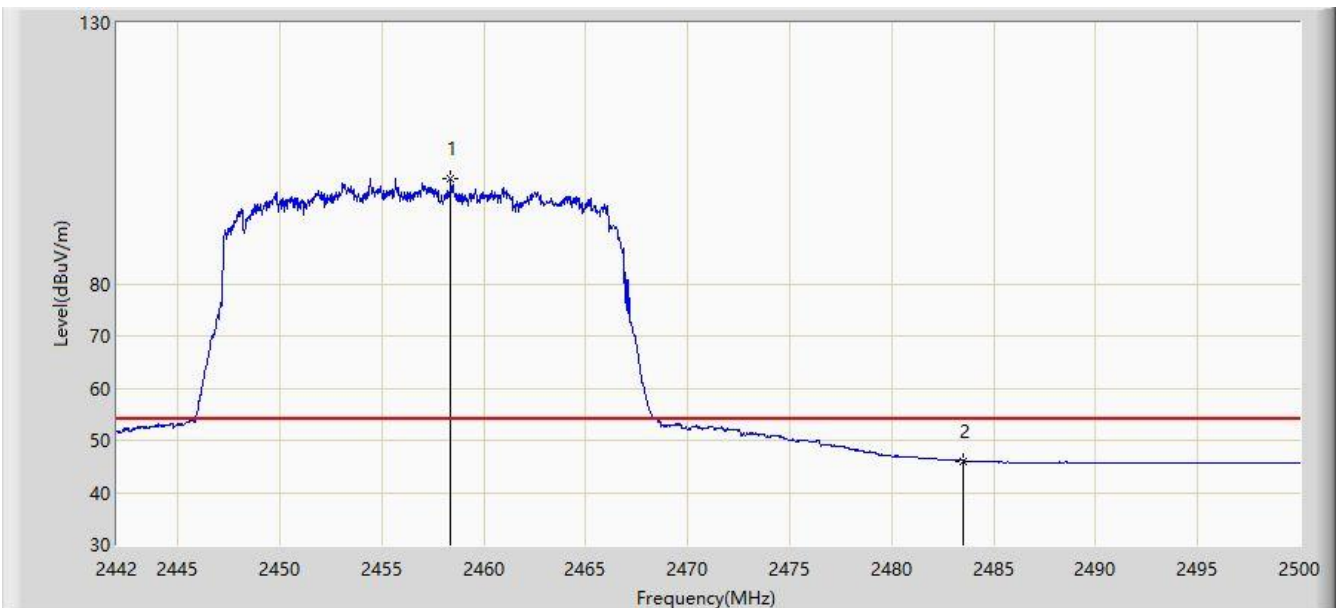


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2458.385        | 100.097                | 67.508               | N/A         | N/A            | 32.589      | AV   |
| 2  |      |      | 2483.500        | 46.052                 | 13.348               | -7.948      | 54.000         | 32.704      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2019/11/09 - 14:12 |
| Limit: FCC_Part15.209_RSE(3m)                                               | Engineer: Kevin Ker      |
| Probe: TW BBHA 9120D_1-18GHz_2019                                           | Polarity: Vertical       |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 2457MHz (Beam-Forming Mode) |                          |

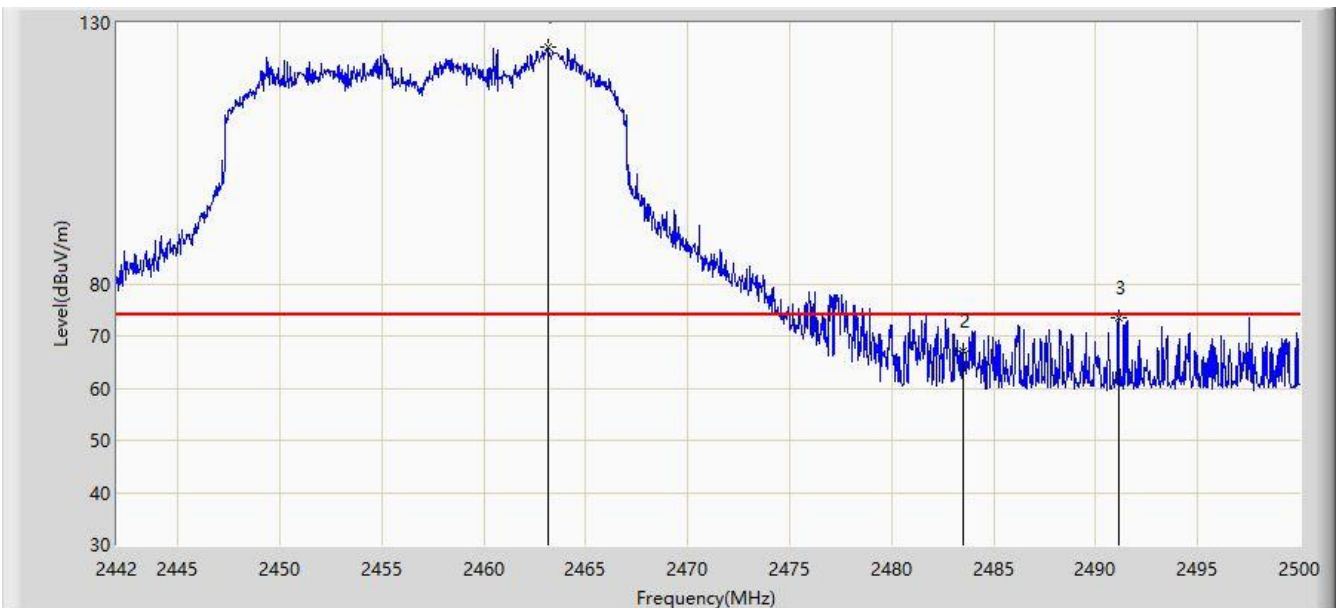


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2463.141        | 125.251                | 92.640               | N/A         | N/A            | 32.611      | PK   |
| 2  |      |      | 2483.500        | 67.065                 | 34.361               | -6.935      | 74.000         | 32.704      | PK   |
| 3  |      |      | 2491.126        | 73.500                 | 40.761               | -0.500      | 74.000         | 32.739      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2019/11/09 - 14:13 |
| Limit: FCC_Part15.209_RSE(3m)                                               | Engineer: Kevin Ker      |
| Probe: TW BBHA 9120D_1-18GHz_2019                                           | Polarity: Vertical       |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 2457MHz (Beam-Forming Mode) |                          |

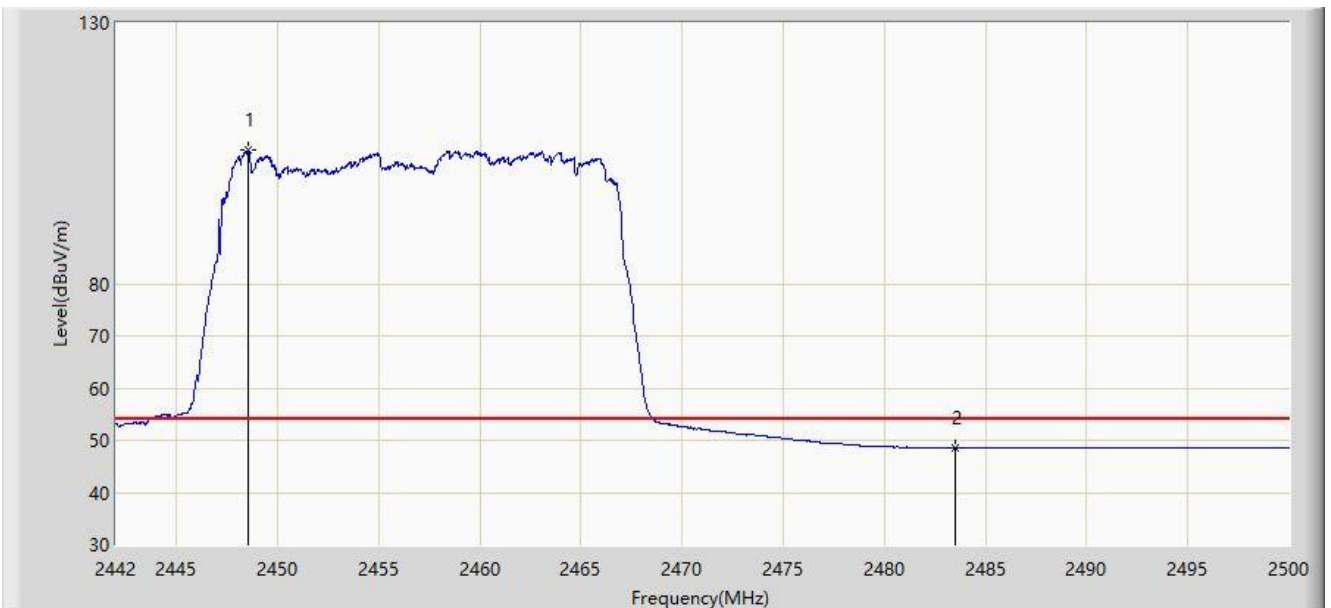


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2448.525        | 105.635                | 73.091               | N/A         | N/A            | 32.544      | AV   |
| 2  |      |      | 2483.500        | 48.566                 | 15.862               | -5.434      | 54.000         | 32.704      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2019/11/08 - 19:18 |
| Limit: FCC_Part15.209_RSE(3m)                                               | Engineer: Kevin Ker      |
| Probe: TW BBHA 9120D_1-18GHz_2019                                           | Polarity: Horizontal     |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 2462MHz (Beam-Forming Mode) |                          |

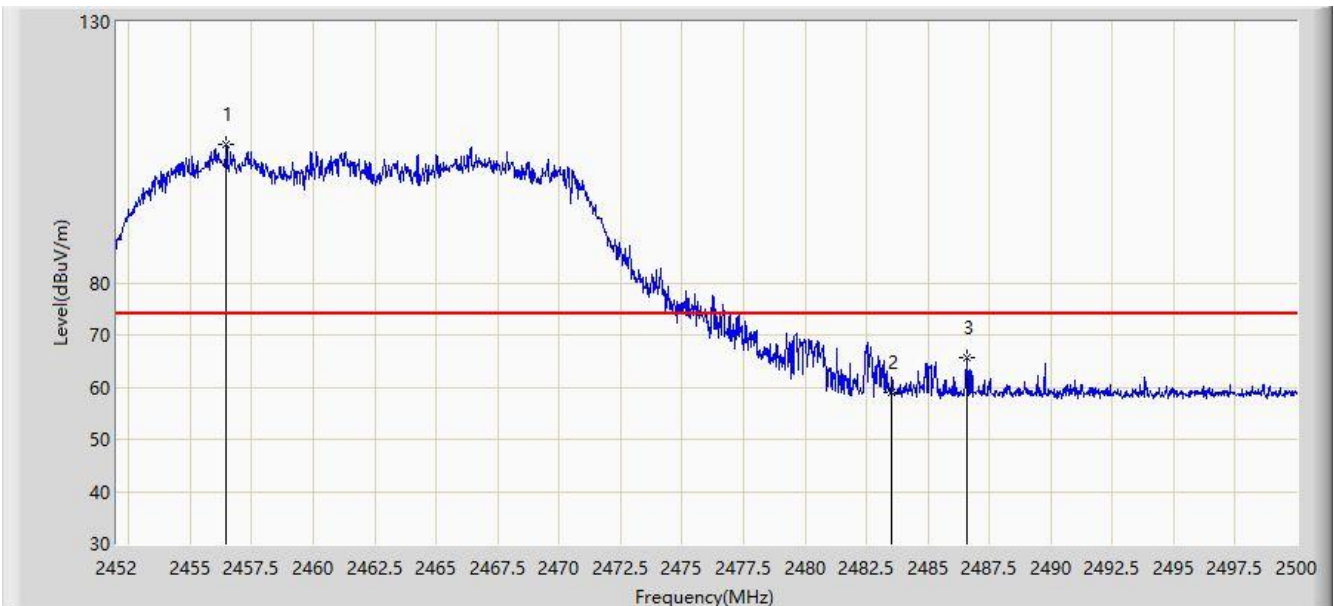


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2456.464        | 106.654                | 74.074               | N/A         | N/A            | 32.580      | PK   |
| 2  |      |      | 2483.500        | 58.956                 | 26.252               | -15.044     | 74.000         | 32.704      | PK   |
| 3  |      |      | 2486.560        | 65.672                 | 32.954               | -8.328      | 74.000         | 32.718      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2019/11/08 - 19:19 |
| Limit: FCC_Part15.209_RSE(3m)                                               | Engineer: Kevin Ker      |
| Probe: TW BBHA 9120D_1-18GHz_2019                                           | Polarity: Horizontal     |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 2462MHz (Beam-Forming Mode) |                          |

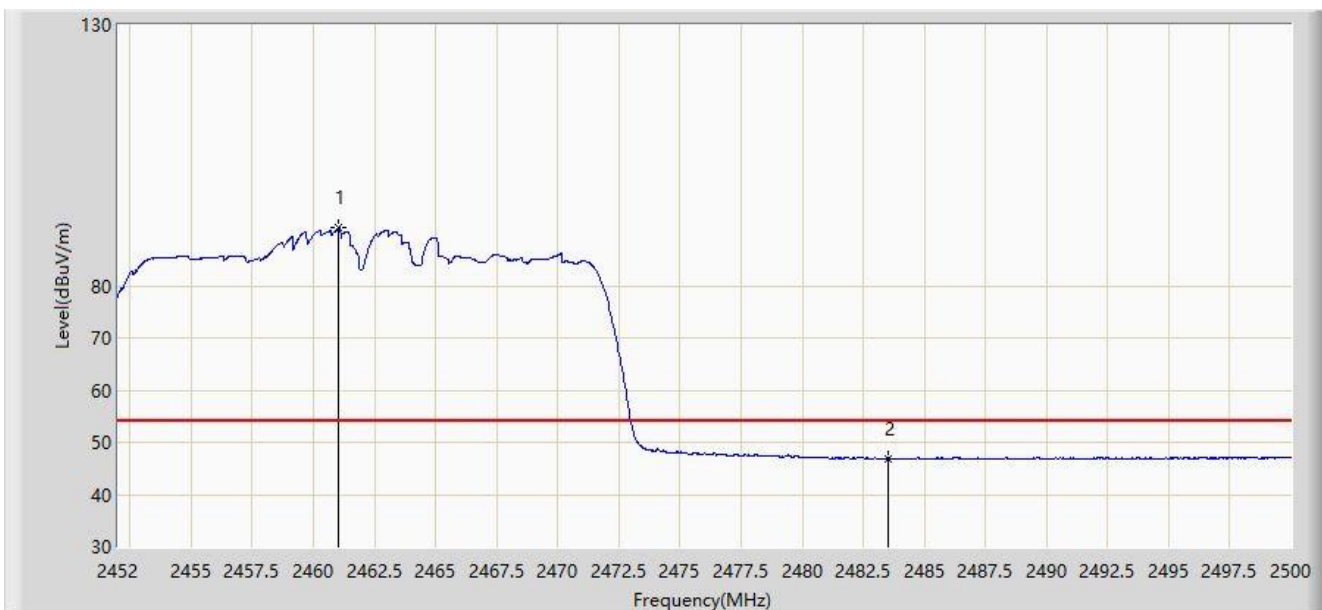


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2461.048        | 91.057                 | 58.456               | N/A         | N/A            | 32.601      | AV   |
| 2  |      |      | 2483.500        | 46.871                 | 14.167               | -7.129      | 54.000         | 32.704      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2019/11/08 - 19:19 |
| Limit: FCC_Part15.209_RSE(3m)                                               | Engineer: Kevin Ker      |
| Probe: TW BBHA 9120D_1-18GHz_2019                                           | Polarity: Vertical       |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 2462MHz (Beam-Forming Mode) |                          |

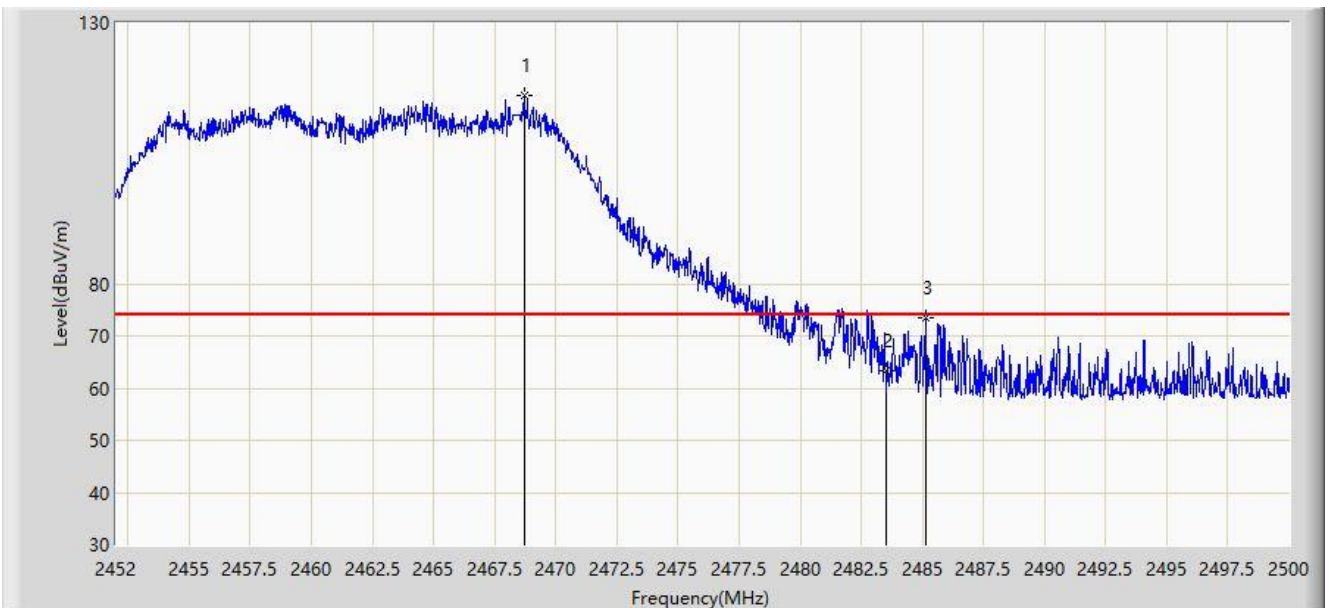


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2468.704        | 116.032                | 83.396               | N/A         | N/A            | 32.636      | PK   |
| 2  |      |      | 2483.500        | 63.429                 | 30.725               | -10.571     | 74.000         | 32.704      | PK   |
| 3  |      |      | 2485.120        | 73.606                 | 40.894               | -0.394      | 74.000         | 32.712      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2019/11/08 - 19:19 |
| Limit: FCC_Part15.209_RSE(3m)                                               | Engineer: Kevin Ker      |
| Probe: TW BBHA 9120D_1-18GHz_2019                                           | Polarity: Vertical       |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 2462MHz (Beam-Forming Mode) |                          |

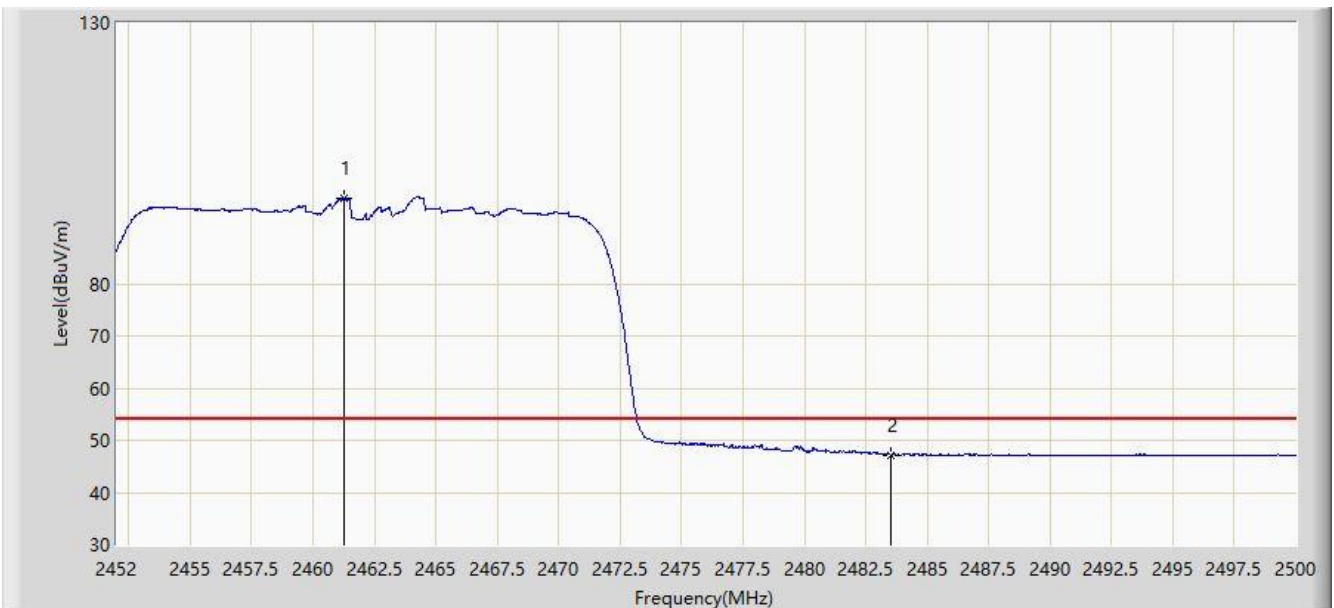


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2461.240        | 96.365                 | 63.763               | N/A         | N/A            | 32.601      | AV   |
| 2  |      |      | 2483.500        | 47.229                 | 14.525               | -6.771      | 54.000         | 32.704      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2019/11/08 - 19:19 |
| Limit: FCC_Part15.209_RSE(3m)                                               | Engineer: Kevin Ker      |
| Probe: TW BBHA 9120D_1-18GHz_2019                                           | Polarity: Horizontal     |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at channel 2422MHz (Beam-Forming Mode) |                          |

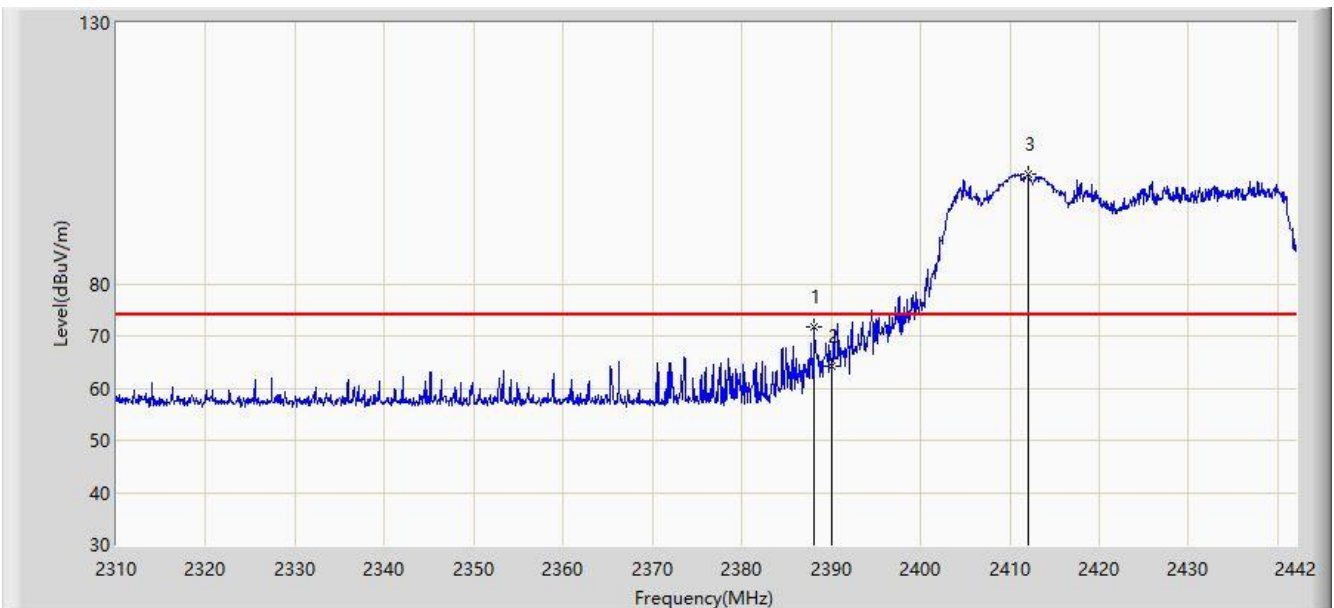


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2388.144        | 71.797                 | 39.531               | -2.203      | 74.000         | 32.266      | PK   |
| 2  |      |      | 2390.000        | 64.251                 | 31.977               | -9.749      | 74.000         | 32.274      | PK   |
| 3  |      | *    | 2412.036        | 100.888                | 68.513               | N/A         | N/A            | 32.375      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2019/11/08 - 19:19 |
| Limit: FCC_Part15.209_RSE(3m)                                               | Engineer: Kevin Ker      |
| Probe: TW BBHA 9120D_1-18GHz_2019                                           | Polarity: Horizontal     |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at channel 2422MHz (Beam-Forming Mode) |                          |

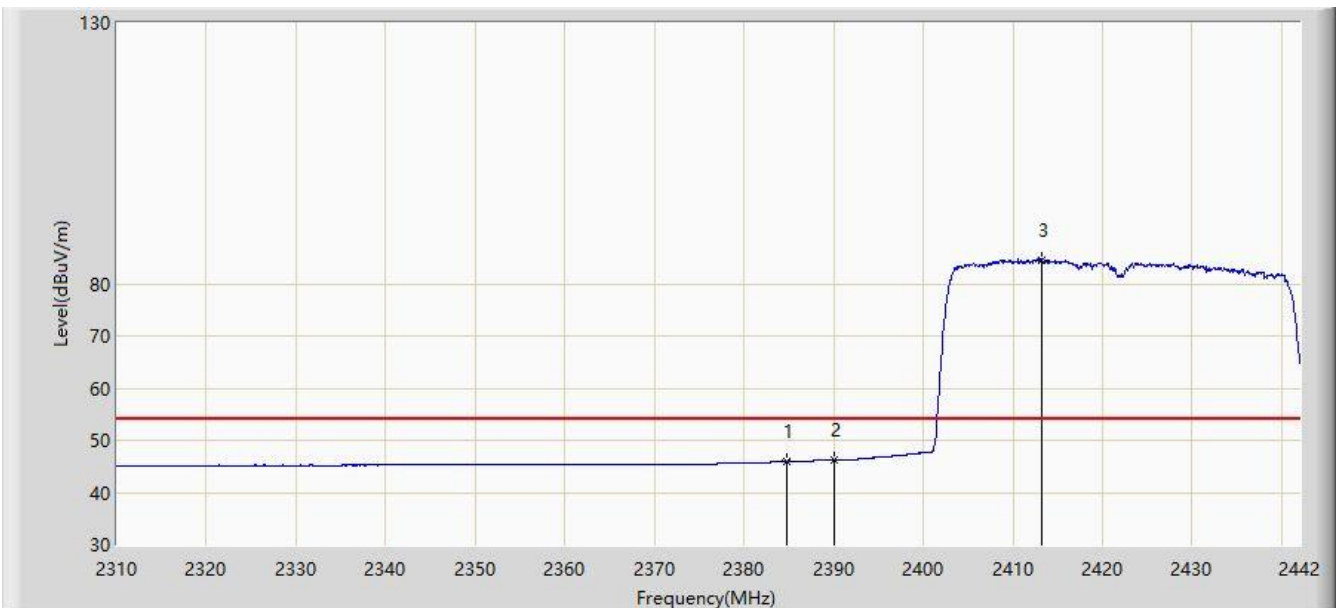


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2384.844        | 46.014                 | 13.763               | -7.986      | 54.000         | 32.251      | AV   |
| 2  |      |      | 2390.000        | 46.218                 | 13.944               | -7.782      | 54.000         | 32.274      | AV   |
| 3  |      | *    | 2413.158        | 84.608                 | 52.228               | N/A         | N/A            | 32.379      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2019/11/08 - 19:39 |
| Limit: FCC_Part15.209_RSE(3m)                                               | Engineer: Kevin Ker      |
| Probe: TW BBHA 9120D_1-18GHz_2019                                           | Polarity: Vertical       |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at channel 2422MHz (Beam-Forming Mode) |                          |

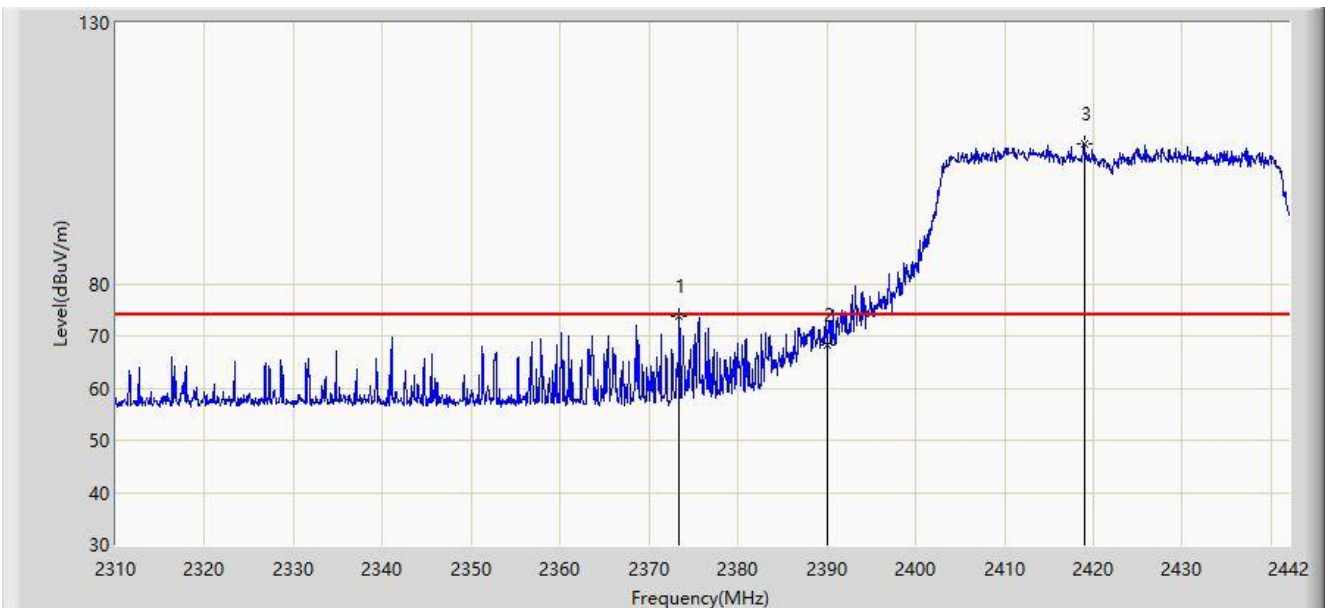


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2373.426        | 73.832                 | 41.634               | -0.168      | 74.000         | 32.198      | PK   |
| 2  |      |      | 2390.000        | 68.261                 | 35.987               | -5.739      | 74.000         | 32.274      | PK   |
| 3  |      | *    | 2419.032        | 106.942                | 74.535               | N/A         | N/A            | 32.407      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2019/11/08 - 19:40 |
| Limit: FCC_Part15.209_RSE(3m)                                               | Engineer: Kevin Ker      |
| Probe: TW BBHA 9120D_1-18GHz_2019                                           | Polarity: Vertical       |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at channel 2422MHz (Beam-Forming Mode) |                          |

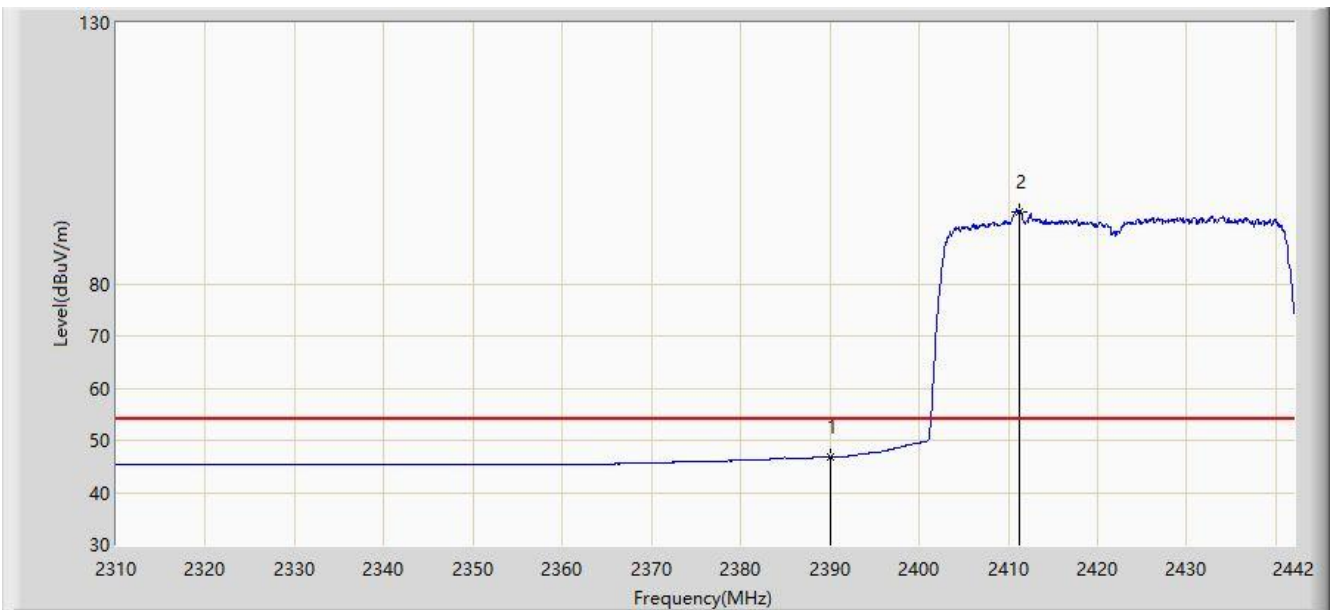


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 46.757                 | 14.483               | -7.243      | 54.000         | 32.274      | AV   |
| 2  |      | *    | 2411.178        | 93.873                 | 61.502               | N/A         | N/A            | 32.371      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2019/11/09 - 14:18 |
| Limit: FCC_Part15.209_RSE(3m)                                               | Engineer: Kevin Ker      |
| Probe: TW BBHA 9120D_1-18GHz_2019                                           | Polarity: Horizontal     |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at channel 2427MHz (Beam-Forming Mode) |                          |

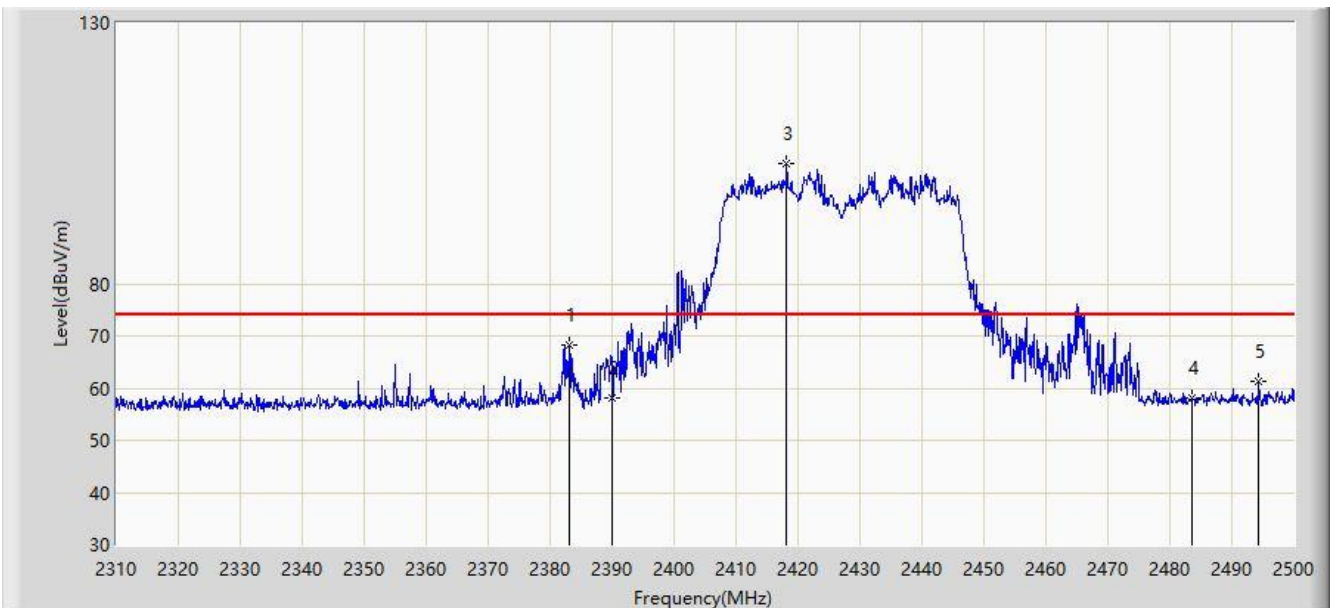


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2383.055        | 68.138                 | 35.896               | -5.862      | 74.000         | 32.243      | PK   |
| 2  |      |      | 2390.000        | 58.246                 | 25.972               | -15.754     | 74.000         | 32.274      | PK   |
| 3  |      | *    | 2418.205        | 103.011                | 70.608               | N/A         | N/A            | 32.404      | PK   |
| 4  |      |      | 2483.500        | 58.094                 | 25.390               | -15.906     | 74.000         | 32.704      | PK   |
| 5  |      |      | 2494.395        | 61.293                 | 28.539               | -12.707     | 74.000         | 32.754      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2019/11/09 - 14:18 |
| Limit: FCC_Part15.209_RSE(3m)                                               | Engineer: Kevin Ker      |
| Probe: TW BBHA 9120D_1-18GHz_2019                                           | Polarity: Horizontal     |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at channel 2427MHz (Beam-Forming Mode) |                          |

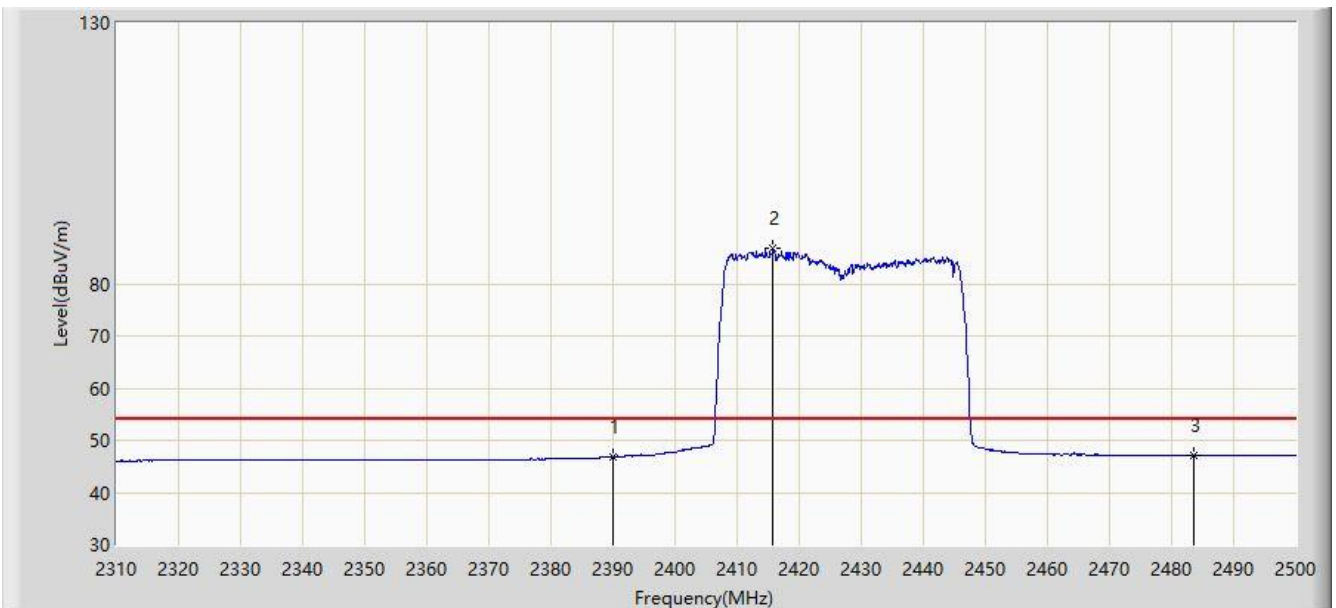


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 46.919                 | 14.645               | -7.081      | 54.000         | 32.274      | AV   |
| 2  |      | *    | 2415.830        | 86.742                 | 54.350               | N/A         | N/A            | 32.392      | AV   |
| 3  |      |      | 2483.500        | 47.041                 | 14.337               | -6.959      | 54.000         | 32.704      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2019/11/09 - 14:27 |
| Limit: FCC_Part15.209_RSE(3m)                                               | Engineer: Kevin Ker      |
| Probe: TW BBHA 9120D_1-18GHz_2019                                           | Polarity: Vertical       |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at channel 2427MHz (Beam-Forming Mode) |                          |

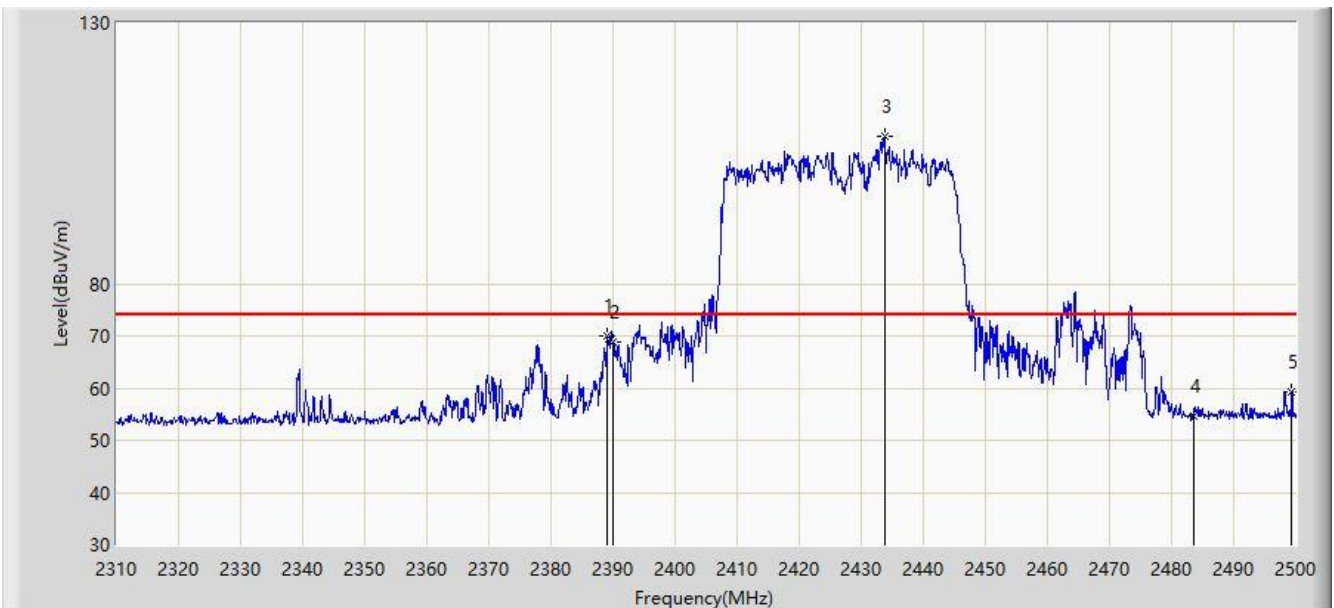


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2389.040        | 70.132                 | 37.862               | -3.868      | 74.000         | 32.270      | PK   |
| 2  |      |      | 2390.000        | 68.836                 | 36.562               | -5.164      | 74.000         | 32.274      | PK   |
| 3  |      | *    | 2433.785        | 108.138                | 75.663               | N/A         | N/A            | 32.476      | PK   |
| 4  |      |      | 2483.500        | 54.593                 | 21.889               | -19.407     | 74.000         | 32.704      | PK   |
| 5  |      |      | 2499.335        | 59.396                 | 26.622               | -14.604     | 74.000         | 32.774      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2019/11/09 - 14:27 |
| Limit: FCC_Part15.209_RSE(3m)                                               | Engineer: Kevin Ker      |
| Probe: TW BBHA 9120D_1-18GHz_2019                                           | Polarity: Vertical       |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at channel 2427MHz (Beam-Forming Mode) |                          |

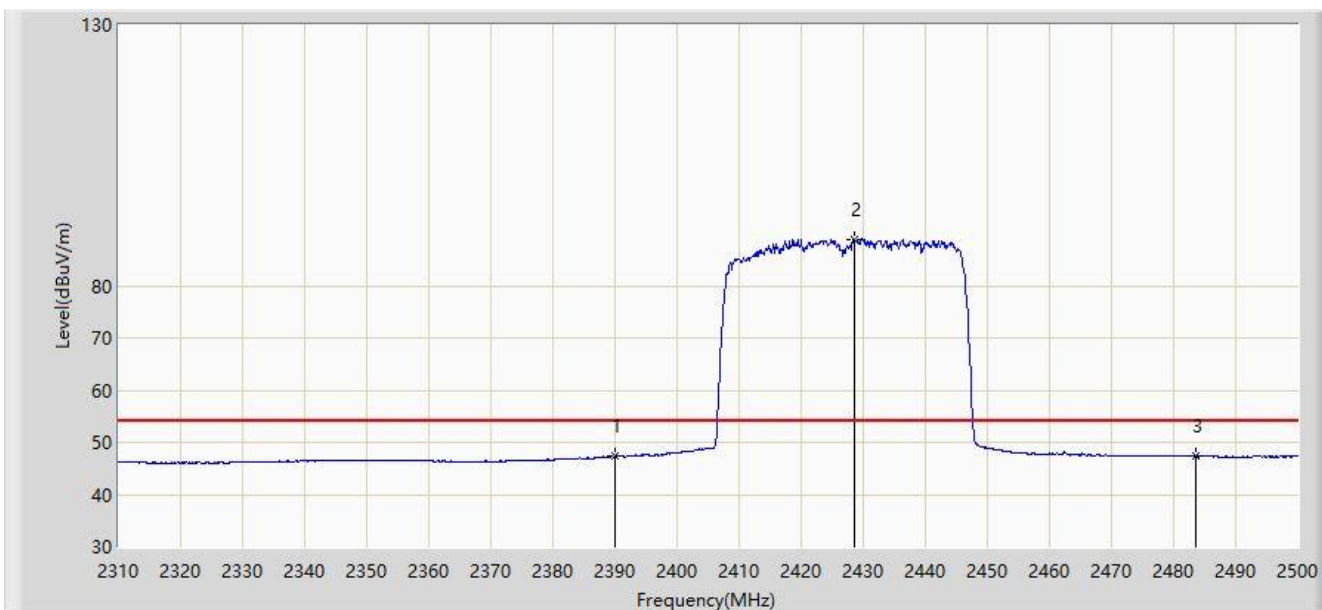


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 47.302                 | 15.028               | -6.698      | 54.000         | 32.274      | AV   |
| 2  |      | *    | 2428.655        | 88.949                 | 56.497               | N/A         | N/A            | 32.451      | AV   |
| 3  |      |      | 2483.500        | 47.284                 | 14.580               | -6.716      | 54.000         | 32.704      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2019/11/09 - 14:29 |
| Limit: FCC_Part15.209_RSE(3m)                                               | Engineer: Kevin Ker      |
| Probe: TW BBHA 9120D_1-18GHz_2019                                           | Polarity: Horizontal     |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at channel 2437MHz (Beam-Forming Mode) |                          |

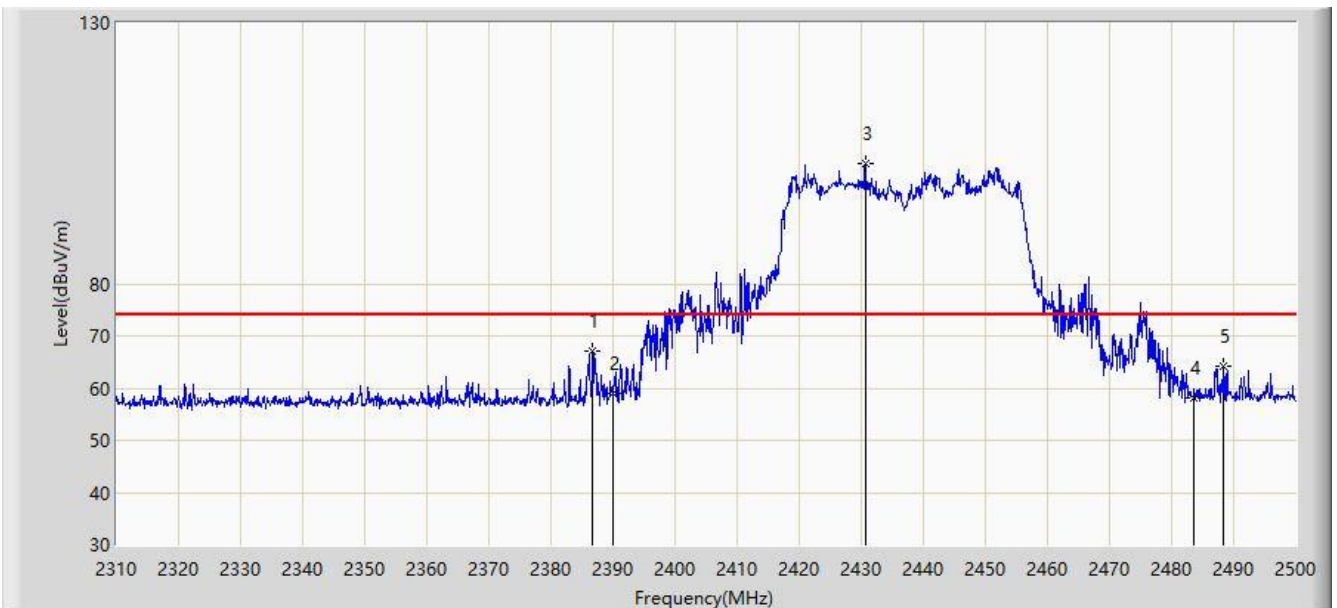


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2386.760        | 67.194                 | 34.935               | -6.806      | 74.000         | 32.259      | PK   |
| 2  |      |      | 2390.000        | 58.980                 | 26.706               | -15.020     | 74.000         | 32.274      | PK   |
| 3  |      | *    | 2430.650        | 102.906                | 70.445               | N/A         | N/A            | 32.461      | PK   |
| 4  |      |      | 2483.500        | 58.060                 | 25.356               | -15.940     | 74.000         | 32.704      | PK   |
| 5  |      |      | 2488.410        | 64.171                 | 31.444               | -9.829      | 74.000         | 32.727      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2019/11/09 - 14:29 |
| Limit: FCC_Part15.209_RSE(3m)                                               | Engineer: Kevin Ker      |
| Probe: TW BBHA 9120D_1-18GHz_2019                                           | Polarity: Horizontal     |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at channel 2437MHz (Beam-Forming Mode) |                          |

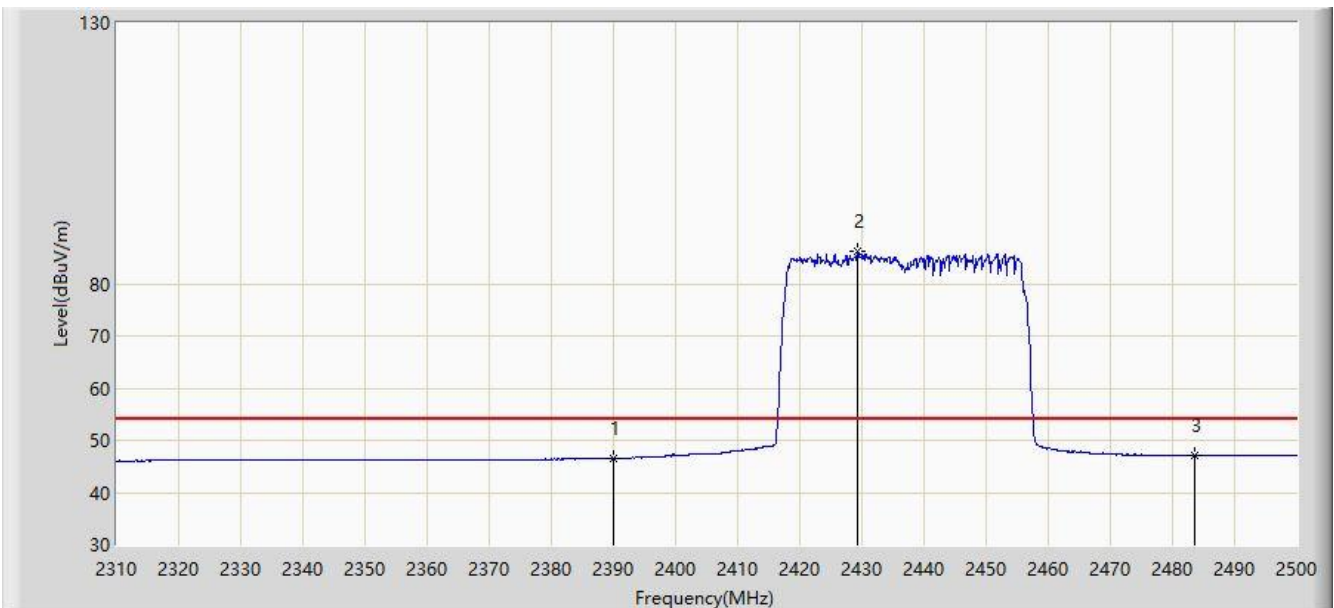


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 46.544                 | 14.270               | -7.456      | 54.000         | 32.274      | AV   |
| 2  |      | *    | 2429.225        | 86.135                 | 53.681               | N/A         | N/A            | 32.454      | AV   |
| 3  |      |      | 2483.500        | 47.099                 | 14.395               | -6.901      | 54.000         | 32.704      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2019/11/09 - 14:55 |
| Limit: FCC_Part15.209_RSE(3m)                                               | Engineer: Kevin Ker      |
| Probe: TW BBHA 9120D_1-18GHz_2019                                           | Polarity: Vertical       |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at channel 2437MHz (Beam-Forming Mode) |                          |

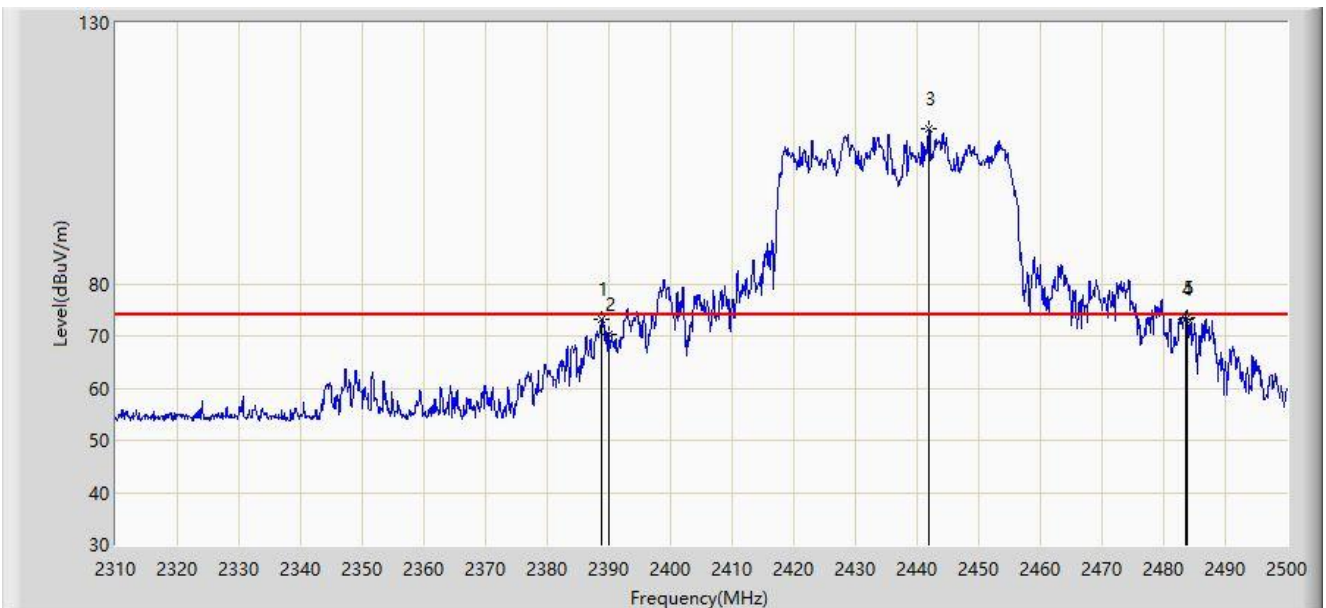


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2388.850        | 73.058                 | 40.789               | -0.942      | 74.000         | 32.269      | PK   |
| 2  |      |      | 2390.000        | 70.316                 | 38.042               | -3.684      | 74.000         | 32.274      | PK   |
| 3  |      | *    | 2441.955        | 109.637                | 77.123               | N/A         | N/A            | 32.514      | PK   |
| 4  |      |      | 2483.500        | 73.109                 | 40.405               | -0.891      | 74.000         | 32.704      | PK   |
| 5  |      |      | 2483.755        | 73.475                 | 40.769               | -0.525      | 74.000         | 32.706      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2019/11/09 - 14:57 |
| Limit: FCC_Part15.209_RSE(3m)                                               | Engineer: Kevin Ker      |
| Probe: TW BBHA 9120D_1-18GHz_2019                                           | Polarity: Vertical       |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at channel 2437MHz (Beam-Forming Mode) |                          |

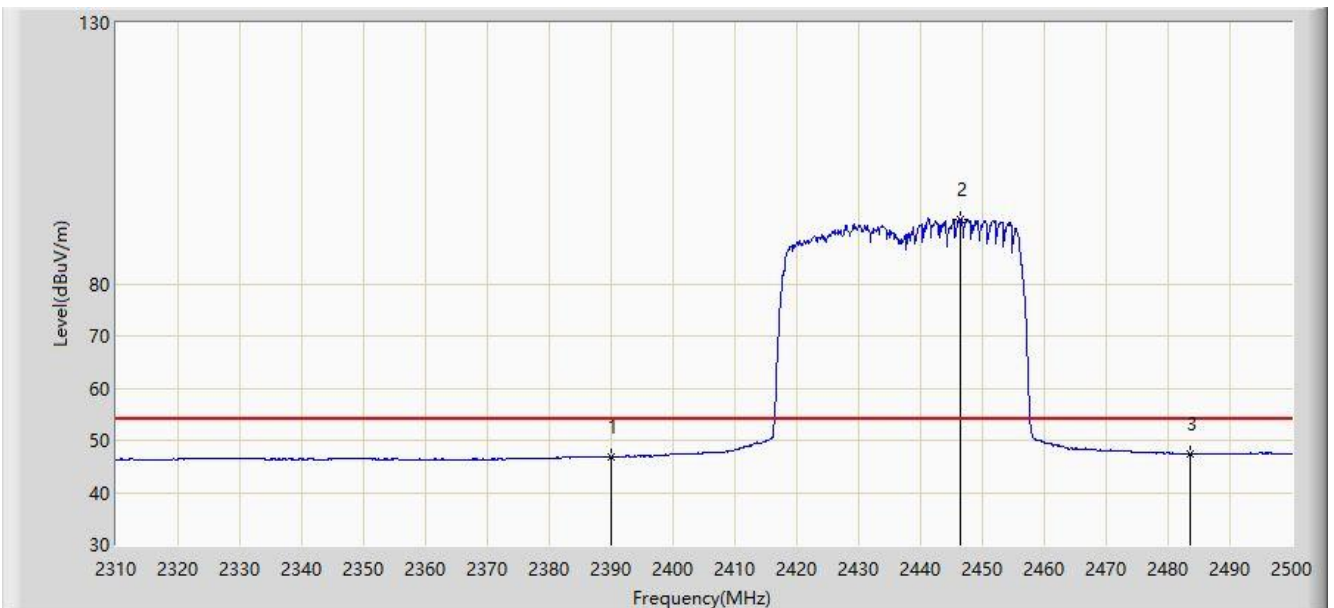

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 46.920                 | 14.646               | -7.080      | 54.000         | 32.274      | AV   |
| 2  |      | *    | 2446.325        | 92.313                 | 59.780               | N/A         | N/A            | 32.534      | AV   |
| 3  |      |      | 2483.500        | 47.439                 | 14.735               | -6.561      | 54.000         | 32.704      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2019/11/09 - 14:57 |
| Limit: FCC_Part15.209_RSE(3m)                                               | Engineer: Kevin Ker      |
| Probe: TW BBHA 9120D_1-18GHz_2019                                           | Polarity: Horizontal     |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at channel 2447MHz (Beam-Forming Mode) |                          |




| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2331.470        | 60.338                 | 28.334               | -13.662     | 74.000         | 32.005      | PK   |
| 2  |      |      | 2390.000        | 56.865                 | 24.591               | -17.135     | 74.000         | 32.274      | PK   |
| 3  |      | *    | 2451.360        | 102.754                | 70.197               | N/A         | N/A            | 32.557      | PK   |
| 4  |      |      | 2483.500        | 68.542                 | 35.838               | -5.458      | 74.000         | 32.704      | PK   |
| 5  |      |      | 2484.895        | 69.088                 | 36.377               | -4.912      | 74.000         | 32.711      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2019/11/09 - 14:57 |
| Limit: FCC_Part15.209_RSE(3m)                                               | Engineer: Kevin Ker      |
| Probe: TW BBHA 9120D_1-18GHz_2019                                           | Polarity: Horizontal     |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at channel 2447MHz (Beam-Forming Mode) |                          |

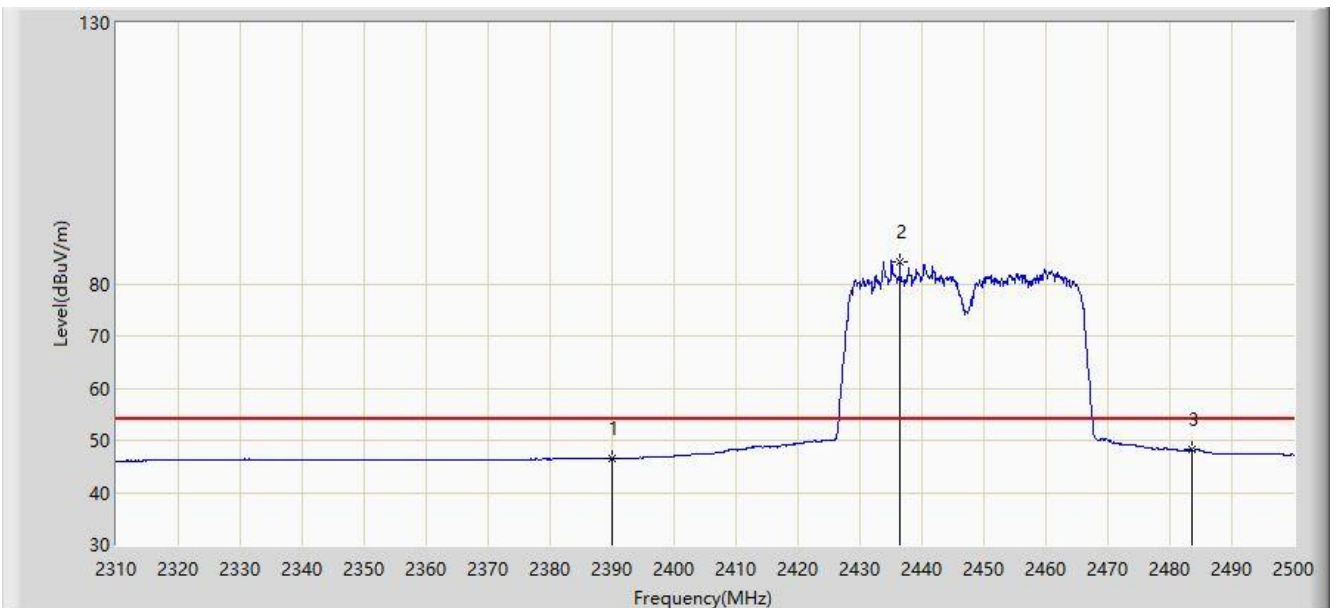


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 46.512                 | 14.238               | -7.488      | 54.000         | 32.274      | AV   |
| 2  |      | *    | 2436.445        | 84.203                 | 51.715               | N/A         | N/A            | 32.488      | AV   |
| 3  |      |      | 2483.500        | 48.133                 | 15.429               | -5.867      | 54.000         | 32.704      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2019/11/09 - 14:57 |
| Limit: FCC_Part15.209_RSE(3m)                                               | Engineer: Kevin Ker      |
| Probe: TW BBHA 9120D_1-18GHz_2019                                           | Polarity: Vertical       |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at channel 2447MHz (Beam-Forming Mode) |                          |

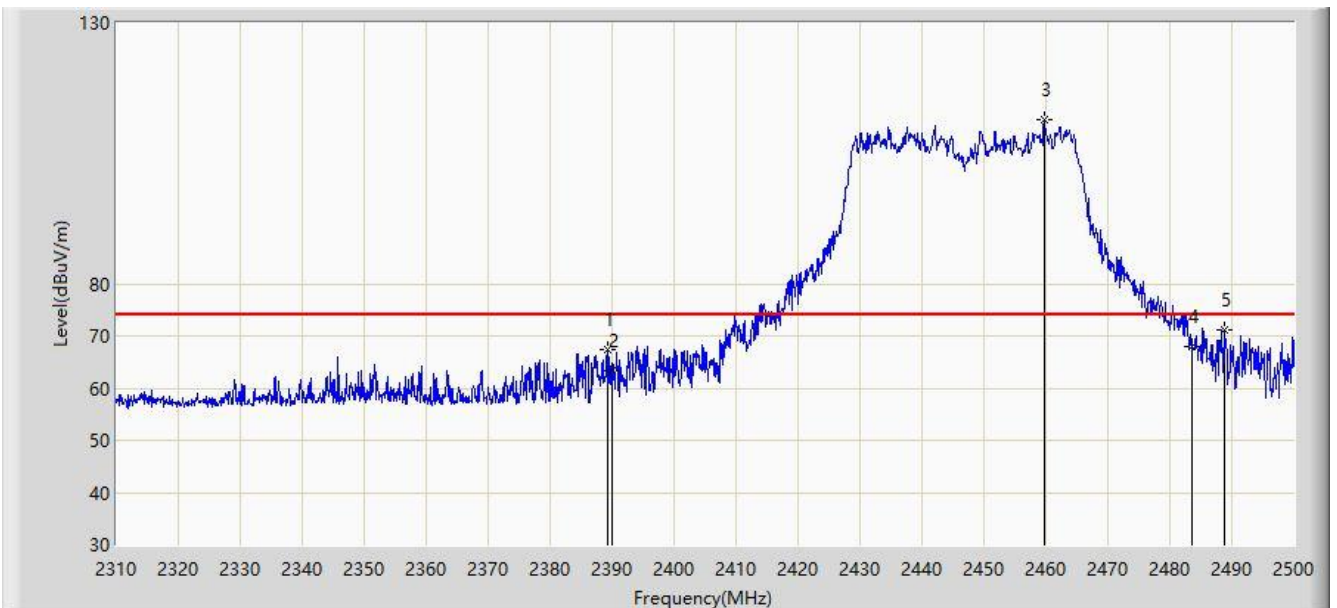


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2389.230        | 67.274                 | 35.003               | -6.726      | 74.000         | 32.271      | PK   |
| 2  |      |      | 2390.000        | 63.394                 | 31.120               | -10.606     | 74.000         | 32.274      | PK   |
| 3  |      | *    | 2459.720        | 111.575                | 78.980               | N/A         | N/A            | 32.595      | PK   |
| 4  |      |      | 2483.500        | 67.898                 | 35.194               | -6.102      | 74.000         | 32.704      | PK   |
| 5  |      |      | 2488.790        | 71.165                 | 38.437               | -2.835      | 74.000         | 32.729      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2019/11/09 - 14:58 |
| Limit: FCC_Part15.209_RSE(3m)                                               | Engineer: Kevin Ker      |
| Probe: TW BBHA 9120D_1-18GHz_2019                                           | Polarity: Vertical       |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at channel 2447MHz (Beam-Forming Mode) |                          |

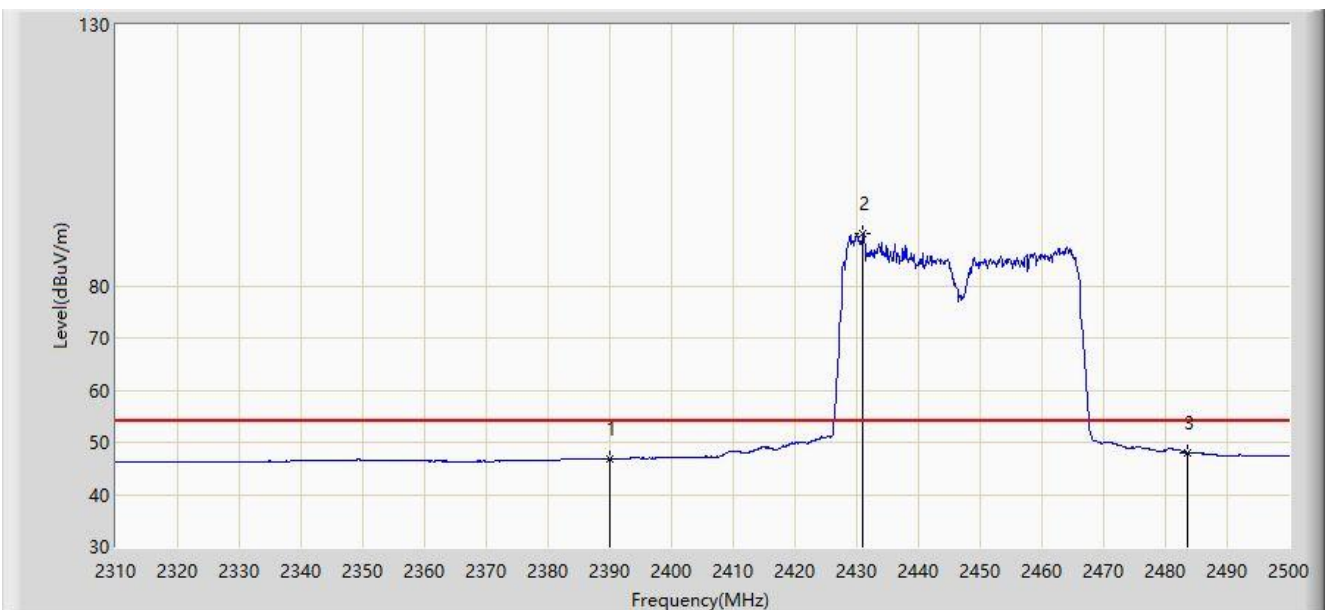


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 46.849                 | 14.575               | -7.151      | 54.000         | 32.274      | AV   |
| 2  |      | *    | 2431.030        | 89.964                 | 57.501               | N/A         | N/A            | 32.462      | AV   |
| 3  |      |      | 2483.500        | 48.026                 | 15.322               | -5.974      | 54.000         | 32.704      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2019/11/08 - 19:42 |
| Limit: FCC_Part15.209_RSE(3m)                                               | Engineer: Kevin Ker      |
| Probe: TW BBHA 9120D_1-18GHz_2019                                           | Polarity: Horizontal     |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at channel 2452MHz (Beam-Forming Mode) |                          |

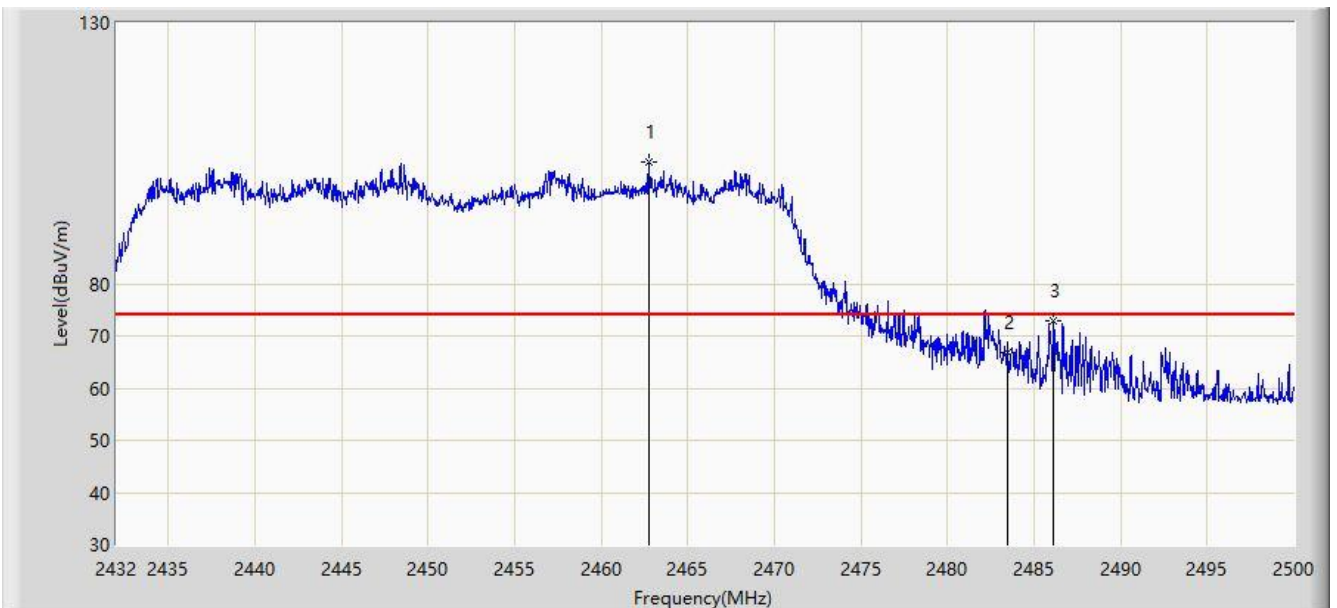


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2462.736        | 103.342                | 70.733               | N/A         | N/A            | 32.609      | PK   |
| 2  |      |      | 2483.500        | 66.933                 | 34.229               | -7.067      | 74.000         | 32.704      | PK   |
| 3  |      |      | 2486.128        | 72.842                 | 40.126               | -1.158      | 74.000         | 32.716      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2019/11/08 - 19:42 |
| Limit: FCC_Part15.209_RSE(3m)                                               | Engineer: Kevin Ker      |
| Probe: TW BBHA 9120D_1-18GHz_2019                                           | Polarity: Horizontal     |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at channel 2452MHz (Beam-Forming Mode) |                          |

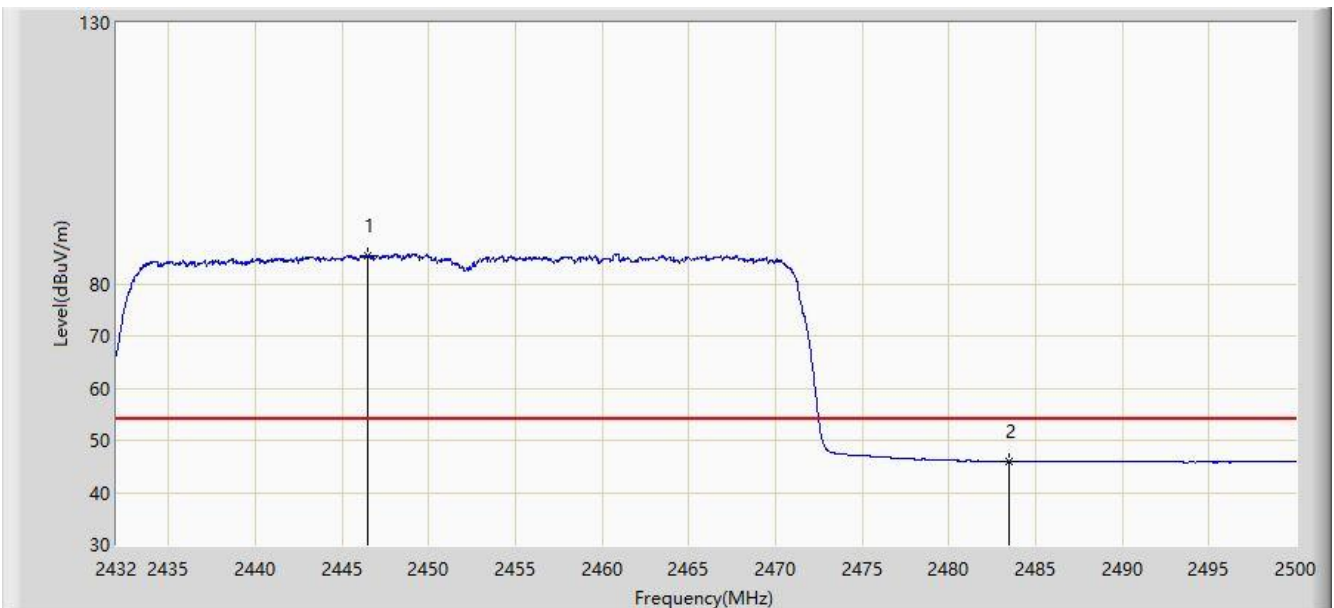


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2446.518        | 85.451                 | 52.917               | N/A         | N/A            | 32.534      | AV   |
| 2  |      |      | 2483.500        | 45.824                 | 13.120               | -8.176      | 54.000         | 32.704      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2019/11/08 - 19:42 |
| Limit: FCC_Part15.209_RSE(3m)                                               | Engineer: Kevin Ker      |
| Probe: TW BBHA 9120D_1-18GHz_2019                                           | Polarity: Vertical       |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at channel 2452MHz (Beam-Forming Mode) |                          |

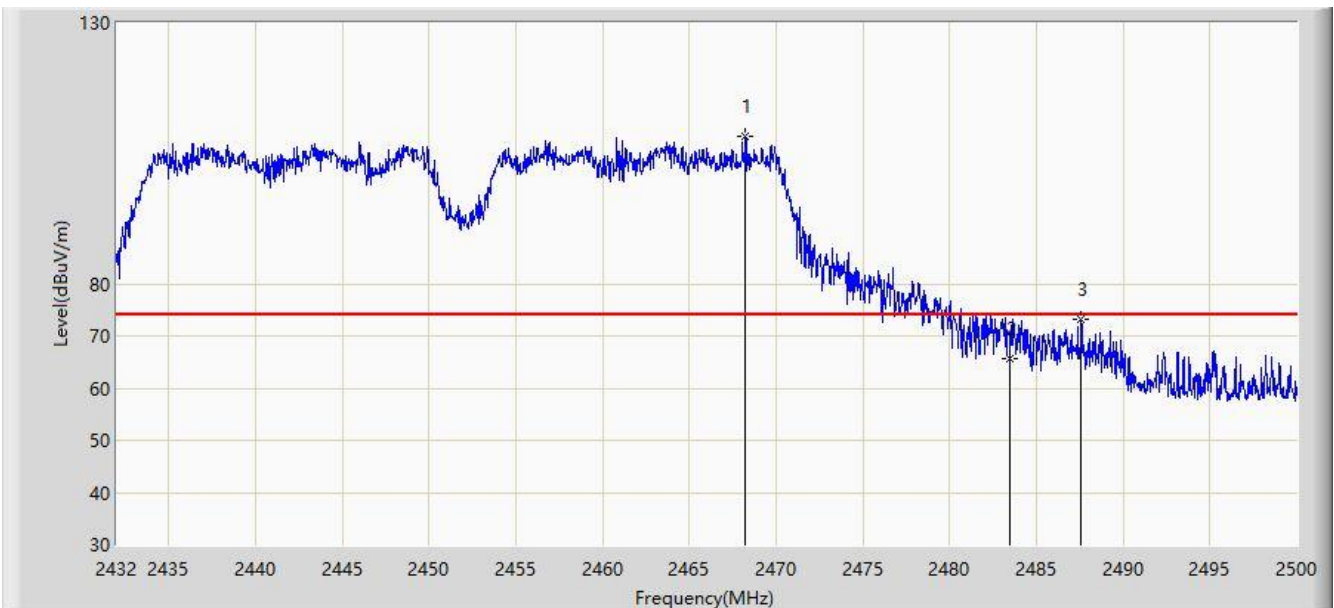


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2468.244        | 108.195                | 75.561               | N/A         | N/A            | 32.634      | PK   |
| 2  |      |      | 2483.500        | 65.559                 | 32.855               | -8.441      | 74.000         | 32.704      | PK   |
| 3  |      |      | 2487.590        | 73.054                 | 40.331               | -0.946      | 74.000         | 32.723      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2019/11/08 - 19:43 |
| Limit: FCC_Part15.209_RSE(3m)                                               | Engineer: Kevin Ker      |
| Probe: TW BBHA 9120D_1-18GHz_2019                                           | Polarity: Vertical       |
| EUT: AX3000 Gigabit Wi-Fi 6 Router                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at channel 2452MHz (Beam-Forming Mode) |                          |

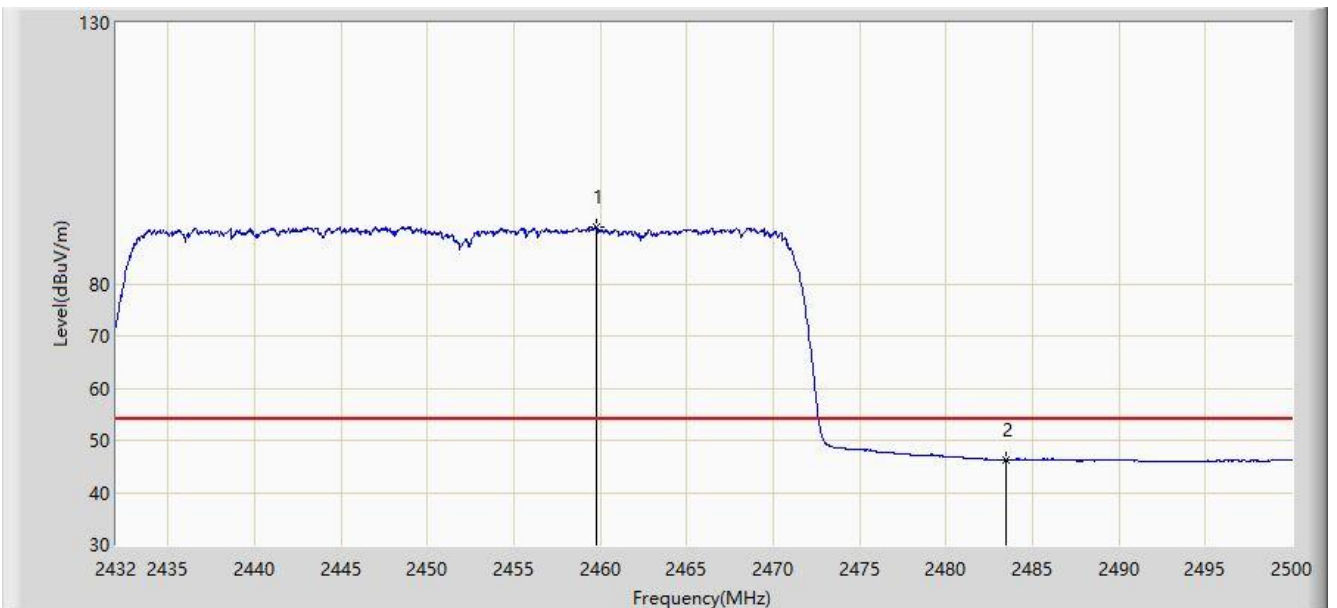

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2459.778        | 90.780                 | 58.185               | N/A         | N/A            | 32.595      | AV   |
| 2  |      |      | 2483.500        | 46.253                 | 13.549               | -7.747      | 54.000         | 32.704      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

## 8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15C of the FCC Rules.

---

The End

## **Appendix A - Test Setup Photograph**

Refer to “1912W0111-UT” file.

## **Appendix B - EUT Photograph**

Refer to “ 1912TW0111-UE” file.