





# Highest Channel: 5795 MHz. Chain A

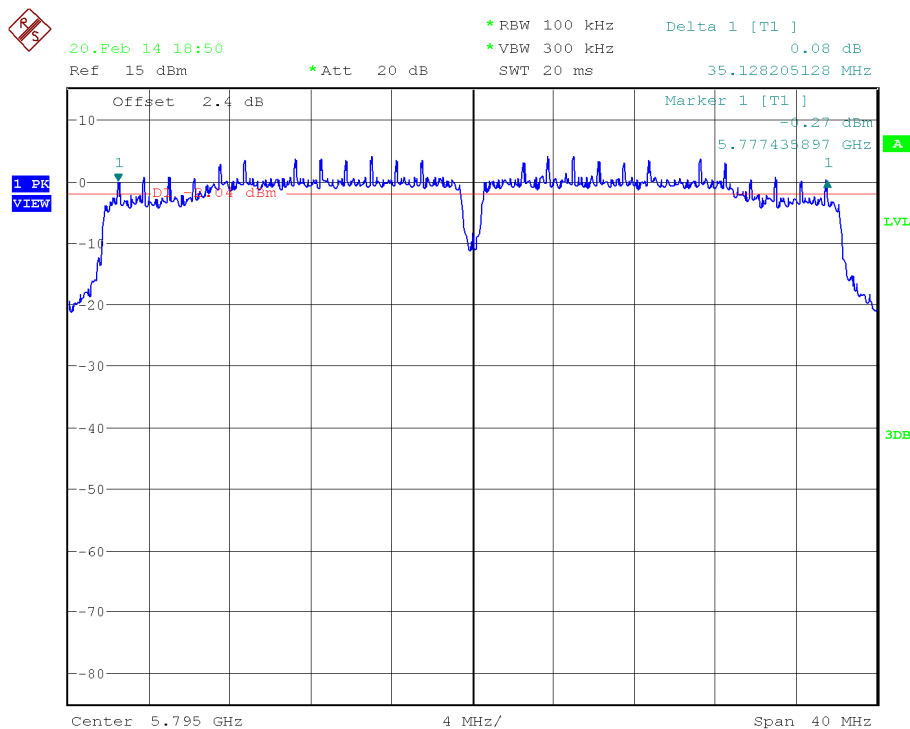

Date: 20.FEB.2014 18:50:32


# Highest Channel: 5795 MHz. Chain B

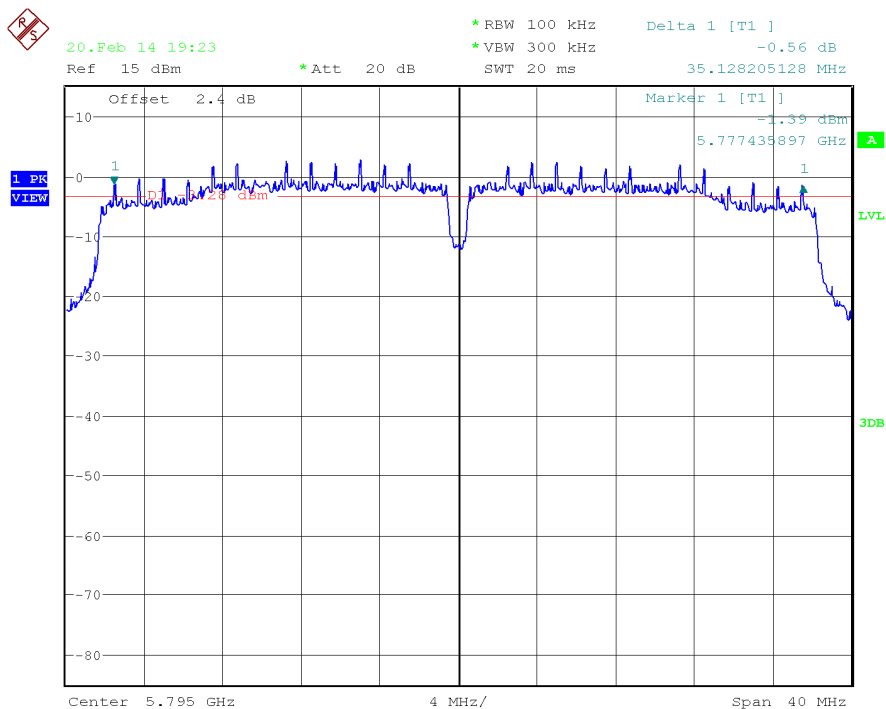

Date: 20.FEB.2014 19:23:00


#### 4. WiFi 5GHz 802.11 ac80 mode

Middle Channel: 5775 MHz. Chain A

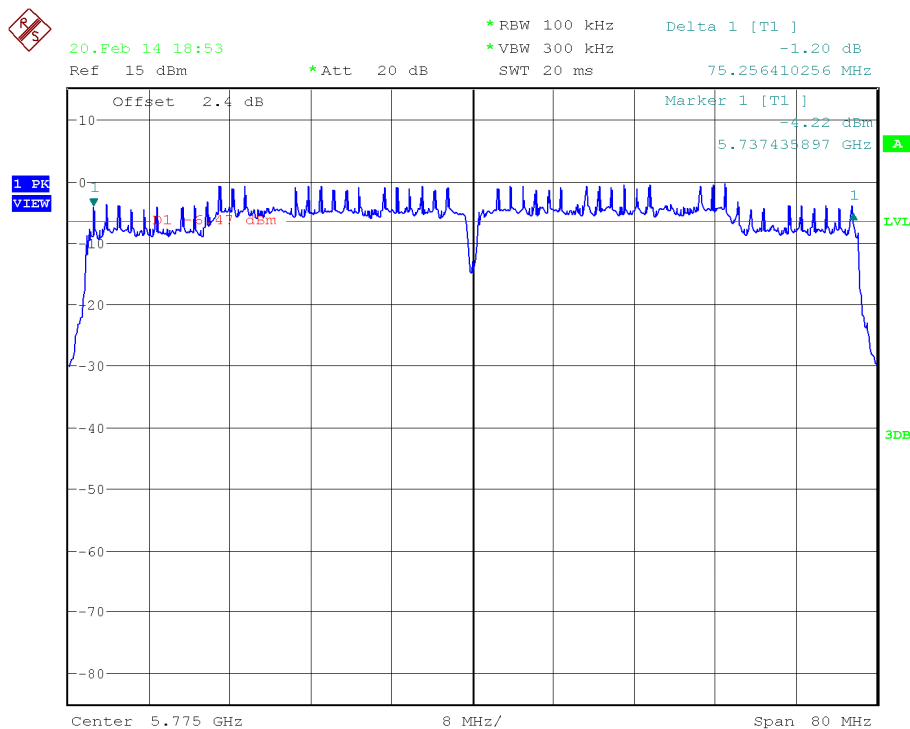

Date: 20.FEB.2014 18:53:16

Middle Channel: 5775 MHz. Chain B

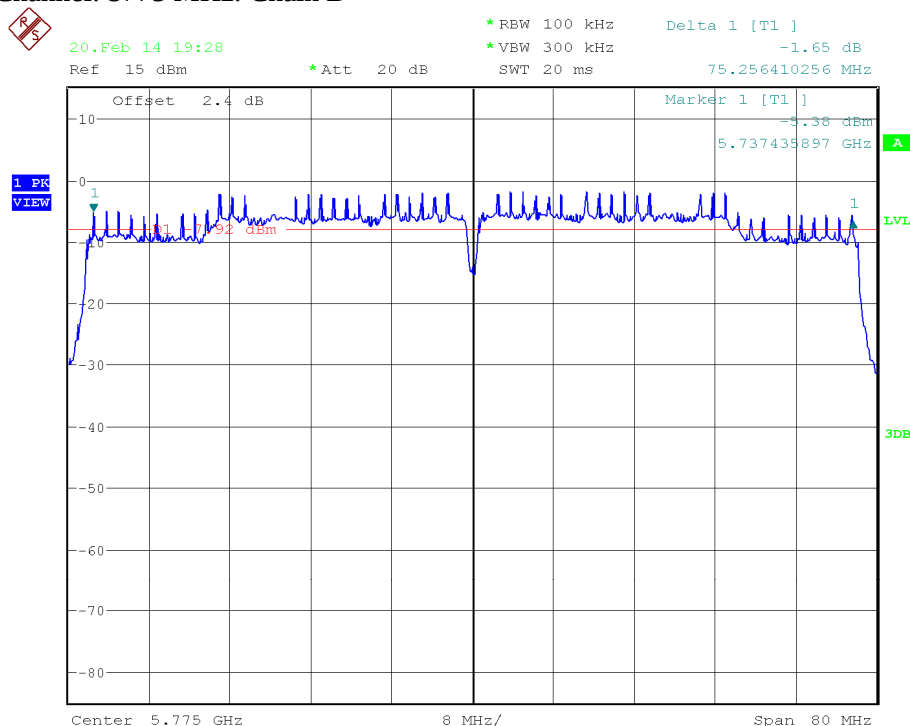

Date: 20.FEB.2014 19:28:25

## Section 15.247 Subclause (b) / RSS-210 A8.4. (4). Maximum output power and antenna gain

### SPECIFICATION

The maximum peak conducted output power of the intentional radiator shall not exceed 1 watt (30 dBm). The e.i.r.p. shall not exceed 4 W (36 dBm) (Canada).

### RESULTS

The maximum Peak Conducted Output Power was measured using the channel integration method according to point 9.1.2. of Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 558074 D01 DTS Meas Guidance v03r01 dated 09/04/2013. This method was used for 802.11ac80 mode.

The maximum conducted (average) output power was measured using the method according to point 9.2.1.2. of Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 558074 D01 DTS Meas Guidance v03r01 dated 09/04/2013. This method was used for 802.11a, 802.11n20 and 802.11n40 modes.

In the measure-and-sum approach for MIMO mode, the conducted emission level (*e.g.*, transmit power or power in specified bandwidth) is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units (mW—not dBm).

The EIRP power (dBm) is calculated by adding the declared maximum antenna gain to the measured conducted power.

For MIMO mode, the Guidance on directional Gain calculations according to the Guidance for Emission Testing of Transmitters with Multiple Outputs in the Same Band 662911 D01 Multiple Transmitter Output v02r01 dated 10/31/2013 was used.

The number of transmit antennas ( $N_{ANT}$ ) are 2 and the number of spatial streams ( $N_{ss}$ ) are 2 and therefore the Array Gain is 0 dB.

MAXIMUM OUTPUT POWER. (See next plots of worst case: highest power).

Declared maximum antenna gain: 5 dBi.

#### 1. WiFi 5GHz 802.11 a mode

Conducted (average) output power.

|                               | Lowest frequency<br>5745 MHz |         | Middle frequency<br>5785 MHz |         | Highest frequency<br>5825 MHz |         |
|-------------------------------|------------------------------|---------|------------------------------|---------|-------------------------------|---------|
|                               | Chain A                      | Chain B | Chain A                      | Chain B | Chain A                       | Chain B |
| Maximum conducted power (dBm) | 15.27                        | 15.02   | 15.67                        | 14.70   | 15.42                         | 15.35   |
| Maximum EIRP power (dBm)      | 20.27                        | 20.02   | 20.67                        | 19.70   | 20.42                         | 20.35   |
| Measurement uncertainty (dB)  | ±1.5                         |         |                              |         |                               |         |

## 2. WiFi 5GHz 802.11 n20 mode

Conducted (average) output power.

|                               | Lowest frequency<br>5745 MHz |         | Middle frequency<br>5785 MHz |         | Highest frequency<br>5825 MHz |         |
|-------------------------------|------------------------------|---------|------------------------------|---------|-------------------------------|---------|
|                               | Chain A                      | Chain B | Chain A                      | Chain B | Chain A                       | Chain B |
| Maximum conducted power (dBm) | 15.49                        | 15.13   | 15.26                        | 14.88   | 15.36                         | 14.89   |
| Maximum EIRP power (dBm)      | 20.49                        | 20.13   | 20.26                        | 19.88   | 20.36                         | 19.89   |
| Measurement uncertainty (dB)  | ±1.5                         |         |                              |         |                               |         |

| MIMO                          | Lowest frequency<br>5745 MHz |        | Middle frequency<br>5785 MHz |        | Highest frequency<br>5825 MHz |        |
|-------------------------------|------------------------------|--------|------------------------------|--------|-------------------------------|--------|
|                               | Chain A+B                    |        | Chain A+B                    |        | Chain A+B                     |        |
|                               | Port A                       | Port B | Port A                       | Port B | Port A                        | Port B |
| Maximum conducted power (dBm) | 13.49                        | 13.19  | 13.18                        | 13.20  | 13.36                         | 13.74  |
|                               | Port A+B                     |        | Port A+B                     |        | Port A+B                      |        |
| Maximum conducted power (dBm) | 16.35                        |        | 16.20                        |        | 16.56                         |        |
| Maximum EIRP power (dBm)      | 21.35                        |        | 21.20                        |        | 21.56                         |        |
| Measurement uncertainty (dB)  | ±1.5                         |        |                              |        |                               |        |

## 3. WiFi 5GHz 802.11 n40 mode

Conducted (average) output power.

|                               | Lowest frequency<br>5755 MHz |         | Highest frequency<br>5795 MHz |         |
|-------------------------------|------------------------------|---------|-------------------------------|---------|
|                               | Chain A                      | Chain B | Chain A                       | Chain B |
| Maximum conducted power (dBm) | 16.29                        | 16.21   | 16.29                         | 16.15   |
| Maximum EIRP power (dBm)      | 21.29                        | 21.21   | 21.29                         | 21.15   |
| Measurement uncertainty (dB)  | ±1.5                         |         |                               |         |

| MIMO                          | Lowest frequency<br>5755 MHz |        | Highest frequency<br>5795 MHz |        |
|-------------------------------|------------------------------|--------|-------------------------------|--------|
|                               | Chain A+B                    |        | Chain A+B                     |        |
|                               | Port A                       | Port B | Port A                        | Port B |
| Maximum conducted power (dBm) | 16.50                        | 16.51  | 16.47                         | 16.42  |
|                               | Port A+B                     |        | Port A+B                      |        |
| Maximum conducted power (dBm) | 19.52                        |        | 19.46                         |        |
| Maximum EIRP power (dBm)      | 24.52                        |        | 24.46                         |        |
| Measurement uncertainty (dB)  | ±1.2                         |        |                               |        |

Verdict: PASS

#### 4. WiFi 5GHz 802.11 ac80 mode

Peak Conducted Output Power.

|                               | Middle frequency<br>5775 MHz |         |
|-------------------------------|------------------------------|---------|
|                               | Chain A                      | Chain B |
|                               |                              |         |
| Maximum conducted power (dBm) | 24.96                        | 25.19   |
| Maximum EIRP power (dBm)      | 29.96                        | 30.19   |
| Measurement uncertainty (dB)  | $\pm 1.2$                    |         |

| MIMO                          | Middle frequency<br>5775 MHz |        |
|-------------------------------|------------------------------|--------|
|                               | Chain A+B                    |        |
|                               | Port A                       | Port B |
| Maximum conducted power (dBm) | 24.82                        | 25.42  |
|                               | Port A+B                     |        |
| Maximum conducted power (dBm) | 28.14                        |        |
| Maximum EIRP power (dBm)      | 33.14                        |        |
| Measurement uncertainty (dB)  | $\pm 1.2$                    |        |

Verdict: PASS

Conducted (average) output power. These results are for information purposes only.


|                               | Middle frequency<br>5775 MHz |         |
|-------------------------------|------------------------------|---------|
|                               | Chain A                      | Chain B |
| Maximum conducted power (dBm) | 16.42                        | 16.63   |
| Maximum EIRP power (dBm)      | 21.42                        | 21.63   |
| Measurement uncertainty (dB)  | $\pm 1.2$                    |         |

| MIMO                          | Middle frequency<br>5775 MHz |        |
|-------------------------------|------------------------------|--------|
|                               | Chain A+B                    |        |
|                               | Port A                       | Port B |
| Maximum conducted power (dBm) | 16.51                        | 16.55  |
|                               | Port A+B                     |        |
| Maximum conducted power (dBm) | 19.54                        |        |
| Maximum EIRP power (dBm)      | 24.54                        |        |
| Measurement uncertainty (dB)  | $\pm 1.2$                    |        |

# 1. WiFi 5GHz 802.11 a mode

Middle Channel: 5785 MHz. Chain A

Agilent 12:48:06 Feb 25, 2014 R T

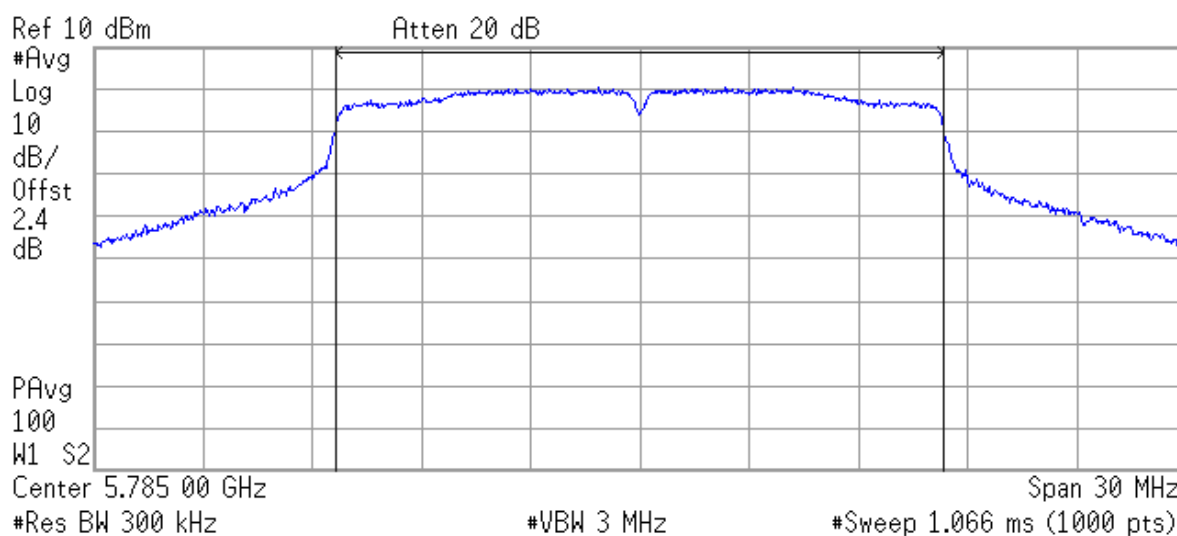

Channel Power

15.67 dBm /16.6200 MHz


Power Spectral Density

-56.53 dBm/Hz

# 2. WiFi 5GHz 802.11 n20 mode

SISO. Lowest Channel: 5745 MHz. Chain A

Agilent 12:59:55 Feb 25, 2014 R T

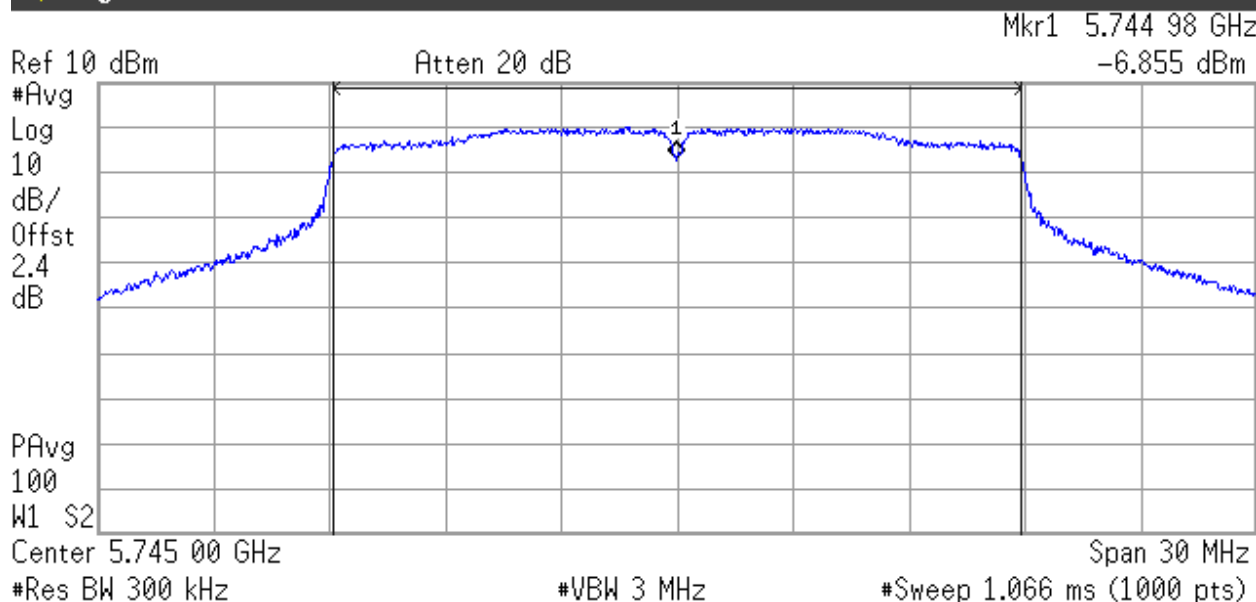

Channel Power

15.49 dBm /17.8000 MHz

Power Spectral Density


-57.01 dBm/Hz

MIMO. Highest Channel: 5825 MHz. Chain A+B. Port A

Agilent 13:06:29 Feb 25, 2014

R T

Mkr1 5.824 98 GHz  
-9.181 dBm

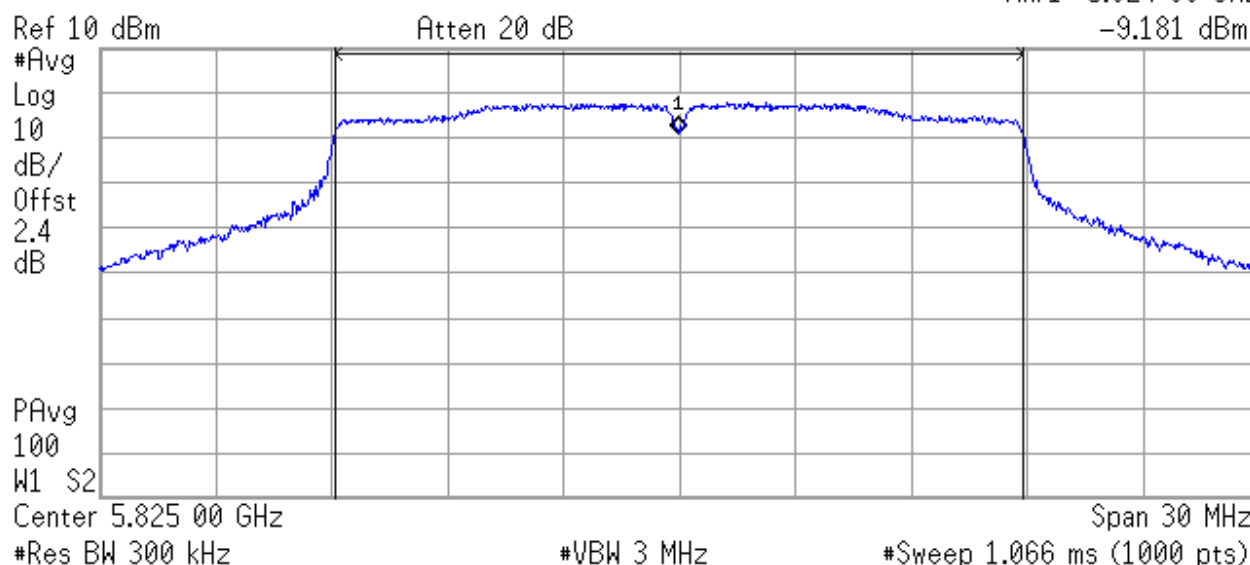

**Channel Power**

13.36 dBm /17.8000 MHz

**Power Spectral Density**


-59.15 dBm/Hz

Highest Channel: 5825 MHz. Chain A+B. Port B

Agilent 13:20:39 Feb 25, 2014

R T

Mkr1 5.824 98 GHz  
-8.421 dBm

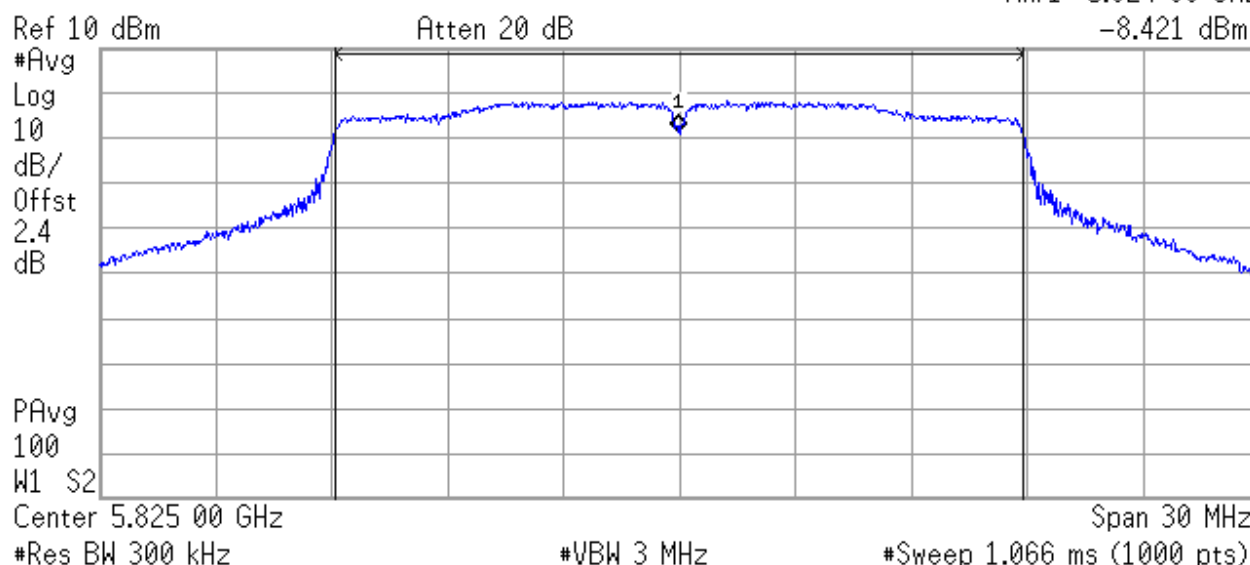

**Channel Power**


13.74 dBm /17.7800 MHz

**Power Spectral Density**

-58.76 dBm/Hz


### 3. WiFi 5GHz 802.11 n40 mode

SISO. Lowest Channel: 5755 MHz. Chain A

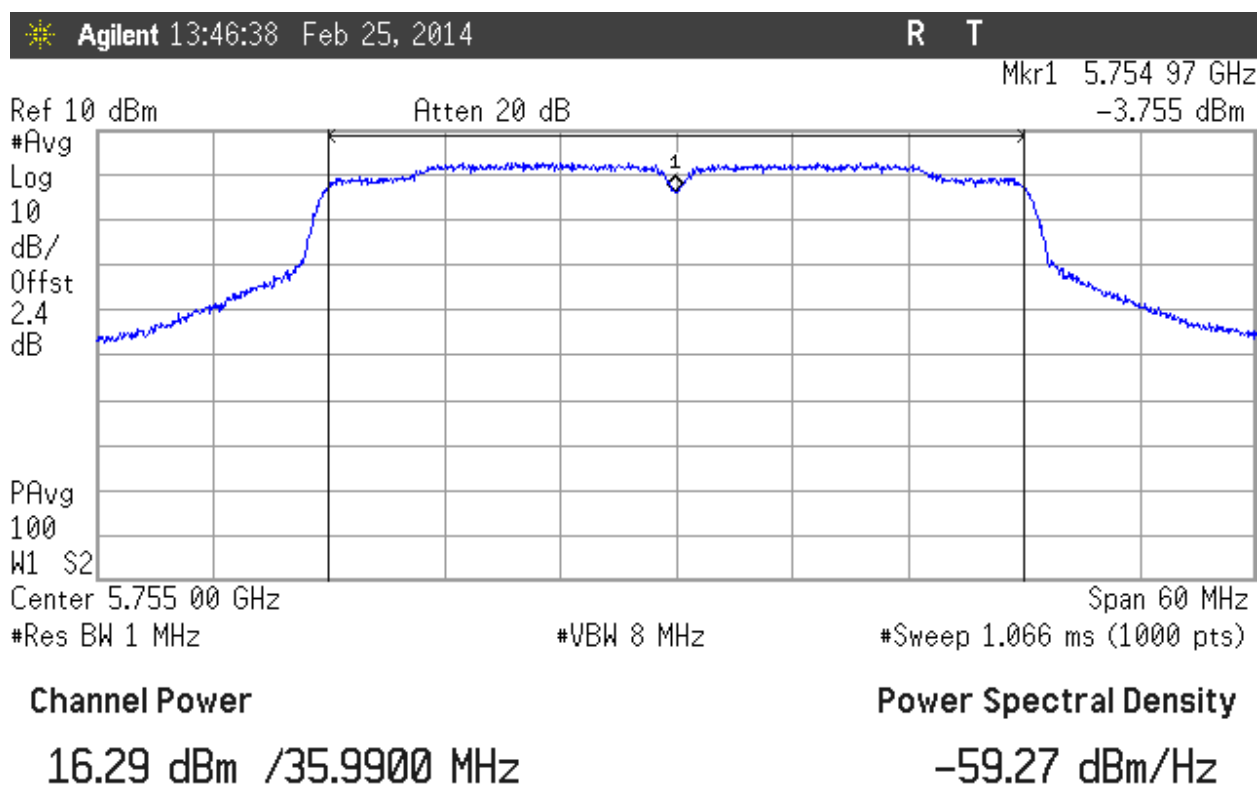

MIMO. Lowest Channel: 5755 MHz. Chain A+B. Port A

Agilent R T

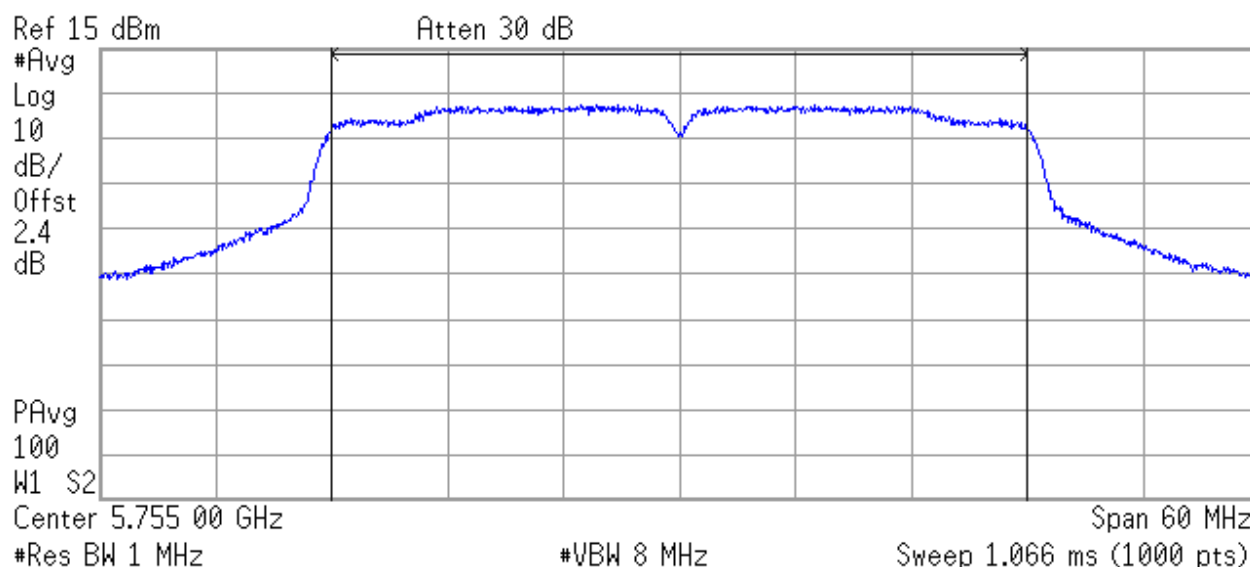

**Channel Power**


16.50 dBm /35.9900 MHz

**Power Spectral Density**

-59.06 dBm/Hz

Lowest Channel: 5755 MHz. Chain A+B. Port B

Agilent R T

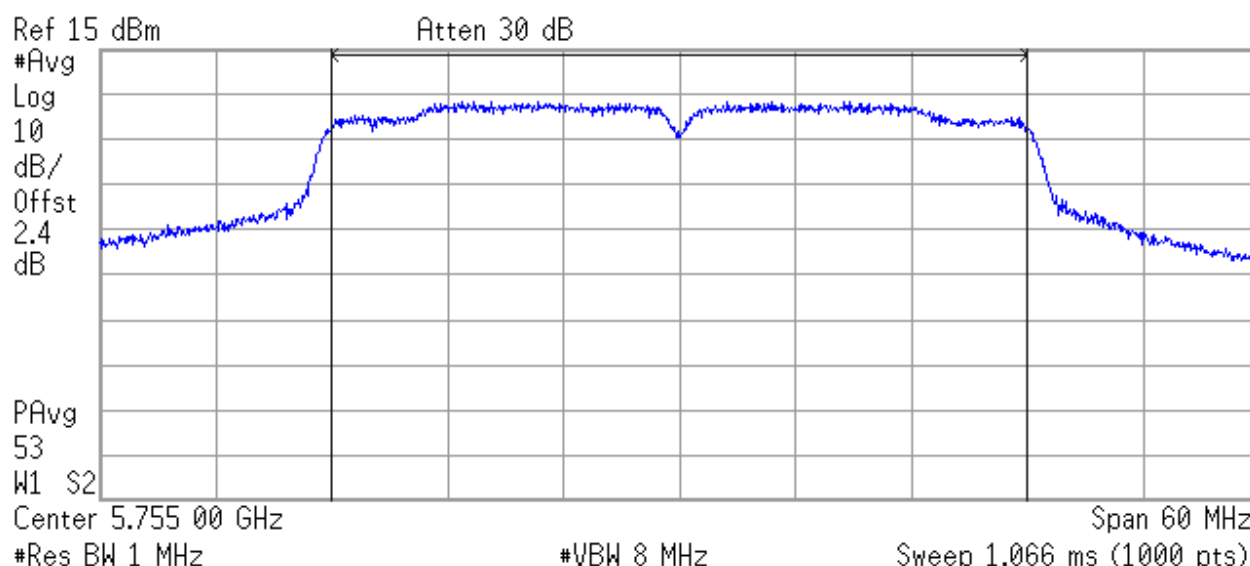

**Channel Power**


16.51 dBm /35.9900 MHz

**Power Spectral Density**


-59.05 dBm/Hz

#### 4. WiFi 5GHz 802.11 ac80 mode


Peak Conducted Output Power.  
SISO. Middle Channel: 5775 MHz. Chain B.

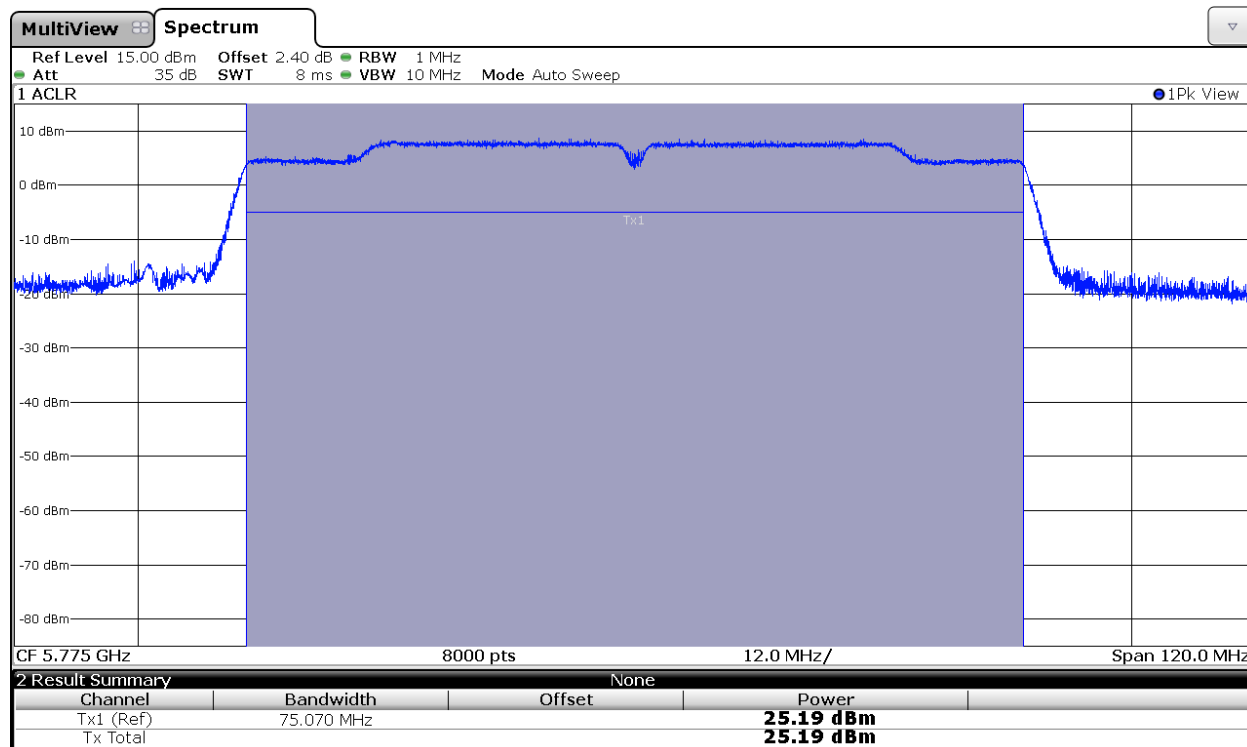

MIMO. Middle Channel: 5775 MHz. Chain A+B. Port A

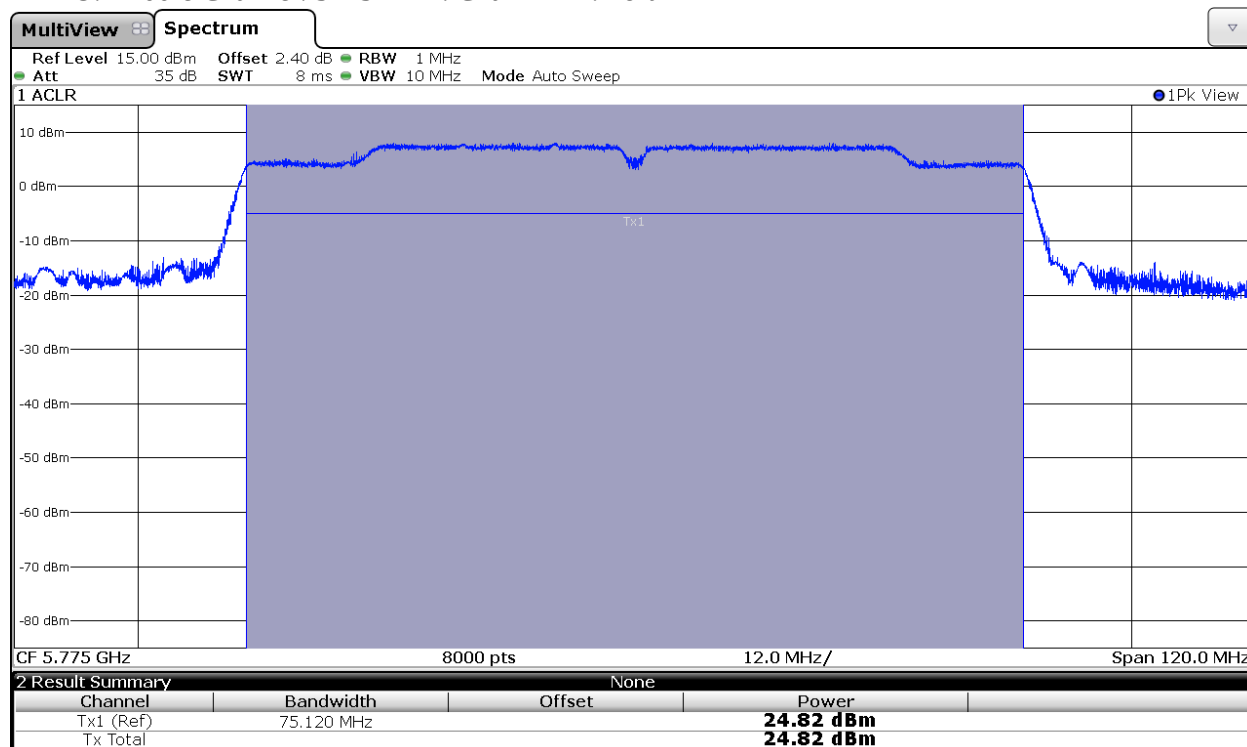


MIMO. Middle Channel: 5775 MHz. Chain A+B. Port B

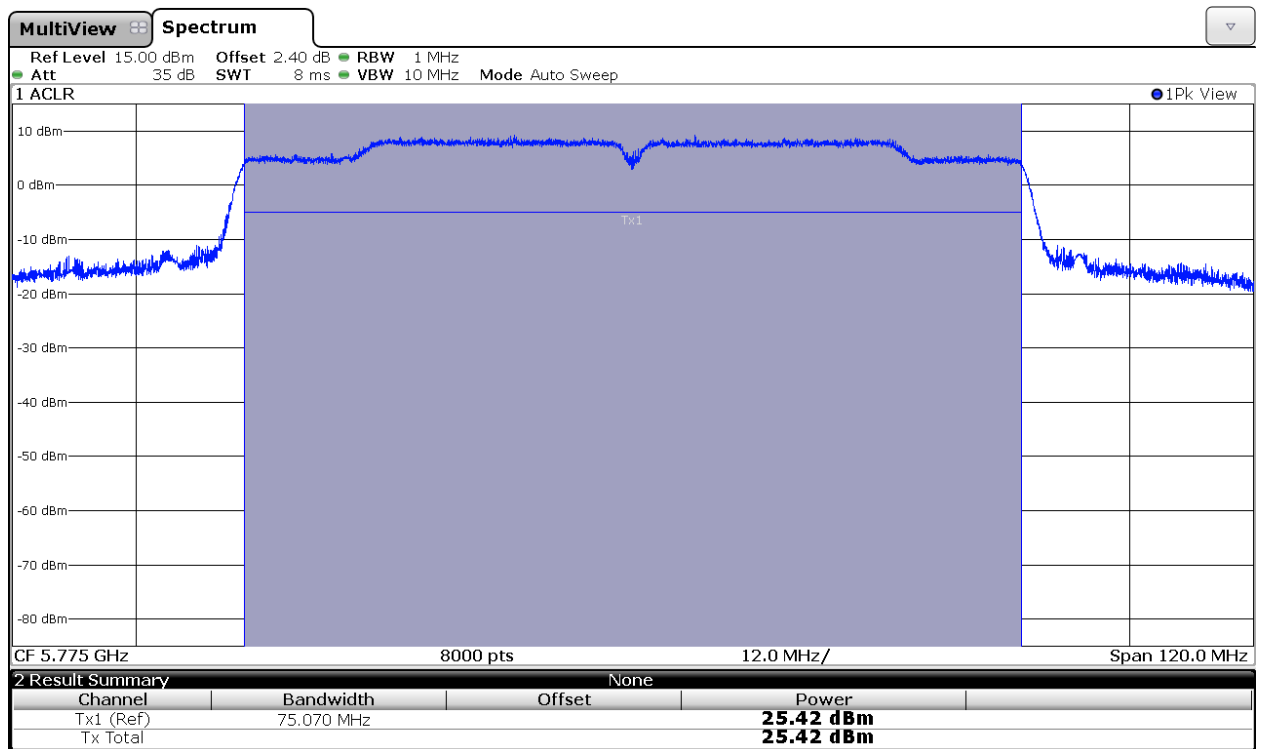


Conducted (average) output power (for information purposes only).


SISO. Middle Channel: 5775 MHz. Chain B.

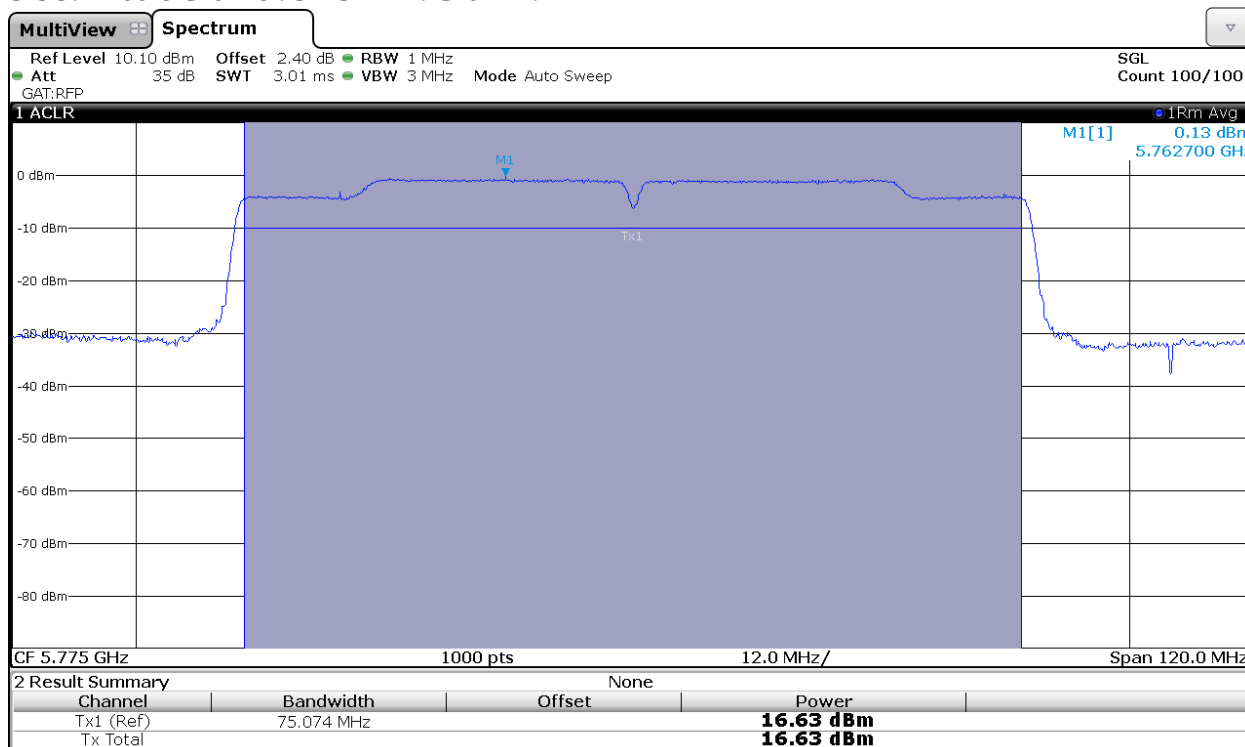

MIMO. Middle Channel: 5775 MHz. Chain A+B. Port A

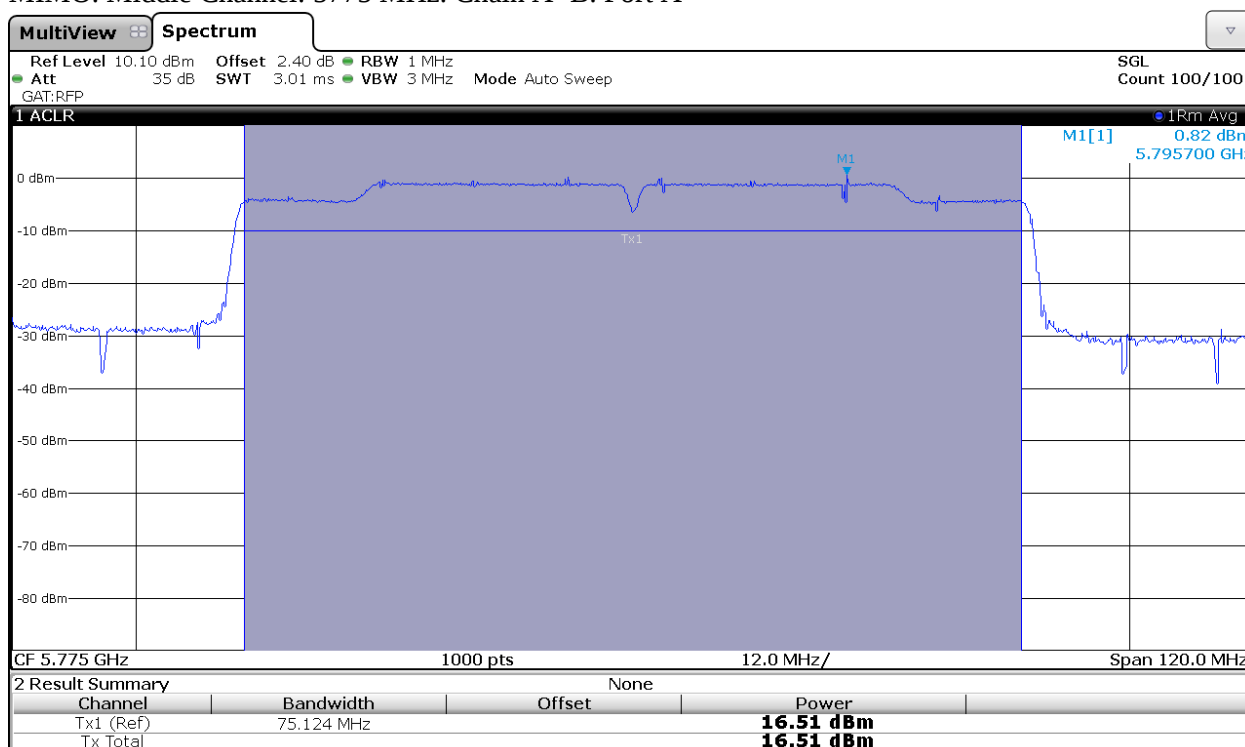

MIMO. Middle Channel: 5775 MHz. Chain A+B. Port B

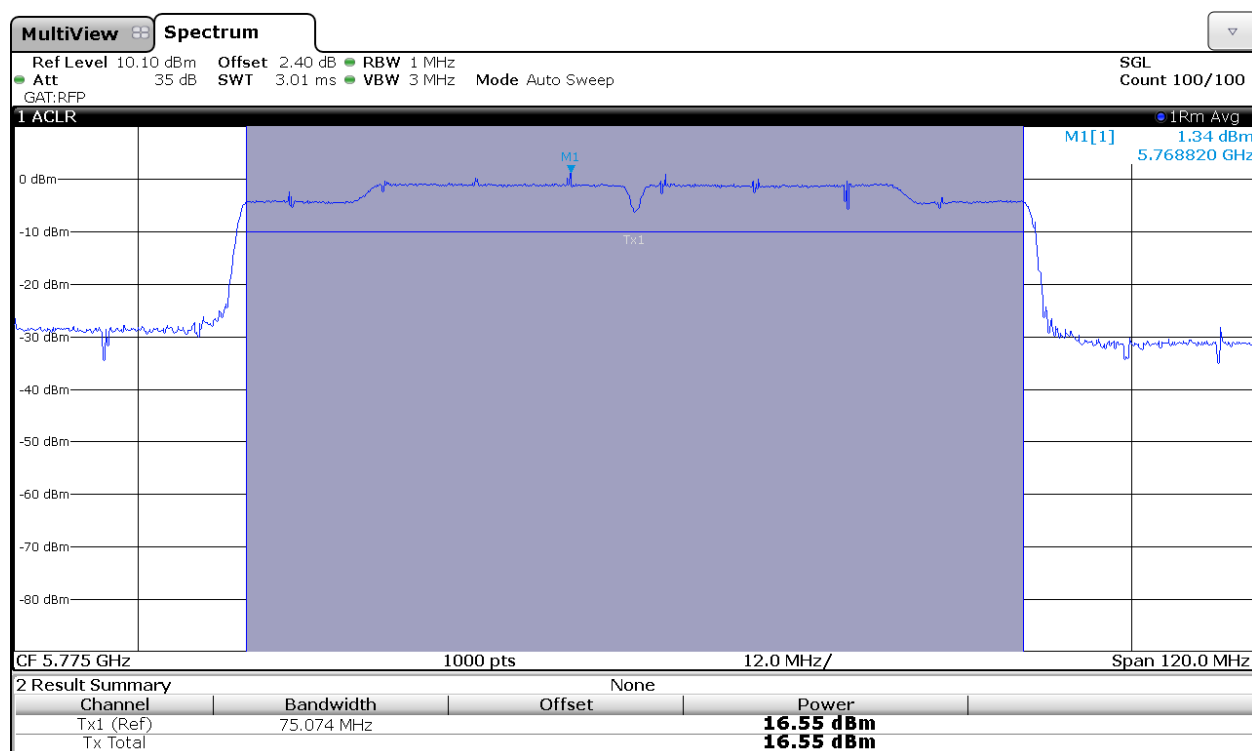

## Section 15.247 Subclause (d) / RSS-210 A8.5. Emission limitations conducted (Transmitter)

### SPECIFICATION

In any 100 kHz bandwidth outside the frequency band in which the digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB.

#### 1. WiFi 5GHz 802.11 a mode

##### Reference Level Measurement

|                                   | Lowest frequency<br>5745 MHz |         | Middle frequency<br>5785 MHz |         | Highest frequency<br>5825 MHz |         |
|-----------------------------------|------------------------------|---------|------------------------------|---------|-------------------------------|---------|
|                                   | Chain A                      | Chain B | Chain A                      | Chain B | Chain A                       | Chain B |
| Reference Level Measurement (dBm) | 5.90                         | 4.09    | 5.87                         | 4.13    | 5.87                          | 4.44    |
| Measurement uncertainty (dB)      | ±1.5                         |         |                              |         |                               |         |

##### Chain A / Chain B

| Lowest frequency 5745 MHz                      | Limit (dBm)     |
|------------------------------------------------|-----------------|
| All peaks are more than 20 dB below the limit. | -24.10 / -25.91 |

| Middle frequency 5785 MHz                      | Limit (dBm)     |
|------------------------------------------------|-----------------|
| All peaks are more than 20 dB below the limit. | -24.13 / -25.87 |

| Highest frequency 5825 MHz                     | Limit (dBm)     |
|------------------------------------------------|-----------------|
| All peaks are more than 20 dB below the limit. | -24.13 / -25.56 |

Verdict: PASS

## 2. WiFi 5GHz 802.11 n20 mode

### Reference Level Measurement

|                                   | Lowest frequency<br>5745 MHz |         | Middle frequency<br>5785 MHz |         | Highest frequency<br>5825 MHz |         |
|-----------------------------------|------------------------------|---------|------------------------------|---------|-------------------------------|---------|
|                                   | Chain A                      | Chain B | Chain A                      | Chain B | Chain A                       | Chain B |
| Reference Level Measurement (dBm) | 5.18                         | 3.57    | 5.66                         | 3.79    | 5.38                          | 4.41    |
| Measurement uncertainty (dB)      | ±1.5                         |         |                              |         |                               |         |

### Chain A / Chain B

| Lowest frequency 5745 MHz                      | Limit (dBm)     |
|------------------------------------------------|-----------------|
| All peaks are more than 20 dB below the limit. | -24.82 / -26.43 |

| Middle frequency 5785 MHz                      | Limit (dBm)     |
|------------------------------------------------|-----------------|
| All peaks are more than 20 dB below the limit. | -24.34 / -26.21 |

| Highest frequency 5825 MHz                     | Limit (dBm)     |
|------------------------------------------------|-----------------|
| All peaks are more than 20 dB below the limit. | -24.62 / -25.59 |

Verdict: PASS

### 3. WiFi 5GHz 802.11 n40 mode

#### Reference Level Measurement

|                                   | Lowest frequency<br>5755 MHz |         | Highest frequency<br>5795 MHz |         |
|-----------------------------------|------------------------------|---------|-------------------------------|---------|
|                                   | Chain A                      | Chain B | Chain A                       | Chain B |
| Reference Level Measurement (dBm) | 2.87                         | 2.07    | 3.83                          | 2.67    |
| Measurement uncertainty (dB)      | ±1.5                         |         |                               |         |

#### Chain A

##### Lowest frequency 5755 MHz

| Spurious frequency (GHz) | Level (dBm) | Limit (dBm) |
|--------------------------|-------------|-------------|
| 17.27235                 | -45.46      | -27.13      |

| Highest frequency 5795 MHz                     | Limit (dBm) |
|------------------------------------------------|-------------|
| All peaks are more than 20 dB below the limit. | -26.17      |

#### Chain B

| Lowest frequency 5755 MHz                      | Limit (dBm) |
|------------------------------------------------|-------------|
| All peaks are more than 20 dB below the limit. | -27.93      |

| Highest frequency 5795 MHz                     | Limit (dBm) |
|------------------------------------------------|-------------|
| All peaks are more than 20 dB below the limit. | -27.33      |

Verdict: PASS

#### 4. WiFi 5GHz 802.11 ac80 mode

##### Reference Level Measurement

|                                   | Middle frequency<br>5775 MHz |         |
|-----------------------------------|------------------------------|---------|
|                                   | Chain A                      | Chain B |
| Reference Level Measurement (dBm) | 1.12                         | 0.45    |
| Measurement uncertainty (dB)      | $\pm 1.5$                    |         |

##### Chain A / Chain B


| Middle frequency 5775 MHz                      | Limit (dBm)     |
|------------------------------------------------|-----------------|
| All peaks are more than 20 dB below the limit. | -18.88 / -19.55 |

Verdict: PASS (NOTE: The limit is set to -20 dBc since the maximum peak conducted output power was measured for this mode.)


See next plot of worst case: Mode n40. Lowest Channel. Chain A: 5755 MHz.

Number of sweep points: 30,000.

Plot 30 MHz to 3 GHz:

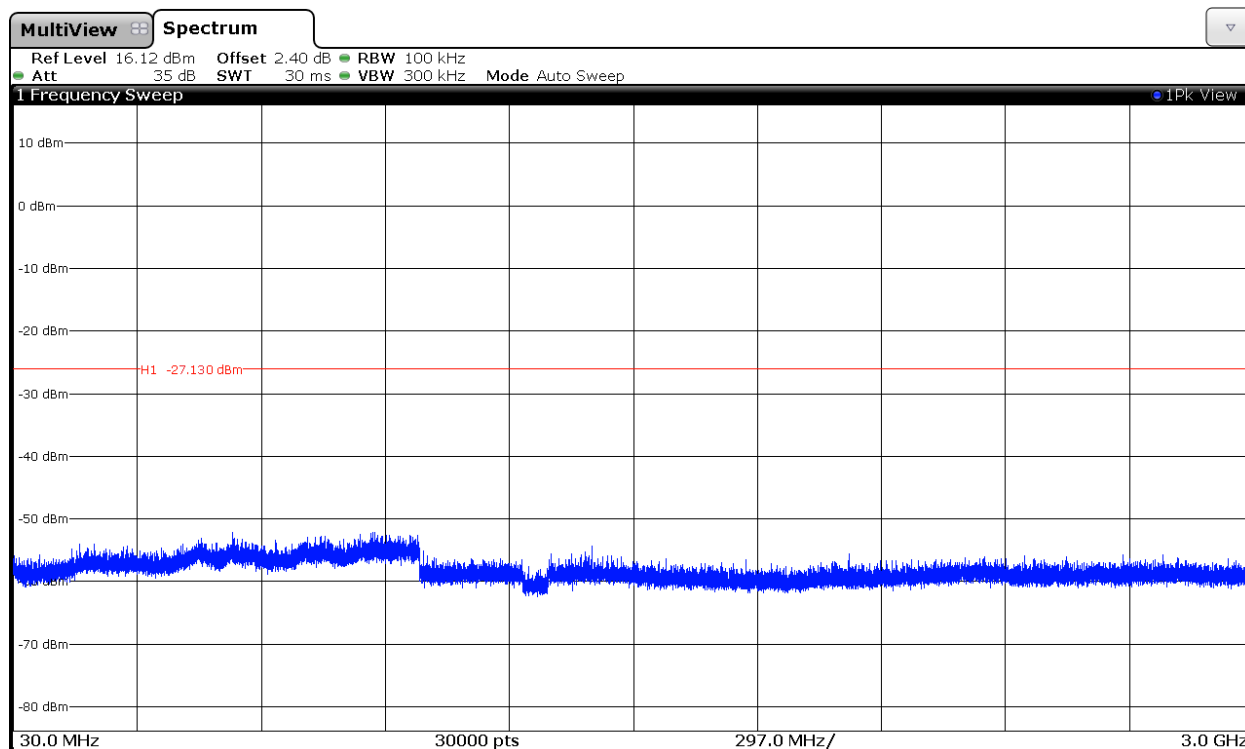


Plot 3 GHz to 6 GHz:

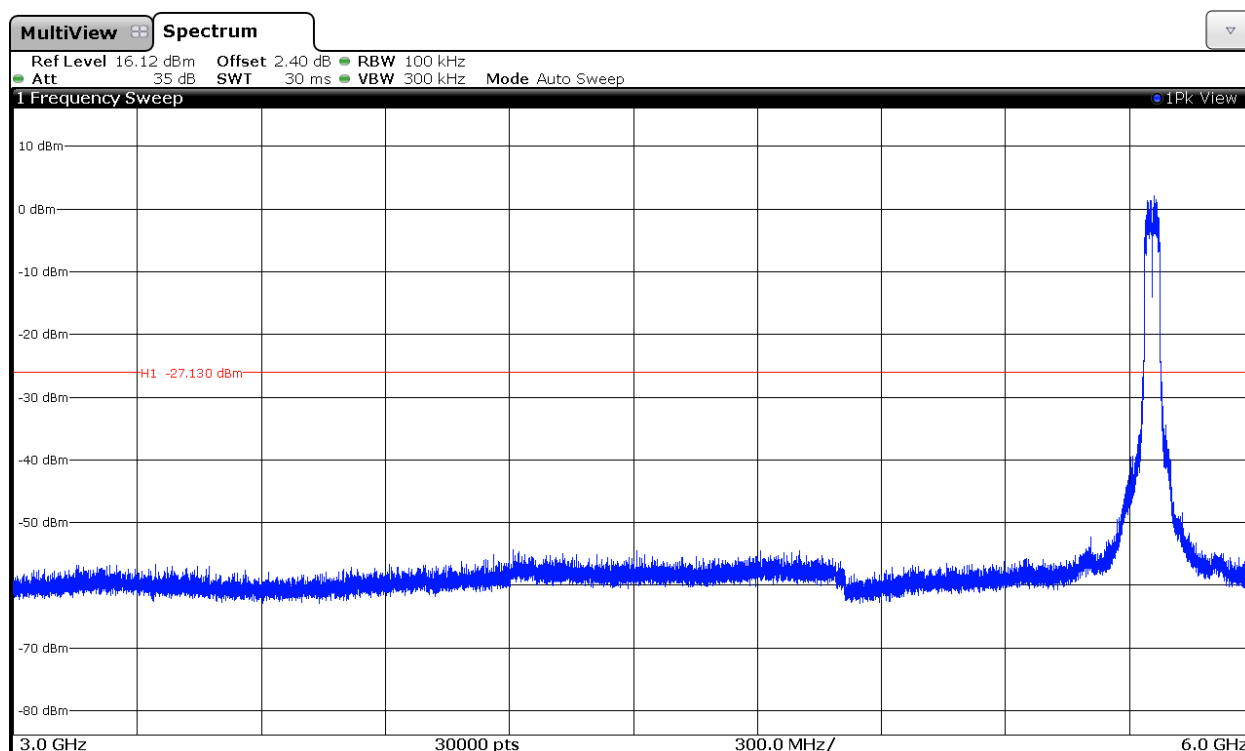


Note: The peak above the limit is the carrier frequency.


Plot 6 GHz to 9 GHz:

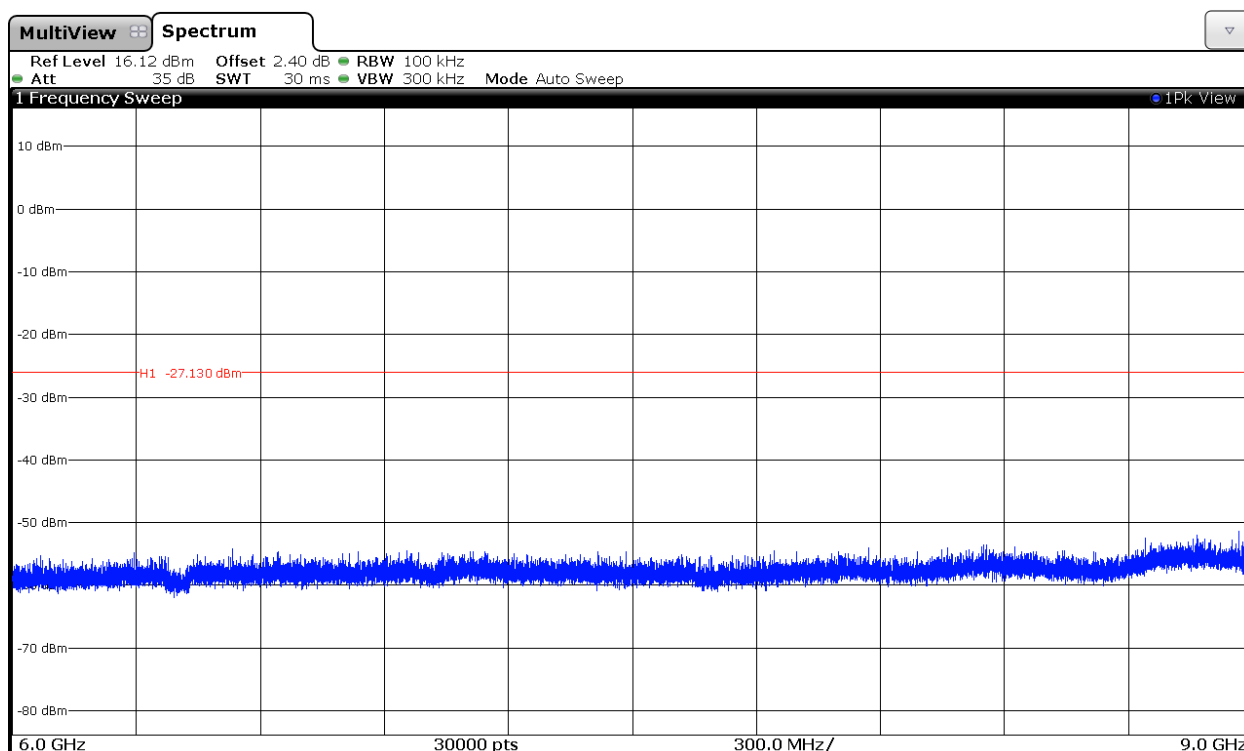


Plot 9 GHz to 12 GHz:

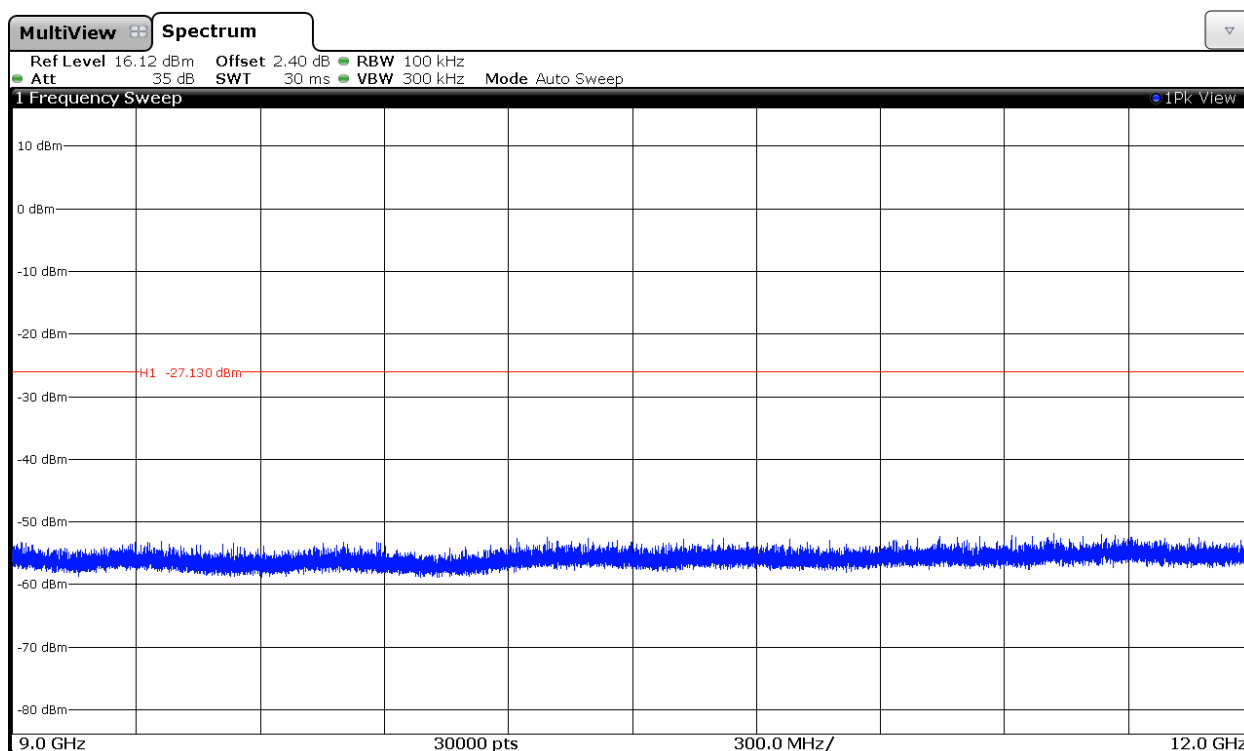


Plot 12 GHz to 15 GHz:

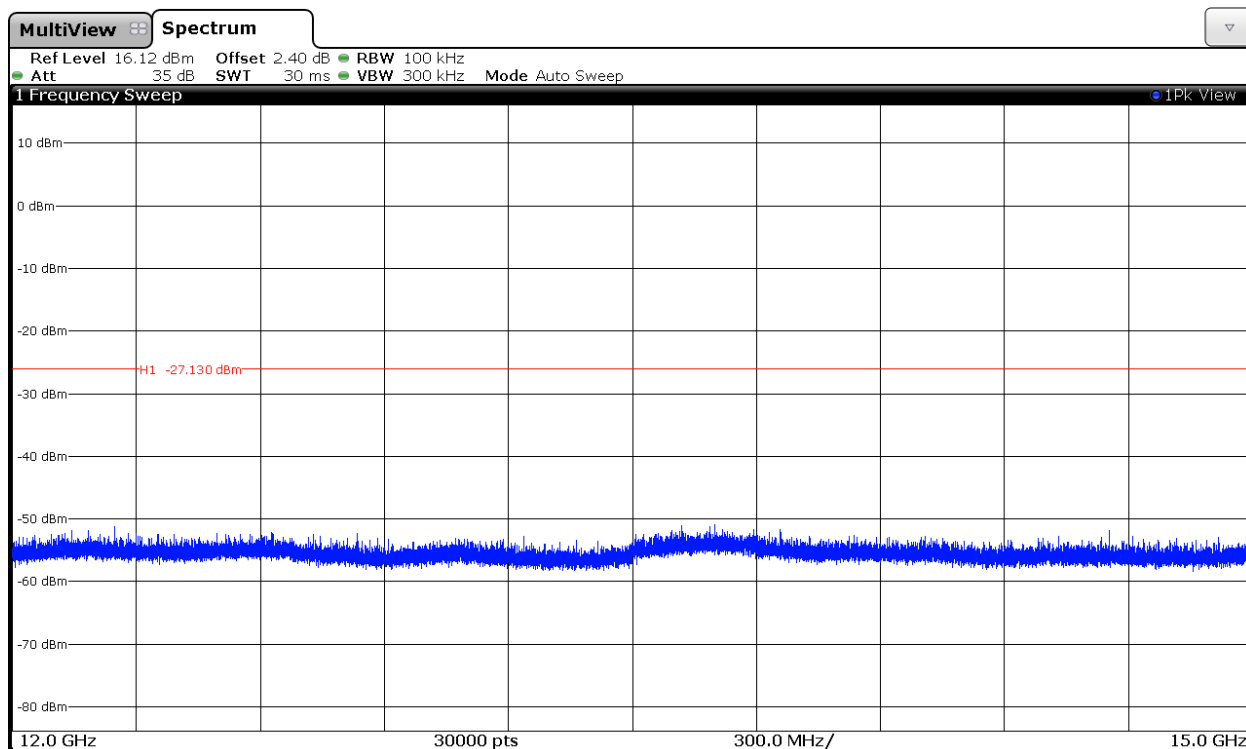


Plot 15 GHz to 18 GHz:

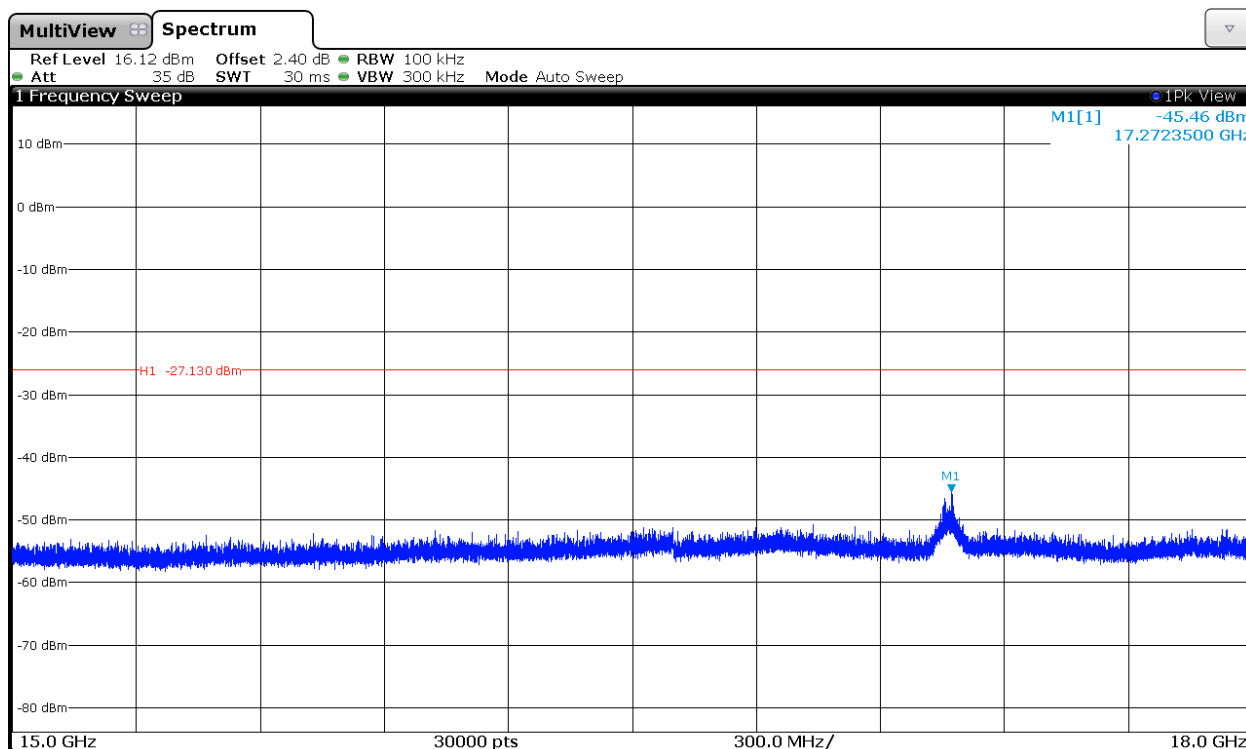


Plot 18 GHz to 21 GHz:

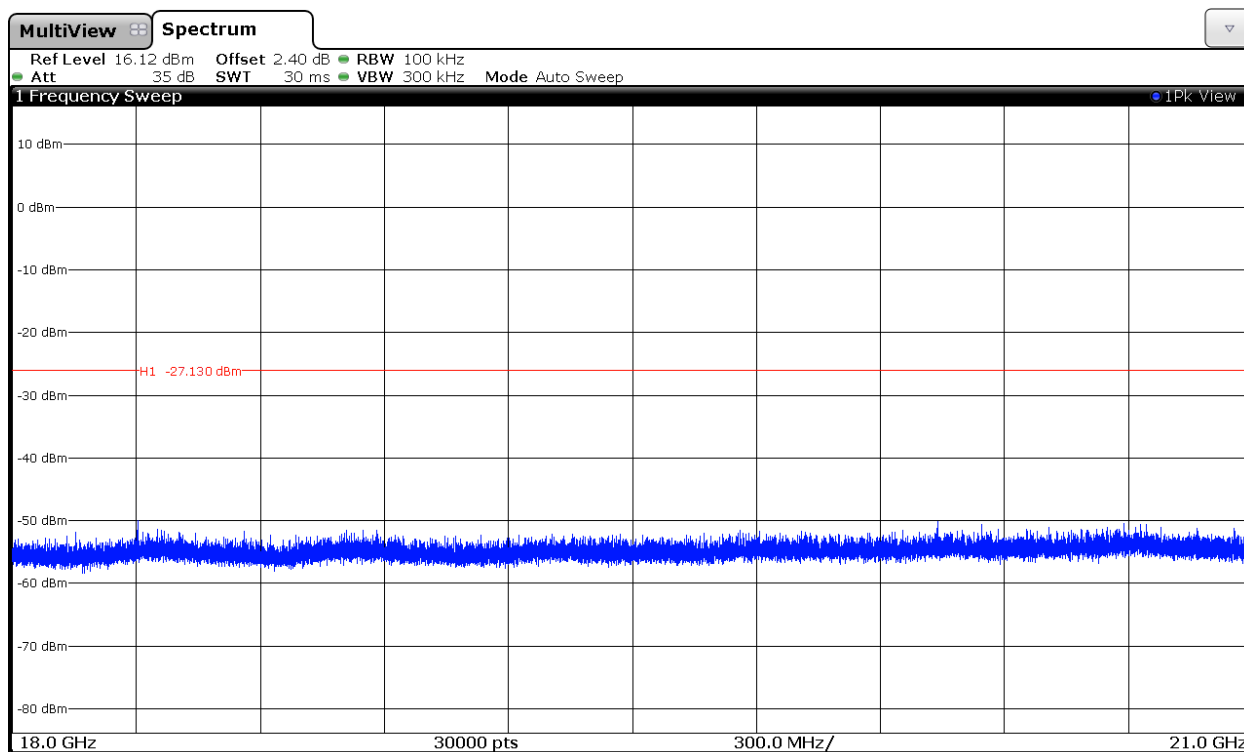


Plot 21 GHz to 24 GHz:

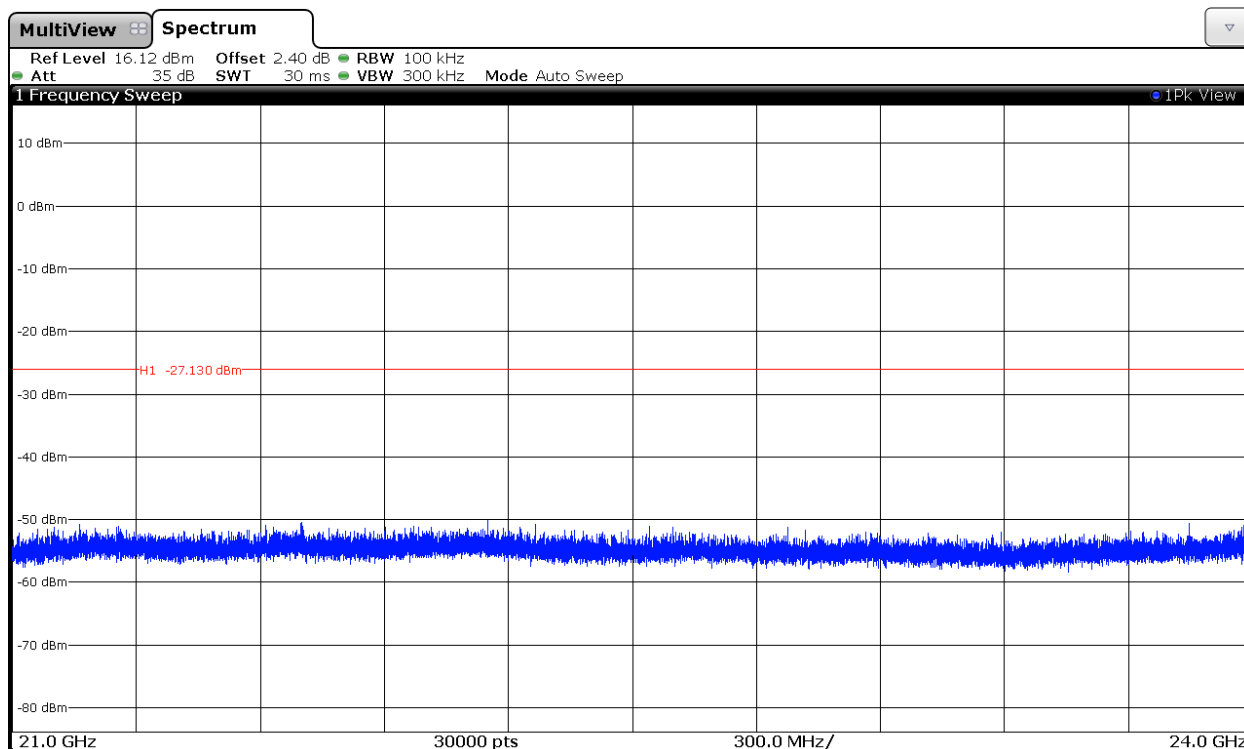


Plot 24 GHz to 27 GHz:

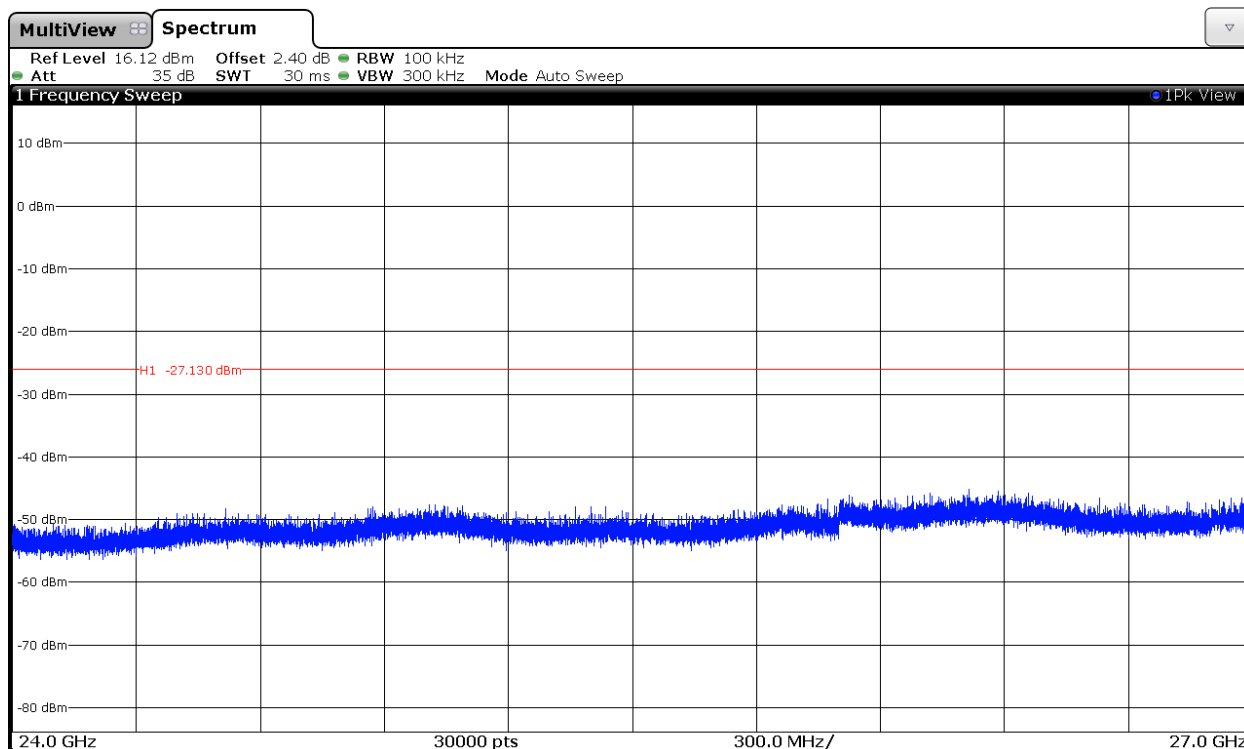


Plot 27 GHz to 30 GHz:

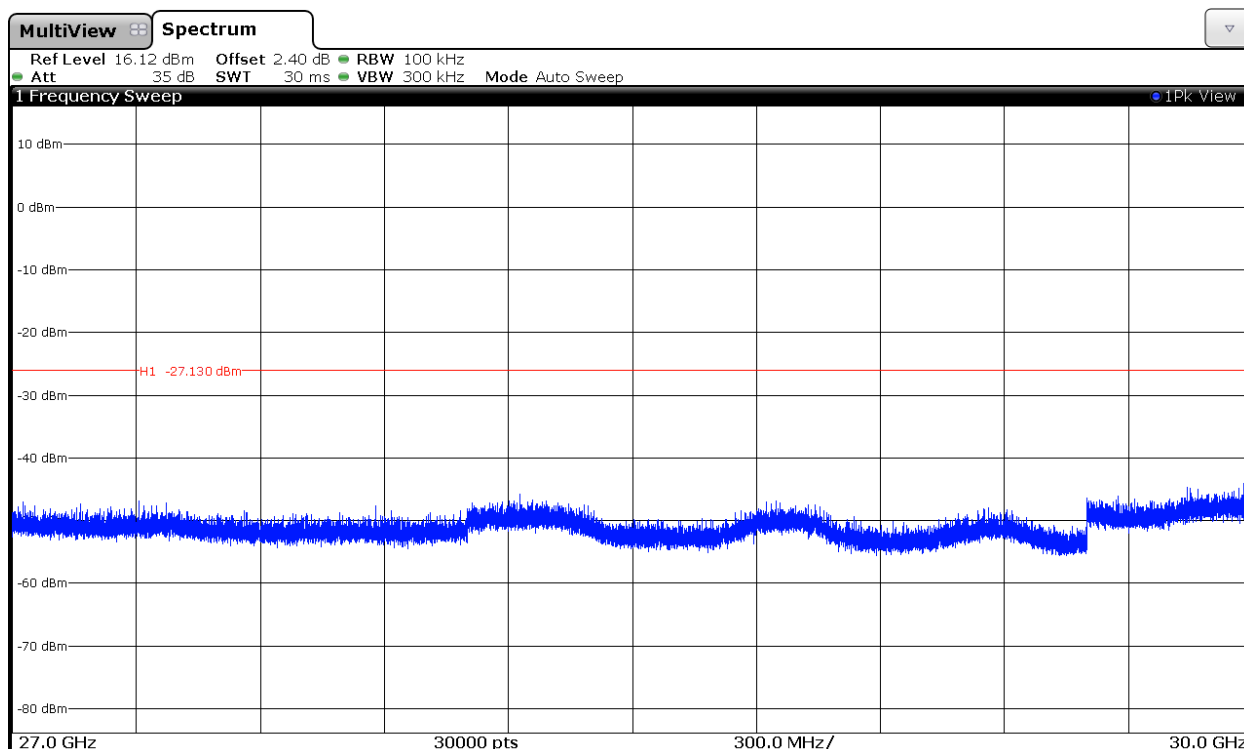


Plot 30 GHz to 33 GHz:

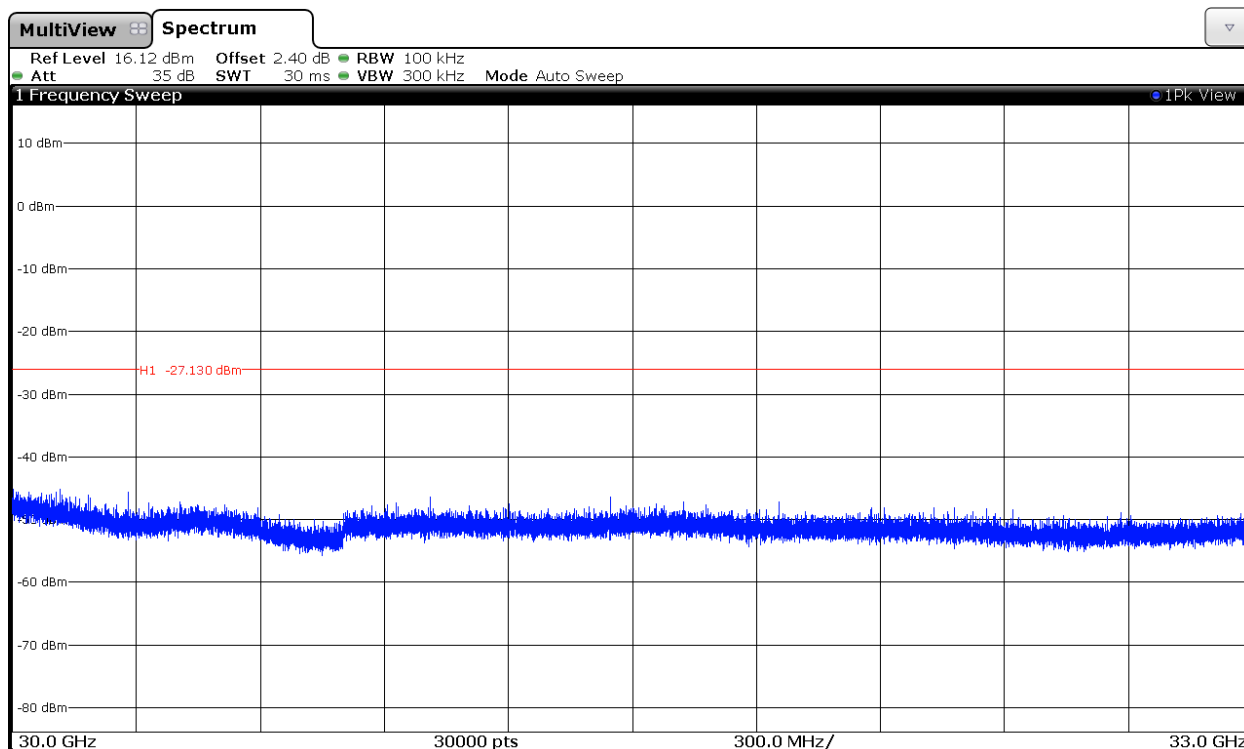


Plot 33 GHz to 36 GHz:

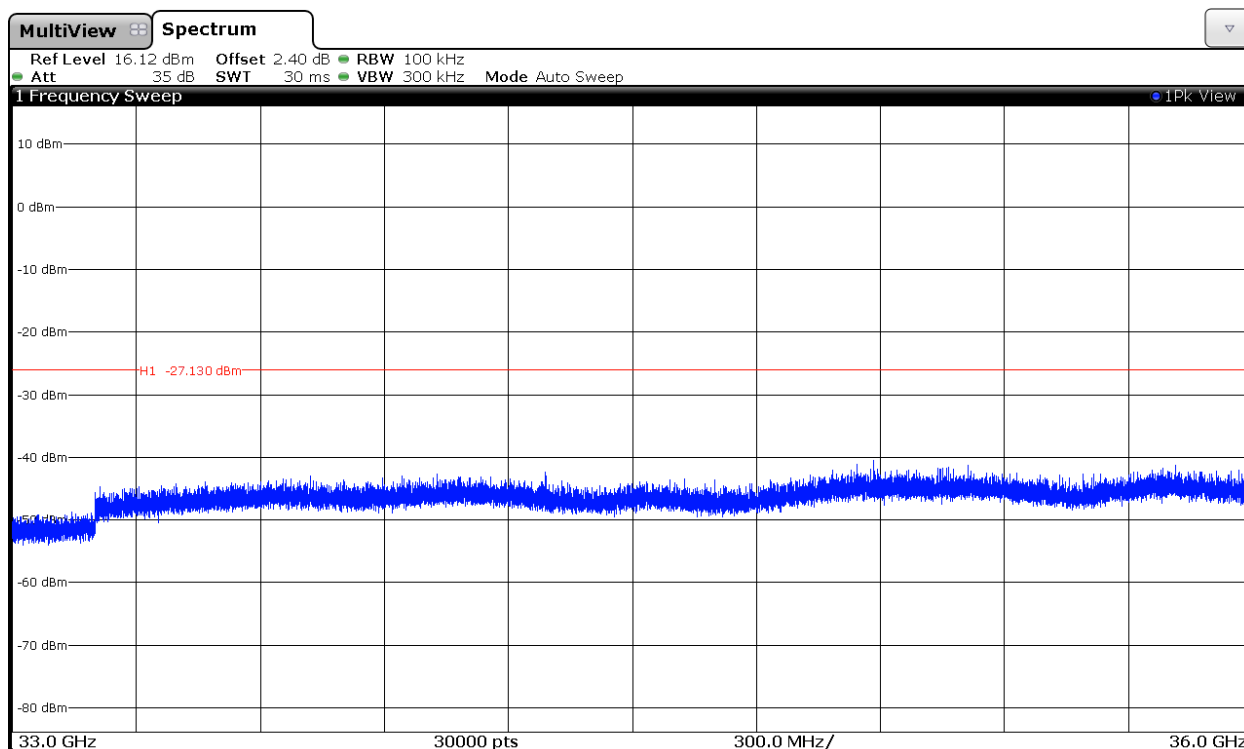

Plot 36 GHz to 39 GHz:

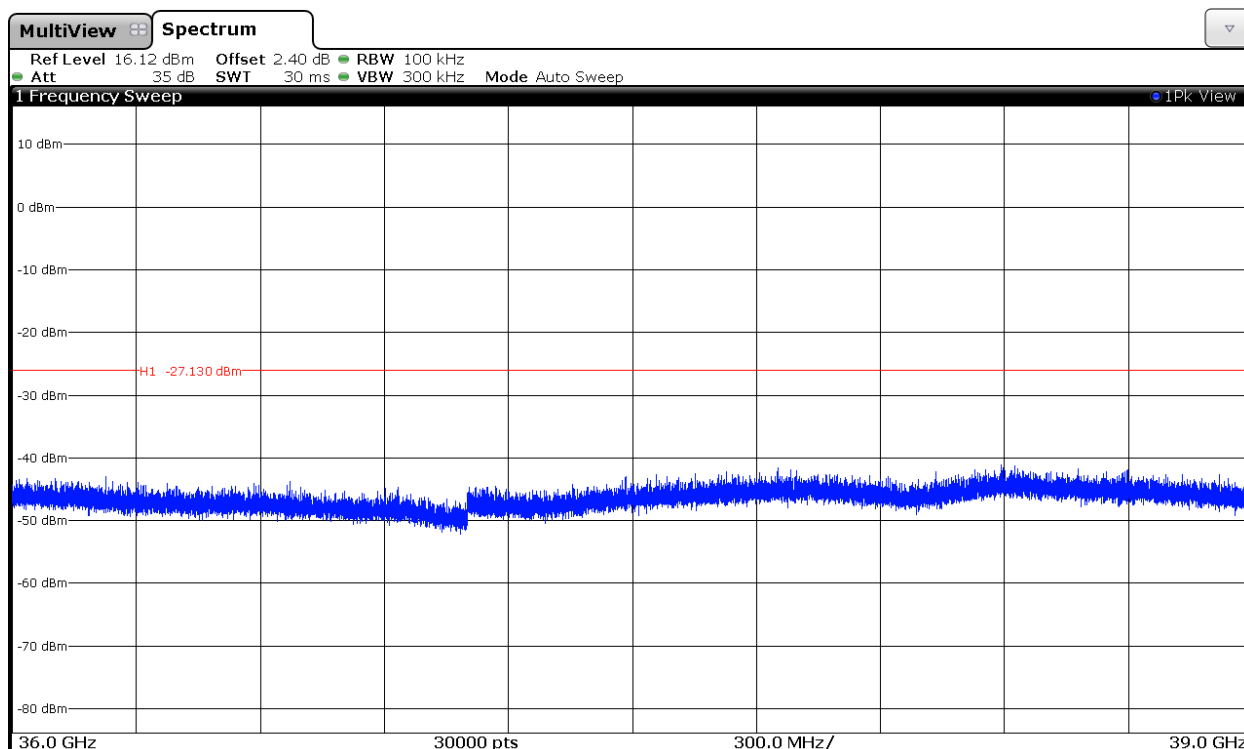

Plot 39 GHz to 40 GHz:

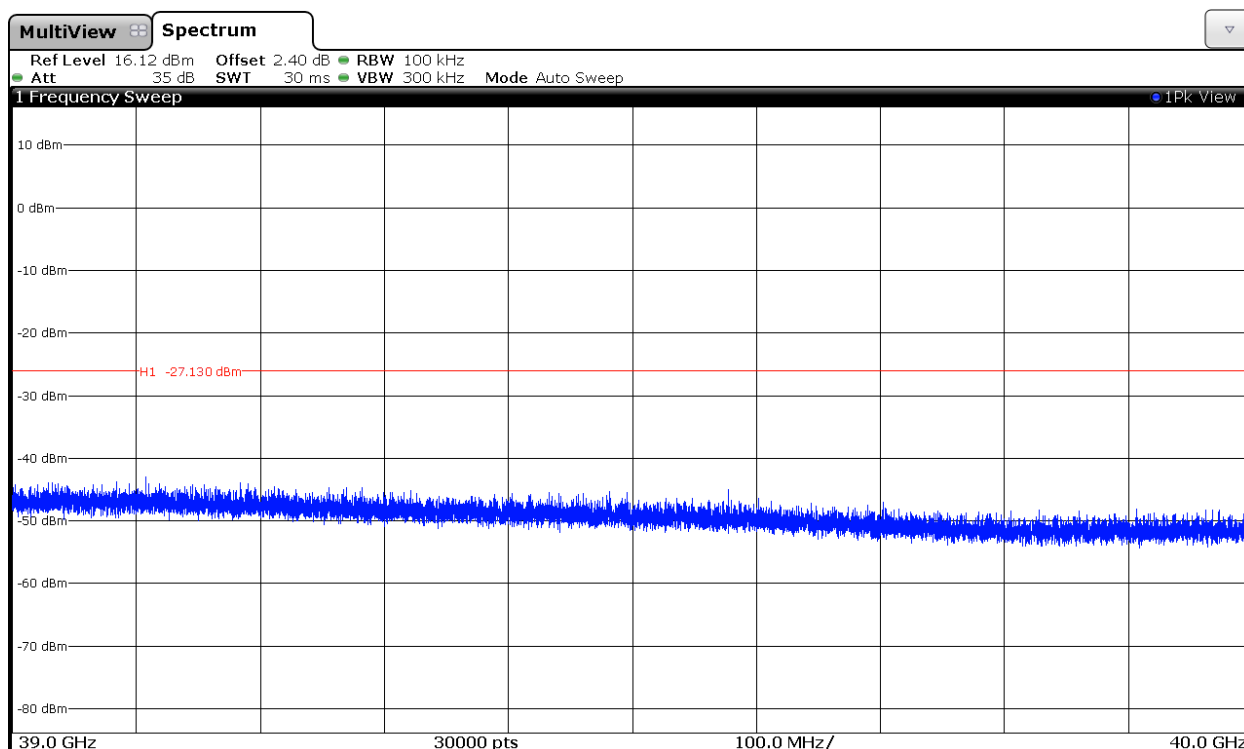

## Section 15.247 Subclause (d) / RSS-210 A8.5. Band-edge emissions compliance (Transmitter)

### SPECIFICATION

Emissions outside the frequency band in which the intentional radiator is operating shall be at least 20dB below the highest level of the desired power. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB.


### RESULTS:

#### 1. WiFi 5GHz 802.11 a mode


### LOW FREQUENCY SECTION 5745 MHz. CONDUCTED.

See next plots.

Chain A

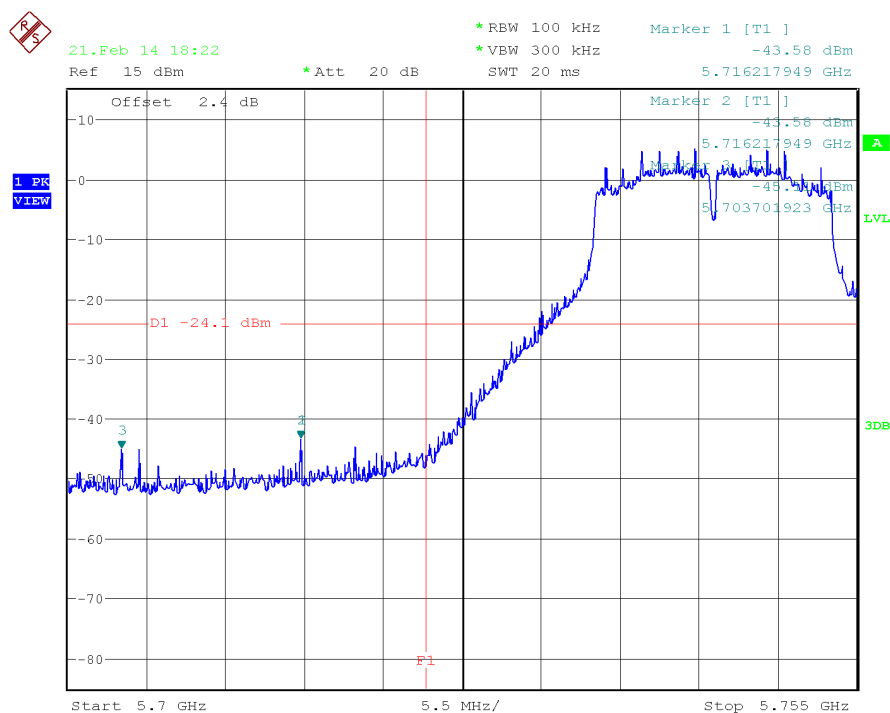


## Chain B

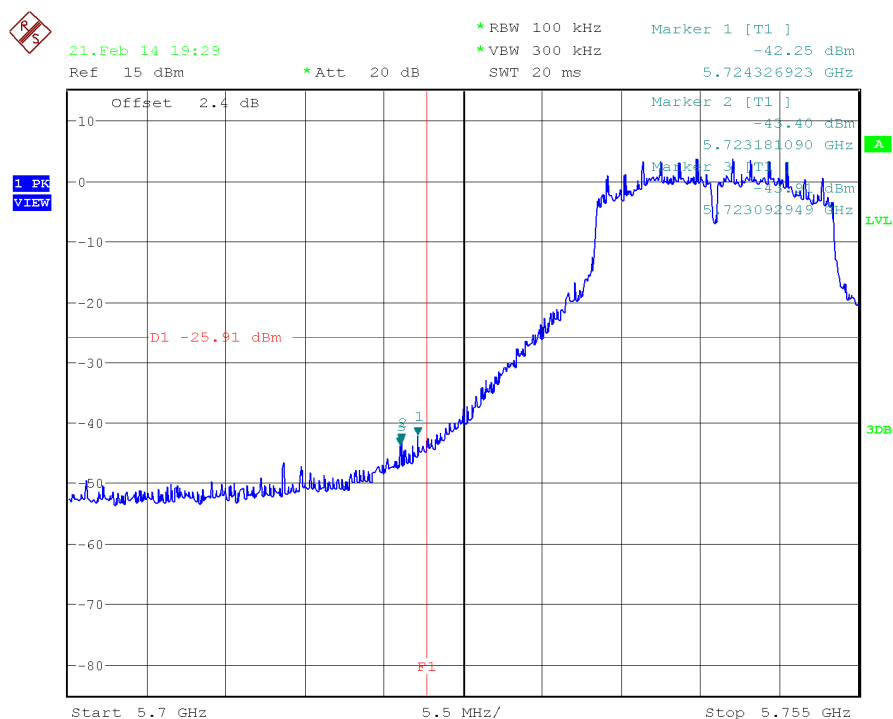


## HIGH FREQUENCY SECTION 5825 MHz. CONDUCTED.

See next plots.

## Chain A

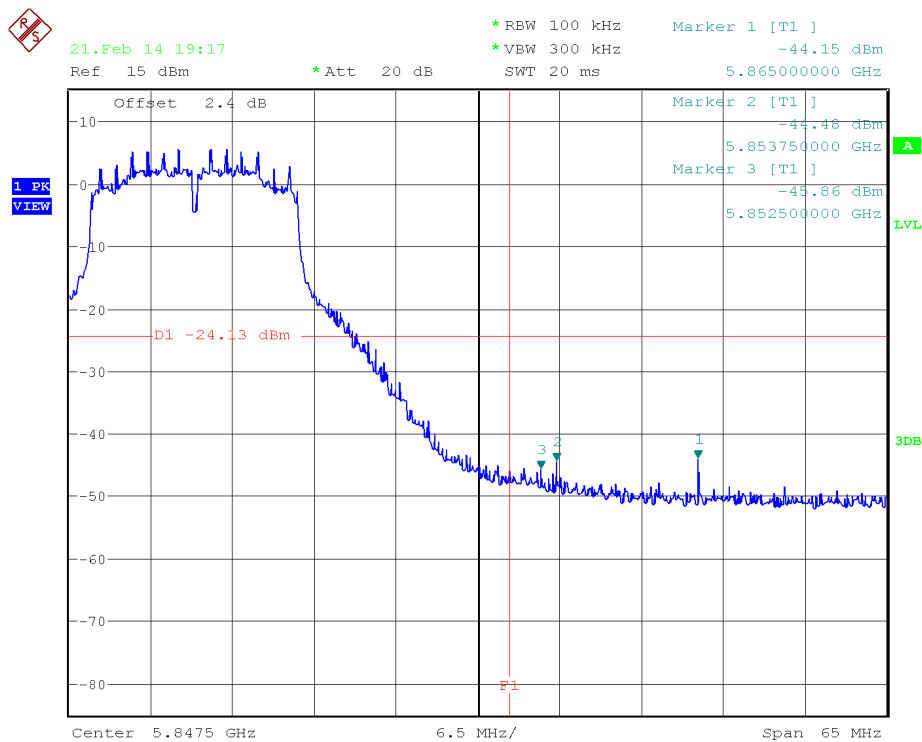

# Chain B

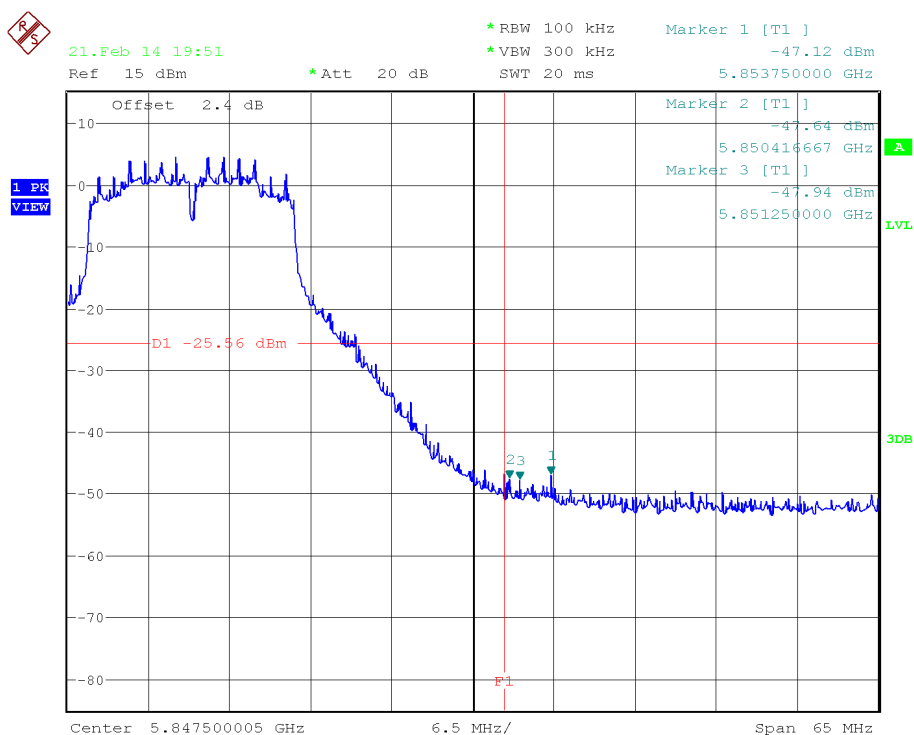


Verdict: PASS

## 2. WiFi 5GHz 802.11 n20 mode


### LOW FREQUENCY SECTION 5745 MHz. CONDUCTED.

See next plots.

Chain A

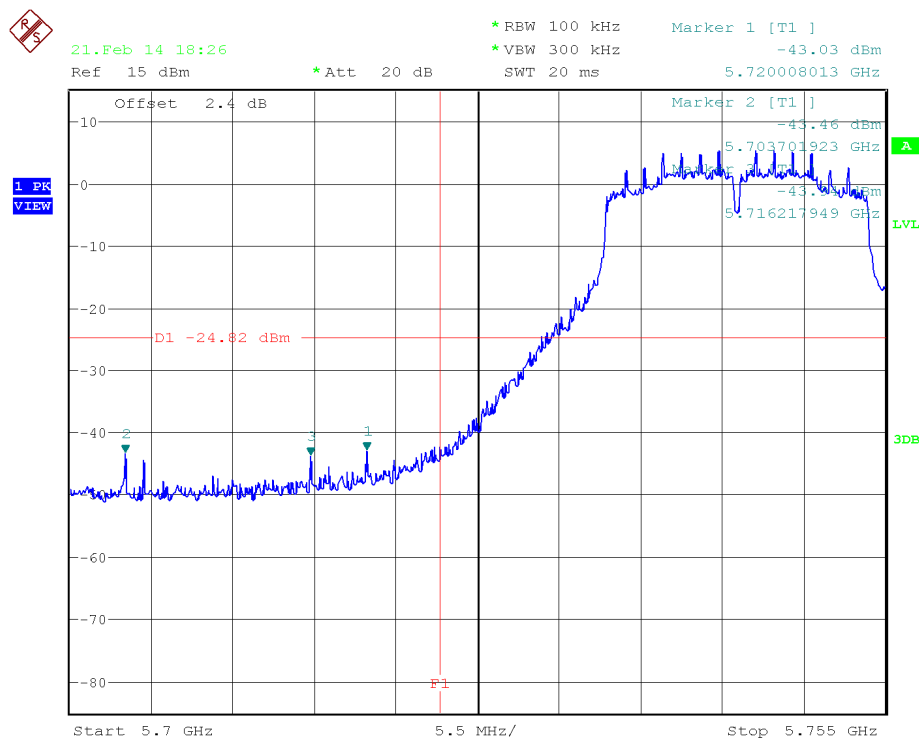


Chain B

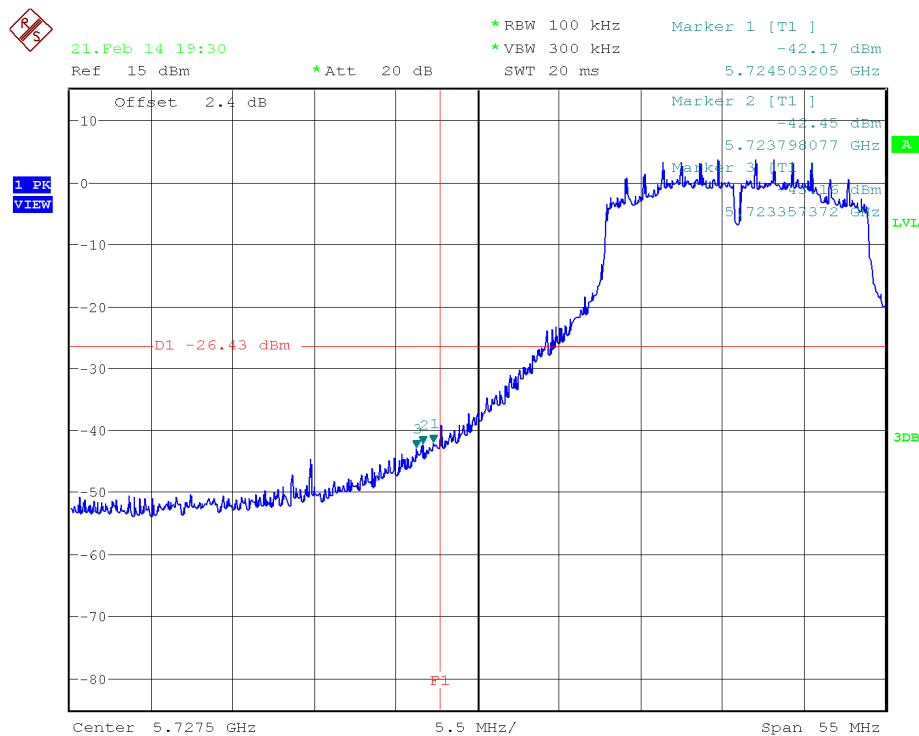


# HIGH FREQUENCY SECTION 5825 MHZ. CONDUCTED.

See next plots.

Chain A

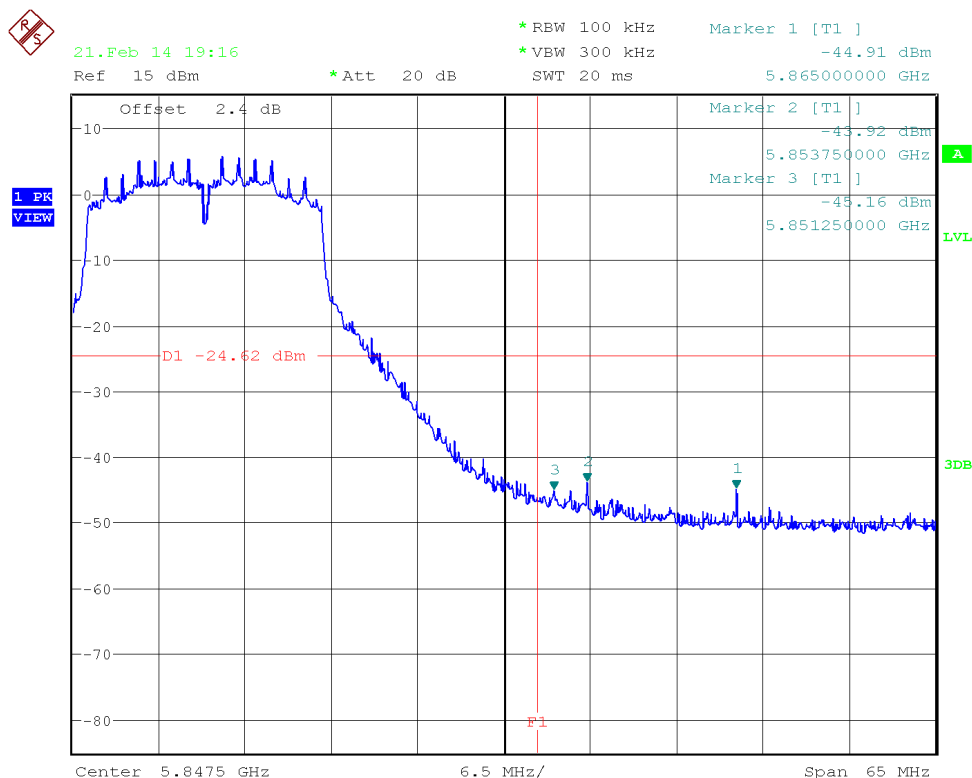

Chain B

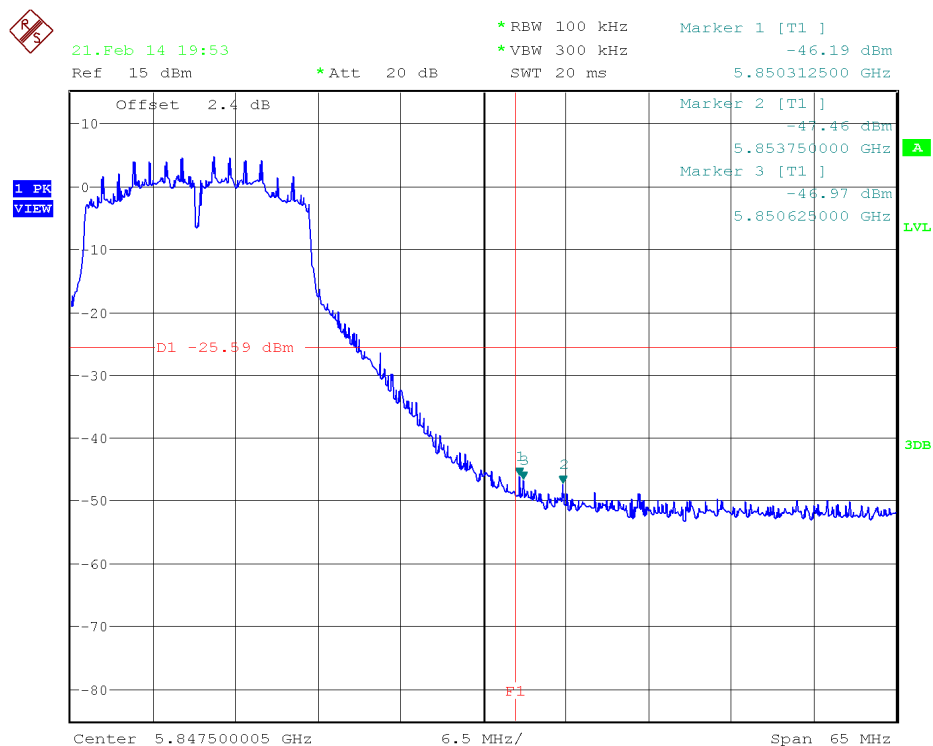


Verdict: PASS

### 3. WiFi 5GHz 802.11 n40 mode


#### LOW FREQUENCY SECTION 5755 MHz. CONDUCTED.

See next plots.

Chain A

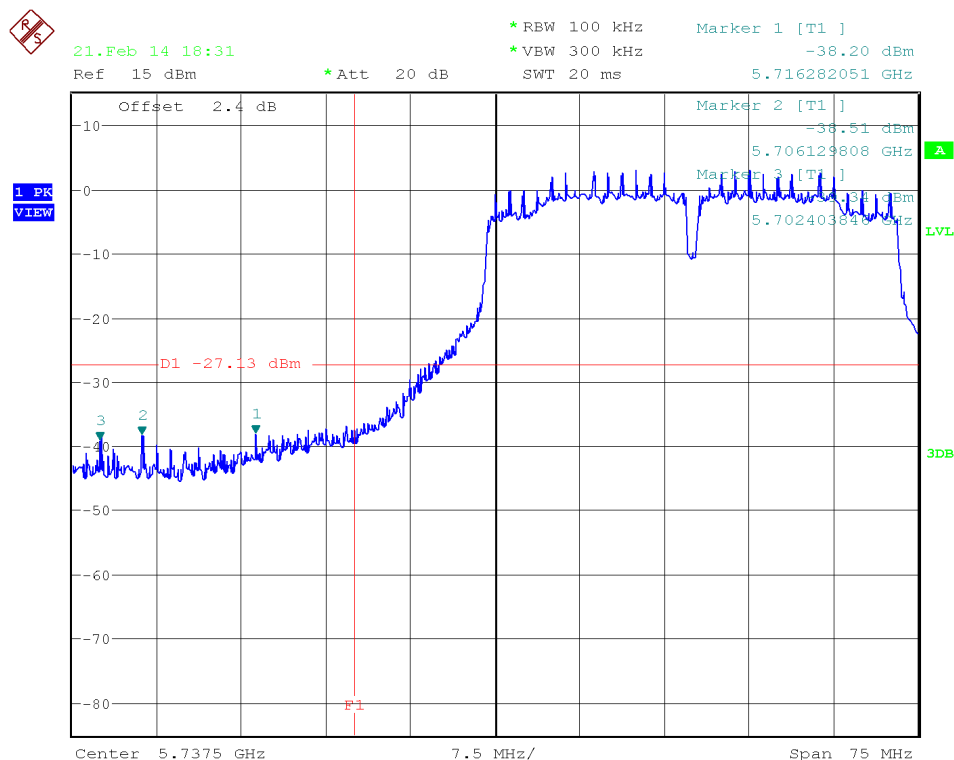


Chain B

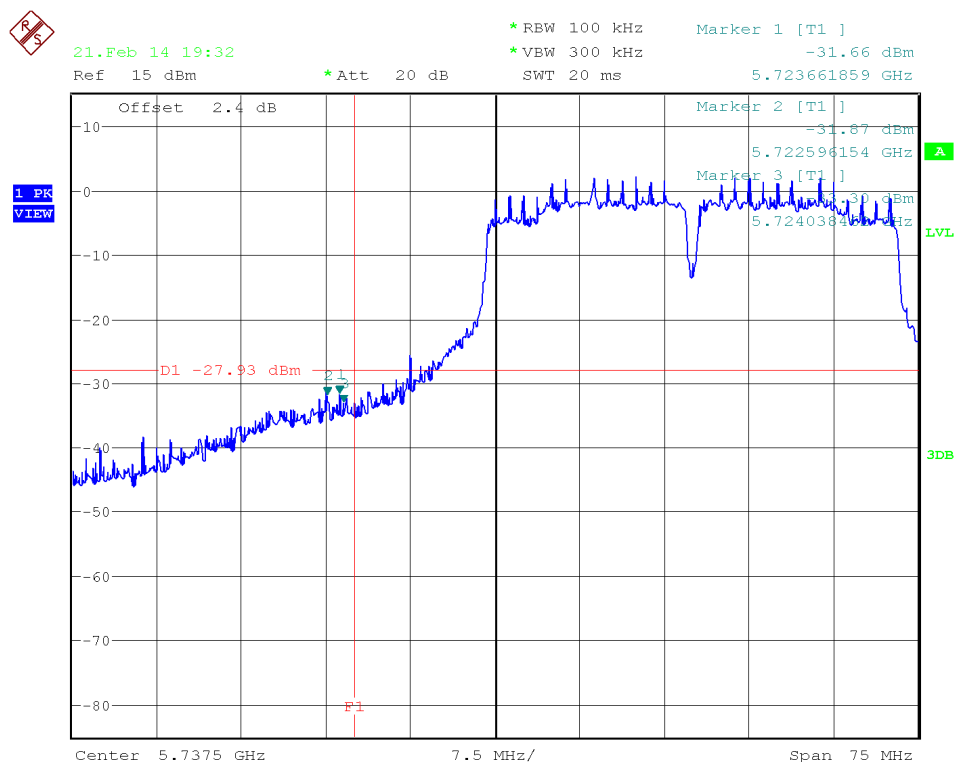


# HIGH FREQUENCY SECTION 5795 MHZ. CONDUCTED.

See next plots.

Chain A

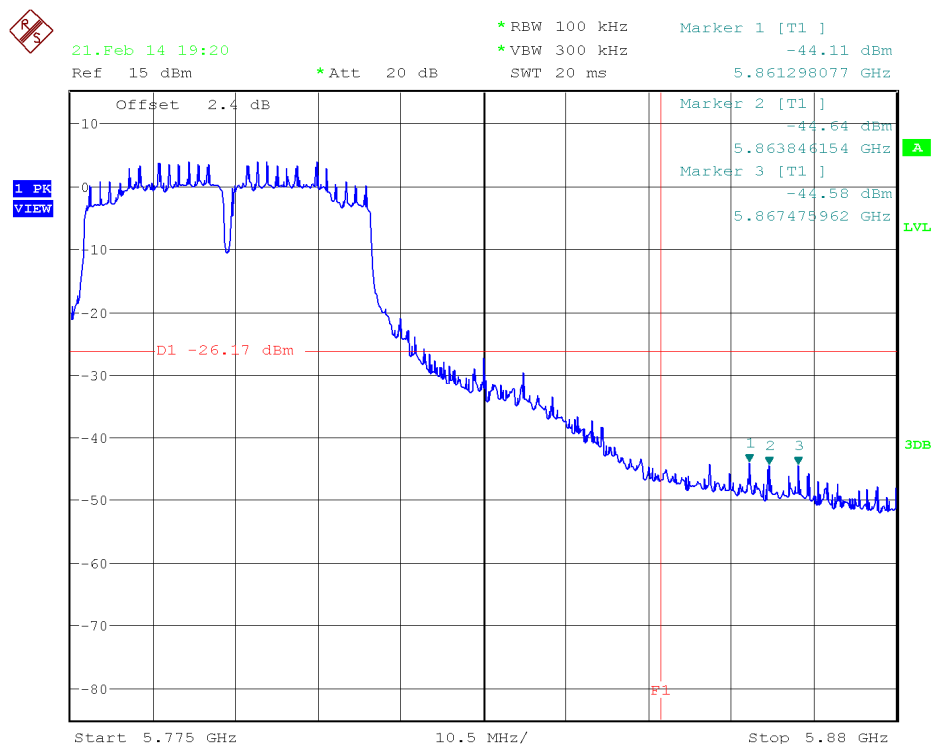

Chain B

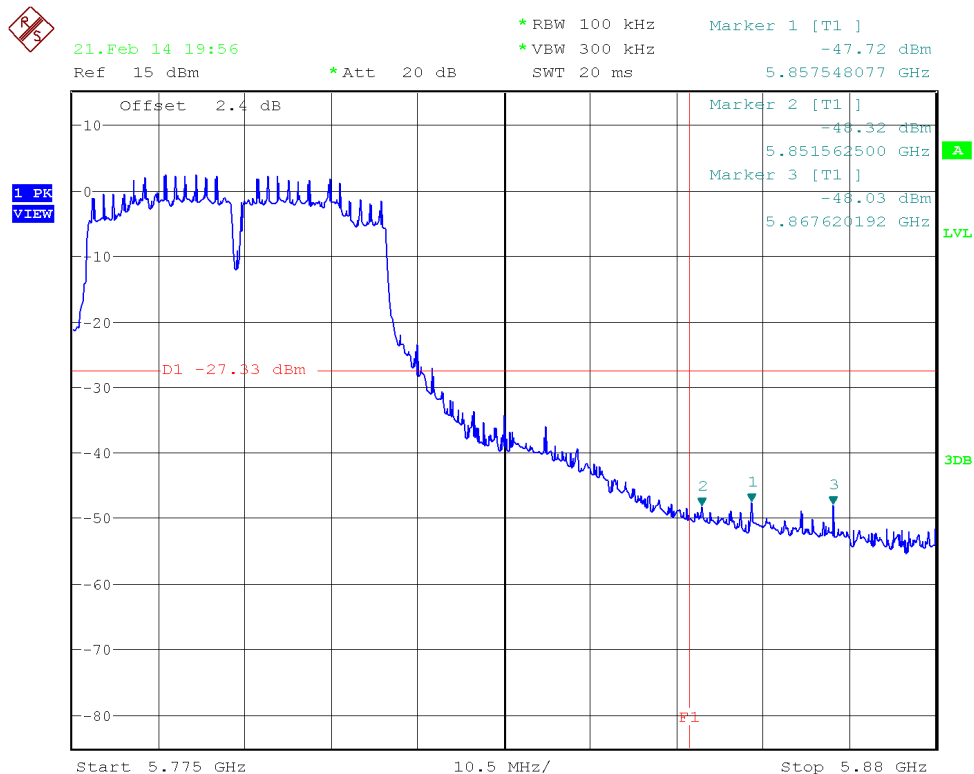


Verdict: PASS

#### 4. WiFi 5GHz 802.11 ac80 mode


#### LOW FREQUENCY SECTION 5755 MHz. CONDUCTED.

See next plots.

Chain A

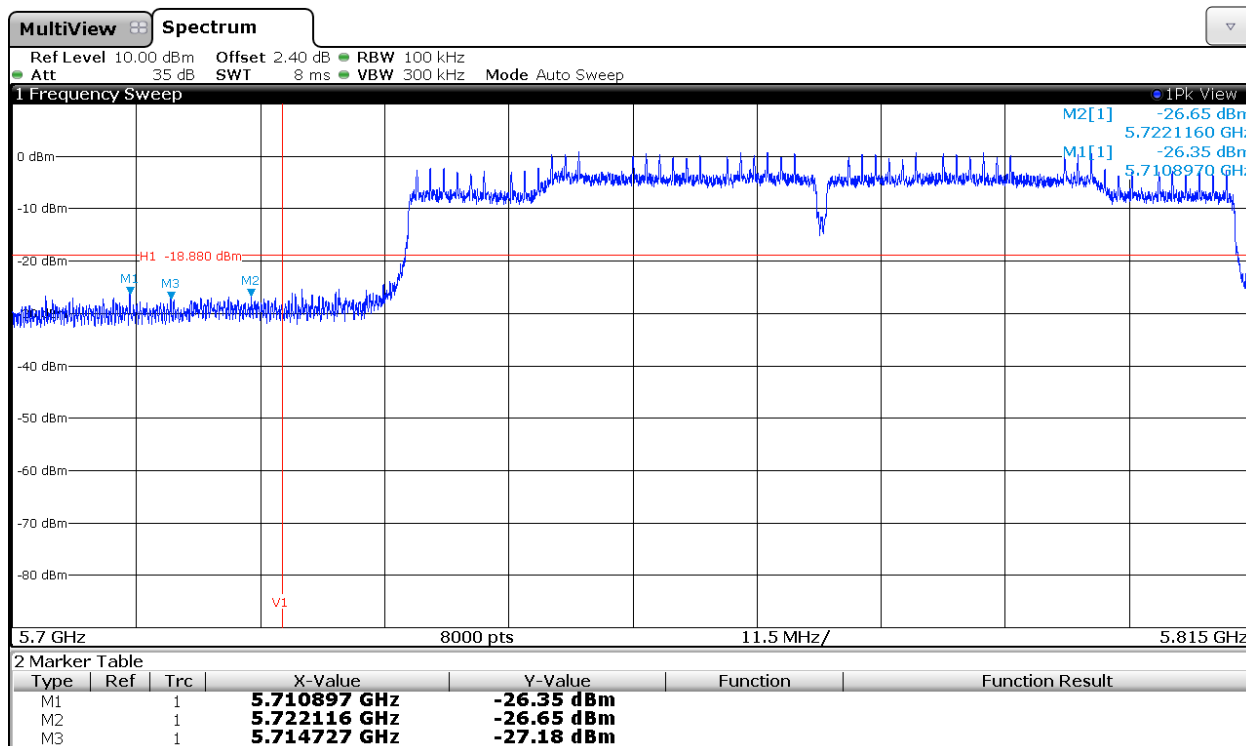


Chain B

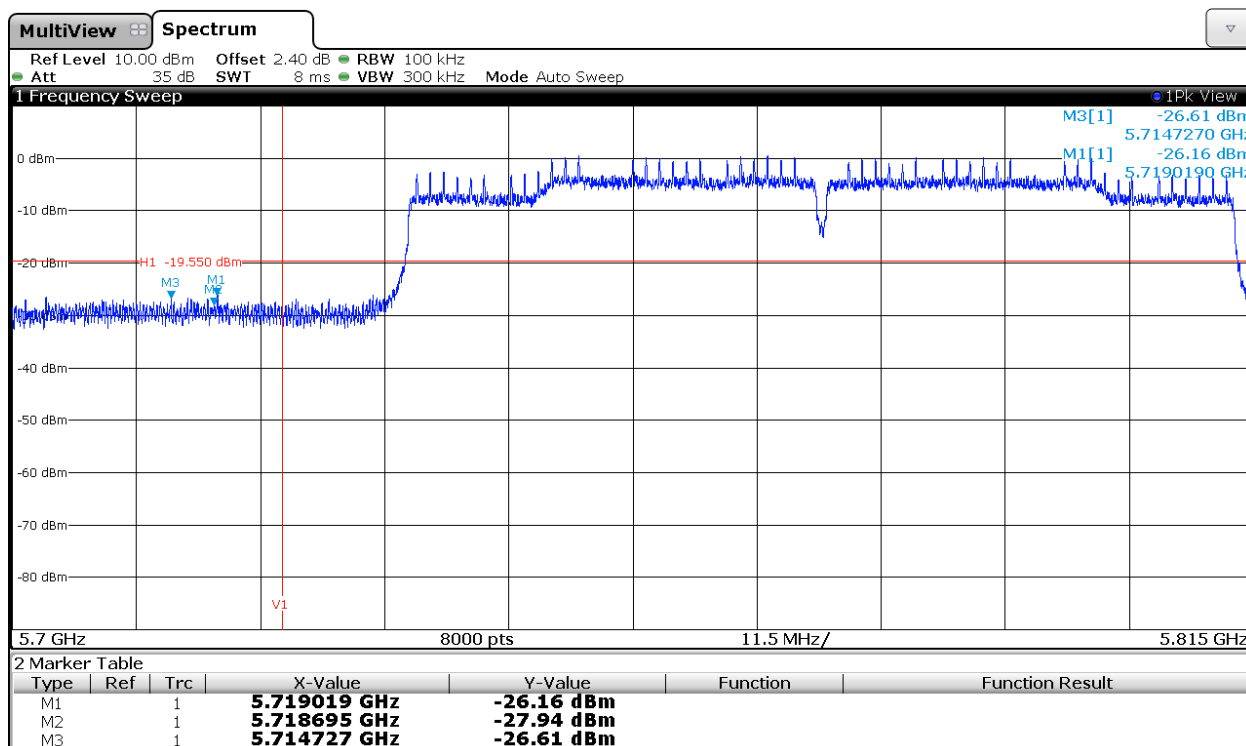


# HIGH FREQUENCY SECTION 5775 MHz. CONDUCTED.

See next plots.

Chain A

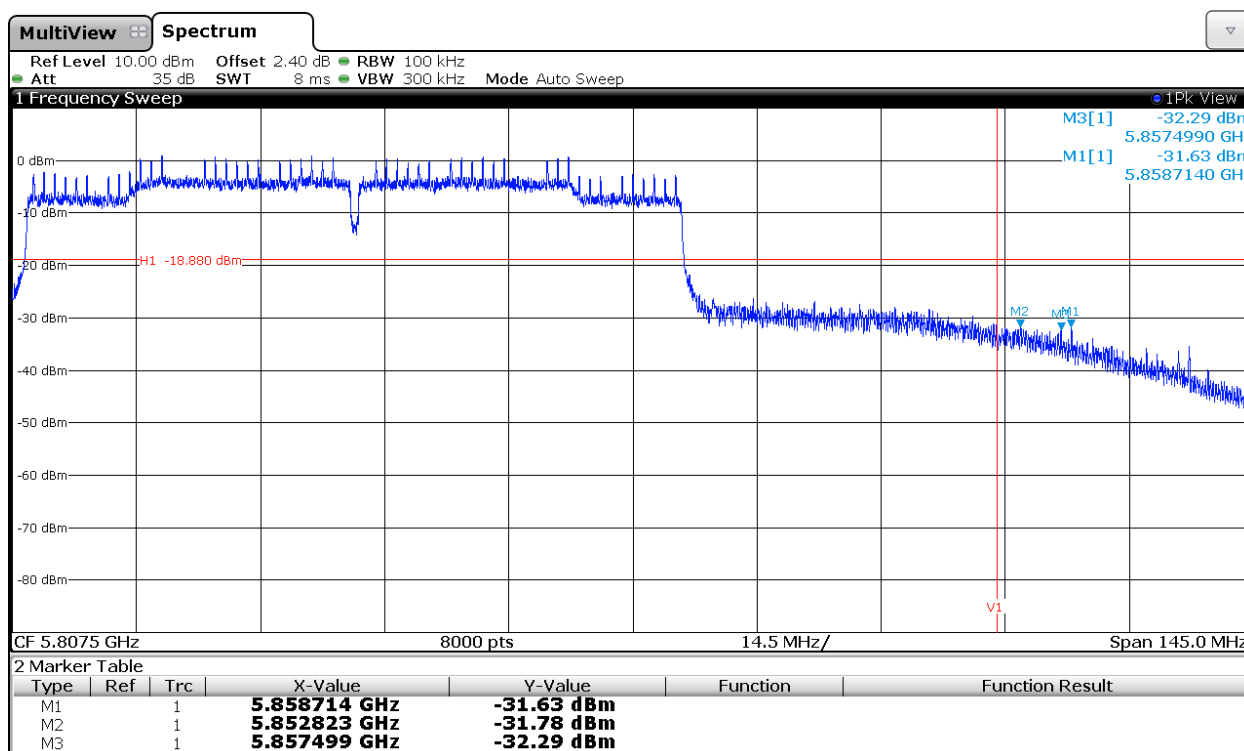

Chain B

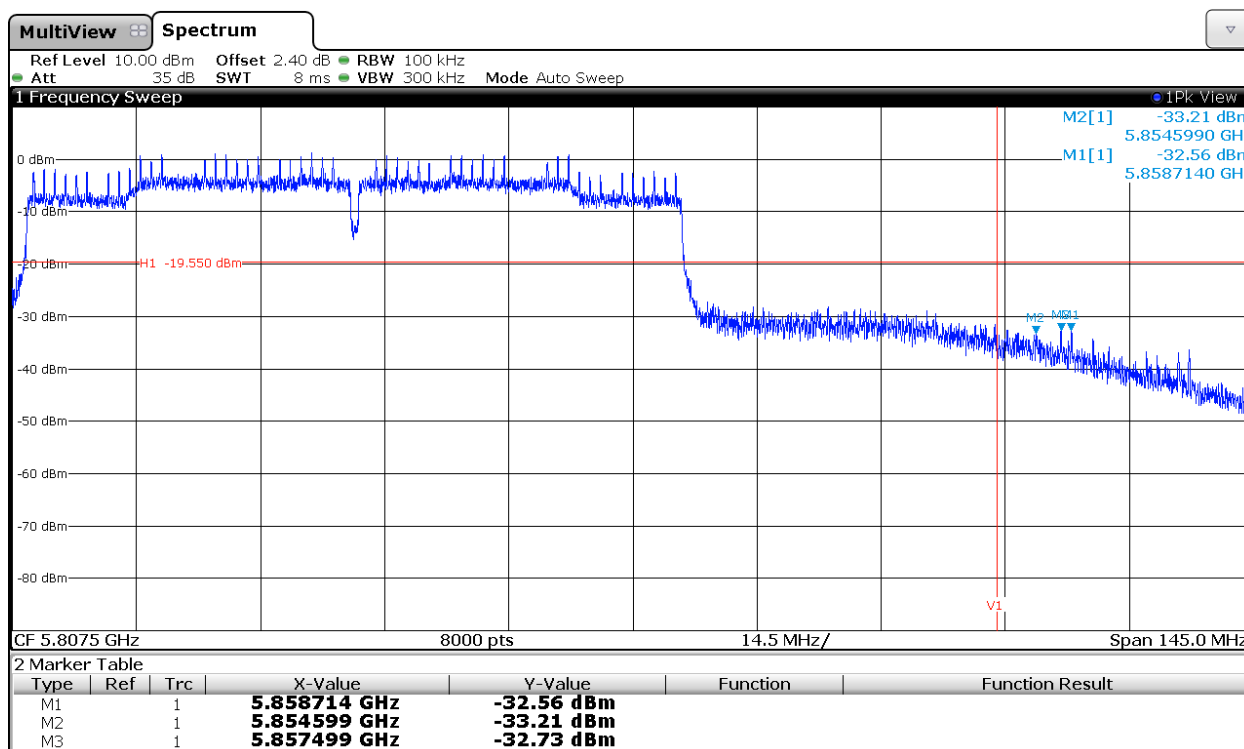

Verdict: PASS (NOTE: The limit is set to -20 dBc since the maximum peak conducted output power was measured for this mode.)

## Section 15.247 Subclause (e) / RSS-210 A8.5. Power spectral density

### SPECIFICATION

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### RESULTS

The maximum power spectral density level in the fundamental emission was measured using the method of trace averaging with EUT transmitting at full power throughout each sweep according to point 10.3. of Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 558074 D01 DTS Meas Guidance v03r01 dated 09/04/2013. This method was used for 802.11a, 802.11n20 and 802.11n40 modes.

For 802.11ac80 mode the PKPSD (peak PSD) method was used since the maximum peak conducted output power was measured for this mode.

For MIMO mode, the *Measure and add  $10 \log(N_{ANT})$  dB*, (where  $N_{ANT}$  is the number of outputs) technique was used according to the Guidance for Emission Testing of Transmitters with Multiple Outputs in the Same Band 662911 D01 Multiple Transmitter Output v02r01 dated 10/31/2013.

With this technique, spectrum measurements are performed at each output of the device, and the quantity  $10 \log(N_{ANT})$  dB is added to each spectrum value before comparing to the emission limit. Number of outputs = 2.

#### 1. WiFi 5GHz 802.11 a mode

Power spectral density (See next plots of worst case = highest level).

|                              | Lowest frequency<br>5745 MHz |         | Middle frequency<br>5785 MHz |         | Highest frequency<br>5825 MHz |         |
|------------------------------|------------------------------|---------|------------------------------|---------|-------------------------------|---------|
|                              | Chain A                      | Chain B | Chain A                      | Chain B | Chain A                       | Chain B |
| Power spectral density (dBm) | -3.940                       | -4.630  | -3.899                       | -3.725  | -4.257                        | -4.075  |
| Measurement uncertainty (dB) | ±1.5                         |         |                              |         |                               |         |

Verdict: PASS

## 2. WiFi 5GHz 802.11 n20 mode

Power spectral density (See next plots of worst case = highest level).

|                              | Lowest frequency<br>5745 MHz |         | Middle frequency<br>5785 MHz |         | Highest frequency<br>5825 MHz |         |
|------------------------------|------------------------------|---------|------------------------------|---------|-------------------------------|---------|
|                              | Chain A                      | Chain B | Chain A                      | Chain B | Chain A                       | Chain B |
| Power spectral density (dBm) | -5.059                       | -5.659  | -3.974                       | -4.989  | -4.627                        | -4.524  |
| Measurement uncertainty (dB) | $\pm 1.5$                    |         |                              |         |                               |         |

| MIMO                                                 | Lowest frequency<br>5745 MHz |        | Middle frequency<br>5785 MHz |        | Highest frequency<br>5825 MHz |        |
|------------------------------------------------------|------------------------------|--------|------------------------------|--------|-------------------------------|--------|
|                                                      | Chain A+B                    |        | Chain A+B                    |        | Chain A+B                     |        |
|                                                      | Port A                       | Port B | Port A                       | Port B | Port A                        | Port B |
| Power spectral density (dBm)                         | -7.140                       | -7.367 | -6.669                       | -7.185 | -6.613                        | -6.482 |
| Power spectral density (dBm) +<br>$10 \cdot \log(2)$ | -4.29                        | -4.98  | -3.00                        | -3.11  | -3.33                         | -3.99  |
| Measurement uncertainty (dB)                         | $\pm 1.5$                    |        |                              |        |                               |        |

Verdict: PASS

## 3. WiFi 5GHz 802.11 n40 mode

Power spectral density (See next plots of worst case = highest level).

|                              | Lowest frequency<br>5755 MHz |         | Highest frequency<br>5795 MHz |         |
|------------------------------|------------------------------|---------|-------------------------------|---------|
|                              | Chain A                      | Chain B | Chain A                       | Chain B |
| Power spectral density (dBm) | -6.887                       | -6.644  | -6.531                        | -6.604  |
| Measurement uncertainty (dB) | $\pm 1.5$                    |         |                               |         |

| MIMO                                        | Lowest frequency<br>5755 MHz |        | Highest frequency<br>5795 MHz |        |
|---------------------------------------------|------------------------------|--------|-------------------------------|--------|
|                                             | Chain A+B                    |        | Chain A+B                     |        |
|                                             | Port A                       | Port B | Port A                        | Port B |
| Power spectral density (dBm)                | -5.868                       | -5.464 | -5.602                        | -5.848 |
| Power spectral density (dBm) +<br>10*Log(2) | -2.86                        | -2.45  | -2.59                         | -2.84  |
| Measurement uncertainty (dB)                | ±1.5                         |        |                               |        |

Verdict: PASS

#### 4. WiFi 5GHz 802.11 ac80 mode

Power spectral density (See next plots of worst case = highest level).


| SISO                         | Middle frequency<br>5775 MHz |         |
|------------------------------|------------------------------|---------|
|                              | Chain A                      | Chain B |
| Power spectral density (dBm) | 0.54                         | 0.79    |
| Measurement uncertainty (dB) | ±1.2                         |         |

| MIMO                                        | Lowest frequency<br>5755 MHz |        |
|---------------------------------------------|------------------------------|--------|
|                                             | Chain A+B                    |        |
|                                             | Port A                       | Port B |
| Power spectral density (dBm)                | 1.24                         | 1.55   |
| Power spectral density (dBm) +<br>10*Log(2) | 4.25                         | 4.56   |
| Measurement uncertainty (dB)                | ±1.2                         |        |

Verdict: PASS (NOTE: the PKPSD (peak PSD) method was used since the maximum peak conducted output power was measured for this mode).


## 1. WiFi 5GHz 802.11 a mode

Middle Channel: 5785 MHz. Chain B.

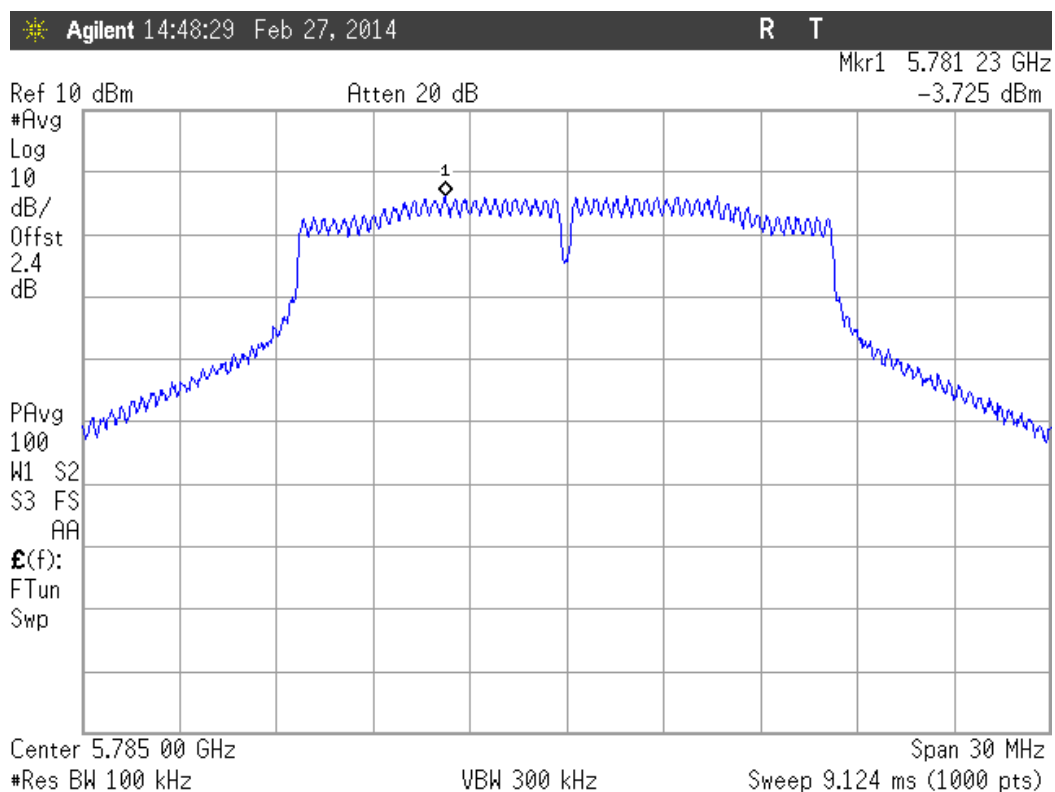


## 2. WiFi 5GHz 802.11 n20 mode

SISO. Middle Channel: 5785 MHz. Chain A.

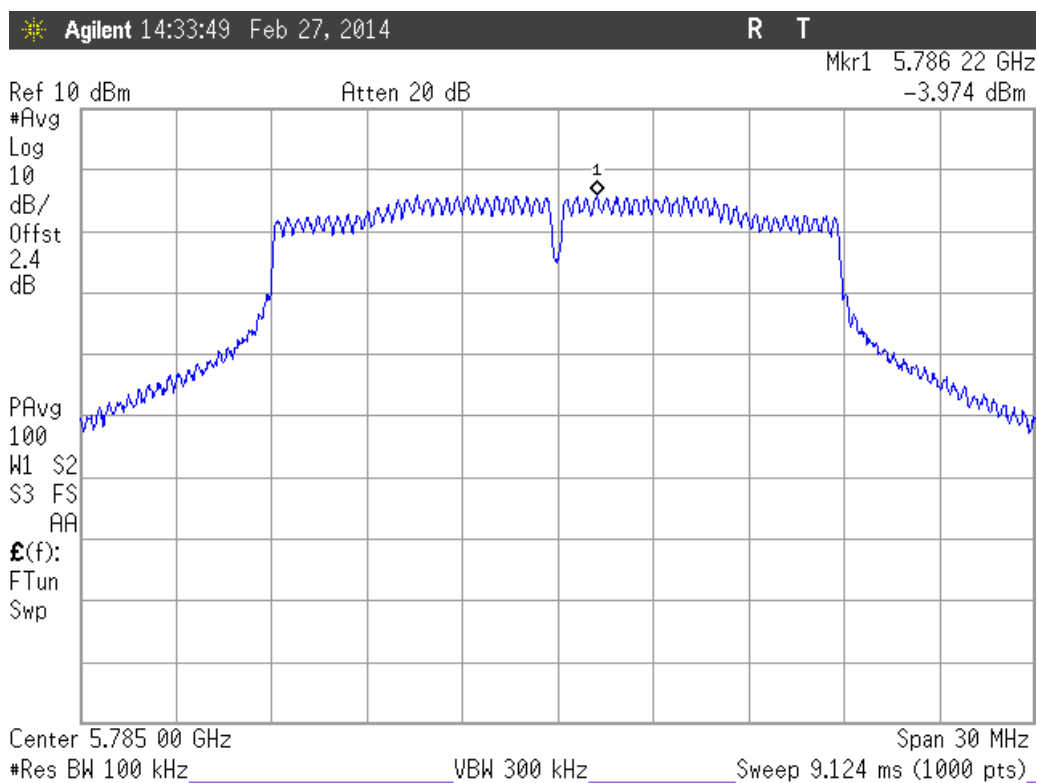


MIMO. Highest Channel: 5825 MHz. Chain A+B. Port B.

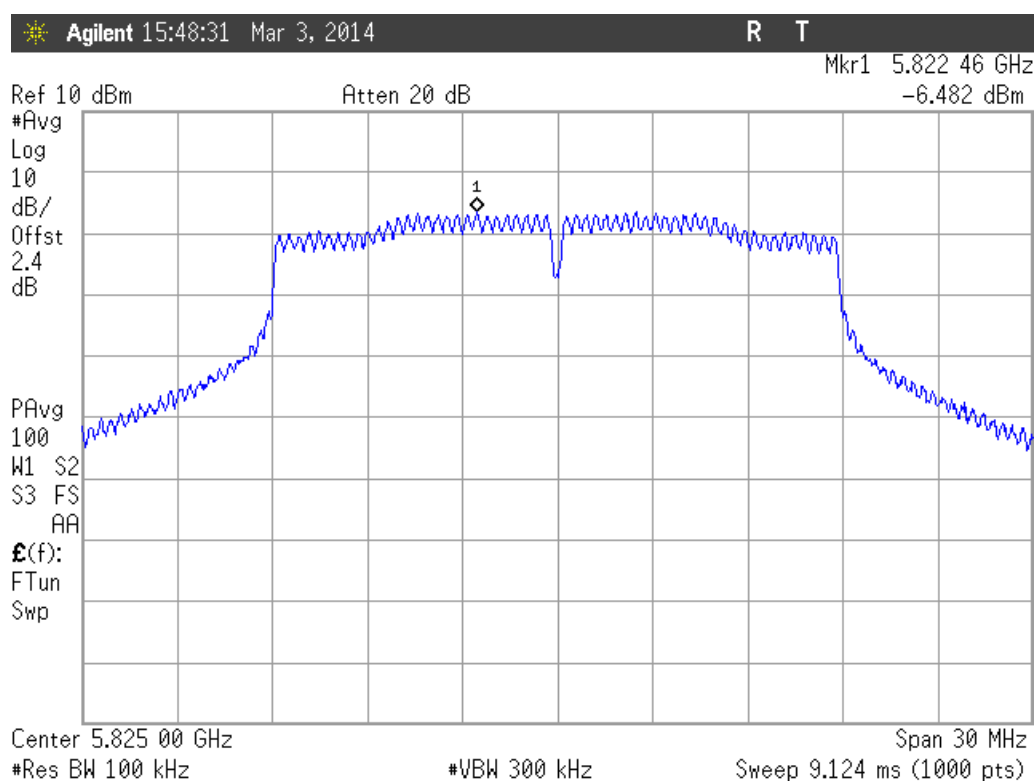


### 3. WiFi 5GHz 802.11 n40 mode

SISO. Highest frequency 5795 MHz. Chain A.

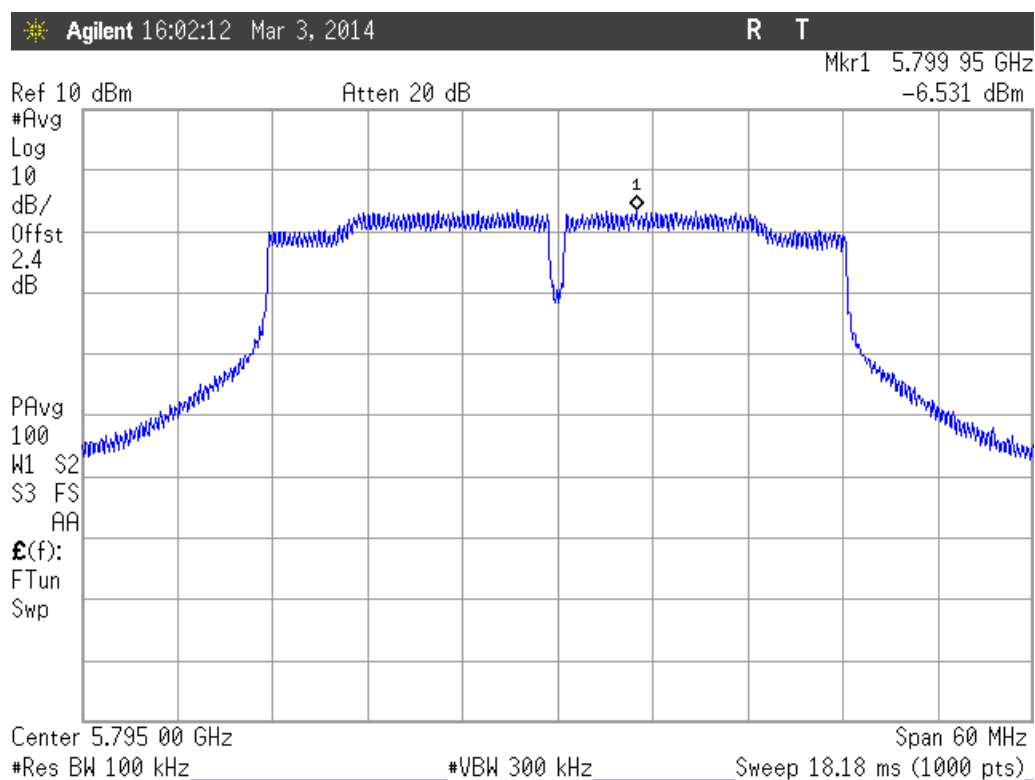


MIMO. Lowest frequency 5755 MHz. Chain A+B. Port B.

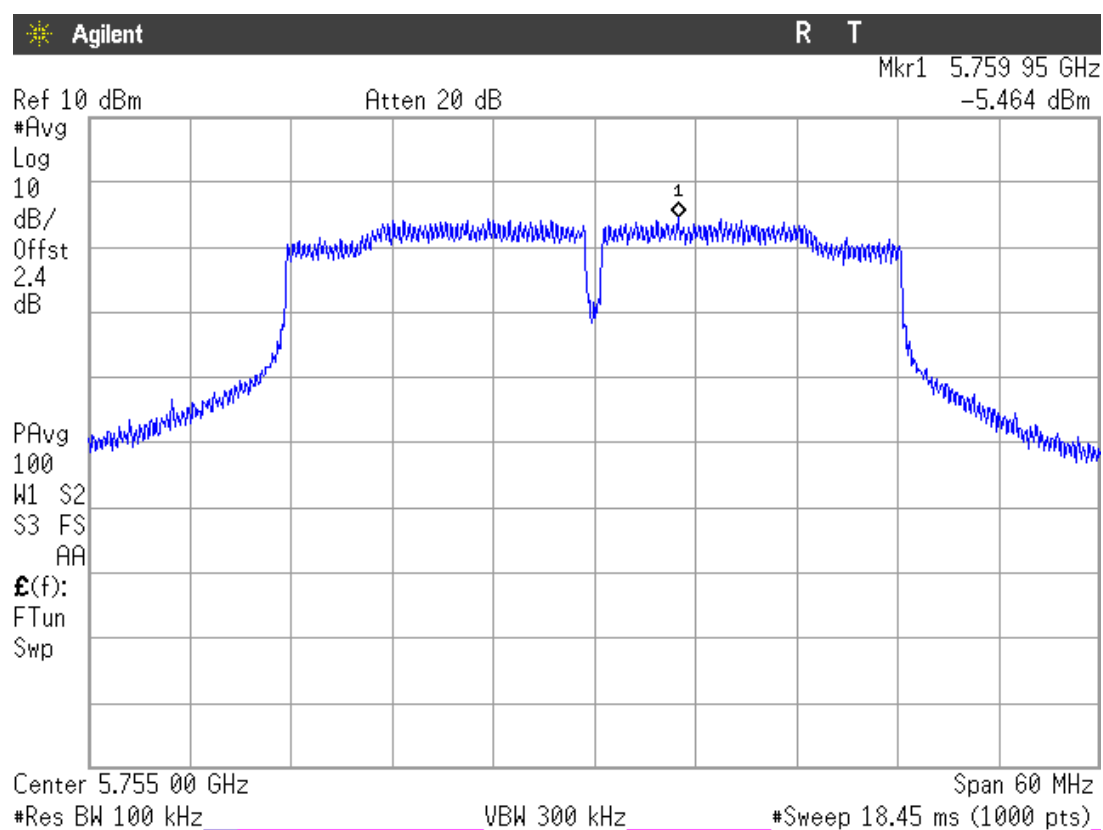


#### 4. WiFi 5GHz 802.11 ac80 mode

SISO. Middle frequency 5775 MHz. Chain B.

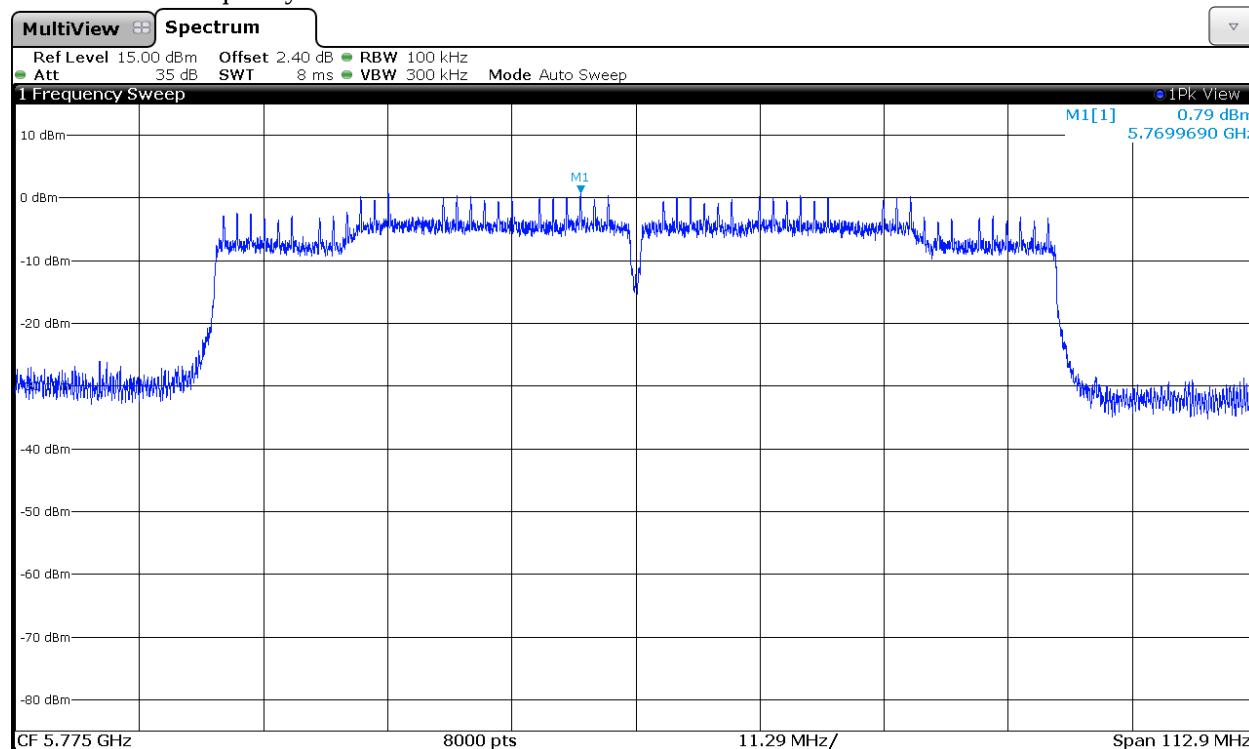

MIMO. Middle frequency 5775 MHz. Chain A+B. Port B.

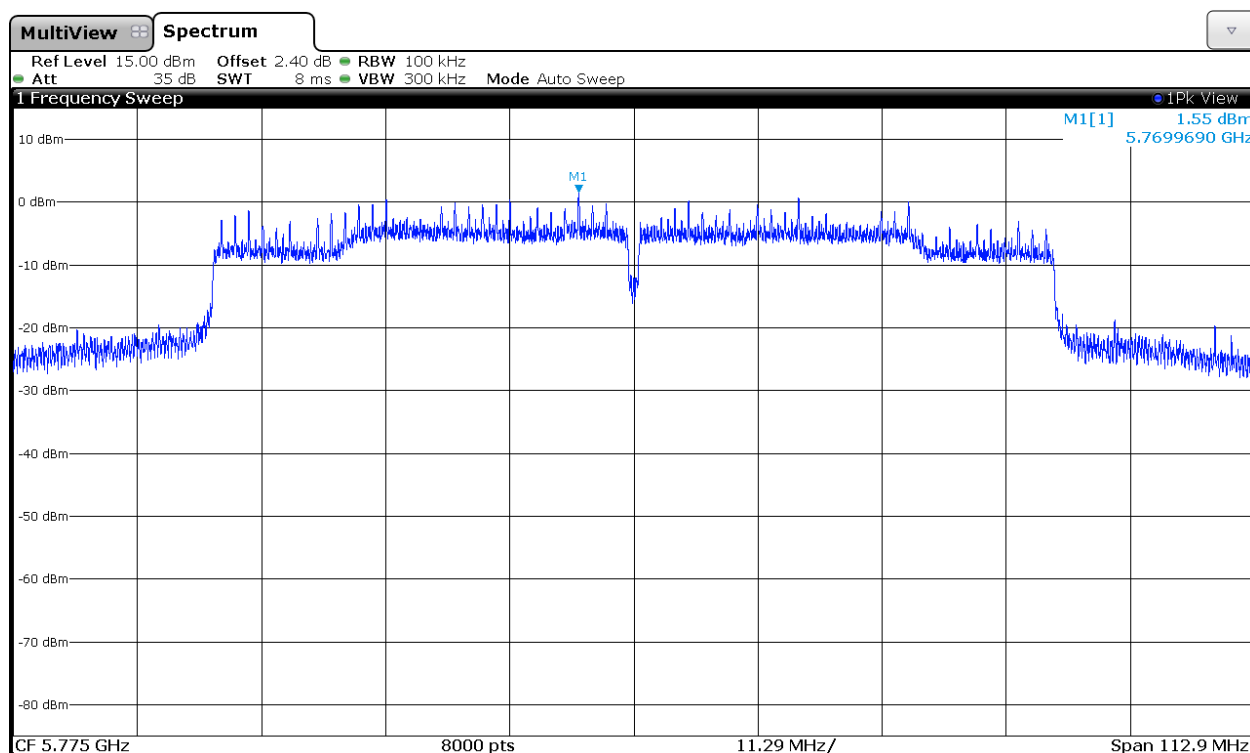

## Section 15.247 Subclause (d) / RSS-210 A8.5. Emission limitations radiated (Transmitter)

### SPECIFICATION

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)):

| Frequency Range (MHz) | Field strength ( $\mu\text{V/m}$ ) | Field strength ( $\text{dB}\mu\text{V/m}$ ) | Measurement distance (m) |
|-----------------------|------------------------------------|---------------------------------------------|--------------------------|
| 0.009-0.490           | 2400/F(kHz)                        | -                                           | 300                      |
| 0.490-1.705           | 24000/F(kHz)                       | -                                           | 300                      |
| 1.705 - 30.0          | 30                                 | -                                           | 30                       |
| 30 - 88               | 100                                | 40                                          | 3                        |
| 88 - 216              | 150                                | 43.5                                        | 3                        |
| 216 - 960             | 200                                | 46                                          | 3                        |
| 960 - 40000           | 500                                | 54                                          | 3                        |

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

### RESULTS:

The situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

All tests were performed in a semi-anechoic chamber at a distance of 3 m for the frequency range 30 MHz-1000 MHz and at distance of 1m for the frequency range 1 GHz-40 GHz.

The field strength is calculated by adding correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

### Frequency range 30 MHz-1000 MHz.

The spurious signals detected do not depend on either the operating channel or the modulation mode.

See test results in Appendix A for details.

### Frequency range 1 GHz-40 GHz.

For the 4 OFDM modulation modes (802.11a, 802.11n20, 802.11n40 and 802.11ac80), a preliminary measurement in the central channel was performed in the range 1-18 GHz to determine the worst case. The lowest and highest channels were measured for out-of-band emissions for the worst case (802.11n20).

Spurious signals with peak levels above the average limit (54 dB $\mu$ V/m at 3 m) are measured with average detector for checking compliance with the average limit.

#### 1. WiFi 5GHz 802.11 a mode

Middle frequency 5785 MHz.

Chain A

| Spurious frequency (GHz) | Polarization | Detector | Emission Level (dB $\mu$ V/m) | Measurement Uncertainty (dB) |
|--------------------------|--------------|----------|-------------------------------|------------------------------|
| 11.5700                  | PV           | Peak     | 52.26                         | $\pm 4.00$                   |
| 17.3583                  | PV           | Peak     | 66.33                         | $\pm 4.00$                   |
|                          |              | Average  | 53.76                         | $\pm 4.00$                   |
| 23.1395                  | PV           | Peak     | 52.36                         | $\pm 4.00$                   |

Chain B

| Spurious frequency (GHz) | Polarization | Detector | Emission Level (dB $\mu$ V/m) | Measurement Uncertainty (dB) |
|--------------------------|--------------|----------|-------------------------------|------------------------------|
| 11.5678                  | PV           | Peak     | 56.54                         | $\pm 4.00$                   |
|                          |              | Average  | 45.88                         | $\pm 4.00$                   |
| 17.3550                  | PV           | Peak     | 63.96                         | $\pm 4.00$                   |
|                          |              | Average  | 52.28                         | $\pm 4.00$                   |
| 23.1405                  | PV           | Peak     | 51.26                         | $\pm 4.00$                   |

## 2. WiFi 5GHz 802.11 n20 mode

Lowest frequency 5745 MHz.

### Chain A

| Spurious frequency (GHz) | Polarization | Detector | Emission Level (dB $\mu$ V/m) | Measurement Uncertainty (dB) |
|--------------------------|--------------|----------|-------------------------------|------------------------------|
| 11.4899                  | PV           | Peak     | 49.82                         | $\pm 4.00$                   |
| 17.2343                  | PV           | Peak     | 64.41                         | $\pm 4.00$                   |
|                          |              | Average  | 52.73                         | $\pm 4.00$                   |
| 22.9795                  | PV           | Peak     | 54.36                         | $\pm 4.00$                   |
|                          |              | Average  | 49.04                         | $\pm 4.00$                   |

### Chain B

| Spurious frequency (GHz) | Polarization | Detector | Emission Level (dB $\mu$ V/m) | Measurement Uncertainty (dB) |
|--------------------------|--------------|----------|-------------------------------|------------------------------|
| 11.4900                  | PV           | Peak     | 57.13                         | $\pm 4.00$                   |
|                          |              | Average  | 46.35                         | $\pm 4.00$                   |
| 17.2341                  | PV           | Peak     | 63.13                         | $\pm 4.00$                   |
|                          |              | Average  | 51.09                         | $\pm 4.00$                   |
| 22.9795                  | PV           | Peak     | 53.53                         | $\pm 4.00$                   |

### Chain A+B

| Spurious frequency (GHz) | Polarization | Detector | Emission Level (dB $\mu$ V/m) | Measurement Uncertainty (dB) |
|--------------------------|--------------|----------|-------------------------------|------------------------------|
| 11.4906                  | PV           | Peak     | 55.88                         | $\pm 4.00$                   |
|                          |              | Average  | 43.79                         | $\pm 4.00$                   |
| 17.2391                  | PV           | Peak     | 63.26                         | $\pm 4.00$                   |
|                          |              | Average  | 48.23                         | $\pm 4.00$                   |
| 22.9805                  | PV           | Peak     | 52.67                         | $\pm 4.00$                   |

Middle frequency 5785 MHz.

Chain A

| Spurious frequency (GHz) | Polarization | Detector | Emission Level (dB $\mu$ V/m) | Measurement Uncertainty (dB) |
|--------------------------|--------------|----------|-------------------------------|------------------------------|
| 11.5714                  | PV           | Peak     | 51.82                         | $\pm 4.00$                   |
| 17.3524                  | PV           | Peak     | 66.47                         | $\pm 4.00$                   |
|                          |              | Average  | 53.84                         | $\pm 4.00$                   |
| 23.1395                  | PV           | Peak     | 53.11                         | $\pm 4.00$                   |

Chain B

| Spurious frequency (GHz) | Polarization | Detector | Emission Level (dB $\mu$ V/m) | Measurement Uncertainty (dB) |
|--------------------------|--------------|----------|-------------------------------|------------------------------|
| 11.5701                  | PV           | Peak     | 57.32                         | $\pm 4.00$                   |
|                          |              | Average  | 45.96                         | $\pm 4.00$                   |
| 17.3558                  | PV           | Peak     | 65.05                         | $\pm 4.00$                   |
|                          |              | Average  | 52.30                         | $\pm 4.00$                   |
| 23.1405                  | PV           | Peak     | 51.59                         | $\pm 4.00$                   |

Chain A+B

| Spurious frequency (GHz) | Polarization | Detector | Emission Level (dB $\mu$ V/m) | Measurement Uncertainty (dB) |
|--------------------------|--------------|----------|-------------------------------|------------------------------|
| 11.5692                  | PV           | Peak     | 53.70                         | $\pm 4.00$                   |
| 17.3509                  | PV           | Peak     | 65.01                         | $\pm 4.00$                   |
|                          |              | Average  | 49.36                         | $\pm 4.00$                   |
| 23.1405                  | PV           | Peak     | 52.31                         | $\pm 4.00$                   |

Highest frequency 5825 MHz.

Chain A

| Spurious frequency (GHz) | Polarization | Detector | Emission Level (dB $\mu$ V/m) | Measurement Uncertainty (dB) |
|--------------------------|--------------|----------|-------------------------------|------------------------------|
| 17.4768                  | PV           | Peak     | 65.33                         | $\pm 4.00$                   |
|                          |              | Average  | 53.74                         | $\pm 4.00$                   |
| 23.3005                  | PV           | Peak     | 51.12                         | $\pm 4.00$                   |

#### Chain B

| Spurious frequency (GHz) | Polarization | Detector | Emission Level (dB $\mu$ V/m) | Measurement Uncertainty (dB) |
|--------------------------|--------------|----------|-------------------------------|------------------------------|
| 11.6509                  | PV           | Peak     | 55.96                         | $\pm 4.00$                   |
|                          |              | Average  | 46.34                         | $\pm 4.00$                   |
| 17.4754                  | PV           | Peak     | 52.81                         | $\pm 4.00$                   |
| 23.3005                  | PV           | Peak     | 51.65                         | $\pm 4.00$                   |

#### Chain A+B

| Spurious frequency (GHz) | Polarization | Detector | Emission Level (dB $\mu$ V/m) | Measurement Uncertainty (dB) |
|--------------------------|--------------|----------|-------------------------------|------------------------------|
| 11.6496                  | PV           | Peak     | 53.07                         | $\pm 4.00$                   |
| 17.48785                 | PV           | Peak     | 63.71                         | $\pm 4.00$                   |
|                          |              | Average  | 51.11                         | $\pm 4.00$                   |
| 23.3005                  | PV           | Peak     | 52.18                         | $\pm 4.00$                   |

### 3. WiFi 5GHz 802.11 n40 mode

Highest frequency 5795 MHz.

#### Chain A

| Spurious frequency (GHz) | Polarization | Detector | Emission Level (dB $\mu$ V/m) | Measurement Uncertainty (dB) |
|--------------------------|--------------|----------|-------------------------------|------------------------------|
| 17.3792                  | PV           | Peak     | 62.66                         | $\pm 4.00$                   |
|                          |              | Average  | 51.99                         | $\pm 4.00$                   |
| 23.1795                  | PV           | Peak     | 52.59                         | $\pm 4.00$                   |

#### Chain B

| Spurious frequency (GHz) | Polarization | Detector | Emission Level (dB $\mu$ V/m) | Measurement Uncertainty (dB) |
|--------------------------|--------------|----------|-------------------------------|------------------------------|
| 11.5891                  | PV           | Peak     | 56.09                         | $\pm 4.00$                   |
|                          |              | Average  | 44.29                         | $\pm 4.00$                   |
| 17.3778                  | PV           | Peak     | 60.27                         | $\pm 4.00$                   |
|                          |              | Average  | 48.84                         | $\pm 4.00$                   |
| 23.1795                  | PV           | Peak     | 52.18                         | $\pm 4.00$                   |

#### Chain A+B

| Spurious frequency (GHz) | Polarization | Detector | Emission Level (dB $\mu$ V/m) | Measurement Uncertainty (dB) |
|--------------------------|--------------|----------|-------------------------------|------------------------------|
| 11.5863                  | PV           | Peak     | 53.34                         | $\pm 4.00$                   |
| 17.3778                  | PV           | Peak     | 63.54                         | $\pm 4.00$                   |
|                          |              | Average  | 52.78                         | $\pm 4.00$                   |
| 23.1795                  | PV           | Peak     | 52.76                         | $\pm 4.00$                   |

#### 4. WiFi 5GHz 802.11 ac80 mode

Middle frequency 5775 MHz

#### Chain A

| Spurious frequency (GHz) | Polarization | Detector | Emission Level (dB $\mu$ V/m) | Measurement Uncertainty (dB) |
|--------------------------|--------------|----------|-------------------------------|------------------------------|
| 17.3723                  | PV           | Peak     | 62.54                         | $\pm 4.00$                   |
|                          |              | Average  | 49.78                         | $\pm 4.00$                   |
| 23.0995                  | PV           | Peak     | 54.12                         | $\pm 4.00$                   |
|                          |              | Average  | 47.16                         | $\pm 4.00$                   |

#### Chain B

| Spurious frequency (GHz) | Polarization | Detector | Emission Level (dB $\mu$ V/m) | Measurement Uncertainty (dB) |
|--------------------------|--------------|----------|-------------------------------|------------------------------|
| 11.5506                  | PV           | Peak     | 54.2                          | $\pm 4.00$                   |
|                          |              | Average  | 42.26                         | $\pm 4.00$                   |
| 17.3723                  | PV           | Peak     | 62.58                         | $\pm 4.00$                   |
|                          |              | Average  | 49.78                         | $\pm 4.00$                   |
| 23.0995                  | PV           | Peak     | 52.73                         | $\pm 4.00$                   |


#### Chain A+B

| Spurious frequency (GHz) | Polarization | Detector | Emission Level (dB $\mu$ V/m) | Measurement Uncertainty (dB) |
|--------------------------|--------------|----------|-------------------------------|------------------------------|
| 11.5203                  | PV           | Peak     | 54.31                         | $\pm 4.00$                   |
|                          |              | Average  | 41.74                         | $\pm 4.00$                   |
| 17.3132                  | PV           | Peak     | 61.88                         | $\pm 4.00$                   |
|                          |              | Average  | 50.06                         | $\pm 4.00$                   |
| 23.0995                  | PV           | Peak     | 56.12                         | $\pm 4.00$                   |
|                          |              | Average  | 49.54                         | $\pm 4.00$                   |

FREQUENCY RANGE 1 GHz to 7 GHz.


# 1. WiFi 5GHz 802.11 a mode

Middle Channel: 5785 MHz. Chain A

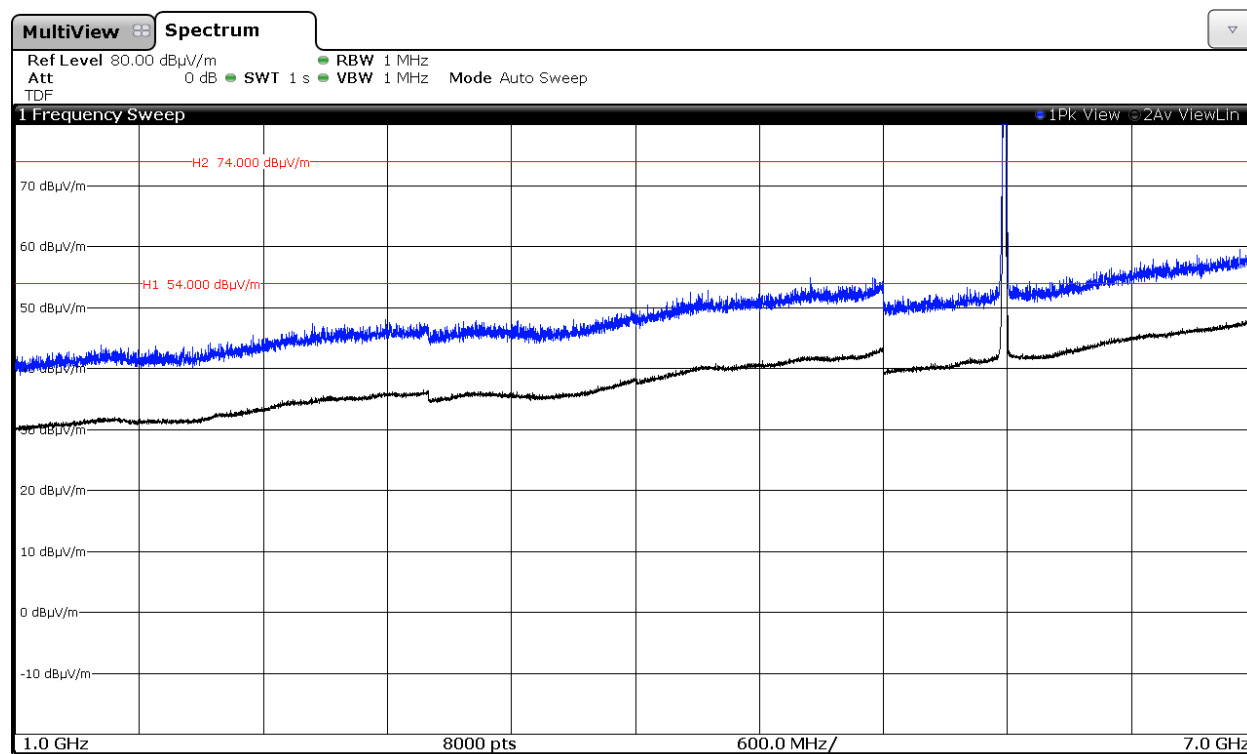

Note: The peak above the limit is the carrier frequency.


Middle Channel: 5785 MHz. Chain B

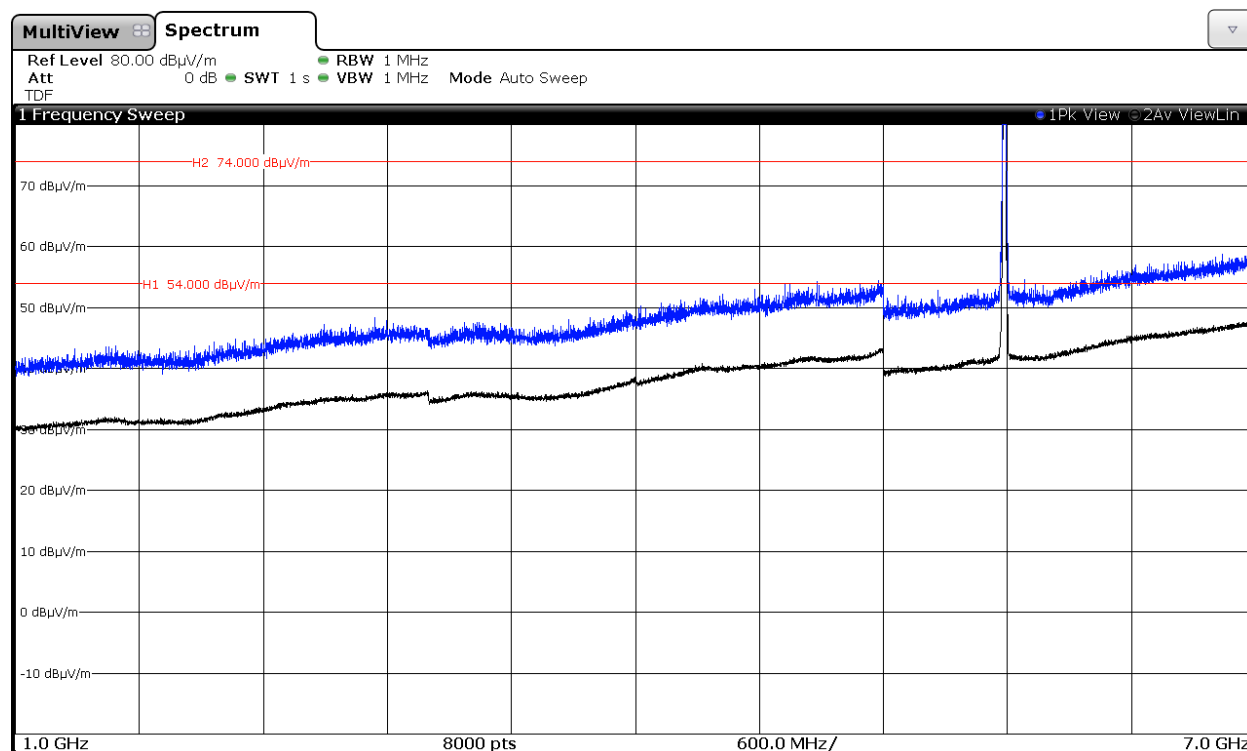

Note: The peak above the limit is the carrier frequency.


## 2. WiFi 5GHz 802.11 n20 mode

Lowest Channel: 5745 MHz. Chain A

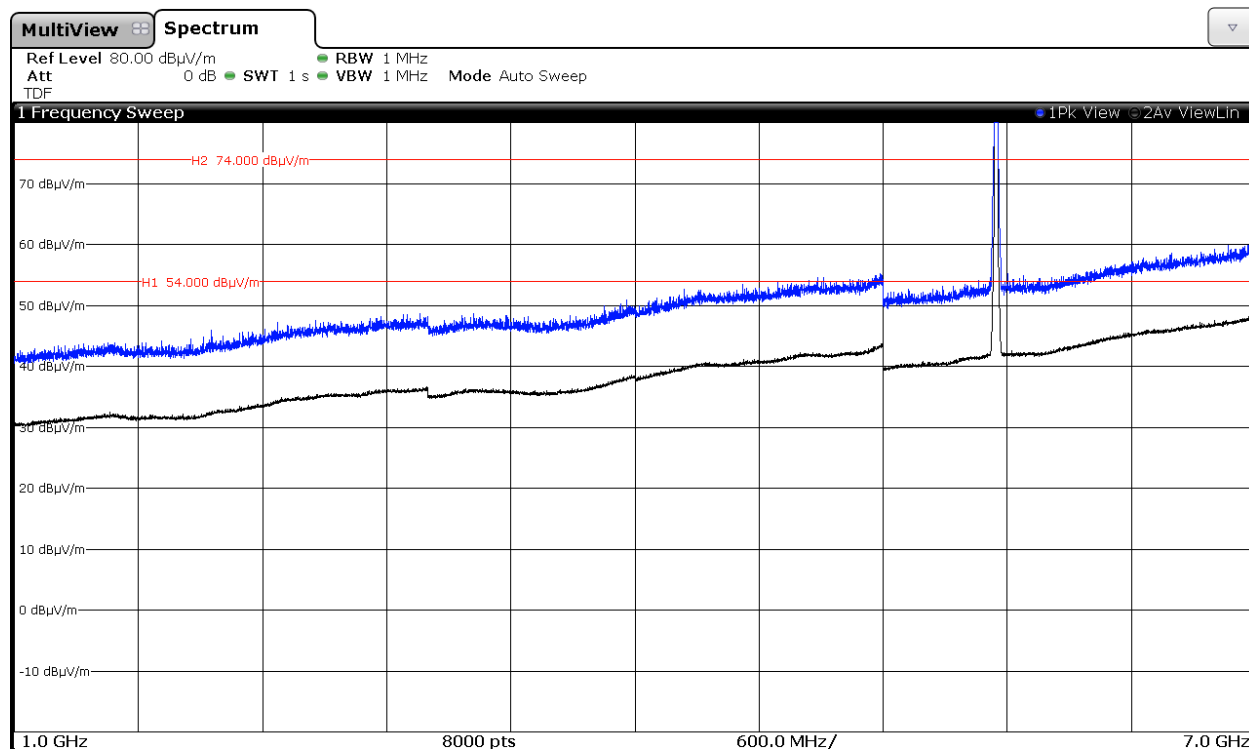


Note: The peak above the limit is the carrier frequency.

Lowest Channel: 5745 MHz. Chain B

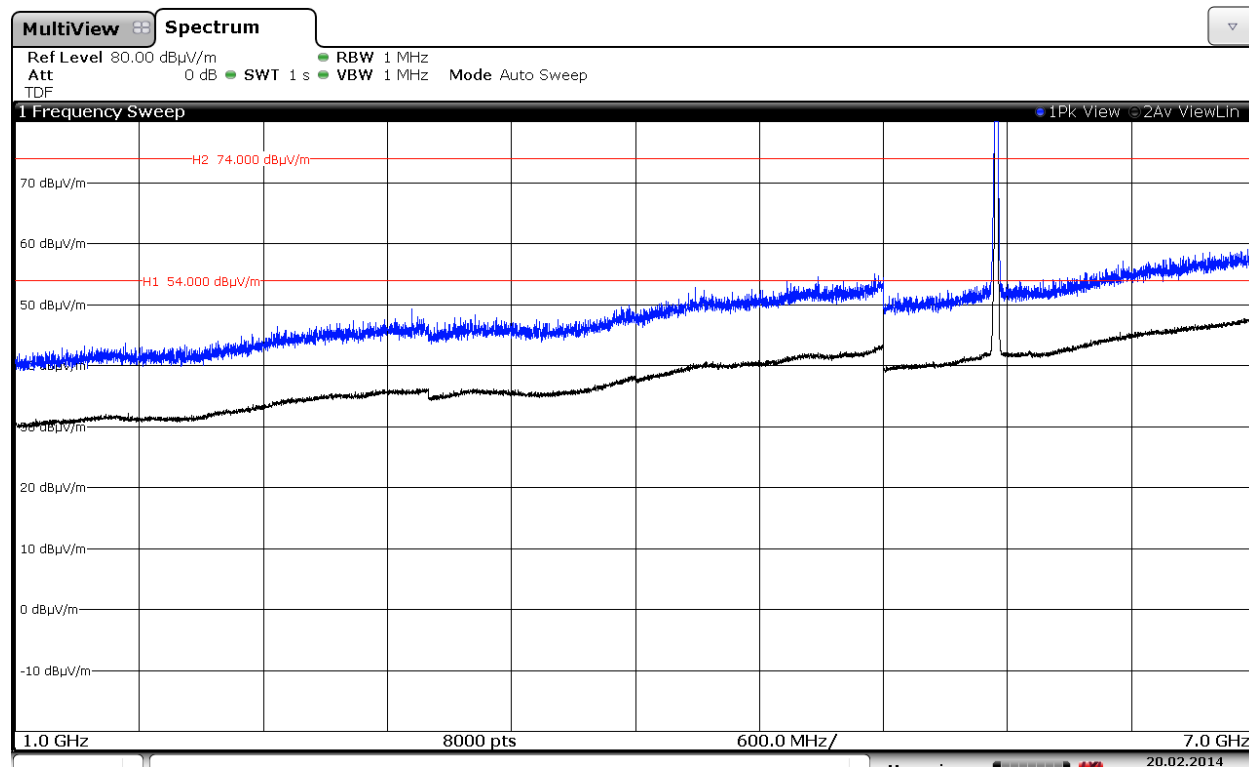


Note: The peak above the limit is the carrier frequency.

Lowest Channel: 5745 MHz. Chain A+B

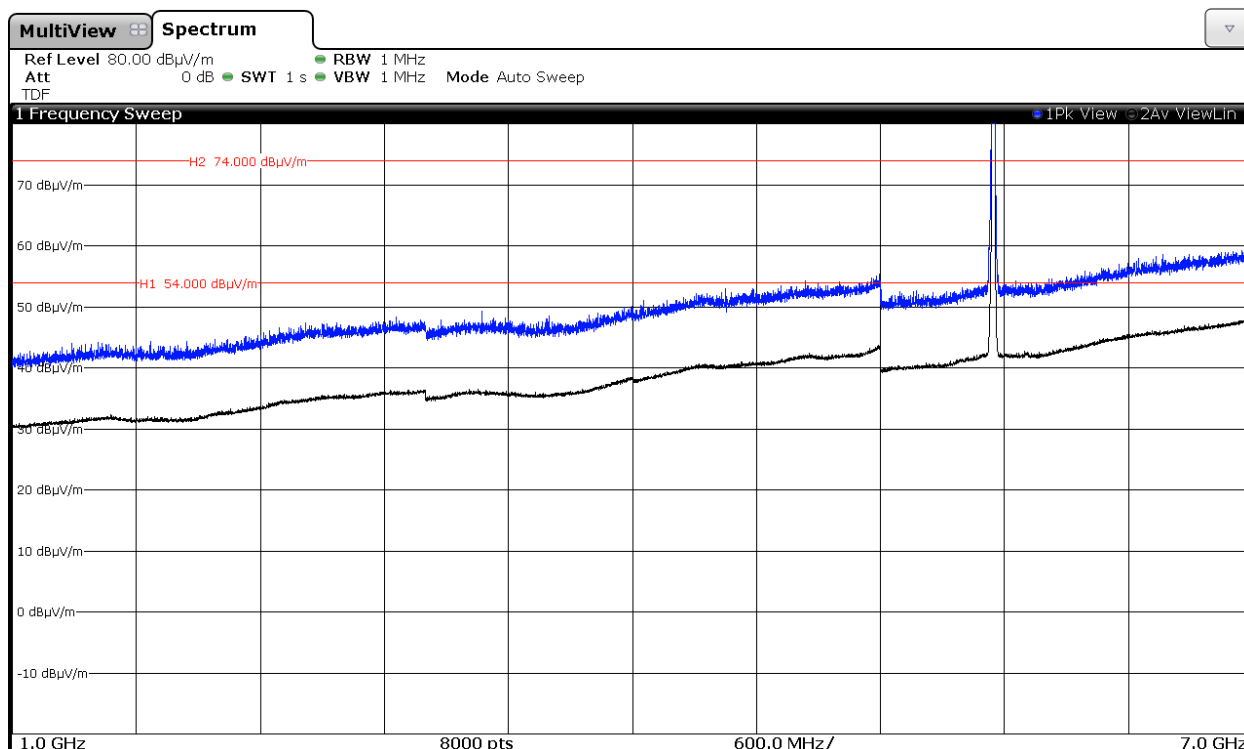


Note: The peak above the limit is the carrier frequency.

Middle Channel: 5785 MHz. Chain A

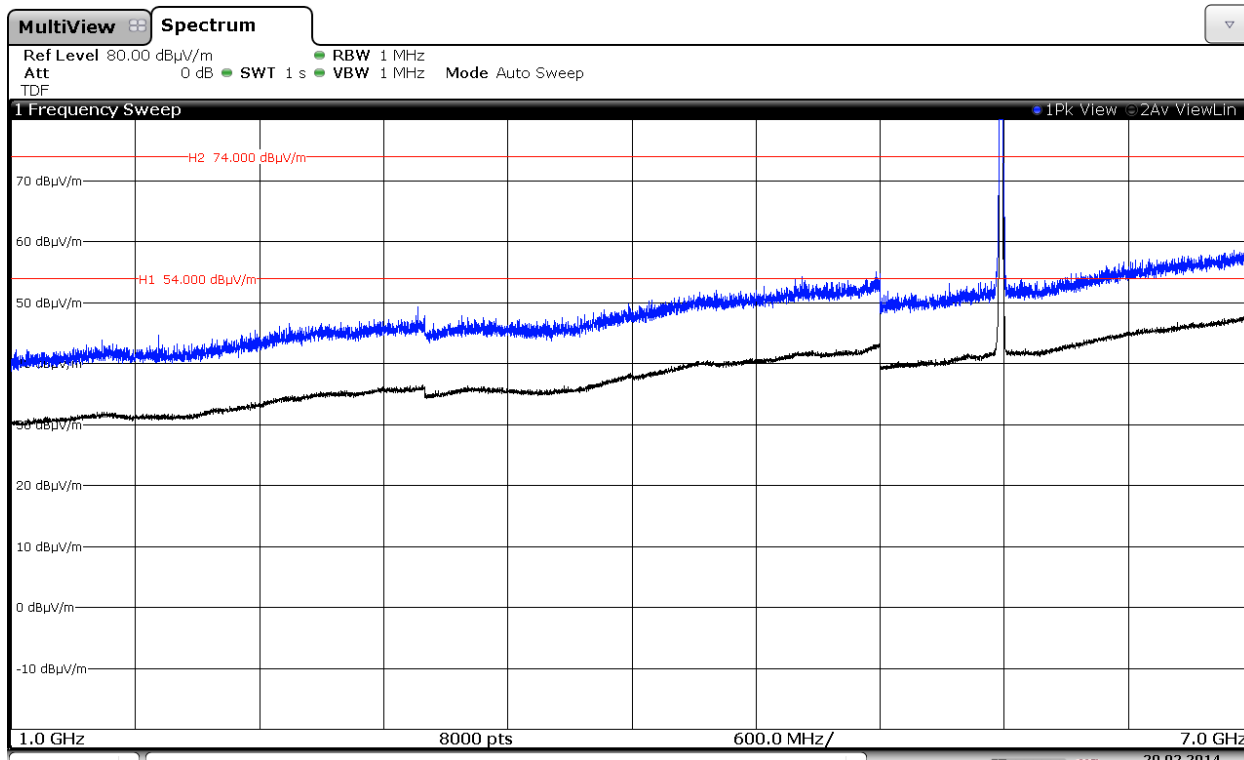


Note: The peak above the limit is the carrier frequency.

Middle Channel: 5785 MHz. Chain B

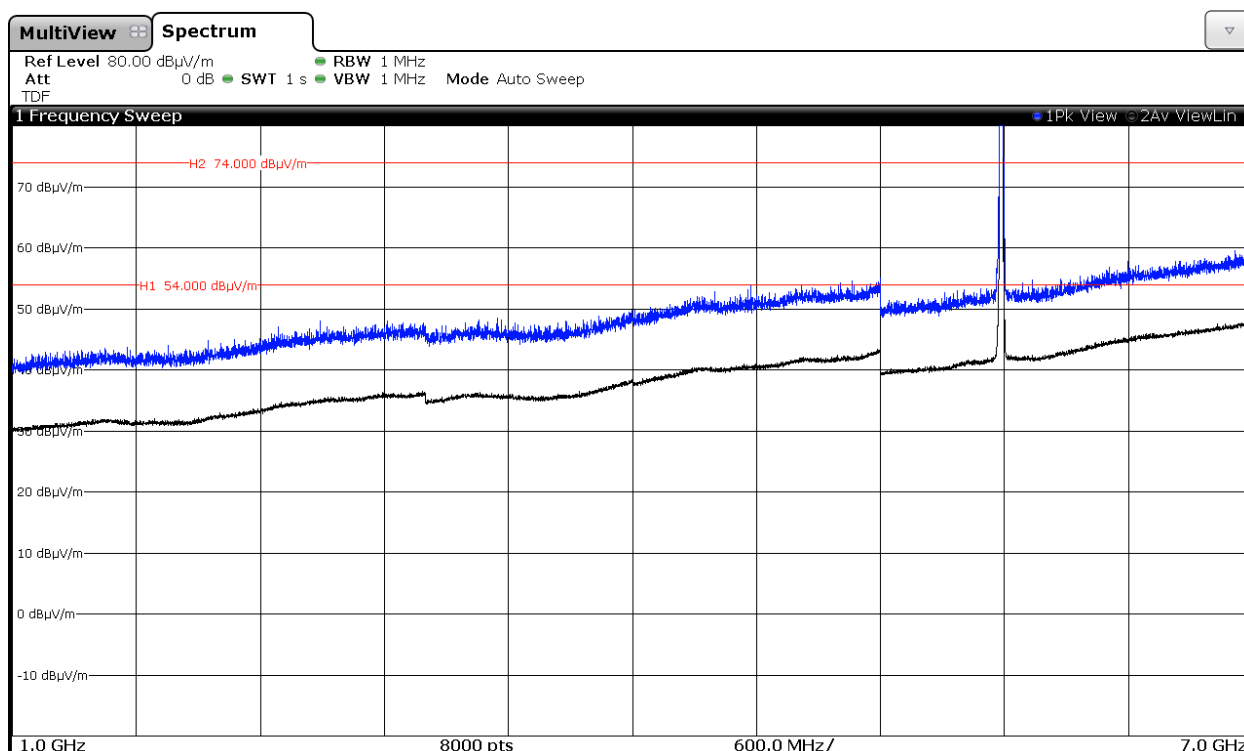


Note: The peak above the limit is the carrier frequency.

Middle Channel: 5785 MHz. Chain A+B

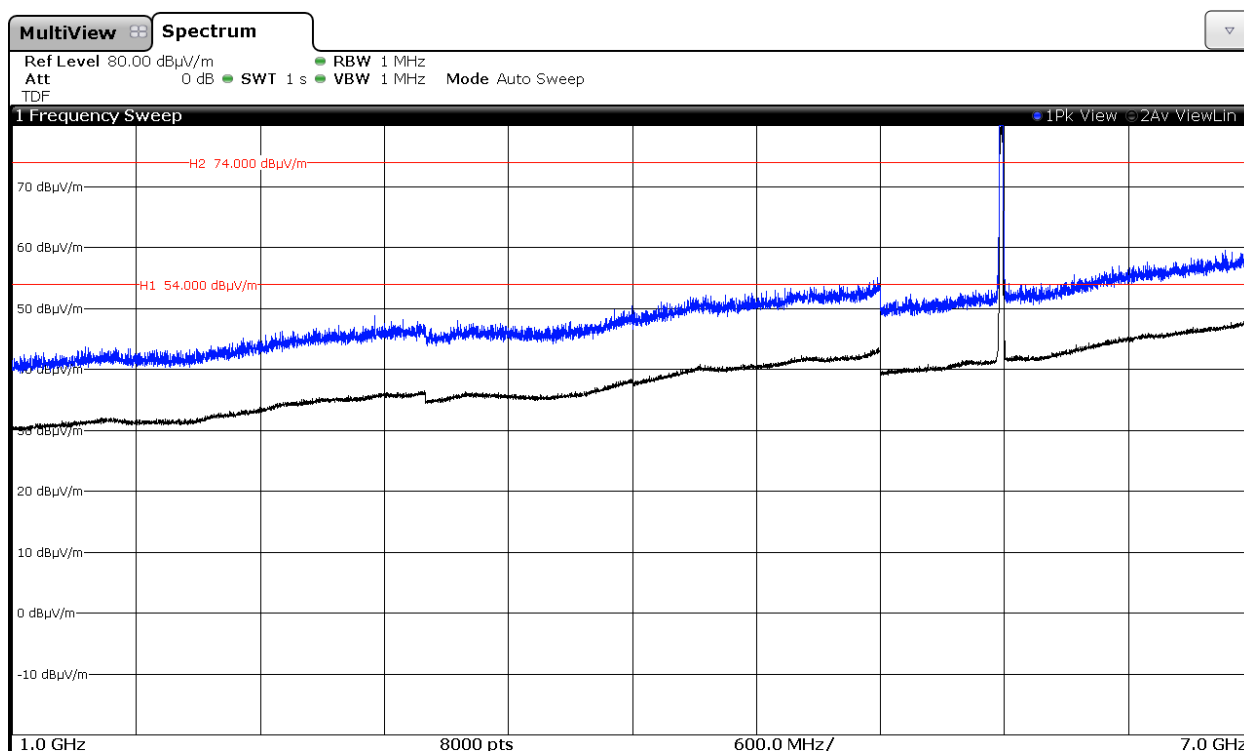


Note: The peak above the limit is the carrier frequency.

Highest Channel: 5825 MHz. Chain A

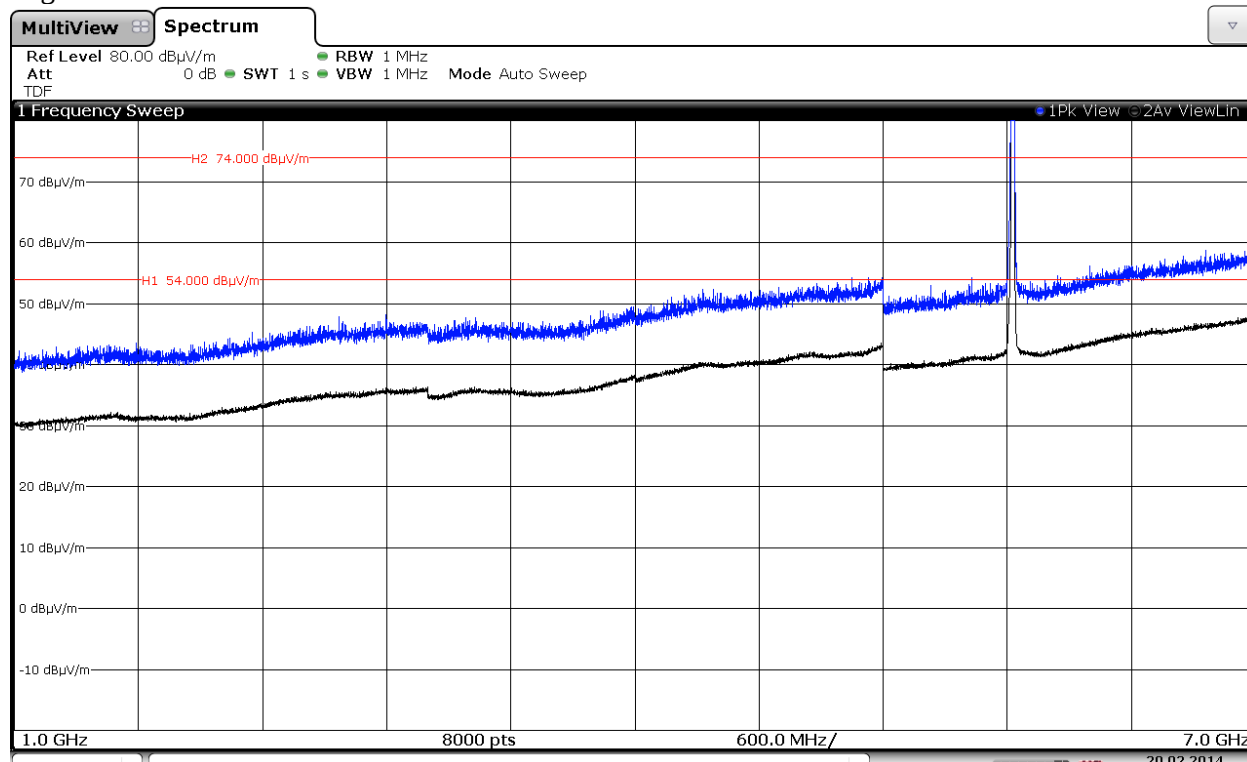


Note: The peak above the limit is the carrier frequency.

Highest Channel: 5825 MHz. Chain B

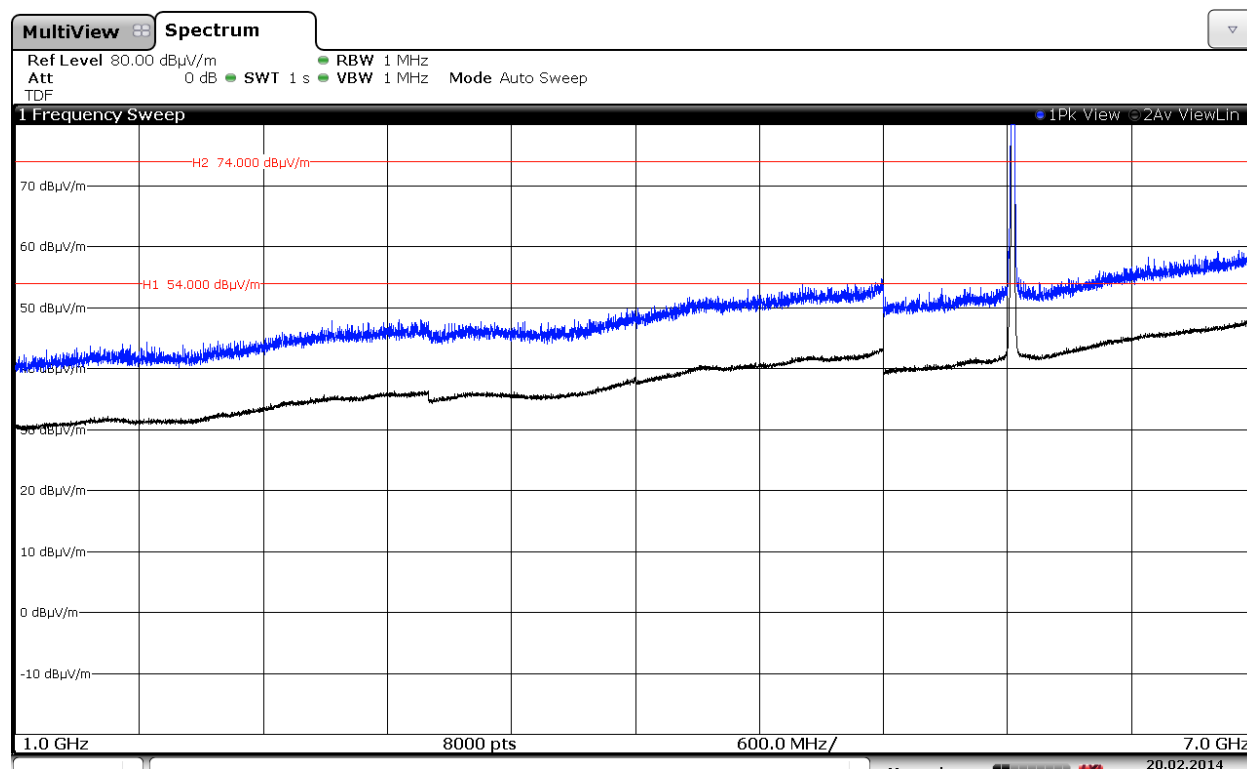

Note: The peak above the limit is the carrier frequency.


Highest Channel: 5825 MHz. Chain A+B

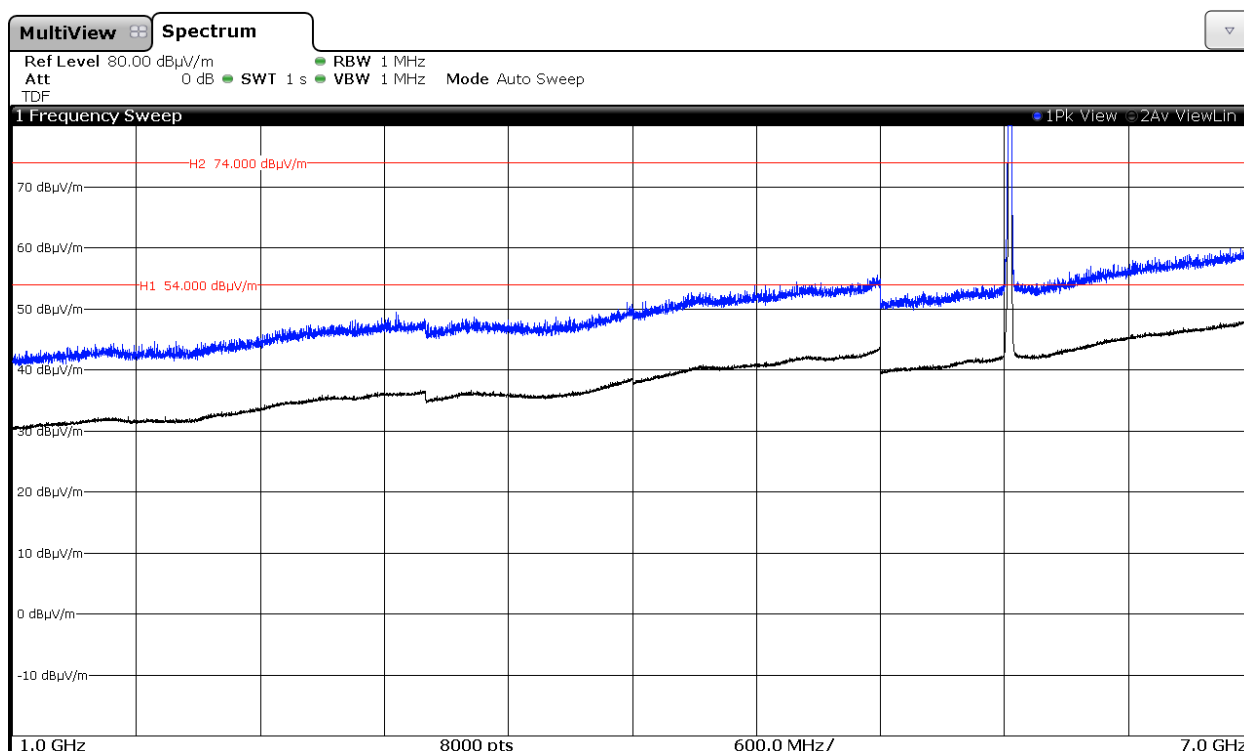

Note: The peak above the limit is the carrier frequency.


### 3. WiFi 5GHz 802.11 n40 mode

Highest Channel: 5795 MHz. Chain A

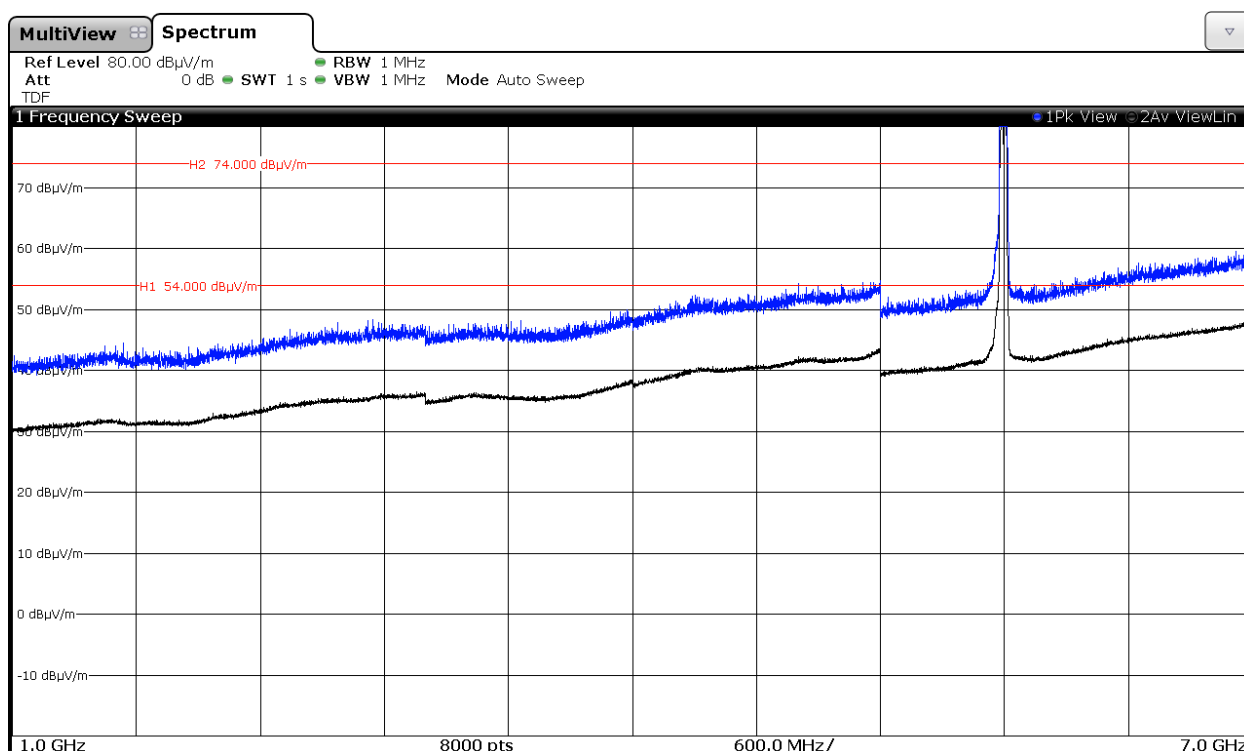


Note: The peak above the limit is the carrier frequency.

Highest Channel: 5795 MHz. Chain B

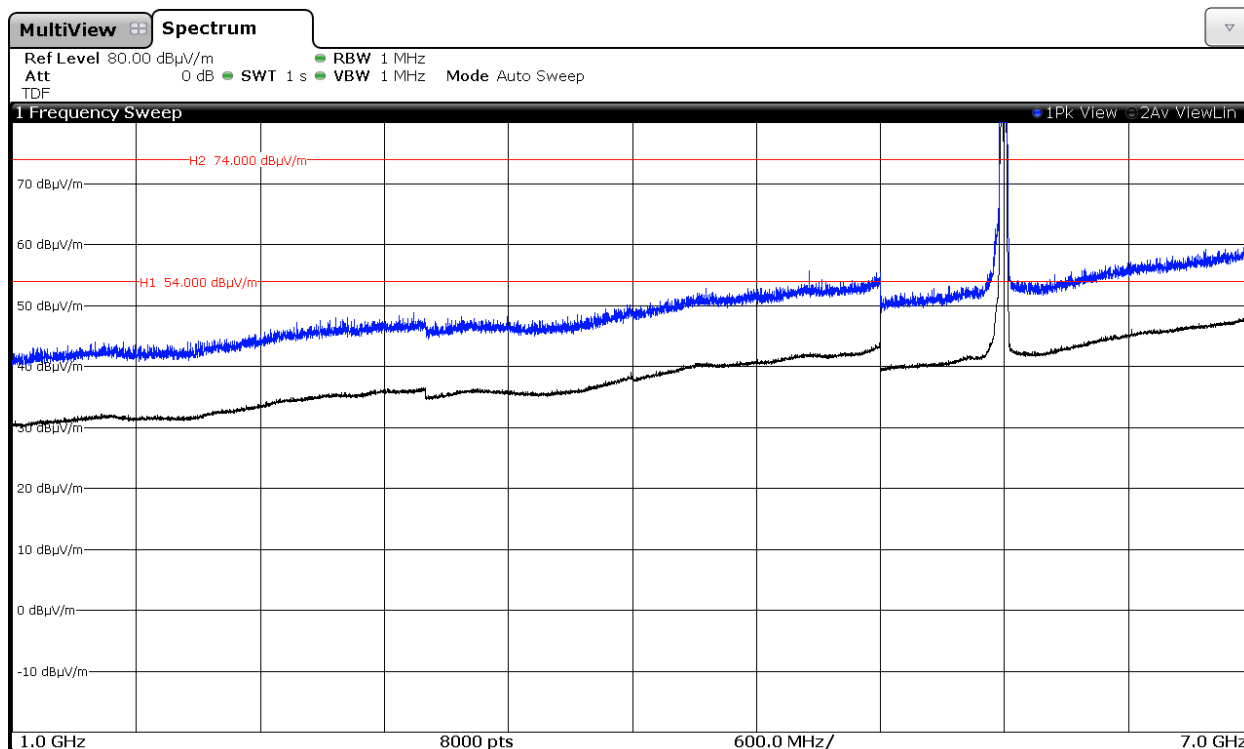

Note: The peak above the limit is the carrier frequency.


Highest Channel: 5795 MHz. Chain A+B

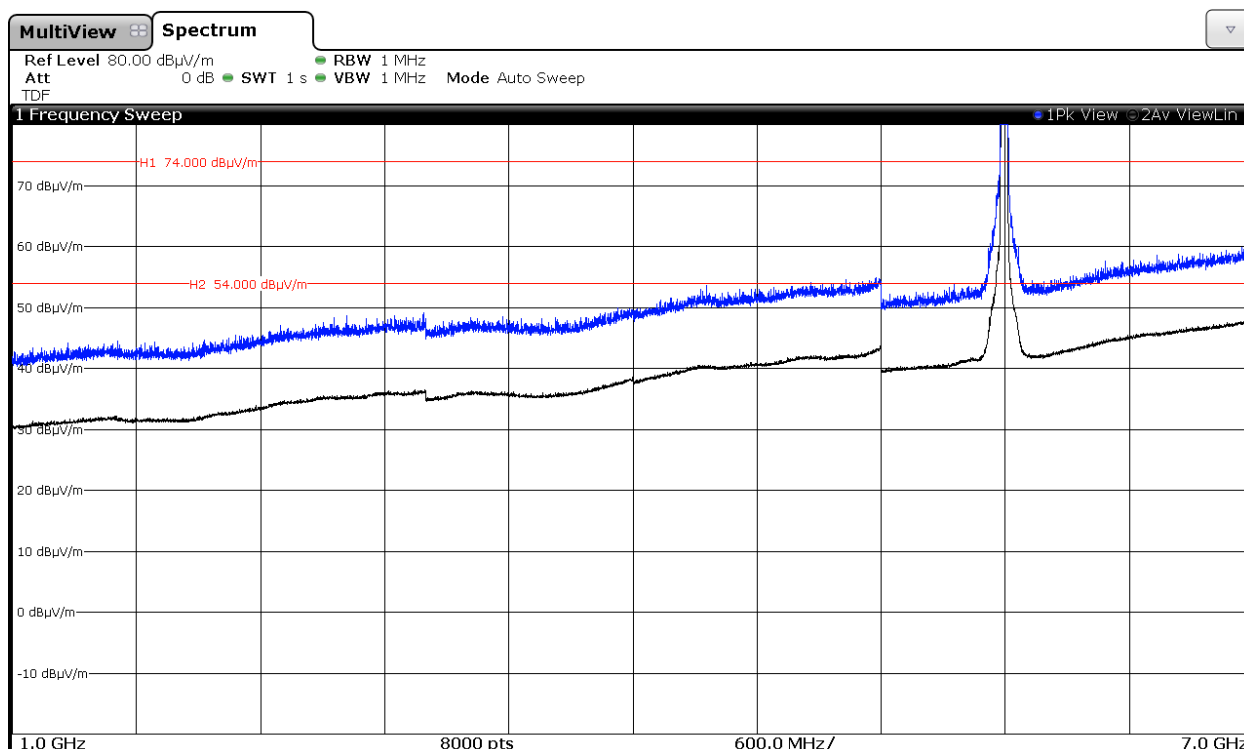

Note: The peak above the limit is the carrier frequency.


#### 4. WiFi 5GHz 802.11 ac80 mode

Middle Channel: 5775 MHz. Chain A

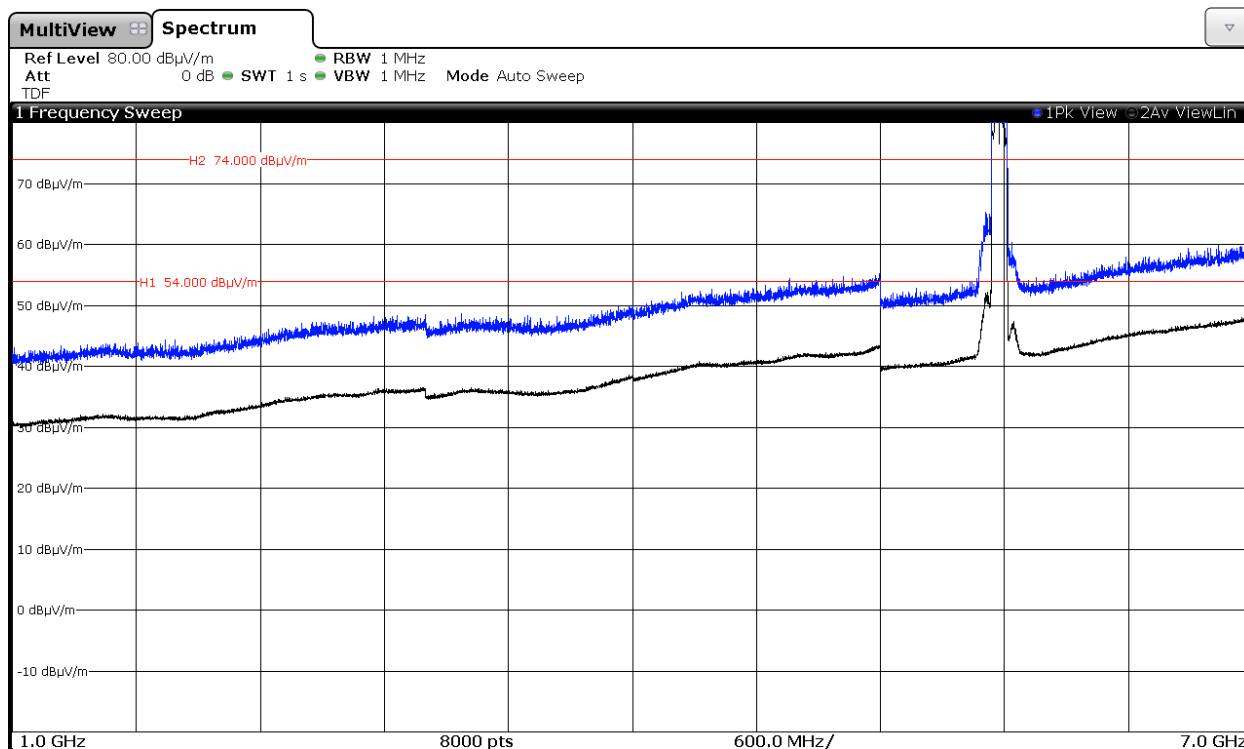


Note: The peak above the limit is the carrier frequency.

Middle Channel: 5775 MHz. Chain B

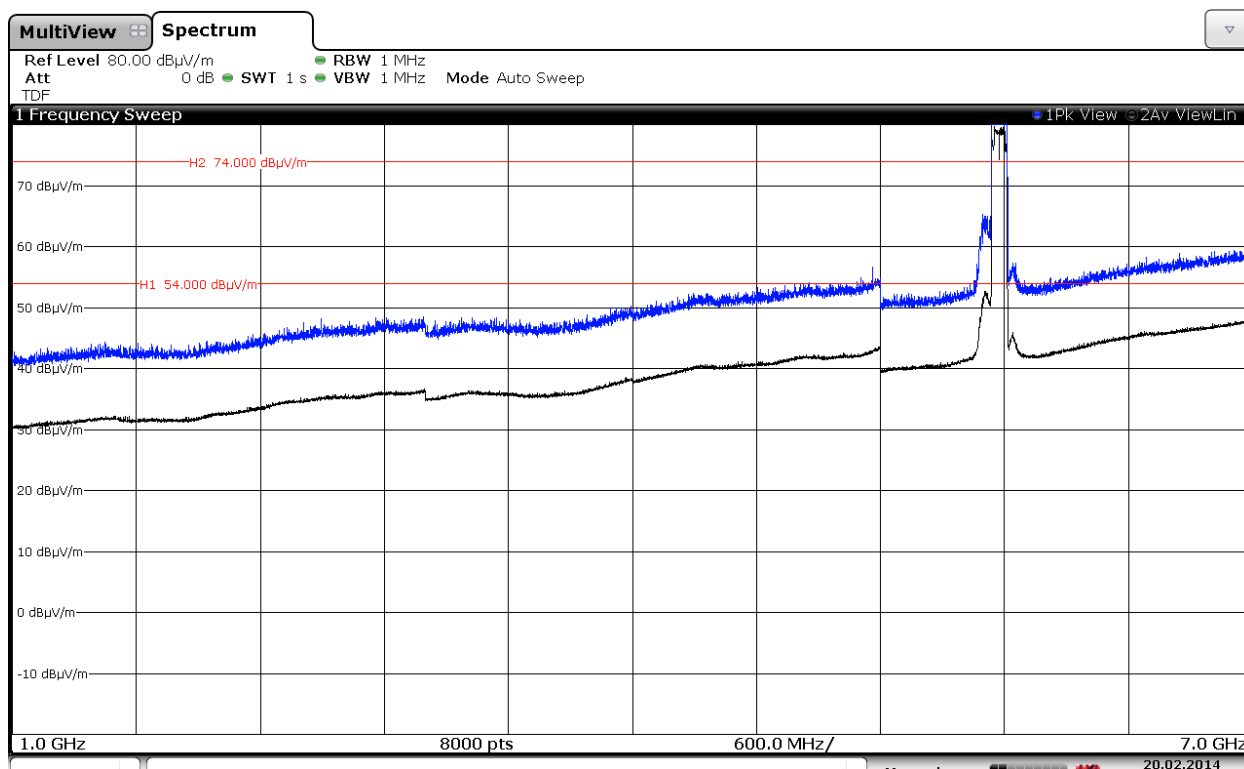

Note: The peak above the limit is the carrier frequency.

Middle Channel: 5775 MHz. Chain A+B

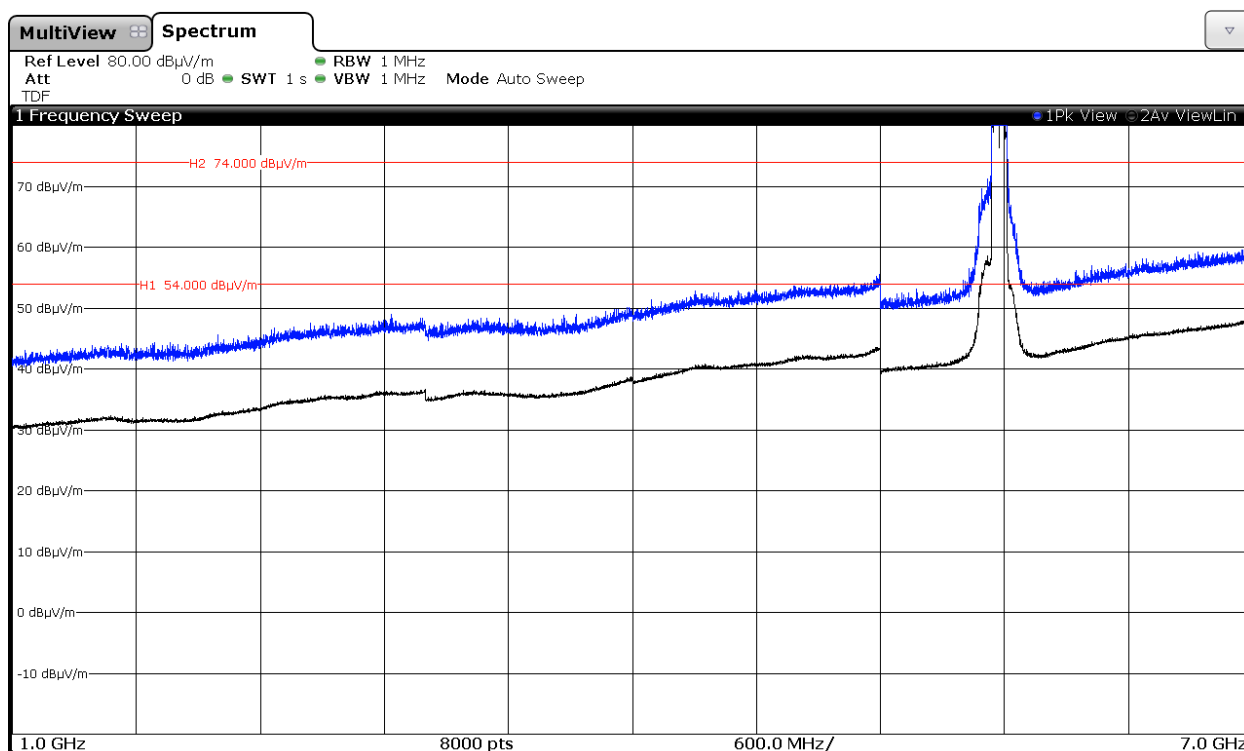


Note: The peak above the limit is the carrier frequency.


FREQUENCY RANGE 7 GHz to 18 GHz.

# 1. WiFi 5GHz 802.11 a mode

Middle Channel: 5785 MHz. Chain A

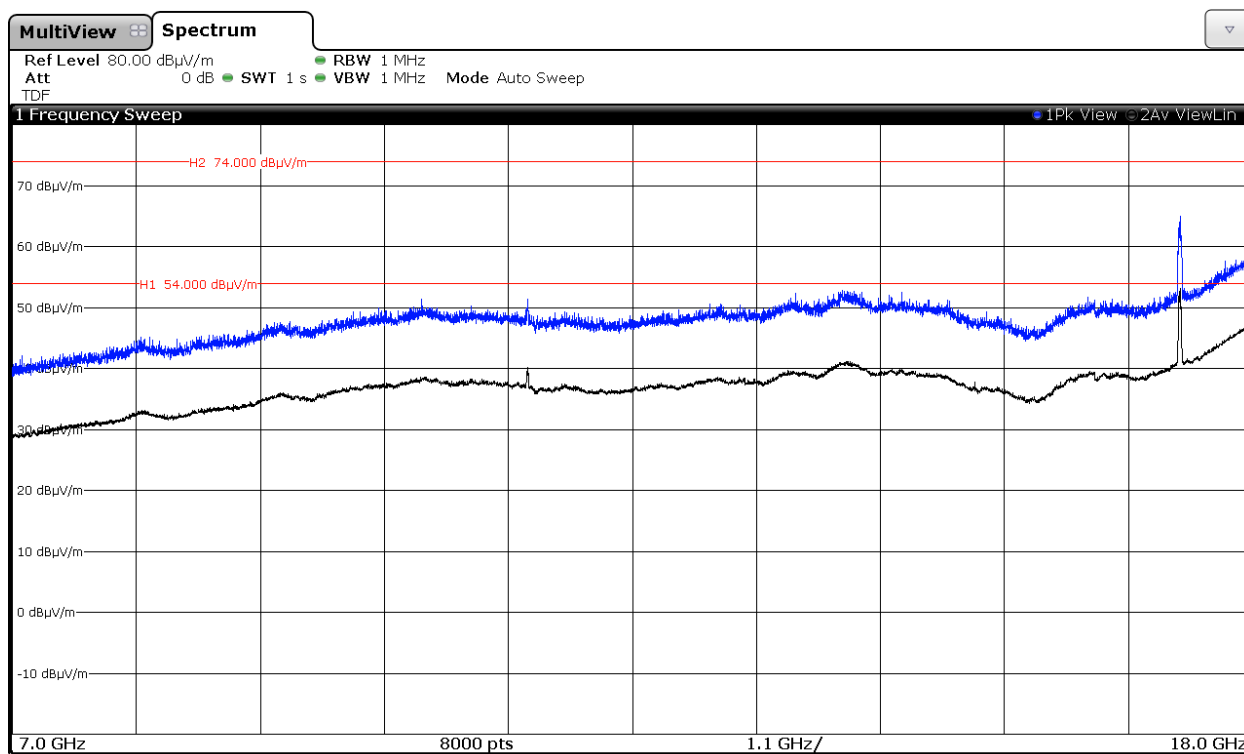


Middle Channel: 5785 MHz. Chain B

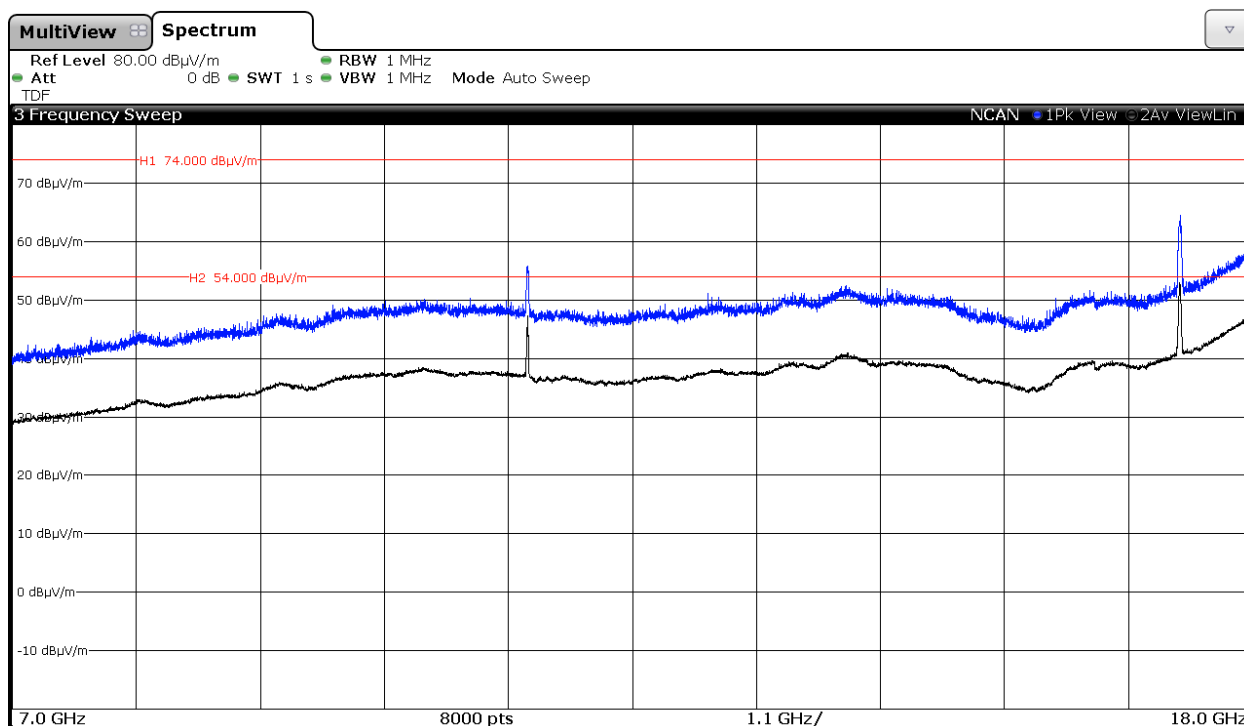


## 2. WiFi 5GHz 802.11 n20 mode


Lowest Channel: 5745 MHz. Chain A

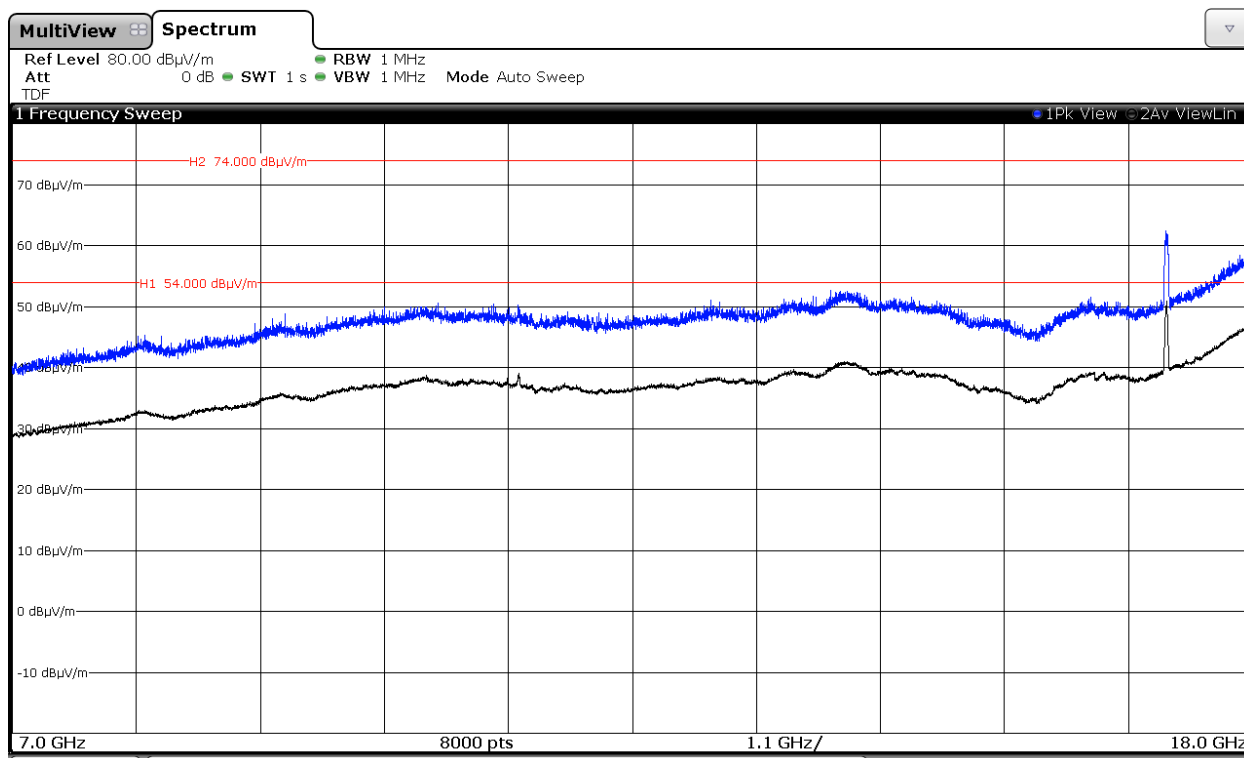


Lowest Channel: 5745 MHz. Chain B

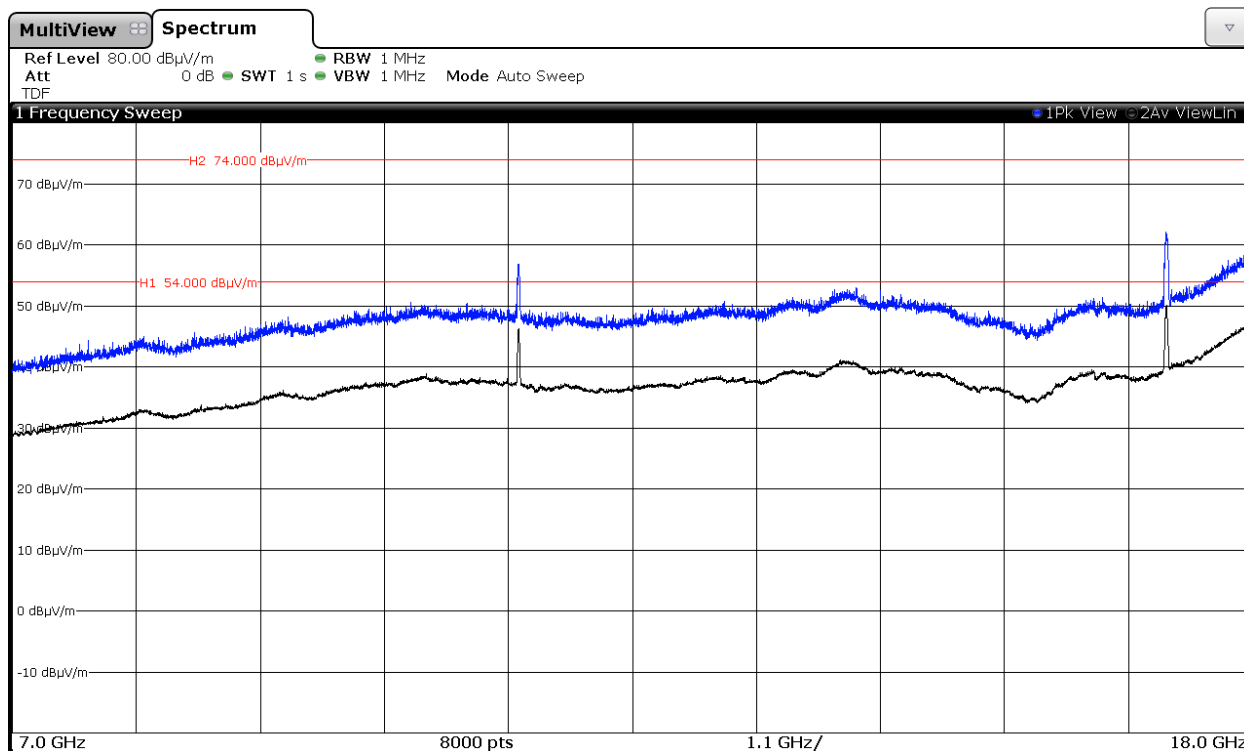


Lowest Channel: 5745 MHz. Chain A+B

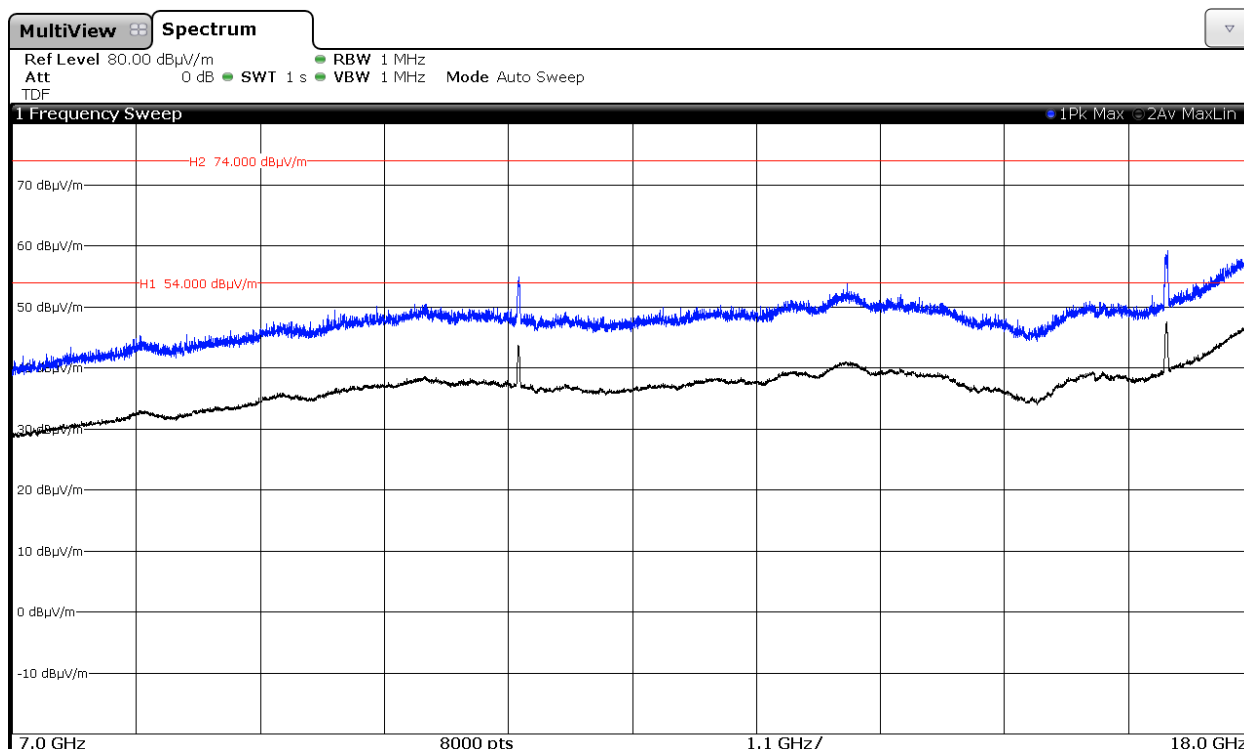


Middle Channel: 5785 MHz. Chain A

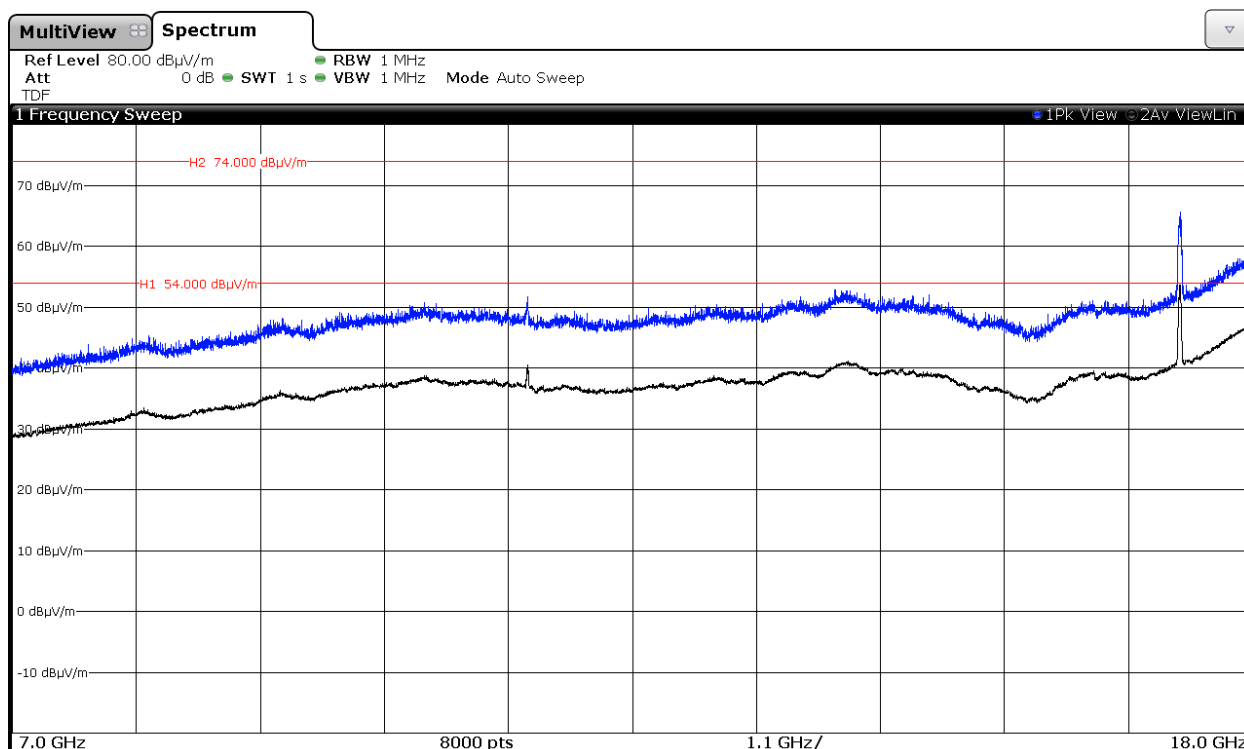


Middle Channel: 5785 MHz. Chain B

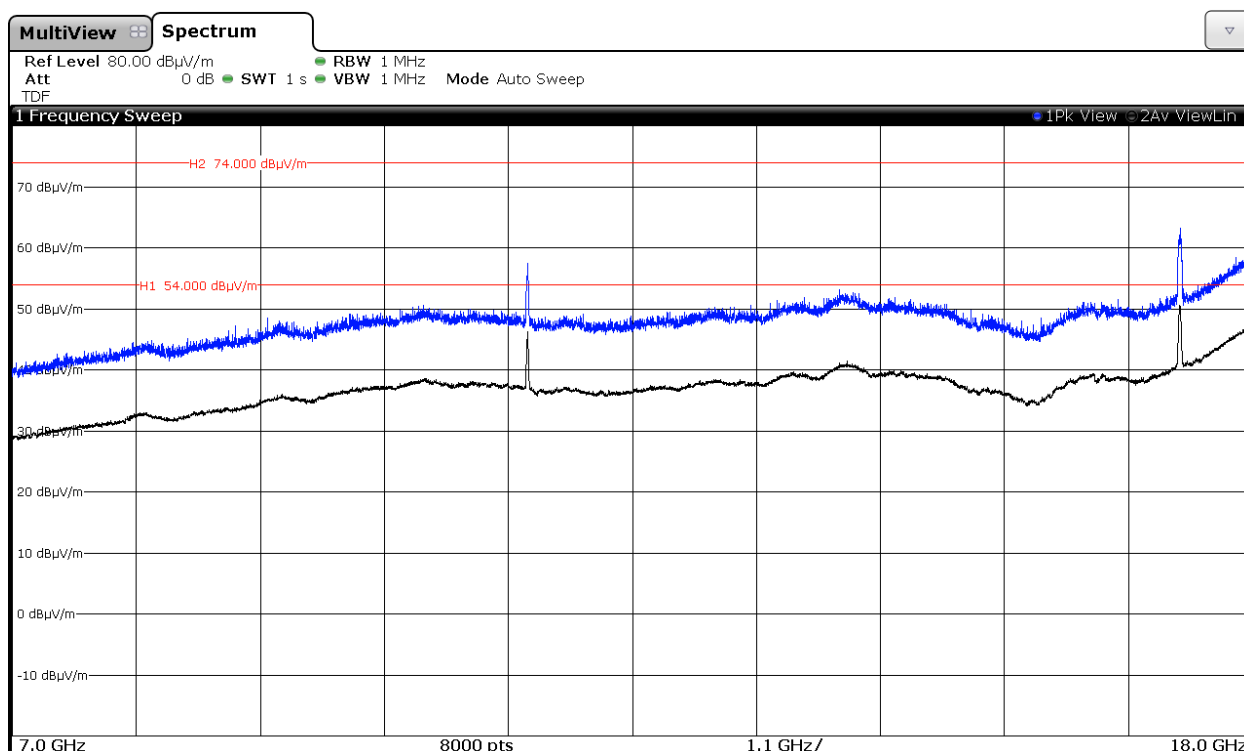


Middle Channel: 5785 MHz. Chain A+B

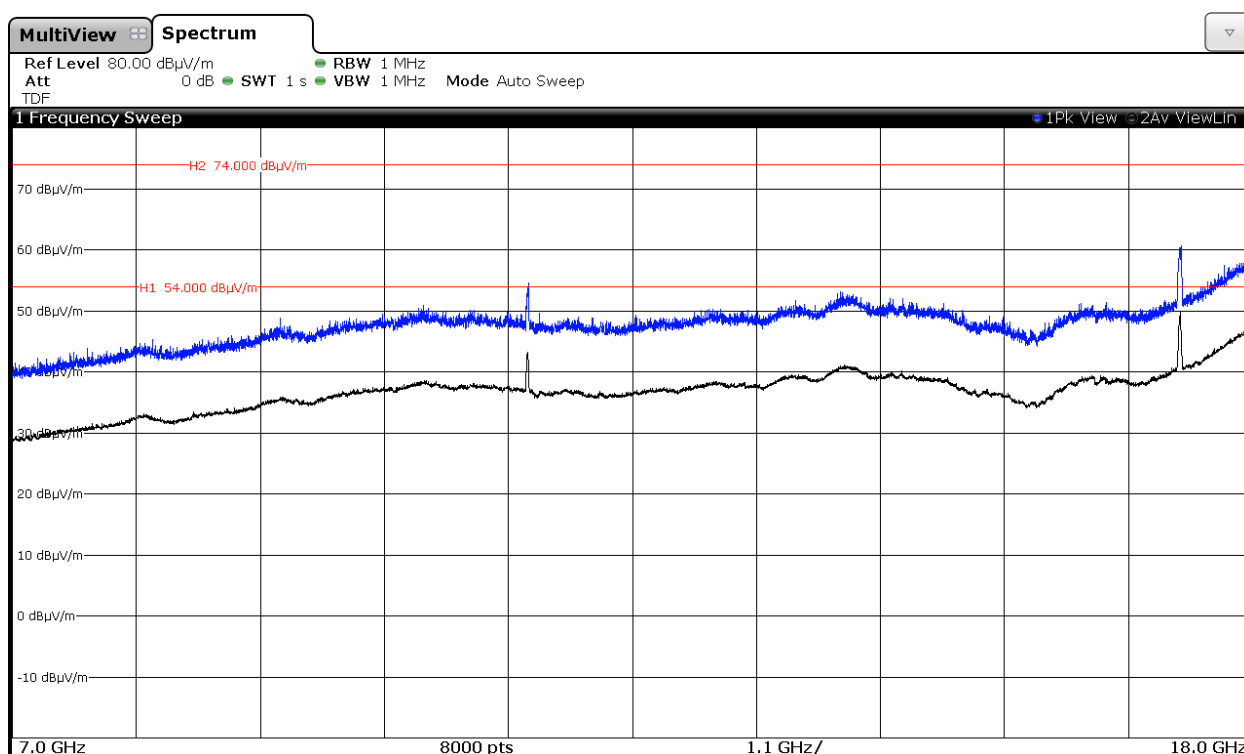


Highest Channel: 5825 MHz. Chain A

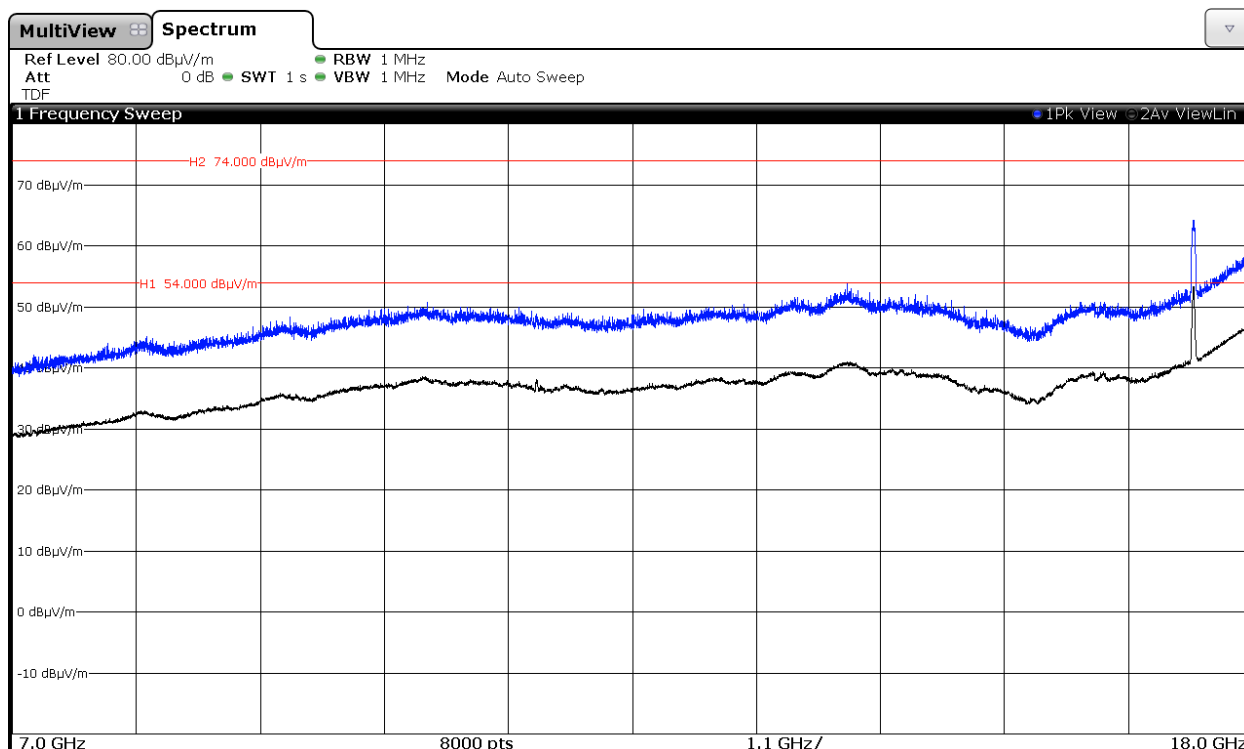

Highest Channel: 5825 MHz. Chain B

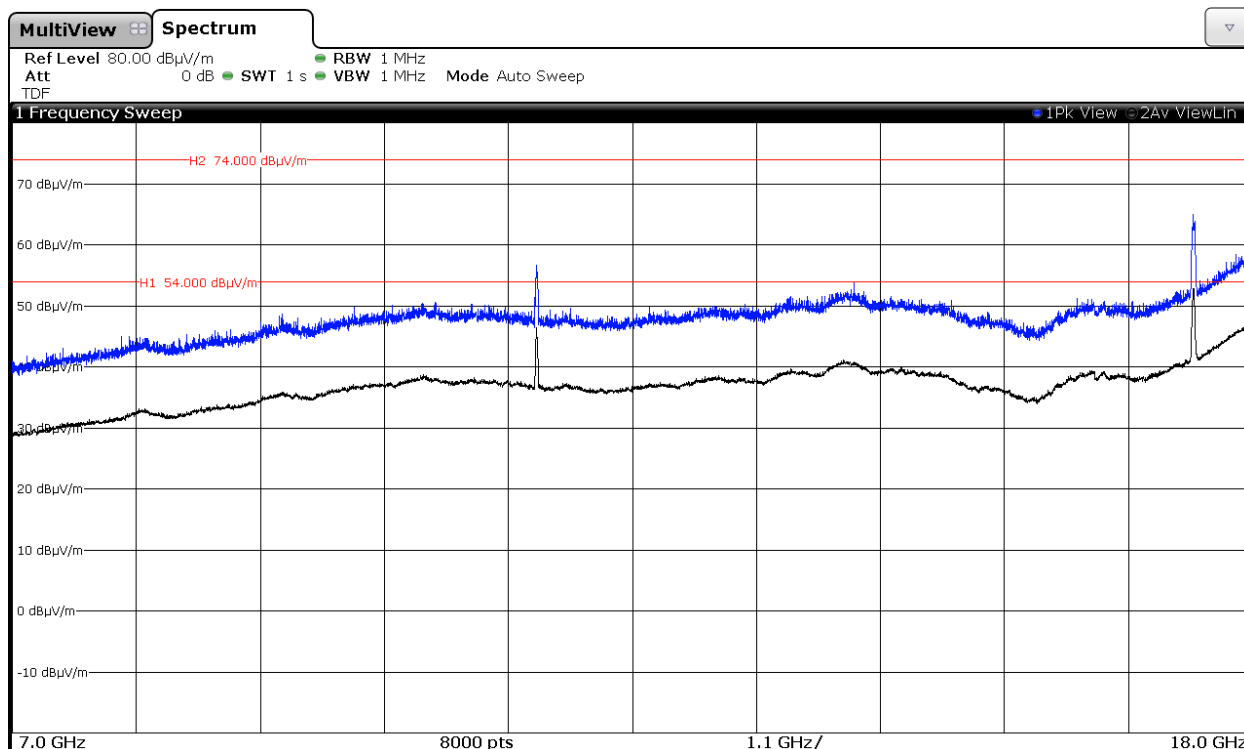


Highest Channel: 5825 MHz. Chain A+B

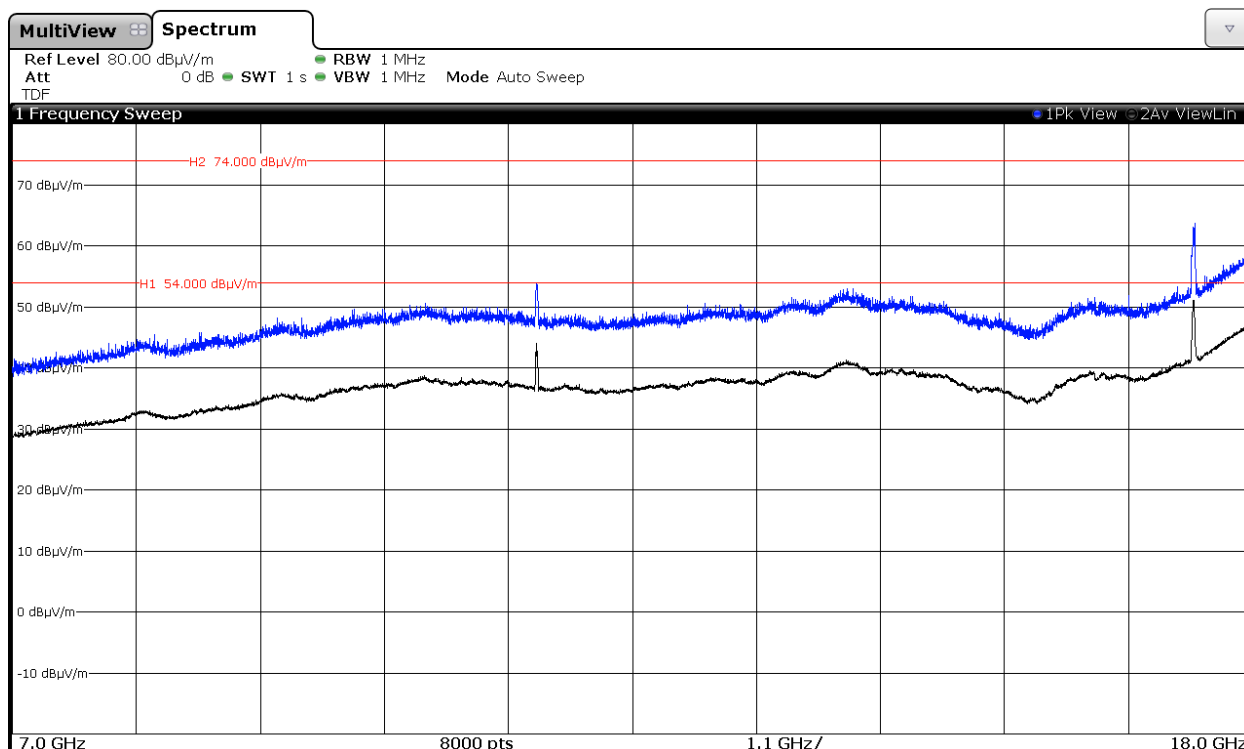


### 3. WiFi 5GHz 802.11 n40 mode


Highest Channel: 5795 MHz. Chain A

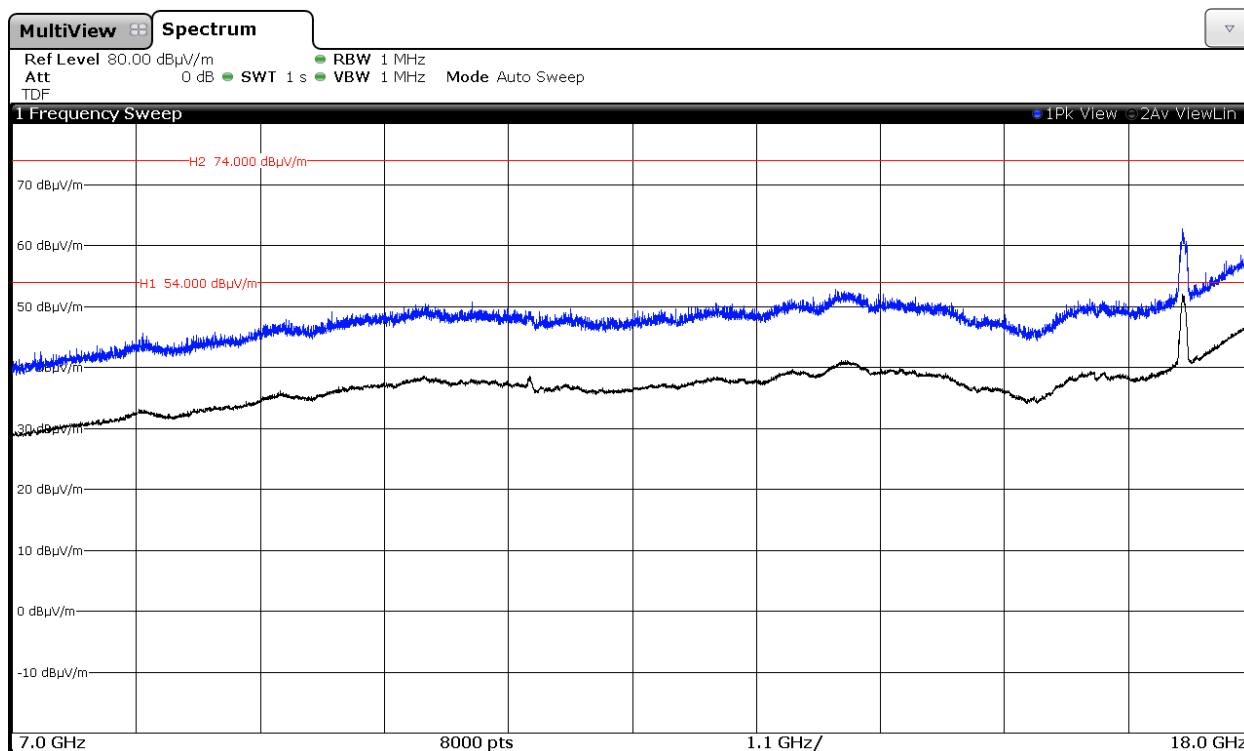

Highest Channel: 5795 MHz. Chain B

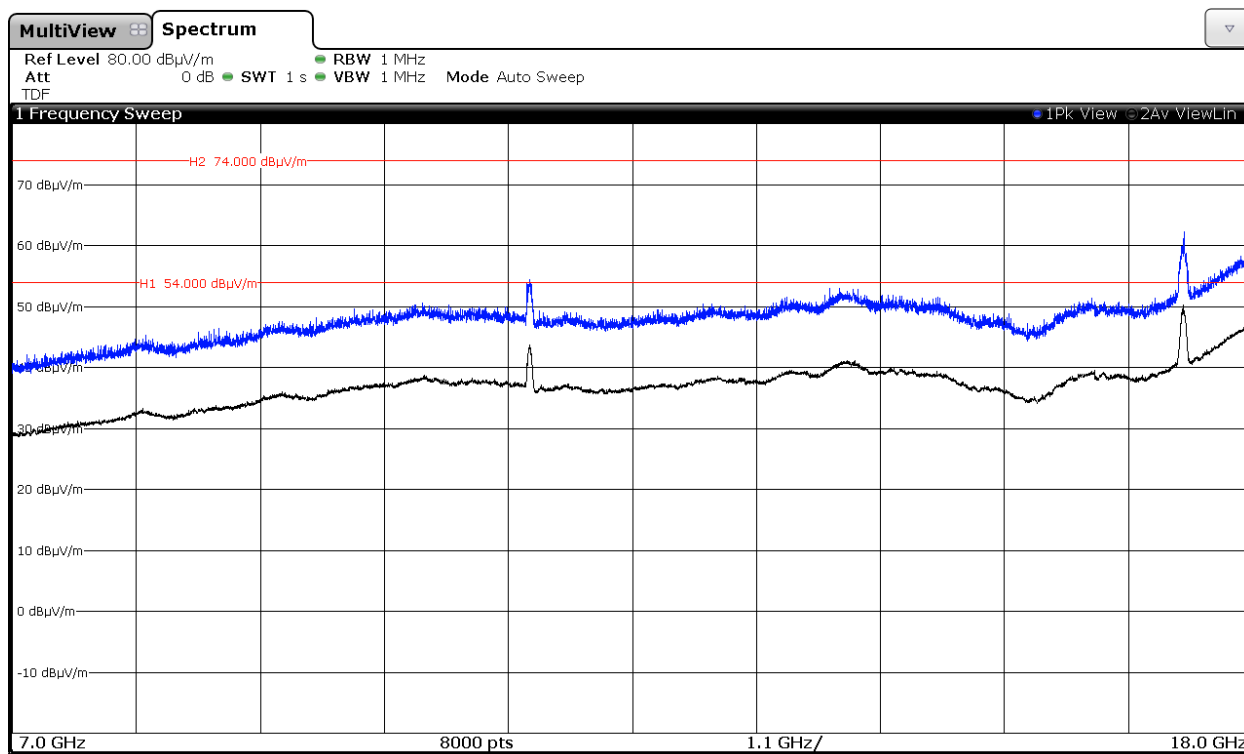


Highest Channel: 5795 MHz. Chain A+B

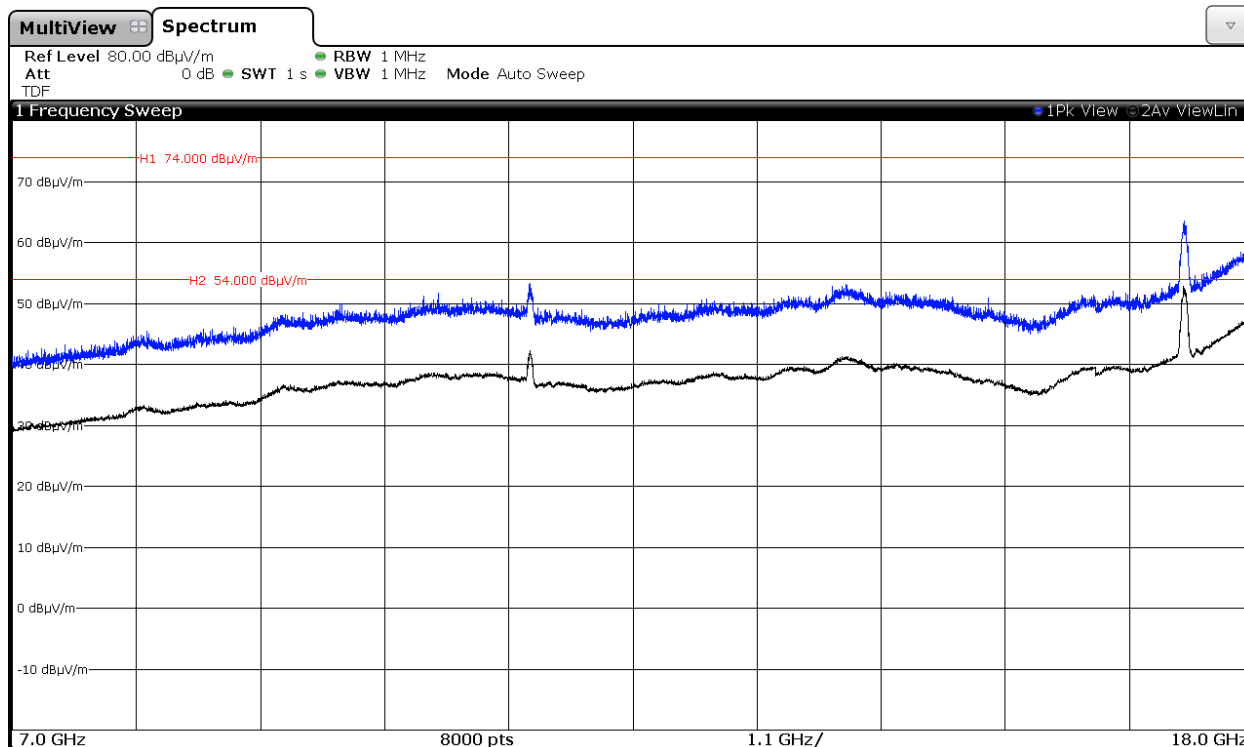


#### 4. WiFi 5GHz 802.11 ac80 mode


Middle Channel: 5775 MHz. Chain A.

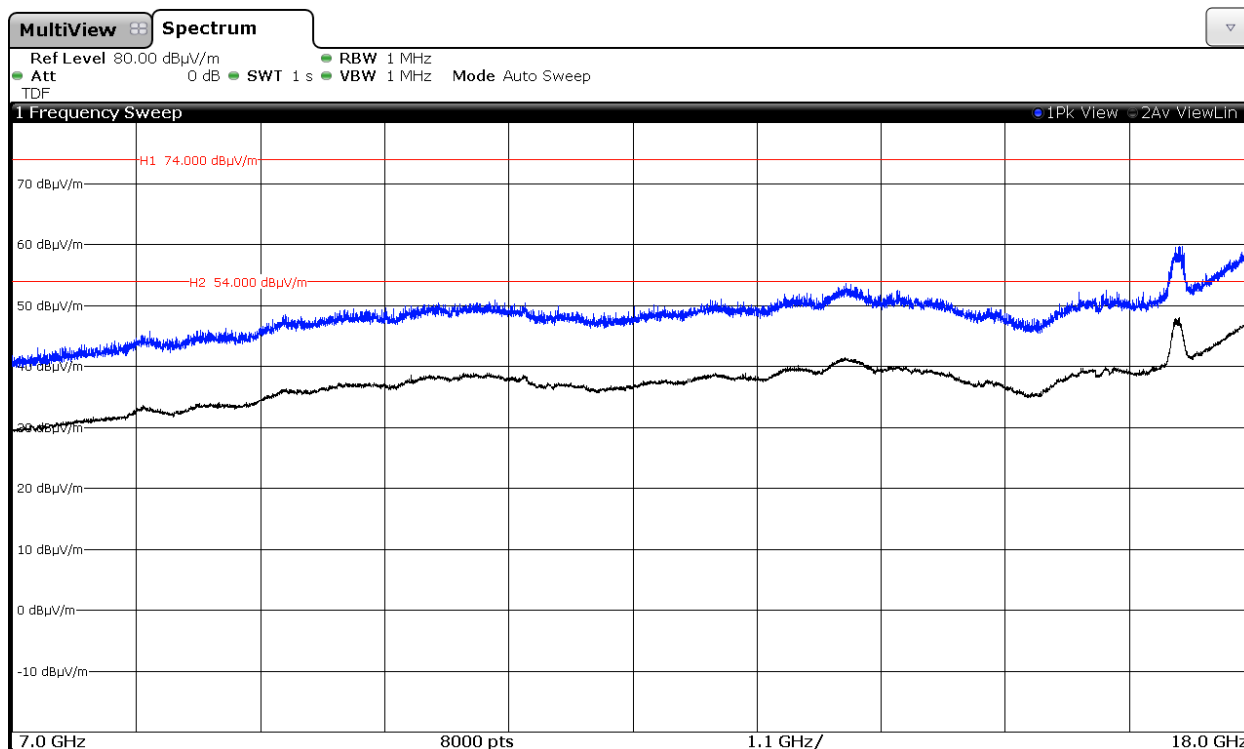

Middle Channel: 5775 MHz. Chain B.

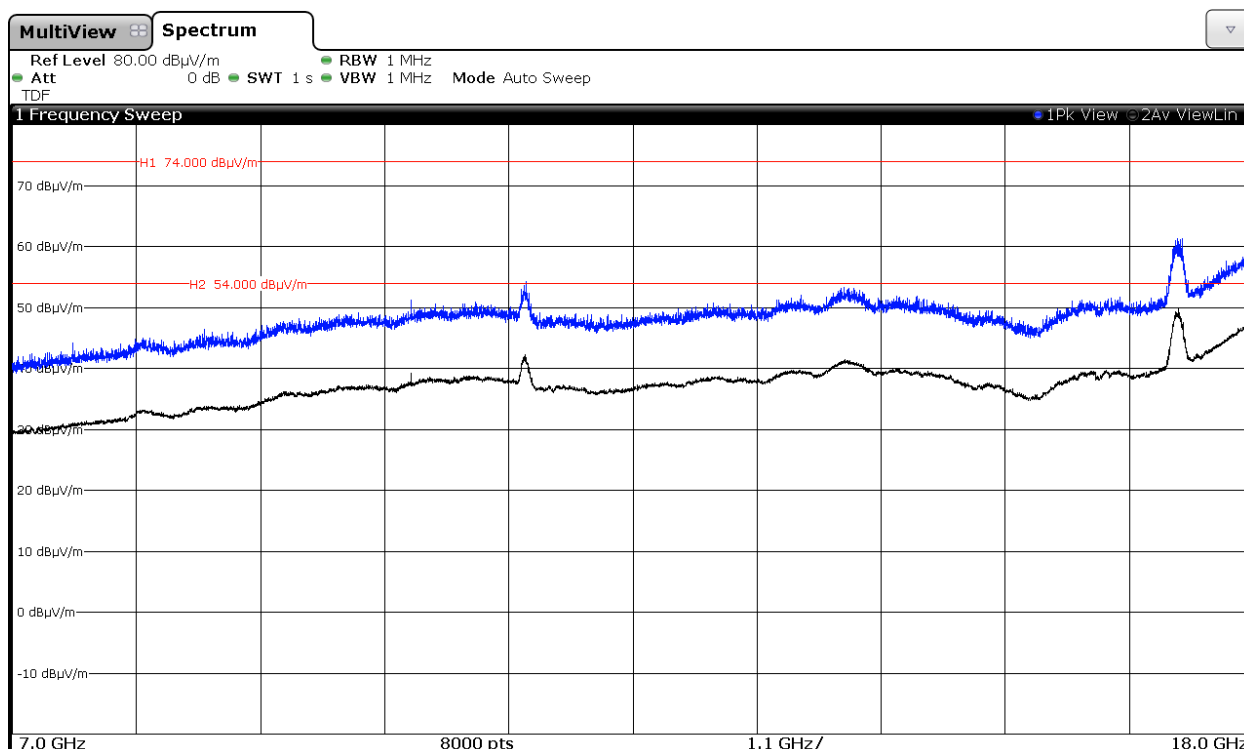


Middle Channel: 5775 MHz. Chain A+B.

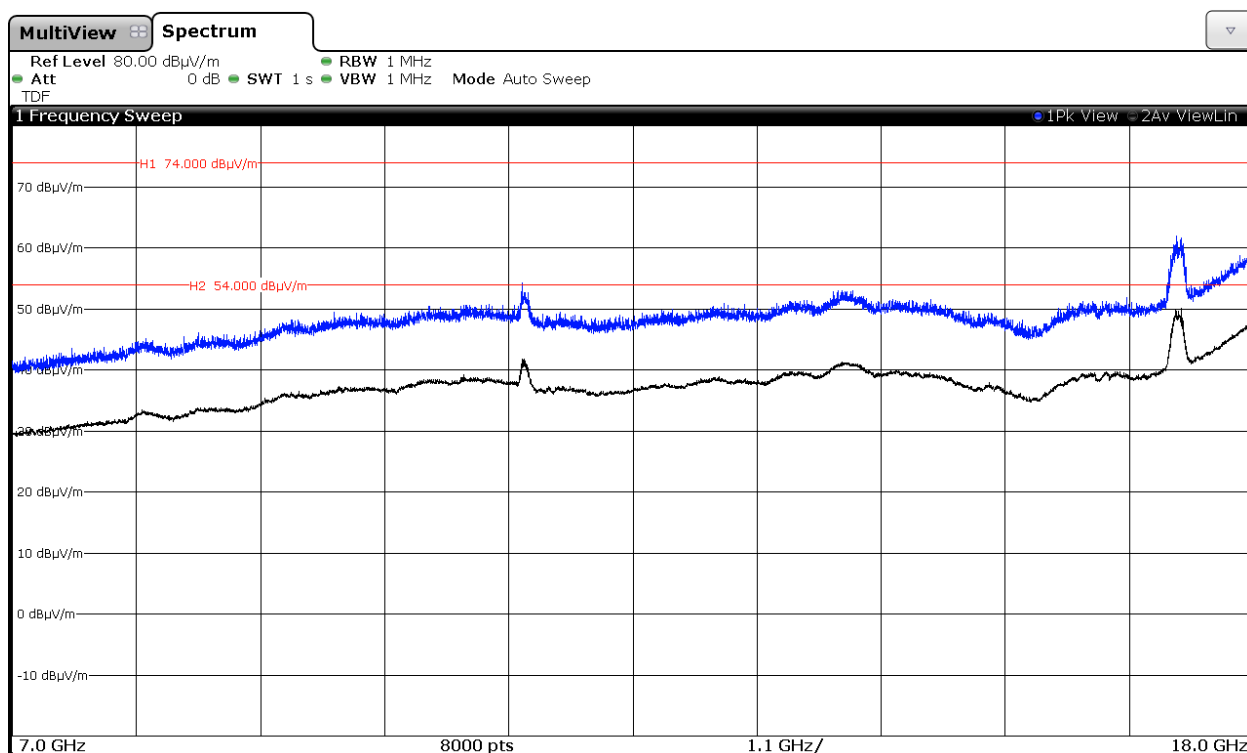


FREQUENCY RANGE 18 GHz to 26 GHz.

# 1. WiFi 5GHz 802.11 a mode

Middle Channel: 5785 MHz. Chain A

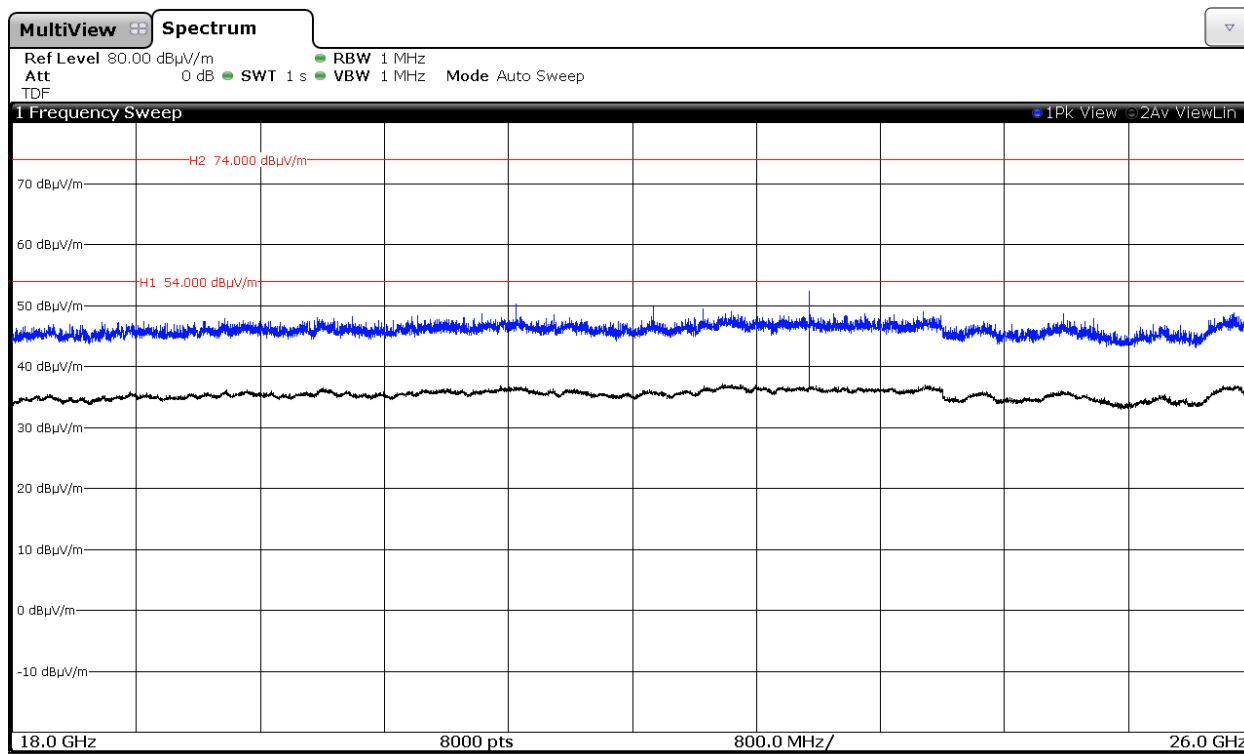


Middle Channel: 5785 MHz. Chain B

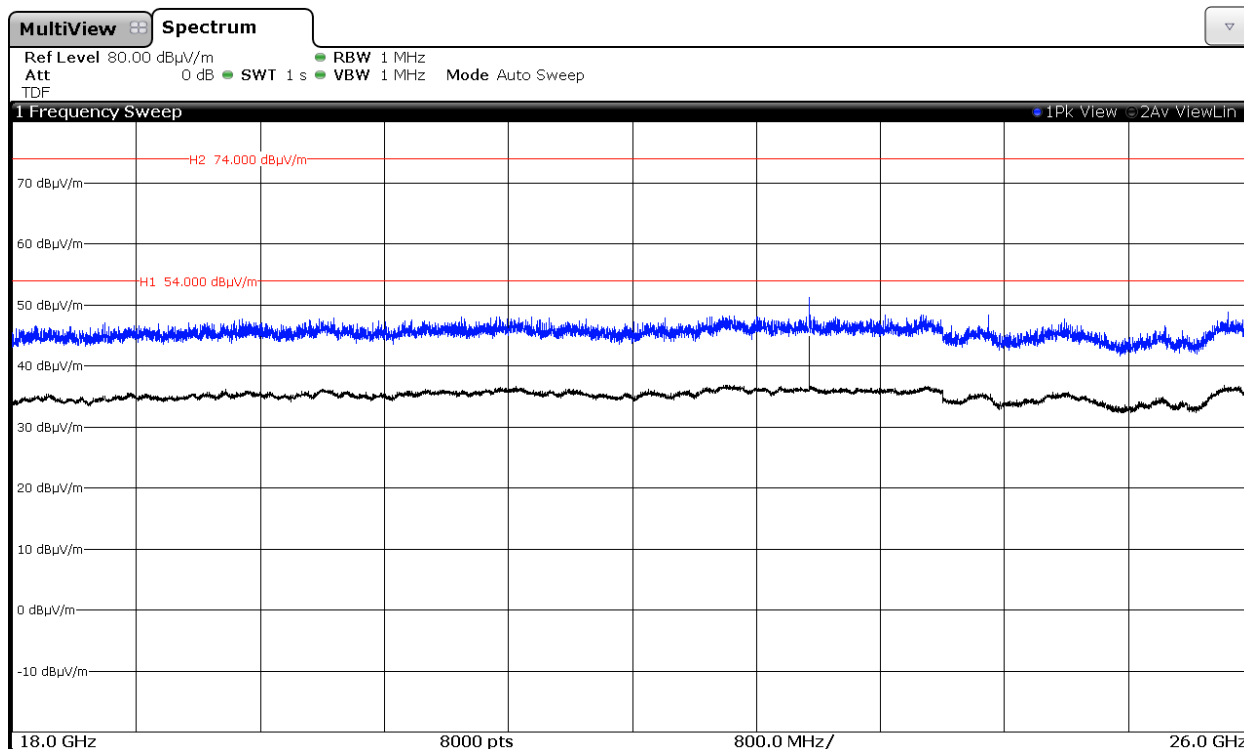


## 2. WiFi 5GHz 802.11 n20 mode


Lowest Channel: 5745 MHz. Chain A

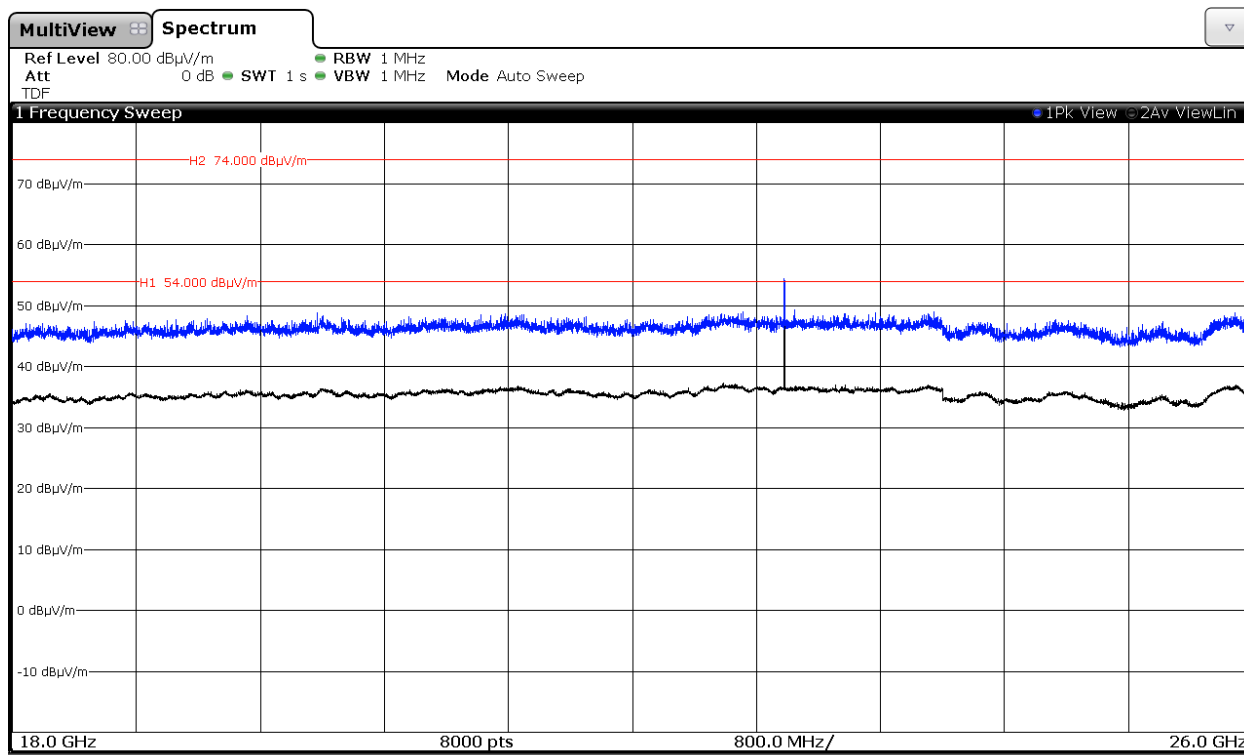


Lowest Channel: 5745 MHz. Chain B

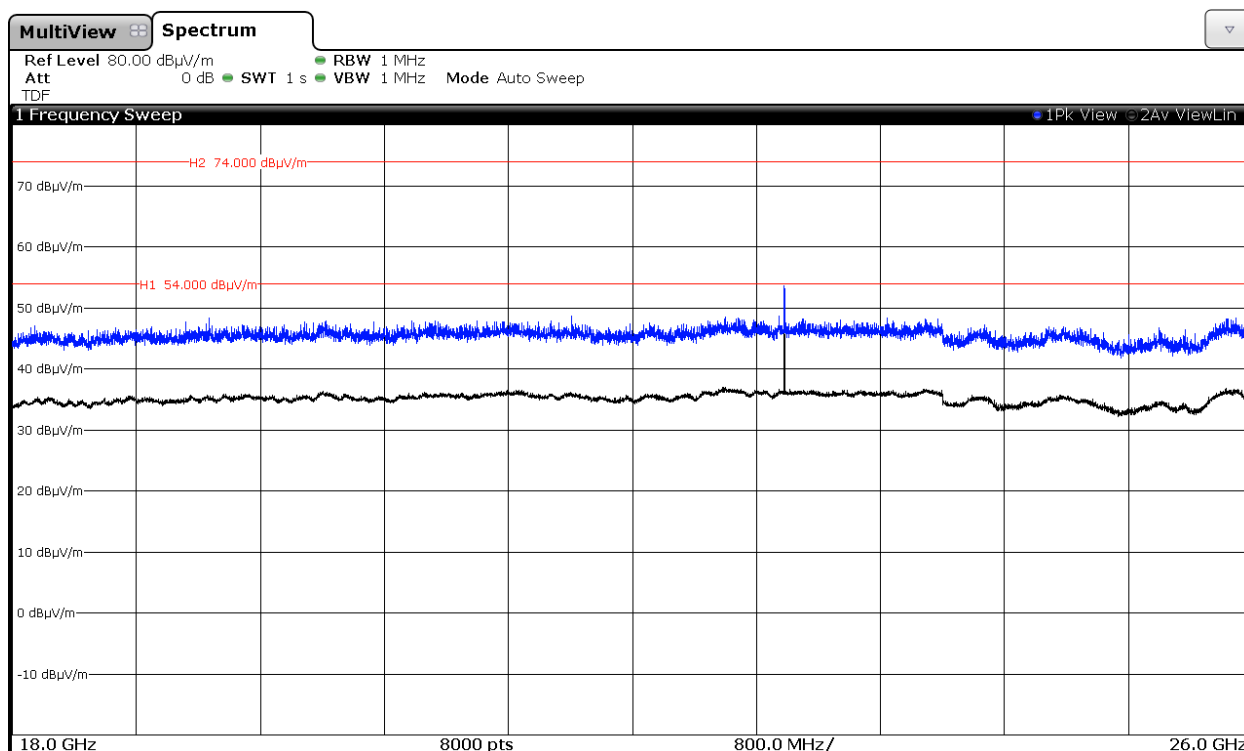


Lowest Channel: 5745 MHz. Chain A+B

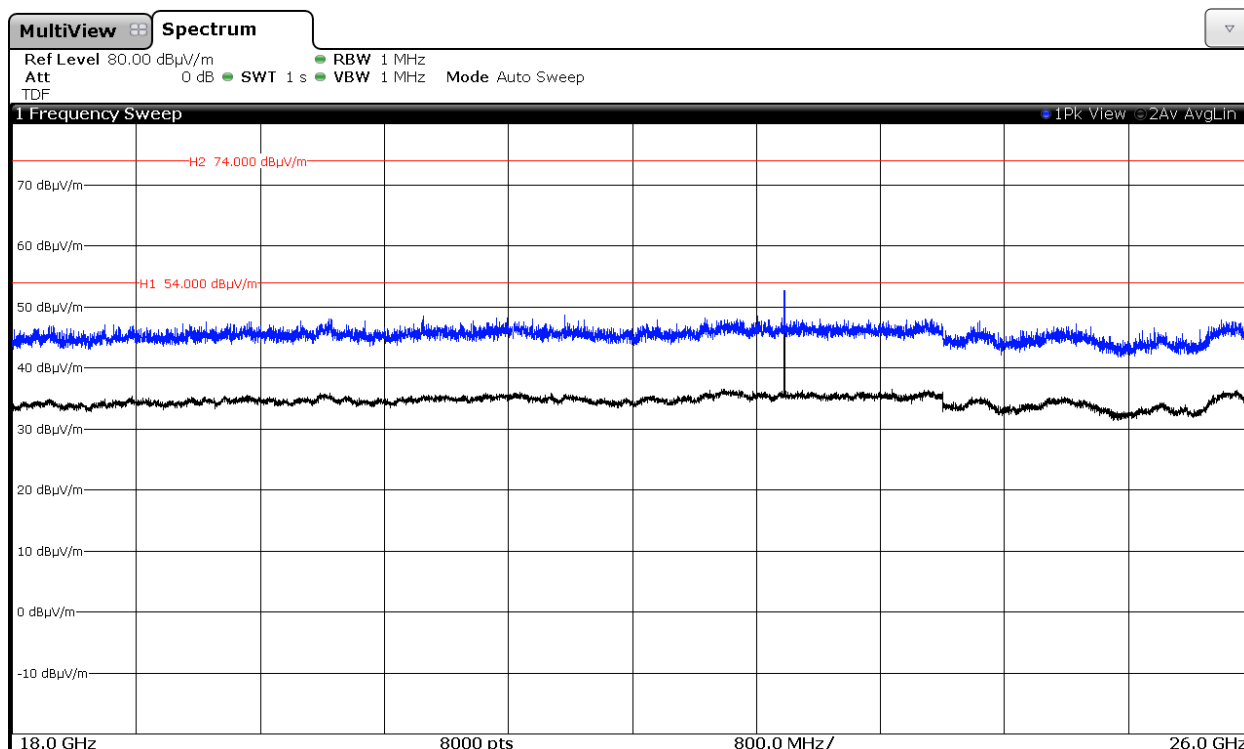


Middle Channel: 5785 MHz. Chain A

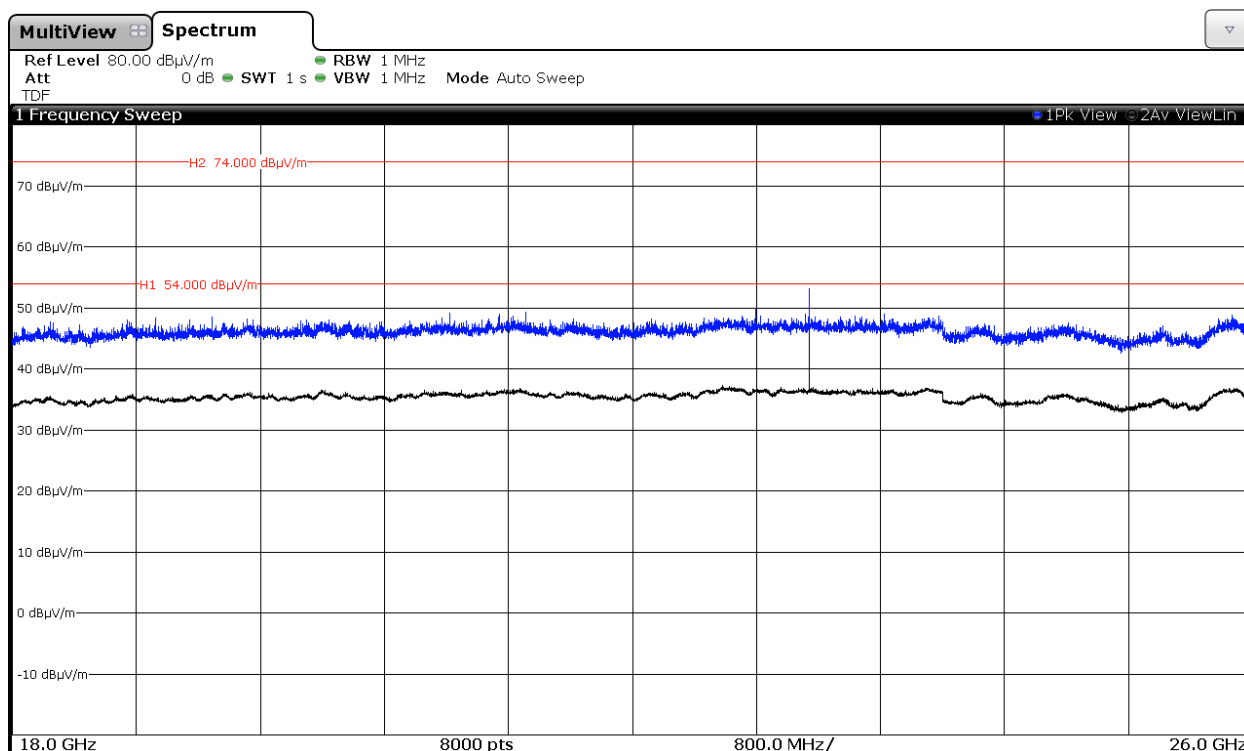


Middle Channel: 5785 MHz. Chain B

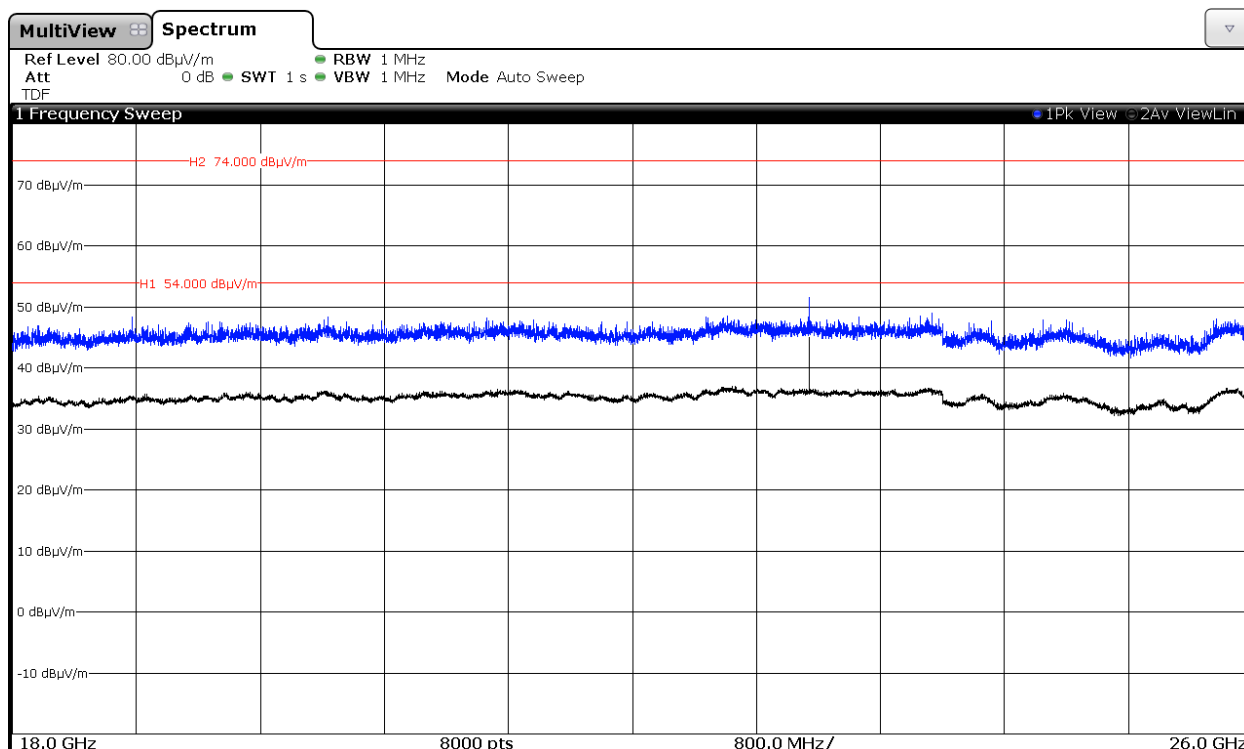


Middle Channel: 5785 MHz. Chain A+B

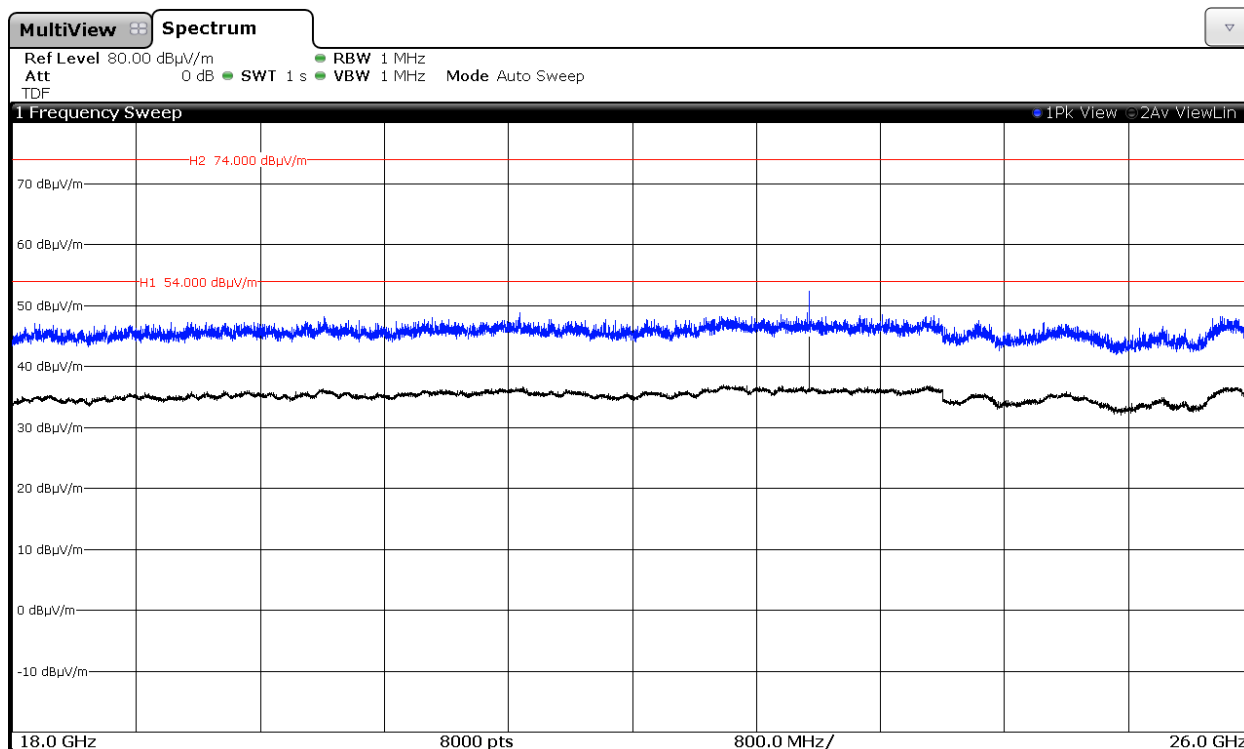


Highest Channel: 5825 MHz. Chain A

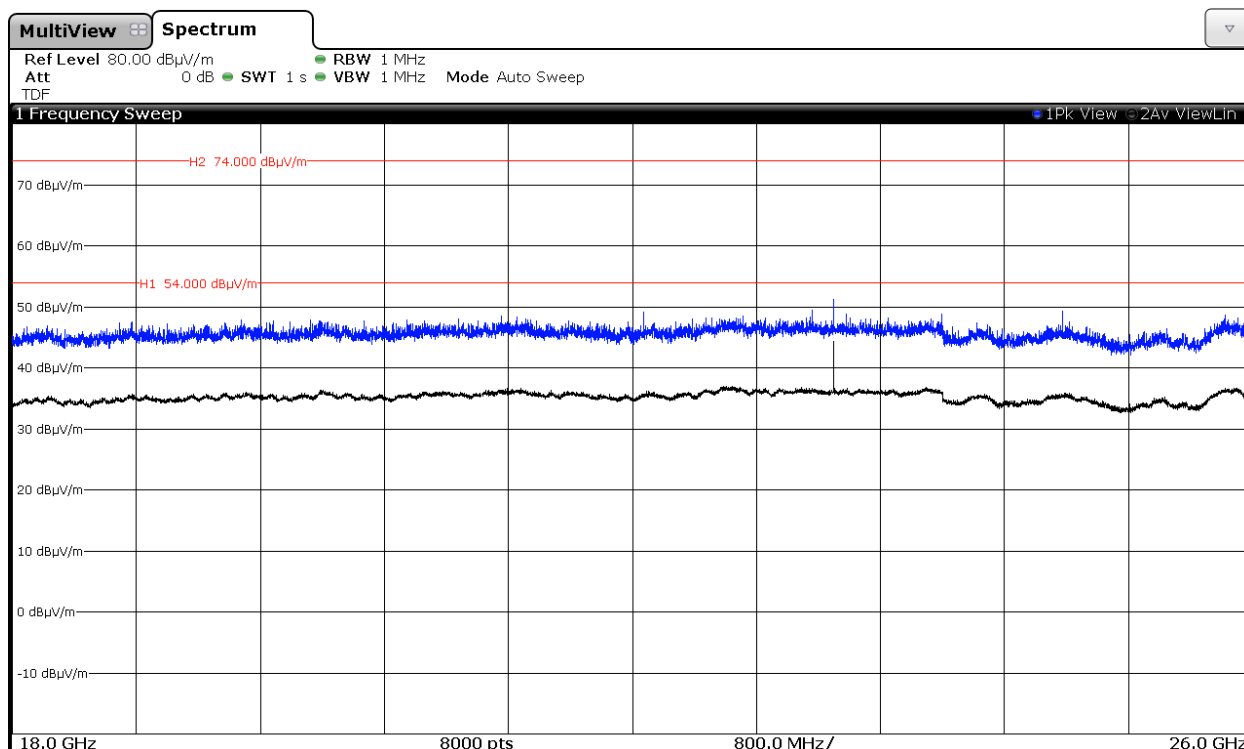

Highest Channel: 5825 MHz. Chain B

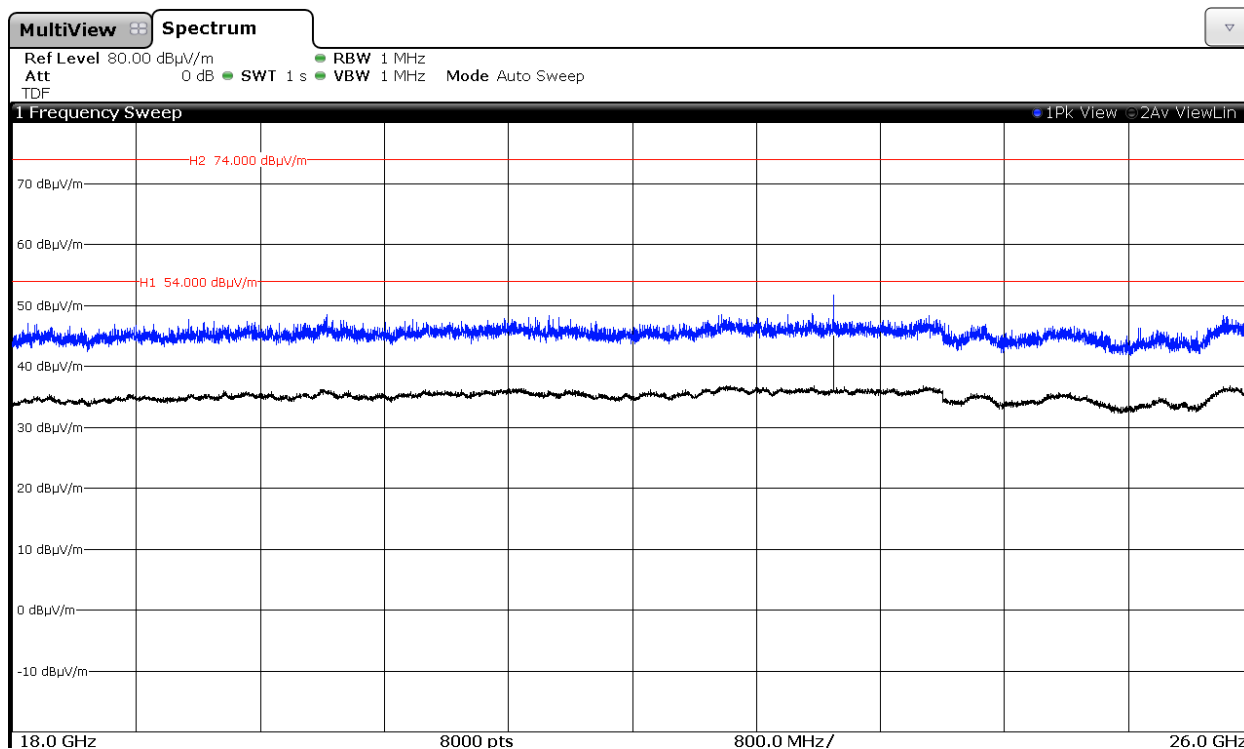


Highest Channel: 5825 MHz. Chain A+B

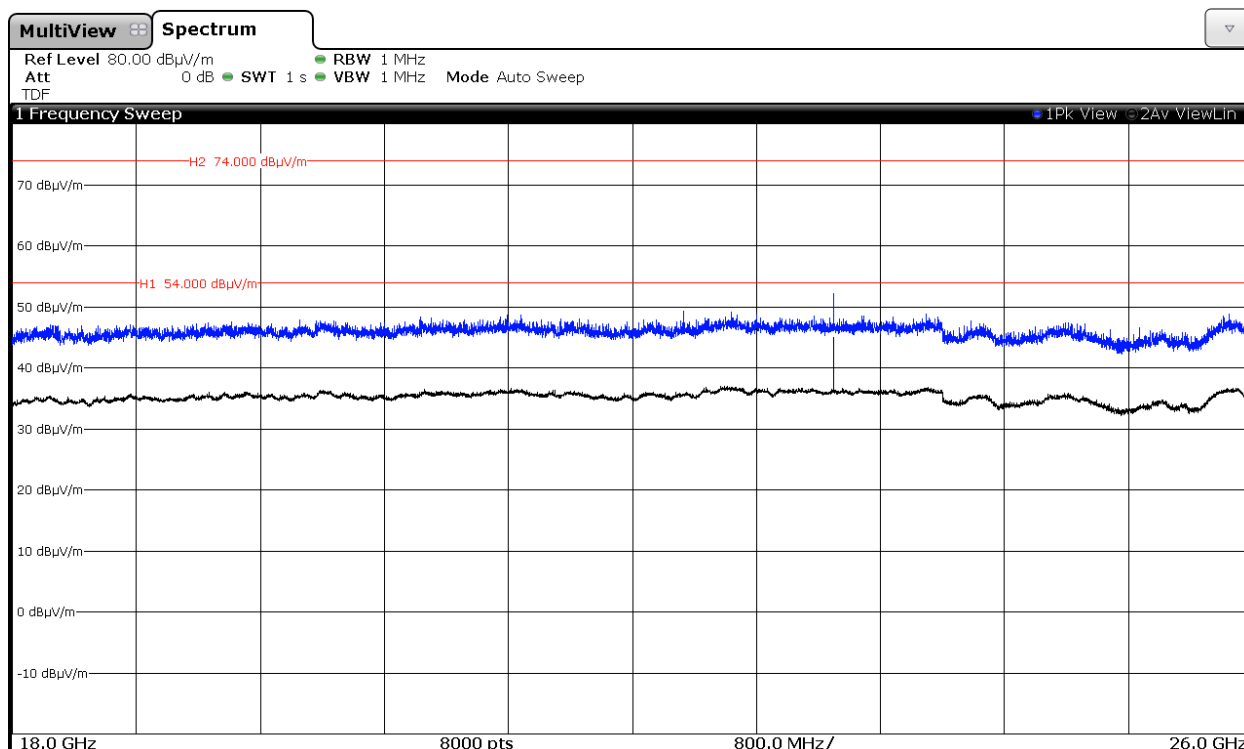


### 3. WiFi 5GHz 802.11 n40 mode


Highest Channel: 5795 MHz. Chain A

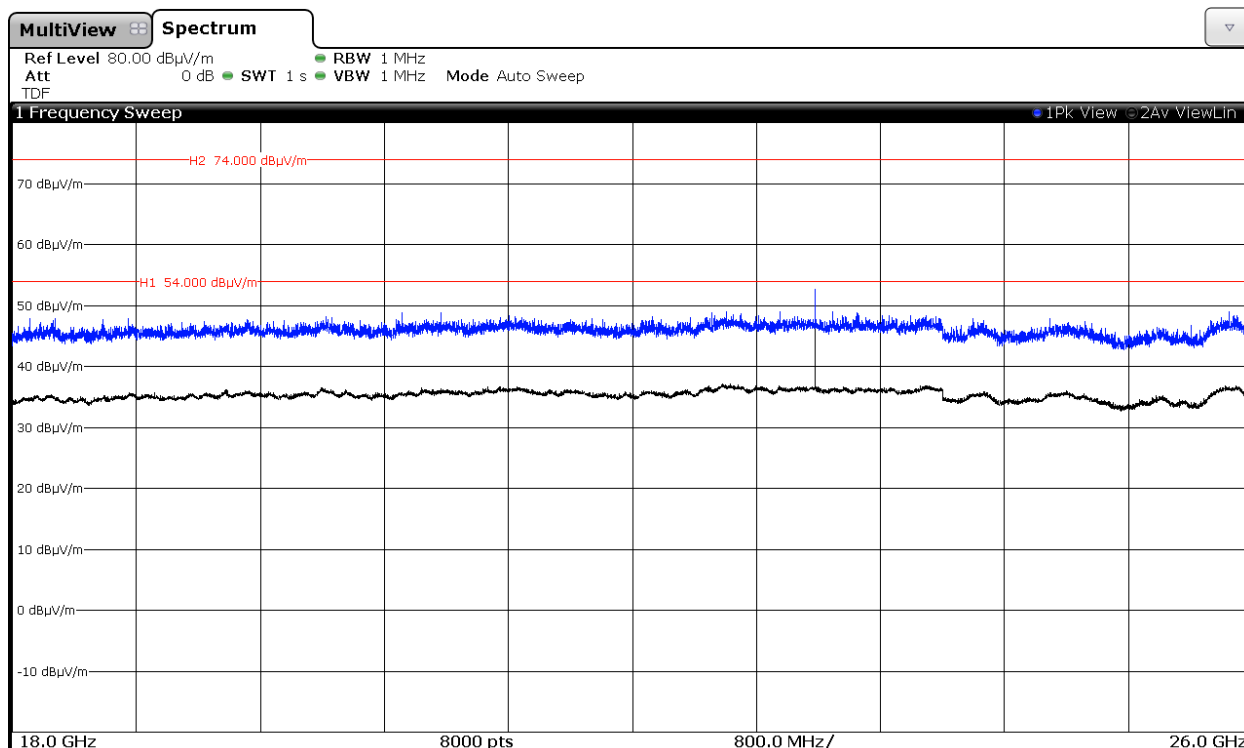

Highest Channel: 5795 MHz. Chain B

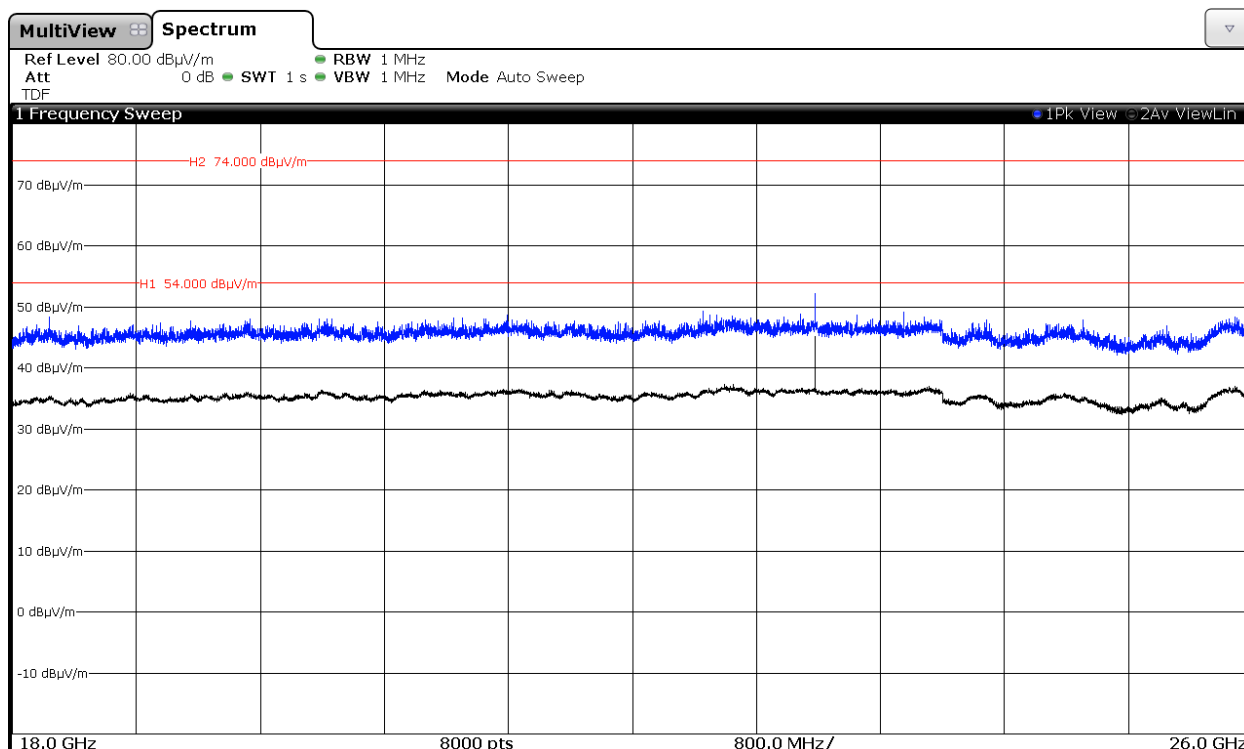


Highest Channel: 5795 MHz. Chain A+B

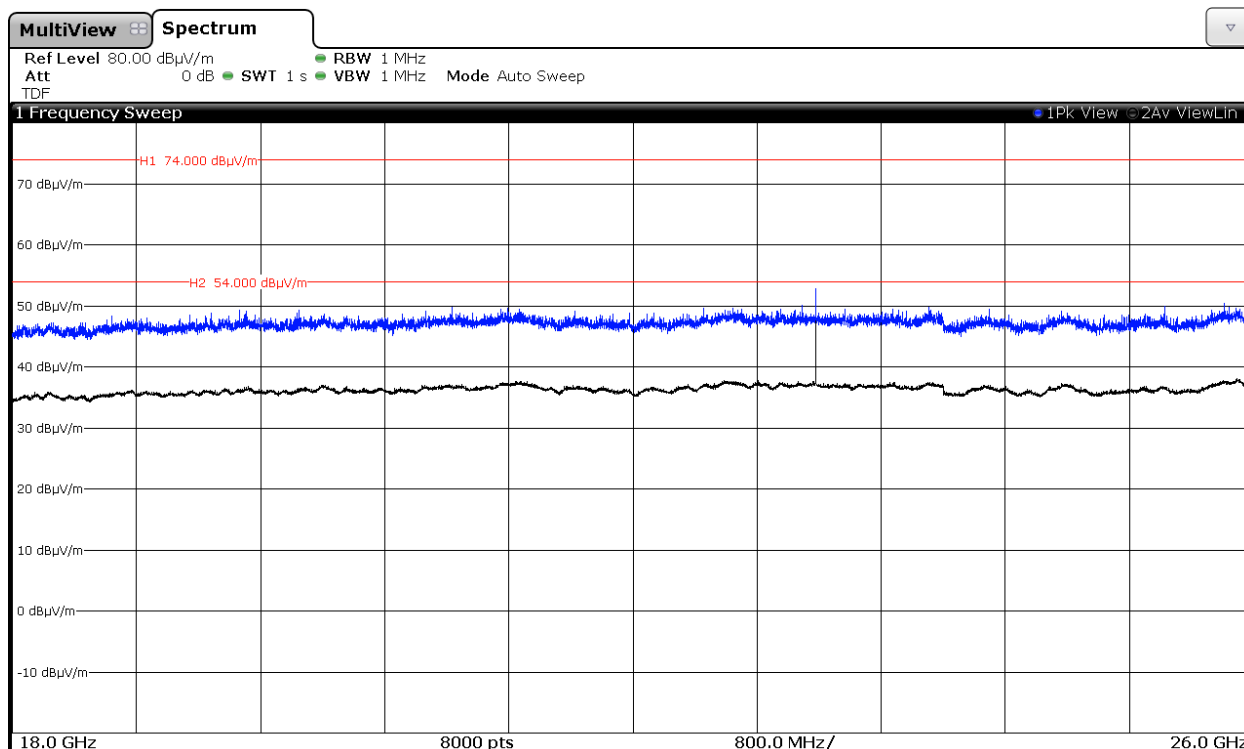


#### 4. WiFi 5GHz 802.11 ac80 mode


Middle Channel: 5775 MHz. Chain A.

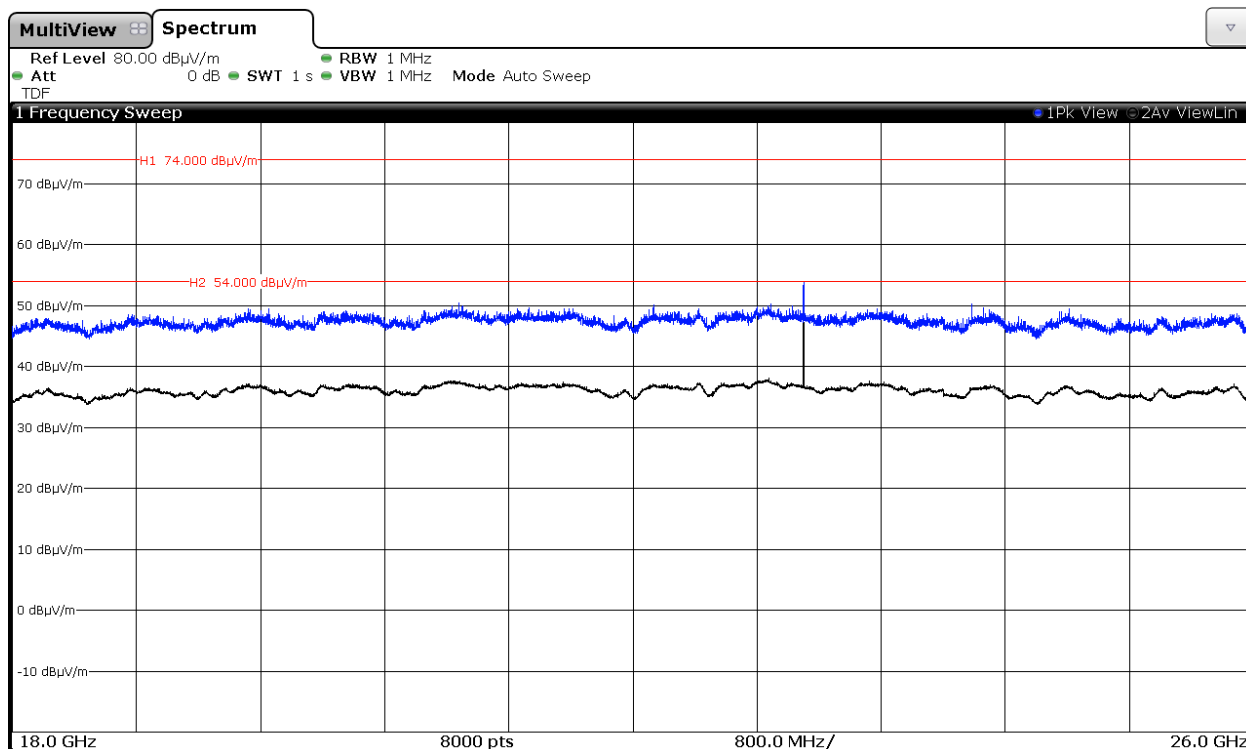

Middle Channel: 5775 MHz. Chain B.

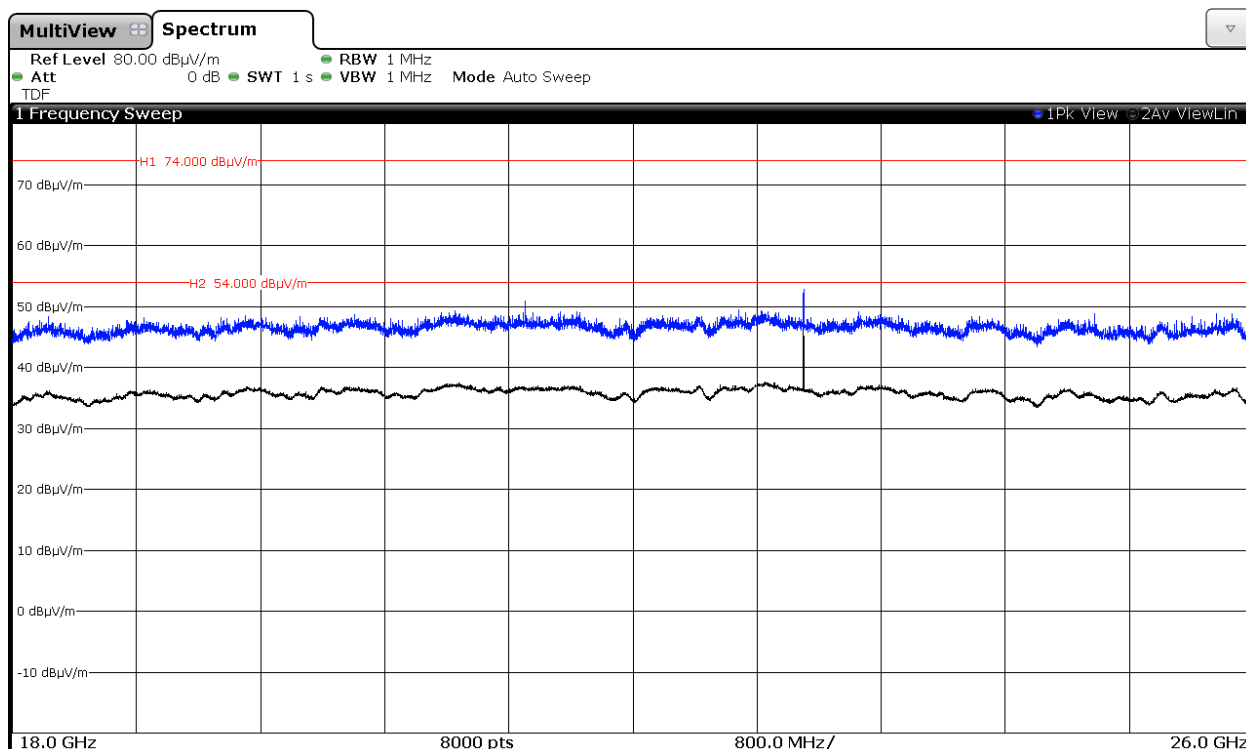


Middle Channel: 5775 MHz. Chain A+B.

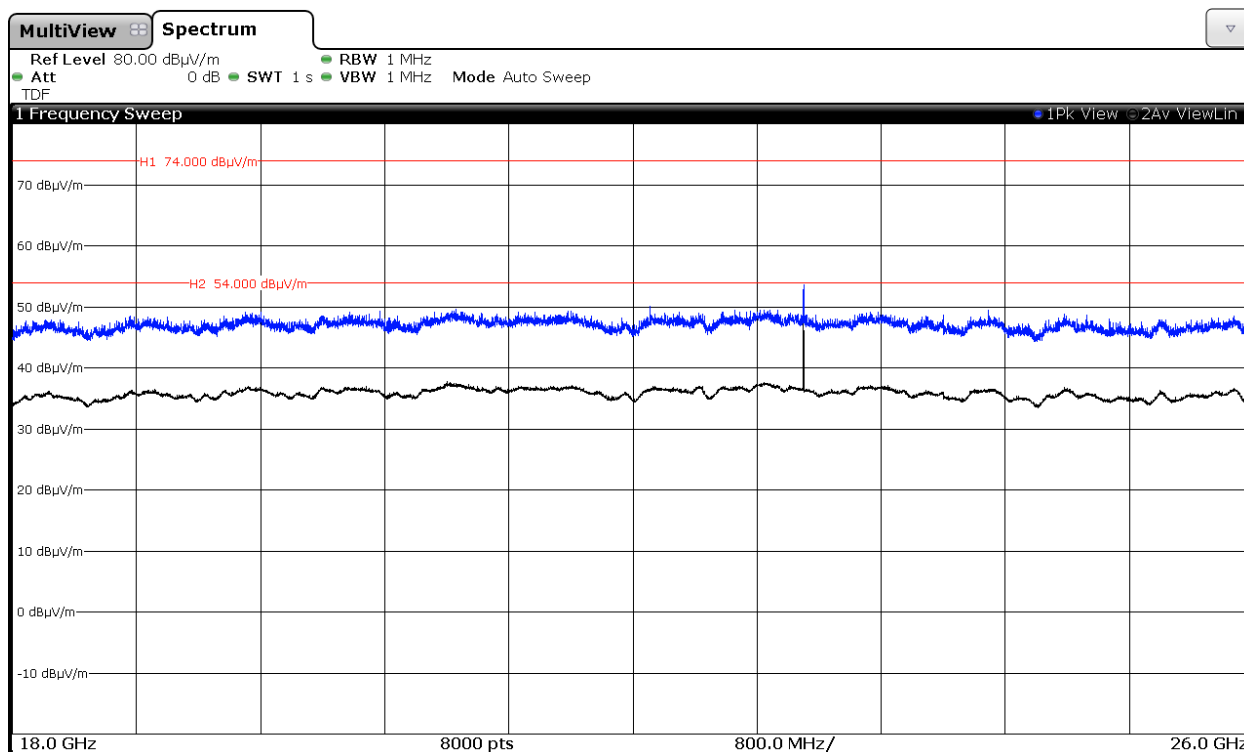

FREQUENCY RANGE 26 GHz to 40 GHz.

No spurious signals were found in all modulations and channels tested.

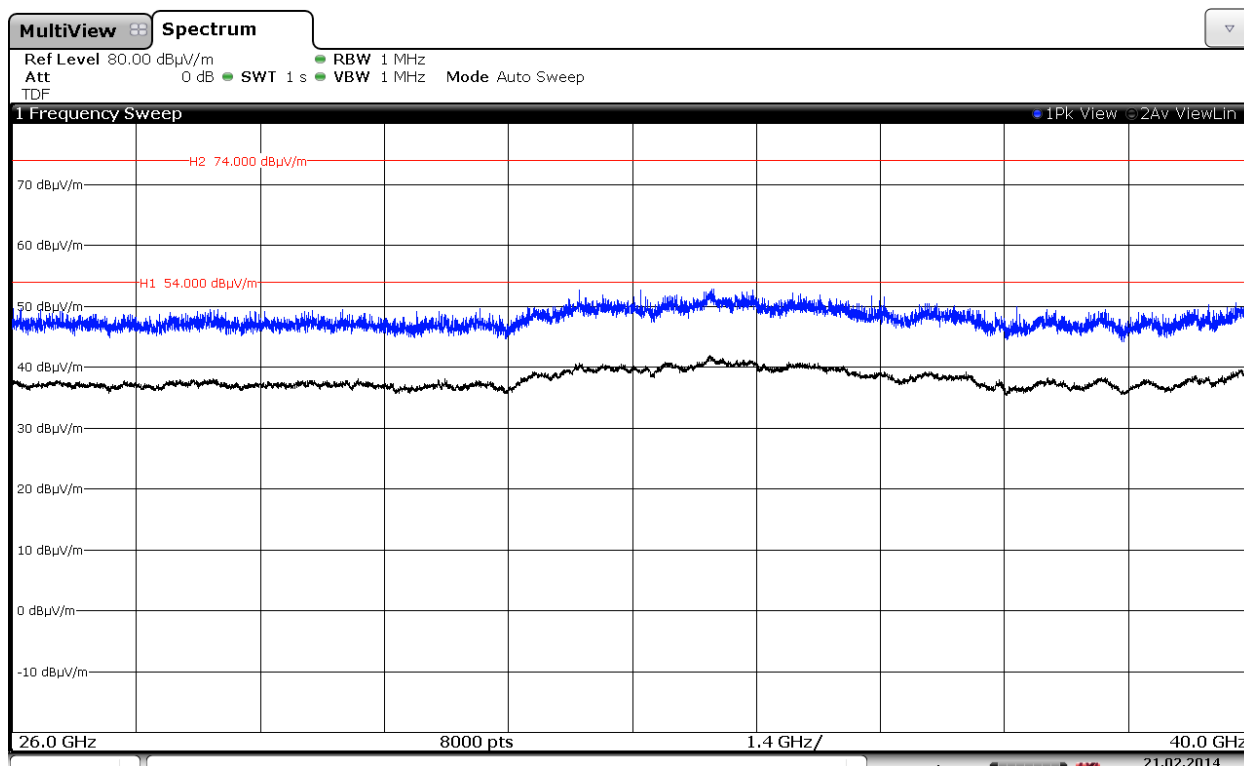

(This plot is valid for both SISO and MIMO modes).

## **APPENDIX C: Test results “Bluetooth Low Energy”**

## INDEX

|                                                                                                 |     |
|-------------------------------------------------------------------------------------------------|-----|
| TEST CONDITIONS.....                                                                            | 290 |
| Occupied bandwidth.....                                                                         | 291 |
| Section 15.247 Subclause (a) (2) / RSS-210 A8.2. (a). 6 dB Bandwidth .....                      | 294 |
| Section 15.247 Subclause (b) / RSS-210 A8.4. (4). Maximum output power and antenna gain .....   | 297 |
| Section 15.247 Subclause (d) / RSS-210 A8.5. Emission limitations conducted (Transmitter) ..... | 300 |
| Section 15.247 Subclause (d) / RSS-210 A8.5. Band-edge emissions compliance (Transmitter) ..... | 306 |
| Section 15.247 Subclause (e) / RSS-210 A8.5. Power spectral density.....                        | 308 |
| Section 15.247 Subclause (d) / RSS-210 A8.5. Emission limitations radiated (Transmitter).....   | 311 |

## TEST CONDITIONS

Power supply (V):

$$V_{\text{nominal}} = 3.3 \text{ Vdc}$$

Type of power supply = DC voltage from HMC/NGFC test board.

Type of antenna = External attachable PIFA antenna.

Declared Gain for antenna = 3.24 dBi

## TEST FREQUENCIES:

Lowest channel: 2402 MHz

Middle channel: 2440 MHz

Highest channel: 2480 MHz

For Bluetooth LE operation mode the transmission is at CHAIN B RF output.

For radio testing purposes the card was installed in a test fixture. The test fixture is connected to a laptop computer and dc power supplied. The laptop computer was used to configure the EUT to continuously transmit at a specified output power.

The PC was using the Intel test utility DRTU Version 1.7.3-859.

## CONDUCTED MEASUREMENTS

The equipment under test was set up in a shielded room and connected to the spectrum analyzer using a low loss calibrated RF cable. The measurement readings are corrected with the cable loss (dB).

## RADIATED MEASUREMENTS

All radiated tests were performed in a semi-anechoic chamber. The measurement antenna is situated at a distance of 3 m for the frequency range 30 MHz-1000 MHz (30 MHz-1000 MHz Bilog antenna) and at a distance of 1m for the frequency range 1 GHz-25 GHz (1 GHz-18 GHz Double ridge horn antenna and 18 GHz-40 GHz horn antenna).

For radiated emissions in the range 1 GHz-25 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.

The equipment under test was set up on a non-conductive (wooden) platform one meter above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.


## Occupied bandwidth

### RESULTS


(see next plots).

|                               | Lowest frequency<br>2402 MHz | Middle frequency<br>2440 MHz | Highest frequency<br>2480 MHz |
|-------------------------------|------------------------------|------------------------------|-------------------------------|
| 99% bandwidth (MHz)           | 1.026                        | 1.026                        | 1.026                         |
| -26 dBc bandwidth (MHz)       | 1.257                        | 1.257                        | 1.257                         |
| Measurement uncertainty (kHz) | $\pm 7$                      |                              |                               |


## Lowest Channel

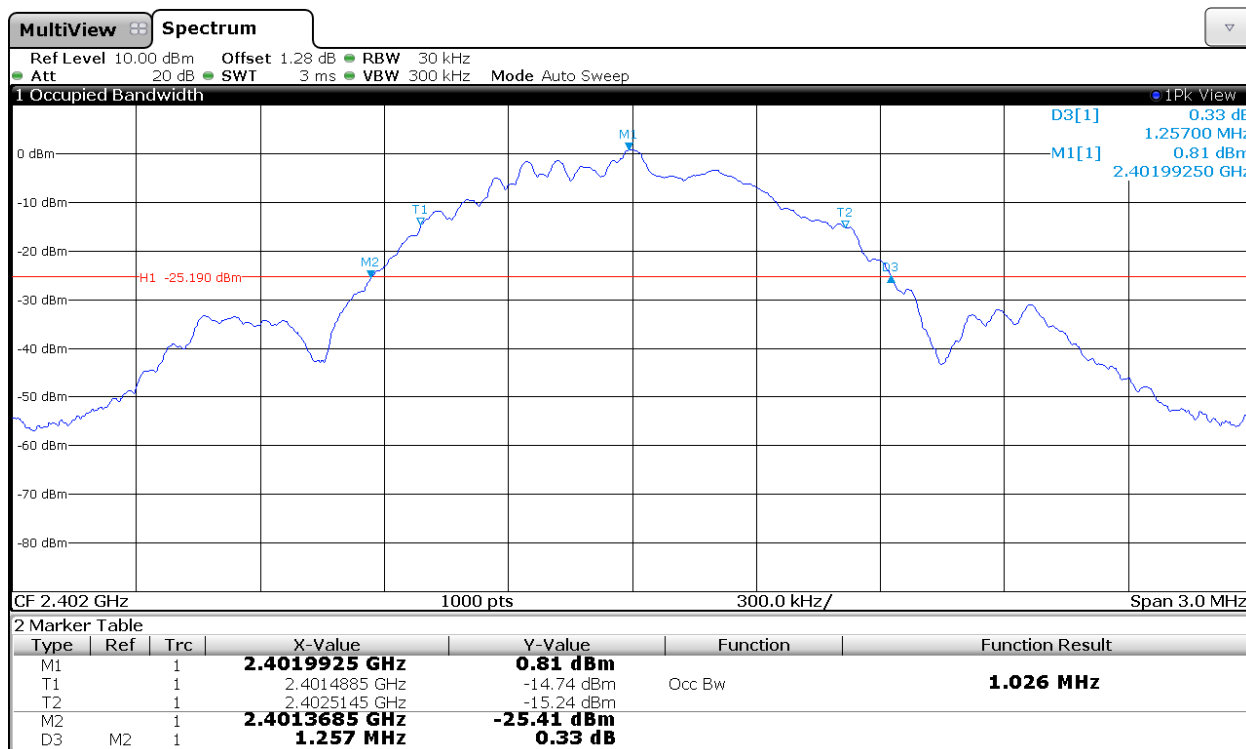

## Middle Channel

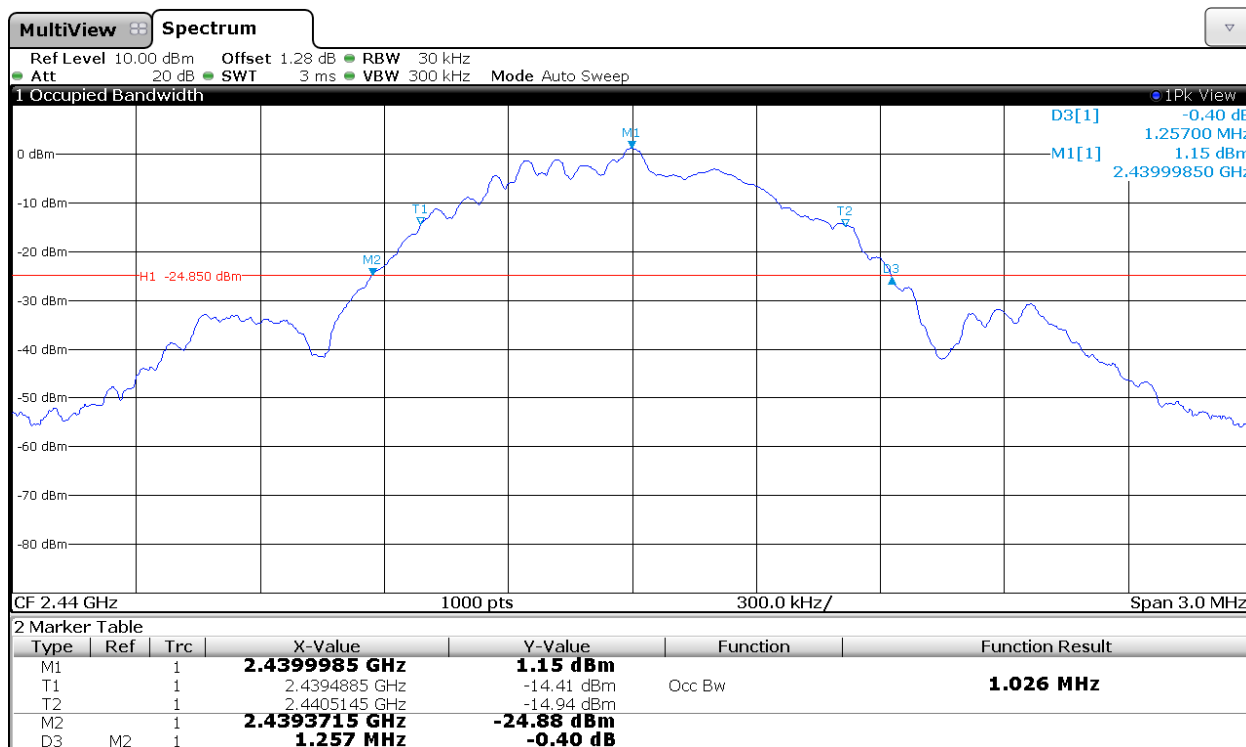

# Highest channel

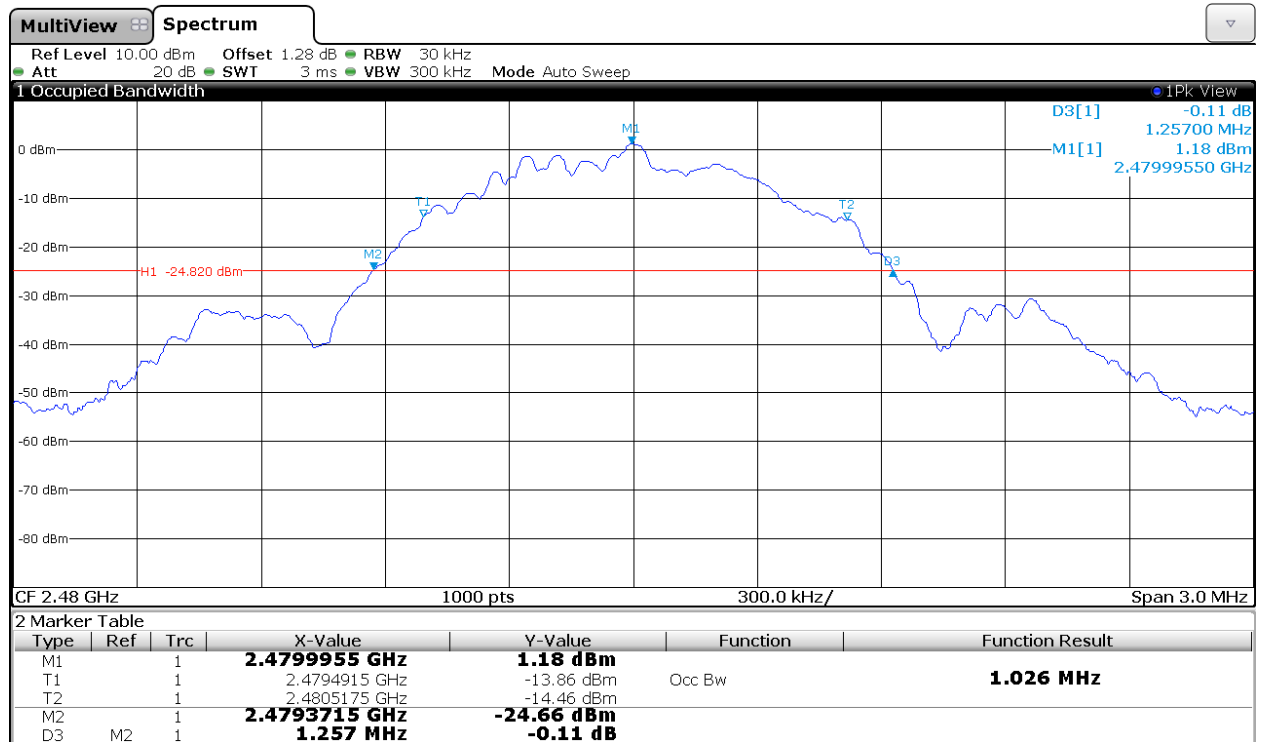

**Section 15.247 Subclause (a) (2) / RSS-210 A8.2. (a). 6 dB Bandwidth**

SPECIFICATION

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS


6 dB Bandwidth (see next plots).

|                               | Lowest frequency<br>2402 MHz | Middle frequency<br>2440 MHz | Highest frequency<br>2480 MHz |
|-------------------------------|------------------------------|------------------------------|-------------------------------|
| 6 dB Spectrum bandwidth (kHz) | 658.00                       | 672.00                       | 672.00                        |
| Measurement uncertainty (kHz) | $\pm 7$                      |                              |                               |


Verdict: PASS

6 dB BANDWIDTH.

Lowest Channel

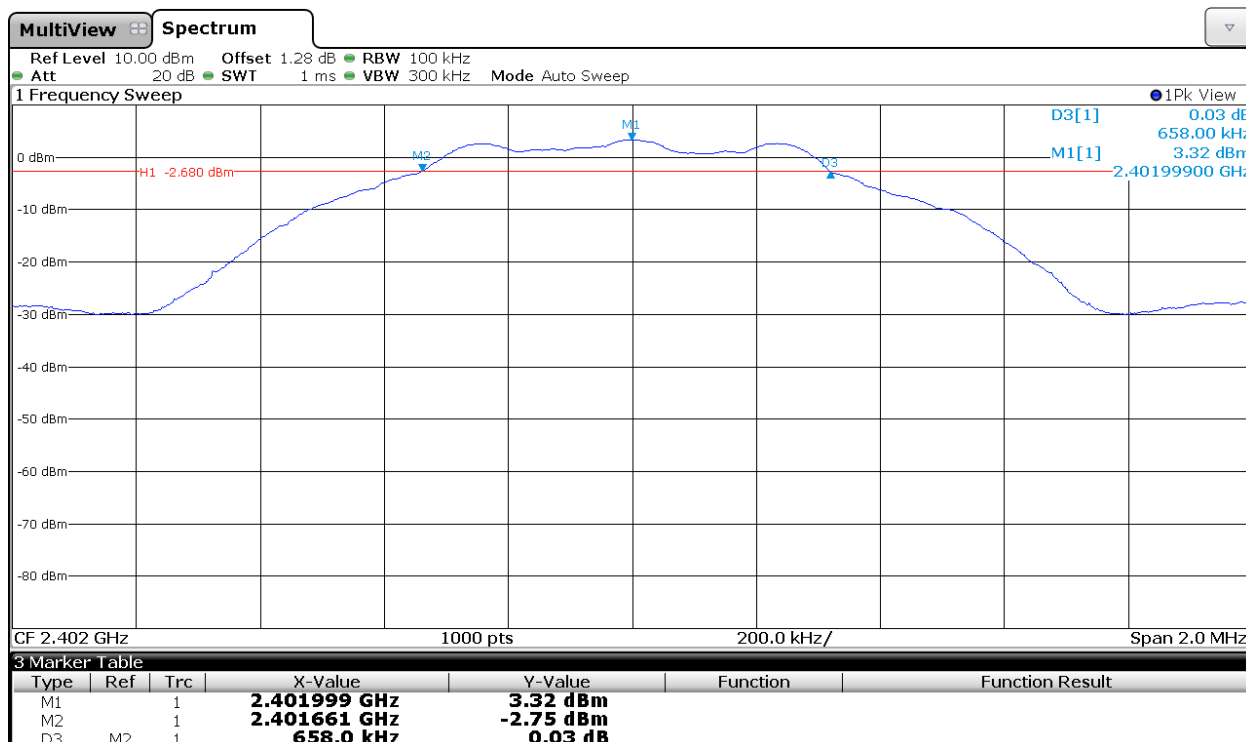


Middle Channel

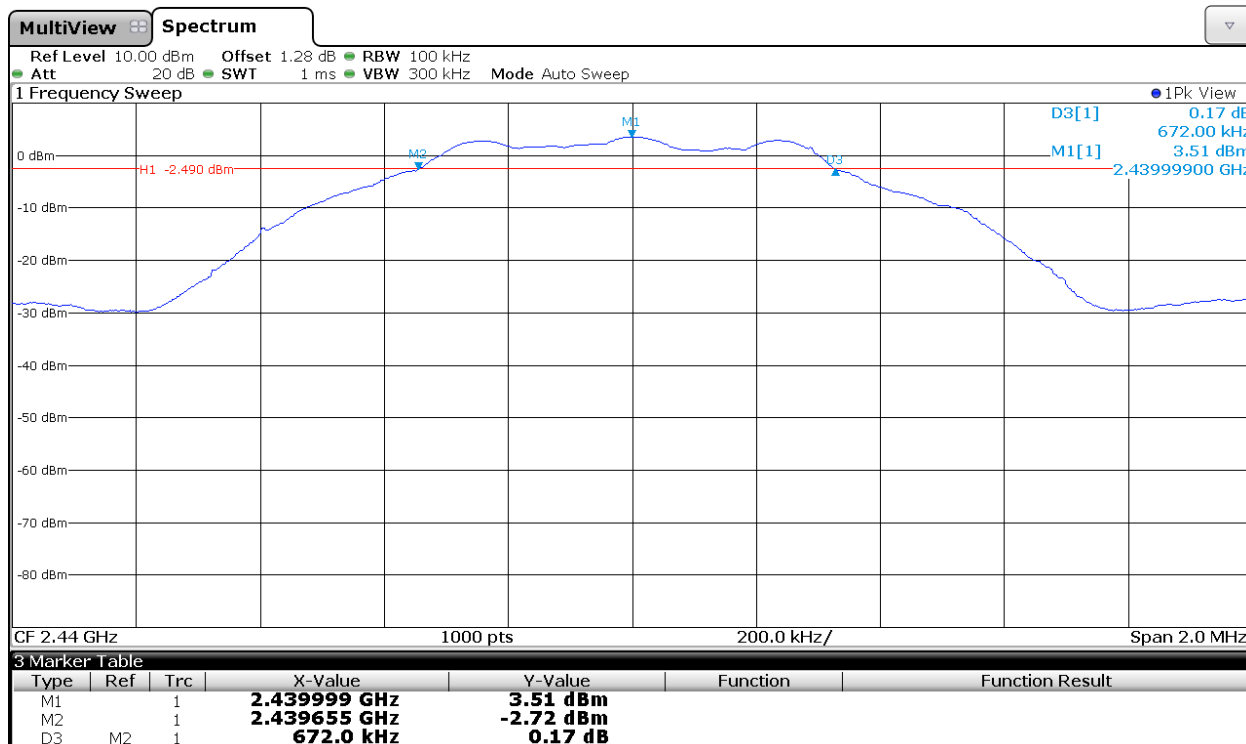

6 dB BANDWIDTH.

Highest Channel

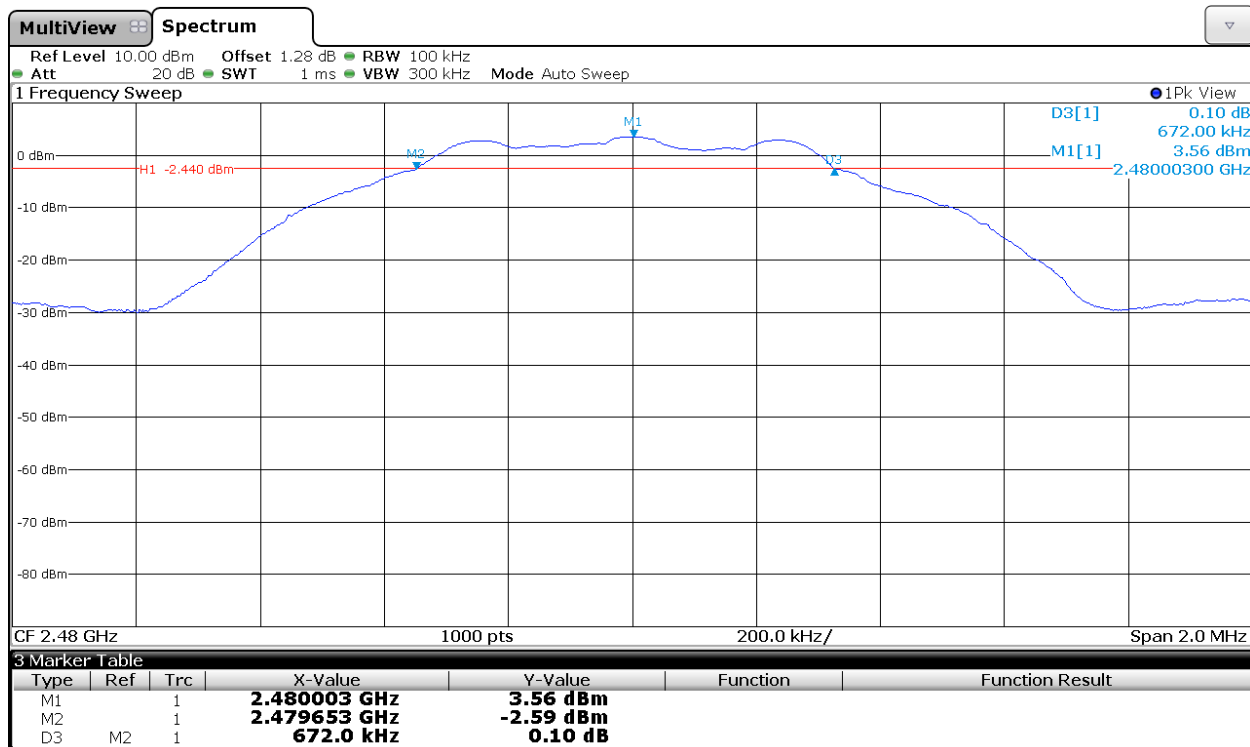

## Section 15.247 Subclause (b) / RSS-210 A8.4. (4). Maximum output power and antenna gain

### SPECIFICATION

For systems using digital modulation in the 2400-2483.5 MHz band: 1 watt (30 dBm).  
The e.i.r.p. shall not exceed 4 W (36 dBm) (Canada).

### RESULTS

The maximum conducted output (average) power was measured using the method according to point 9.2.1.2. of Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 558074 D01 DTS Meas Guidance v03r01 dated 09/04/2013.

The EIRP power (dBm) is calculated by adding the declared maximum antenna gain to the measured conducted power.

MAXIMUM OUTPUT POWER. See next plots.

Maximum declared antenna gain: 3.24 dBi.


|                               | Lowest frequency<br>2402 MHz | Middle frequency<br>2440 MHz | Highest frequency<br>2480 MHz |
|-------------------------------|------------------------------|------------------------------|-------------------------------|
| Maximum conducted power (dBm) | 3.29                         | 3.51                         | 3.44                          |
| Maximum EIRP power (dBm)      | 6.53                         | 6.75                         | 6.68                          |
| Measurement uncertainty (dB)  | ±1.2                         |                              |                               |

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.


Verdict: PASS

# 1. CONDUCTED AVERAGE POWER.


## Lowest frequency

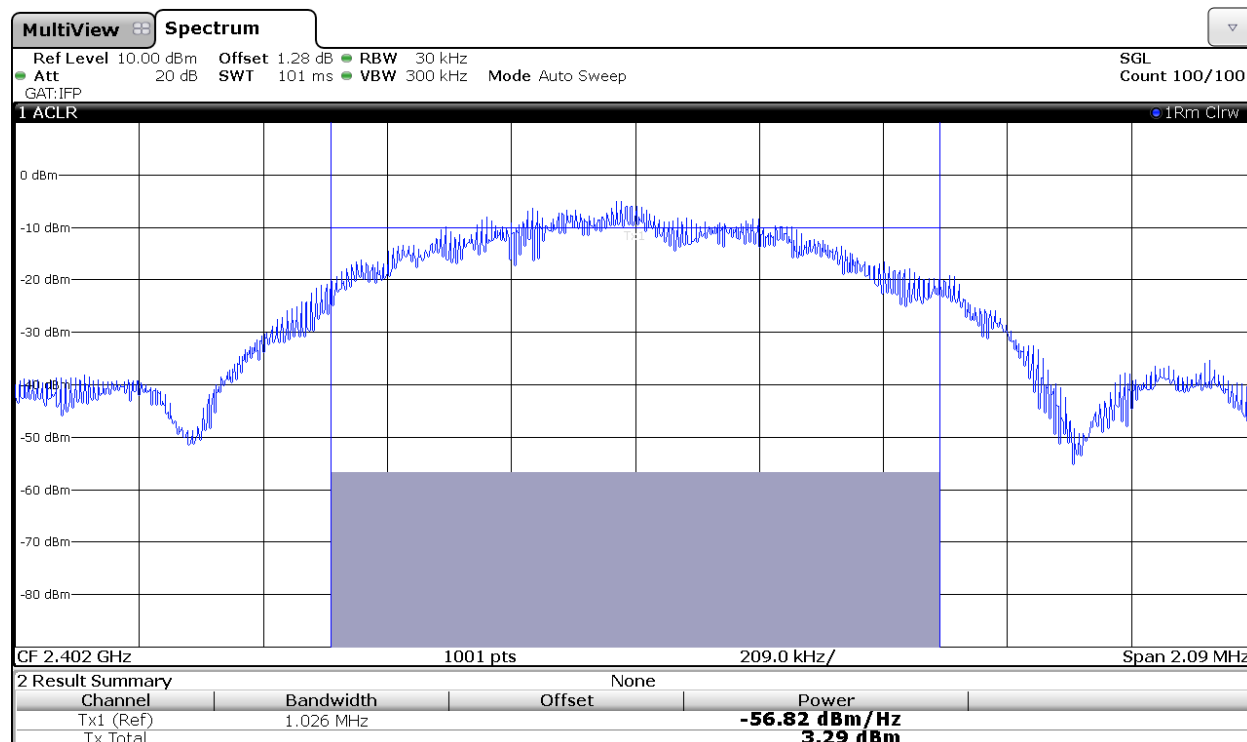

## Middle frequency

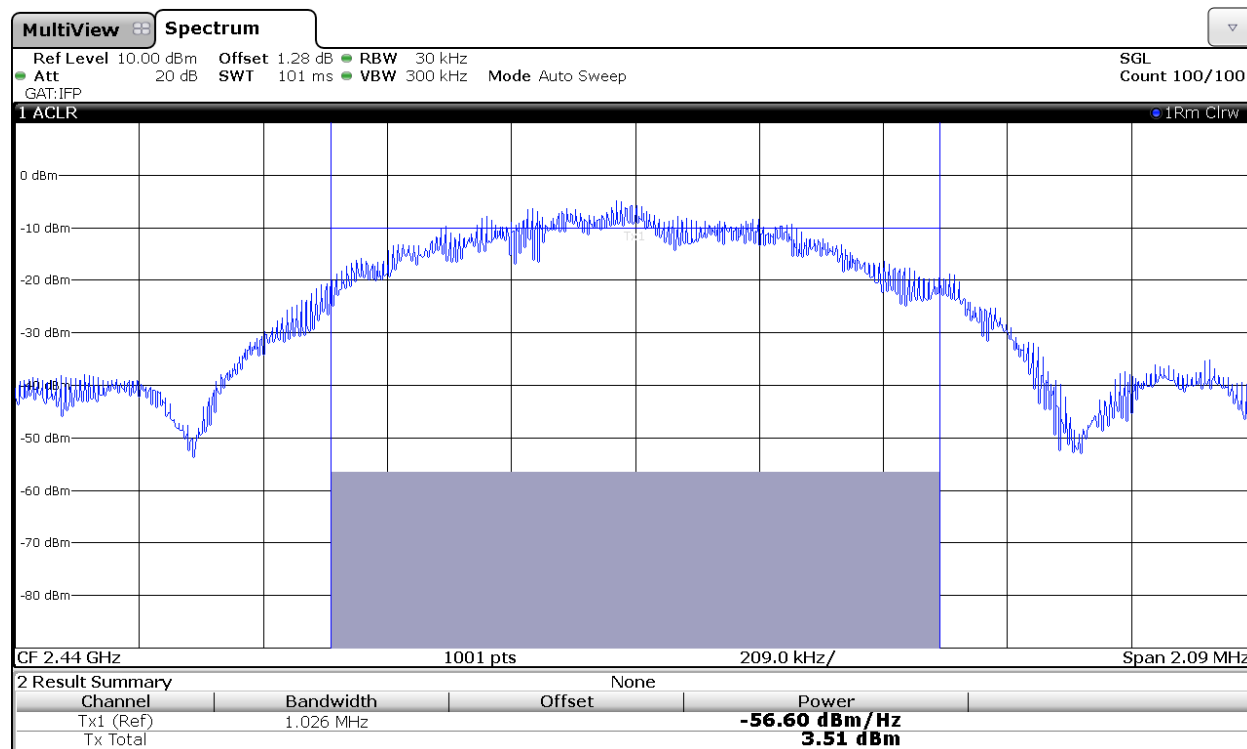

# Highest frequency

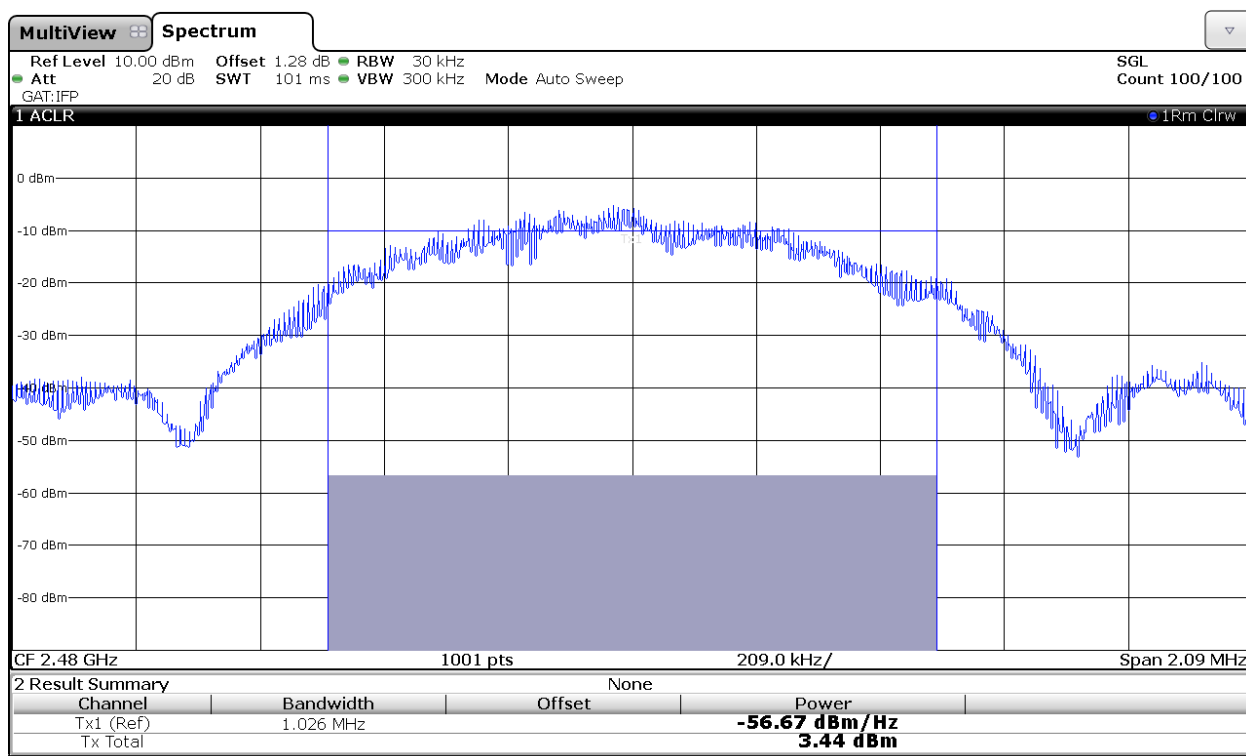

## Section 15.247 Subclause (d) / RSS-210 A8.5. Emission limitations conducted (Transmitter)

### SPECIFICATION

In any 100 kHz bandwidth outside the frequency band in which the digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB.

### RESULTS:

#### Reference Level Measurement

|                                      | Lowest frequency<br>2402 MHz | Middle frequency<br>2440 MHz | Highest frequency<br>2480 MHz |
|--------------------------------------|------------------------------|------------------------------|-------------------------------|
| Reference Level Measurement<br>(dBm) | 3.41                         | 3.57                         | 3.56                          |
| Measurement uncertainty (dB)         | $\pm 1.2$                    |                              |                               |

#### Lowest frequency 2402 MHz

All peaks are more than 20 dB below the limit.

#### Middle frequency 2440 MHz

All peaks are more than 20 dB below the limit.

#### Highest frequency 2480 MHz


All peaks are more than 20 dB below the limit.

Verdict: PASS

See next plot of worst case: Middle frequency 2440 MHz.


Number of sweep points: 30,000.

Plot 30 MHz to 3 GHz

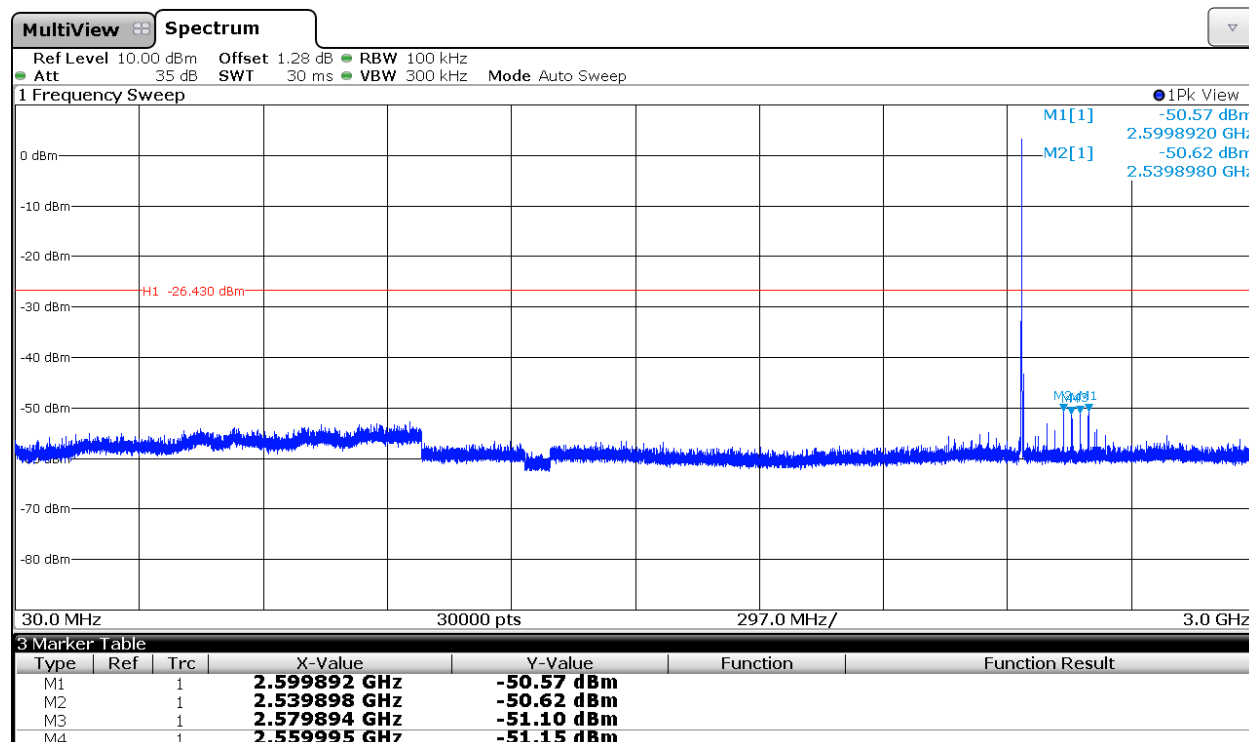


Note: The peak above the limit is the carrier frequency.


Plot 3 GHz to 6 GHz:

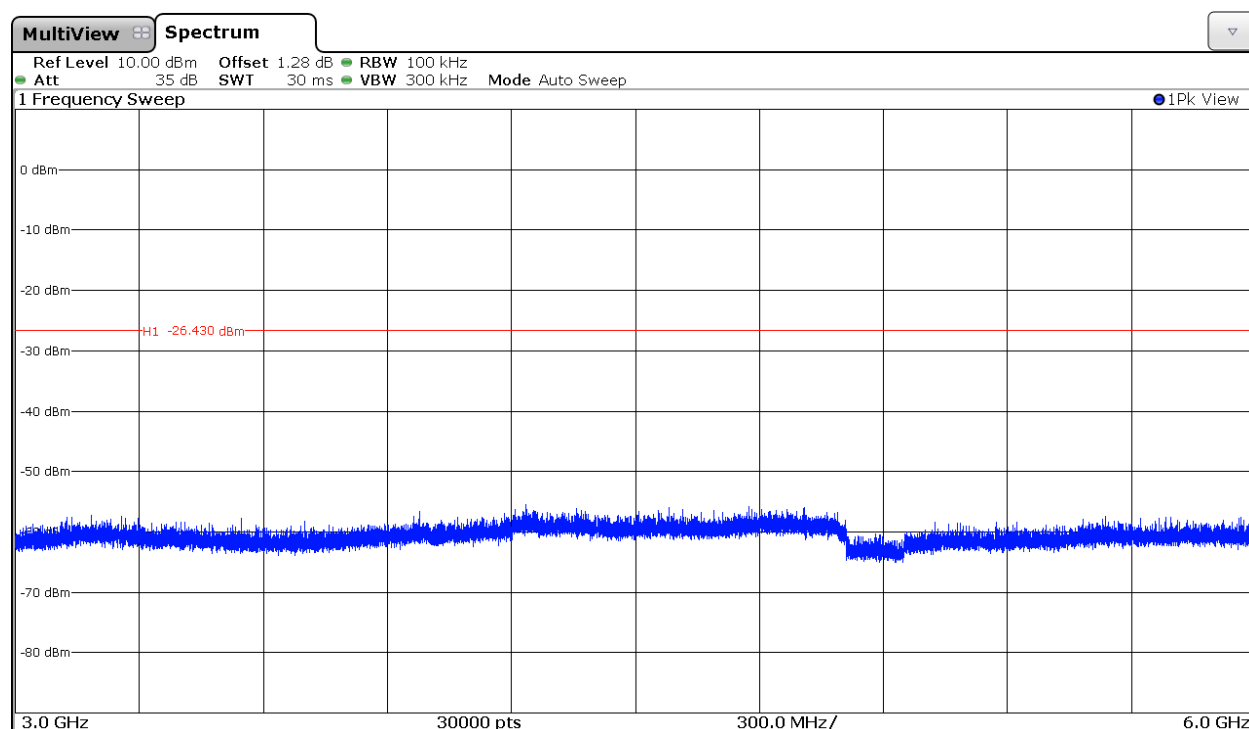


Plot 6 GHz to 9 GHz:

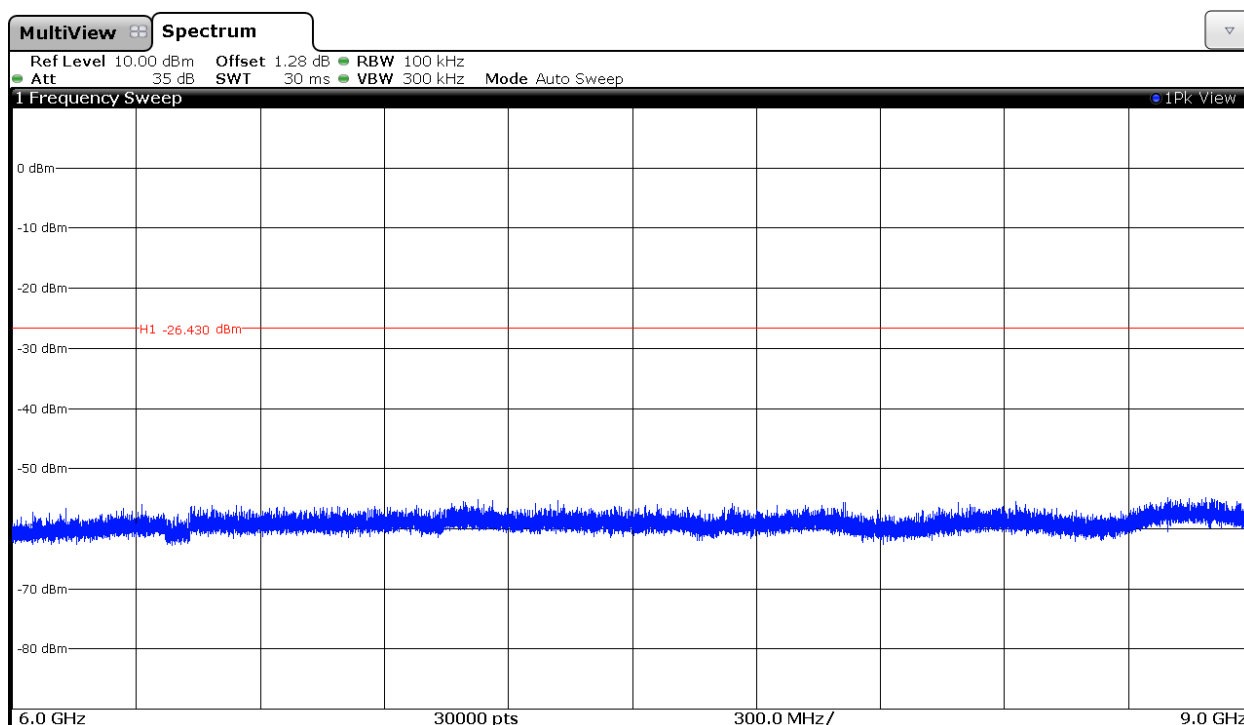


Plot 9 GHz to 12 GHz:

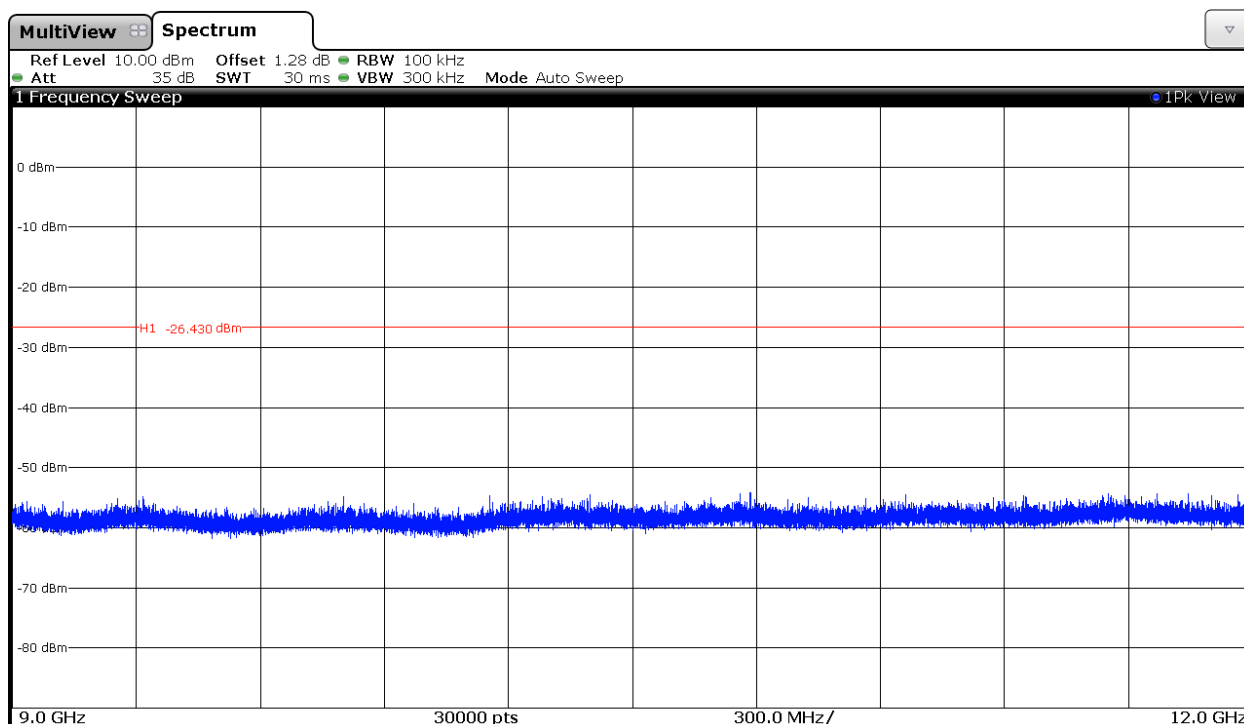


Plot 12 GHz to 15 GHz:

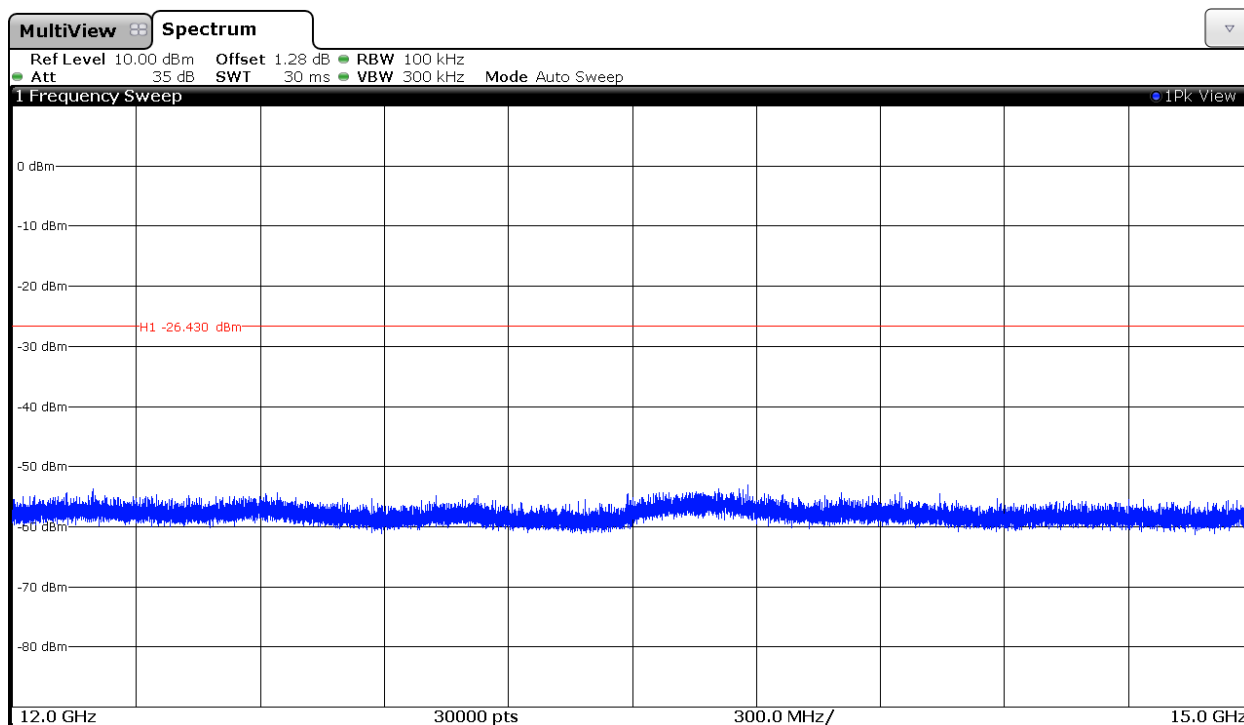


Plot 15 GHz to 18 GHz:

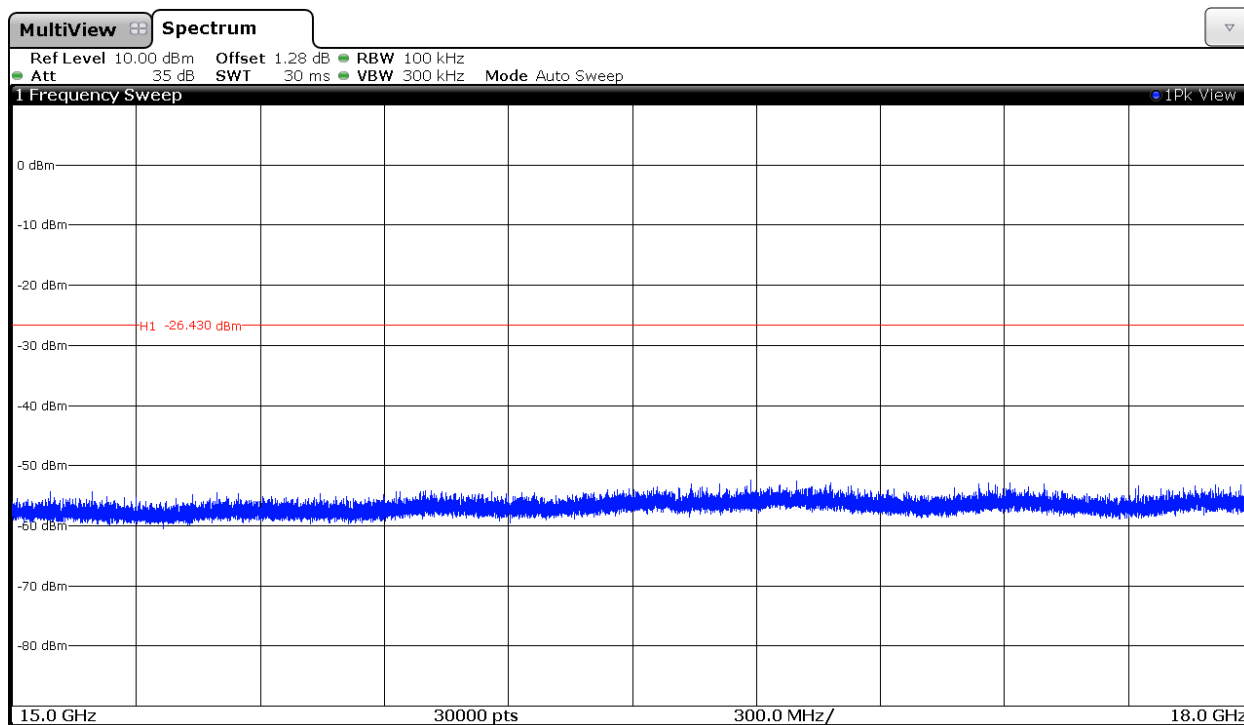


Plot 18 GHz to 21 GHz:

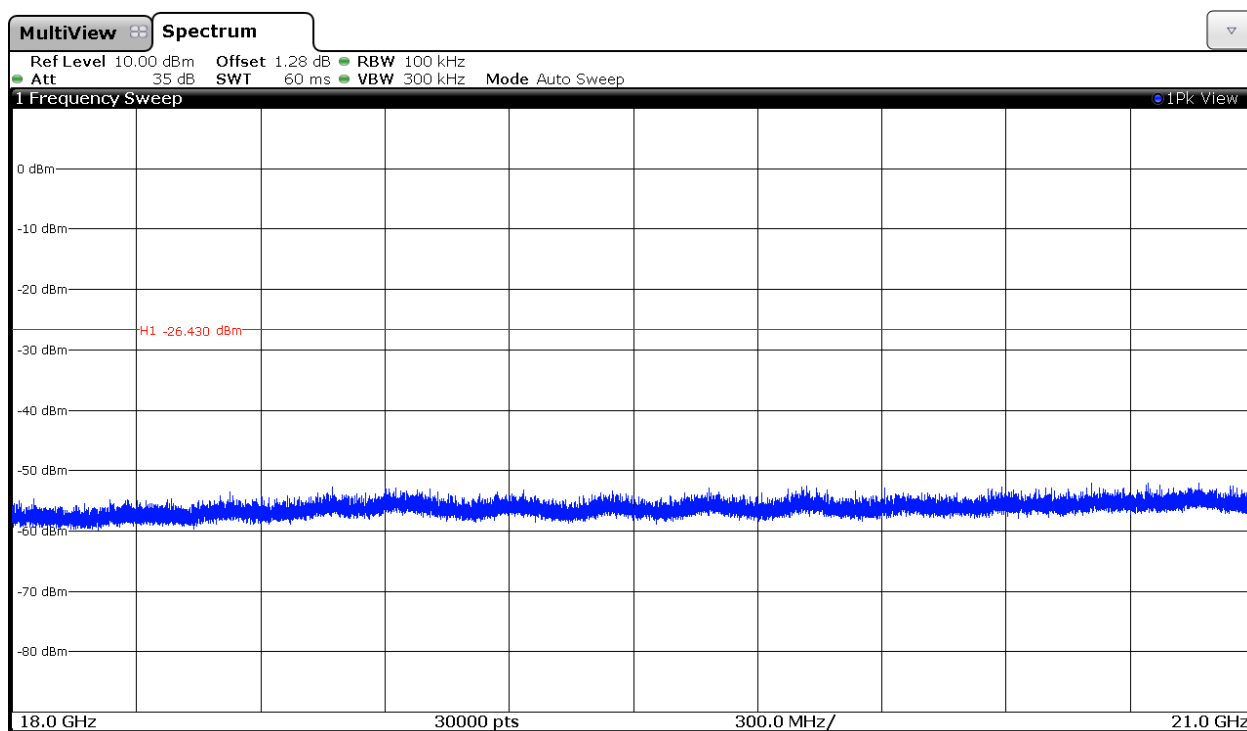

Plot 21 GHz to 24 GHz:

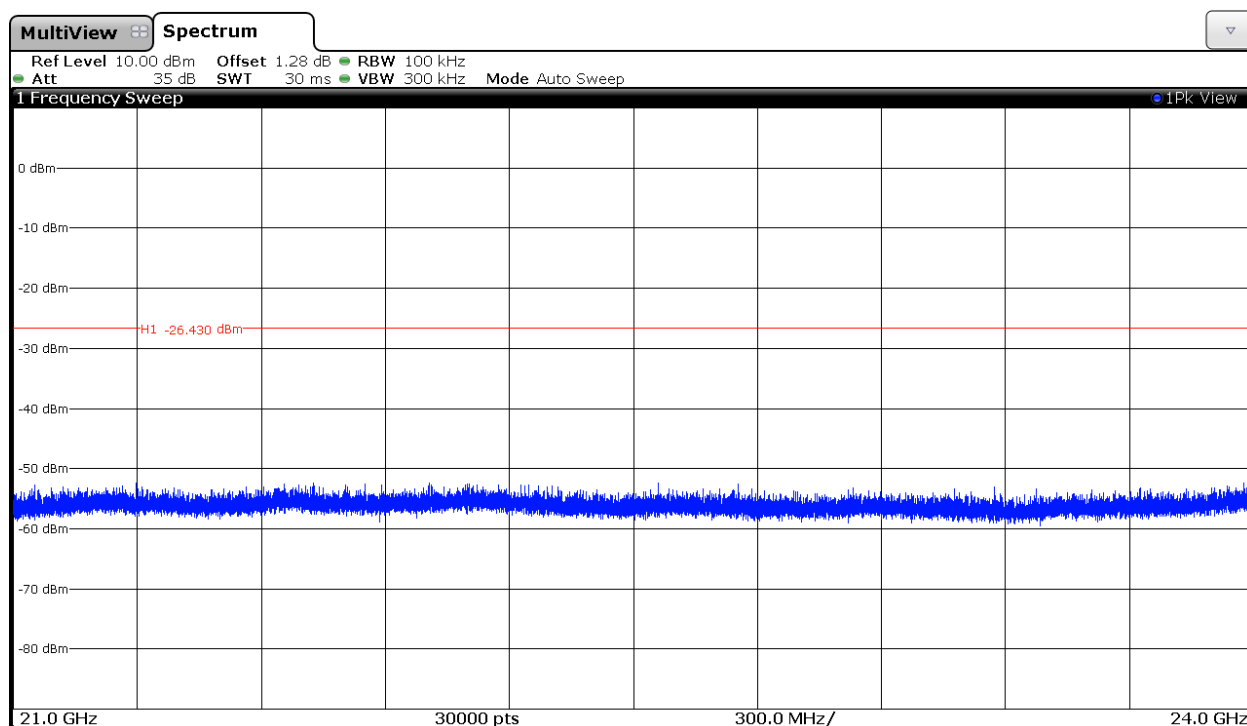

Plot 24GHz to 25 GHz:

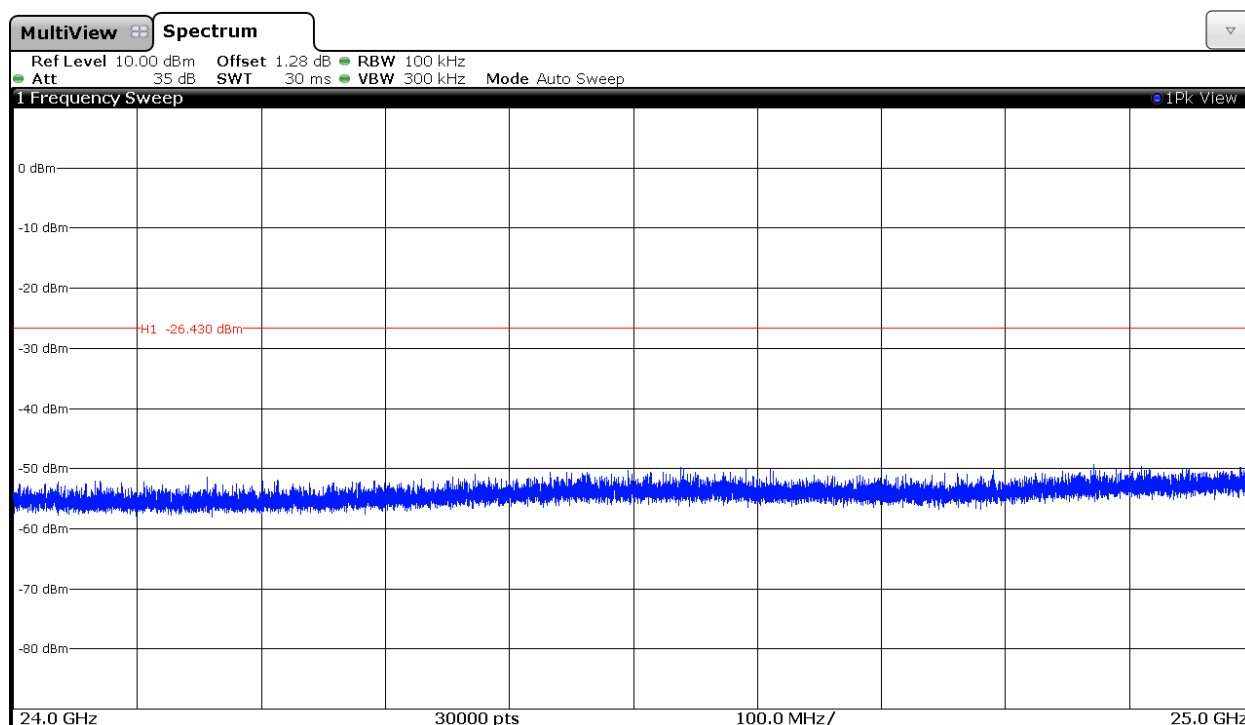

## Section 15.247 Subclause (d) / RSS-210 A8.5. Band-edge emissions compliance (Transmitter)


### SPECIFICATION

Emissions outside the frequency band in which the intentional radiator is operating shall be at least 30 dB below the highest level of the desired power.

### RESULTS:

#### 1. LOW FREQUENCY SECTION. CONDUCTED.


See next plot.

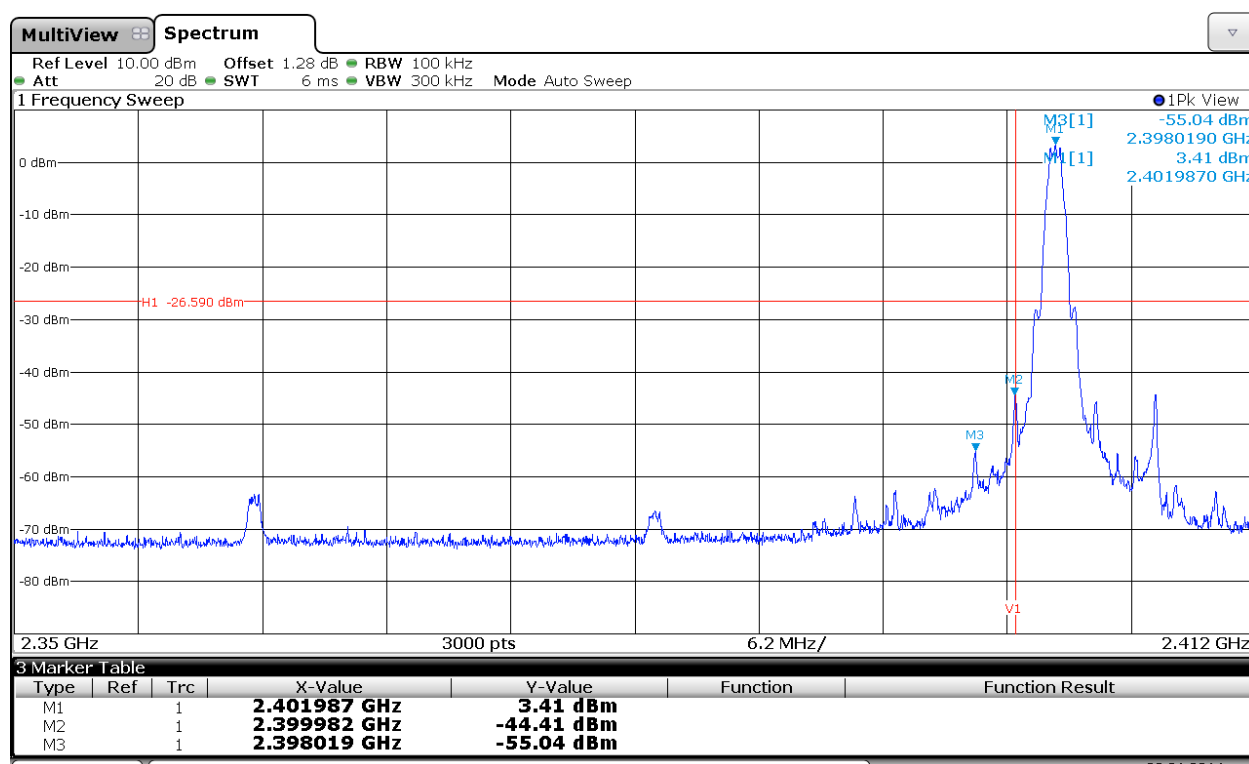

Verdict: PASS

## 2. HIGH FREQUENCY SECTION. CONDUCTED.

See next plot.

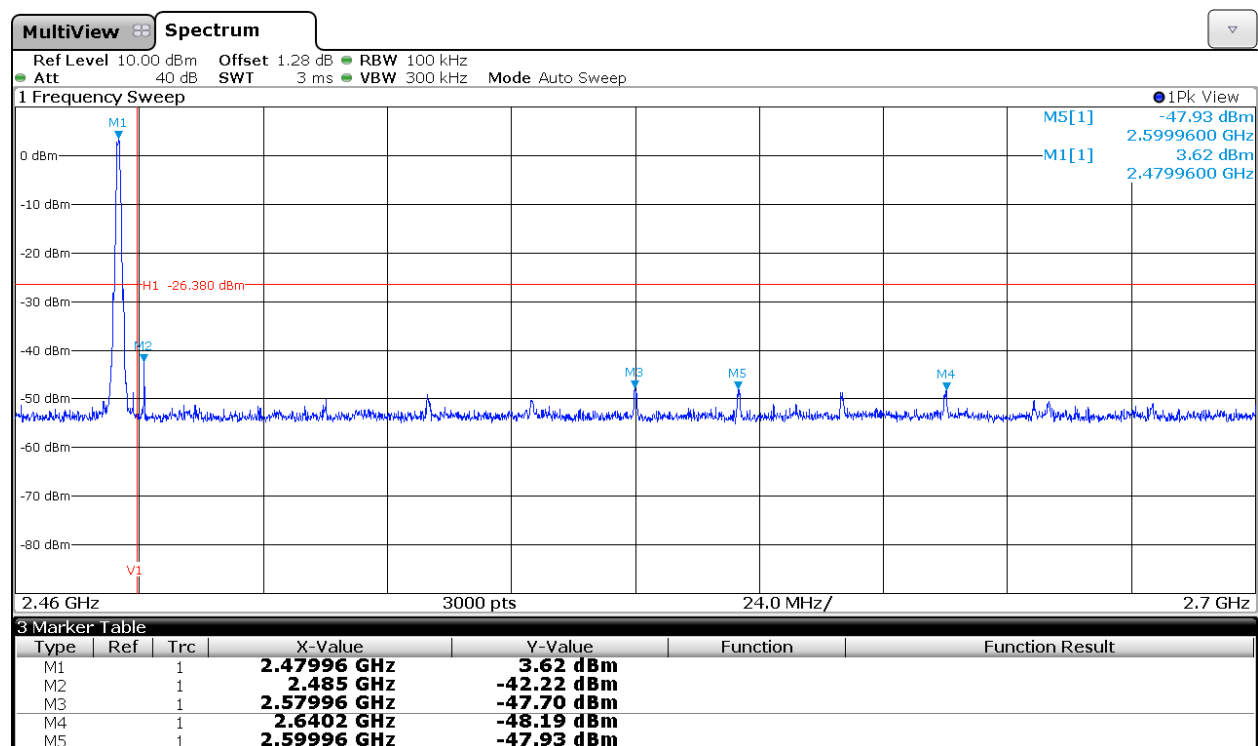

Verdict: PASS

## Section 15.247 Subclause (e) / RSS-210 A8.5. Power spectral density

### SPECIFICATION

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### RESULTS

The maximum power spectral density level in the fundamental emission was measured according to point 10.2. PKPSD (peak PSD) of Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 558074 D01 DTS Meas Guidance v03r01 dated 09/04/2013.


Power spectral density (see next plots).

|                              | Lowest frequency<br>2402 MHz | Middle frequency<br>2440 MHz | Highest frequency<br>2480 MHz |
|------------------------------|------------------------------|------------------------------|-------------------------------|
| Power spectral density (dBm) | 0.40                         | 0.65                         | 0.73                          |
| Measurement uncertainty (dB) | ±1.2                         |                              |                               |


Verdict: PASS

Power spectral density.


Lowest Channel

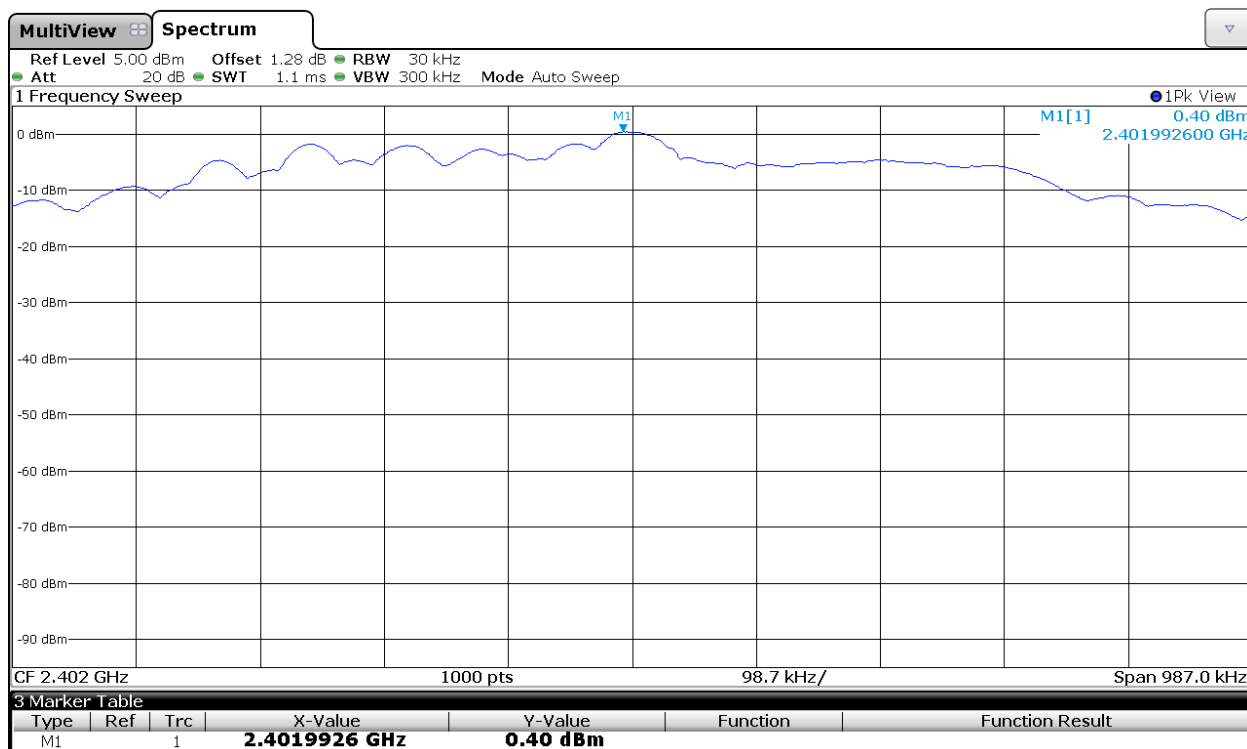

Middle Channel

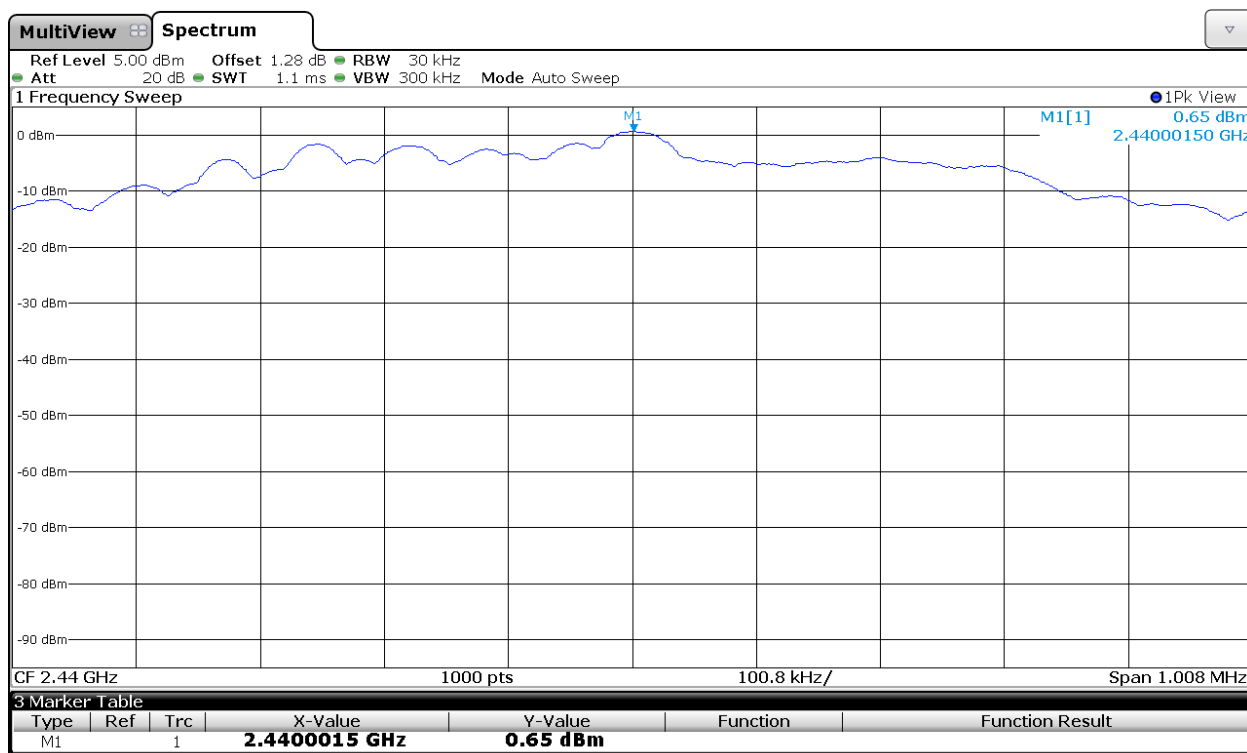

# Highest Channel

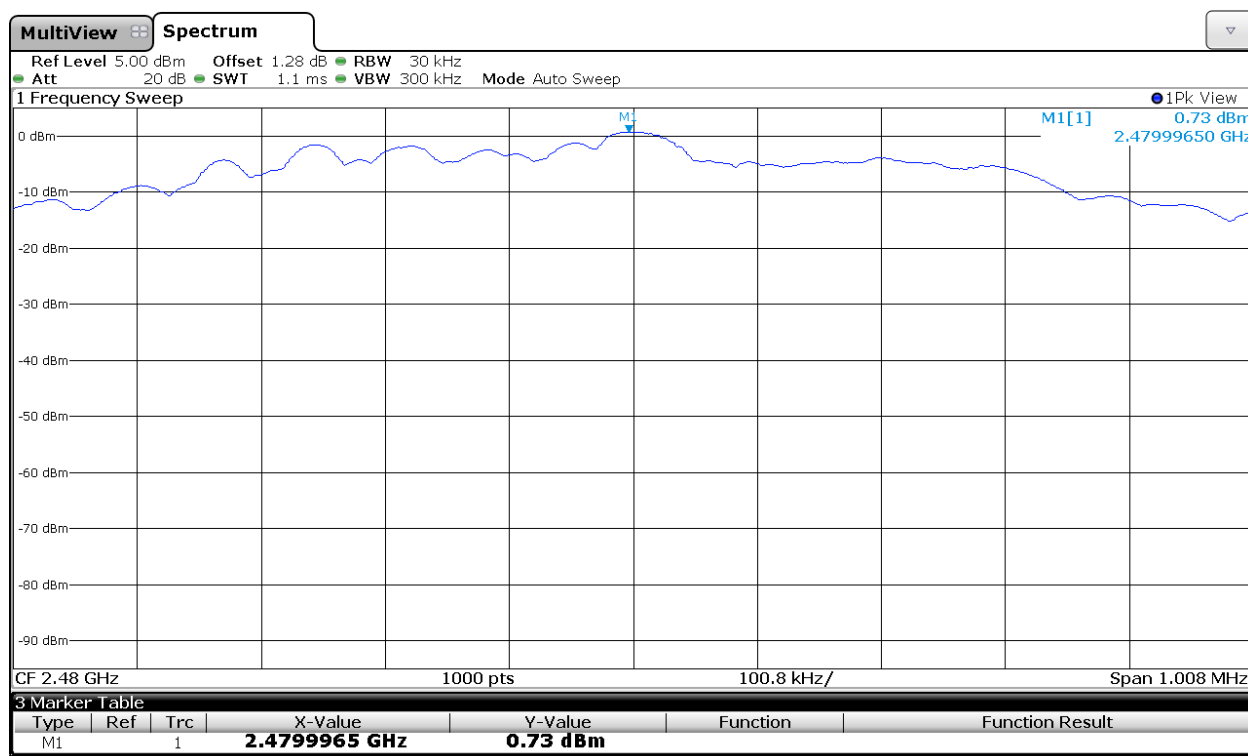

## Section 15.247 Subclause (d) / RSS-210 A8.5. Emission limitations radiated (Transmitter)

### SPECIFICATION

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)):

| Frequency Range (MHz) | Field strength ( $\mu\text{V/m}$ ) | Field strength ( $\text{dB}\mu\text{V/m}$ ) | Measurement distance (m) |
|-----------------------|------------------------------------|---------------------------------------------|--------------------------|
| 0.009-0.490           | 2400/F(kHz)                        | -                                           | 300                      |
| 0.490-1.705           | 24000/F(kHz)                       | -                                           | 300                      |
| 1.705 - 30.0          | 30                                 | -                                           | 30                       |
| 30 - 88               | 100                                | 40                                          | 3                        |
| 88 - 216              | 150                                | 43.5                                        | 3                        |
| 216 - 960             | 200                                | 46                                          | 3                        |
| 960 - 25000           | 500                                | 54                                          | 3                        |

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

### RESULTS:

The situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

All tests were performed in a semi-anechoic chamber at a distance of 3 m for the frequency range 30 MHz-1000 MHz and at distance of 1m for the frequency range 1 GHz-25 GHz.

The field strength is calculated by adding correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

The equipment transmits continuously in the selected channel so it is not necessary a duty cycle correction factor.

### Frequency range 30 MHz-1000 MHz.

The spurious signals detected do not depend on either the operating channel or the modulation mode.

See test results in Appendix A for details.

### Frequency range 1 GHz-25 GHz

Spurious signals with peak levels above the average limit (54 dB $\mu$  V/m at 3 m) are measured with average detector for checking compliance with the average limit.

#### 1. CHANNEL: LOWEST (2402 MHz).

| Spurious frequency (GHz) | Polarization | Detector | Emission Level (dB $\mu$ V/m) | Measurement Uncertainty (dB) |
|--------------------------|--------------|----------|-------------------------------|------------------------------|
| 2.3620                   | PH           | Peak     | 47.21                         | $\pm 4.00$                   |
| 2.4851                   | PH           | Peak     | 46.83                         | $\pm 4.00$                   |
| 2.5021                   | PH           | Peak     | 48.32                         | $\pm 4.00$                   |
| 2.5220                   | PH           | Peak     | 49.51                         | $\pm 4.00$                   |
| 2.5420                   | PH           | Peak     | 48.83                         | $\pm 4.00$                   |
| 4.8040                   | PV           | Peak     | 43.01                         | $\pm 4.00$                   |

#### 2. CHANNEL: MIDDLE (2440 MHz).

| Spurious frequency (GHz) | Polarization | Detector | Emission Level (dB $\mu$ V/m) | Measurement Uncertainty (dB) |
|--------------------------|--------------|----------|-------------------------------|------------------------------|
| 2.3800                   | PH           | Peak     | 47.43                         | $\pm 4.00$                   |
| 2.4801                   | PH           | Peak     | 49.24                         | $\pm 4.00$                   |
| 2.5000                   | PH           | Peak     | 48.65                         | $\pm 4.00$                   |
| 2.5400                   | PH           | Peak     | 48.54                         | $\pm 4.00$                   |
| 2.5599                   | PH           | Peak     | 49.87                         | $\pm 4.00$                   |
| 4.8798                   | PV           | Peak     | 42.10                         | $\pm 4.00$                   |


### 3. CHANNEL: HIGHEST (2480 MHz).

| Spurious frequency (GHz) | Polarization | Detector | Emission Level (dB $\mu$ V/m) | Measurement Uncertainty (dB) |
|--------------------------|--------------|----------|-------------------------------|------------------------------|
| 2.3601                   | PH           | Peak     | 46.72                         | $\pm 4.00$                   |
| 2.4849                   | PH           | Peak     | 51.95                         | $\pm 4.00$                   |
| 2.5199                   | PH           | Peak     | 50.64                         | $\pm 4.00$                   |
| 2.5401                   | PH           | Peak     | 49.10                         | $\pm 4.00$                   |
| 2.6001                   | PH           | Peak     | 49.46                         | $\pm 4.00$                   |
| 4.9598                   | PV           | Peak     | 41.06                         | $\pm 4.00$                   |

Verdict: PASS


FREQUENCY RANGE 1 GHz to 3 GHz.

**CHANNEL: Lowest (2402 MHz).**

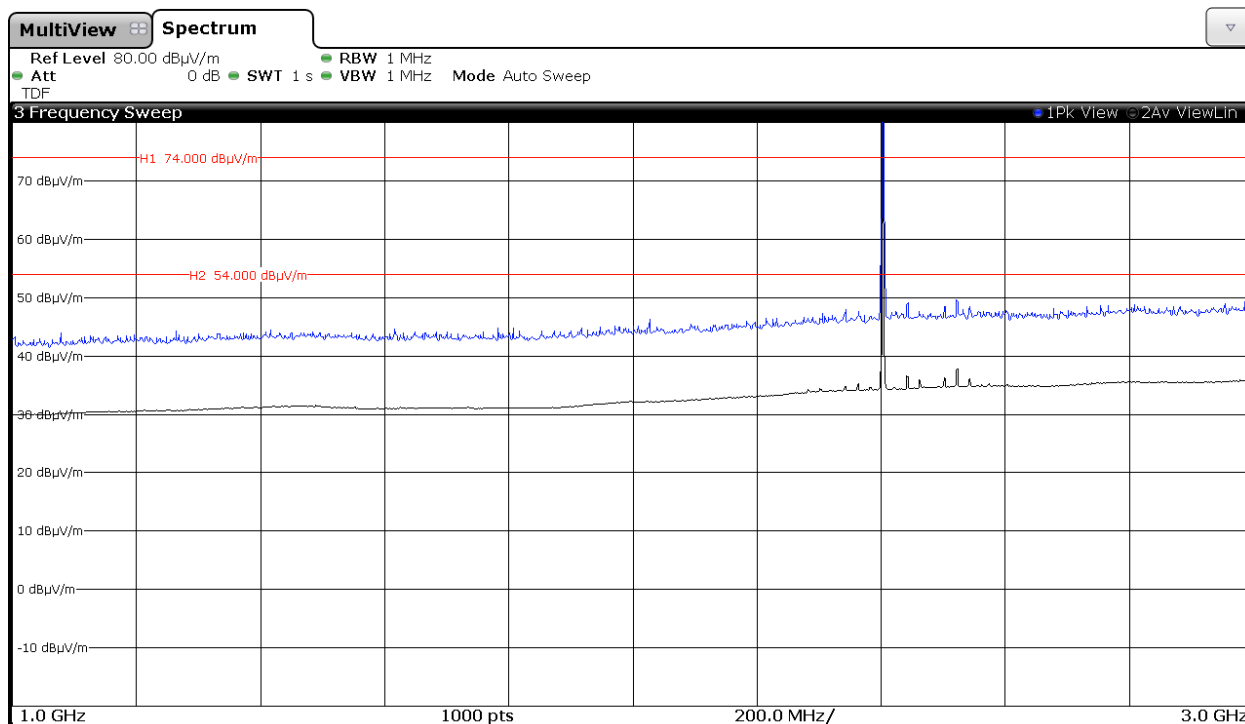


Note: The peak shown in the plot above the limit is the carrier frequency.

**CHANNEL: Middle (2440 MHz).**

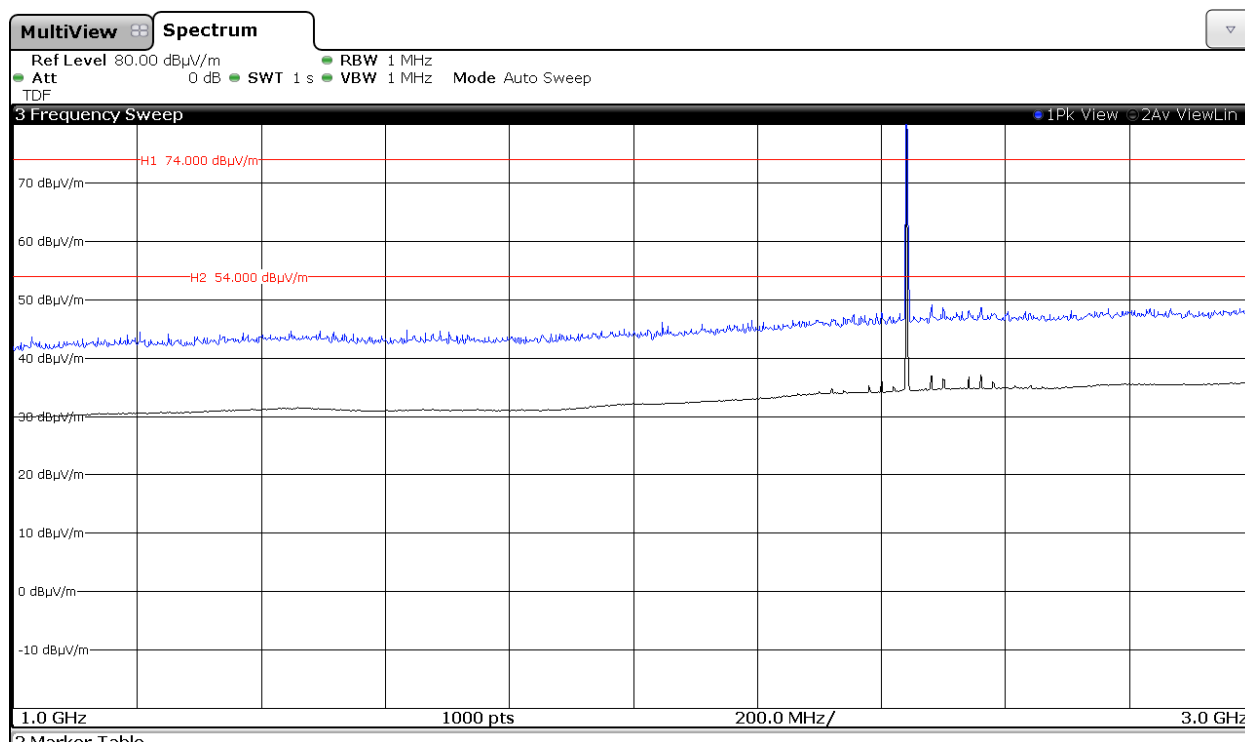

Note: The peak shown in the plot above the limit is the carrier frequency.


**CHANNEL: Highest (2480 MHz).**

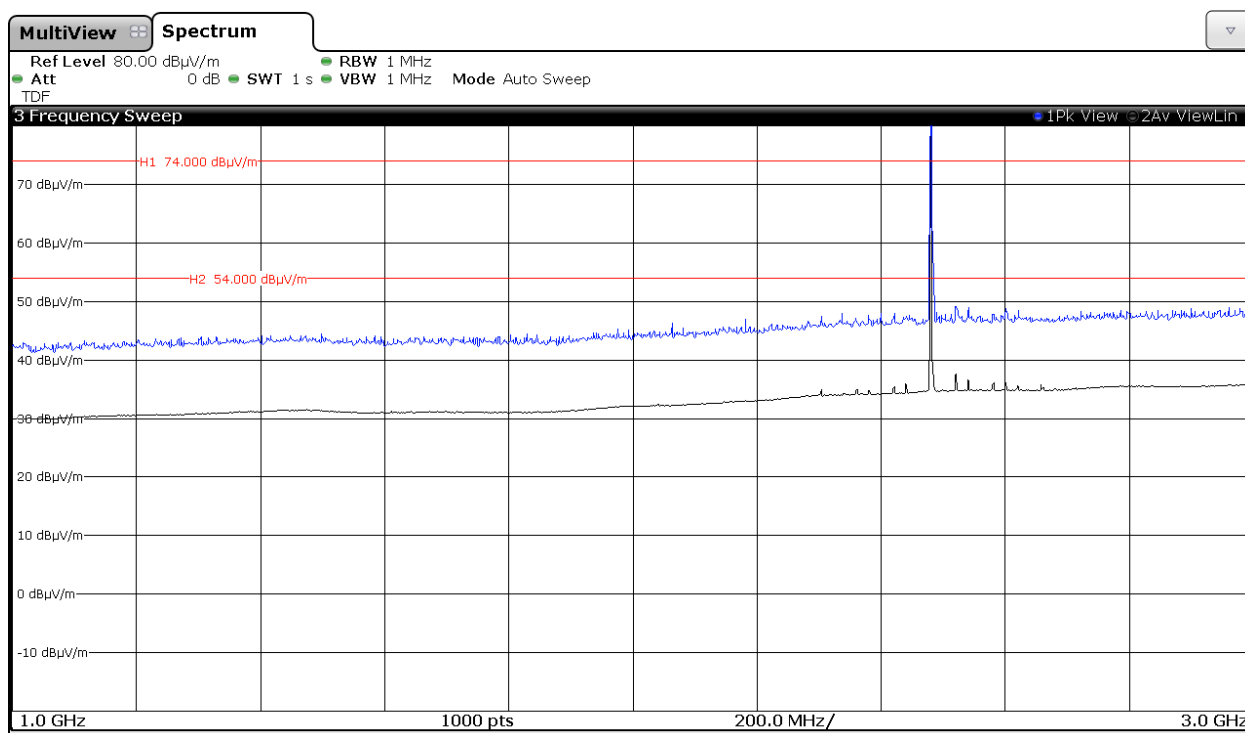


Note: The peak shown in the plot above the limit is the carrier frequency.

**FREQUENCY RANGE 3 GHz to 18 GHz.**


**CHANNEL: Lowest (2402 MHz).**

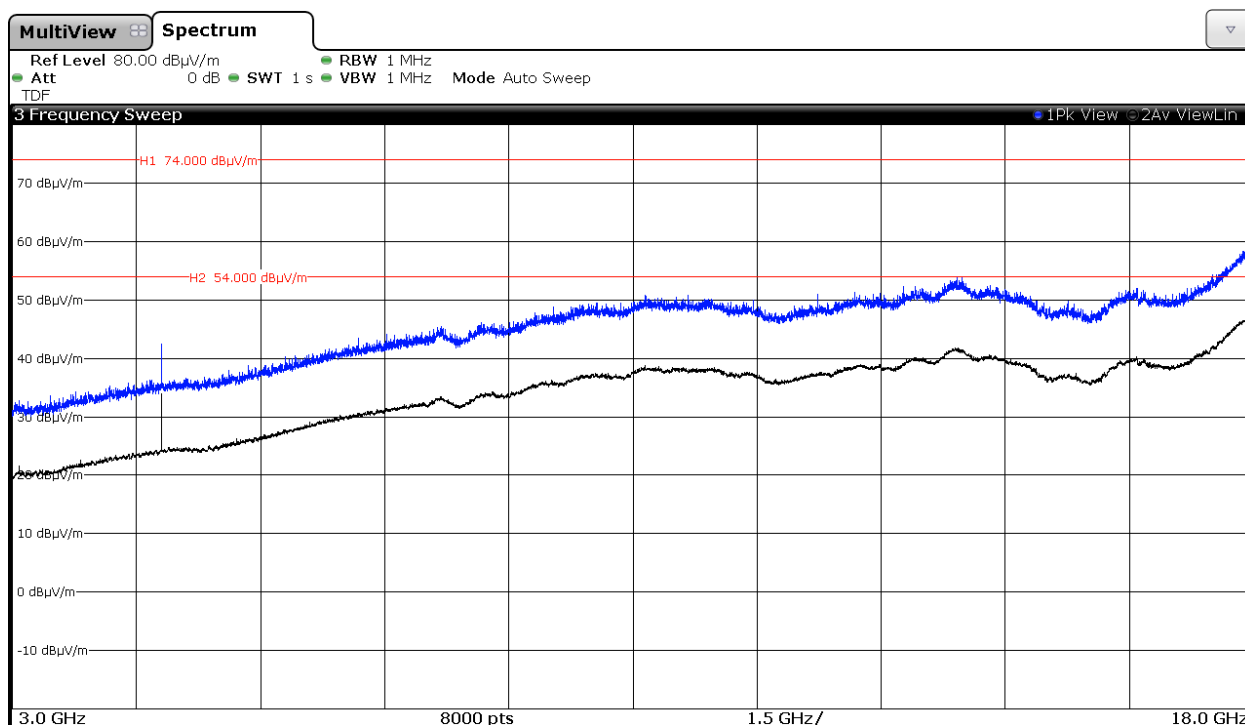


**CHANNEL: Middle (2440 MHz).**

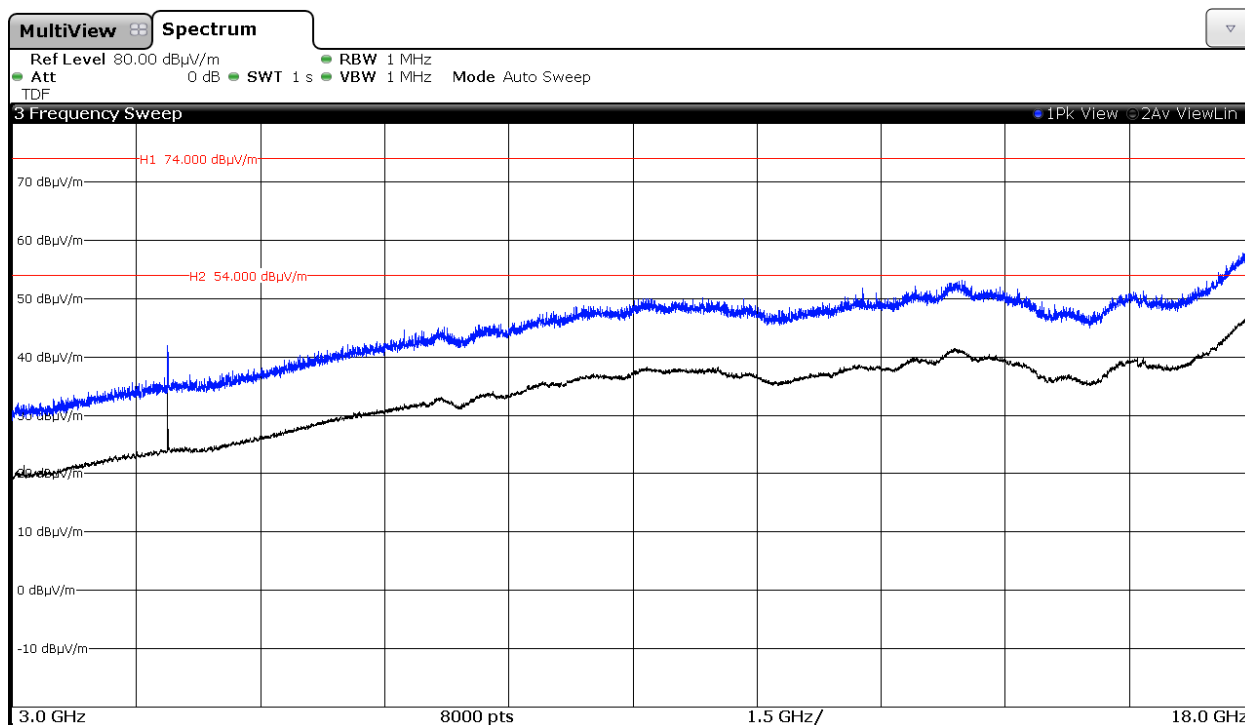

**CHANNEL: Highest (2480 MHz).**

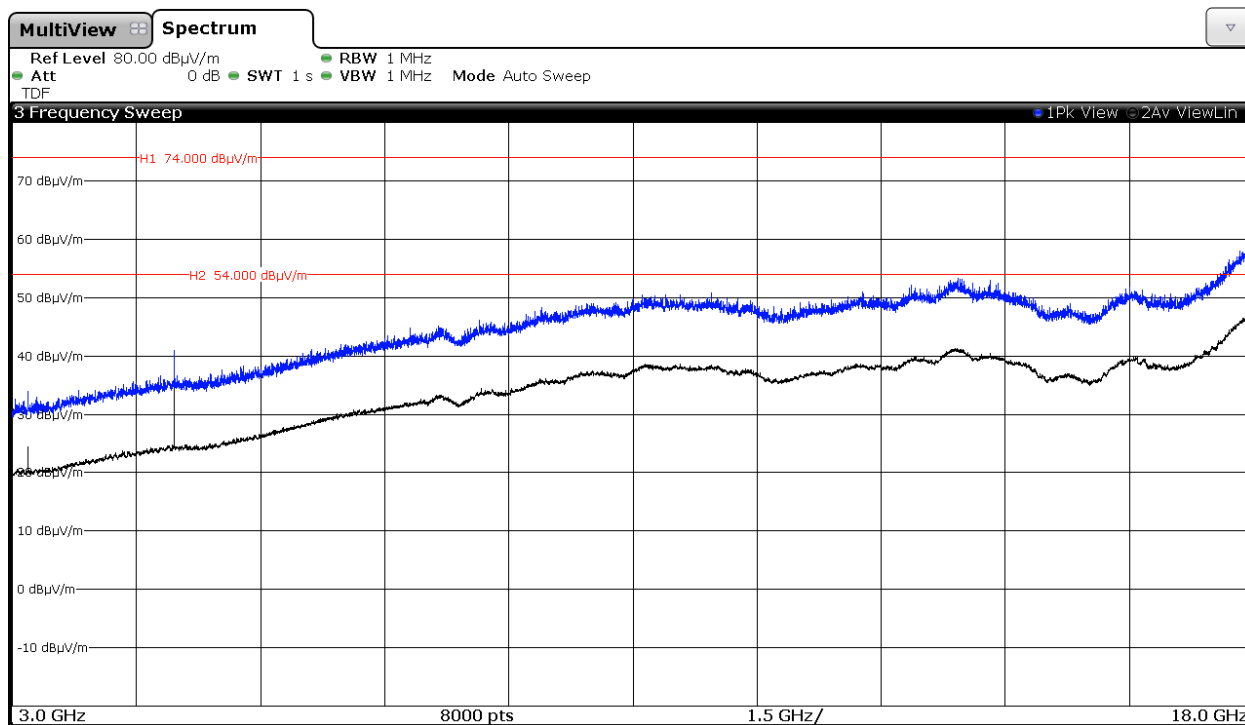


FREQUENCY RANGE 18 GHz to 25 GHz.

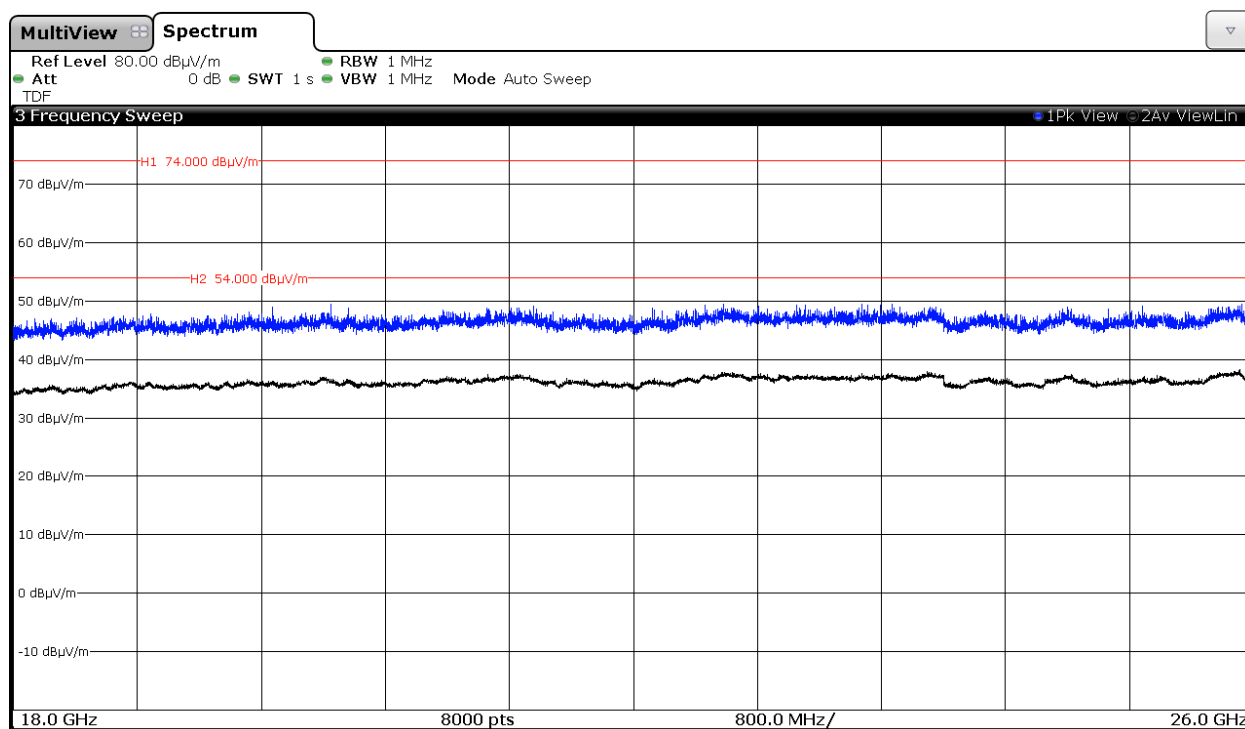


(This plot is valid for all three channels).

FREQUENCY RANGE 2.31 GHz to 2.39 GHz. (RESTRICTED BAND)


**CHANNEL: Lowest (2402 MHz).**

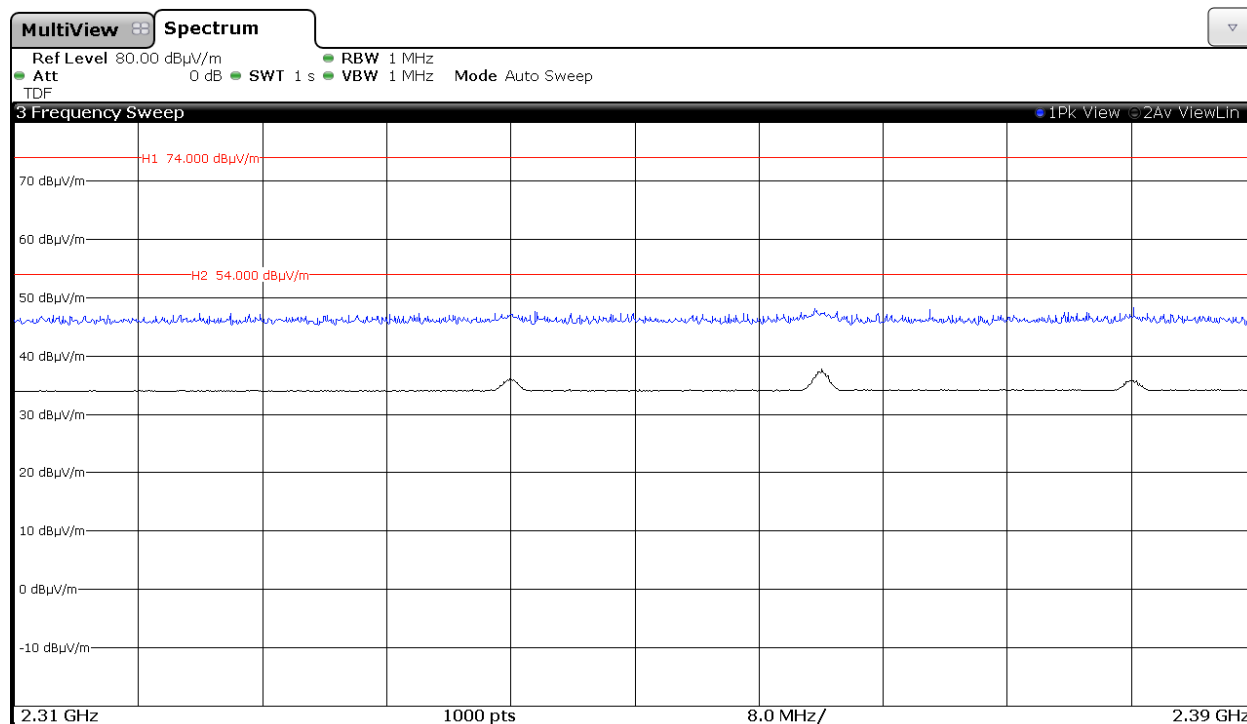

**CHANNEL: Middle (2440 MHz).**

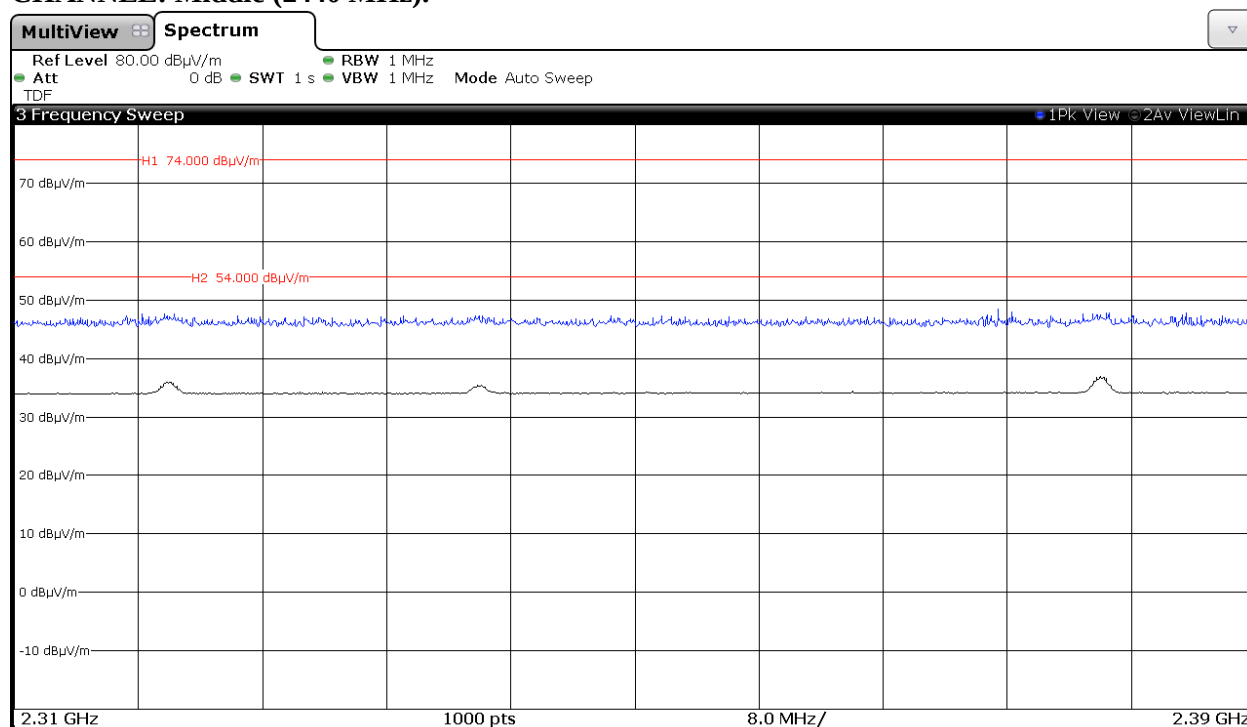


**CHANNEL: Highest (2480 MHz).**

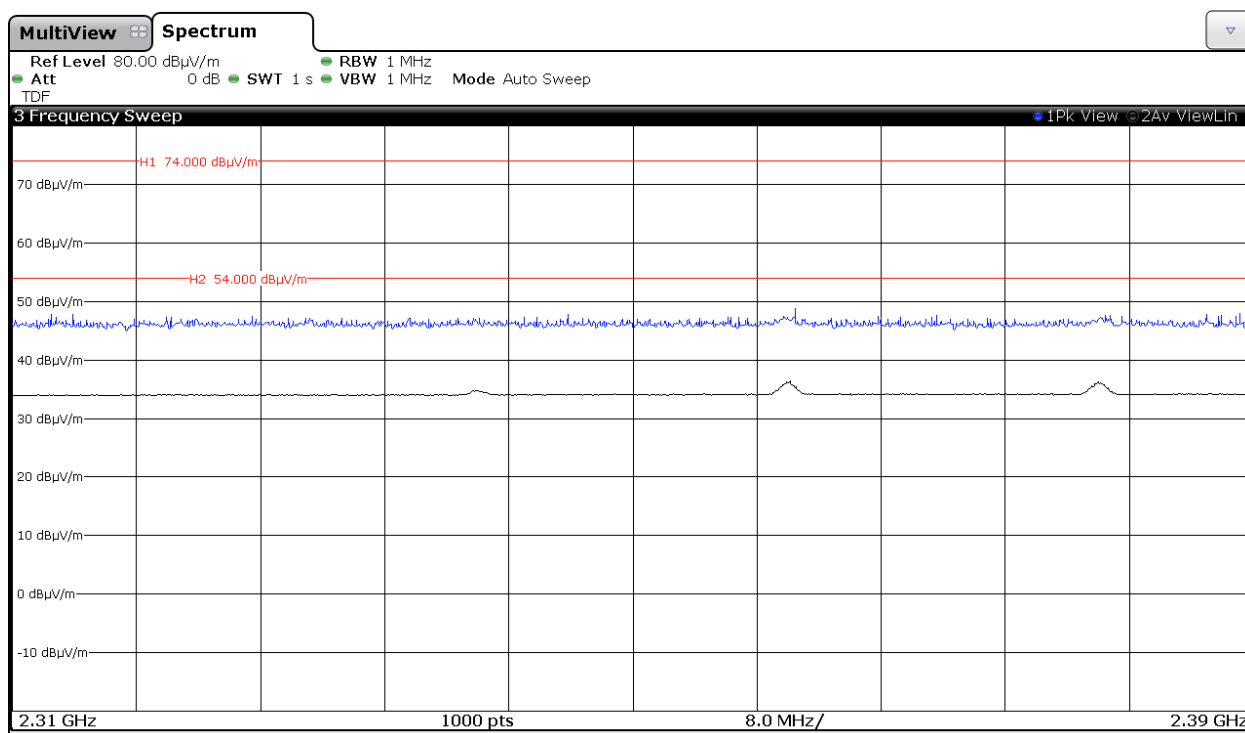


FREQUENCY RANGE 2.4835 GHz to 2.5 GHz. (RESTRICTED BAND)

**CHANNEL: Lowest (2402 MHz).**

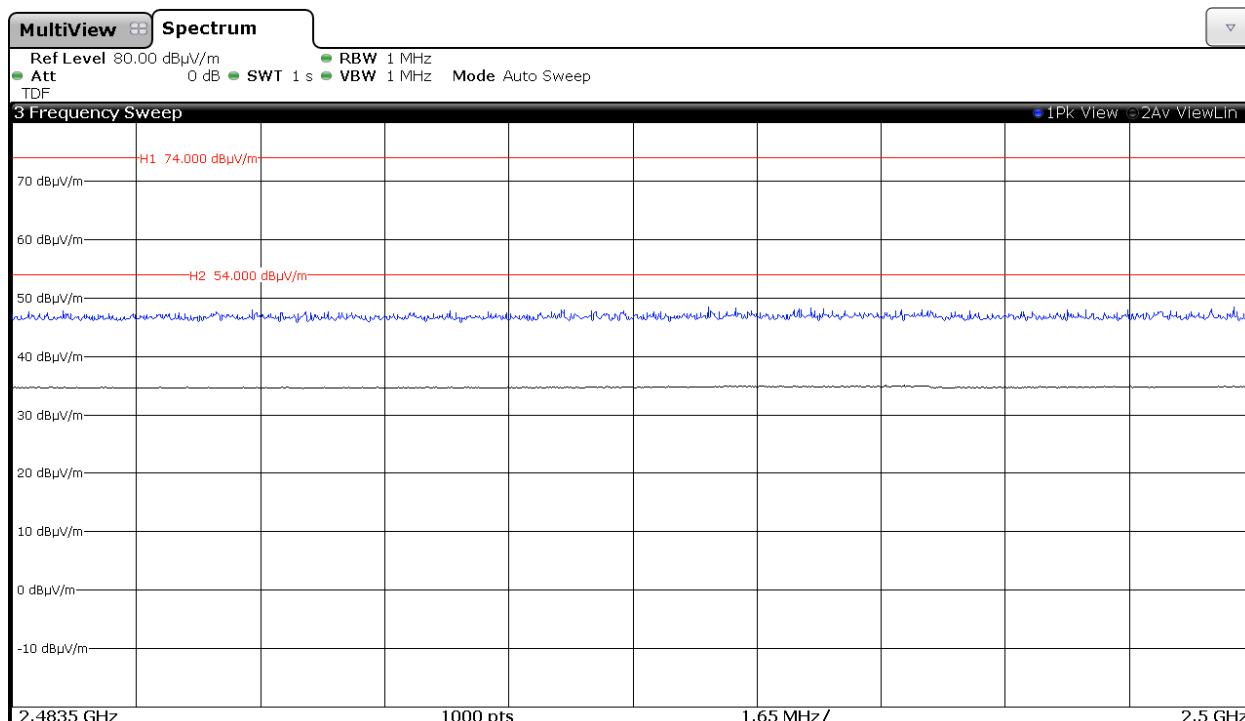

# CHANNEL: Middle (2440 MHz).

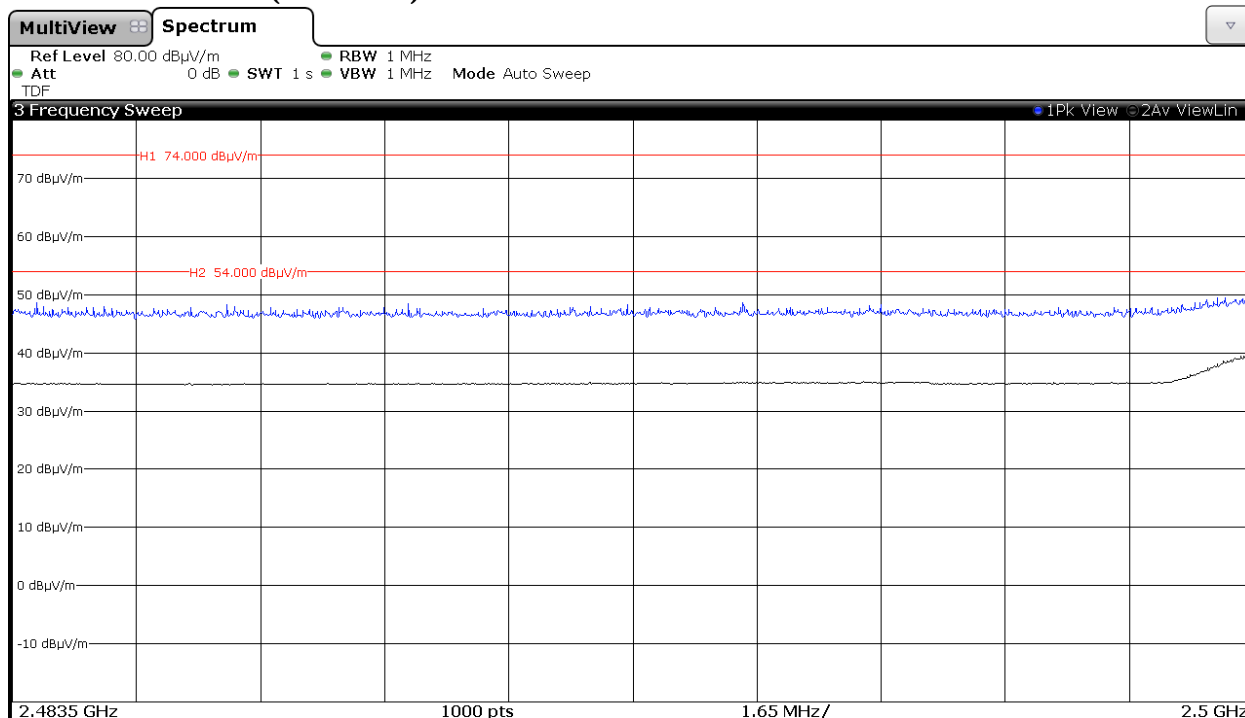

# CHANNEL: Highest (2480 MHz).

