




Modulation	be EHT20	Test Freq. (MHz)	5700
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):25 Humidity(%):61			
Level (dBuV/m) <			




Modulation	be EHT20	Test Freq. (MHz)	5720																																																																																																				
Polarization	Horizontal																																																																																																						
Test By :Brad Wu Temperature(°C):25 Humidity(%):61																																																																																																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>42.71</td><td>54.00</td><td>-11.29</td><td>42.21</td><td>0.50</td><td>Average</td><td>100</td><td>265</td></tr><tr><td>2</td><td>5460.00</td><td>56.63</td><td>74.00</td><td>-17.37</td><td>56.13</td><td>0.50</td><td>Peak</td><td>100</td><td>265</td></tr><tr><td>3</td><td>5470.00</td><td>56.75</td><td>68.20</td><td>-11.45</td><td>56.23</td><td>0.52</td><td>Peak</td><td>100</td><td>265</td></tr><tr><td>4 *</td><td>5720.00</td><td>101.68</td><td></td><td></td><td>100.74</td><td>0.94</td><td>Average</td><td>100</td><td>265</td></tr><tr><td>5 *</td><td>5720.00</td><td>115.52</td><td></td><td></td><td>114.58</td><td>0.94</td><td>Peak</td><td>100</td><td>265</td></tr><tr><td>6</td><td>5850.00</td><td>57.96</td><td>68.20</td><td>-10.24</td><td>56.88</td><td>1.08</td><td>Peak</td><td>100</td><td>265</td></tr><tr><td>7</td><td>11440.00</td><td>41.63</td><td>54.00</td><td>-12.37</td><td>33.49</td><td>8.14</td><td>Average</td><td>100</td><td>35</td></tr><tr><td>8</td><td>11440.00</td><td>54.65</td><td>74.00</td><td>-19.35</td><td>46.51</td><td>8.14</td><td>Peak</td><td>100</td><td>35</td></tr><tr><td>9</td><td>17160.00</td><td>56.28</td><td>68.20</td><td>-11.92</td><td>50.82</td><td>5.46</td><td>Peak</td><td>100</td><td>21</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	42.71	54.00	-11.29	42.21	0.50	Average	100	265	2	5460.00	56.63	74.00	-17.37	56.13	0.50	Peak	100	265	3	5470.00	56.75	68.20	-11.45	56.23	0.52	Peak	100	265	4 *	5720.00	101.68			100.74	0.94	Average	100	265	5 *	5720.00	115.52			114.58	0.94	Peak	100	265	6	5850.00	57.96	68.20	-10.24	56.88	1.08	Peak	100	265	7	11440.00	41.63	54.00	-12.37	33.49	8.14	Average	100	35	8	11440.00	54.65	74.00	-19.35	46.51	8.14	Peak	100	35	9	17160.00	56.28	68.20	-11.92	50.82	5.46	Peak	100	21
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5460.00	42.71	54.00	-11.29	42.21	0.50	Average	100	265																																																																																														
2	5460.00	56.63	74.00	-17.37	56.13	0.50	Peak	100	265																																																																																														
3	5470.00	56.75	68.20	-11.45	56.23	0.52	Peak	100	265																																																																																														
4 *	5720.00	101.68			100.74	0.94	Average	100	265																																																																																														
5 *	5720.00	115.52			114.58	0.94	Peak	100	265																																																																																														
6	5850.00	57.96	68.20	-10.24	56.88	1.08	Peak	100	265																																																																																														
7	11440.00	41.63	54.00	-12.37	33.49	8.14	Average	100	35																																																																																														
8	11440.00	54.65	74.00	-19.35	46.51	8.14	Peak	100	35																																																																																														
9	17160.00	56.28	68.20	-11.92	50.82	5.46	Peak	100	21																																																																																														

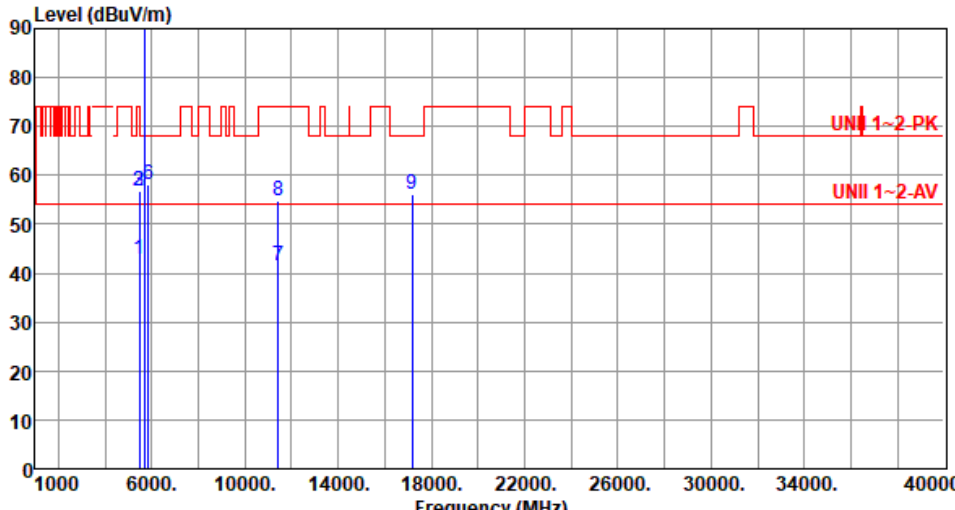


Modulation	be EHT20	Test Freq. (MHz)	5720																																																																																																				
Polarization	Vertical																																																																																																						
Test By :Brad Wu Temperature(°C):25 Humidity(%):61																																																																																																							
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>42.83</td><td>54.00</td><td>-11.17</td><td>42.33</td><td>0.50</td><td>Average</td><td>223</td><td>258</td></tr><tr><td>2</td><td>5460.00</td><td>56.66</td><td>74.00</td><td>-17.34</td><td>56.16</td><td>0.50</td><td>Peak</td><td>223</td><td>258</td></tr><tr><td>3</td><td>5470.00</td><td>56.86</td><td>68.20</td><td>-11.34</td><td>56.34</td><td>0.52</td><td>Peak</td><td>223</td><td>258</td></tr><tr><td>4 *</td><td>5720.00</td><td>106.61</td><td></td><td></td><td>105.67</td><td>0.94</td><td>Average</td><td>223</td><td>258</td></tr><tr><td>5 *</td><td>5720.00</td><td>120.48</td><td></td><td></td><td>119.54</td><td>0.94</td><td>Peak</td><td>223</td><td>258</td></tr><tr><td>6</td><td>5850.00</td><td>58.03</td><td>68.20</td><td>-10.17</td><td>56.95</td><td>1.08</td><td>Peak</td><td>223</td><td>258</td></tr><tr><td>7</td><td>11440.00</td><td>41.64</td><td>54.00</td><td>-12.36</td><td>33.50</td><td>8.14</td><td>Average</td><td>100</td><td>28</td></tr><tr><td>8</td><td>11440.00</td><td>54.69</td><td>74.00</td><td>-19.31</td><td>46.55</td><td>8.14</td><td>Peak</td><td>100</td><td>28</td></tr><tr><td>9</td><td>17160.00</td><td>56.15</td><td>68.20</td><td>-12.05</td><td>50.69</td><td>5.46</td><td>Peak</td><td>100</td><td>39</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	42.83	54.00	-11.17	42.33	0.50	Average	223	258	2	5460.00	56.66	74.00	-17.34	56.16	0.50	Peak	223	258	3	5470.00	56.86	68.20	-11.34	56.34	0.52	Peak	223	258	4 *	5720.00	106.61			105.67	0.94	Average	223	258	5 *	5720.00	120.48			119.54	0.94	Peak	223	258	6	5850.00	58.03	68.20	-10.17	56.95	1.08	Peak	223	258	7	11440.00	41.64	54.00	-12.36	33.50	8.14	Average	100	28	8	11440.00	54.69	74.00	-19.31	46.55	8.14	Peak	100	28	9	17160.00	56.15	68.20	-12.05	50.69	5.46	Peak	100	39
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5460.00	42.83	54.00	-11.17	42.33	0.50	Average	223	258																																																																																														
2	5460.00	56.66	74.00	-17.34	56.16	0.50	Peak	223	258																																																																																														
3	5470.00	56.86	68.20	-11.34	56.34	0.52	Peak	223	258																																																																																														
4 *	5720.00	106.61			105.67	0.94	Average	223	258																																																																																														
5 *	5720.00	120.48			119.54	0.94	Peak	223	258																																																																																														
6	5850.00	58.03	68.20	-10.17	56.95	1.08	Peak	223	258																																																																																														
7	11440.00	41.64	54.00	-12.36	33.50	8.14	Average	100	28																																																																																														
8	11440.00	54.69	74.00	-19.31	46.55	8.14	Peak	100	28																																																																																														
9	17160.00	56.15	68.20	-12.05	50.69	5.46	Peak	100	39																																																																																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																							

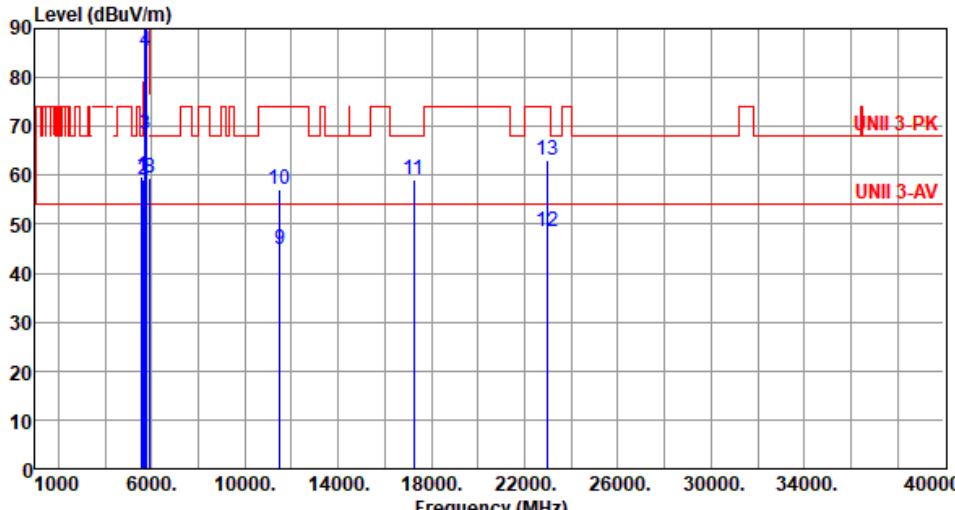

Modulation	be EHT20	Test Freq. (MHz)	5745						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):25 Humidity(%):63									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5585.00	59.76	68.20	-8.44	59.23	0.53	Peak	100	261
2	5650.00	59.01	68.20	-9.19	58.35	0.66	Peak	100	261
3	5700.00	68.29	105.20	-36.91	67.39	0.90	Peak	100	261
4	5720.00	85.24	110.80	-25.56	84.30	0.94	Peak	100	261
5	5725.00	92.01	122.20	-30.19	91.06	0.95	Peak	100	261
6 *	5745.00	105.57			104.57	1.00	Average	100	261
7 *	5745.00	119.91			118.91	1.00	Peak	100	261
8	5925.00	59.36	68.20	-8.84	57.92	1.44	Peak	100	261
9	11490.00	44.78	54.00	-9.22	36.39	8.39	Average	100	115
10	11490.00	57.21	74.00	-16.79	48.82	8.39	Peak	100	115
11	17235.00	59.16	68.20	-9.04	53.72	5.44	Peak	100	251
12	22980.00	48.65	54.00	-5.35	41.79	6.86	Average	124	77
13	22980.00	63.24	74.00	-10.76	56.38	6.86	Peak	124	77
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency									

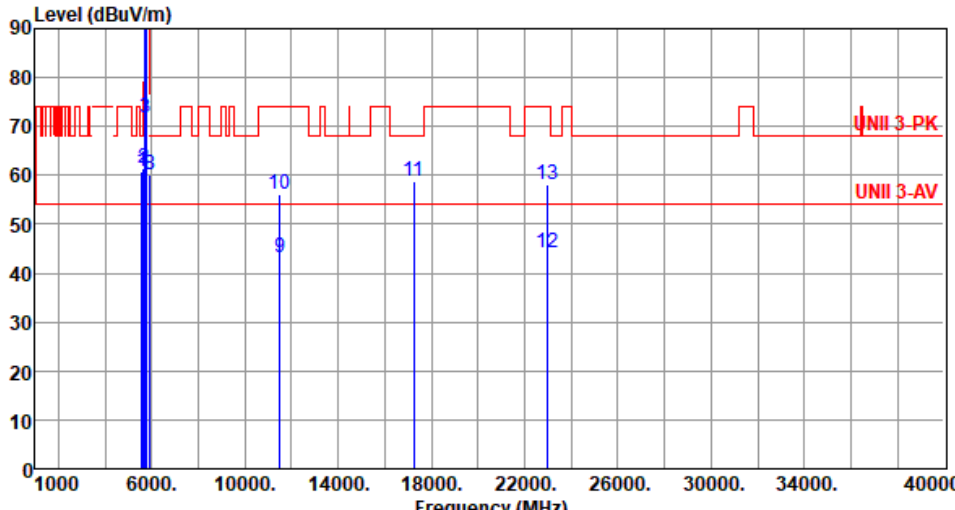

Modulation	be EHT20	Test Freq. (MHz)	5745						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):25 Humidity(%):63									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5585.00	60.89	68.20	-7.31	60.36	0.53	Peak	216	258
2	5650.00	61.48	68.20	-6.72	60.82	0.66	Peak	216	258
3	5700.00	71.89	105.20	-33.31	70.99	0.90	Peak	216	258
4	5720.00	89.77	110.80	-21.03	88.83	0.94	Peak	216	258
5	5725.00	97.84	122.20	-24.36	96.89	0.95	Peak	216	258
6 *	5745.00	111.78			110.78	1.00	Average	216	258
7 *	5745.00	124.92			123.92	1.00	Peak	216	258
8	5925.00	60.01	68.20	-8.19	58.57	1.44	Peak	216	258
9	11490.00	43.15	54.00	-10.85	34.76	8.39	Average	100	262
10	11490.00	56.18	74.00	-17.82	47.79	8.39	Peak	100	262
11	17235.00	58.72	68.20	-9.48	53.28	5.44	Peak	100	116
12	22980.00	44.21	54.00	-9.79	37.35	6.86	Average	276	135
13	22980.00	58.15	74.00	-15.85	51.29	6.86	Peak	276	135

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency




Modulation	be EHT20	Test Freq. (MHz)	5785																																																																																																				
Polarization	Horizontal																																																																																																						
Test By :Sean Yu Temperature(°C):25 Humidity(%):63																																																																																																							
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5625.00</td><td>59.76</td><td>68.20</td><td>-8.44</td><td>59.16</td><td>0.60</td><td>Peak</td><td>100</td><td>260</td></tr><tr><td>2</td><td>5650.00</td><td>59.07</td><td>68.20</td><td>-9.13</td><td>58.41</td><td>0.66</td><td>Peak</td><td>100</td><td>260</td></tr><tr><td>3 *</td><td>5785.00</td><td>105.74</td><td></td><td></td><td>104.70</td><td>1.04</td><td>Average</td><td>100</td><td>260</td></tr><tr><td>4 *</td><td>5785.00</td><td>119.71</td><td></td><td></td><td>118.67</td><td>1.04</td><td>Peak</td><td>100</td><td>260</td></tr><tr><td>5</td><td>5925.00</td><td>59.24</td><td>68.20</td><td>-8.96</td><td>57.80</td><td>1.44</td><td>Peak</td><td>100</td><td>260</td></tr><tr><td>6</td><td>11570.00</td><td>44.42</td><td>54.00</td><td>-9.58</td><td>36.09</td><td>8.33</td><td>Average</td><td>100</td><td>27</td></tr><tr><td>7</td><td>11570.00</td><td>56.51</td><td>74.00</td><td>-17.49</td><td>48.18</td><td>8.33</td><td>Peak</td><td>100</td><td>27</td></tr><tr><td>8</td><td>17355.00</td><td>57.38</td><td>68.20</td><td>-10.82</td><td>51.54</td><td>5.84</td><td>Peak</td><td>100</td><td>118</td></tr><tr><td>9</td><td>23140.00</td><td>64.11</td><td>68.20</td><td>-4.09</td><td>57.02</td><td>7.09</td><td>Peak</td><td>132</td><td>91</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5625.00	59.76	68.20	-8.44	59.16	0.60	Peak	100	260	2	5650.00	59.07	68.20	-9.13	58.41	0.66	Peak	100	260	3 *	5785.00	105.74			104.70	1.04	Average	100	260	4 *	5785.00	119.71			118.67	1.04	Peak	100	260	5	5925.00	59.24	68.20	-8.96	57.80	1.44	Peak	100	260	6	11570.00	44.42	54.00	-9.58	36.09	8.33	Average	100	27	7	11570.00	56.51	74.00	-17.49	48.18	8.33	Peak	100	27	8	17355.00	57.38	68.20	-10.82	51.54	5.84	Peak	100	118	9	23140.00	64.11	68.20	-4.09	57.02	7.09	Peak	132	91
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5625.00	59.76	68.20	-8.44	59.16	0.60	Peak	100	260																																																																																														
2	5650.00	59.07	68.20	-9.13	58.41	0.66	Peak	100	260																																																																																														
3 *	5785.00	105.74			104.70	1.04	Average	100	260																																																																																														
4 *	5785.00	119.71			118.67	1.04	Peak	100	260																																																																																														
5	5925.00	59.24	68.20	-8.96	57.80	1.44	Peak	100	260																																																																																														
6	11570.00	44.42	54.00	-9.58	36.09	8.33	Average	100	27																																																																																														
7	11570.00	56.51	74.00	-17.49	48.18	8.33	Peak	100	27																																																																																														
8	17355.00	57.38	68.20	-10.82	51.54	5.84	Peak	100	118																																																																																														
9	23140.00	64.11	68.20	-4.09	57.02	7.09	Peak	132	91																																																																																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																							




Modulation	be EHT20	Test Freq. (MHz)	5785
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):25 Humidity(%):63			
Level (dBuV/m)			

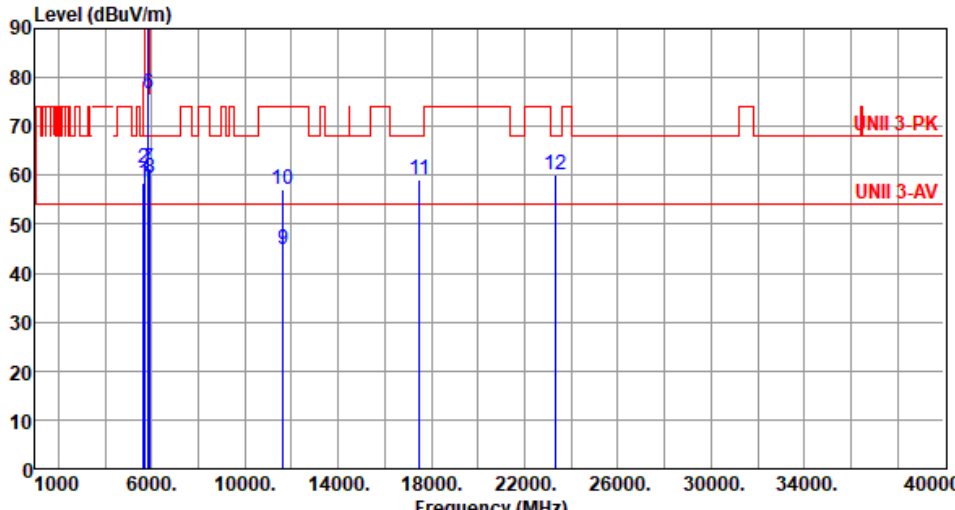

Modulation	be EHT20	Test Freq. (MHz)	5825																																																																																																																																			
Polarization	Horizontal																																																																																																																																					
Test By :Sean Yu Temperature(°C):25 Humidity(%):63																																																																																																																																						
																																																																																																																																						
	<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5650.00</td><td>58.40</td><td>68.20</td><td>-9.80</td><td>57.74</td><td>0.66</td><td>Peak</td><td>100</td><td>259</td></tr><tr><td>2</td><td>5665.00</td><td>61.31</td><td>79.33</td><td>-18.02</td><td>60.58</td><td>0.73</td><td>Peak</td><td>100</td><td>259</td></tr><tr><td>3 *</td><td>5825.00</td><td>105.40</td><td></td><td></td><td>104.34</td><td>1.06</td><td>Average</td><td>100</td><td>259</td></tr><tr><td>4 *</td><td>5825.00</td><td>119.84</td><td></td><td></td><td>118.78</td><td>1.06</td><td>Peak</td><td>100</td><td>259</td></tr><tr><td>5</td><td>5850.00</td><td>91.26</td><td>122.20</td><td>-30.94</td><td>90.18</td><td>1.08</td><td>Peak</td><td>100</td><td>259</td></tr><tr><td>6</td><td>5855.00</td><td>76.83</td><td>110.80</td><td>-33.97</td><td>75.71</td><td>1.12</td><td>Peak</td><td>100</td><td>259</td></tr><tr><td>7</td><td>5875.00</td><td>61.48</td><td>105.20</td><td>-43.72</td><td>60.23</td><td>1.25</td><td>Peak</td><td>100</td><td>259</td></tr><tr><td>8</td><td>5925.00</td><td>59.57</td><td>68.20</td><td>-8.63</td><td>58.13</td><td>1.44</td><td>Peak</td><td>100</td><td>259</td></tr><tr><td>9</td><td>11650.00</td><td>44.95</td><td>54.00</td><td>-9.05</td><td>37.03</td><td>7.92</td><td>Average</td><td>100</td><td>109</td></tr><tr><td>10</td><td>11650.00</td><td>57.28</td><td>74.00</td><td>-16.72</td><td>49.36</td><td>7.92</td><td>Peak</td><td>100</td><td>109</td></tr><tr><td>11</td><td>17475.00</td><td>59.28</td><td>68.20</td><td>-8.92</td><td>52.96</td><td>6.32</td><td>Peak</td><td>100</td><td>251</td></tr><tr><td>12</td><td>23300.00</td><td>60.22</td><td>68.20</td><td>-7.98</td><td>53.05</td><td>7.17</td><td>Peak</td><td>126</td><td>81</td></tr></table>		Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	58.40	68.20	-9.80	57.74	0.66	Peak	100	259	2	5665.00	61.31	79.33	-18.02	60.58	0.73	Peak	100	259	3 *	5825.00	105.40			104.34	1.06	Average	100	259	4 *	5825.00	119.84			118.78	1.06	Peak	100	259	5	5850.00	91.26	122.20	-30.94	90.18	1.08	Peak	100	259	6	5855.00	76.83	110.80	-33.97	75.71	1.12	Peak	100	259	7	5875.00	61.48	105.20	-43.72	60.23	1.25	Peak	100	259	8	5925.00	59.57	68.20	-8.63	58.13	1.44	Peak	100	259	9	11650.00	44.95	54.00	-9.05	37.03	7.92	Average	100	109	10	11650.00	57.28	74.00	-16.72	49.36	7.92	Peak	100	109	11	17475.00	59.28	68.20	-8.92	52.96	6.32	Peak	100	251	12	23300.00	60.22	68.20	-7.98	53.05	7.17	Peak	126	81			
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																													
1	5650.00	58.40	68.20	-9.80	57.74	0.66	Peak	100	259																																																																																																																													
2	5665.00	61.31	79.33	-18.02	60.58	0.73	Peak	100	259																																																																																																																													
3 *	5825.00	105.40			104.34	1.06	Average	100	259																																																																																																																													
4 *	5825.00	119.84			118.78	1.06	Peak	100	259																																																																																																																													
5	5850.00	91.26	122.20	-30.94	90.18	1.08	Peak	100	259																																																																																																																													
6	5855.00	76.83	110.80	-33.97	75.71	1.12	Peak	100	259																																																																																																																													
7	5875.00	61.48	105.20	-43.72	60.23	1.25	Peak	100	259																																																																																																																													
8	5925.00	59.57	68.20	-8.63	58.13	1.44	Peak	100	259																																																																																																																													
9	11650.00	44.95	54.00	-9.05	37.03	7.92	Average	100	109																																																																																																																													
10	11650.00	57.28	74.00	-16.72	49.36	7.92	Peak	100	109																																																																																																																													
11	17475.00	59.28	68.20	-8.92	52.96	6.32	Peak	100	251																																																																																																																													
12	23300.00	60.22	68.20	-7.98	53.05	7.17	Peak	126	81																																																																																																																													
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: "*" is Peak / Average value of fundamental frequency																																																																																																																																						

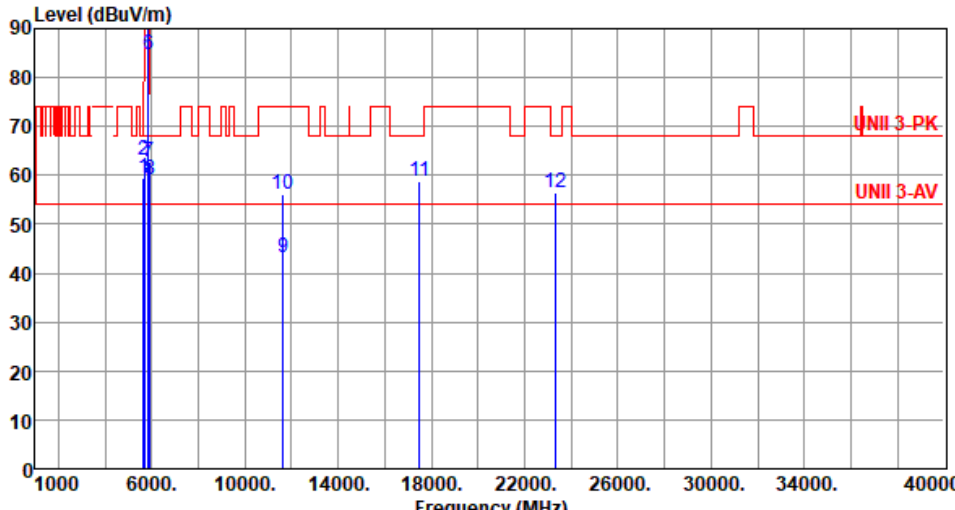

Modulation	be EHT20	Test Freq. (MHz)	5825						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):25 Humidity(%):63									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	59.56	68.20	-8.64	58.90	0.66	Peak	210	260
2	5665.00	62.98	79.33	-16.35	62.25	0.73	Peak	210	260
3 *	5825.00	111.50			110.44	1.06	Average	210	260
4 *	5825.00	125.62			124.56	1.06	Peak	210	260
5	5850.00	90.87	122.20	-31.33	89.79	1.08	Peak	210	260
6	5855.00	84.57	110.80	-26.23	83.45	1.12	Peak	210	260
7	5875.00	62.91	105.20	-42.29	61.66	1.25	Peak	210	260
8	5925.00	59.22	68.20	-8.98	57.78	1.44	Peak	210	260
9	11650.00	43.12	54.00	-10.88	35.20	7.92	Average	100	256
10	11650.00	55.98	74.00	-18.02	48.06	7.92	Peak	100	256
11	17475.00	58.86	68.20	-9.34	52.54	6.32	Peak	100	124
12	23300.00	56.52	68.20	-11.68	49.35	7.17	Peak	271	135
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: "*" is Peak / Average value of fundamental frequency									



Unwanted Emissions (Above 1GHz) for be EHT40

Modulation	be EHT40	Test Freq. (MHz)	5190
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):25 Humidity(%):61			
Level (dBuV/m) <			




Modulation	be EHT40	Test Freq. (MHz)	5190
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):25 Humidity(%):61			
Level (dBUV/m) </			



Modulation	be EHT40	Test Freq. (MHz)	5230
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):25 Humidity(%):61			
Level (dBuV/m) <			

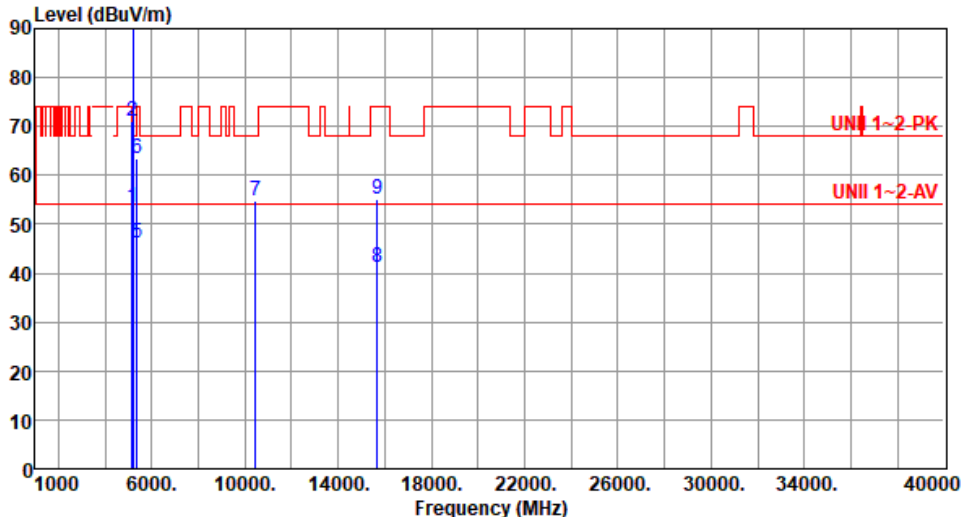

Modulation	be EHT40	Test Freq. (MHz)	5230																																																																																																				
Polarization	Vertical																																																																																																						
Test By :Brad Wu Temperature(°C):25 Humidity(%):61																																																																																																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>53.57</td><td>54.00</td><td>-0.43</td><td>52.92</td><td>0.65</td><td>Average</td><td>198</td><td>238</td></tr><tr><td>2</td><td>5150.00</td><td>71.06</td><td>74.00</td><td>-2.94</td><td>70.41</td><td>0.65</td><td>Peak</td><td>198</td><td>238</td></tr><tr><td>3 *</td><td>5230.00</td><td>104.53</td><td></td><td></td><td>104.14</td><td>0.39</td><td>Average</td><td>198</td><td>238</td></tr><tr><td>4 *</td><td>5230.00</td><td>118.14</td><td></td><td></td><td>117.75</td><td>0.39</td><td>Peak</td><td>198</td><td>238</td></tr><tr><td>5</td><td>5350.00</td><td>46.03</td><td>54.00</td><td>-7.97</td><td>45.89</td><td>0.14</td><td>Average</td><td>198</td><td>238</td></tr><tr><td>6</td><td>5350.00</td><td>63.49</td><td>74.00</td><td>-10.51</td><td>63.35</td><td>0.14</td><td>Peak</td><td>198</td><td>238</td></tr><tr><td>7</td><td>10460.00</td><td>54.87</td><td>68.20</td><td>-13.33</td><td>46.33</td><td>8.54</td><td>Peak</td><td>100</td><td>25</td></tr><tr><td>8</td><td>15690.00</td><td>41.02</td><td>54.00</td><td>-12.98</td><td>36.16</td><td>4.86</td><td>Average</td><td>100</td><td>28</td></tr><tr><td>9</td><td>15690.00</td><td>55.05</td><td>74.00</td><td>-18.95</td><td>50.19</td><td>4.86</td><td>Peak</td><td>100</td><td>28</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	53.57	54.00	-0.43	52.92	0.65	Average	198	238	2	5150.00	71.06	74.00	-2.94	70.41	0.65	Peak	198	238	3 *	5230.00	104.53			104.14	0.39	Average	198	238	4 *	5230.00	118.14			117.75	0.39	Peak	198	238	5	5350.00	46.03	54.00	-7.97	45.89	0.14	Average	198	238	6	5350.00	63.49	74.00	-10.51	63.35	0.14	Peak	198	238	7	10460.00	54.87	68.20	-13.33	46.33	8.54	Peak	100	25	8	15690.00	41.02	54.00	-12.98	36.16	4.86	Average	100	28	9	15690.00	55.05	74.00	-18.95	50.19	4.86	Peak	100	28
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5150.00	53.57	54.00	-0.43	52.92	0.65	Average	198	238																																																																																														
2	5150.00	71.06	74.00	-2.94	70.41	0.65	Peak	198	238																																																																																														
3 *	5230.00	104.53			104.14	0.39	Average	198	238																																																																																														
4 *	5230.00	118.14			117.75	0.39	Peak	198	238																																																																																														
5	5350.00	46.03	54.00	-7.97	45.89	0.14	Average	198	238																																																																																														
6	5350.00	63.49	74.00	-10.51	63.35	0.14	Peak	198	238																																																																																														
7	10460.00	54.87	68.20	-13.33	46.33	8.54	Peak	100	25																																																																																														
8	15690.00	41.02	54.00	-12.98	36.16	4.86	Average	100	28																																																																																														
9	15690.00	55.05	74.00	-18.95	50.19	4.86	Peak	100	28																																																																																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																							



Modulation	be EHT40	Test Freq. (MHz)	5270						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):25 Humidity(%):61									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	43.12	54.00	-10.88	42.47	0.65	Average	132	112
2	5150.00	56.75	74.00	-17.25	56.10	0.65	Peak	132	112
3 *	5270.00	96.68			96.42	0.26	Average	132	112
4 *	5270.00	110.15			109.89	0.26	Peak	132	112
5	5350.00	44.29	54.00	-9.71	44.15	0.14	Average	132	112
6	5350.00	59.81	74.00	-14.19	59.67	0.14	Peak	132	112
7	10540.00	54.43	68.20	-13.77	46.14	8.29	Peak	100	48
8	15810.00	40.85	54.00	-13.15	36.28	4.57	Average	100	29
9	15810.00	54.66	74.00	-19.34	50.09	4.57	Peak	100	29

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT40	Test Freq. (MHz)	5270
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):25 Humidity(%):61			
Level (dBuV/m) </			



Modulation	be EHT40	Test Freq. (MHz)	5310																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Brad Wu Temperature(°C):25 Humidity(%):61																																																																																																																	
Level (dBuV/m) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 *</td><td>5310.00</td><td>97.81</td><td></td><td></td><td>97.61</td><td>0.20</td><td>Average</td><td>129</td><td>104</td></tr><tr><td>2 *</td><td>5310.00</td><td>111.41</td><td></td><td></td><td>111.21</td><td>0.20</td><td>Peak</td><td>129</td><td>104</td></tr><tr><td>3</td><td>5350.00</td><td>47.05</td><td>54.00</td><td>-6.95</td><td>46.91</td><td>0.14</td><td>Average</td><td>129</td><td>104</td></tr><tr><td>4</td><td>5350.00</td><td>60.56</td><td>74.00</td><td>-13.44</td><td>60.42</td><td>0.14</td><td>Peak</td><td>129</td><td>104</td></tr><tr><td>5</td><td>10620.00</td><td>41.84</td><td>54.00</td><td>-12.16</td><td>33.47</td><td>8.37</td><td>Average</td><td>100</td><td>15</td></tr><tr><td>6</td><td>10620.00</td><td>54.88</td><td>74.00</td><td>-19.12</td><td>46.51</td><td>8.37</td><td>Peak</td><td>100</td><td>15</td></tr><tr><td>7</td><td>15930.00</td><td>42.16</td><td>54.00</td><td>-11.84</td><td>37.51</td><td>4.65</td><td>Average</td><td>100</td><td>42</td></tr><tr><td>8</td><td>15930.00</td><td>55.05</td><td>74.00</td><td>-18.95</td><td>50.40</td><td>4.65</td><td>Peak</td><td>100</td><td>42</td></tr></tbody></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1 *	5310.00	97.81			97.61	0.20	Average	129	104	2 *	5310.00	111.41			111.21	0.20	Peak	129	104	3	5350.00	47.05	54.00	-6.95	46.91	0.14	Average	129	104	4	5350.00	60.56	74.00	-13.44	60.42	0.14	Peak	129	104	5	10620.00	41.84	54.00	-12.16	33.47	8.37	Average	100	15	6	10620.00	54.88	74.00	-19.12	46.51	8.37	Peak	100	15	7	15930.00	42.16	54.00	-11.84	37.51	4.65	Average	100	42	8	15930.00	55.05	74.00	-18.95	50.40	4.65	Peak	100	42
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1 *	5310.00	97.81			97.61	0.20	Average	129	104																																																																																																								
2 *	5310.00	111.41			111.21	0.20	Peak	129	104																																																																																																								
3	5350.00	47.05	54.00	-6.95	46.91	0.14	Average	129	104																																																																																																								
4	5350.00	60.56	74.00	-13.44	60.42	0.14	Peak	129	104																																																																																																								
5	10620.00	41.84	54.00	-12.16	33.47	8.37	Average	100	15																																																																																																								
6	10620.00	54.88	74.00	-19.12	46.51	8.37	Peak	100	15																																																																																																								
7	15930.00	42.16	54.00	-11.84	37.51	4.65	Average	100	42																																																																																																								
8	15930.00	55.05	74.00	-18.95	50.40	4.65	Peak	100	42																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																	



Modulation	be EHT40	Test Freq. (MHz)	5310																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Brad Wu Temperature(°C):25 Humidity(%):61																																																																																																																	
Level (dBuV/m) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1 *</td><td>5310.00</td><td>101.64</td><td></td><td></td><td>101.44</td><td>0.20</td><td>Average</td><td>297</td><td>240</td></tr><tr><td>2 *</td><td>5310.00</td><td>116.08</td><td></td><td></td><td>115.88</td><td>0.20</td><td>Peak</td><td>297</td><td>240</td></tr><tr><td>3</td><td>5350.00</td><td>52.90</td><td>54.00</td><td>-1.10</td><td>52.76</td><td>0.14</td><td>Average</td><td>297</td><td>240</td></tr><tr><td>4</td><td>5350.00</td><td>66.65</td><td>74.00</td><td>-7.35</td><td>66.51</td><td>0.14</td><td>Peak</td><td>297</td><td>240</td></tr><tr><td>5</td><td>10620.00</td><td>41.44</td><td>54.00</td><td>-12.56</td><td>33.07</td><td>8.37</td><td>Average</td><td>100</td><td>22</td></tr><tr><td>6</td><td>10620.00</td><td>54.36</td><td>74.00</td><td>-19.64</td><td>45.99</td><td>8.37</td><td>Peak</td><td>100</td><td>22</td></tr><tr><td>7</td><td>15930.00</td><td>42.24</td><td>54.00</td><td>-11.76</td><td>37.59</td><td>4.65</td><td>Average</td><td>100</td><td>18</td></tr><tr><td>8</td><td>15930.00</td><td>55.13</td><td>74.00</td><td>-18.87</td><td>50.48</td><td>4.65</td><td>Peak</td><td>100</td><td>18</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1 *	5310.00	101.64			101.44	0.20	Average	297	240	2 *	5310.00	116.08			115.88	0.20	Peak	297	240	3	5350.00	52.90	54.00	-1.10	52.76	0.14	Average	297	240	4	5350.00	66.65	74.00	-7.35	66.51	0.14	Peak	297	240	5	10620.00	41.44	54.00	-12.56	33.07	8.37	Average	100	22	6	10620.00	54.36	74.00	-19.64	45.99	8.37	Peak	100	22	7	15930.00	42.24	54.00	-11.76	37.59	4.65	Average	100	18	8	15930.00	55.13	74.00	-18.87	50.48	4.65	Peak	100	18
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1 *	5310.00	101.64			101.44	0.20	Average	297	240																																																																																																								
2 *	5310.00	116.08			115.88	0.20	Peak	297	240																																																																																																								
3	5350.00	52.90	54.00	-1.10	52.76	0.14	Average	297	240																																																																																																								
4	5350.00	66.65	74.00	-7.35	66.51	0.14	Peak	297	240																																																																																																								
5	10620.00	41.44	54.00	-12.56	33.07	8.37	Average	100	22																																																																																																								
6	10620.00	54.36	74.00	-19.64	45.99	8.37	Peak	100	22																																																																																																								
7	15930.00	42.24	54.00	-11.76	37.59	4.65	Average	100	18																																																																																																								
8	15930.00	55.13	74.00	-18.87	50.48	4.65	Peak	100	18																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																	



Modulation	be EHT40	Test Freq. (MHz)	5510																																																																																										
Polarization	Horizontal																																																																																												
Test By :Brad Wu Temperature(°C):25 Humidity(%):61																																																																																													
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5460.00</td><td>46.47</td><td>54.00</td><td>-7.53</td><td>45.97</td><td>0.50</td><td>Average</td><td>142</td><td>115</td></tr><tr><td>2</td><td>5460.00</td><td>60.34</td><td>74.00</td><td>-13.66</td><td>59.84</td><td>0.50</td><td>Peak</td><td>142</td><td>115</td></tr><tr><td>3</td><td>5470.00</td><td>63.80</td><td>68.20</td><td>-4.40</td><td>63.28</td><td>0.52</td><td>Peak</td><td>142</td><td>115</td></tr><tr><td>4 *</td><td>5510.00</td><td>98.43</td><td></td><td></td><td>97.86</td><td>0.57</td><td>Average</td><td>142</td><td>115</td></tr><tr><td>5 *</td><td>5510.00</td><td>112.50</td><td></td><td></td><td>111.93</td><td>0.57</td><td>Peak</td><td>142</td><td>115</td></tr><tr><td>6</td><td>11020.00</td><td>42.44</td><td>54.00</td><td>-11.56</td><td>33.87</td><td>8.57</td><td>Average</td><td>100</td><td>28</td></tr><tr><td>7</td><td>11020.00</td><td>54.21</td><td>74.00</td><td>-19.79</td><td>45.64</td><td>8.57</td><td>Peak</td><td>100</td><td>28</td></tr><tr><td>8</td><td>16530.00</td><td>56.78</td><td>68.20</td><td>-11.42</td><td>50.74</td><td>6.04</td><td>Peak</td><td>100</td><td>15</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	46.47	54.00	-7.53	45.97	0.50	Average	142	115	2	5460.00	60.34	74.00	-13.66	59.84	0.50	Peak	142	115	3	5470.00	63.80	68.20	-4.40	63.28	0.52	Peak	142	115	4 *	5510.00	98.43			97.86	0.57	Average	142	115	5 *	5510.00	112.50			111.93	0.57	Peak	142	115	6	11020.00	42.44	54.00	-11.56	33.87	8.57	Average	100	28	7	11020.00	54.21	74.00	-19.79	45.64	8.57	Peak	100	28	8	16530.00	56.78	68.20	-11.42	50.74	6.04	Peak	100	15
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5460.00	46.47	54.00	-7.53	45.97	0.50	Average	142	115																																																																																				
2	5460.00	60.34	74.00	-13.66	59.84	0.50	Peak	142	115																																																																																				
3	5470.00	63.80	68.20	-4.40	63.28	0.52	Peak	142	115																																																																																				
4 *	5510.00	98.43			97.86	0.57	Average	142	115																																																																																				
5 *	5510.00	112.50			111.93	0.57	Peak	142	115																																																																																				
6	11020.00	42.44	54.00	-11.56	33.87	8.57	Average	100	28																																																																																				
7	11020.00	54.21	74.00	-19.79	45.64	8.57	Peak	100	28																																																																																				
8	16530.00	56.78	68.20	-11.42	50.74	6.04	Peak	100	15																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																													



Modulation	be EHT40	Test Freq. (MHz)	5510
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):25 Humidity(%):61			
Level (dBUV/m)			



Modulation	be EHT40	Test Freq. (MHz)	5590																																																																																																				
Polarization	Horizontal																																																																																																						
Test By :Brad Wu Temperature(°C):25 Humidity(%):61																																																																																																							
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>43.72</td><td>54.00</td><td>-10.28</td><td>43.22</td><td>0.50</td><td>Average</td><td>141</td><td>112</td></tr><tr><td>2</td><td>5460.00</td><td>57.95</td><td>74.00</td><td>-16.05</td><td>57.45</td><td>0.50</td><td>Peak</td><td>141</td><td>112</td></tr><tr><td>3</td><td>5470.00</td><td>58.41</td><td>68.20</td><td>-9.79</td><td>57.89</td><td>0.52</td><td>Peak</td><td>141</td><td>112</td></tr><tr><td>4 *</td><td>5590.00</td><td>97.94</td><td></td><td></td><td>97.41</td><td>0.53</td><td>Average</td><td>141</td><td>112</td></tr><tr><td>5 *</td><td>5590.00</td><td>111.58</td><td></td><td></td><td>111.05</td><td>0.53</td><td>Peak</td><td>141</td><td>112</td></tr><tr><td>6</td><td>5725.00</td><td>59.24</td><td>68.20</td><td>-8.96</td><td>58.29</td><td>0.95</td><td>Peak</td><td>141</td><td>112</td></tr><tr><td>7</td><td>11180.00</td><td>43.29</td><td>54.00</td><td>-10.71</td><td>35.07</td><td>8.22</td><td>Average</td><td>100</td><td>55</td></tr><tr><td>8</td><td>11180.00</td><td>55.38</td><td>74.00</td><td>-18.62</td><td>47.16</td><td>8.22</td><td>Peak</td><td>100</td><td>55</td></tr><tr><td>9</td><td>16770.00</td><td>56.95</td><td>68.20</td><td>-11.25</td><td>50.60</td><td>6.35</td><td>Peak</td><td>100</td><td>27</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	43.72	54.00	-10.28	43.22	0.50	Average	141	112	2	5460.00	57.95	74.00	-16.05	57.45	0.50	Peak	141	112	3	5470.00	58.41	68.20	-9.79	57.89	0.52	Peak	141	112	4 *	5590.00	97.94			97.41	0.53	Average	141	112	5 *	5590.00	111.58			111.05	0.53	Peak	141	112	6	5725.00	59.24	68.20	-8.96	58.29	0.95	Peak	141	112	7	11180.00	43.29	54.00	-10.71	35.07	8.22	Average	100	55	8	11180.00	55.38	74.00	-18.62	47.16	8.22	Peak	100	55	9	16770.00	56.95	68.20	-11.25	50.60	6.35	Peak	100	27
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5460.00	43.72	54.00	-10.28	43.22	0.50	Average	141	112																																																																																														
2	5460.00	57.95	74.00	-16.05	57.45	0.50	Peak	141	112																																																																																														
3	5470.00	58.41	68.20	-9.79	57.89	0.52	Peak	141	112																																																																																														
4 *	5590.00	97.94			97.41	0.53	Average	141	112																																																																																														
5 *	5590.00	111.58			111.05	0.53	Peak	141	112																																																																																														
6	5725.00	59.24	68.20	-8.96	58.29	0.95	Peak	141	112																																																																																														
7	11180.00	43.29	54.00	-10.71	35.07	8.22	Average	100	55																																																																																														
8	11180.00	55.38	74.00	-18.62	47.16	8.22	Peak	100	55																																																																																														
9	16770.00	56.95	68.20	-11.25	50.60	6.35	Peak	100	27																																																																																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																							



Modulation	be EHT40	Test Freq. (MHz)	5590
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):25 Humidity(%):61			
Level (dBuV/m) </			




Modulation	be EHT40	Test Freq. (MHz)	5670																																																																																										
Polarization	Horizontal																																																																																												
Test By :Brad Wu Temperature(°C):25 Humidity(%):61																																																																																													
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBUV/m</th><th></th><th></th><th>dBUV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 *</td><td>5670.00</td><td>97.41</td><td></td><td></td><td>96.65</td><td>0.76</td><td>Average</td><td>139</td><td>116</td></tr><tr><td>2 *</td><td>5670.00</td><td>111.21</td><td></td><td></td><td>110.45</td><td>0.76</td><td>Peak</td><td>139</td><td>116</td></tr><tr><td>3</td><td>5725.00</td><td>62.68</td><td>68.20</td><td>-5.52</td><td>61.73</td><td>0.95</td><td>Peak</td><td>139</td><td>116</td></tr><tr><td>4</td><td>11340.00</td><td>42.25</td><td>54.00</td><td>-11.75</td><td>34.11</td><td>8.14</td><td>Average</td><td>100</td><td>52</td></tr><tr><td>5</td><td>11340.00</td><td>55.14</td><td>74.00</td><td>-18.86</td><td>47.00</td><td>8.14</td><td>Peak</td><td>100</td><td>52</td></tr><tr><td>6</td><td>17010.00</td><td>57.53</td><td>68.20</td><td>-10.67</td><td>51.60</td><td>5.93</td><td>Peak</td><td>100</td><td>36</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBUV			cm	deg	1 *	5670.00	97.41			96.65	0.76	Average	139	116	2 *	5670.00	111.21			110.45	0.76	Peak	139	116	3	5725.00	62.68	68.20	-5.52	61.73	0.95	Peak	139	116	4	11340.00	42.25	54.00	-11.75	34.11	8.14	Average	100	52	5	11340.00	55.14	74.00	-18.86	47.00	8.14	Peak	100	52	6	17010.00	57.53	68.20	-10.67	51.60	5.93	Peak	100	36
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																																																																				
		dBUV/m			dBUV			cm	deg																																																																																				
1 *	5670.00	97.41			96.65	0.76	Average	139	116																																																																																				
2 *	5670.00	111.21			110.45	0.76	Peak	139	116																																																																																				
3	5725.00	62.68	68.20	-5.52	61.73	0.95	Peak	139	116																																																																																				
4	11340.00	42.25	54.00	-11.75	34.11	8.14	Average	100	52																																																																																				
5	11340.00	55.14	74.00	-18.86	47.00	8.14	Peak	100	52																																																																																				
6	17010.00	57.53	68.20	-10.67	51.60	5.93	Peak	100	36																																																																																				



Modulation	be EHT40	Test Freq. (MHz)	5670
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):25 Humidity(%):61			
Level (dBUV/m)			

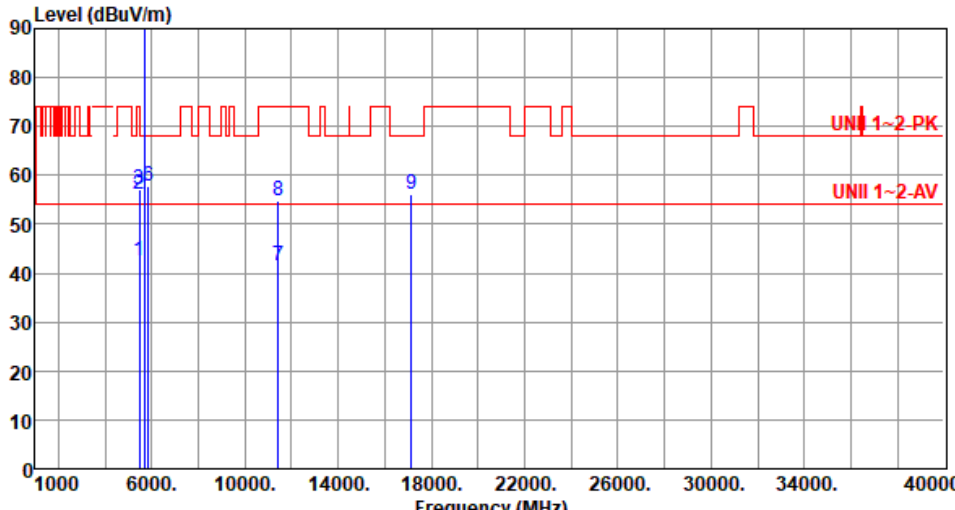

Modulation	be EHT40	Test Freq. (MHz)	5710						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):25 Humidity(%):61									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	42.52	54.00	-11.48	42.02	0.50	Average	143	116
2	5460.00	56.08	74.00	-17.92	55.58	0.50	Peak	143	116
3	5470.00	57.06	68.20	-11.14	56.54	0.52	Peak	143	116
4 *	5710.00	97.93			97.02	0.91	Average	143	116
5 *	5710.00	111.40			110.49	0.91	Peak	143	116
6	5850.00	57.67	68.20	-10.53	56.59	1.08	Peak	143	116
7	11420.00	41.63	54.00	-12.37	33.53	8.10	Average	100	25
8	11420.00	54.66	74.00	-19.34	46.56	8.10	Peak	100	25
9	17130.00	56.18	68.20	-12.02	50.60	5.58	Peak	100	19

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency




Modulation	be EHT40	Test Freq. (MHz)	5710
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):25 Humidity(%):61			
Level (dBUV/m)			

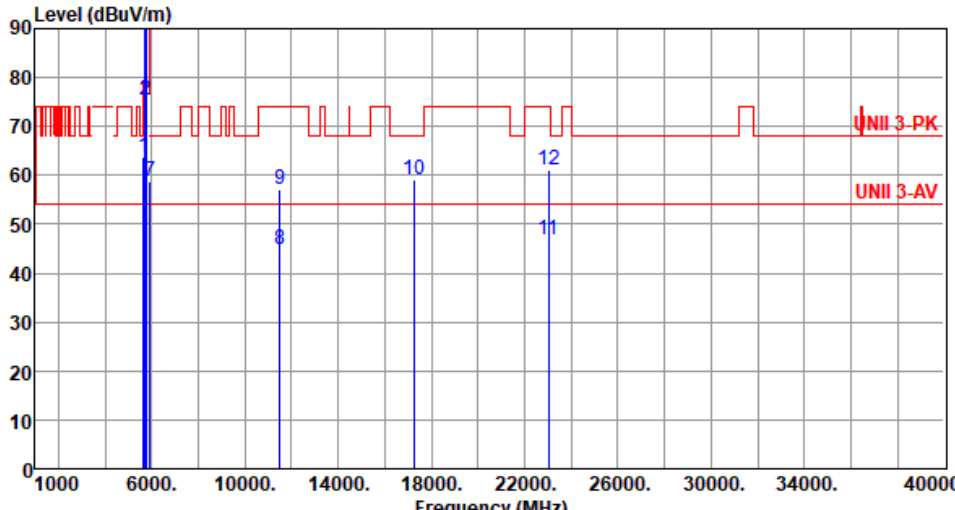

Modulation	be EHT40	Test Freq. (MHz)	5755						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):25 Humidity(%):61									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	63.84	68.20	-4.36	63.18	0.66	Peak	138	114
2	5700.00	75.45	105.20	-29.75	74.55	0.90	Peak	138	114
3	5720.00	92.21	110.80	-18.59	91.27	0.94	Peak	138	114
4	5725.00	92.41	122.20	-29.79	91.46	0.95	Peak	138	114
5 *	5755.00	104.13			103.11	1.02	Average	138	114
6 *	5755.00	118.43			117.41	1.02	Peak	138	114
7	5925.00	58.76	68.20	-9.44	57.32	1.44	Peak	138	114
8	11510.00	44.79	54.00	-9.21	36.33	8.46	Average	100	116
9	11510.00	57.16	74.00	-16.84	48.70	8.46	Peak	100	116
10	17265.00	59.04	68.20	-9.16	53.58	5.46	Peak	100	248
11	23020.00	46.68	54.00	-7.32	39.78	6.90	Average	125	79
12	23020.00	61.05	74.00	-12.95	54.15	6.90	Peak	125	79

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

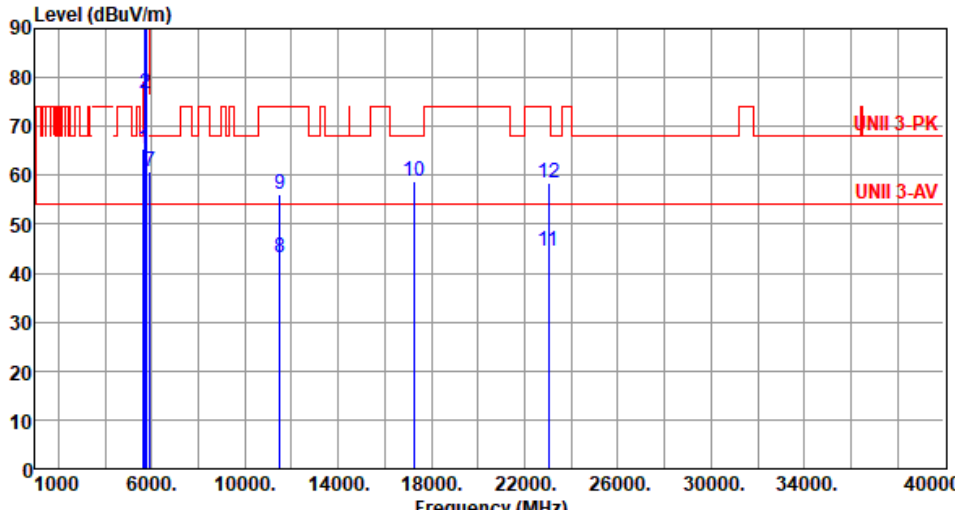


Modulation	be EHT40	Test Freq. (MHz)	5755																														
Polarization	Vertical																																
Test By :Brad Wu Temperature(°C):25 Humidity(%):61																																	
																																	
	<table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></table>		Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg		
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																								
		dBuV/m			dBuV			cm	deg																								
1	5650.00	65.47	68.20	-2.73	64.81	0.66	Peak	236	259																								
2	5700.00	76.68	105.20	-28.52	75.78	0.90	Peak	236	259																								
3	5720.00	94.81	110.80	-15.99	93.87	0.94	Peak	236	259																								
4	5725.00	96.25	122.20	-25.95	95.30	0.95	Peak	236	259																								
5 *	5755.00	107.61			106.59	1.02	Average	236	259																								
6 *	5755.00	122.16			121.14	1.02	Peak	236	259																								
7	5925.00	60.84	68.20	-7.36	59.40	1.44	Peak	236	259																								
8	11510.00	43.12	54.00	-10.88	34.66	8.46	Average	100	262																								
9	11510.00	56.14	74.00	-17.86	47.68	8.46	Peak	100	262																								
10	17265.00	58.72	68.20	-9.48	53.26	5.46	Peak	100	126																								
11	23020.00	44.62	54.00	-9.38	37.72	6.90	Average	275	134																								
12	23020.00	58.41	74.00	-15.59	51.51	6.90	Peak	275	134																								

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT40	Test Freq. (MHz)	5795
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):25 Humidity(%):61			
Level (dBuV/m) <			

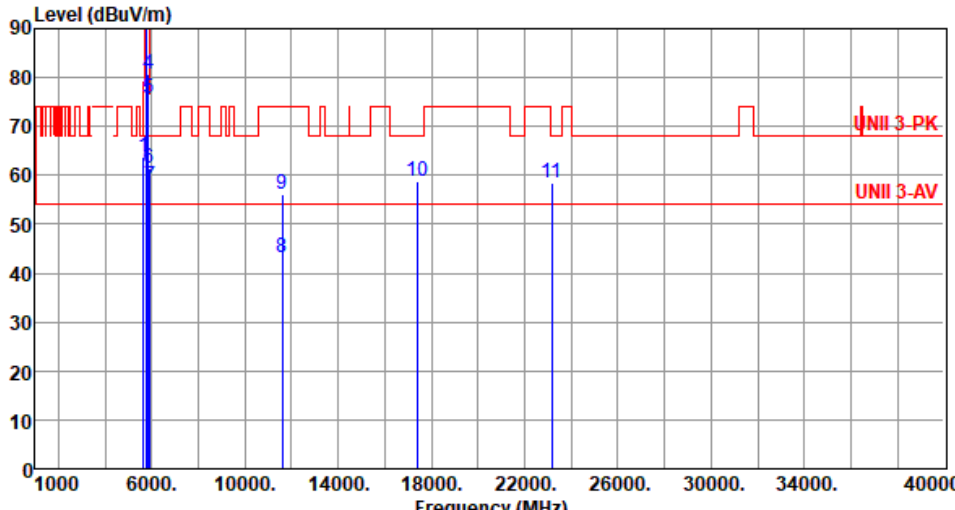


Modulation	be EHT40	Test Freq. (MHz)	5795																																																																																																																									
Polarization	Vertical																																																																																																																											
Test By :Brad Wu Temperature(°C):25 Humidity(%):61																																																																																																																												
																																																																																																																												
	<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5650.00</td><td>63.82</td><td>68.20</td><td>-4.38</td><td>63.16</td><td>0.66</td><td>Peak</td><td>238</td><td>259</td></tr><tr><td>2 *</td><td>5795.00</td><td>107.40</td><td></td><td></td><td>106.36</td><td>1.04</td><td>Average</td><td>238</td><td>259</td></tr><tr><td>3 *</td><td>5795.00</td><td>121.36</td><td></td><td></td><td>120.32</td><td>1.04</td><td>Peak</td><td>238</td><td>259</td></tr><tr><td>4</td><td>5850.00</td><td>80.86</td><td>122.20</td><td>-41.34</td><td>79.78</td><td>1.08</td><td>Peak</td><td>238</td><td>259</td></tr><tr><td>5</td><td>5855.00</td><td>75.78</td><td>110.80</td><td>-35.02</td><td>74.66</td><td>1.12</td><td>Peak</td><td>238</td><td>259</td></tr><tr><td>6</td><td>5875.00</td><td>61.46</td><td>105.20</td><td>-43.74</td><td>60.21</td><td>1.25</td><td>Peak</td><td>238</td><td>259</td></tr><tr><td>7</td><td>5925.00</td><td>57.92</td><td>68.20</td><td>-10.28</td><td>56.48</td><td>1.44</td><td>Peak</td><td>238</td><td>259</td></tr><tr><td>8</td><td>11590.00</td><td>43.14</td><td>54.00</td><td>-10.86</td><td>34.97</td><td>8.17</td><td>Average</td><td>100</td><td>277</td></tr><tr><td>9</td><td>11590.00</td><td>56.12</td><td>74.00</td><td>-17.88</td><td>47.95</td><td>8.17</td><td>Peak</td><td>100</td><td>277</td></tr><tr><td>10</td><td>17385.00</td><td>58.84</td><td>68.20</td><td>-9.36</td><td>52.83</td><td>6.01</td><td>Peak</td><td>100</td><td>114</td></tr><tr><td>11</td><td>23180.00</td><td>58.29</td><td>68.20</td><td>-9.91</td><td>51.14</td><td>7.15</td><td>Peak</td><td>264</td><td>122</td></tr></table>		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	63.82	68.20	-4.38	63.16	0.66	Peak	238	259	2 *	5795.00	107.40			106.36	1.04	Average	238	259	3 *	5795.00	121.36			120.32	1.04	Peak	238	259	4	5850.00	80.86	122.20	-41.34	79.78	1.08	Peak	238	259	5	5855.00	75.78	110.80	-35.02	74.66	1.12	Peak	238	259	6	5875.00	61.46	105.20	-43.74	60.21	1.25	Peak	238	259	7	5925.00	57.92	68.20	-10.28	56.48	1.44	Peak	238	259	8	11590.00	43.14	54.00	-10.86	34.97	8.17	Average	100	277	9	11590.00	56.12	74.00	-17.88	47.95	8.17	Peak	100	277	10	17385.00	58.84	68.20	-9.36	52.83	6.01	Peak	100	114	11	23180.00	58.29	68.20	-9.91	51.14	7.15	Peak	264	122			
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																			
1	5650.00	63.82	68.20	-4.38	63.16	0.66	Peak	238	259																																																																																																																			
2 *	5795.00	107.40			106.36	1.04	Average	238	259																																																																																																																			
3 *	5795.00	121.36			120.32	1.04	Peak	238	259																																																																																																																			
4	5850.00	80.86	122.20	-41.34	79.78	1.08	Peak	238	259																																																																																																																			
5	5855.00	75.78	110.80	-35.02	74.66	1.12	Peak	238	259																																																																																																																			
6	5875.00	61.46	105.20	-43.74	60.21	1.25	Peak	238	259																																																																																																																			
7	5925.00	57.92	68.20	-10.28	56.48	1.44	Peak	238	259																																																																																																																			
8	11590.00	43.14	54.00	-10.86	34.97	8.17	Average	100	277																																																																																																																			
9	11590.00	56.12	74.00	-17.88	47.95	8.17	Peak	100	277																																																																																																																			
10	17385.00	58.84	68.20	-9.36	52.83	6.01	Peak	100	114																																																																																																																			
11	23180.00	58.29	68.20	-9.91	51.14	7.15	Peak	264	122																																																																																																																			
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency																																																																																																																												

Unwanted Emissions (Above 1GHz) for be EHT80

Modulation	be EHT80	Test Freq. (MHz)	5210
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):25 Humidity(%):61			
Level (dBUV/m)			

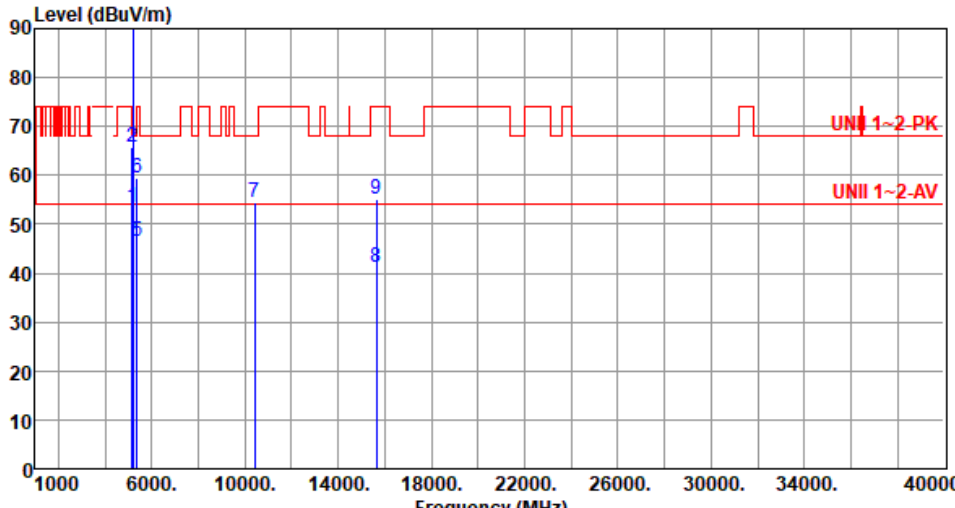


Modulation	be EHT80	Test Freq. (MHz)	5210																																																																																																				
Polarization	Vertical																																																																																																						
Test By :Brad Wu Temperature(°C):25 Humidity(%):61																																																																																																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>53.56</td><td>54.00</td><td>-0.44</td><td>52.91</td><td>0.65</td><td>Average</td><td>206</td><td>239</td></tr><tr><td>2</td><td>5150.00</td><td>65.81</td><td>74.00</td><td>-8.19</td><td>65.16</td><td>0.65</td><td>Peak</td><td>206</td><td>239</td></tr><tr><td>3 *</td><td>5210.00</td><td>98.60</td><td></td><td></td><td>98.10</td><td>0.50</td><td>Average</td><td>193</td><td>242</td></tr><tr><td>4 *</td><td>5210.00</td><td>112.06</td><td></td><td></td><td>111.56</td><td>0.50</td><td>Peak</td><td>193</td><td>242</td></tr><tr><td>5</td><td>5350.00</td><td>46.43</td><td>54.00</td><td>-7.57</td><td>46.29</td><td>0.14</td><td>Average</td><td>193</td><td>242</td></tr><tr><td>6</td><td>5350.00</td><td>59.59</td><td>74.00</td><td>-14.41</td><td>59.45</td><td>0.14</td><td>Peak</td><td>193</td><td>242</td></tr><tr><td>7</td><td>10420.00</td><td>54.32</td><td>68.20</td><td>-13.88</td><td>45.82</td><td>8.50</td><td>Peak</td><td>100</td><td>44</td></tr><tr><td>8</td><td>15630.00</td><td>41.09</td><td>54.00</td><td>-12.91</td><td>36.43</td><td>4.66</td><td>Average</td><td>100</td><td>29</td></tr><tr><td>9</td><td>15630.00</td><td>55.28</td><td>74.00</td><td>-18.72</td><td>50.62</td><td>4.66</td><td>Peak</td><td>100</td><td>29</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	53.56	54.00	-0.44	52.91	0.65	Average	206	239	2	5150.00	65.81	74.00	-8.19	65.16	0.65	Peak	206	239	3 *	5210.00	98.60			98.10	0.50	Average	193	242	4 *	5210.00	112.06			111.56	0.50	Peak	193	242	5	5350.00	46.43	54.00	-7.57	46.29	0.14	Average	193	242	6	5350.00	59.59	74.00	-14.41	59.45	0.14	Peak	193	242	7	10420.00	54.32	68.20	-13.88	45.82	8.50	Peak	100	44	8	15630.00	41.09	54.00	-12.91	36.43	4.66	Average	100	29	9	15630.00	55.28	74.00	-18.72	50.62	4.66	Peak	100	29
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5150.00	53.56	54.00	-0.44	52.91	0.65	Average	206	239																																																																																														
2	5150.00	65.81	74.00	-8.19	65.16	0.65	Peak	206	239																																																																																														
3 *	5210.00	98.60			98.10	0.50	Average	193	242																																																																																														
4 *	5210.00	112.06			111.56	0.50	Peak	193	242																																																																																														
5	5350.00	46.43	54.00	-7.57	46.29	0.14	Average	193	242																																																																																														
6	5350.00	59.59	74.00	-14.41	59.45	0.14	Peak	193	242																																																																																														
7	10420.00	54.32	68.20	-13.88	45.82	8.50	Peak	100	44																																																																																														
8	15630.00	41.09	54.00	-12.91	36.43	4.66	Average	100	29																																																																																														
9	15630.00	55.28	74.00	-18.72	50.62	4.66	Peak	100	29																																																																																														



Modulation	be EHT80	Test Freq. (MHz)	5290																																																																																																				
Polarization	Horizontal																																																																																																						
Test By :Brad Wu Temperature(°C):25 Humidity(%):61																																																																																																							
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>43.88</td><td>54.00</td><td>-10.12</td><td>43.23</td><td>0.65</td><td>Average</td><td>128</td><td>106</td></tr><tr><td>2</td><td>5150.00</td><td>56.93</td><td>74.00</td><td>-17.07</td><td>56.28</td><td>0.65</td><td>Peak</td><td>128</td><td>106</td></tr><tr><td>3 *</td><td>5290.00</td><td>93.64</td><td></td><td></td><td>93.42</td><td>0.22</td><td>Average</td><td>128</td><td>106</td></tr><tr><td>4 *</td><td>5290.00</td><td>106.68</td><td></td><td></td><td>106.46</td><td>0.22</td><td>Peak</td><td>128</td><td>106</td></tr><tr><td>5</td><td>5350.00</td><td>48.94</td><td>54.00</td><td>-5.06</td><td>48.80</td><td>0.14</td><td>Average</td><td>128</td><td>106</td></tr><tr><td>6</td><td>5350.00</td><td>62.23</td><td>74.00</td><td>-11.77</td><td>62.09</td><td>0.14</td><td>Peak</td><td>128</td><td>106</td></tr><tr><td>7</td><td>10580.00</td><td>54.43</td><td>68.20</td><td>-13.77</td><td>46.14</td><td>8.29</td><td>Peak</td><td>100</td><td>51</td></tr><tr><td>8</td><td>15870.00</td><td>40.86</td><td>54.00</td><td>-13.14</td><td>36.25</td><td>4.61</td><td>Average</td><td>100</td><td>13</td></tr><tr><td>9</td><td>15870.00</td><td>54.81</td><td>74.00</td><td>-19.19</td><td>50.20</td><td>4.61</td><td>Peak</td><td>100</td><td>13</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	43.88	54.00	-10.12	43.23	0.65	Average	128	106	2	5150.00	56.93	74.00	-17.07	56.28	0.65	Peak	128	106	3 *	5290.00	93.64			93.42	0.22	Average	128	106	4 *	5290.00	106.68			106.46	0.22	Peak	128	106	5	5350.00	48.94	54.00	-5.06	48.80	0.14	Average	128	106	6	5350.00	62.23	74.00	-11.77	62.09	0.14	Peak	128	106	7	10580.00	54.43	68.20	-13.77	46.14	8.29	Peak	100	51	8	15870.00	40.86	54.00	-13.14	36.25	4.61	Average	100	13	9	15870.00	54.81	74.00	-19.19	50.20	4.61	Peak	100	13
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5150.00	43.88	54.00	-10.12	43.23	0.65	Average	128	106																																																																																														
2	5150.00	56.93	74.00	-17.07	56.28	0.65	Peak	128	106																																																																																														
3 *	5290.00	93.64			93.42	0.22	Average	128	106																																																																																														
4 *	5290.00	106.68			106.46	0.22	Peak	128	106																																																																																														
5	5350.00	48.94	54.00	-5.06	48.80	0.14	Average	128	106																																																																																														
6	5350.00	62.23	74.00	-11.77	62.09	0.14	Peak	128	106																																																																																														
7	10580.00	54.43	68.20	-13.77	46.14	8.29	Peak	100	51																																																																																														
8	15870.00	40.86	54.00	-13.14	36.25	4.61	Average	100	13																																																																																														
9	15870.00	54.81	74.00	-19.19	50.20	4.61	Peak	100	13																																																																																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																							

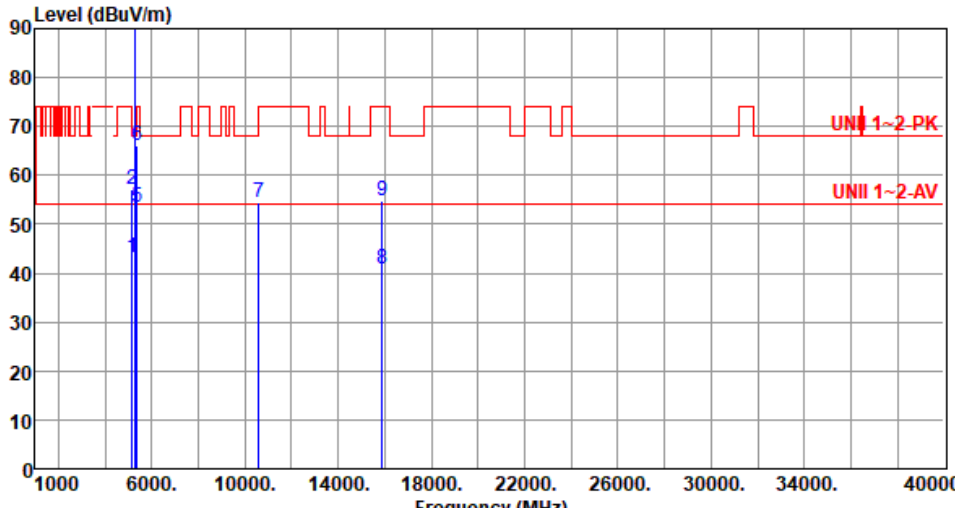

Modulation	be EHT80	Test Freq. (MHz)	5290																																																																																																				
Polarization	Vertical																																																																																																						
Test By :Brad Wu Temperature(°C):25 Humidity(%):61																																																																																																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>43.19</td><td>54.00</td><td>-10.81</td><td>42.54</td><td>0.65</td><td>Average</td><td>100</td><td>271</td></tr><tr><td>2</td><td>5150.00</td><td>57.04</td><td>74.00</td><td>-16.96</td><td>56.39</td><td>0.65</td><td>Peak</td><td>100</td><td>271</td></tr><tr><td>3 *</td><td>5290.00</td><td>97.78</td><td></td><td></td><td>97.56</td><td>0.22</td><td>Average</td><td>100</td><td>271</td></tr><tr><td>4 *</td><td>5290.00</td><td>111.22</td><td></td><td></td><td>111.00</td><td>0.22</td><td>Peak</td><td>100</td><td>271</td></tr><tr><td>5</td><td>5350.00</td><td>53.59</td><td>54.00</td><td>-0.41</td><td>53.45</td><td>0.14</td><td>Average</td><td>100</td><td>271</td></tr><tr><td>6</td><td>5350.00</td><td>66.06</td><td>74.00</td><td>-7.94</td><td>65.92</td><td>0.14</td><td>Peak</td><td>100</td><td>271</td></tr><tr><td>7</td><td>10580.00</td><td>54.55</td><td>68.20</td><td>-13.65</td><td>46.26</td><td>8.29</td><td>Peak</td><td>100</td><td>53</td></tr><tr><td>8</td><td>15870.00</td><td>40.88</td><td>54.00</td><td>-13.12</td><td>36.27</td><td>4.61</td><td>Average</td><td>100</td><td>39</td></tr><tr><td>9</td><td>15870.00</td><td>54.86</td><td>74.00</td><td>-19.14</td><td>50.25</td><td>4.61</td><td>Peak</td><td>100</td><td>39</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	43.19	54.00	-10.81	42.54	0.65	Average	100	271	2	5150.00	57.04	74.00	-16.96	56.39	0.65	Peak	100	271	3 *	5290.00	97.78			97.56	0.22	Average	100	271	4 *	5290.00	111.22			111.00	0.22	Peak	100	271	5	5350.00	53.59	54.00	-0.41	53.45	0.14	Average	100	271	6	5350.00	66.06	74.00	-7.94	65.92	0.14	Peak	100	271	7	10580.00	54.55	68.20	-13.65	46.26	8.29	Peak	100	53	8	15870.00	40.88	54.00	-13.12	36.27	4.61	Average	100	39	9	15870.00	54.86	74.00	-19.14	50.25	4.61	Peak	100	39
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5150.00	43.19	54.00	-10.81	42.54	0.65	Average	100	271																																																																																														
2	5150.00	57.04	74.00	-16.96	56.39	0.65	Peak	100	271																																																																																														
3 *	5290.00	97.78			97.56	0.22	Average	100	271																																																																																														
4 *	5290.00	111.22			111.00	0.22	Peak	100	271																																																																																														
5	5350.00	53.59	54.00	-0.41	53.45	0.14	Average	100	271																																																																																														
6	5350.00	66.06	74.00	-7.94	65.92	0.14	Peak	100	271																																																																																														
7	10580.00	54.55	68.20	-13.65	46.26	8.29	Peak	100	53																																																																																														
8	15870.00	40.88	54.00	-13.12	36.27	4.61	Average	100	39																																																																																														
9	15870.00	54.86	74.00	-19.14	50.25	4.61	Peak	100	39																																																																																														



Modulation	be EHT80	Test Freq. (MHz)	5530
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):25 Humidity(%):61			
Level (dBuV/m)			



Modulation	be EHT80	Test Freq. (MHz)	5530
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):25 Humidity(%):61			
Level (dBUV/m)			



Modulation	be EHT80	Test Freq. (MHz)	5610
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):25 Humidity(%):61			
Level (dBUV/m) </			



Modulation	be EHT80	Test Freq. (MHz)	5610						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):25 Humidity(%):61									
Level (dBuV/m) Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1 *	5610.00	99.22			98.65	0.57	Average	243	258
2 *	5610.00	112.40			111.83	0.57	Peak	243	258
3	5725.00	68.09	68.20	-0.11	67.14	0.95	Peak	243	258
4	11220.00	42.74	54.00	-11.26	34.60	8.14	Average	100	39
5	11220.00	55.08	74.00	-18.92	46.94	8.14	Peak	100	39
6	16830.00	56.52	68.20	-11.68	50.13	6.39	Peak	100	39

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency




Modulation	be EHT80	Test Freq. (MHz)	5690																																																																																																				
Polarization	Horizontal																																																																																																						
Test By :Brad Wu Temperature(°C):25 Humidity(%):61																																																																																																							
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5460.00</td><td>43.68</td><td>54.00</td><td>-10.32</td><td>43.18</td><td>0.50</td><td>Average</td><td>233</td><td>136</td></tr><tr><td>2</td><td>5460.00</td><td>57.22</td><td>74.00</td><td>-16.78</td><td>56.72</td><td>0.50</td><td>Peak</td><td>233</td><td>136</td></tr><tr><td>3</td><td>5470.00</td><td>58.05</td><td>68.20</td><td>-10.15</td><td>57.53</td><td>0.52</td><td>Peak</td><td>233</td><td>136</td></tr><tr><td>4 *</td><td>5690.00</td><td>94.68</td><td></td><td></td><td>93.83</td><td>0.85</td><td>Average</td><td>233</td><td>136</td></tr><tr><td>5 *</td><td>5690.00</td><td>108.49</td><td></td><td></td><td>107.64</td><td>0.85</td><td>Peak</td><td>233</td><td>136</td></tr><tr><td>6</td><td>5850.00</td><td>59.49</td><td>68.20</td><td>-8.71</td><td>58.41</td><td>1.08</td><td>Peak</td><td>233</td><td>136</td></tr><tr><td>7</td><td>11380.00</td><td>41.64</td><td>54.00</td><td>-12.36</td><td>33.54</td><td>8.10</td><td>Average</td><td>100</td><td>13</td></tr><tr><td>8</td><td>11380.00</td><td>54.65</td><td>74.00</td><td>-19.35</td><td>46.55</td><td>8.10</td><td>Peak</td><td>100</td><td>13</td></tr><tr><td>9</td><td>17070.00</td><td>56.14</td><td>68.20</td><td>-12.06</td><td>50.18</td><td>5.96</td><td>Peak</td><td>100</td><td>19</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	43.68	54.00	-10.32	43.18	0.50	Average	233	136	2	5460.00	57.22	74.00	-16.78	56.72	0.50	Peak	233	136	3	5470.00	58.05	68.20	-10.15	57.53	0.52	Peak	233	136	4 *	5690.00	94.68			93.83	0.85	Average	233	136	5 *	5690.00	108.49			107.64	0.85	Peak	233	136	6	5850.00	59.49	68.20	-8.71	58.41	1.08	Peak	233	136	7	11380.00	41.64	54.00	-12.36	33.54	8.10	Average	100	13	8	11380.00	54.65	74.00	-19.35	46.55	8.10	Peak	100	13	9	17070.00	56.14	68.20	-12.06	50.18	5.96	Peak	100	19
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5460.00	43.68	54.00	-10.32	43.18	0.50	Average	233	136																																																																																														
2	5460.00	57.22	74.00	-16.78	56.72	0.50	Peak	233	136																																																																																														
3	5470.00	58.05	68.20	-10.15	57.53	0.52	Peak	233	136																																																																																														
4 *	5690.00	94.68			93.83	0.85	Average	233	136																																																																																														
5 *	5690.00	108.49			107.64	0.85	Peak	233	136																																																																																														
6	5850.00	59.49	68.20	-8.71	58.41	1.08	Peak	233	136																																																																																														
7	11380.00	41.64	54.00	-12.36	33.54	8.10	Average	100	13																																																																																														
8	11380.00	54.65	74.00	-19.35	46.55	8.10	Peak	100	13																																																																																														
9	17070.00	56.14	68.20	-12.06	50.18	5.96	Peak	100	19																																																																																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																							




Modulation	be EHT80	Test Freq. (MHz)	5690																																																																																																				
Polarization	Vertical																																																																																																						
Test By :Brad Wu Temperature(°C):25 Humidity(%):61																																																																																																							
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5460.00</td><td>44.81</td><td>54.00</td><td>-9.19</td><td>44.31</td><td>0.50</td><td>Average</td><td>235</td><td>257</td></tr><tr><td>2</td><td>5460.00</td><td>58.34</td><td>74.00</td><td>-15.66</td><td>57.84</td><td>0.50</td><td>Peak</td><td>235</td><td>257</td></tr><tr><td>3</td><td>5470.00</td><td>59.26</td><td>68.20</td><td>-8.94</td><td>58.74</td><td>0.52</td><td>Peak</td><td>235</td><td>257</td></tr><tr><td>4 *</td><td>5690.00</td><td>100.14</td><td></td><td></td><td>99.29</td><td>0.85</td><td>Average</td><td>235</td><td>257</td></tr><tr><td>5 *</td><td>5690.00</td><td>114.54</td><td></td><td></td><td>113.69</td><td>0.85</td><td>Peak</td><td>235</td><td>257</td></tr><tr><td>6</td><td>5850.00</td><td>63.50</td><td>68.20</td><td>-4.70</td><td>62.42</td><td>1.08</td><td>Peak</td><td>235</td><td>257</td></tr><tr><td>7</td><td>11380.00</td><td>41.72</td><td>54.00</td><td>-12.28</td><td>33.62</td><td>8.10</td><td>Average</td><td>100</td><td>27</td></tr><tr><td>8</td><td>11380.00</td><td>54.69</td><td>74.00</td><td>-19.31</td><td>46.59</td><td>8.10</td><td>Peak</td><td>100</td><td>27</td></tr><tr><td>9</td><td>17070.00</td><td>56.05</td><td>68.20</td><td>-12.15</td><td>50.09</td><td>5.96</td><td>Peak</td><td>100</td><td>36</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	44.81	54.00	-9.19	44.31	0.50	Average	235	257	2	5460.00	58.34	74.00	-15.66	57.84	0.50	Peak	235	257	3	5470.00	59.26	68.20	-8.94	58.74	0.52	Peak	235	257	4 *	5690.00	100.14			99.29	0.85	Average	235	257	5 *	5690.00	114.54			113.69	0.85	Peak	235	257	6	5850.00	63.50	68.20	-4.70	62.42	1.08	Peak	235	257	7	11380.00	41.72	54.00	-12.28	33.62	8.10	Average	100	27	8	11380.00	54.69	74.00	-19.31	46.59	8.10	Peak	100	27	9	17070.00	56.05	68.20	-12.15	50.09	5.96	Peak	100	36
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5460.00	44.81	54.00	-9.19	44.31	0.50	Average	235	257																																																																																														
2	5460.00	58.34	74.00	-15.66	57.84	0.50	Peak	235	257																																																																																														
3	5470.00	59.26	68.20	-8.94	58.74	0.52	Peak	235	257																																																																																														
4 *	5690.00	100.14			99.29	0.85	Average	235	257																																																																																														
5 *	5690.00	114.54			113.69	0.85	Peak	235	257																																																																																														
6	5850.00	63.50	68.20	-4.70	62.42	1.08	Peak	235	257																																																																																														
7	11380.00	41.72	54.00	-12.28	33.62	8.10	Average	100	27																																																																																														
8	11380.00	54.69	74.00	-19.31	46.59	8.10	Peak	100	27																																																																																														
9	17070.00	56.05	68.20	-12.15	50.09	5.96	Peak	100	36																																																																																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																							

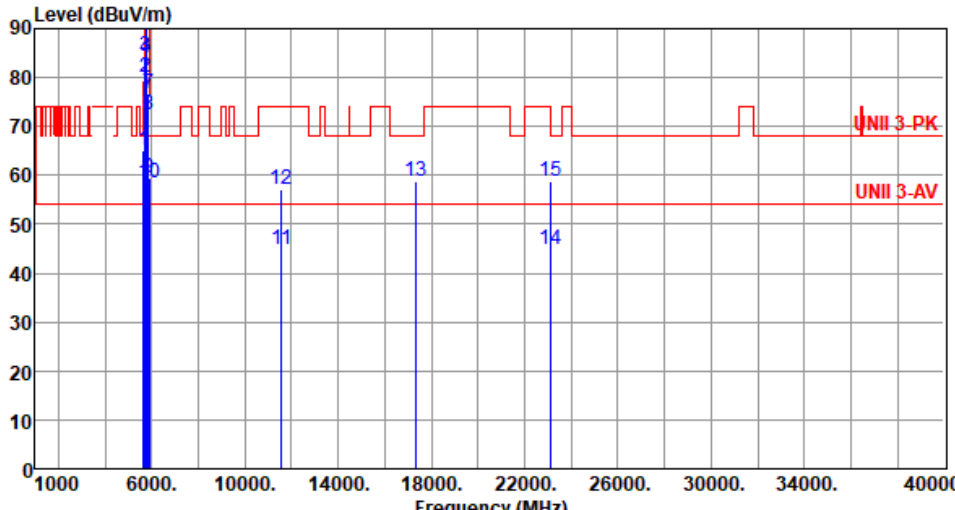

Modulation	be EHT80	Test Freq. (MHz)	5775						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):25 Humidity(%):61									
									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table
					dBuV			cm	deg
1	5650.00	65.22	68.20	-2.98	64.56	0.66	Peak	169	116
2	5700.00	79.94	105.20	-25.26	79.04	0.90	Peak	169	116
3	5720.00	84.19	110.80	-26.61	83.25	0.94	Peak	169	116
4	5725.00	83.94	122.20	-38.26	82.99	0.95	Peak	169	116
5 *	5775.00	97.93			96.90	1.03	Average	169	116
6 *	5775.00	111.42			110.39	1.03	Peak	169	116
7	5850.00	76.60	122.20	-45.60	75.52	1.08	Peak	169	116
8	5855.00	72.35	110.80	-38.45	71.23	1.12	Peak	169	116
9	5875.00	59.51	105.20	-45.69	58.26	1.25	Peak	169	116
10	5925.00	58.52	68.20	-9.68	57.08	1.44	Peak	169	116
11	11550.00	44.86	54.00	-9.14	36.38	8.48	Average	100	114
12	11550.00	57.21	74.00	-16.79	48.73	8.48	Peak	100	114
13	17325.00	58.94	68.20	-9.26	53.27	5.67	Peak	100	261
14	23100.00	44.85	54.00	-9.15	37.87	6.98	Average	125	88
15	23100.00	58.82	74.00	-15.18	51.84	6.98	Peak	125	88


Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

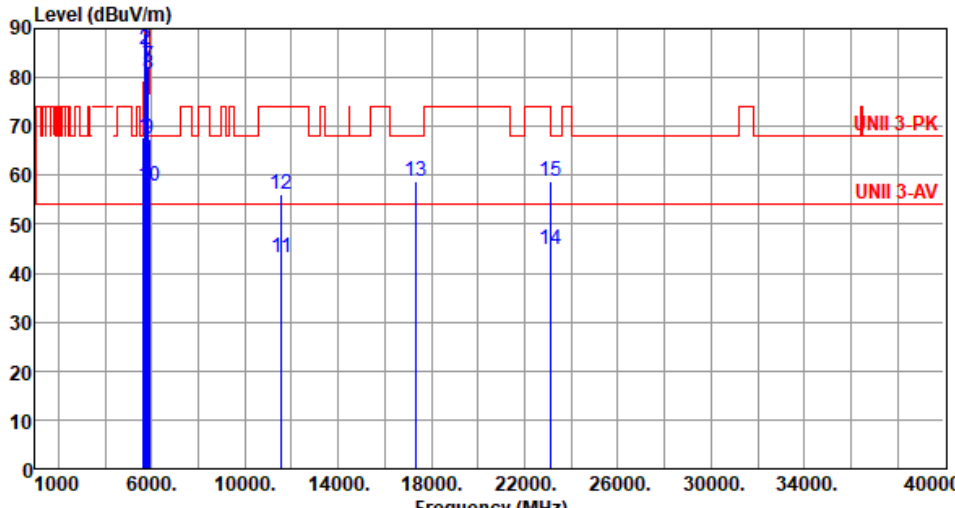

Modulation	be EHT80	Test Freq. (MHz)	5775						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):25 Humidity(%):61									
									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5650.00	67.91	68.20	-0.29	67.25	0.66	Peak	219	258
2	5700.00	85.59	105.20	-19.61	84.69	0.90	Peak	219	258
3	5720.00	88.36	110.80	-22.44	87.42	0.94	Peak	219	258
4	5725.00	89.16	122.20	-33.04	88.21	0.95	Peak	219	258
5 *	5775.00	102.32			101.29	1.03	Average	219	248
6 *	5775.00	116.14			115.11	1.03	Peak	219	248
7	5850.00	82.52	122.20	-39.68	81.44	1.08	Peak	219	258
8	5855.00	80.86	110.80	-29.94	79.74	1.12	Peak	219	258
9	5875.00	67.35	105.20	-37.85	66.10	1.25	Peak	219	258
10	5925.00	57.89	68.20	-10.31	56.45	1.44	Peak	219	258
11	11550.00	43.12	54.00	-10.88	34.64	8.48	Average	100	279
12	11550.00	56.14	74.00	-17.86	47.66	8.48	Peak	100	279
13	17325.00	58.76	68.20	-9.44	53.09	5.67	Peak	100	124
14	23100.00	44.76	54.00	-9.24	37.78	6.98	Average	275	125
15	23100.00	58.67	74.00	-15.33	51.69	6.98	Peak	275	125

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

Unwanted Emissions (Above 1GHz) for be EHT160

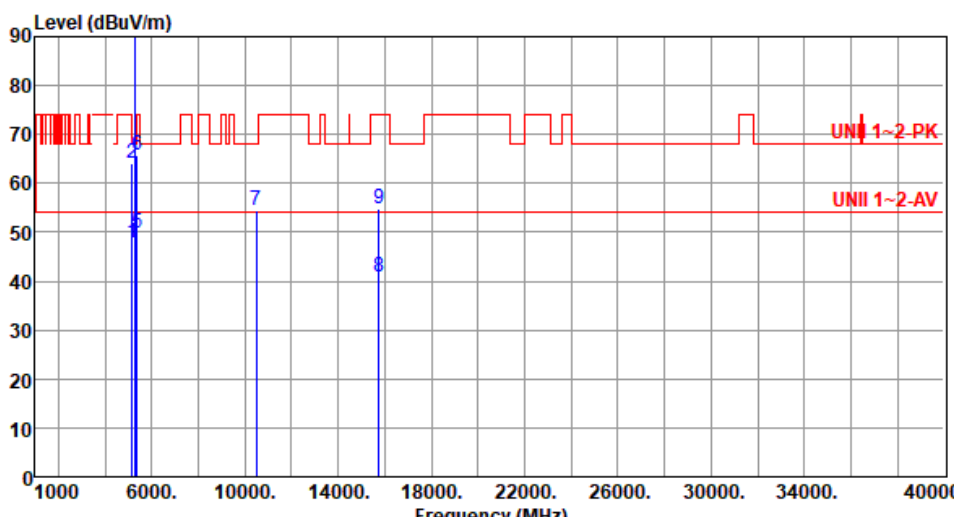Modulation	be EHT160	Test Freq. (MHz)	5250																																																																																																				
Polarization	Horizontal																																																																																																						
Test By :Sean Yu Temperature(°C):25 Humidity(%):61																																																																																																							
Level (dBUV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>47.88</td><td>54.00</td><td>-6.12</td><td>47.23</td><td>0.65</td><td>Average</td><td>132</td><td>211</td></tr><tr><td>2</td><td>5150.00</td><td>64.12</td><td>74.00</td><td>-9.88</td><td>63.47</td><td>0.65</td><td>Peak</td><td>132</td><td>211</td></tr><tr><td>3 *</td><td>5250.00</td><td>92.46</td><td></td><td></td><td>92.18</td><td>0.28</td><td>Average</td><td>132</td><td>211</td></tr><tr><td>4 *</td><td>5250.00</td><td>105.33</td><td></td><td></td><td>105.05</td><td>0.28</td><td>Peak</td><td>132</td><td>211</td></tr><tr><td>5</td><td>5350.00</td><td>49.65</td><td>54.00</td><td>-4.35</td><td>49.51</td><td>0.14</td><td>Average</td><td>132</td><td>211</td></tr><tr><td>6</td><td>5350.00</td><td>65.76</td><td>74.00</td><td>-8.24</td><td>65.62</td><td>0.14</td><td>Peak</td><td>132</td><td>211</td></tr><tr><td>7</td><td>10500.00</td><td>54.41</td><td>68.20</td><td>-13.79</td><td>45.95</td><td>8.46</td><td>Peak</td><td>100</td><td>36</td></tr><tr><td>8</td><td>15750.00</td><td>40.78</td><td>54.00</td><td>-13.22</td><td>35.78</td><td>5.00</td><td>Average</td><td>100</td><td>33</td></tr><tr><td>9</td><td>15750.00</td><td>54.72</td><td>74.00</td><td>-19.28</td><td>49.72</td><td>5.00</td><td>Peak</td><td>100</td><td>33</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	47.88	54.00	-6.12	47.23	0.65	Average	132	211	2	5150.00	64.12	74.00	-9.88	63.47	0.65	Peak	132	211	3 *	5250.00	92.46			92.18	0.28	Average	132	211	4 *	5250.00	105.33			105.05	0.28	Peak	132	211	5	5350.00	49.65	54.00	-4.35	49.51	0.14	Average	132	211	6	5350.00	65.76	74.00	-8.24	65.62	0.14	Peak	132	211	7	10500.00	54.41	68.20	-13.79	45.95	8.46	Peak	100	36	8	15750.00	40.78	54.00	-13.22	35.78	5.00	Average	100	33	9	15750.00	54.72	74.00	-19.28	49.72	5.00	Peak	100	33
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5150.00	47.88	54.00	-6.12	47.23	0.65	Average	132	211																																																																																														
2	5150.00	64.12	74.00	-9.88	63.47	0.65	Peak	132	211																																																																																														
3 *	5250.00	92.46			92.18	0.28	Average	132	211																																																																																														
4 *	5250.00	105.33			105.05	0.28	Peak	132	211																																																																																														
5	5350.00	49.65	54.00	-4.35	49.51	0.14	Average	132	211																																																																																														
6	5350.00	65.76	74.00	-8.24	65.62	0.14	Peak	132	211																																																																																														
7	10500.00	54.41	68.20	-13.79	45.95	8.46	Peak	100	36																																																																																														
8	15750.00	40.78	54.00	-13.22	35.78	5.00	Average	100	33																																																																																														
9	15750.00	54.72	74.00	-19.28	49.72	5.00	Peak	100	33																																																																																														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																							



Modulation	be EHT160	Test Freq. (MHz)	5250																																																																																																				
Polarization	Vertical																																																																																																						
Test By :Sean Yu Temperature(°C):25 Humidity(%):61																																																																																																							
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>49.78</td><td>54.00</td><td>-4.22</td><td>49.13</td><td>0.65</td><td>Average</td><td>323</td><td>225</td></tr><tr><td>2</td><td>5150.00</td><td>64.94</td><td>74.00</td><td>-9.06</td><td>64.29</td><td>0.65</td><td>Peak</td><td>323</td><td>225</td></tr><tr><td>3 *</td><td>5250.00</td><td>95.76</td><td></td><td></td><td>95.48</td><td>0.28</td><td>Average</td><td>146</td><td>256</td></tr><tr><td>4 *</td><td>5250.00</td><td>108.77</td><td></td><td></td><td>108.49</td><td>0.28</td><td>Peak</td><td>146</td><td>256</td></tr><tr><td>5</td><td>5350.00</td><td>53.85</td><td>54.00</td><td>-0.15</td><td>53.71</td><td>0.14</td><td>Average</td><td>146</td><td>256</td></tr><tr><td>6</td><td>5350.00</td><td>69.05</td><td>74.00</td><td>-4.95</td><td>68.91</td><td>0.14</td><td>Peak</td><td>146</td><td>256</td></tr><tr><td>7</td><td>10500.00</td><td>54.38</td><td>68.20</td><td>-13.82</td><td>45.92</td><td>8.46</td><td>Peak</td><td>100</td><td>24</td></tr><tr><td>8</td><td>15750.00</td><td>40.79</td><td>54.00</td><td>-13.21</td><td>35.79</td><td>5.00</td><td>Average</td><td>100</td><td>31</td></tr><tr><td>9</td><td>15750.00</td><td>54.81</td><td>74.00</td><td>-19.19</td><td>49.81</td><td>5.00</td><td>Peak</td><td>100</td><td>31</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	49.78	54.00	-4.22	49.13	0.65	Average	323	225	2	5150.00	64.94	74.00	-9.06	64.29	0.65	Peak	323	225	3 *	5250.00	95.76			95.48	0.28	Average	146	256	4 *	5250.00	108.77			108.49	0.28	Peak	146	256	5	5350.00	53.85	54.00	-0.15	53.71	0.14	Average	146	256	6	5350.00	69.05	74.00	-4.95	68.91	0.14	Peak	146	256	7	10500.00	54.38	68.20	-13.82	45.92	8.46	Peak	100	24	8	15750.00	40.79	54.00	-13.21	35.79	5.00	Average	100	31	9	15750.00	54.81	74.00	-19.19	49.81	5.00	Peak	100	31
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5150.00	49.78	54.00	-4.22	49.13	0.65	Average	323	225																																																																																														
2	5150.00	64.94	74.00	-9.06	64.29	0.65	Peak	323	225																																																																																														
3 *	5250.00	95.76			95.48	0.28	Average	146	256																																																																																														
4 *	5250.00	108.77			108.49	0.28	Peak	146	256																																																																																														
5	5350.00	53.85	54.00	-0.15	53.71	0.14	Average	146	256																																																																																														
6	5350.00	69.05	74.00	-4.95	68.91	0.14	Peak	146	256																																																																																														
7	10500.00	54.38	68.20	-13.82	45.92	8.46	Peak	100	24																																																																																														
8	15750.00	40.79	54.00	-13.21	35.79	5.00	Average	100	31																																																																																														
9	15750.00	54.81	74.00	-19.19	49.81	5.00	Peak	100	31																																																																																														



Modulation	be EHT160	Test Freq. (MHz)	5570
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):25 Humidity(%):61			
Level (dBUV/m)			



Modulation	be EHT160	Test Freq. (MHz)	5570
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):25 Humidity(%):61			
Level (dBUV/m) </			



Frequency: 5300 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°C Vmax	-6.11	-5.74	-5.88	-5.70
T20°C Vmin	-5.91	-5.48	-6.34	-5.76
T40°C Vnom	-9.32	-9.01	-9.18	-8.81
T30°C Vnom	-7.32	-7.24	-6.84	-6.70
T20°C Vnom	-6.02	-5.65	-5.75	-6.03
T10°C Vnom	-2.79	-2.11	-2.22	-2.15
T0°C Vnom	2.81	3.27	2.85	3.38
Vnom [V]: 120	Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20	Tmax [°C]: 40		Tmin [°C]: 0	

Frequency: 5785 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°C Vmax	-5.60	-5.58	-5.74	-5.65
T20°C Vmin	-5.41	-5.16	-5.41	-4.95
T40°C Vnom	-8.54	-8.22	-8.40	-7.90
T30°C Vnom	-6.71	-6.01	-5.88	-6.92
T20°C Vnom	-5.51	-4.83	-5.24	-5.04
T10°C Vnom	-2.56	-3.05	-1.95	-2.20
T0°C Vnom	2.58	2.53	2.72	2.59
Vnom [V]: 120	Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20	Tmax [°C]: 40		Tmin [°C]: 0	




Modulation Mode	be EHT20	Test Freq. (MHz)	5240
Power Phase	Line		

Test by : Joe Liao

Temperature: 23°C

Humidity: 63%

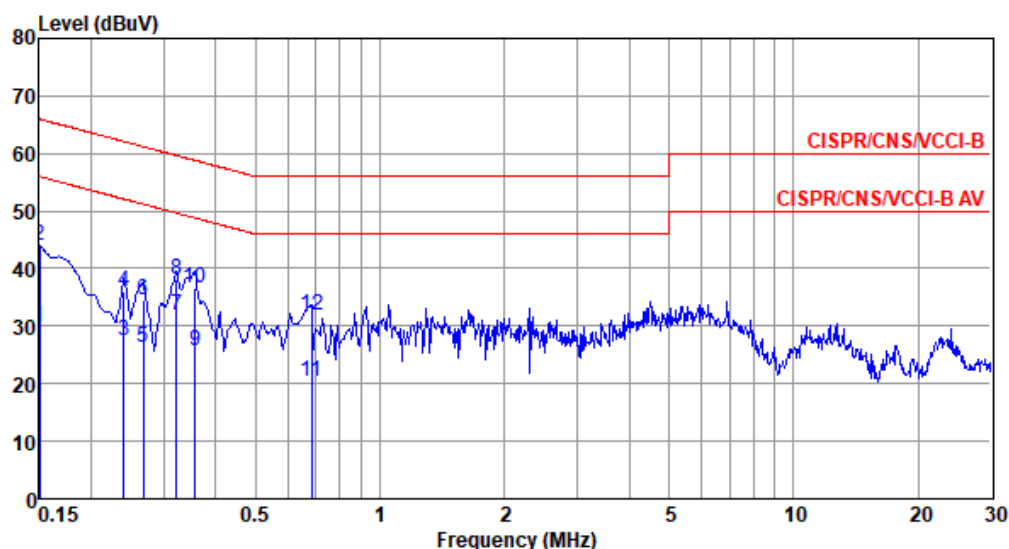

	Freq	Level	Limit	Over	Read	Factor	Cable	Aux	Remark
	MHz	dBuV	dBuV	dB	Level	dB	loss	dB	
1	0.150	29.72	56.00	-26.28	19.81	9.63	0.08	0.20	Average
2	0.150	44.10	66.00	-21.90	34.19	9.63	0.08	0.20	QP
3	0.240	27.48	52.08	-24.60	17.52	9.62	0.07	0.27	Average
4	0.240	36.12	62.08	-25.96	26.16	9.62	0.07	0.27	QP
5	0.267	26.28	51.20	-24.92	16.31	9.62	0.07	0.28	Average
6	0.267	34.64	61.20	-26.56	24.67	9.62	0.07	0.28	QP
7*	0.322	31.82	49.66	-17.84	21.83	9.62	0.07	0.30	Average
8	0.322	38.00	59.66	-21.66	28.01	9.62	0.07	0.30	QP
9	0.358	25.64	48.78	-23.14	15.62	9.62	0.08	0.32	Average
10	0.358	36.64	58.78	-22.14	26.62	9.62	0.08	0.32	QP
11	0.683	20.22	46.00	-25.78	10.15	9.63	0.09	0.35	Average
12	0.683	31.98	56.00	-24.02	21.91	9.63	0.09	0.35	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).




Modulation Mode	be EHT20	Test Freq. (MHz)	5240
Power Phase	Neutral		

Test by : Joe Liao

Temperature: 23°C

Humidity: 63%

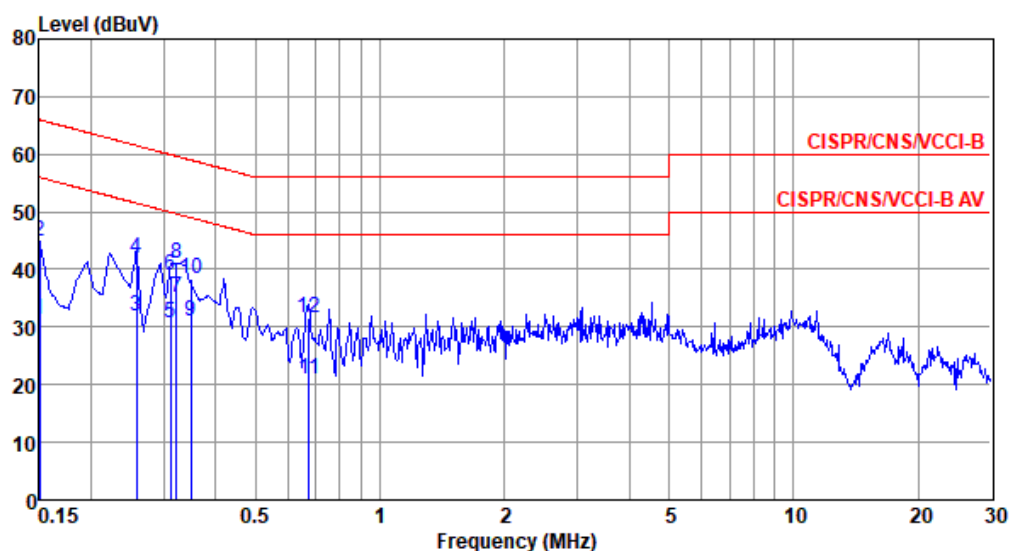

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.150	31.15	56.00	-24.85	21.32	9.63	0.08	0.12	Average
2	0.150	44.72	66.00	-21.28	34.89	9.63	0.08	0.12	QP
3	0.258	31.87	51.51	-19.64	21.97	9.63	0.07	0.20	Average
4	0.258	41.91	61.51	-19.60	32.01	9.63	0.07	0.20	QP
5	0.312	30.60	49.93	-19.33	20.69	9.62	0.07	0.22	Average
6	0.312	38.85	59.93	-21.08	28.94	9.62	0.07	0.22	QP
7*	0.322	35.02	49.66	-14.64	25.11	9.62	0.07	0.22	Average
8	0.322	41.14	59.66	-18.52	31.23	9.62	0.07	0.22	QP
9	0.348	31.07	49.00	-17.93	21.14	9.62	0.08	0.23	Average
10	0.348	38.48	59.00	-20.52	28.55	9.62	0.08	0.23	QP
11	0.672	20.88	46.00	-25.12	10.88	9.63	0.09	0.28	Average
12	0.672	31.49	56.00	-24.51	21.49	9.63	0.09	0.28	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).




Modulation Mode	be EHT20	Test Freq. (MHz)	5825
Power Phase	Line		

Test by : Joe Liao

Temperature: 23°C

Humidity: 63%

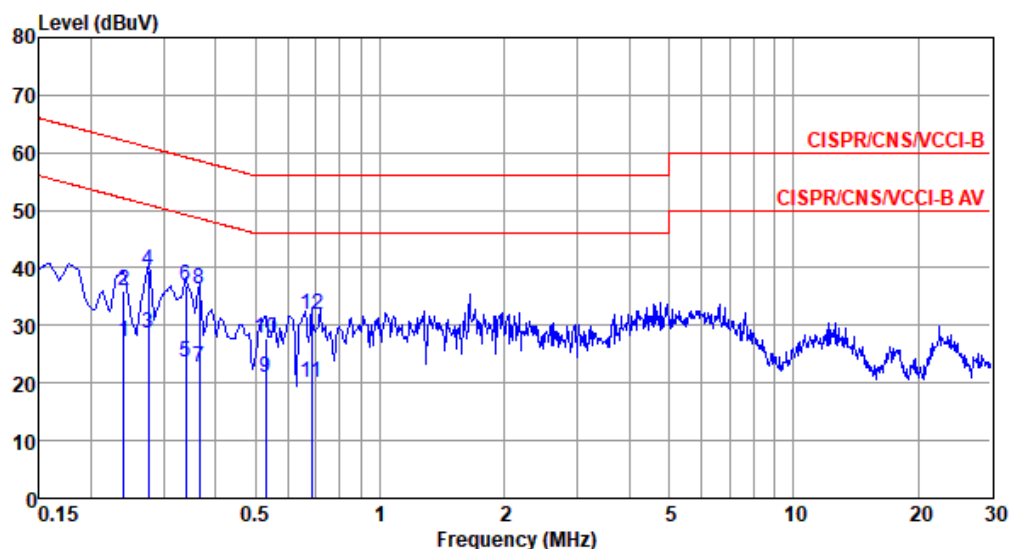

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.240	27.19	52.08	-24.89	17.23	9.62	0.07	0.27	Average
2	0.240	35.92	62.08	-26.16	25.96	9.62	0.07	0.27	QP
3	0.276	28.58	50.94	-22.36	18.60	9.62	0.07	0.29	Average
4*	0.276	39.68	60.94	-21.26	29.70	9.62	0.07	0.29	QP
5	0.339	23.53	49.22	-25.69	13.52	9.62	0.08	0.31	Average
6	0.339	37.00	59.22	-22.22	26.99	9.62	0.08	0.31	QP
7	0.365	22.66	48.61	-25.95	12.64	9.62	0.08	0.32	Average
8	0.365	36.35	58.61	-22.26	26.33	9.62	0.08	0.32	QP
9	0.529	20.96	46.00	-25.04	10.92	9.62	0.08	0.34	Average
10	0.529	27.86	56.00	-28.14	17.82	9.62	0.08	0.34	QP
11	0.683	20.15	46.00	-25.85	10.08	9.63	0.09	0.35	Average
12	0.683	32.03	56.00	-23.97	21.96	9.63	0.09	0.35	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).




Modulation Mode	be EHT20	Test Freq. (MHz)	5825
Power Phase	Neutral		

Test by : Joe Liao

Temperature: 23°C

Humidity: 63%

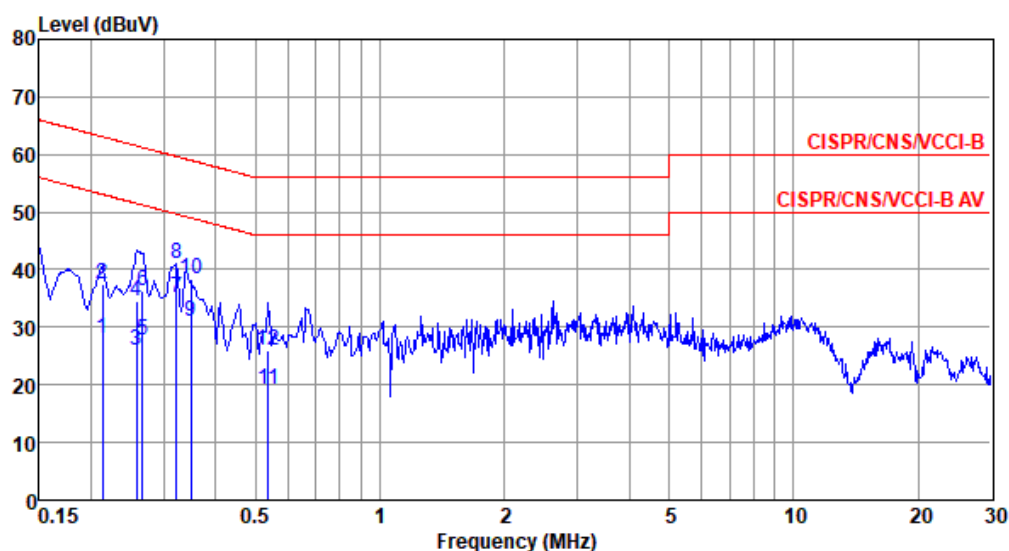

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.213	27.93	53.10	-25.17	18.06	9.63	0.06	0.18	Average
2	0.213	37.36	63.10	-25.74	27.49	9.63	0.06	0.18	QP
3	0.258	25.99	51.51	-25.52	16.09	9.63	0.07	0.20	Average
4	0.258	34.54	61.51	-26.97	24.64	9.63	0.07	0.20	QP
5	0.266	27.67	51.25	-23.58	17.77	9.63	0.07	0.20	Average
6	0.266	36.32	61.25	-24.93	26.42	9.63	0.07	0.20	QP
7*	0.322	35.08	49.66	-14.58	25.17	9.62	0.07	0.22	Average
8	0.322	41.16	59.66	-18.50	31.25	9.62	0.07	0.22	QP
9	0.348	30.89	49.00	-18.11	20.96	9.62	0.08	0.23	Average
10	0.348	38.51	59.00	-20.49	28.58	9.62	0.08	0.23	QP
11	0.538	19.26	46.00	-26.74	9.29	9.62	0.08	0.27	Average
12	0.538	25.90	56.00	-30.10	15.93	9.62	0.08	0.27	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).