

SAR Test Report No.:


SAR_HANDH_004_05002_FCC_850_1900_D9500rev1

Date of Report: 12/16/2005

Appendix A Plots

Page 1 of 18

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/7/2005 9:42:17 AM	DUT Battery Model/No:	
Filename:	lefttch190_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	HHP D9500 MC46	Relative Permittivity:	41.96
Relative Humidity:	50%	Conductivity:	0.890
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-2.67 mm
DUT Position:	left touch	Max SAR Z-axis Location:	-96.67 mm
Antenna Configuration:	Integral	Max E Field:	22.00 V/m
Test Frequency:	836MHz	SAR 1g:	0.371 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.237 W/kg
Conversion Factors:	.510 / .510 / .510	SAR Start:	0.159 W/kg
Type of Modulation:		SAR End:	0.160 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.03 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	11/18/2005
Input Power Level:	max	Extrapolation:	poly4

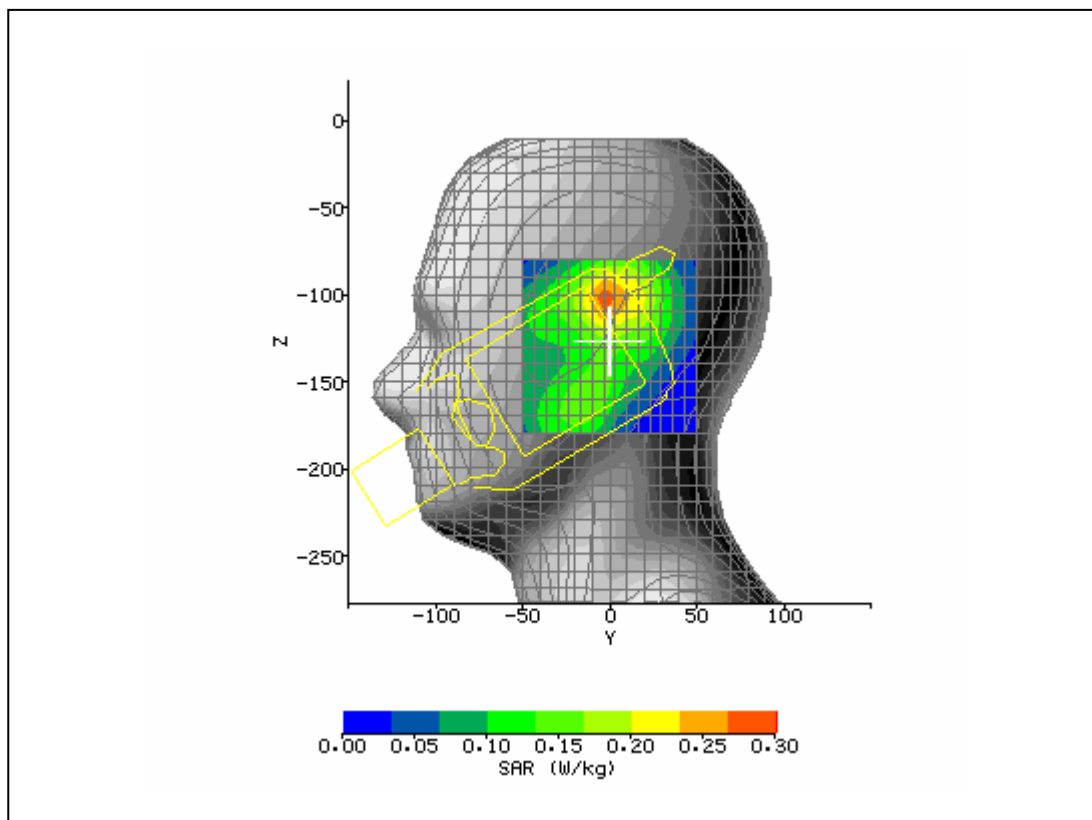

SAR Test Report No.:


SAR_HANDH_004_05002_FCC_850_1900_D9500rev1

Date of Report: 12/16/2005

Appendix A Plots

Page 2 of 18

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/8/2005 7:46:00 AM	DUT Battery Model/No:	
Filename:	lefttl190_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	HHP D9500 MC46	Relative Permittivity:	41.96
Relative Humidity:	50%	Conductivity:	0.890
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-2.00 mm
DUT Position:	Left tilt	Max SAR Z-axis Location:	-95.67 mm
Antenna Configuration:	Integral	Max E Field:	26.70 V/m
Test Frequency:	836MHz	SAR 1g:	0.547 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.347 W/kg
Conversion Factors:	.510 / .510 / .510	SAR Start:	0.236 W/kg
Type of Modulation:		SAR End:	0.234 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.03 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	11/18/2005
Input Power Level:	max	Extrapolation:	poly4

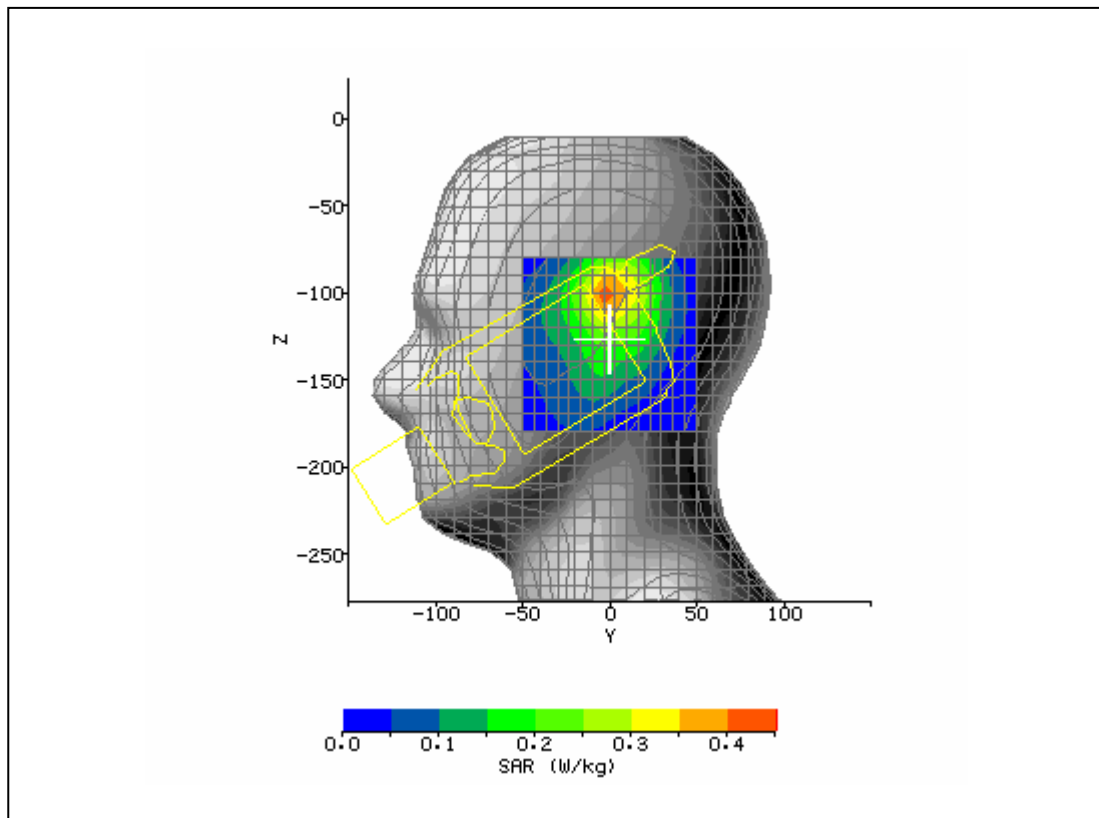

SAR Test Report No.:


SAR_HANDH_004_05002_FCC_850_1900_D9500rev1

Date of Report: 12/16/2005

Appendix A Plots

Page 3 of 18

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/7/2005 8:21:48 AM	DUT Battery Model/No:	
Filename:	righttch190_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	HHP D9500 MC46	Relative Permittivity:	41.96
Relative Humidity:	50%	Conductivity:	0.890
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	10.00 mm
DUT Position:	right touch	Max SAR Z-axis Location:	-108.00 mm
Antenna Configuration:	Integral	Max E Field:	20.13 V/m
Test Frequency:	836MHz	SAR 1g:	0.314 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.215 W/kg
Conversion Factors:	.510 / .510 / .510	SAR Start:	0.165 W/kg
Type of Modulation:		SAR End:	0.164 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.03 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	11/18/2005
Input Power Level:	max	Extrapolation:	poly4

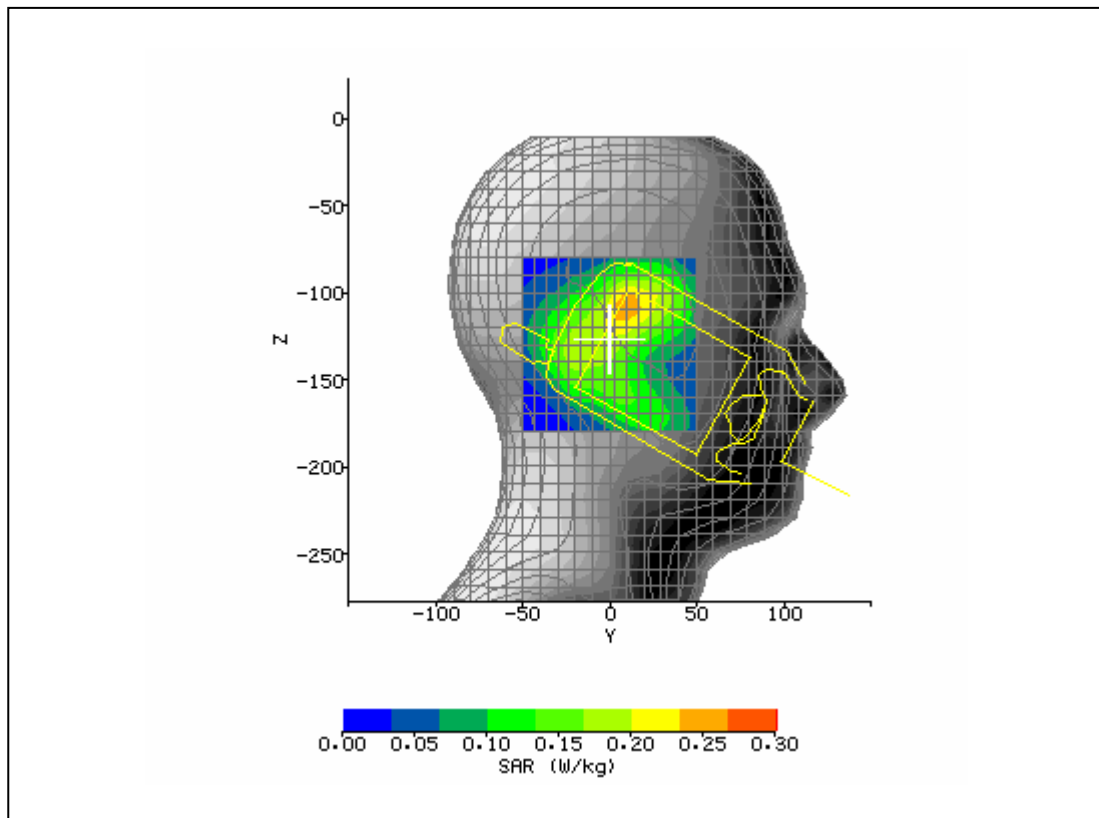

SAR Test Report No.:


SAR_HANDH_004_05002_FCC_850_1900_D9500rev1

Date of Report: 12/16/2005

Appendix A Plots

Page 4 of 18

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/7/2005 8:53:26 AM	DUT Battery Model/No:	
Filename:	righttl190_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	HHP D9500 MC46	Relative Permittivity:	41.96
Relative Humidity:	50%	Conductivity:	0.890
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	4.00 mm
DUT Position:	right tilt	Max SAR Z-axis Location:	-108.67 mm
Antenna Configuration:	Integral	Max E Field:	21.28 V/m
Test Frequency:	836MHz	SAR 1g:	0.352 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.249 W/kg
Conversion Factors:	.510 / .510 / .510	SAR Start:	0.190 W/kg
Type of Modulation:		SAR End:	0.189 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.02 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	11/18/2005
Input Power Level:	max	Extrapolation:	poly4

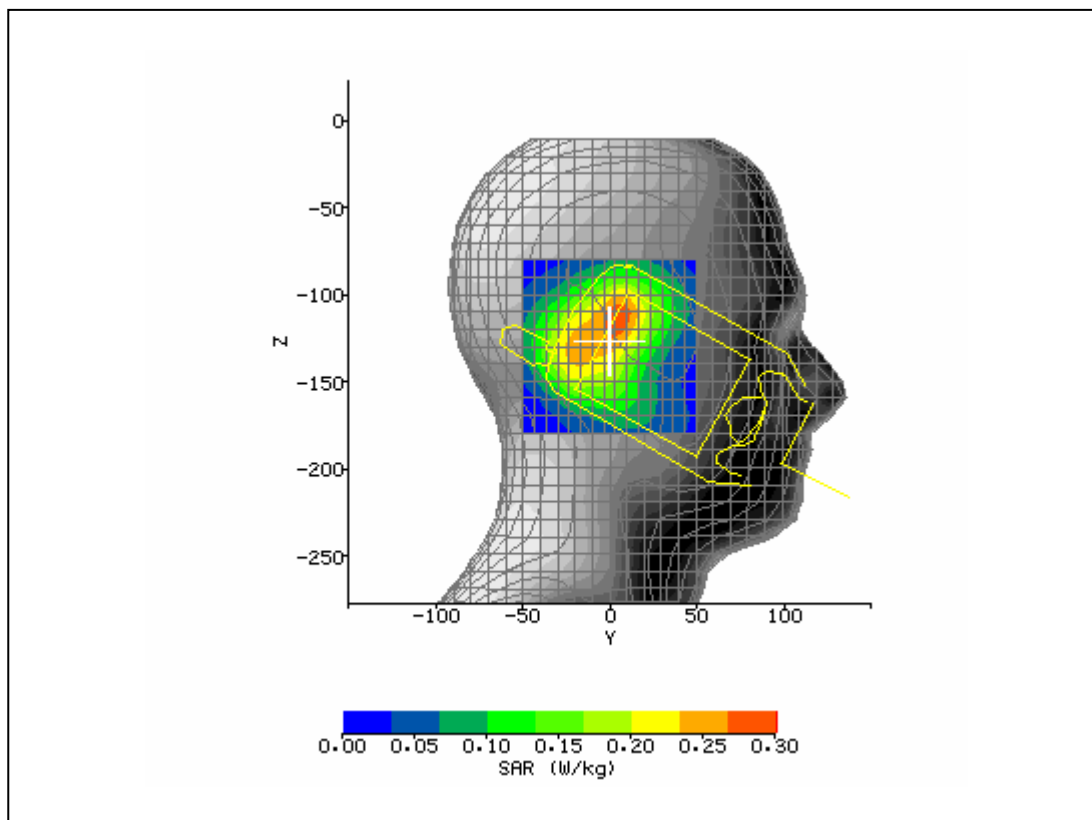

SAR Test Report No.:


SAR_HANDH_004_05002_FCC_850_1900_D9500rev1

Date of Report: 12/16/2005

Appendix A Plots

Page 5 of 18

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/8/2005 8:42:51 AM	DUT Battery Model/No:	
Filename:	lefttilt128_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	HHP D9500 MC46	Relative Permittivity:	42.11
Relative Humidity:	50%	Conductivity:	0.881
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-5.33 mm
DUT Position:	left tilt	Max SAR Z-axis Location:	-96.00 mm
Antenna Configuration:	Integral	Max E Field:	26.83 V/m
Test Frequency:	824.2MHz	SAR 1g:	0.546 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.346 W/kg
Conversion Factors:	.510 / .510 / .510	SAR Start:	0.231 W/kg
Type of Modulation:		SAR End:	0.231 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.00 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	11/18/2005
Input Power Level:	max	Extrapolation:	poly4

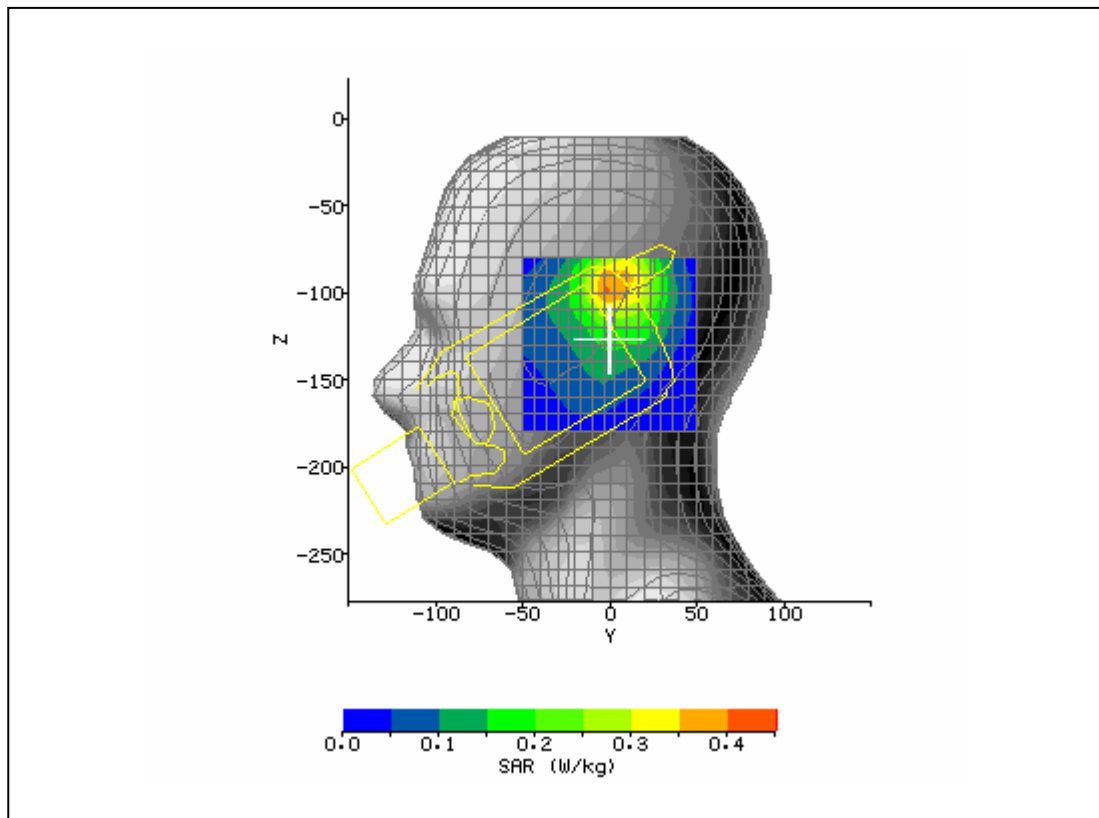

SAR Test Report No.:


SAR_HANDH_004_05002_FCC_850_1900_D9500rev1

Date of Report: 12/16/2005

Appendix A Plots

Page 6 of 18

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/8/2005 9:20:03 AM	DUT Battery Model/No:	
Filename:	lefttilt251_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	HHP D9500 MC46	Relative Permittivity:	41.78
Relative Humidity:	50%	Conductivity:	0.898
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-4.67 mm
DUT Position:	left tilt	Max SAR Z-axis Location:	-96.00 mm
Antenna Configuration:	Integral	Max E Field:	27.10 V/m
Test Frequency:	848.8MHz	SAR 1g:	0.553 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.350 W/kg
Conversion Factors:	.510 / .510 / .510	SAR Start:	0.237 W/kg
Type of Modulation:		SAR End:	0.236 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.02 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	11/18/2005
Input Power Level:	max	Extrapolation:	poly4

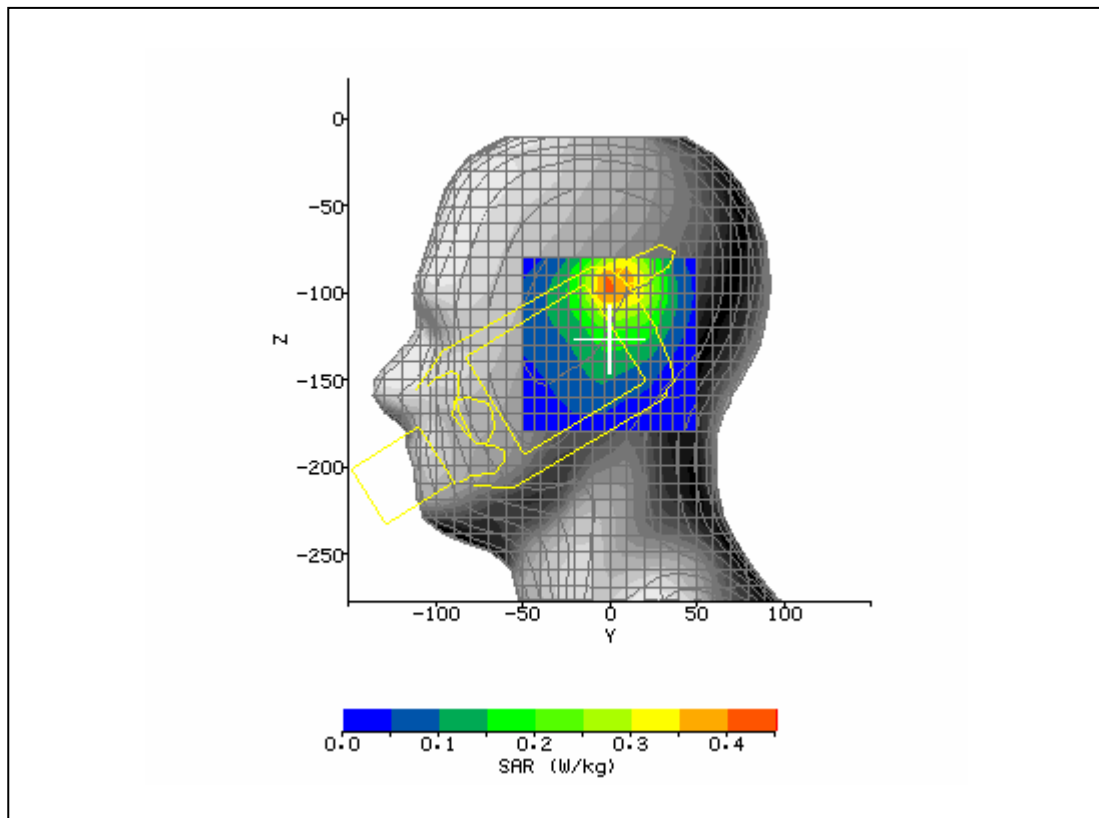


SAR Test Report No.:

SAR_HANDH_004_05002_FCC_850_1900_D9500rev1

Date of Report: 12/16/2005

Appendix A Plots

Page 7 of 18

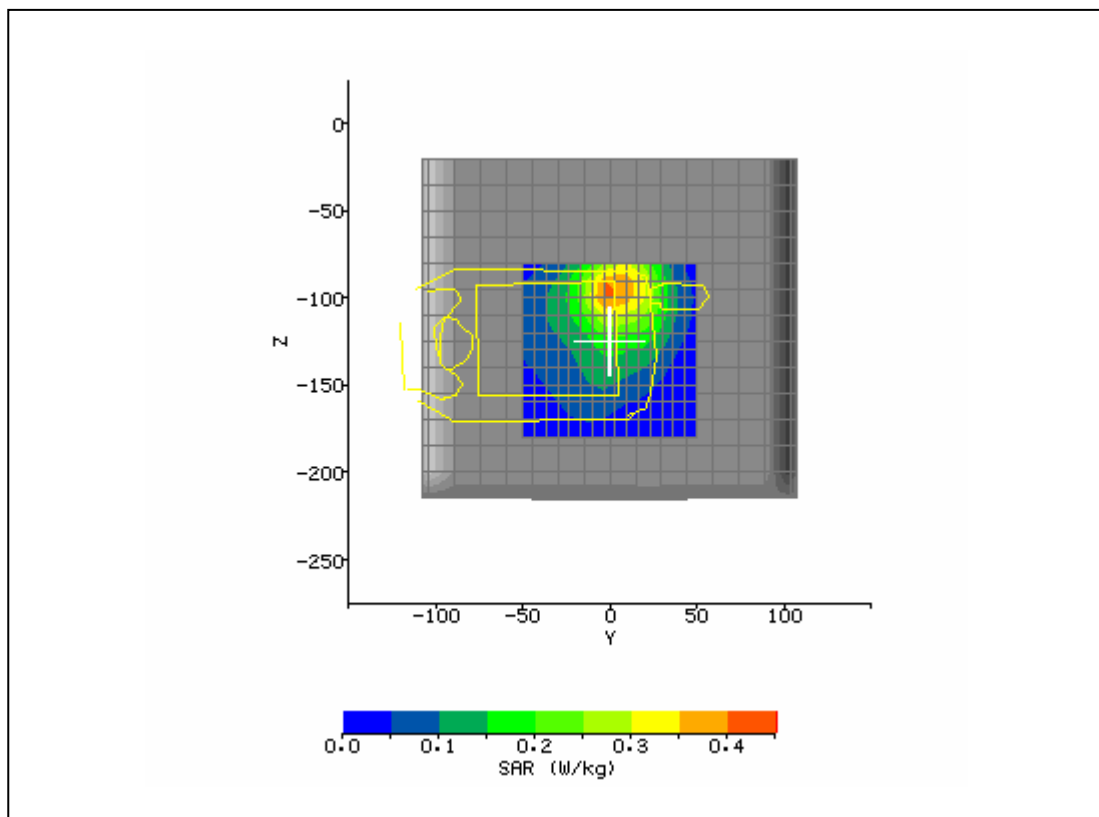

SAR Test Report No.:


SAR_HANDH_004_05002_FCC_850_1900_D9500rev1

Date of Report: 12/16/2005

Appendix A Plots

Page 8 of 18

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/8/2005 10:52:19 AM	DUT Battery Model/No:	
Filename:	body190_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	HHP D9500 MC46	Relative Permittivity:	56.12
Relative Humidity:	50%	Conductivity:	0.978
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	11.33 mm
DUT Position:	body	Max SAR Z-axis Location:	-157.70 mm
Antenna Configuration:	Integral	Max E Field:	19.07 V/m
Test Frequency:	836MHz	SAR 1g:	0.321 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.234 W/kg
Conversion Factors:	.522 / .522 / .522	SAR Start:	0.154 W/kg
Type of Modulation:		SAR End:	0.151 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.09 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	11/18/2005
Input Power Level:	max	Extrapolation:	poly4

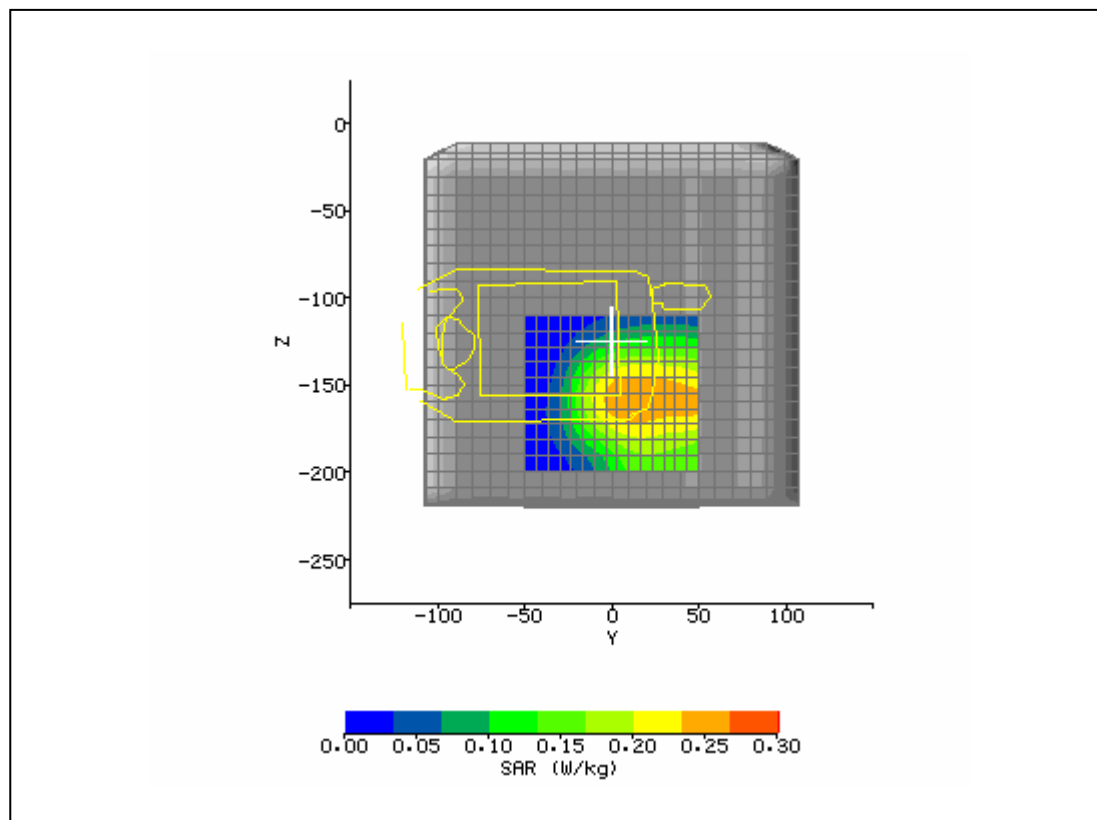

SAR Test Report No.:


SAR_HANDH_004_05002_FCC_850_1900_D9500rev1

Date of Report: 12/16/2005

Appendix A Plots

Page 9 of 18

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/8/2005 11:52:19 AM	DUT Battery Model/No:	
Filename:	body251_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	HHP D9500 MC46	Relative Permittivity:	55.91
Relative Humidity:	50%	Conductivity:	0.983
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	47.33 mm
DUT Position:	body	Max SAR Z-axis Location:	-152.37 mm
Antenna Configuration:	Integral	Max E Field:	17.99 V/m
Test Frequency:	848.8MHz	SAR 1g:	0.290 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.219 W/kg
Conversion Factors:	.522 / .522 / .522	SAR Start:	0.163 W/kg
Type of Modulation:		SAR End:	0.165 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.04 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	11/18/2005
Input Power Level:	max	Extrapolation:	poly4

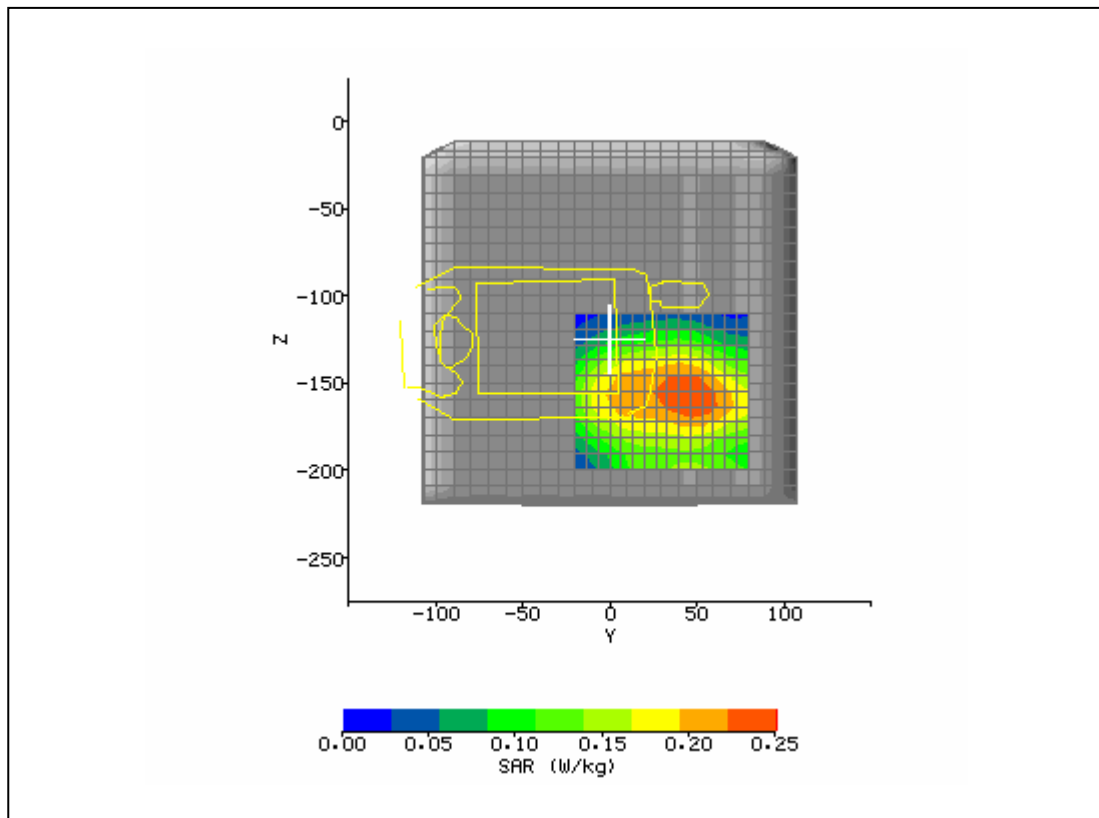

SAR Test Report No.:


SAR_HANDH_004_05002_FCC_850_1900_D9500rev1

Date of Report: 12/16/2005

Appendix A Plots

Page 10 of 18

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/5/2005 1:20:54 PM	DUT Battery Model/No:	
Filename:	lefttch661_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	HHP D9500 MC46	Relative Permittivity:	38.56
Relative Humidity:	50%	Conductivity:	1.397
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-7.33 mm
DUT Position:	left touch	Max SAR Z-axis Location:	-103.00 mm
Antenna Configuration:	Integral	Max E Field:	15.32 V/m
Test Frequency:	1909.8MHz	SAR 1g:	0.276 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.163 W/kg
Conversion Factors:	0.558 / 0.558 / 0.558	SAR Start:	0.092 W/kg
Type of Modulation:		SAR End:	0.093 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.07 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	11/18/2005
Input Power Level:	max	Extrapolation:	poly4

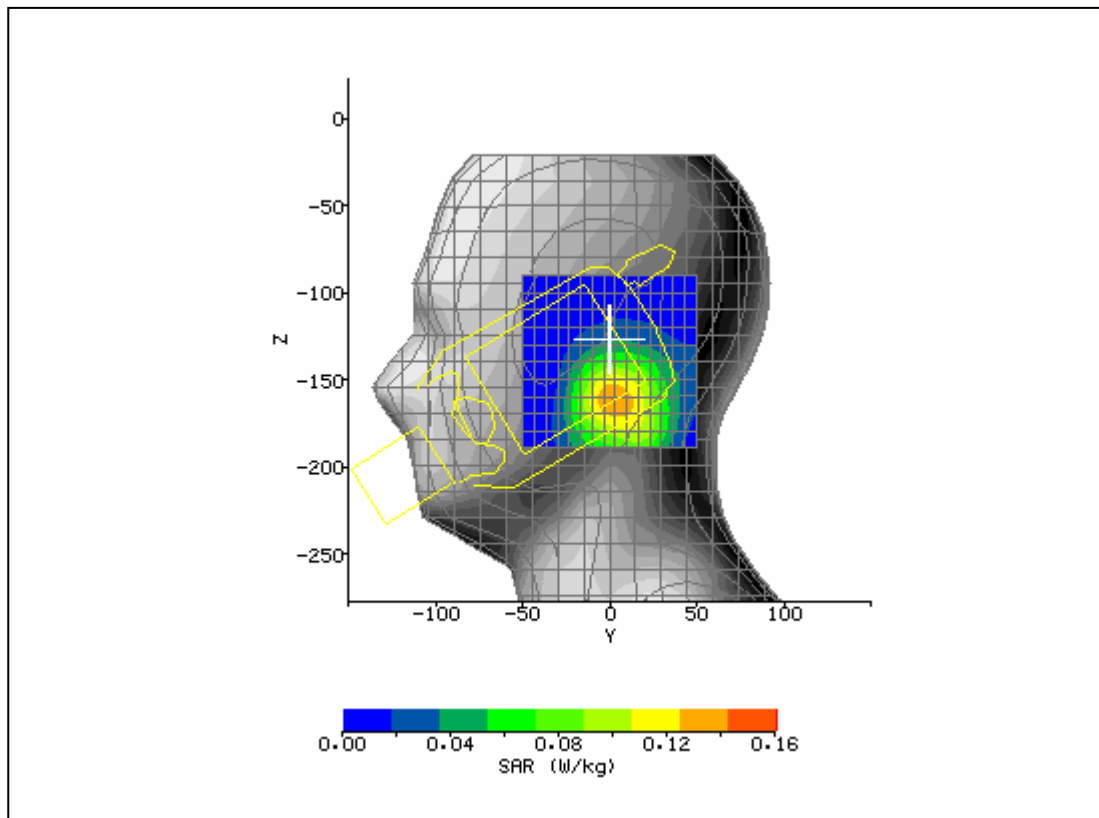

SAR Test Report No.:


SAR_HANDH_004_05002_FCC_850_1900_D9500rev1

Date of Report: 12/16/2005

Appendix A Plots

Page 11 of 18

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/5/2005 1:52:55 PM	DUT Battery Model/No:	
Filename:	lefttl661_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	HHP D9500 MC46	Relative Permittivity:	38.56
Relative Humidity:	50%	Conductivity:	1.397
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	2.00 mm
DUT Position:	left tilt	Max SAR Z-axis Location:	-102.00 mm
Antenna Configuration:	Integral	Max E Field:	16.65 V/m
Test Frequency:	1909.8MHz	SAR 1g:	0.320 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.192 W/kg
Conversion Factors:	0.558 / 0.558 / 0.558	SAR Start:	0.108 W/kg
Type of Modulation:		SAR End:	0.109 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.03 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	11/18/2005
Input Power Level:	max	Extrapolation:	poly4

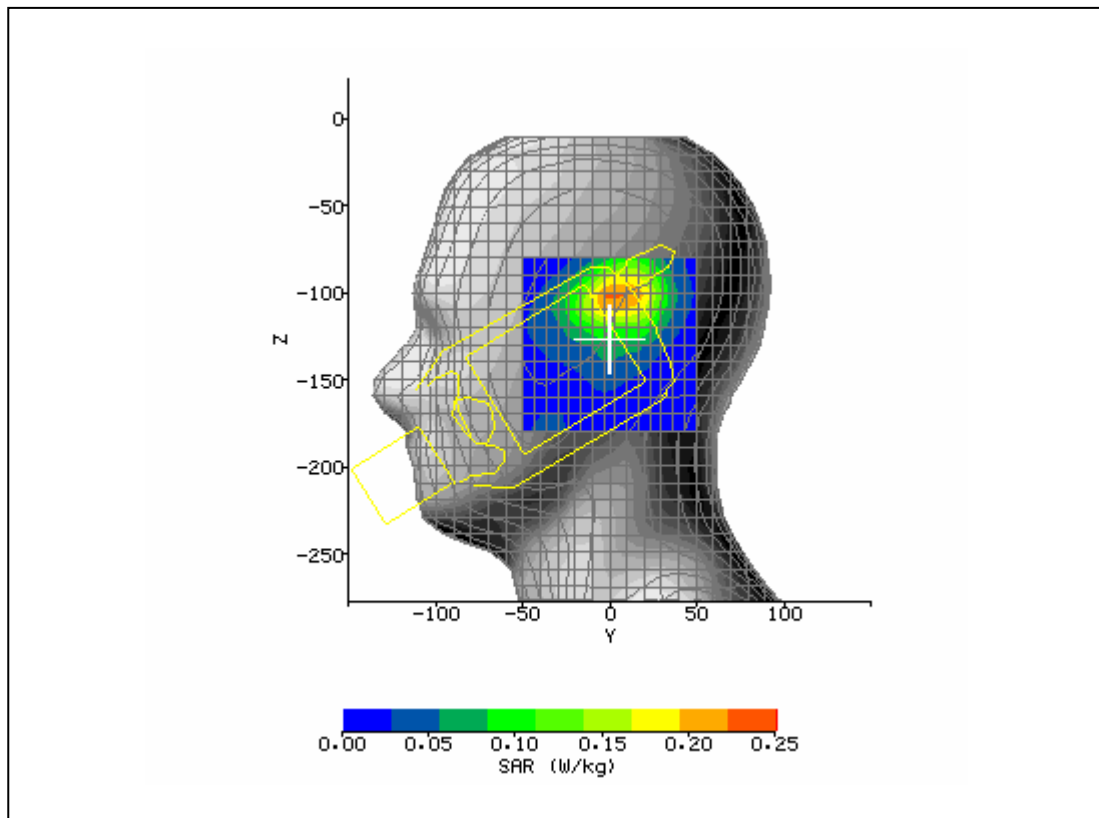

SAR Test Report No.:


SAR_HANDH_004_05002_FCC_850_1900_D9500rev1

Date of Report: 12/16/2005

Appendix A Plots

Page 12 of 18

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/5/2005 2:28:38 PM	DUT Battery Model/No:	
Filename:	righttch661_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	HHP D9500 MC46	Relative Permittivity:	38.56
Relative Humidity:	50%	Conductivity:	1.397
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	-26.00 mm
DUT Position:	right touch	Max SAR Z-axis Location:	-131.33 mm
Antenna Configuration:	Integral	Max E Field:	11.72 V/m
Test Frequency:	1909.8MHz	SAR 1g:	0.161 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.103 W/kg
Conversion Factors:	0.558 / 0.558 / 0.558	SAR Start:	0.063 W/kg
Type of Modulation:		SAR End:	0.063 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.00 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	11/18/2005
Input Power Level:	max	Extrapolation:	poly4

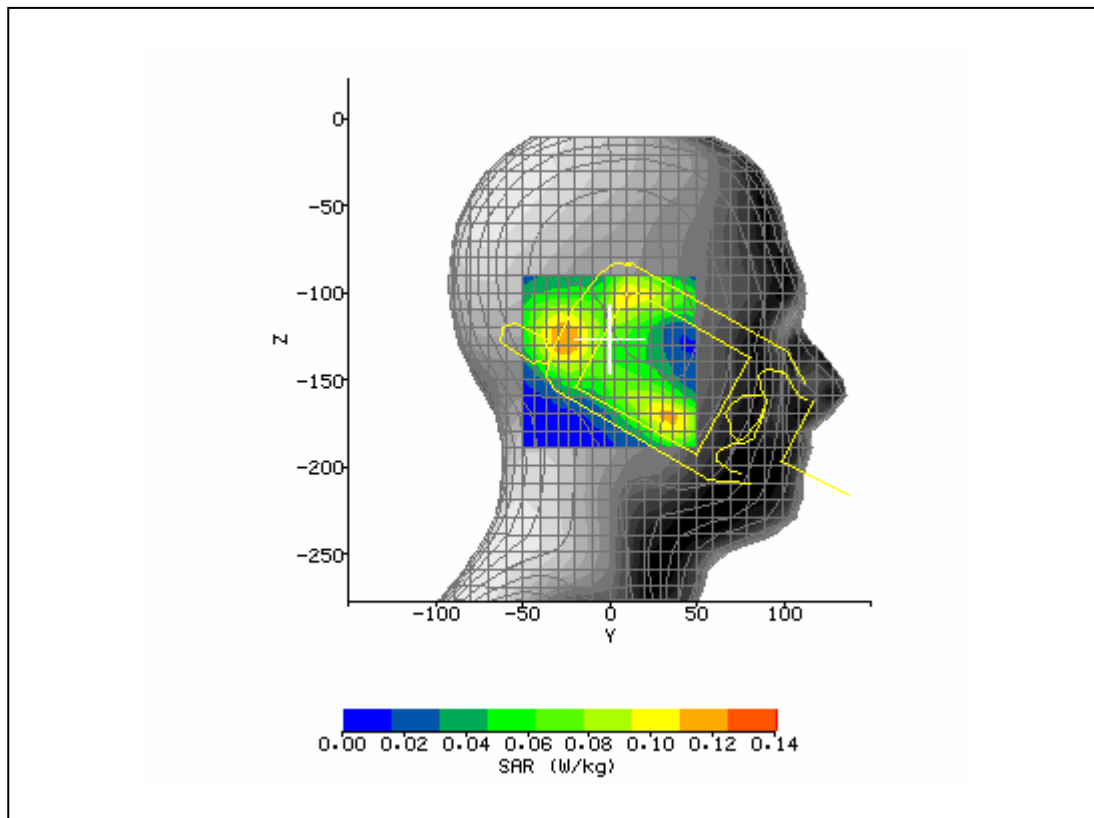

SAR Test Report No.:


SAR_HANDH_004_05002_FCC_850_1900_D9500rev1

Date of Report: 12/16/2005

Appendix A Plots

Page 13 of 18

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/5/2005 3:09:25 PM	DUT Battery Model/No:	
Filename:	righttl661_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	HHP D9500 MC46	Relative Permittivity:	38.56
Relative Humidity:	50%	Conductivity:	1.397
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	-32.00 mm
DUT Position:	right tilt	Max SAR Z-axis Location:	-129.00 mm
Antenna Configuration:	Integral	Max E Field:	14.64 V/m
Test Frequency:	1909.8MHz	SAR 1g:	0.252 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.157 W/kg
Conversion Factors:	0.558 / 0.558 / 0.558	SAR Start:	0.098 W/kg
Type of Modulation:		SAR End:	0.100 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.08 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	11/18/2005
Input Power Level:	max	Extrapolation:	poly4

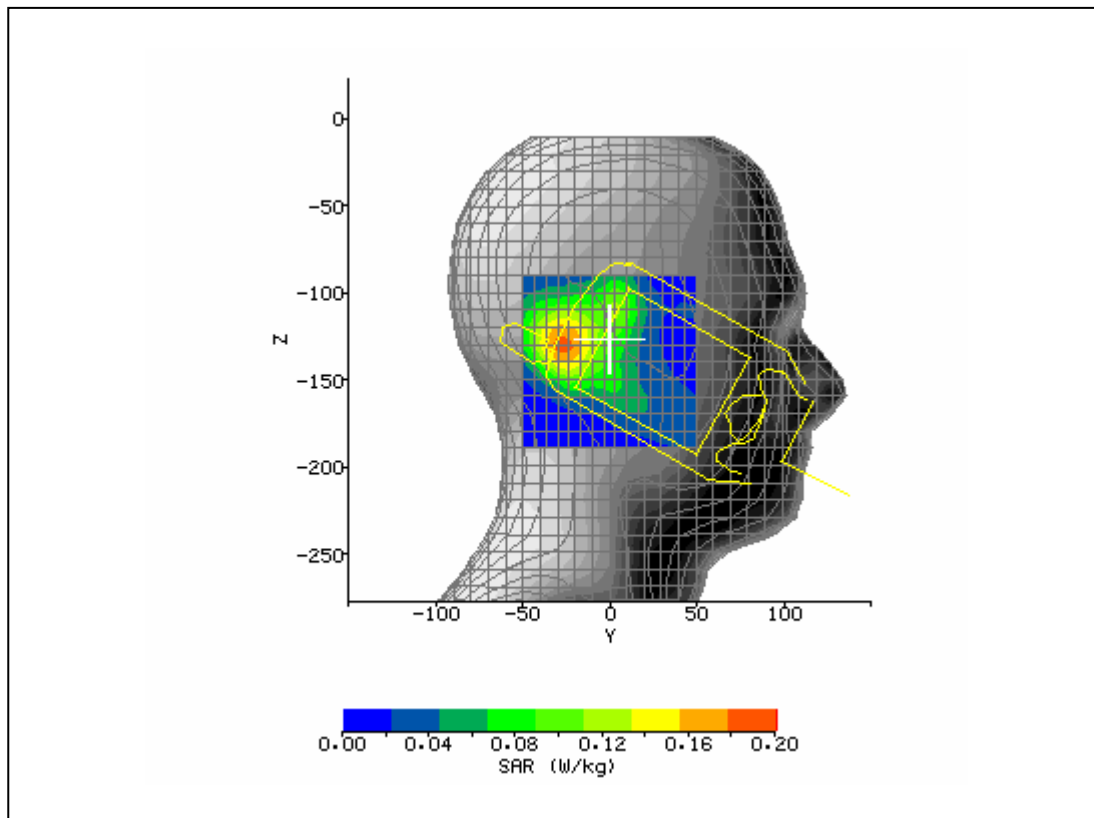

SAR Test Report No.:


SAR_HANDH_004_05002_FCC_850_1900_D9500rev1

Date of Report: 12/16/2005

Appendix A Plots

Page 14 of 18

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/5/2005 3:51:38 PM	DUT Battery Model/No:	
Filename:	lefttilt512_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	HHP D9500 MC46	Relative Permittivity:	38.82
Relative Humidity:	50%	Conductivity:	1.359
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-4.67 mm
DUT Position:	left tilt	Max SAR Z-axis Location:	-95.00 mm
Antenna Configuration:	Integral	Max E Field:	21.54 V/m
Test Frequency:	1850.2MHz	SAR 1g:	0.519 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.307 W/kg
Conversion Factors:	0.558 / 0.558 / 0.558	SAR Start:	0.193 W/kg
Type of Modulation:		SAR End:	0.195 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.03 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	11/18/2005
Input Power Level:	max	Extrapolation:	poly4

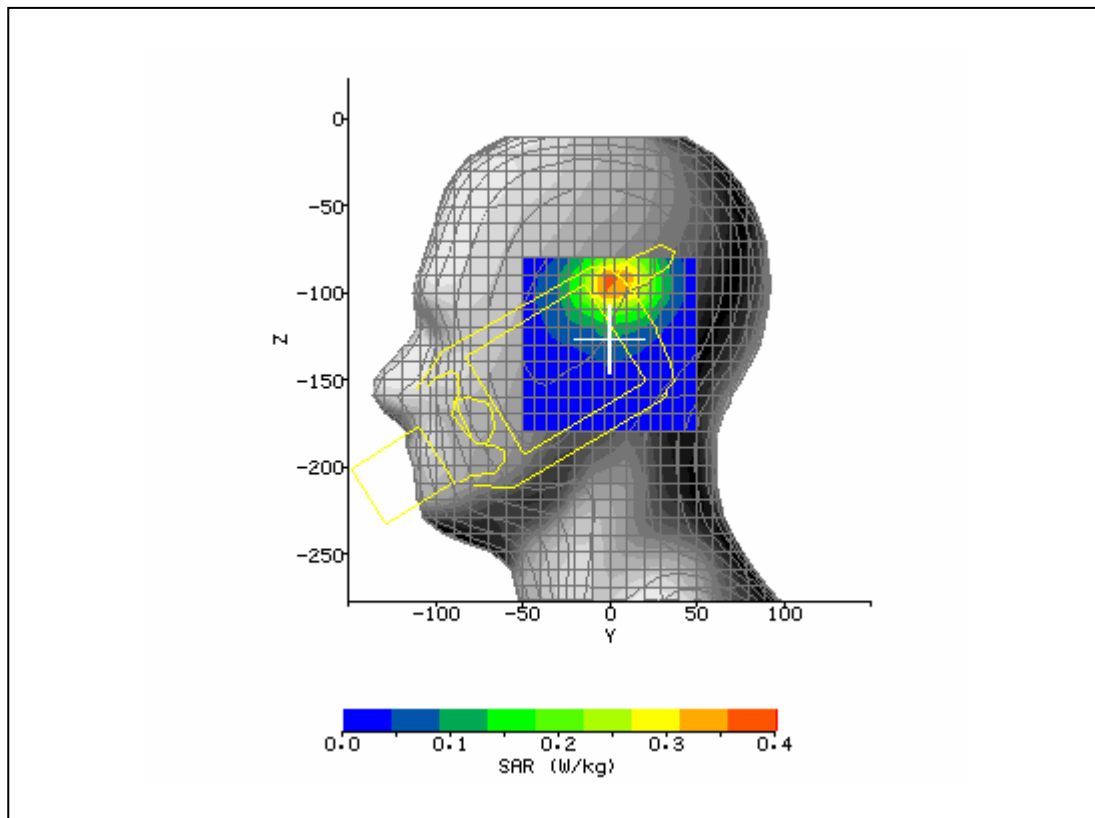

SAR Test Report No.:


SAR_HANDH_004_05002_FCC_850_1900_D9500rev1

Date of Report: 12/16/2005

Appendix A Plots

Page 15 of 18

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/5/2005 4:24:20 PM	DUT Battery Model/No:	
Filename:	lefttl810_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	HHP D9500 MC46	Relative Permittivity:	38.46
Relative Humidity:	50%	Conductivity:	1.417
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-2.00 mm
DUT Position:	left tilt	Max SAR Z-axis Location:	-95.00 mm
Antenna Configuration:	Integral	Max E Field:	13.86 V/m
Test Frequency:	1909.8MHz	SAR 1g:	0.226 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.140 W/kg
Conversion Factors:	0.558 / 0.558 / 0.558	SAR Start:	0.079 W/kg
Type of Modulation:		SAR End:	0.078 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.01 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	11/18/2005
Input Power Level:	max	Extrapolation:	poly4

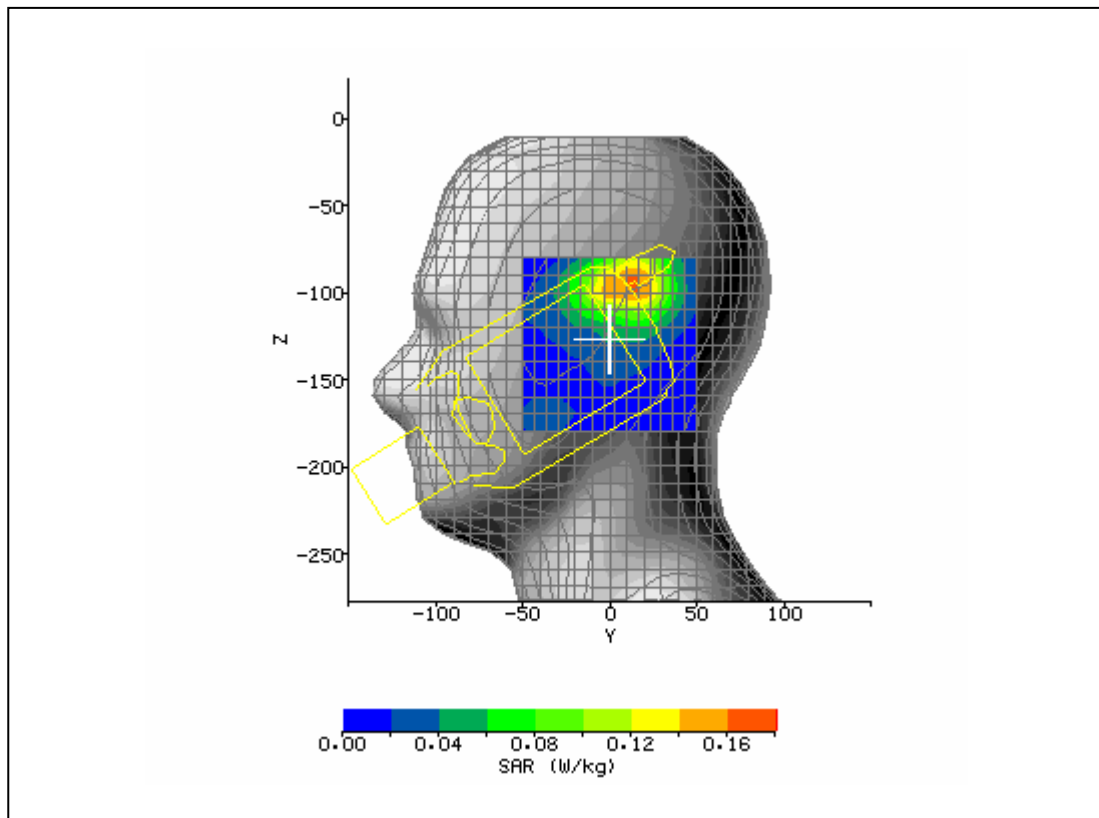

SAR Test Report No.:


SAR_HANDH_004_05002_FCC_850_1900_D9500rev1

Date of Report: 12/16/2005

Appendix A Plots

Page 16 of 18

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/5/2005 10:12:28 AM	DUT Battery Model/No:	
Filename:	body512_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	HHP D9500 MC46	Relative Permittivity:	53.52
Relative Humidity:	50%	Conductivity:	1.559
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	10.00 mm
DUT Position:	body	Max SAR Z-axis Location:	-165.00 mm
Antenna Configuration:	Integral	Max E Field:	15.33 V/m
Test Frequency:	1850.2MHz	SAR 1g:	0.313 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.193 W/kg
Conversion Factors:	0.666 / 0.666 / 0.666	SAR Start:	0.086 W/kg
Type of Modulation:		SAR End:	0.086 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.00 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	11/18/2005
Input Power Level:	max	Extrapolation:	poly4

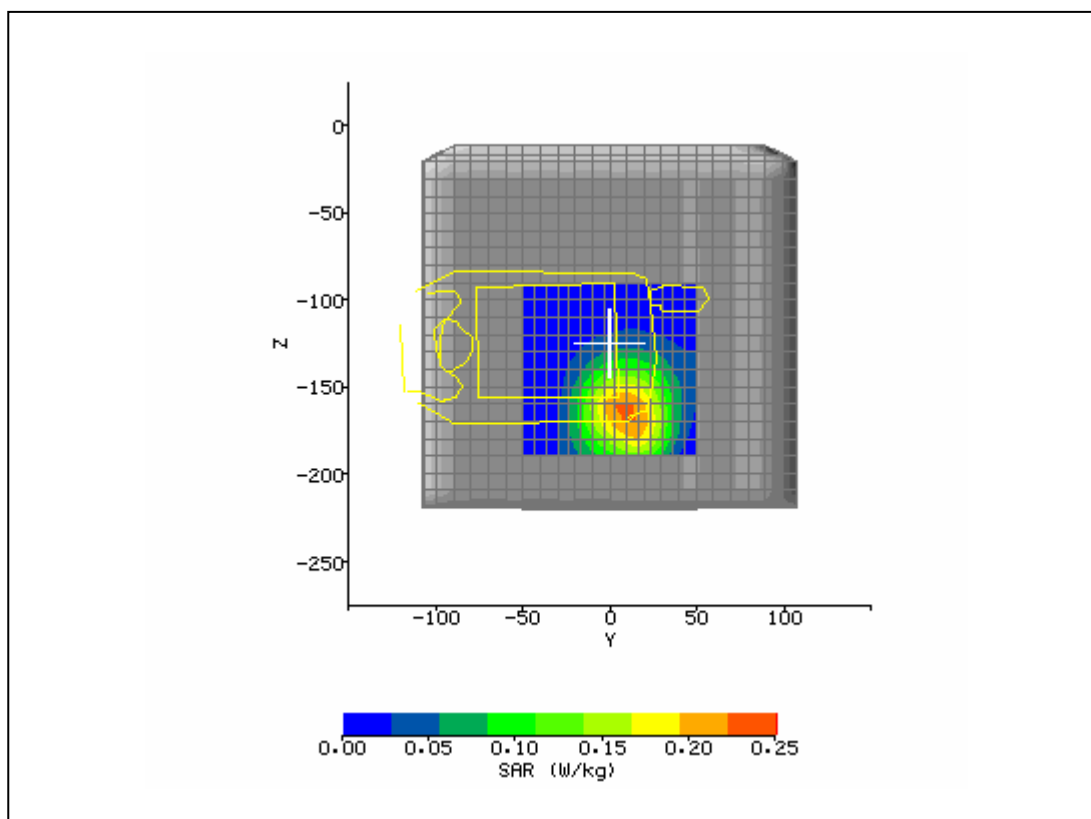

SAR Test Report No.:


SAR_HANDH_004_05002_FCC_850_1900_D9500rev1

Date of Report: 12/16/2005

Appendix A Plots

Page 17 of 18

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/5/2005 10:45:29 AM	DUT Battery Model/No:	
Filename:	body661_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	HHP D9500 MC46	Relative Permittivity:	53.36
Relative Humidity:	50%	Conductivity:	1.571
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	8.00 mm
DUT Position:	body	Max SAR Z-axis Location:	-163.00 mm
Antenna Configuration:	Integral	Max E Field:	13.32 V/m
Test Frequency:	1880MHz	SAR 1g:	0.237 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.146 W/kg
Conversion Factors:	0.666 / 0.666 / 0.666	SAR Start:	0.070 W/kg
Type of Modulation:		SAR End:	0.070 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.01 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	11/18/2005
Input Power Level:	max	Extrapolation:	poly4

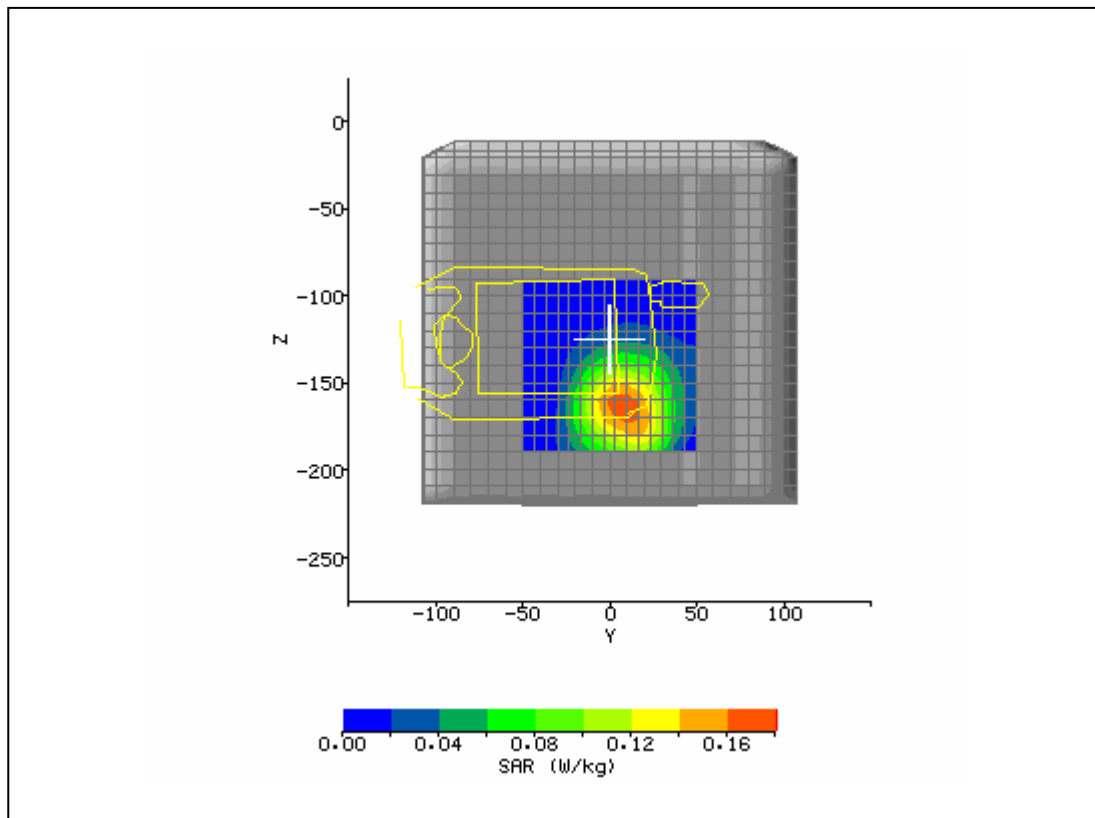

SAR Test Report No.:

SAR_HANDH_004_05002_FCC_850_1900_D9500rev1

Date of Report: 12/16/2005

Appendix A Plots

Page 18 of 18

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/5/2005 11:18:04 AM	DUT Battery Model/No:	
Filename:	body810_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	HHP D9500 MC46	Relative Permittivity:	53.11
Relative Humidity:	50%	Conductivity:	1.577
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	2.00 mm
DUT Position:	body	Max SAR Z-axis Location:	-161.00 mm
Antenna Configuration:	Integral	Max E Field:	12.24 V/m
Test Frequency:	1909.8MHz	SAR 1g:	0.198 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.119 W/kg
Conversion Factors:	0.666 / 0.666 / 0.666	SAR Start:	0.056 W/kg
Type of Modulation:		SAR End:	0.056 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.00 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	11/18/2005
Input Power Level:	max	Extrapolation:	poly4

