



# TEST REPORT

## No. I20Z70323-WMD01

for

**Samsung Electronics Co., Ltd.**

**Smart Phone**

**Model Name: SM-A025G/DSN**

**FCC ID: ZCASMA025G**

with

**Hardware Version: REV1.0**

**Software Version: A025G.001**

**Issued Date: 2020-12-10**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

**Test Laboratory:**

**CTTL, Telecommunication Technology Labs, CAICT**

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: [ctl\\_terminals@caict.ac.cn](mailto:ctl_terminals@caict.ac.cn), website: [www.caict.ac.cn](http://www.caict.ac.cn)

## **REPORT HISTORY**

| <b>Report Number</b> | <b>Revision</b> | <b>Description</b>      | <b>Issue Date</b> |
|----------------------|-----------------|-------------------------|-------------------|
| I20Z70323-WMD01      | Rev.0           | 1 <sup>st</sup> edition | 2020-12-10        |

Note: the latest revision of the test report supersedes all previous version.

## **CONTENTS**

|                                                                         |           |
|-------------------------------------------------------------------------|-----------|
| <b>1. TEST LABORATORY .....</b>                                         | <b>4</b>  |
| <b>1.1. INTRODUCTION &amp; ACCREDITATION.....</b>                       | <b>4</b>  |
| <b>1.2. TESTING LOCATION .....</b>                                      | <b>4</b>  |
| <b>1.3. TESTING ENVIRONMENT.....</b>                                    | <b>5</b>  |
| <b>1.4. PROJECT DATA .....</b>                                          | <b>5</b>  |
| <b>1.5. SIGNATURE .....</b>                                             | <b>5</b>  |
| <b>2. CLIENT INFORMATION.....</b>                                       | <b>6</b>  |
| <b>2.1. APPLICANT INFORMATION.....</b>                                  | <b>6</b>  |
| <b>2.2. MANUFACTURER INFORMATION.....</b>                               | <b>6</b>  |
| <b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b> | <b>7</b>  |
| <b>3.1. ABOUT EUT .....</b>                                             | <b>7</b>  |
| <b>3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....</b>   | <b>7</b>  |
| <b>3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST .....</b>    | <b>7</b>  |
| <b>4. REFERENCE DOCUMENTS.....</b>                                      | <b>8</b>  |
| <b>4.1. DOCUMENTS SUPPLIED BY APPLICANT .....</b>                       | <b>8</b>  |
| <b>4.2. REFERENCE DOCUMENTS FOR TESTING.....</b>                        | <b>8</b>  |
| <b>5. LABORATORY ENVIRONMENT.....</b>                                   | <b>9</b>  |
| <b>6. SUMMARY OF TEST RESULT .....</b>                                  | <b>10</b> |
| <b>7. TEST EQUIPMENTS UTILIZED.....</b>                                 | <b>11</b> |
| <b>ANNEX A: MEASUREMENT RESULTS.....</b>                                | <b>12</b> |
| A.1 OUTPUT POWER.....                                                   | 12        |
| A.2 EMISSION LIMIT.....                                                 | 18        |
| A.3 FREQUENCY STABILITY .....                                           | 23        |
| A.4 OCCUPIED BANDWIDTH.....                                             | 25        |
| A.5 EMISSION BANDWIDTH.....                                             | 38        |
| A.6 BAND EDGE COMPLIANCE.....                                           | 51        |
| A.7 CONDUCTED SPURIOUS EMISSION .....                                   | 56        |
| A.8 PEAK-TO-AVERAGE POWER RATIO .....                                   | 61        |
| <b>ANNEX B: ACCREDITATION CERTIFICATE.....</b>                          | <b>62</b> |

## **1. Test Laboratory**

### **1.1. Introduction & Accreditation**

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2017 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0 and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (CN0066). The detail accreditation scope can be found on NVLAP website.

### **1.2. Testing Location**

Location 1: CTTL (huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China 100191

Location 2: CTTL(Shouxian)

Address: No. 51 Shouxian Science Building, Xueyuan Road,  
Haidian District, Beijing, P. R. China 100191

### 1.3. Testing Environment

Normal Temperature: 15-35℃  
Relative Humidity: 20-75%

### 1.4. Project Data

Testing Start Date: 2020-11-25  
Testing End Date: 2020-12-09

### 1.5. Signature



---

**Dong Yuan**  
**(Prepared this test report)**



---

**Zhou Yu**  
**(Reviewed this test report)**



---

**Zhao Hui Lin**  
**Deputy Director of the laboratory**  
**(Approved this test report)**

## **2. Client Information**

### **2.1. Applicant Information**

Company Name: Samsung Electronics Co., Ltd.  
Address /Post: 19 Chapin Rd., Building D Pine Brook, NJ 07058  
Contact: Jenni Chun  
Email: j1.chun@samsung.com  
Telephone: +1-201-937-4203

### **2.2. Manufacturer Information**

Company Name: Samsung Electronics Co., Ltd.  
Address /Post: Samsung R5, Maetan dong 129, Samsung ro  
Youngtong gu, Suwon city 443 742, Korea  
Contact: Sunghoon Cho  
Email: ggobi.cho@samsung.com  
Telephone: +82-10-2722-4159

### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

|                         |                                            |
|-------------------------|--------------------------------------------|
| Description             | Smart Phone                                |
| Model Name              | SM-A025G/DSN                               |
| FCC ID                  | ZCASMA025G                                 |
| Antenna                 | Embedded                                   |
| Output power            | 29.82dBm maximum EIRP measured for PCS1900 |
| Extreme vol. Limits     | 3.6VDC to 4.2VDC (nominal: 3.85VDC)        |
| Extreme temp. Tolerance | -10°C to +55°C                             |

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL.

#### **3.2. Internal Identification of EUT used during the test**

| EUT ID* | IMEI         | HW Version | SW Version | Date of receipt |
|---------|--------------|------------|------------|-----------------|
| UT07a   | 2070323UT07a | REV1.0     | A025G.001  | 2020-11-25      |
| UT02a   | 2070323UT02a | REV1.0     | A025G.001  | 2020-11-25      |

\*EUT ID: is used to identify the test sample in the lab internally.

#### **3.3. Internal Identification of AE used during the test**

| AE ID*       | Description                      |
|--------------|----------------------------------|
| AE1          | Battery                          |
| AE1          |                                  |
| Model        | HQ-50S                           |
| Manufacturer | SUCD(FUJIAN) Electronics Co.,Ltd |
| Capacitance  | 5000mAh                          |

\*AE ID: is used to identify the test sample in the lab internally.

## **4. Reference Documents**

### **4.1. Documents supplied by applicant**

EUT parameters, referring to Annex A for detailed information, is supplied by the client or manufacturer, which is the basis of testing.

### **4.2. Reference Documents for testing**

The following documents listed in this section are referred for testing.

| <b>Reference</b> | <b>Title</b>                                                                                         | <b>Version</b>     |
|------------------|------------------------------------------------------------------------------------------------------|--------------------|
| FCC Part 22      | PUBLIC MOBILE SERVICES                                                                               | 10-1-19<br>Edition |
| FCC Part 24      | PERSONAL COMMUNICATIONS SERVICES                                                                     | 10-1-19<br>Edition |
| ANSI/TIA-603-E   | Land Mobile FM or PM Communications Equipment<br>Measurement and Performance Standards               | 2016               |
| ANSI C63.26      | American National Standard for Compliance Testing of<br>Transmitters Used in Licensed Radio Services | 2015               |
| KDB 971168 D01   | MEASUREMENT GUIDANCE FOR CERTIFICATION OF<br>LICENSED DIGITAL TRANSMITTERS                           | v03r01             |



## 5. Laboratory Environment

**Control room / conducted chamber** did not exceed following limits along the EMC testing:

|                          |                            |
|--------------------------|----------------------------|
| Temperature              | Min. = 15 °C, Max. = 35 °C |
| Relative humidity        | Min. = 20 %, Max. = 80 %   |
| Shielding effectiveness  | > 110 dB                   |
| Electrical insulation    | > 2 MΩ                     |
| Ground system resistance | < 0.5 Ω                    |

**Semi-anechoic chamber SAC-1** (23 meters × 17 meters × 10 meters) did not exceed following limits along the EMC testing:

|                                                 |                                                           |
|-------------------------------------------------|-----------------------------------------------------------|
| Temperature                                     | Min. = 15 °C, Max. = 35 °C                                |
| Relative humidity                               | Min. = 15 %, Max. = 75 %                                  |
| Shielding effectiveness                         | 0.014 MHz - 1 MHz, > 60 dB;<br>1 MHz - 1000 MHz, > 90 dB. |
| Electrical insulation                           | > 2 MΩ                                                    |
| Ground system resistance                        | < 4 Ω                                                     |
| Normalised site attenuation (NSA)               | < ± 4 dB, 3m/10m distance,<br>from 30 to 1000 MHz         |
| Site voltage standing-wave ratio ( $S_{VSWR}$ ) | Between 0 and 6 dB, from 1 GHz to 18 GHz                  |
| Uniformity of field strength                    | Between 0 and 6 dB, from 80 to 6000 MHz                   |

**Fully-anechoic chamber FAC-3** (8.6 meters × 6.1 meters × 3.85 meters) did not exceed following limits along the EMC testing:

|                                                 |                                          |
|-------------------------------------------------|------------------------------------------|
| Temperature                                     | Min. = 15 °C, Max. = 30 °C               |
| Relative humidity                               | Min. = 35 %, Max. = 60 %                 |
| Shielding effectiveness                         | > 110 dB                                 |
| Electrical insulation                           | > 2 MΩ                                   |
| Ground system resistance                        | < 1 Ω                                    |
| Site voltage standing-wave ratio ( $S_{VSWR}$ ) | Between 0 and 6 dB, from 1 GHz to 18 GHz |
| Uniformity of field strength                    | Between 0 and 6 dB, from 80 to 6000 MHz  |

## 6. Summary Of Test Result

### GSM850

| Items | List                        | Clause in FCC rules | Verdict |
|-------|-----------------------------|---------------------|---------|
| 1     | Output Power                | 22.913              | P       |
| 2     | Emission Limit              | 2.1051/22.917       | P       |
| 3     | Frequency Stability         | 2.1055              | P       |
| 4     | Occupied Bandwidth          | 2.1049              | P       |
| 5     | Emission Bandwidth          | 22.917              | P       |
| 6     | Band Edge Compliance        | 22.917              | P       |
| 7     | Conducted Spurious Emission | 22.917              | P       |

### PCS1900

| Items | List                        | Clause in FCC rules | Verdict |
|-------|-----------------------------|---------------------|---------|
| 1     | Output Power                | 24.232              | P       |
| 2     | Emission Limit              | 2.1051/24.238       | P       |
| 3     | Frequency Stability         | 2.1055              | P       |
| 4     | Occupied Bandwidth          | 2.1049              | P       |
| 5     | Emission Bandwidth          | 24.238              | P       |
| 6     | Band Edge Compliance        | 24.238              | P       |
| 7     | Conducted Spurious Emission | 24.238              | P       |
| 8     | Peak-to-Average Power Ratio | 24.232              | P       |

Terms used in Verdict column

|    |                                                                                |
|----|--------------------------------------------------------------------------------|
| P  | Pass. The EUT complies with the essential requirements in the standard.        |
| NP | Not Performed. The test was not performed by CTTL.                             |
| NA | Not Applicable. The test was not applicable.                                   |
| BR | Re-use test data from basic model report.                                      |
| F  | Fail. The EUT does not comply with the essential requirements in the standard. |

### Explanation of worst-case configuration

The worst-case scenario for all measurements is based on the conducted output power measurement investigation results unless otherwise stated. The test results shown in the following sections represent the worst case emission.

## 7. Test Equipments Utilized

| Description                          | Type     | Series Number | Manufacture  | Cal Due Date | Calibration Interval |
|--------------------------------------|----------|---------------|--------------|--------------|----------------------|
| Universal Radio Communication Tester | CMU200   | 108646        | R&S          | 2020-12-24   | 1 year               |
| Spectrum Analyzer                    | FSU      | 200030        | R&S          | 2021-06-01   | 1 year               |
| Climate chamber                      | SH-242   | 93008556      | ESPEC        | 2020-12-21   | 3 years              |
| EMI Antenna                          | 9117     | 167           | Schwarzbeck  | 2021-08-19   | 1 year               |
| EMI Antenna                          | 3117     | 00058889      | ETS-Lindgren | 2020-11-18   | 1 year               |
| EMI Antenna                          | 3117     | 00119024      | ETS-Lindgren | 2021-05-08   | 1 year               |
| Signal Generator                     | N5183A   | MY49060052    | Agilent      | 2021-07-01   | 1 year               |
| Test Receiver                        | E4440A   | MY48250642    | Agilent      | 2021-03-12   | 1 year               |
| Universal Radio Communication Tester | CMW500   | 143008        | R&S          | 2020-11-26   | 1 year               |
| EMI Antenna                          | VULB9163 | 9163-235      | Schwarzbeck  | 2020-11-24   | 1 year               |
| Power Amplifier                      | 5S1G4    | 0341863       | AR           | /            |                      |

Note: The EMI Antenna which series number is 00058889 was before the CAL DUE DATE when used. The Universal Radio Communication Tester which series number is 143008 was before the CAL DUE DATE when used. The EMI Antenna which series number is 9163-235 was before the CAL DUE DATE when used.

## **Annex A: Measurement Results**

### **A.1 Output Power**

#### **A.1.1 Summary**

During the process of testing, the EUT was controlled via communication tester to ensure max power transmission and proper modulation.

In all cases, output power is within the specified limits.

#### **A.1.2 Conducted**

##### **A.1.2.1 Method of Measurements**

The EUT was set up for the max output power with pseudo random data modulation.

These measurements were done at 3 frequencies (bottom, middle and top of operational frequency range) for each bandwidth.

##### **A.1.2.2 Measurement Result**

###### **GSM850**

###### **GSM(GMSK)**

| Frequency (MHz) | Power Step | Output power (dBm) |
|-----------------|------------|--------------------|
| 824.2           | 5          | 33.16              |
| 836.6           | 5          | 33.31              |
| 848.8           | 5          | 32.94              |

###### **GPRS(GMSK,1Slot)**

| Frequency (MHz) | Power Step | Output power (dBm) |
|-----------------|------------|--------------------|
| 824.2           | 3          | 33.09              |
| 836.6           | 3          | 33.23              |
| 848.8           | 3          | 33.31              |

###### **EGPRS(8PSK,1Slot)**

| Frequency (MHz) | Power Step | Output power (dBm) |
|-----------------|------------|--------------------|
| 824.2           | 6          | 26.75              |
| 836.6           | 6          | 26.78              |
| 848.8           | 6          | 27.64              |

**PCS1900**  
**GSM(GMSK)**

| Frequency (MHz) | Power Step | Output power (dBm) |
|-----------------|------------|--------------------|
| 1850.2          | 0          | 29.56              |
| 1880.0          | 0          | 30.08              |
| 1909.8          | 0          | 29.83              |

**GPRS(GMSK,1Slot)**

| Frequency (MHz) | Power Step | Output power (dBm) |
|-----------------|------------|--------------------|
| 1850.2          | 3          | 29.79              |
| 1880.0          | 3          | 30.35              |
| 1909.8          | 3          | 30.15              |

**EGPRS(8PSK,1Slot)**

| Frequency (MHz) | Power Step | Output power (dBm) |
|-----------------|------------|--------------------|
| 1850.2          | 5          | 25.92              |
| 1880.0          | 5          | 25.85              |
| 1909.8          | 5          | 25.64              |

### A.1.3 Radiated

#### A.1.3.1 Description

This is the test for the maximum radiated power from the EUT.


Part 22.913(a) specifies "The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts".

Part 24.232(c) specifies "Mobile and portable stations are limited to 2 watts EIRP".


#### A.1.3.2 Method of Measurement

The measurements procedures in TIA-603E-2016 are used.

1. EUT was placed on a 1.5-meter-high non-conductive stand at a 3-meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with rms detector.

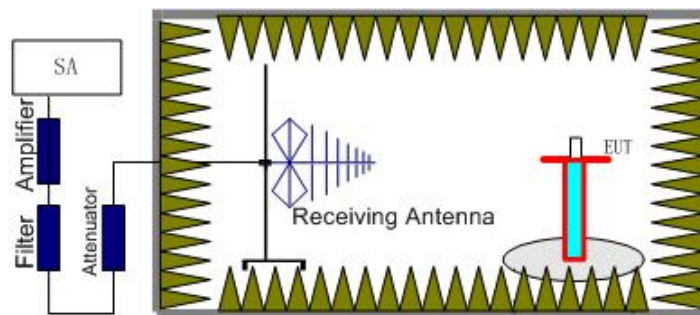

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as ( $P_r$ ).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

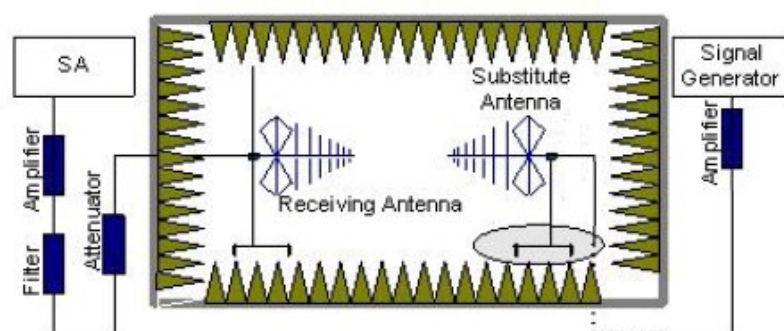

In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna

polarization.

4. An amplifier should be connected to the Signal Source output port. And the cable should be connected between the Amplifier and the Substitution Antenna.

The cable loss ( $P_{cl}$ ), the Substitution Antenna Gain ( $G_a$ ) and the Amplifier Gain ( $P_{Ag}$ ) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{\text{Mea}} + P_{\text{Ag}} - P_{\text{cl}} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$ .

## GSM 850-ERP

### Limits

|       | Power Step | Burst Peak ERP (dBm) |
|-------|------------|----------------------|
| GSM   | 5          | ≤38.45dBm (7W)       |
| GPRS  | 3          | ≤38.45dBm (7W)       |
| EGPRS | 6          | ≤38.45dBm (7W)       |

## Measurement result

### GSM

| Frequency<br>(MHz) | P <sub>Mea</sub><br>(dBm) | P <sub>cl</sub><br>(dB) | P <sub>Ag</sub><br>(dB) | G <sub>a</sub><br>(dBi) | Correction<br>(dB) | ERP<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) | Polarization |
|--------------------|---------------------------|-------------------------|-------------------------|-------------------------|--------------------|--------------|----------------|----------------|--------------|
| 824.20             | -13.26                    | 2.26                    | 45.79                   | 0.96                    | 2.15               | 29.08        | 38.45          | 9.37           | H            |
| 836.60             | -12.65                    | 2.26                    | 45.66                   | 0.82                    | 2.15               | 29.42        | 38.45          | 9.03           | H            |
| 848.80             | -12.08                    | 2.28                    | 45.54                   | 0.79                    | 2.15               | 29.82        | 38.45          | 8.63           | V            |

### GPRS

| Frequency<br>(MHz) | P <sub>Mea</sub><br>(dBm) | P <sub>cl</sub><br>(dB) | P <sub>Ag</sub><br>(dB) | G <sub>a</sub><br>(dBi) | Correction<br>(dB) | ERP<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) | Polarization |
|--------------------|---------------------------|-------------------------|-------------------------|-------------------------|--------------------|--------------|----------------|----------------|--------------|
| 824.20             | -13.26                    | 2.26                    | 45.79                   | 0.96                    | 2.15               | 29.08        | 38.45          | 9.37           | H            |
| 836.60             | -12.67                    | 2.26                    | 45.66                   | 0.82                    | 2.15               | 29.40        | 38.45          | 9.05           | H            |
| 848.80             | -12.00                    | 2.28                    | 45.54                   | 0.79                    | 2.15               | 29.90        | 38.45          | 8.55           | V            |

### EGPRS-8PSK

| Frequency<br>(MHz) | P <sub>Mea</sub><br>(dBm) | P <sub>cl</sub><br>(dB) | P <sub>Ag</sub><br>(dB) | G <sub>a</sub><br>(dBi) | Correction<br>(dB) | ERP<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) | Polarization |
|--------------------|---------------------------|-------------------------|-------------------------|-------------------------|--------------------|--------------|----------------|----------------|--------------|
| 824.20             | -20.37                    | 2.26                    | 45.79                   | 0.96                    | 2.15               | 21.97        | 38.45          | 16.48          | H            |
| 836.60             | -19.97                    | 2.26                    | 45.66                   | 0.82                    | 2.15               | 22.10        | 38.45          | 16.35          | H            |
| 848.80             | -19.73                    | 2.28                    | 45.54                   | 0.79                    | 2.15               | 22.17        | 38.45          | 16.28          | V            |

Frequency: 848.80MHz

Peak ERP (dBm)=P<sub>Mea</sub>(-19.73dBm)-P<sub>cl</sub>(2.28dB)+P<sub>Ag</sub>(45.54dB)+G<sub>a</sub> (0.79dB)-2.15dB=22.17dBm

Note: Expanded measurement uncertainty is U = 2.84 dB, k = 2.



## PCS1900-EIRP

### Limits

|       | Power Step | Burst Peak EIRP (dBm) |
|-------|------------|-----------------------|
| GSM   | 0          | ≤33dBm (2W)           |
| GPRS  | 3          | ≤33dBm (2W)           |
| EGPRS | 5          | ≤33dBm (2W)           |

## Measurement result

### GSM

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | P <sub>Ag</sub> (dB) | G <sub>a</sub> (dBi) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|----------------------|----------------------|------------|-------------|-------------|--------------|
| 1850.20         | -20.20                 | 2.93                 | 43.75                | 4.87                 | 25.49      | 33.00       | 7.51        | H            |
| 1880.00         | -21.55                 | 2.85                 | 43.75                | 4.82                 | 24.17      | 33.00       | 8.83        | V            |
| 1909.80         | -20.21                 | 2.89                 | 43.77                | 4.76                 | 25.43      | 33.00       | 7.57        | H            |

### GPRS

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | P <sub>Ag</sub> (dB) | G <sub>a</sub> (dBi) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|----------------------|----------------------|------------|-------------|-------------|--------------|
| 1850.20         | -20.18                 | 2.93                 | 43.75                | 4.87                 | 25.51      | 33.00       | 7.49        | H            |
| 1880.00         | -21.62                 | 2.85                 | 43.75                | 4.82                 | 24.10      | 33.00       | 8.90        | H            |
| 1909.80         | -20.17                 | 2.89                 | 43.77                | 4.76                 | 25.47      | 33.00       | 7.53        | H            |

### EGPRS-8PSK

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | P <sub>Ag</sub> (dB) | G <sub>a</sub> (dBi) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|----------------------|----------------------|------------|-------------|-------------|--------------|
| 1850.20         | -23.13                 | 2.93                 | 43.75                | 4.87                 | 22.56      | 33.00       | 10.44       | H            |
| 1880.00         | -24.28                 | 2.85                 | 43.75                | 4.82                 | 21.44      | 33.00       | 11.56       | H            |
| 1909.80         | -23.07                 | 2.89                 | 43.77                | 4.76                 | 22.57      | 33.00       | 10.43       | H            |

Frequency: 1909.80MHz

$$\text{Peak EIRP (dBm)} = P_{\text{Mea}}(-23.07\text{dBm}) - P_{\text{cl}}(2.89\text{dB}) + P_{\text{Ag}}(43.77\text{dB}) + G_a(4.76\text{dB}) = 22.57\text{dBm}$$

Note: Expanded measurement uncertainty is U = 2.84 dB, k = 2.

## A.2 Emission Limit


### A.2.1 Measurement Method

The measurement procedures in TIA-603E-2016 are used.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set as outlined in Part 24.238 and Part 22.917. The spectrum is scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of PCS1900 and GSM850.

#### The procedure of radiated spurious emissions is as follows:

1. EUT was placed on a 1.5-meter-high non-conductive stand at a 3-meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

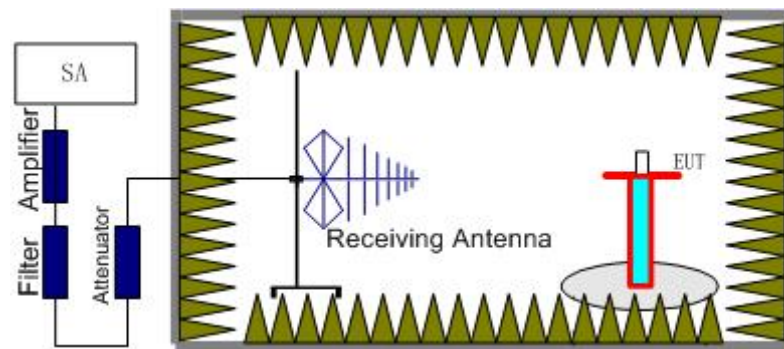

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as ( $P_r$ ).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

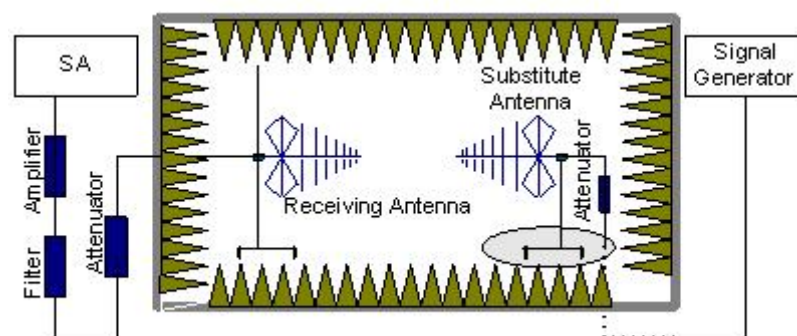

In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna and adjusts the level of the signal generator output until the value of the

receiver reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss ( $P_{pl}$ ) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain ( $G_a$ ) should be recorded after test.

A amplifier should be connected in for the test.

The Path loss ( $P_{pl}$ ) is the summation of the cable loss and the gain of the amplifier.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} - P_{pl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dBi}$ .

### A.2.2 Measurement Limit

Part 22.917 and Part 24.238 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power ( $P$ ) by a factor of at least  $43 + 10 \log(P)$  dB.

### A.2.3 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the PCS1900 band (1850.2 MHz, 1880 MHz and 1909.8 MHz) and GSM850 band (824.2MHz, 836.6MHz, 848.8MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the PCS1900 ,GSM850 into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

#### A.2.4 Measurement Results Table

| Frequency   | Channel | Frequency Range | Result |
|-------------|---------|-----------------|--------|
| GSM 850MHz  | Low     | 30MHz-10GHz     | Pass   |
|             | Middle  | 30MHz-10GHz     | Pass   |
|             | High    | 30MHz-10GHz     | Pass   |
| GSM 1900MHz | Low     | 30MHz-20GHz     | Pass   |
|             | Middle  | 30MHz-20GHz     | Pass   |
|             | High    | 30MHz-20GHz     | Pass   |

#### A.2.5 Sweep Table

| Working Frequency | Subrange (GHz) | RBW    | VBW    | Sweep time (s) |
|-------------------|----------------|--------|--------|----------------|
| 850MHz            | 0.03~1         | 100KHz | 300KHz | 10             |
|                   | 1-2            | 1 MHz  | 3 MHz  | 2              |
|                   | 2~5            | 1 MHz  | 3 MHz  | 3              |
|                   | 5~8            | 1 MHz  | 3 MHz  | 3              |
|                   | 8~10           | 1 MHz  | 3 MHz  | 3              |
| 1900MHz           | 0.03~1         | 100KHz | 300KHz | 10             |
|                   | 1-2            | 1 MHz  | 3 MHz  | 2              |
|                   | 2~5            | 1 MHz  | 3 MHz  | 3              |
|                   | 5~8            | 1 MHz  | 3 MHz  | 3              |
|                   | 8~11           | 1 MHz  | 3 MHz  | 3              |
|                   | 11~14          | 1 MHz  | 3 MHz  | 3              |
|                   | 14~18          | 1 MHz  | 3 MHz  | 3              |
|                   | 18~20          | 1 MHz  | 3 MHz  | 2              |

**GSM Mode Channel 128/824.2MHz**

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | Path Loss(dB) | Antenna Gain(dBi) | Correction (dB) | Peak ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|---------------|-------------------|-----------------|----------------|-------------|-------------|--------------|
| 1648.01         | -58.44                 | 3.56          | 5.23              | 2.15            | -58.92         | -13.00      | 45.90       | V            |
| 2474.00         | -52.33                 | 4.60          | 6.02              | 2.15            | -53.06         | -13.00      | 40.10       | V            |
| 3298.02         | -54.29                 | 5.29          | 7.72              | 2.15            | -54.01         | -13.00      | 41.00       | V            |
| 4106.02         | -54.98                 | 6.04          | 9.01              | 2.15            | -54.16         | -13.00      | 41.20       | V            |
| 4958.01         | -53.82                 | 6.68          | 9.86              | 2.15            | -52.79         | -13.00      | 39.80       | V            |
| 5777.01         | -53.16                 | 7.22          | 10.54             | 2.15            | -51.99         | -13.00      | 39.00       | V            |

**GSM Mode Channel 190/836.6MHz**

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | Path Loss(dB) | Antenna Gain(dBi) | Correction (dB) | Peak ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|---------------|-------------------|-----------------|----------------|-------------|-------------|--------------|
| 1676.01         | -59.08                 | 3.58          | 5.18              | 2.15            | -59.63         | -13.00      | 46.60       | V            |
| 2510.00         | -52.04                 | 4.63          | 6.12              | 2.15            | -52.70         | -13.00      | 39.70       | V            |
| 3337.02         | -54.05                 | 5.31          | 7.81              | 2.15            | -53.70         | -13.00      | 40.70       | H            |
| 4187.02         | -53.02                 | 6.18          | 9.09              | 2.15            | -52.26         | -13.00      | 39.30       | V            |
| 5032.01         | -53.66                 | 6.58          | 9.94              | 2.15            | -52.45         | -13.00      | 39.40       | V            |
| 5870.01         | -52.61                 | 7.30          | 10.53             | 2.15            | -51.53         | -13.00      | 38.50       | H            |

**GSM Mode Channel 251/848.8MHz**

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | Path Loss(dB) | Antenna Gain(dBi) | Correction (dB) | Peak ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|---------------|-------------------|-----------------|----------------|-------------|-------------|--------------|
| 1700.01         | -59.38                 | 3.60          | 5.14              | 2.15            | -59.99         | -13.00      | 47.00       | H            |
| 2550.00         | -53.34                 | 4.67          | 6.19              | 2.15            | -53.97         | -13.00      | 41.00       | H            |
| 3376.02         | -55.56                 | 5.34          | 7.90              | 2.15            | -55.15         | -13.00      | 42.10       | H            |
| 4252.02         | -54.54                 | 6.24          | 9.15              | 2.15            | -53.78         | -13.00      | 40.80       | H            |
| 5085.01         | -53.96                 | 6.73          | 10.02             | 2.15            | -52.82         | -13.00      | 39.80       | V            |
| 5951.01         | -53.05                 | 7.47          | 10.51             | 2.15            | -52.16         | -13.00      | 39.20       | H            |

**GSM Mode Channel 512/1850.2MHz**

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | Path Loss(dB) | Antenna Gain(dBi) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|---------------|-------------------|-----------------|-------------|-------------|--------------|
| 3708.02         | -55.89                 | 6.41          | 8.49              | -53.81          | -13.00      | 40.81       | V            |
| 5554.02         | -55.82                 | 7.19          | 10.59             | -52.42          | -13.00      | 39.42       | V            |
| 7410.01         | -54.79                 | 8.14          | 12.09             | -50.84          | -13.00      | 37.84       | V            |
| 9246.01         | -53.87                 | 9.03          | 13.25             | -49.65          | -13.00      | 36.65       | V            |
| 11099.01        | -51.38                 | 9.84          | 13.18             | -48.04          | -13.00      | 35.04       | V            |
| 12947.01        | -48.60                 | 10.49         | 13.47             | -45.62          | -13.00      | 32.62       | V            |

**GSM Mode Channel 661/1880.0MHz**

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | Path Loss(dB) | Antenna Gain(dBi) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|---------------|-------------------|-----------------|-------------|-------------|--------------|
| 3752.02         | -56.03                 | 6.29          | 8.55              | -53.77          | -13.00      | 40.77       | V            |
| 5644.02         | -54.82                 | 7.27          | 10.57             | -51.52          | -13.00      | 38.52       | H            |
| 7530.01         | -54.03                 | 8.27          | 12.22             | -50.08          | -13.00      | 37.08       | H            |
| 9396.01         | -53.98                 | 9.04          | 13.34             | -49.68          | -13.00      | 36.68       | V            |
| 11289.01        | -49.87                 | 9.93          | 13.14             | -46.66          | -13.00      | 33.66       | V            |
| 13149.01        | -48.13                 | 10.72         | 13.71             | -45.14          | -13.00      | 32.14       | V            |

**GSM Mode Channel 810/1909.8MHz**

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | Path Loss(dB) | Antenna Gain(dBi) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|---------------|-------------------|-----------------|-------------|-------------|--------------|
| 3811.02         | -56.92                 | 6.10          | 8.64              | -54.38          | -13.00      | 41.38       | V            |
| 5731.02         | -53.71                 | 7.29          | 10.55             | -50.45          | -13.00      | 37.45       | V            |
| 7643.01         | -54.63                 | 8.17          | 12.31             | -50.49          | -13.00      | 37.49       | V            |
| 9552.01         | -53.75                 | 9.35          | 13.35             | -49.75          | -13.00      | 36.75       | V            |
| 11450.01        | -50.90                 | 9.94          | 13.11             | -47.73          | -13.00      | 34.73       | V            |
| 13365.01        | -48.75                 | 10.57         | 14.01             | -45.31          | -13.00      | 32.31       | H            |

Note: Expanded measurement uncertainty is U = 5.16 dB, k = 2.

### **A.3 Frequency Stability**

#### **A.3.1 Method of Measurement**

Frequency stability is a measure of the frequency drift due to temperature and supply voltage variations, with reference to the frequency measured at +20 °C and rated supply voltage. Two reference points are established at the applicable unwanted emissions limit using a RBW equal to the RBW required by the unwanted emissions specification of the applicable regulatory standard. These reference points measured using the lowest and highest channel of operation shall be identified as  $F_L$  and  $F_H$  respectively.

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of CMU200.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on mid channel of each band, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of the lower, higher and nominal voltage. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress.

### A.3.2 Measurement results

#### GSM 850

##### Frequency Error vs Temperature

| Temperature(°C) | Voltage(V) | F <sub>L</sub> (MHz) | F <sub>H</sub> (MHz) | Offset(Hz) | Frequency error(ppm) |
|-----------------|------------|----------------------|----------------------|------------|----------------------|
| 20              | 3.85       | 824.051              | 848.963              |            |                      |
| 50              |            |                      |                      | 17.76      | 0.0212               |
| 40              |            |                      |                      | 20.15      | 0.0241               |
| 30              |            |                      |                      | 21.25      | 0.0254               |
| 10              |            |                      |                      | 25.06      | 0.0300               |
| 0               |            |                      |                      | 23.44      | 0.0280               |
| -10             |            |                      |                      | 27.77      | 0.0332               |
| -20             |            |                      |                      | 28.48      | 0.0340               |
| -30             |            |                      |                      | 29.38      | 0.0351               |

##### Frequency Error vs Voltage

| Voltage(V) | Temperature(°C) | F <sub>L</sub> (MHz) | F <sub>H</sub> (MHz) | Offset(Hz) | Frequency error(ppm) |
|------------|-----------------|----------------------|----------------------|------------|----------------------|
| 3.6        | 20              | 824.051              | 848.963              | 1.17       | 0.0014               |
| 4.2        |                 |                      |                      | 15.89      | 0.0190               |

#### PCS 1900

##### Frequency Error vs Temperature

| Temperature(°C) | Voltage(V) | F <sub>L</sub> (MHz) | F <sub>H</sub> (MHz) | Offset(Hz) | Frequency error(ppm) |
|-----------------|------------|----------------------|----------------------|------------|----------------------|
| 20              | 3.85       | 1850.037             | 1909.958             |            |                      |
| 50              |            |                      |                      | 5.62       | 0.0030               |
| 40              |            |                      |                      | 4.84       | 0.0026               |
| 30              |            |                      |                      | 5.17       | 0.0028               |
| 10              |            |                      |                      | 20.66      | 0.0110               |
| 0               |            |                      |                      | 6.78       | 0.0036               |
| -10             |            |                      |                      | 21.76      | 0.0116               |
| -20             |            |                      |                      | 24.02      | 0.0128               |
| -30             |            |                      |                      | 21.63      | 0.0115               |

##### Frequency Error vs Voltage

| Voltage(V) | Temperature(°C) | F <sub>L</sub> (MHz) | F <sub>H</sub> (MHz) | Offset(Hz) | Frequency error(ppm) |
|------------|-----------------|----------------------|----------------------|------------|----------------------|
| 3.6        | 20              | 1850.037             | 1909.958             | -0.19      | 0.0001               |
| 4.2        |                 |                      |                      | 5.68       | 0.0030               |



#### **A.4 Occupied Bandwidth**

Occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequency. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.

The measurement method is from ANSI C63.26:


- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts.
- b) The nominal IF filter 3 dB bandwidth (RBW) shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set  $\geq 3 \times \text{RBW}$ .
- c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation.
- d) Set the detection mode to peak, and the trace mode to max-hold.

### GSM 850(99% BW)

| Frequency (MHz) | Occupied Bandwidth (99% BW) (kHz) |
|-----------------|-----------------------------------|
| 824.2           | 245.19                            |
| 836.6           | 242.79                            |
| 848.8           | 242.79                            |


### GSM 850

#### Channel 128-Occupied Bandwidth (99% BW)

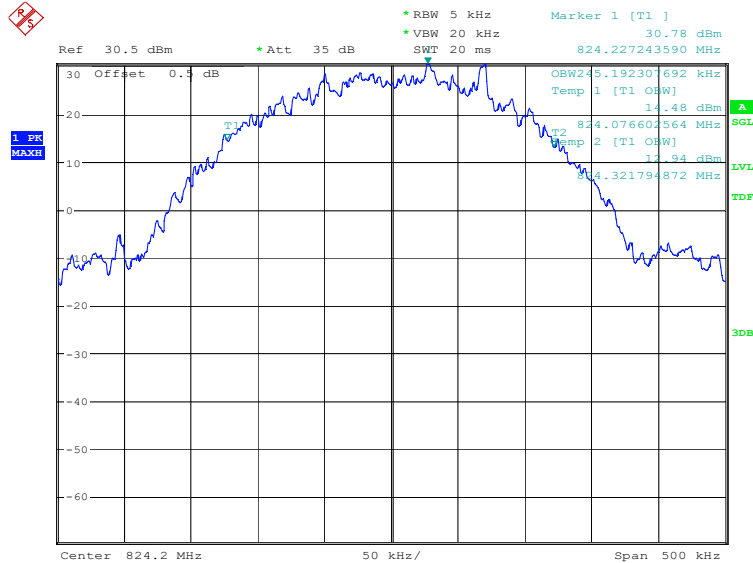


Date: 28.OCT.2020 14:18:45

### Channel 190-Occupied Bandwidth (99% BW)

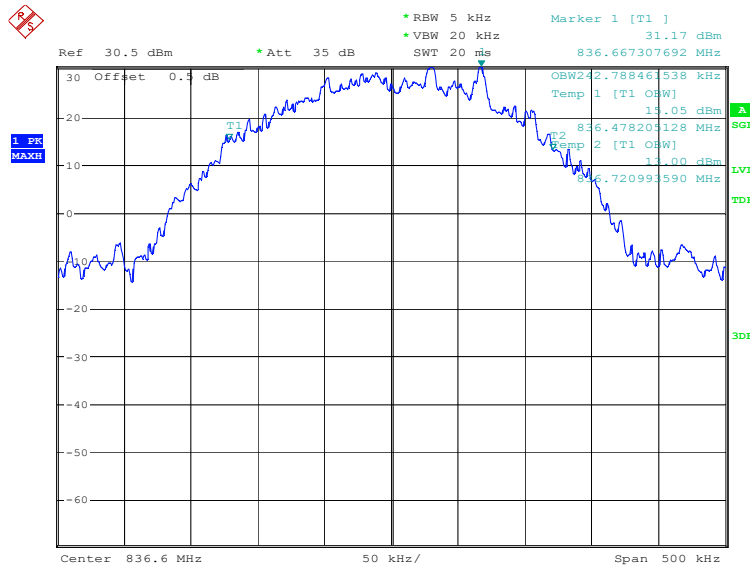

Date: 28.OCT.2020 14:19:10

### Channel 251-Occupied Bandwidth (99% BW)

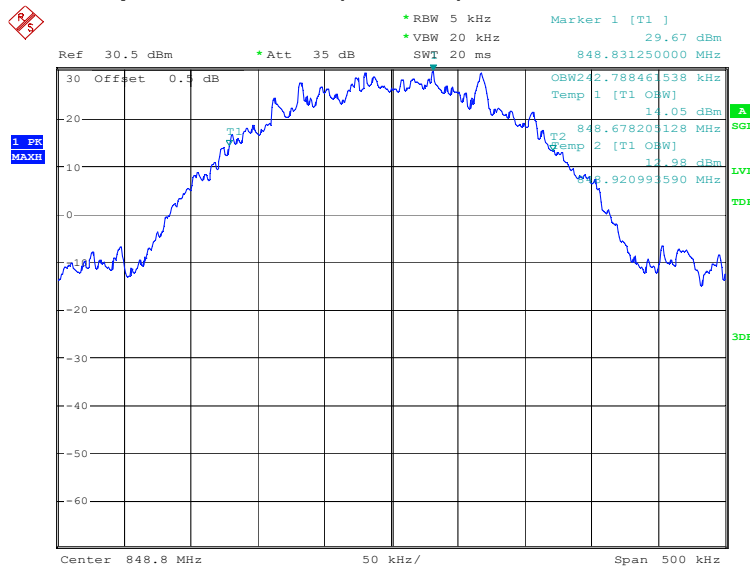


Date: 28.OCT.2020 14:19:36

### GPRS 850(99% BW)


| Frequency (MHz) | Occupied Bandwidth (99% BW) (kHz) |
|-----------------|-----------------------------------|
| 824.2           | 242.79                            |
| 836.6           | 242.79                            |
| 848.8           | 246.79                            |

### GPRS 850


#### Channel 128-Occupied Bandwidth (99% BW)

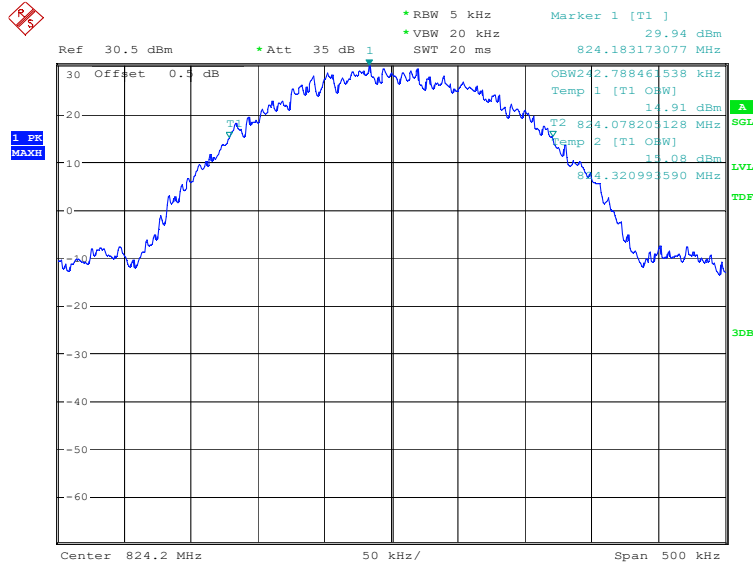

Date: 28.OCT.2020 14:48:32

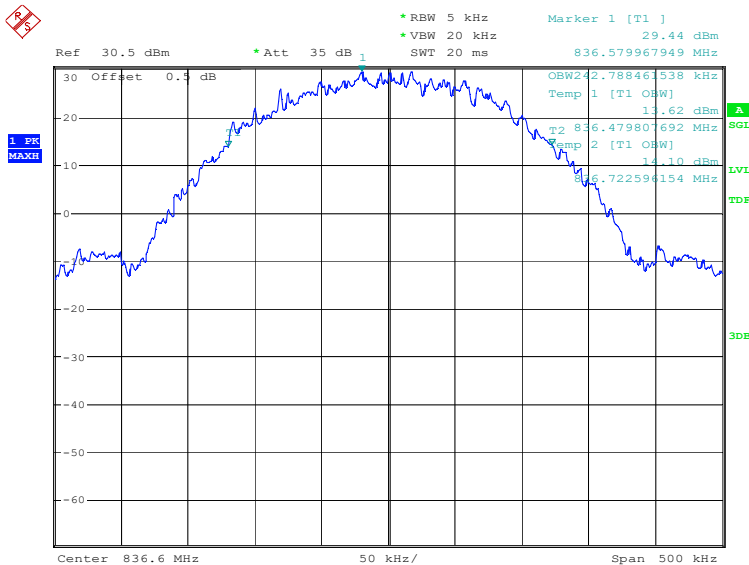

Date: 28.OCT.2020 14:48:58

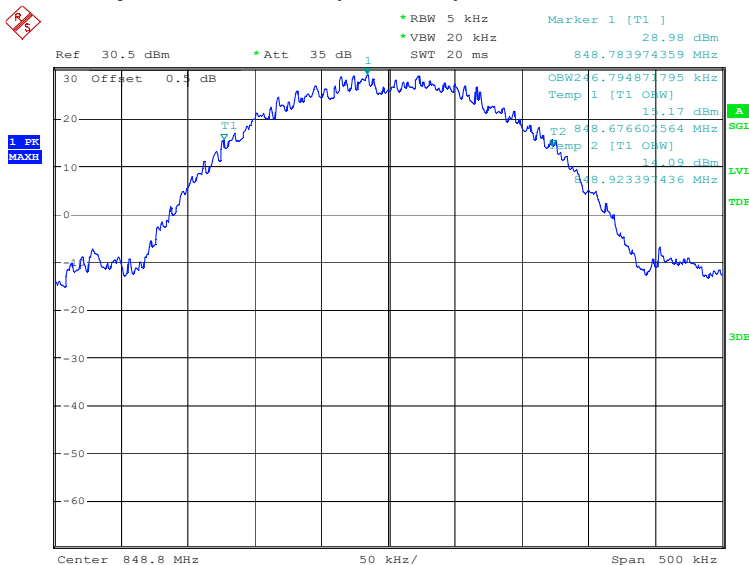


Date: 28.OCT.2020 14:49:24

### EGPRS 850-8PSK (99% BW)

| Frequency (MHz) | Occupied Bandwidth (99% BW) (kHz) |
|-----------------|-----------------------------------|
| 824.2           | 245.19                            |
| 836.6           | 243.59                            |
| 848.8           | 245.19                            |


### EGPRS 850-8PSK

#### Channel 128-Occupied Bandwidth (99% BW)

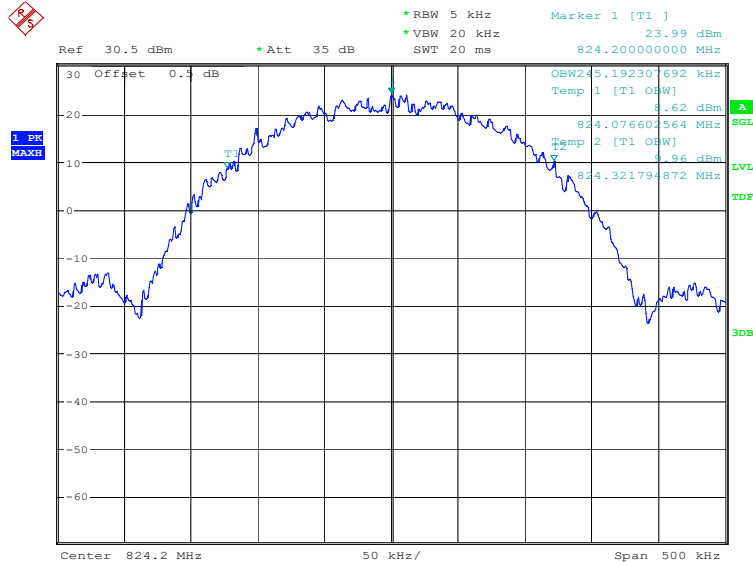


Date: 28.OCT.2020 15:13:57

### Channel 190-Occupied Bandwidth (99% BW)

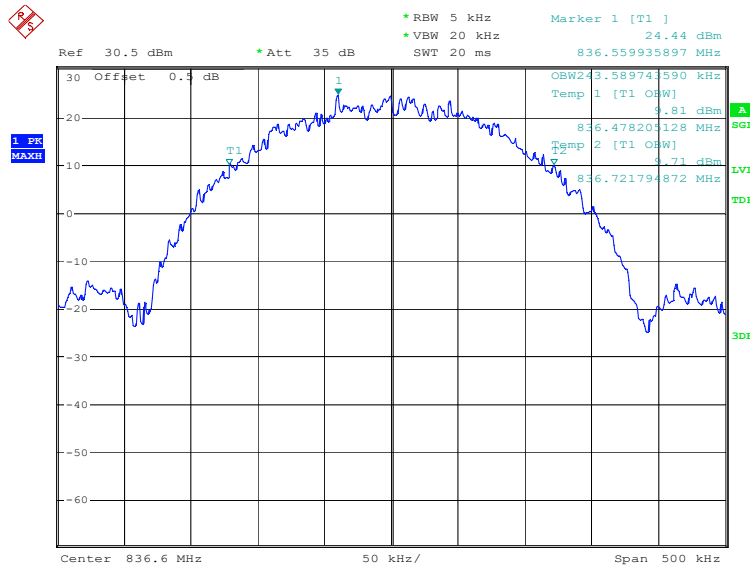

Date: 28.OCT.2020 15:14:23

### Channel 251-Occupied Bandwidth (99% BW)

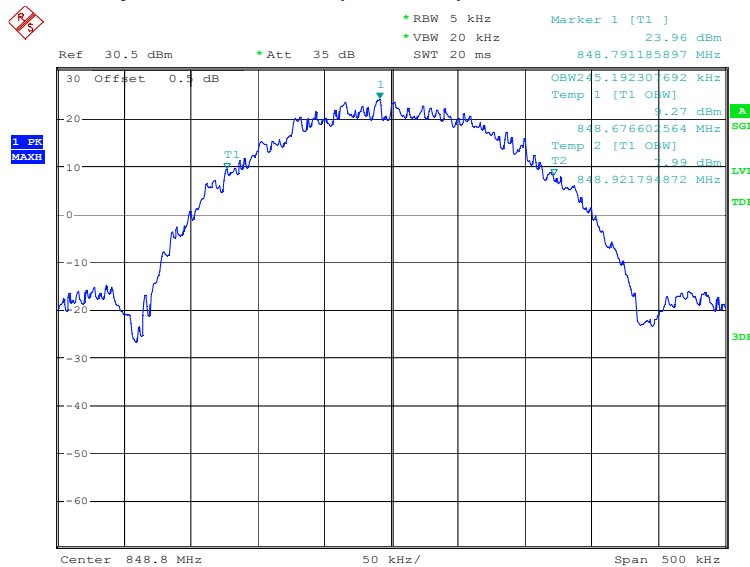


Date: 28.OCT.2020 15:14:49

### PCS 1900 (99% BW)

| Frequency (MHz) | Occupied Bandwidth (99% BW) (kHz) |
|-----------------|-----------------------------------|
| 1850.2          | 242.79                            |
| 1880.0          | 244.39                            |
| 1909.8          | 244.39                            |

### PCS 1900


#### Channel 512-Occupied Bandwidth (99% BW)

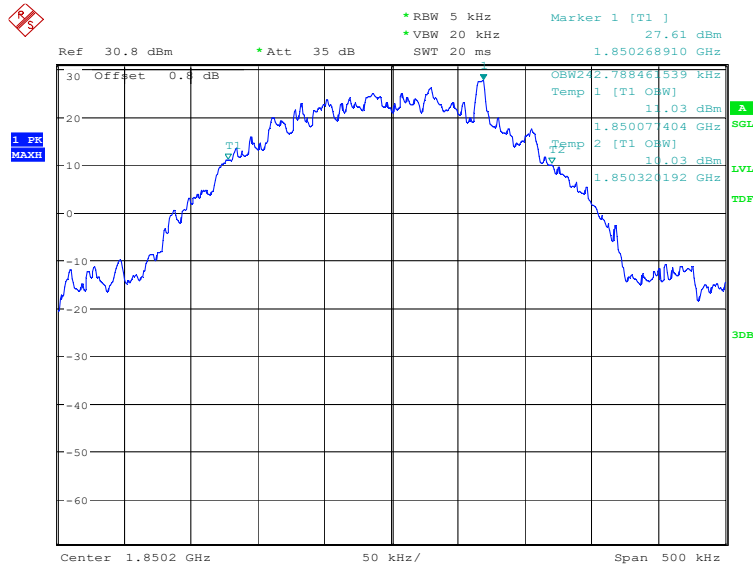

Date: 28.OCT.2020 14:21:06




## Channel 661-Occupied Bandwidth (99% BW)

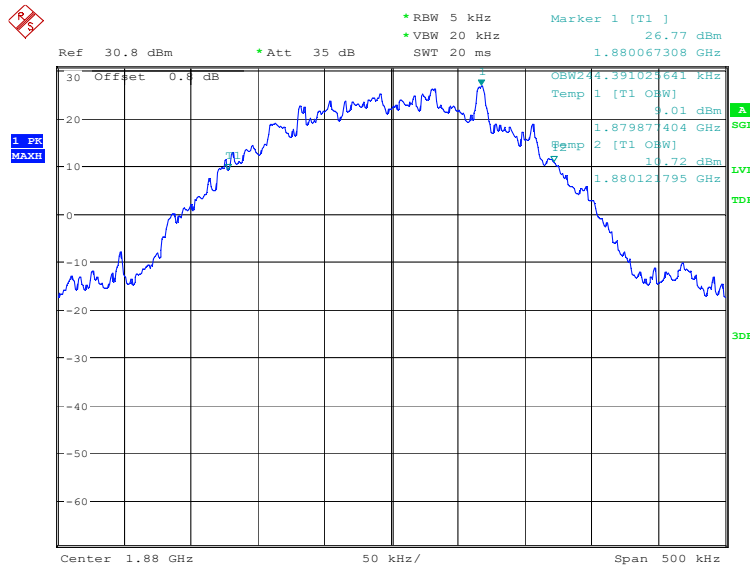

Date: 28.OCT.2020 14:21:32

## Channel 810-Occupied Bandwidth (99% BW)

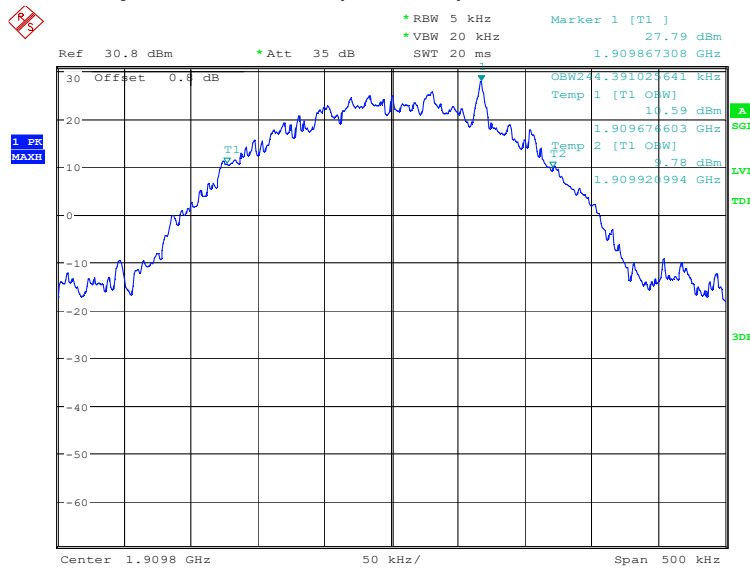


Date: 28.OCT.2020 14:21:58

### GPRS 1900(99% BW)

| Frequency (MHz) | Occupied Bandwidth (99% BW) (kHz) |
|-----------------|-----------------------------------|
| 1850.2          | 245.19                            |
| 1880.0          | 243.59                            |
| 1909.8          | 241.19                            |


### GPRS 1900

#### Channel 512-Occupied Bandwidth (99% BW)

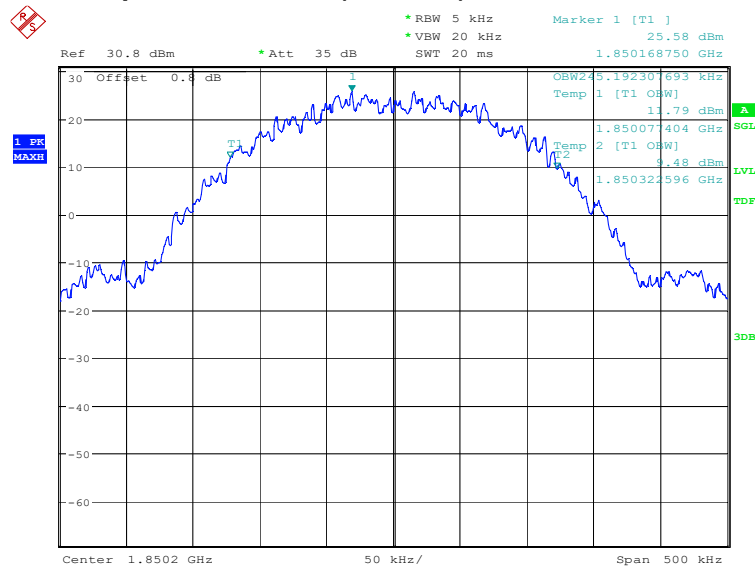


Date: 28.OCT.2020 14:50:55

## Channel 661-Occupied Bandwidth (99% BW)

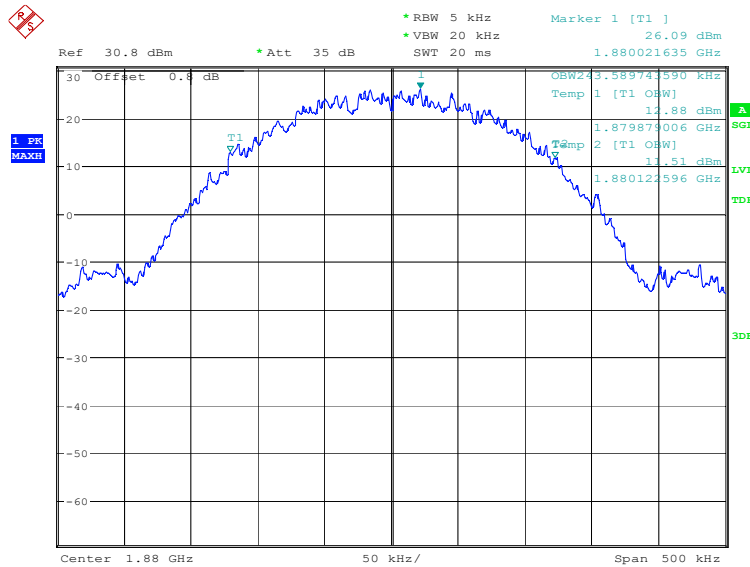

Date: 28.OCT.2020 14:51:21

## Channel 810-Occupied Bandwidth (99% BW)

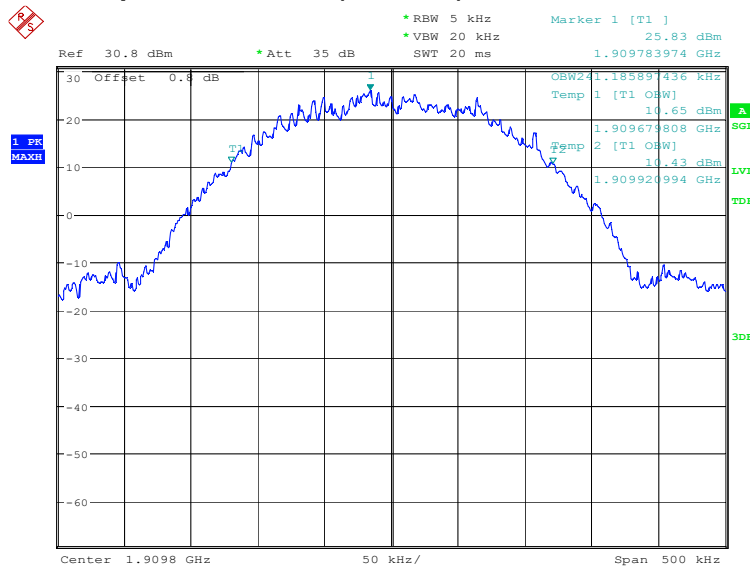


Date: 28.OCT.2020 14:51:47

### EGPRS 1900-8PSK (99% BW)

| Frequency (MHz) | Occupied Bandwidth (99% BW) (kHz) |
|-----------------|-----------------------------------|
| 1850.2          | 250.80                            |
| 1880.0          | 246.79                            |
| 1909.8          | 247.60                            |


### EGPRS 1900-8PSK

#### Channel 512-Occupied Bandwidth (99% BW)

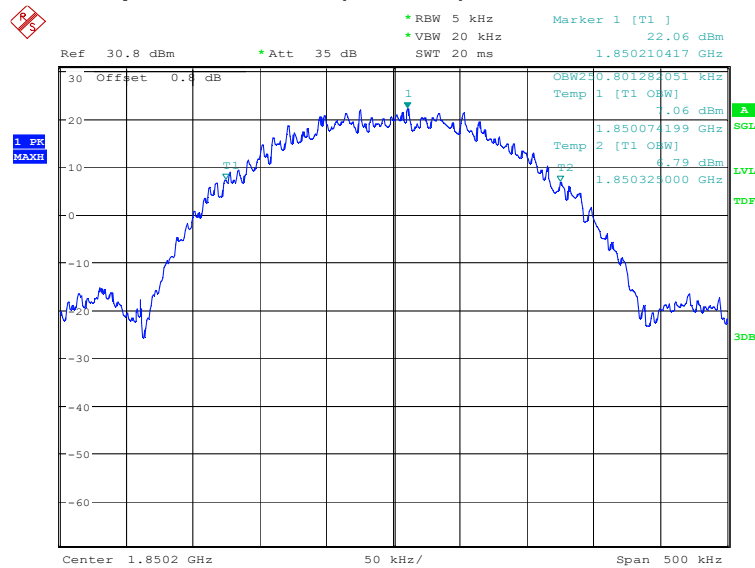


Date: 28.OCT.2020 15:17:58

## Channel 661-Occupied Bandwidth (99% BW)

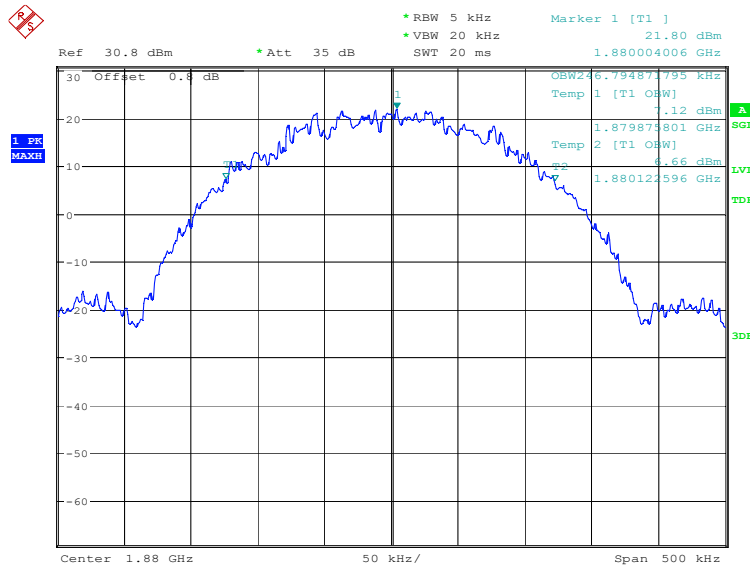

Date: 28.OCT.2020 15:18:24

## Channel 810-Occupied Bandwidth (99% BW)

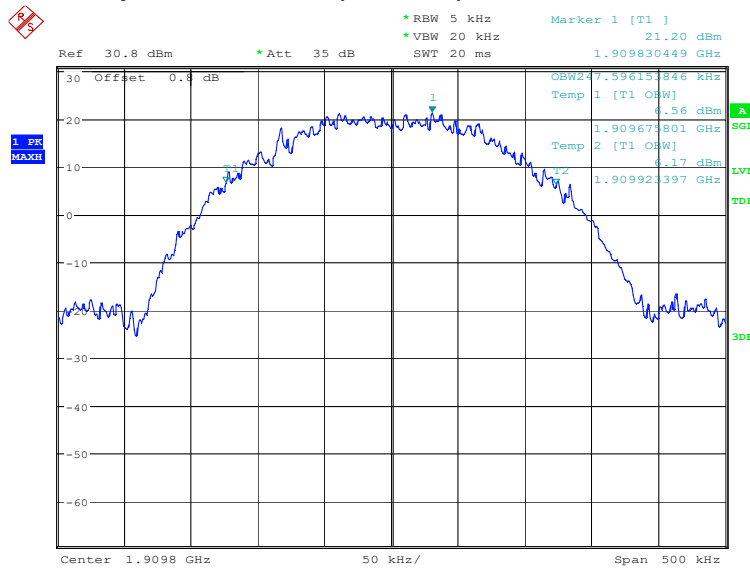

Date: 28.OCT.2020 15:18:50

## **A.5 Emission Bandwidth**

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

The measurement method is from ANSI C63.26:


- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be wide enough to see sufficient roll off of the signal to make the measurement.
- b) The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set  $\geq 3 \times \text{RBW}$ .
- c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation.
- d) The dynamic range of the spectrum analyzer at the selected RBW shall be more than 10 dB below the target “-X dB” requirement, i.e., if the requirement calls for measuring the -26 dB OBW, the spectrum analyzer noise floor at the selected RBW shall be at least 36 dB below the reference level.
- e) Set spectrum analyzer detection mode to peak, and the trace mode to max hold.

## GSM 850

| Frequency (MHz) | Emission Bandwidth (kHz) |
|-----------------|--------------------------|
| 824.2           | 309.29                   |
| 836.6           | 313.30                   |
| 848.8           | 306.89                   |


## GSM 850

### Channel 128-Emission Bandwidth

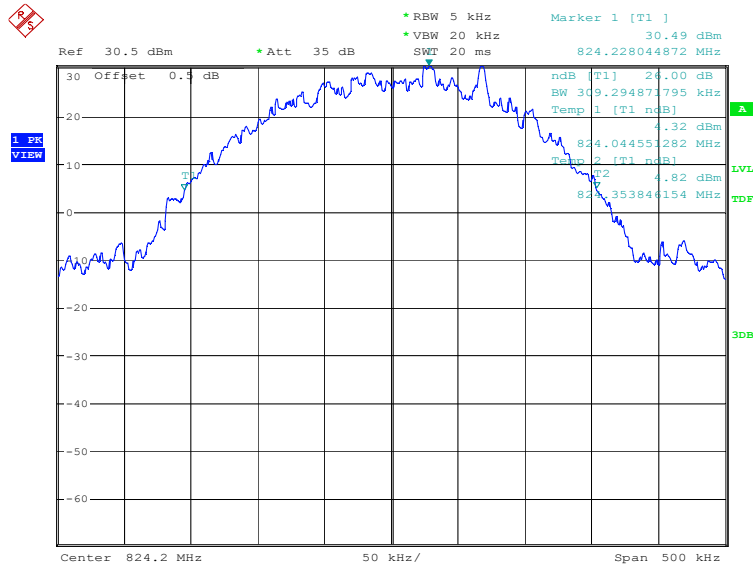


Date: 28.OCT.2020 14:23:29

## Channel 190-Emission Bandwidth

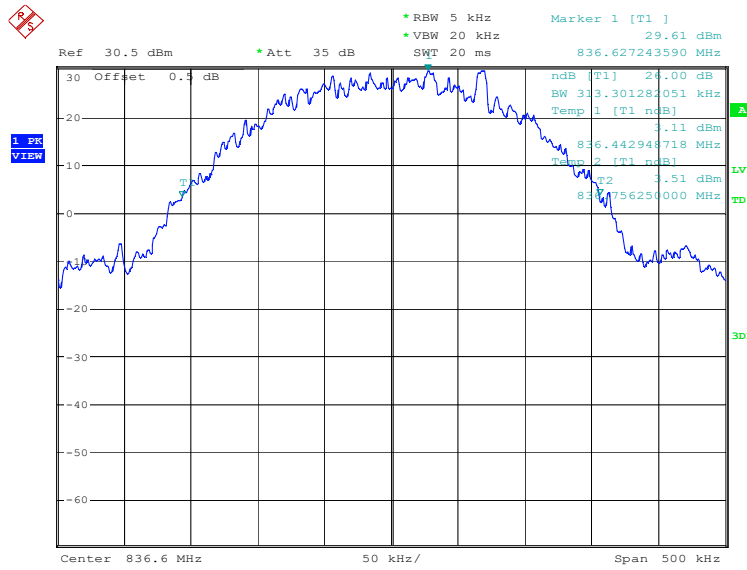

Date: 28.OCT.2020 14:23:55

## Channel 251-Emission Bandwidth

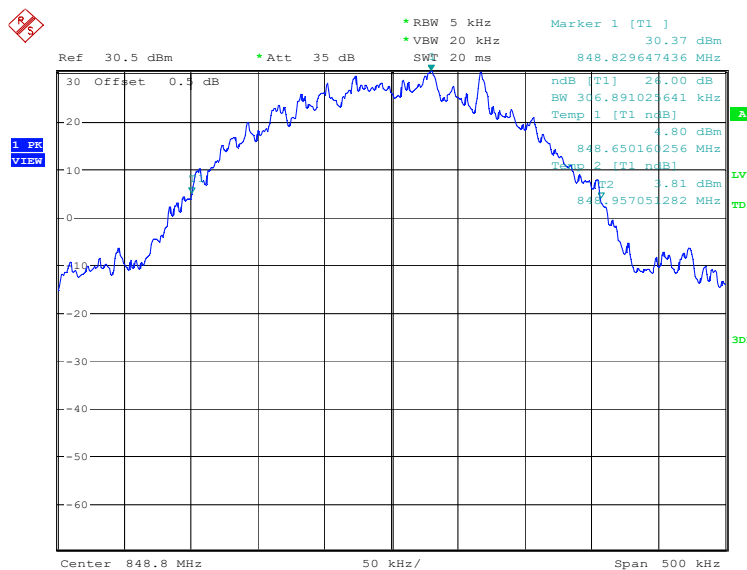

Date: 28.OCT.2020 14:24:21




## GPRS 850

| Frequency (MHz) | Emission Bandwidth (kHz) |
|-----------------|--------------------------|
| 824.2           | 320.51                   |
| 836.6           | 306.09                   |
| 848.8           | 306.09                   |


## GPRS 850

### Channel 128-Emission Bandwidth

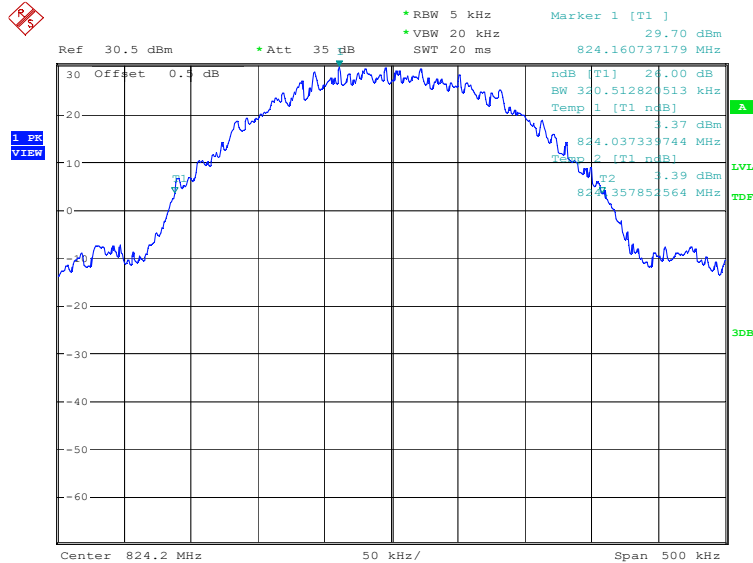


Date: 28.OCT.2020 14:53:16

## Channel 190-Emission Bandwidth

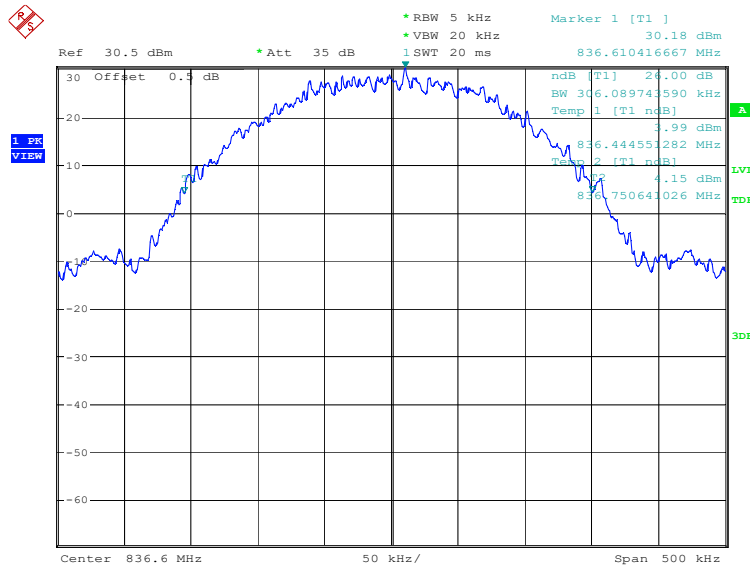

Date: 28.OCT.2020 14:53:43

## Channel 251-Emission Bandwidth

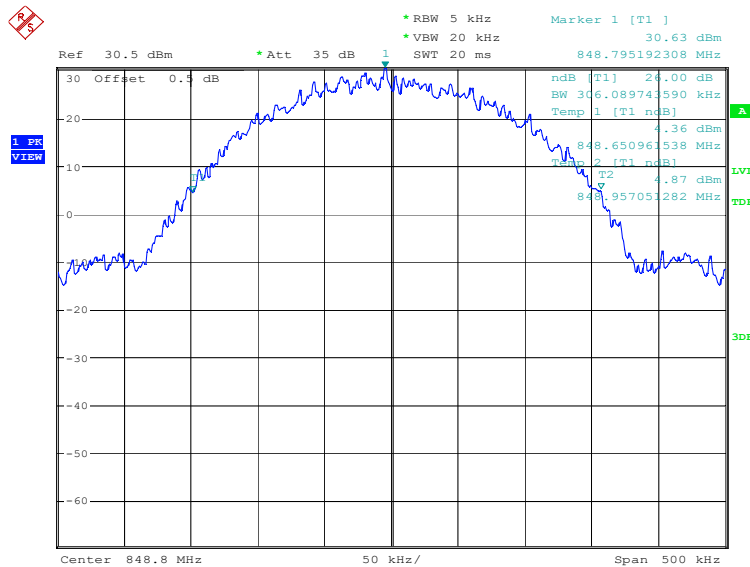


Date: 28.OCT.2020 14:54:09

### EGPRS 850-8PSK

| Frequency (MHz) | Emission Bandwidth (kHz) |
|-----------------|--------------------------|
| 824.2           | 317.31                   |
| 836.6           | 300.48                   |
| 848.8           | 298.08                   |


### EGPRS 850-8PSK

#### Channel 128-Emission Bandwidth

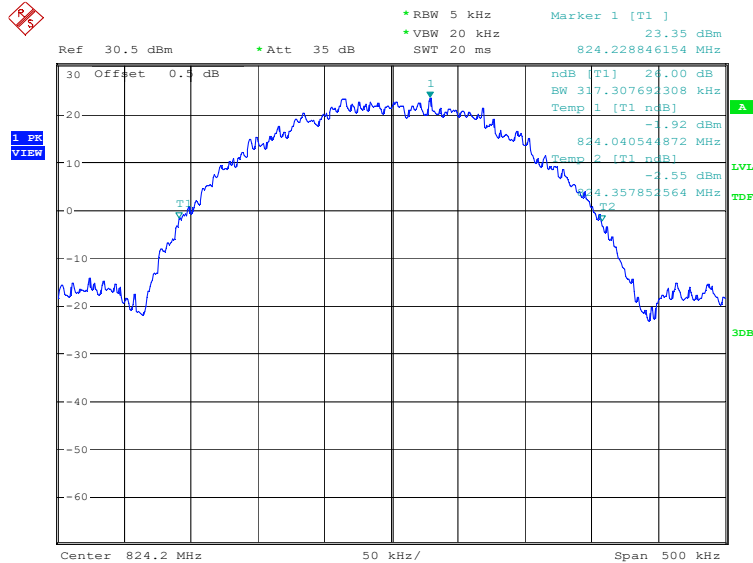


Date: 28.OCT.2020 15:21:58

## Channel 190-Emission Bandwidth

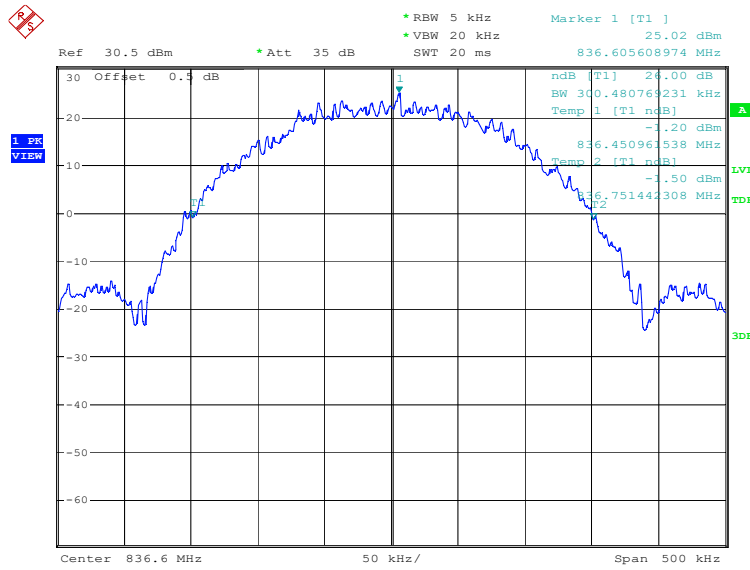

Date: 28.OCT.2020 15:22:24

## Channel 251-Emission Bandwidth

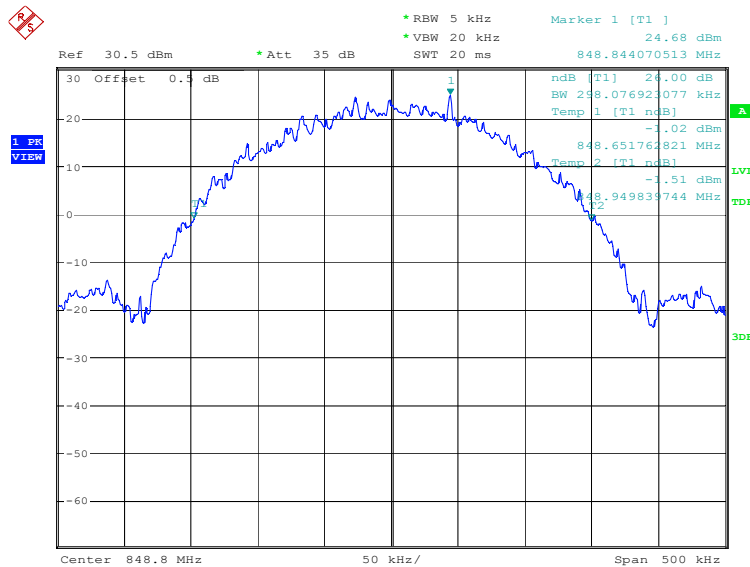


Date: 28.OCT.2020 15:22:51

## PCS 1900

| Frequency (MHz) | Emission Bandwidth (kHz) |
|-----------------|--------------------------|
| 1850.2          | 302.88                   |
| 1880.0          | 302.88                   |
| 1909.8          | 306.89                   |


## PCS 1900

## Channel 512-Emission Bandwidth

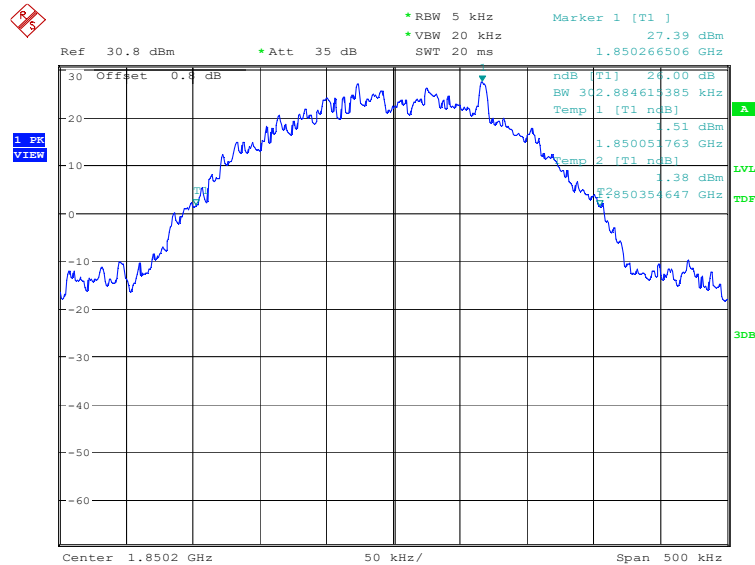


Date: 28.OCT.2020 14:27:18

## Channel 661-Emission Bandwidth

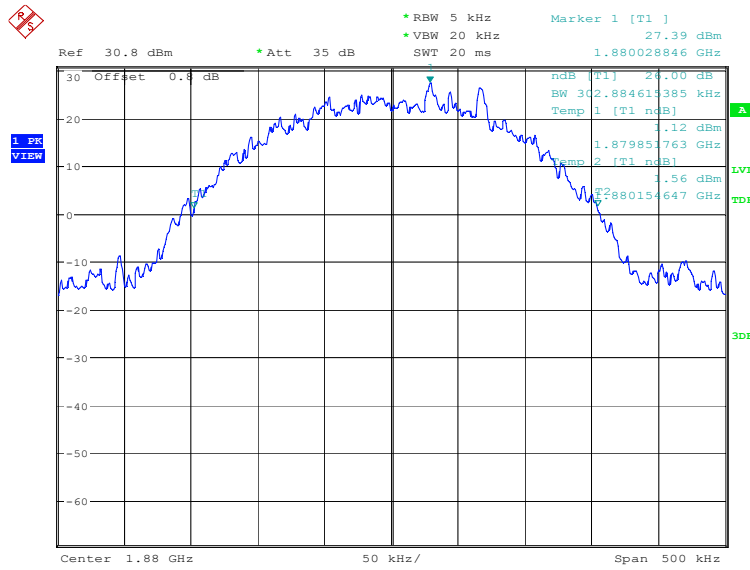

Date: 28.OCT.2020 14:27:44

## Channel 810-Emission Bandwidth

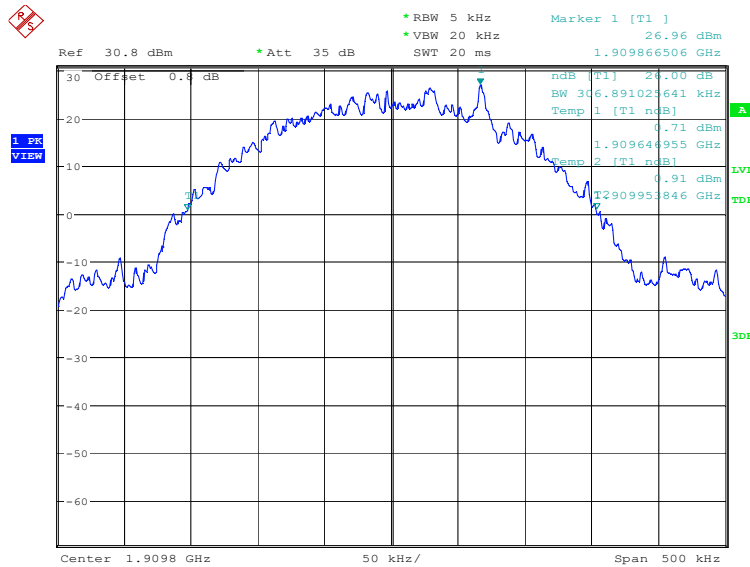


Date: 28.OCT.2020 14:28:11

## GPRS 1900

| Frequency (MHz) | Emission Bandwidth (kHz) |
|-----------------|--------------------------|
| 1850.2          | 310.90                   |
| 1880.0          | 315.71                   |
| 1909.8          | 317.31                   |


## GPRS 1900

### Channel 512-Emission Bandwidth

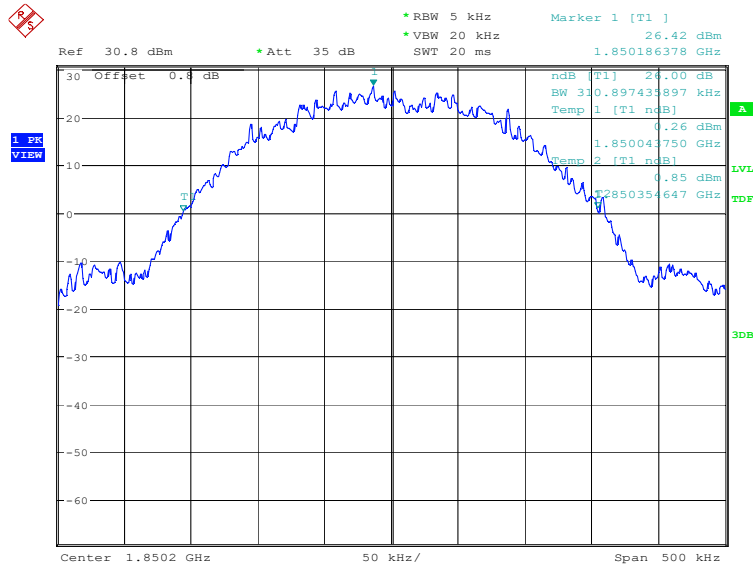


Date: 28.OCT.2020 14:57:03

## Channel 661-Emission Bandwidth

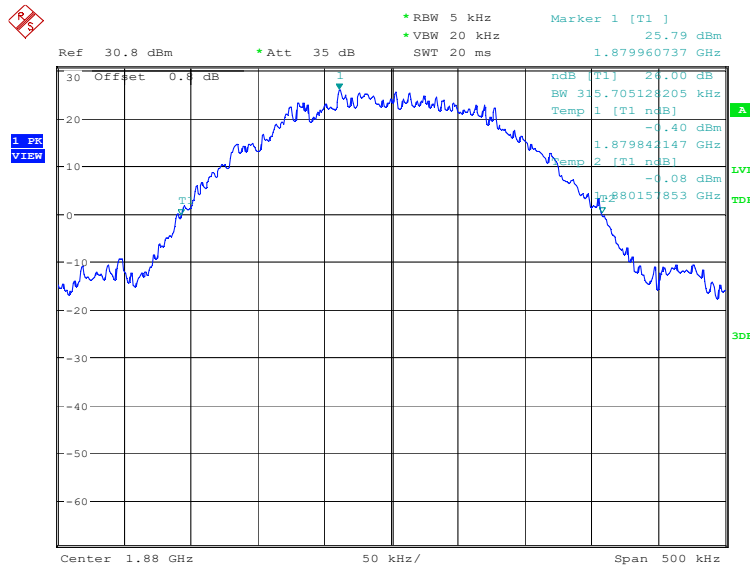

Date: 28.OCT.2020 14:57:30

## Channel 810-Emission Bandwidth

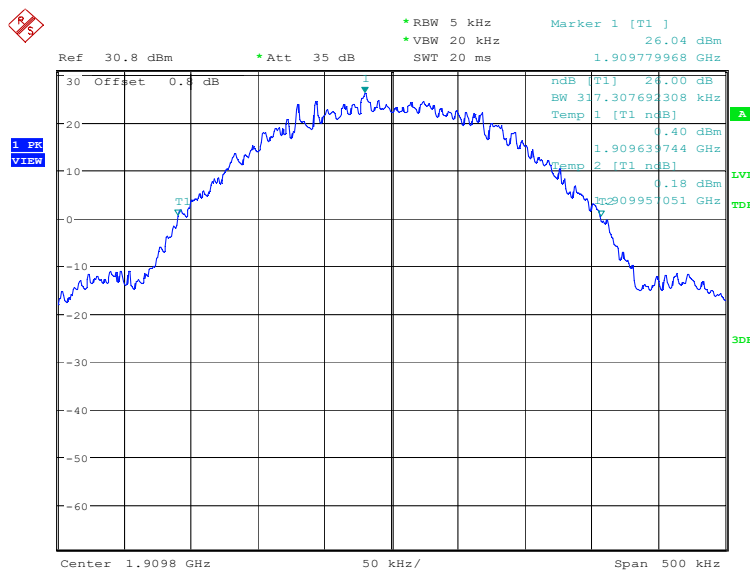

Date: 28.OCT.2020 14:57:56




## EGPRS 1900-8PSK

| Frequency (MHz) | Emission Bandwidth (kHz) |
|-----------------|--------------------------|
| 1850.2          | 306.89                   |
| 1880.0          | 304.49                   |
| 1909.8          | 316.51                   |


## EGPRS 1900-8PSK

### Channel 512-Emission Bandwidth

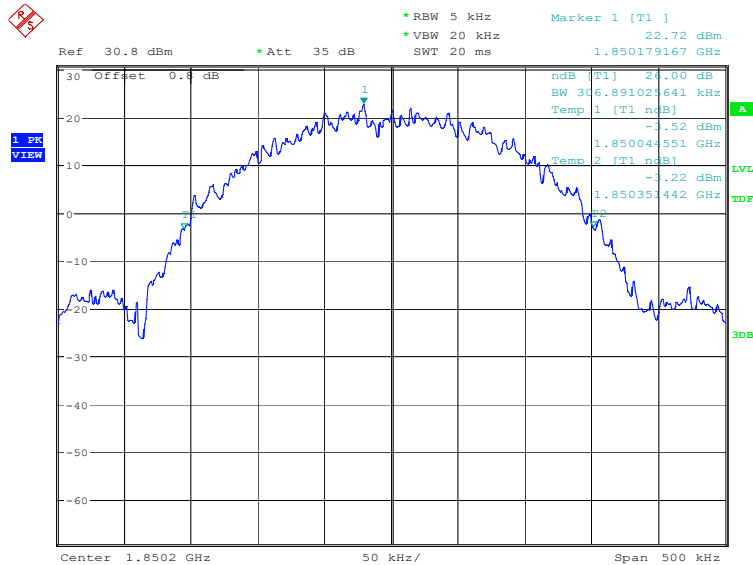


Date: 28.OCT.2020 15:25:49

## Channel 661-Emission Bandwidth

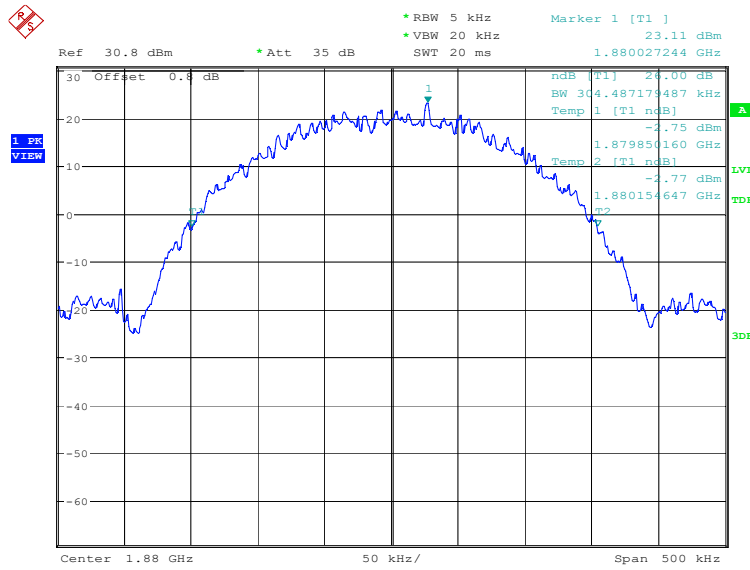

Date: 28.OCT.2020 15:26:16

## Channel 810-Emission Bandwidth

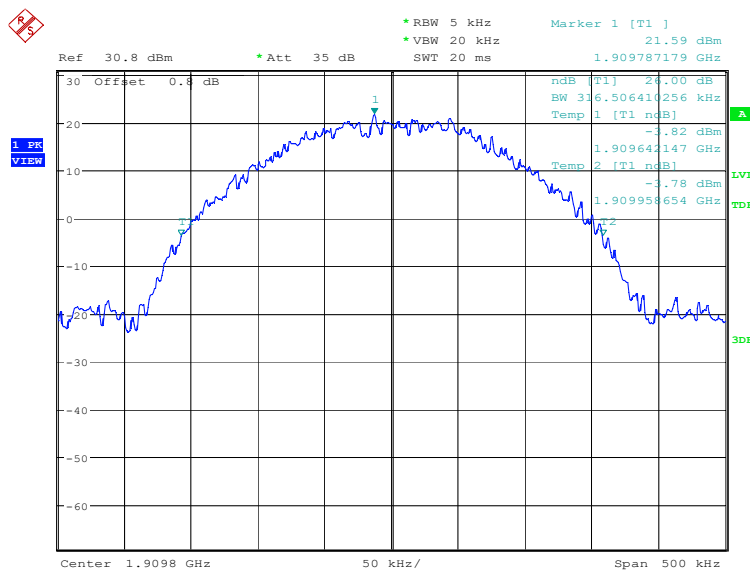

Date: 28.OCT.2020 15:26:42

## **A.6 Band Edge Compliance**

### **A.6.1 Measurement limit**


Part 22.917 and Part 24.238 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

According to KDB 971168, a relaxation of the reference bandwidth is often provided for measurements within a specified frequency range at the edge of the authorized frequency block/band. This is often implemented by permitting the use of a narrower RBW (typically limited to a minimum RBW of 1% of the OBW) for measuring the out-of-band emissions without a requirement to integrate the result over the full reference bandwidth.

## A.6.2 Measurement result


### GSM 850

### Channel 128

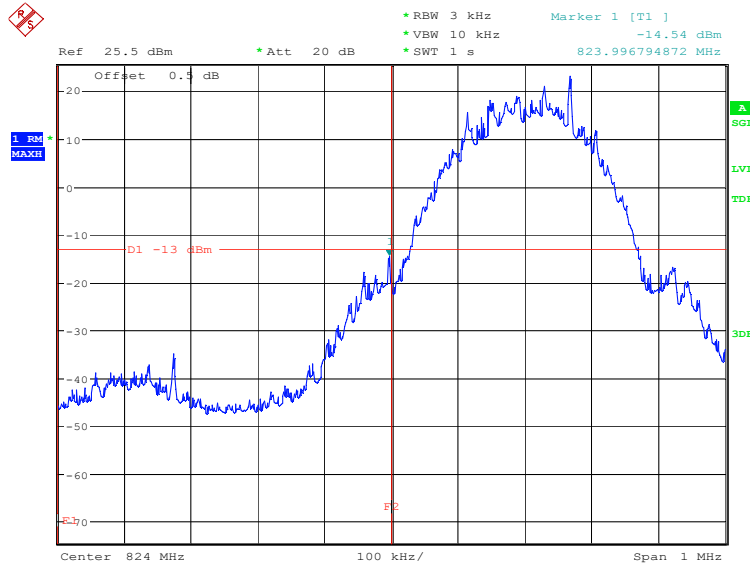


Date: 2.NOV.2020 09:02:08

### Channel 251

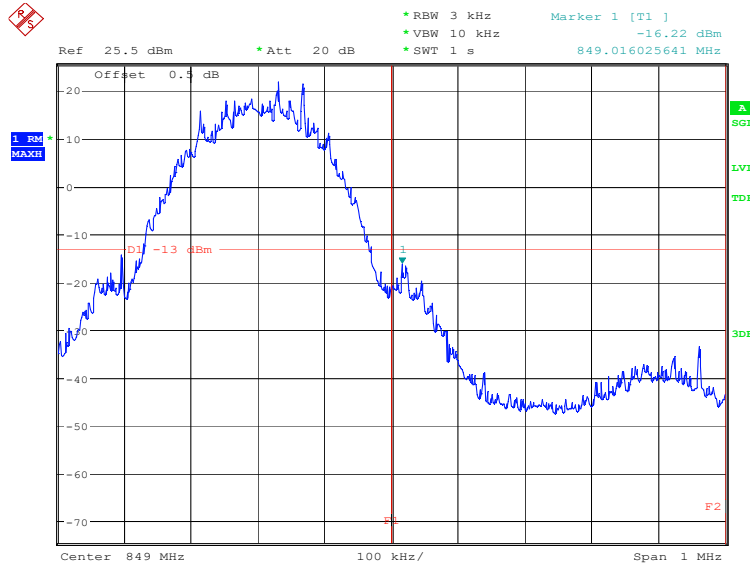


Date: 2.NOV.2020 09:04:23

## GPRS 850 Channel 128

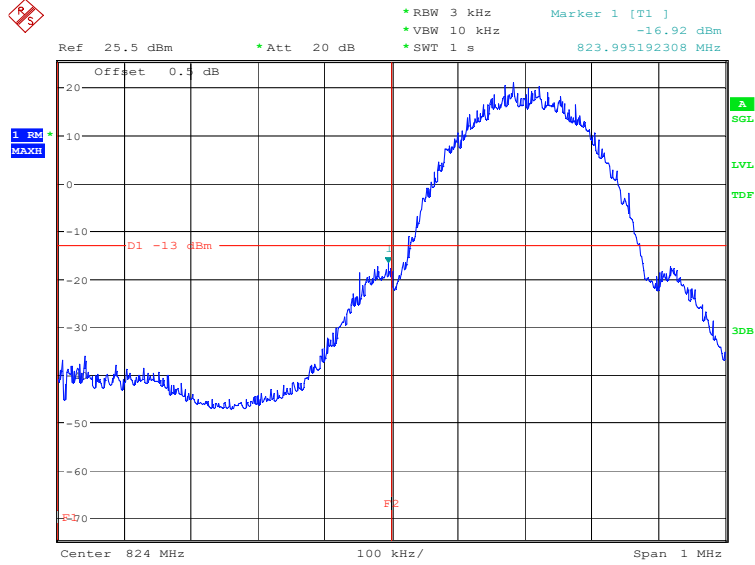


Date: 28.OCT.2020 15:00:16

## Channel 251

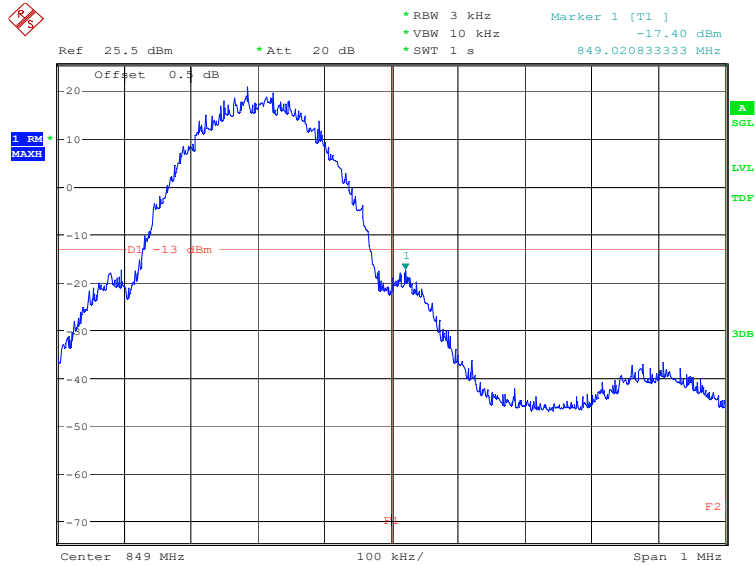


Date: 28.OCT.2020 15:01:26

## PCS 1900 Channel 512

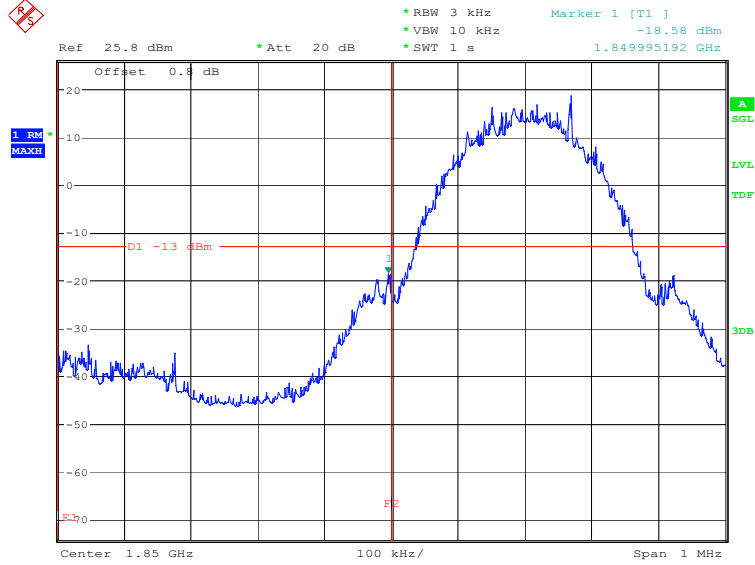


Date: 28.OCT.2020 14:36:08

## Channel 810

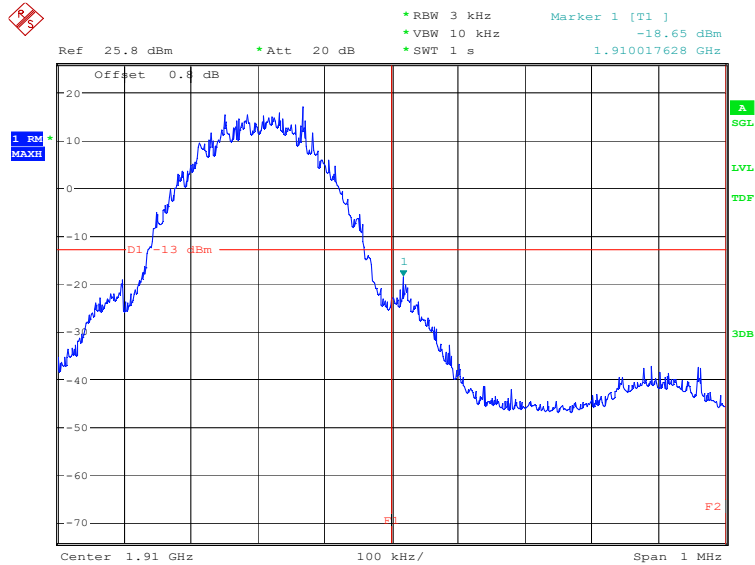


Date: 28.OCT.2020 14:38:24

## GPRS 1900 Channel 512

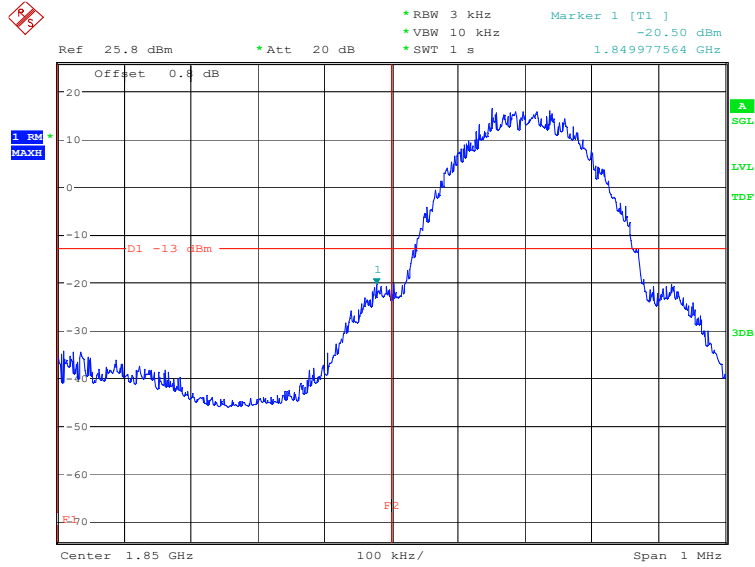

Date: 28.OCT.2020 15:05:38

## Channel 810

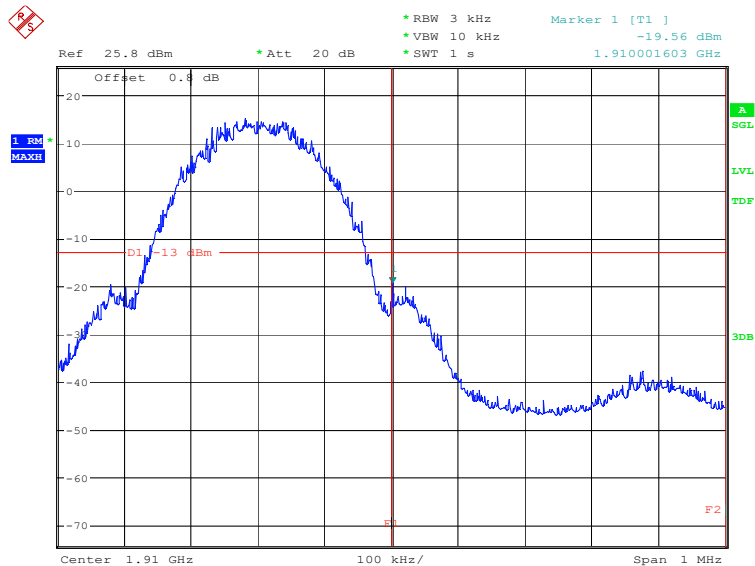

Date: 28.OCT.2020 15:06:47

## **A.7 Conducted Spurious Emission**

### **A.7.1 Measurement Method**

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. In measuring unwanted emissions, the spectrum shall be investigated from 30 MHz or the lowest radio frequency signal generated in the equipment, whichever is lower, without going below 9 kHz, up to at least the frequency given below:
  - (a) If the equipment operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
  - (b) If the equipment operates at or above 10 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.
3. The number of sweep points of spectrum analyzer is set to 30001 which is greater than span/RBW.

### **A. 7.2 Measurement Limit**

Part 22.917 and Part 24.238 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.




## A.7.3 Measurement result

### GSM850

Channel 128: 30MHz – 8.49GHz


NOTE: peak above the limit line is the carrier frequency.

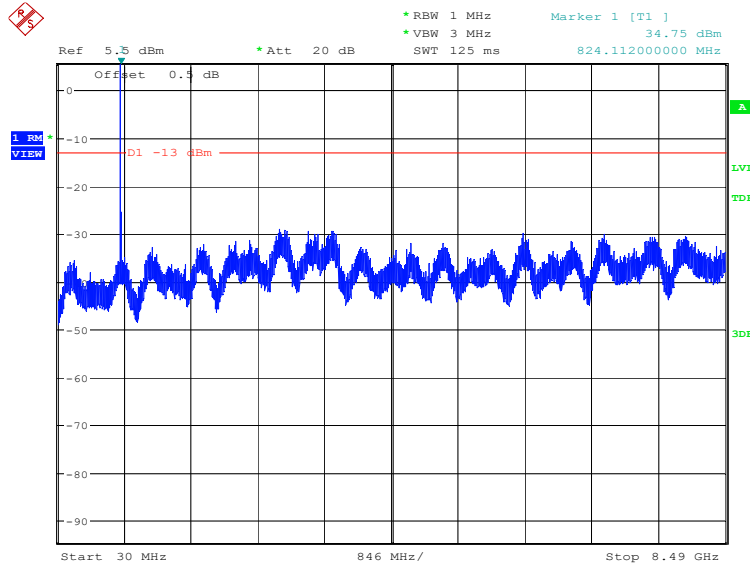

Date: 28.OCT.2020 14:40:59

Channel 190: 30MHz – 8.49GHz


NOTE: peak above the limit line is the carrier frequency.

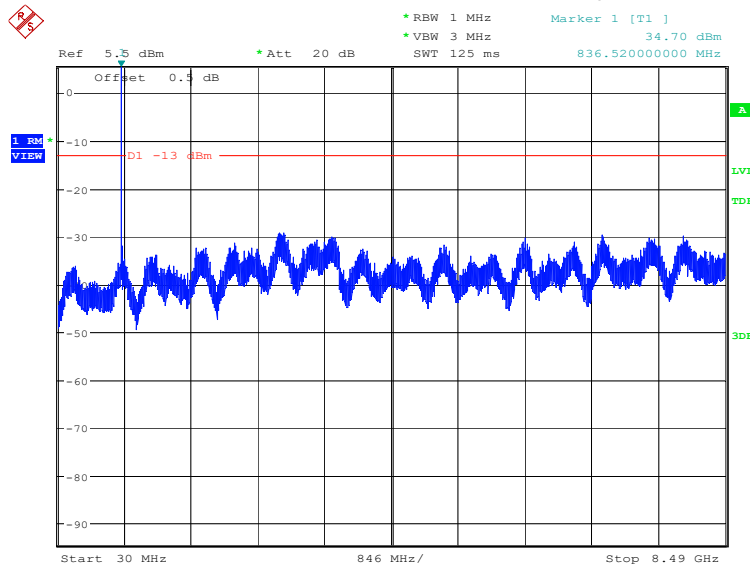

Date: 28.OCT.2020 14:41:29

# Channel 251: 30MHz – 8.49GHz

**NOTE: peak above the limit line is the carrier frequency.**

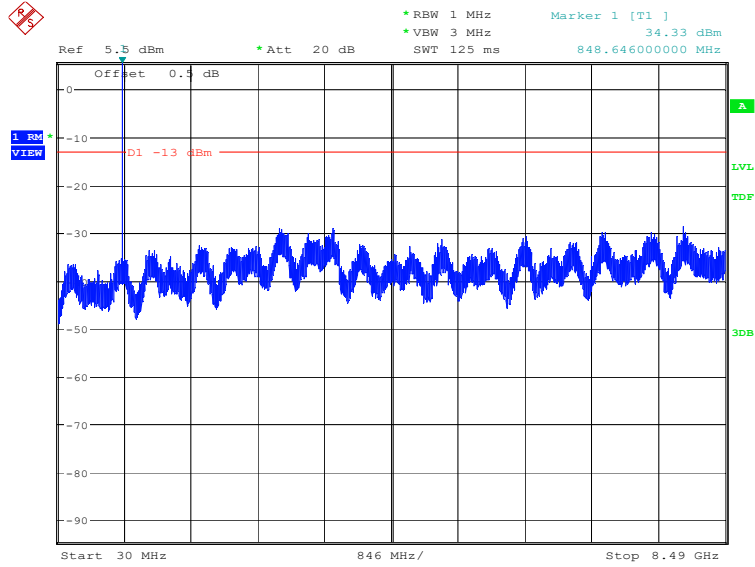


Date: 28.OCT.2020 14:41:58

## PCS1900

Channel 512: 30MHz – 19.10GHz


NOTE: peak above the limit line is the carrier frequency.

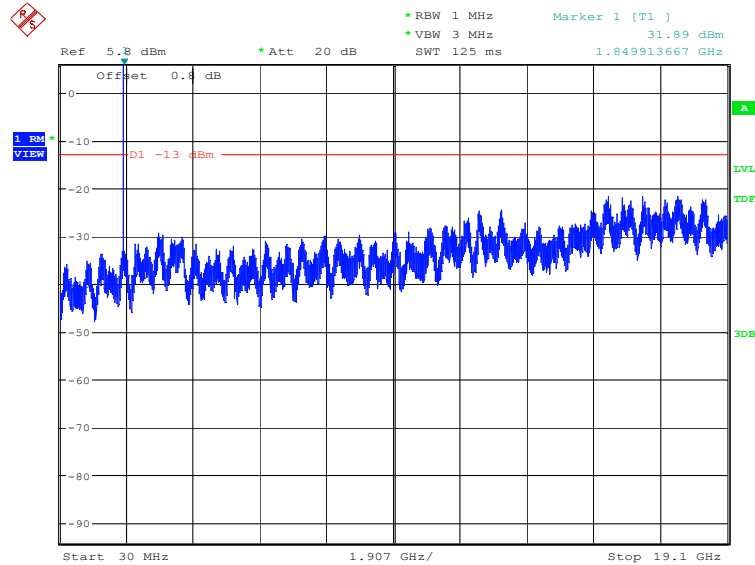

Date: 28.OCT.2020 14:43:27

Channel 661: 30MHz – 19.10GHz


NOTE: peak above the limit line is the carrier frequency.

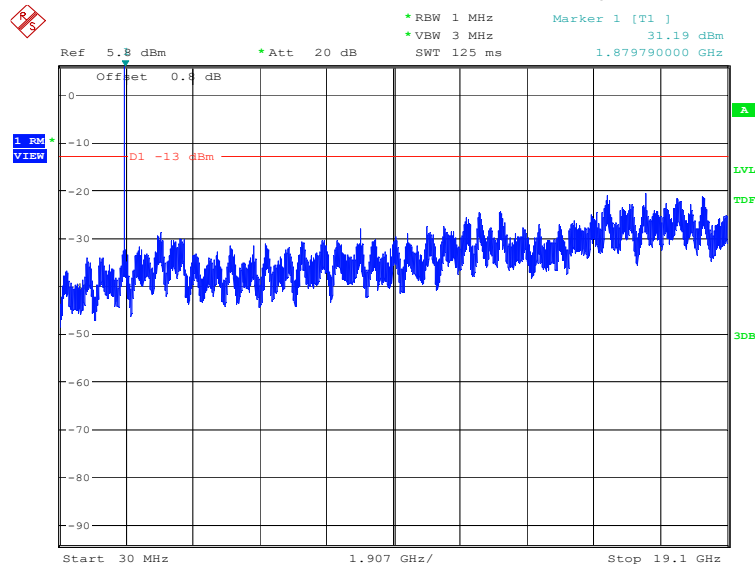

Date: 28.OCT.2020 14:43:56

# Channel 810: 30MHz – 19.10GHz

**NOTE: peak above the limit line is the carrier frequency.**

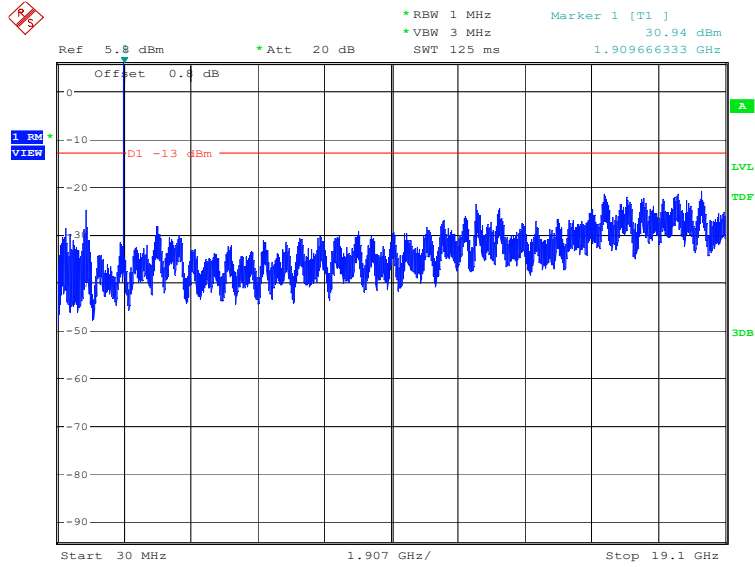

Date: 28.OCT.2020 14:44:25

### **A.8 Peak-to-Average Power Ratio**


The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB

- a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
- b) Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
- c) Set the number of counts to a value that stabilizes the measured CCDF curve;
- d) Record the maximum PAPR level associated with a probability of 0.1%.

#### **Measurement results**

|                 | Frequency (MHz) | PAPR (dB) |
|-----------------|-----------------|-----------|
| PCS1900         | 1880.0          | 7.72      |
| GPRS1900        | 1880.0          | 7.72      |
| EGPRS1900(8PSK) | 1880.0          | 10.67     |

## Annex B: Accreditation Certificate

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>United States Department of Commerce<br/>National Institute of Standards and Technology</b></p> <div style="display: flex; justify-content: space-around; align-items: center;"><div style="font-size: 4em; font-weight: bold; letter-spacing: 0.1em;">NVLAP<sup>®</sup></div><div style="text-align: center;"><br/><b>ilac-MRA</b></div></div> <hr style="border: 1px solid black;"/> <p style="font-size: 1.2em; font-weight: bold; text-align: center;">Certificate of Accreditation to ISO/IEC 17025:2017</p> <hr style="border: 1px solid black;"/> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <p><b>NVLAP LAB CODE: 600118-0</b></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <p><b>Telecommunication Technology Labs, CAICT</b><br/>Beijing<br/>China</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <p><i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services,<br/>listed on the Scope of Accreditation, for:</i></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <p><b>Electromagnetic Compatibility &amp; Telecommunications</b></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <p><i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017.<br/>This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality<br/>management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).</i></p>                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <p>2020-09-29 through 2021-09-30<br/><i>Effective Dates</i></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | <div style="display: flex; align-items: center; justify-content: center;"><div style="text-align: center;"><br/><small>DEPARTMENT OF COMMERCE<br/>UNITED STATES OF AMERICA</small></div><div style="margin-left: 20px;"><br/><small>For the National Voluntary Laboratory Accreditation Program</small></div></div> |

\*\*\*END OF REPORT\*\*\*