



Test report No:
2040805R-RF-US-P06V02

FCC TEST REPORT & ISED TEST REPORT

Product Name	EZ-BT WICED Module
Trademark	Cypress
Model and /or type reference	CYBT-213066-02, CYBT-213067-02
FCC ID	WAP3066
IC ID	7922A-3066
Applicant's name / address	Cypress Semiconductor Technology (Shanghai) Co., Ltd. 198 Champion Ct, San Jose, California 95134, United States
Test method requested, standard	FCC CFR Title 47 Part 15 Subpart C Section 15.247 ANSI C63.10: 2013 KD558074 D01 15.247 Meas Guidance v05r02 RSS-Gen Issue 5 / RSS-247 Issue 2
Verdict Summary	IN COMPLIANCE
Documented by (name / position & signature)	Kitty Li/Project Assistant 
Reviewed by (name / position & signature)	Frank He/ Technical Supervisor 
Approved by (name / position & signature)	Jack Zhang/ Supervisor 
Date of issue	2020-06-03
Report template No	Template_FCC 15.247-RF-V1.0

INDEX

	page
General conditions	4
Environmental conditions	4
Possible test case verdicts	5
Abbreviations.....	5
Document History.....	6
Remarks and Comments	6
Used Equipment.....	7
Uncertainty	9
1 General Information	10
1.1 General Description of the Item(s).....	10
1.2 Antenna Information	11
1.3 Channel List.....	12
2 Description of Test Setup.....	13
2.1 Operating mode(s) used for tests	13
2.2 Auxiliary equipment / Test software for the EUT	13
2.3 Test Configuration / Block diagram used for tests.....	14
2.4 Testing process	15
3 Verdict summary section.....	16
3.1 Standards	16
3.2 Deviation(s) from the Standard(s) / Test Specification(s).....	16
3.3 Overview of results	17
3.4 Test Facility.....	18
4 Test Results	19
4.1 AC Power Line Conducted Emission.....	19
4.1.1 Limit	19
4.1.2 Test Setup	19
4.1.3 Test Procedure	19
4.1.4 Test Data	20
4.2 Emissions in restricted frequency bands	22
4.2.1 Limit	22
4.2.2 Test Setup	24
4.2.3 Test Procedure	25
4.2.4 Test Data	26
4.3 Emissions in non-restricted frequency band	40

4.3.1	Limit	40
4.3.2	Test Setup	40
4.3.3	Test Procedure	40
4.3.4	Test Data	41
4.4	Duty cycle	42
4.4.1	Limit	42
4.4.2	Test Setup	42
4.4.3	Test Procedure	42
4.4.4	Test Data	43
4.5	Radiated Emission Band Edge	44
4.5.1	Limit	44
4.5.2	Test Setup	44
4.5.3	Test Procedure	44
4.5.4	Test Data	45
4.6	DTS Bandwidth	61
4.6.1	Limit	61
4.6.2	Test Setup	61
4.6.3	Test Procedure	61
4.6.4	Test Data	62
4.7	Fundamental emission output power	63
4.7.1	Limit	63
4.7.2	Test Setup	63
4.7.3	Test Procedure	64
4.7.4	Test Data	65
4.8	Power Density	66
4.8.1	Limit:	66
4.8.2	Test Setup	66
4.8.3	Test Procedure	66
4.8.4	Test Data	67
4.9	Antenna Requirement	68
4.9.1	Limit:	68
4.9.2	Antenna Connector Construction:	68
5	Test setup photo and EUT Photo	69

COMPETENCES AND GUARANTEES

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

GENERAL CONDITIONS

Test Location	No. 99, Hongye Road, Suzhou Industrial Park Suzhou, 215006, P.R. China
Date(receive sample)	Apr. 29, 2020
Date (start test)	May. 01, 2020
Date (finish test)	Jun. 03, 2020

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or Competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA.

ENVIRONMENTAL CONDITIONS

The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment. The climatic conditions during the tests were within the following limits:

Ambient temperature	15 °C – 35 °C
Relative Humidity air	30% - 60%

If explicitly required in the basic standard or applied product / product family standard the climatic values are recorded and documented separately in this test report.

POSSIBLE TEST CASE VERDICTS

Test case does not apply to test object	N/A
Test object does meet requirement	P (Pass) / PASS
Test object does not meet requirement	F (Fail) / FAIL
Not measured	N/M

ABBREVIATIONS

For the purposes of the present document, the following abbreviations apply:

EUT	: Equipment Under Test
QP	: Quasi-Peak
CAV	: CISPR Average
AV	: Average
CDN	: Coupling Decoupling Network
SAC	: Semi-Anechoic Chamber
OATS	: Open Area Test Site
BW	: Bandwidth
AM	: Amplitude Modulation
PM	: Pulse Modulation
HCP	: Horizontal Coupling Plane
VCP	: Vertical Coupling Plane
U_N	: Nominal voltage
T_x	: Transmitter
R_x	: Receiver
N/A	: Not Applicable
N/M	: Not Measured

DOCUMENT HISTORY

Report No.	Version	Description	Issued Date
2040805R-RF-US-P06V02	V1.0	Initial issue of report.	2020-06-03

REMARKS AND COMMENTS

1. The equipment under test (EUT) does meet the essential requirements of the stated standard(s)/test(s).
2. These test results on a sample of the device are for the purpose of demonstrating Compliance with Part 15 Subpart C Paragraph 15.247, RSS-Gen Issue 5, RSS-247 Issue 2.
3. The measurement result is considered in conformance with the requirement if it is within the prescribed limit, It is not necessary to account the uncertainty associated with the measurement result, unless the specification, standard or customer have special requirements.
4. The test results presented in this report relate only to the object tested.
5. The test results relate only to the samples tested.
6. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification (Suzhou) Co., Ltd.
7. This report will not be used for social proof function in China market.

USED EQUIPMENT

AC Power Line Conducted Emission / TR1

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
EMI Test Receiver	R&S	ESCI	100906	2020.04.20	2021.04.19
Two-Line V-Network	R&S	ENV216	101190	2019.12.28	2020.12.27
Two-Line V-Network	R&S	ENV216	101044	2019.12.28	2020.12.27
Current Probe	R&S	EZ-17	100678	2020.03.12	2021.04.11
50ohm Termination	SHX	TF2	07081402	2019.09.02	2020.09.01
50ohm Termination	SHX	TF2	07081403	2019.09.02	2020.09.01
50ohm Coaxial Switch	Anritsu	MP59B	6200464462	N/A	N/A
Temperature/Humidity Meter	RTS	RTS-8S	TR1-TH	2019.08.21	2020.08.20
Coaxial Cable	Suhner	RG 223	TR1-C1	2019.08.25	2020.08.24
Coaxial Cable	Suhner	RG 223	TR1-C2	2019.08.25	2020.08.24
Dekra test software	Dekra	-	-	-	-

Emissions in non-restricted frequency bands/ Occupied Bandwidth/ Fundamental emission output power Power Spectral Density / TR8

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2019.09.28	2020.09.27
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2020.04.17	2021.04.16
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2019.08.30	2020.08.29
Wideband Peak Power Meter	Anritsu	ML2495A	0905006	2019.08.12	2020.08.11
Power Sensor	Anritsu	MA2411B	0846014	2019.08.12	2020.08.11
Coaxial Cable	Woken	SFL402	F02-150410-044	2020.01.01	2020.12.31
Dekra test software	Dekra	-	-	-	-

Radiated Emission(30MHz-1GHz) / AC3

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
EMI Test Receiver	R&S	ESCI	100573	2020.03.03	2021.03.02
Bilog Antenna	Teseq GmbH	CBL6112D	27611	2019.09.23	2020.09.22
Temperature/Humidity Meter	RTS	RTS-8S	AC2-TH	2019.09.02	2020.09.01
Coaxial Cable	Huber+Suhner	RG 214	AC2-C	2020.04.13	2021.04.12
Dekra test software	Dekra	-	-	-	-

Radiated Emission / AC5(1GHz-40GHz)

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2020.05.08	2021.05.07
Preamplifier	Miteq	NSP1800-25	1364185	2020.05.06	2021.05.05
Preamplifier	QuieTek	AP-040G	CHM-0906001	2020.05.06	2021.05.05
DRG Horn	ETS-Lindgren	3117	00123988	2020.01.22	2021.01.21
Temperature/Humidity Meter	Zhichen	ZC1-2	AC5-TH	2019.09.02	2020.09.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C1	2020.04.13	2021.04.12
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2020.04.13	2021.04.12
Coaxial Cable	Huber+Suhner	SUCOFLEX 102	AC5-C3	2020.04.13	2021.04.12
Dekra test software	Dekra	-	-	-	-

UNCERTAINTY

Uncertainties have been calculated according to the DEKRA internal document. The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%. The Uncertainties comply with standard required as below.

Test item	Uncertainty
AC Power Line Conducted Emission	9kHz~150kHz: 2.80dB 150kHz~30MHz: 2.40dB
Peak Power Output	± 1.27 dB
Radiated Emission(30MHz~1GHz)	Horizontal: 30MHz~200MHz: 3.50 dB 300MHz~1GHz: 3.60 dB Vertical: 30MHz~200MHz: 3.60 dB 300MHz~1GHz: 3.50 dB
Radiated Emission(1GHz~26.5GHz)	Horizontal: 1GHz~18GHz: 5.00 dB Vertical: 1GHz~18GHz: 4.80 dB
RF antenna conducted test	± 1.27 dB
Radiated Emission Band Edge	± 3.9 dB
DTS Bandwidth	± 150 Hz
Occupied Bandwidth	± 1 kHz
Power Density	± 1.27 dB

1 GENERAL INFORMATION

1.1 General Description of the Item(s)

Product Name	EZ-BT WICED Module		
Model No.	CYBT-213066-02, CYBT-213067-02		
Trademark	Cypress		
FCC ID	WAP3066		
IC	7922A-3066		
Manufacturer	Cypress Semiconductor		
Manufacturer Address	198 Champion Ct, San Jose, California 95134, United States		
Factory	Wujiang Sigmatron Electronics Co., Ltd		
Factory Address	386 Huahong Rd, Wujiang, Suzhou, Jiangsu, China		
Model Differences.	Model CYBT-213067-02 is identical to Model CYBT-213066-02 except for whether there is a flash memory inside, this difference has no effect on RF performance, Details see table below.		
	Model No.	IC	Flash
	CYBT-213066-02	CYW20819	Y
	CYBT-213067-02	CYW20819	N

Wireless specification	Bluetooth 5.0				
Operating frequency range(s)	2400~2483.5MHz				
Type of Modulation	GFSK				
PHYS	☒	LE 1M	☒	LE 2M	☐ LE Coded S=2/8
Data Rate	☒	1Mbit/s	☒	2Mbit/s	☐ 500/125 Kbit/s
Number of channel	40				

Rated power supply	Voltage and Frequency				
	☐	AC: 220 – 240 V, 50/60 Hz			
	☐	AC: 100 – 240 V, 50/60 Hz			
	☒	DC: 1.8~3.3Vdc			
	☐	Battery:			
Mounting position	☐	Table top equipment			
	☐	Wall/Ceiling mounted equipment			
	☐	Floor standing equipment			
	☐	Hand-held equipment			
	☒	Other: RF module			

1.2 Antenna Information

Antenna model / type number	PCB antenna			
Antenna serial number	N/A			
Antenna Delivery	☒	1TX + 1RX		
	☐	2TX + 2RX		
Antenna technology	☒	SISO		
	☐	MIMO	☐	CDD
			☐	Beam-forming
Antenna Type	☐	External	☐	Dipole
			☐	Sectorized
	☒	Internal	☐	PIFA
			☒	PCB
			☐	Metal Monopole Antenna
			☐	Others.....
Antenna Gain	-0.5dBi			

1.3 Channel List

Bluetooth Working Frequency of Each Channel: (For v5.0)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2404 MHz	02	2406 MHz	03	2408 MHz
04	2410 MHz	05	2412 MHz	06	2414 MHz	07	2416 MHz
08	2418 MHz	09	2420 MHz	10	2422 MHz	11	2424 MHz
12	2426 MHz	13	2428 MHz	14	2430 MHz	15	2432 MHz
16	2434 MHz	17	2436 MHz	18	2438 MHz	19	2440 MHz
20	2442 MHz	21	2444 MHz	22	2446 MHz	23	2448 MHz
24	2450 MHz	25	2452 MHz	26	2454 MHz	27	2456 MHz
28	2458 MHz	29	2460 MHz	30	2462 MHz	31	2464 MHz
32	2466 MHz	33	2468 MHz	34	2470 MHz	35	2472 MHz
36	2474 MHz	37	2476 MHz	38	2478 MHz	39	2480 MHz

2 DESCRIPTION OF TEST SETUP

2.1 Operating mode(s) used for tests

During the tests the following operating mode(s) has(have) been used.

Test Mode For Bluetooth	Mode 1: Transmit by LE_1Mbps(GFSK_LE)
	Mode 2: Transmit by LE_2Mbps(GFSK_LE)


2.2 Auxiliary equipment / Test software for the EUT

Auxiliary equipment	Type / Version	Manufacturer	Supplied by
Notebook	Think pad x220	Lenovo	Adapter
software	Type / Version	Manufacturer	Supplied by
Bluetool	1.9.6.2	N/A	N/A


2.3 Test Configuration / Block diagram used for tests

Test setup Diagram- AC Line Conducted Emission Test

Chamber

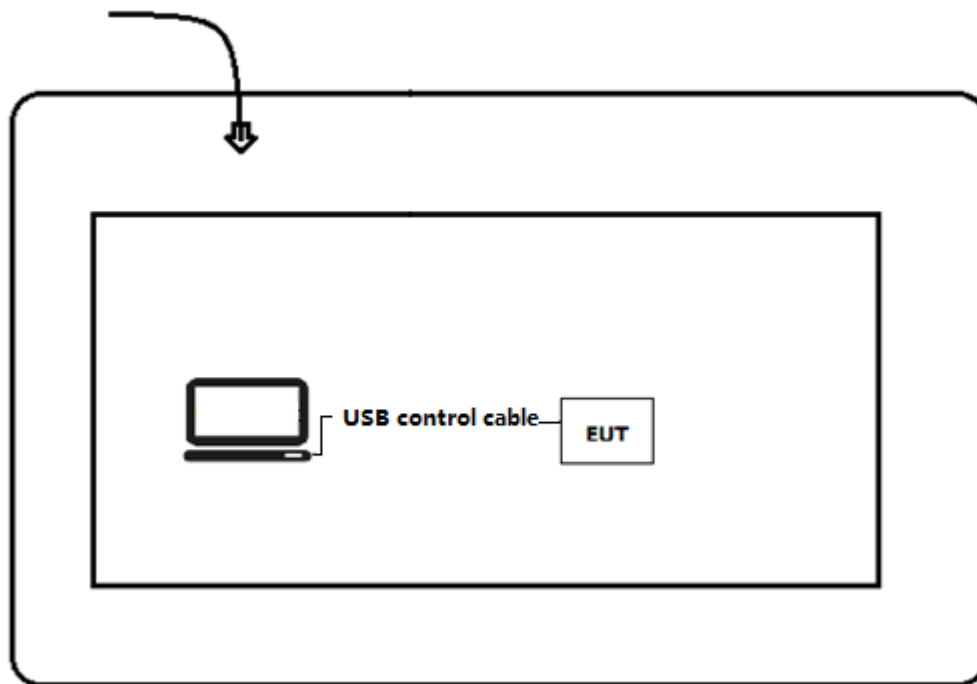

Test setup Diagram- Conducted test

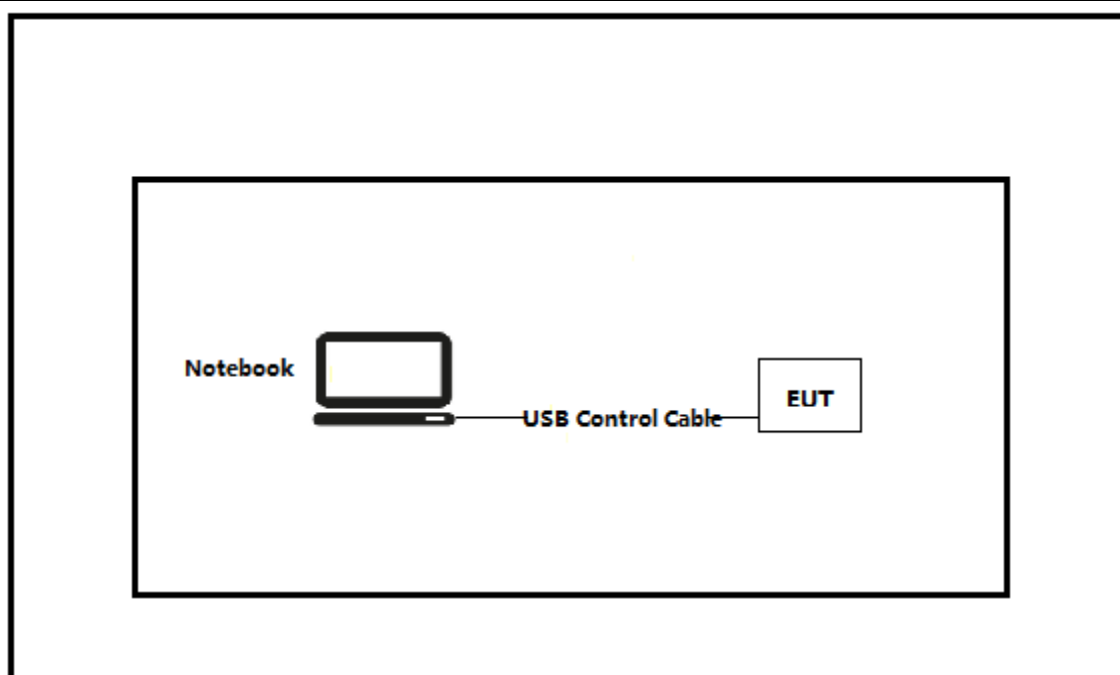

2.4 Testing process

1	Setup the EUT as shown in Section 2.3.
2	Execute the Bluetool on the notebook.
3	Configure the test mode, the test channel, and the data rate.
4	Verify that the EUT works properly.

3 VERDICT SUMMARY SECTION

This chapter presents an overview of standards and results. Refer to the next chapters for details of measured test results and applied test levels.

3.1 Standards

Standard	Year	Description
FCC CFR Title 47 Part 15 Subpart C Section 15.247	2019	Operation within the bands 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz.
ANSI C63.10	2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074 D01 v05r02	2019	Guidance for performing compliance measurements on Digital Transmission System (DTS) operating under section 15.247
RSS-Gen Issue 5 Amendment 1	2019	General Requirements for Compliance of Radio Apparatus
RSS-247 Issue 2	2017	Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

3.2 Deviation(s) from the Standard(s) / Test Specification(s)

The following deviation(s) was / were made from the published requirements of the listed standards: N/A.

(Please define the deviations from the standard(s) if applicable)

3.3 Overview of results

For FCC

Requirement – Test case	Basic standard(s)	Verdict	Remark
AC Power Line Conducted Emission	FCC 15.207	PASS	---
Emissions in restricted frequency bands	FCC 15.247(b)(3)	PASS	---
Duty cycle	ANSI C63.10:2013	PASS	---
Emissions in non-restricted frequency bands	FCC 15.247(d), FCC 15.209	PASS	---
Radiated Emission Band Edge	FCC 15.247(d)	PASS	---
Fundamental emission output power	FCC 15.247(d), FCC 15.209	PASS	---
DTS Bandwidth	FCC 15.247(a)(2)	PASS	---
Power Spectral Density	FCC 15.247(e)	PASS	---
Antenna Requirement	FCC 15.203	PASS	---

For ISED

Requirement – Test case	Basic standard(s)	Verdict	Remark
AC Power Line Conducted Emission	RSS-Gen Issue 5 Section 8.8	PASS	---
Emissions in restricted frequency bands	RSS-Gen Issue 5 Section 8.9	PASS	---
Duty cycle	ANSI C63.10:2013	PASS	---
Emissions in non-restricted frequency bands	RSS-247 Issue 2 Section 5.5	PASS	---
Radiated Emission Band Edge	RSS-Gen Issue 5 Section 8.10	PASS	---
Fundamental emission output power	RSS-247 Issue 2 Section 5.4(d)	PASS	---
DTS Bandwidth	RSS-Gen Issue 5 Section 6.7	PASS	---
Power Spectral Density	RSS-247 Issue 2 Section 5.2(b)	PASS	---
Antenna Requirement	RSS-Gen Issue 5 Section 6.8	PASS	---

3.4 Test Facility

USA	:	FCC Designation Number: CN1199
CA	:	ISED CAB identifier: CN0040

4 TEST RESULTS

4.1 AC Power Line Conducted Emission

VERDICT: PASS

4.1.1 Limit

Standard	FCC Part 15 Subpart C Paragraph 15.207	
Frequency range [MHz]	Limit: QP [dB(μV) ¹⁾]	Limit: AV [dB(μV) ¹⁾]
0,15 - 0,50	66 - 56 ²⁾	56 - 46 ²⁾
0,50 - 5,0	56	46
5,0 - 30	60	50


¹⁾ At the transition frequency, the lower limit applies.

²⁾ The limit decreases linearly with the logarithm of the frequency.

NOTE 1: The exclusion band for transmitters shall be considered for transmitters operating at frequencies below 30 MHz.

NOTE 2: Where the AC output port is directly connected (or via a circuit breaker) to the AC power input port of the EUT the AC power output port need not to be tested.

4.1.2 Test Setup

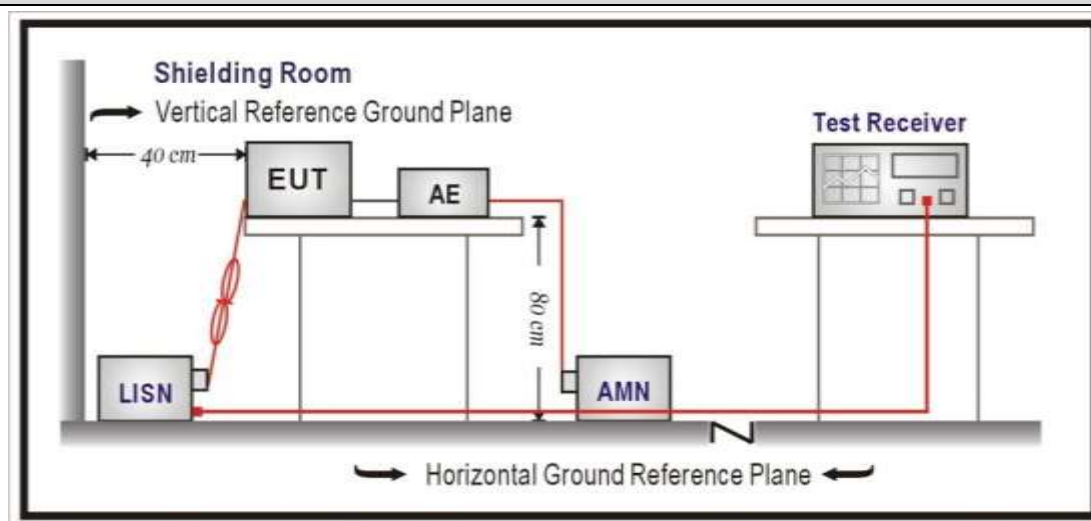


4.1.3 Test Procedure

	References Rule	Chapter	Item
☒	ANSI C63.10-2013	6.2	Standard test method for ac power-line conducted emissions from unlicensed wireless devices

4.1.4 Test Data

Site: TR1	Time: 2020/05/12
Limit: FCC_Part15.207_CE_AC Power	Margin: 0
Probe: ENV216_101190(0.009-30MHz)	Polarity: Line
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 1	

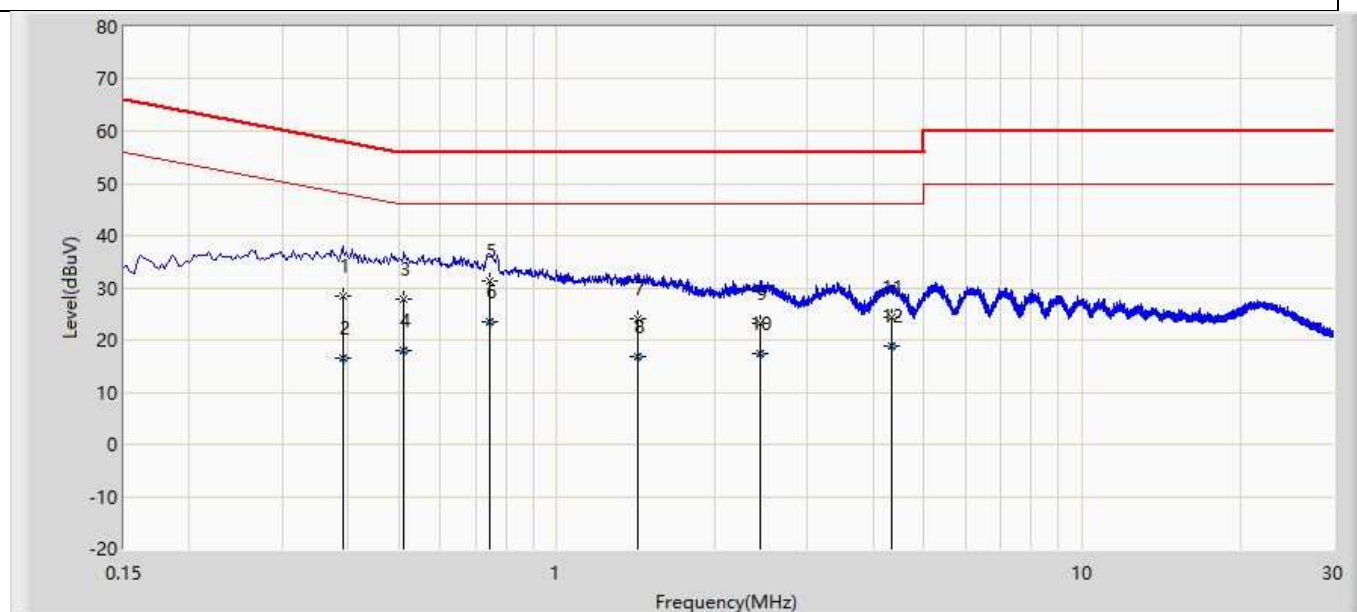


No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Probe (dB)	Cable (dB)	Amp (dB)	Type
1		0.391	28.516	18.876	-29.531	58.048	9.602	0.038	0.000	QP
2		0.391	16.530	6.890	-31.517	48.048	9.602	0.038	0.000	AV
3		0.512	27.940	18.285	-28.060	56.000	9.611	0.045	0.000	QP
4		0.512	17.907	8.252	-28.093	46.000	9.611	0.045	0.000	AV
5		0.746	31.216	21.543	-24.784	56.000	9.622	0.051	0.000	QP
6	*	0.746	23.341	13.669	-22.659	46.000	9.622	0.051	0.000	AV
7		1.421	24.180	14.474	-31.820	56.000	9.634	0.072	0.000	QP
8		1.421	16.710	7.005	-29.290	46.000	9.634	0.072	0.000	AV
9		2.445	23.242	13.495	-32.758	56.000	9.650	0.097	0.000	QP
10		2.445	17.263	7.516	-28.737	46.000	9.650	0.097	0.000	AV
11		4.326	24.212	14.385	-31.788	56.000	9.694	0.133	0.000	QP
12		4.326	18.884	9.057	-27.116	46.000	9.694	0.133	0.000	AV

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

Site: TR1	Time: 2020/05/12
Limit: FCC_Part15.207_CE_AC Power	Margin: 0
Probe: ENV216_101190(0.009-30MHz)	Polarity: Neutral
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 1	

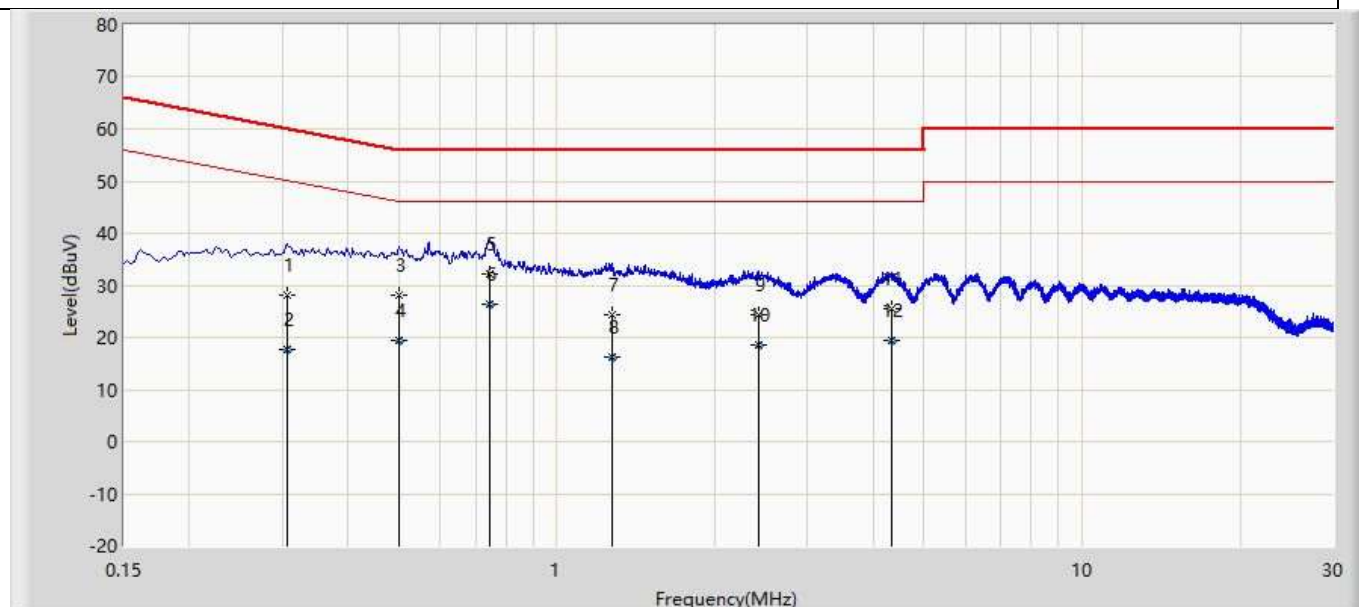

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Probe (dB)	Cable (dB)	Amp (dB)	Type
1		0.307	28.016	18.385	-32.022	60.038	9.597	0.034	0.000	QP
2		0.307	17.725	8.094	-32.312	50.038	9.597	0.034	0.000	AV
3		0.501	28.062	18.408	-27.938	56.000	9.610	0.044	0.000	QP
4		0.501	19.559	9.905	-26.441	46.000	9.610	0.044	0.000	AV
5		0.744	32.284	22.612	-23.716	56.000	9.622	0.051	0.000	QP
6	*	0.744	26.455	16.783	-19.545	46.000	9.622	0.051	0.000	AV
7		1.277	24.345	14.648	-31.655	56.000	9.630	0.068	0.000	QP
8		1.277	16.342	6.645	-29.658	46.000	9.630	0.068	0.000	AV
9		2.422	24.278	14.539	-31.722	56.000	9.641	0.097	0.000	QP
10		2.422	18.437	8.699	-27.563	46.000	9.641	0.097	0.000	AV
11		4.348	25.560	15.735	-30.440	56.000	9.693	0.132	0.000	QP
12		4.348	19.354	9.529	-26.646	46.000	9.693	0.132	0.000	AV

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

4.2 Emissions in restricted frequency bands**VERDICT: PASS****4.2.1 Limit****Standard** FCC Part 15 Subpart C Paragraph 15.209

Restricted Bands of operation

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.81425 – 8.81475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4	3600 – 4400	
13.36 – 13.41			

Restricted Bands of operation for IC

0.090 - 0.110	13.36 - 13.41	960 - 1427	9.0 - 9.2
0.495 - 0.505	16.42 - 16.423	1435 - 1626.5	9.3 - 9.5
2.1735 - 2.1905	16.69475 - 16.69525	1645.5 - 1646.5	10.6 - 12.7
3.020 - 3.026	16.80425 - 16.80475	1660 - 1710	13.25 - 13.4
4.125 - 4.128	25.5 - 25.67	1718.8 - 1722.2	14.47 - 14.5
4.17725 - 4.17775	37.5 - 38.25	2200 - 2300	15.35 - 16.2
4.20725 - 4.20775	73 - 74.6	2310 - 2390	17.7 - 21.4
5.677 - 5.683	74.8 - 75.2	2483.5 - 2500	22.01 - 23.12
6.215 - 6.218	108 - 138	2655 - 2900	23.6 - 24.0
6.26775 - 6.26825	149.9 - 150.05	3260 - 3267	31.2 - 31.8
6.31175 - 6.31225	156.52475 - 156.52525	3332 - 3339	36.43 - 36.5
8.291 - 8.294	156.7 - 156.9	3345.8 - 3358	Above 38.6
8.362 - 8.366	162.0125 - 167.17	3500 - 4400	
8.37625 - 8.38675	167.72 - 173.2	4500 - 5150	
8.81425 - 8.81475	240 - 285	5350 - 5460	
12.29 - 12.293	322 - 335.4	7250 - 7750	
12.51975 - 12.52025	399.9 - 410	8025 - 8500	
12.57675 - 12.57725	608 - 614	--	

Restricted Band Emissions Limit

Frequency (MHz)	Field strength ($\mu\text{V/m}$)	Field strength (dB $\mu\text{V/m}$)	Measurement distance (m)
0.009 - 0.49	2400/F(kHz)	48.5 – 13.8	300 _(Note 1)
0.49 - 1.705	24000/F(kHz)	33.8 - 23	30 _(Note 1)
1.705 - 30	30	29.5	30 _(Note 1)
30 - 88	100	40	3 _(Note 2)
88 - 216	150	43.5	3 _(Note 2)
216 - 960	200	46	3 _(Note 2)
Above 960	500	54	3 _(Note 2)


Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).

Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment.


Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

4.2.2 Test Setup


Below 30MHz Test Setup:

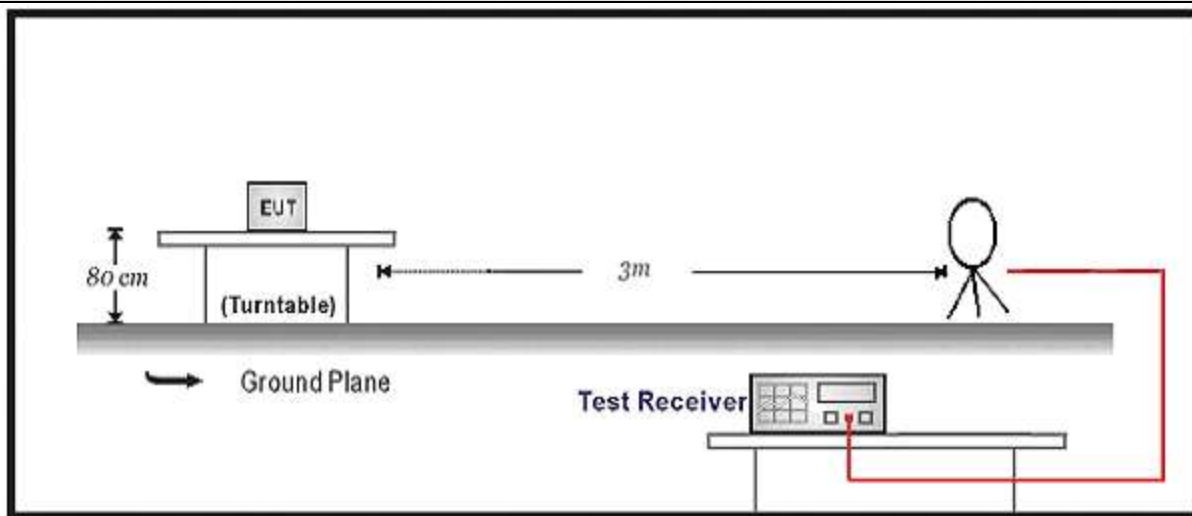

30MHz-1GHz Test Setup:

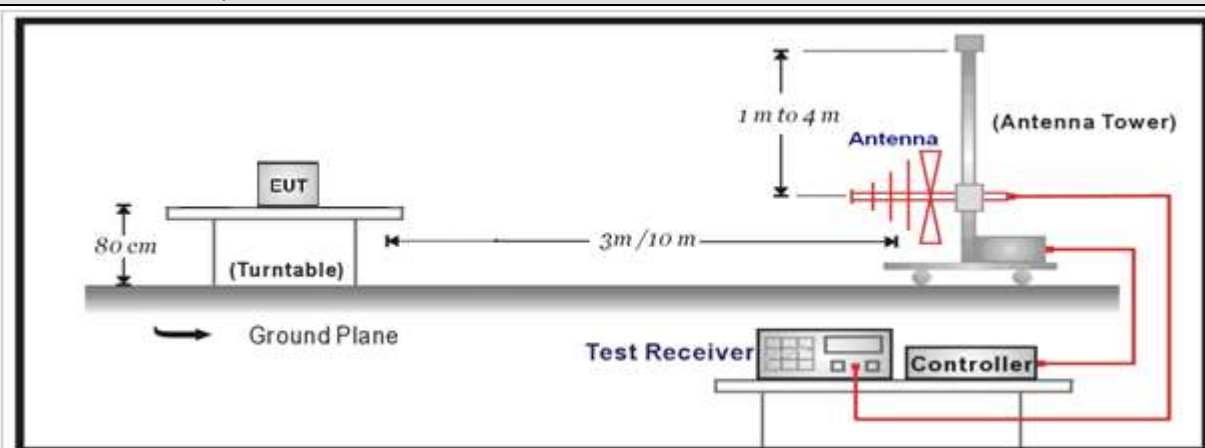

Above 1GHz Test Setup:

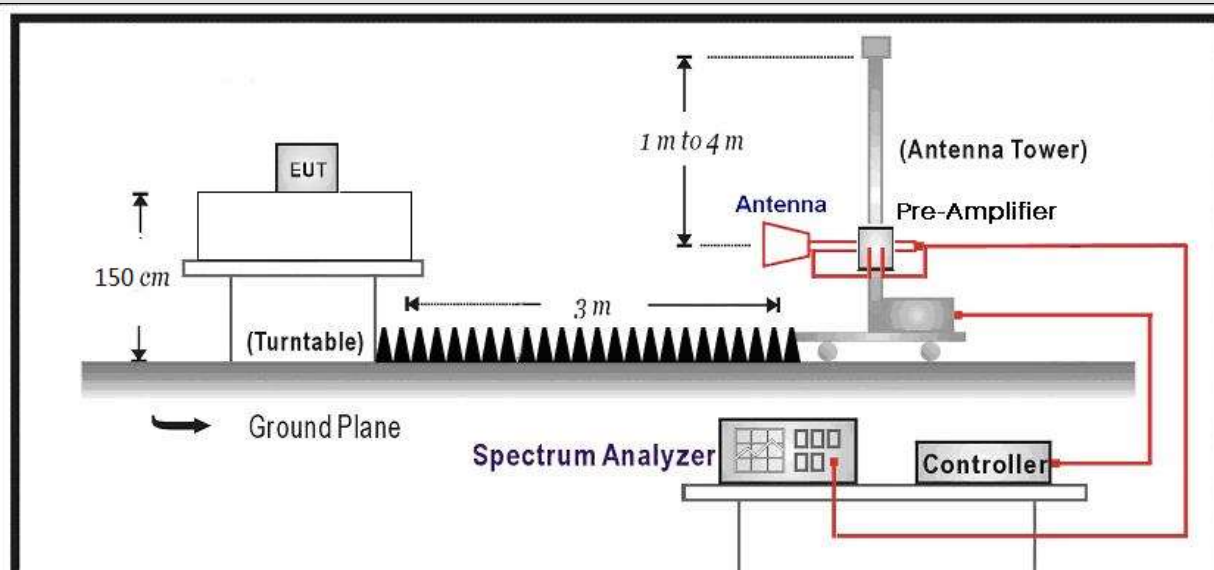


4.2.3 Test Procedure

	References Rule		Chapter	Description
☒	ANSI C63.10		11.12	Emissions in restricted frequency bands
	☒	ANSI C63.10	11.12.1	Radiated emission measurements
	☒	ANSI C63.10	11.12.2.7	Radiated spurious emission test
	☒	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
	☒	ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
	☒	ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz


4.2.4 Test Data

Profile: 2040805R	Page No.: 89
Engineer: YULIU	
Site: AC5	Time: 2020/05/19 - 19:48
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz	

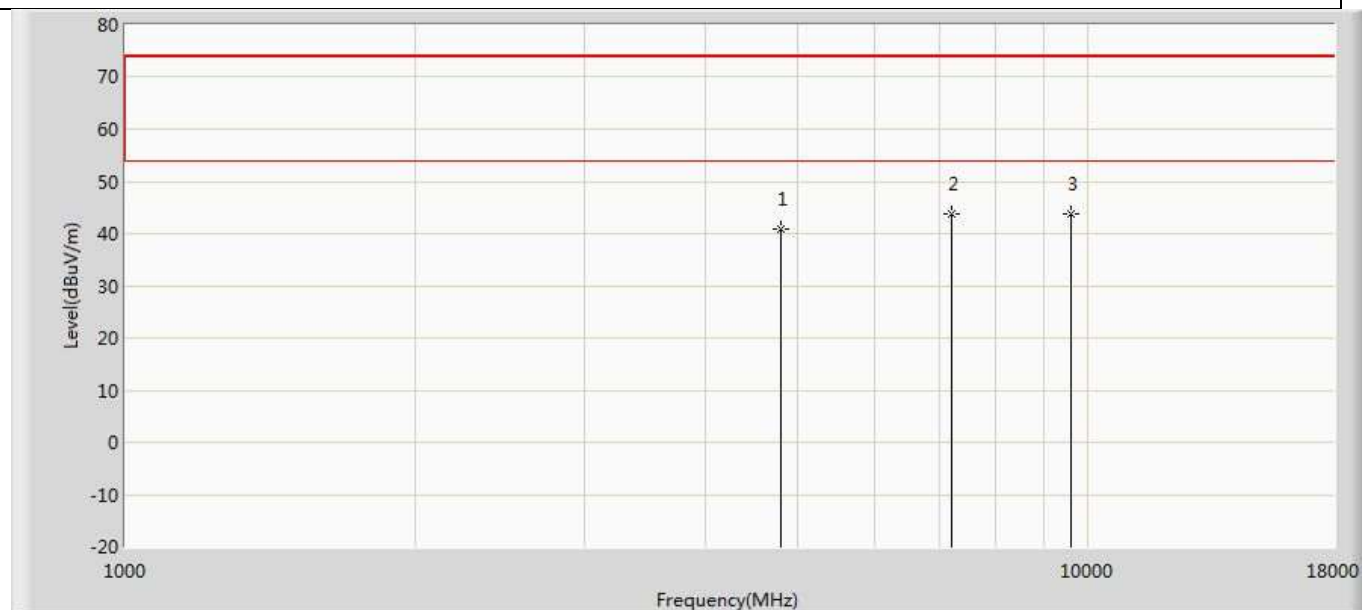


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	40.779	37.118	-33.221	74.000	3.662	PK
2	*	7206.000	43.880	37.217	-30.120	74.000	6.663	PK
3		9608.000	43.664	35.528	-30.336	74.000	8.137	PK

Profile: 2040805R	Page No.: 90
Engineer: YULIU	
Site: AC5	Time: 2020/05/19 - 19:48
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz	

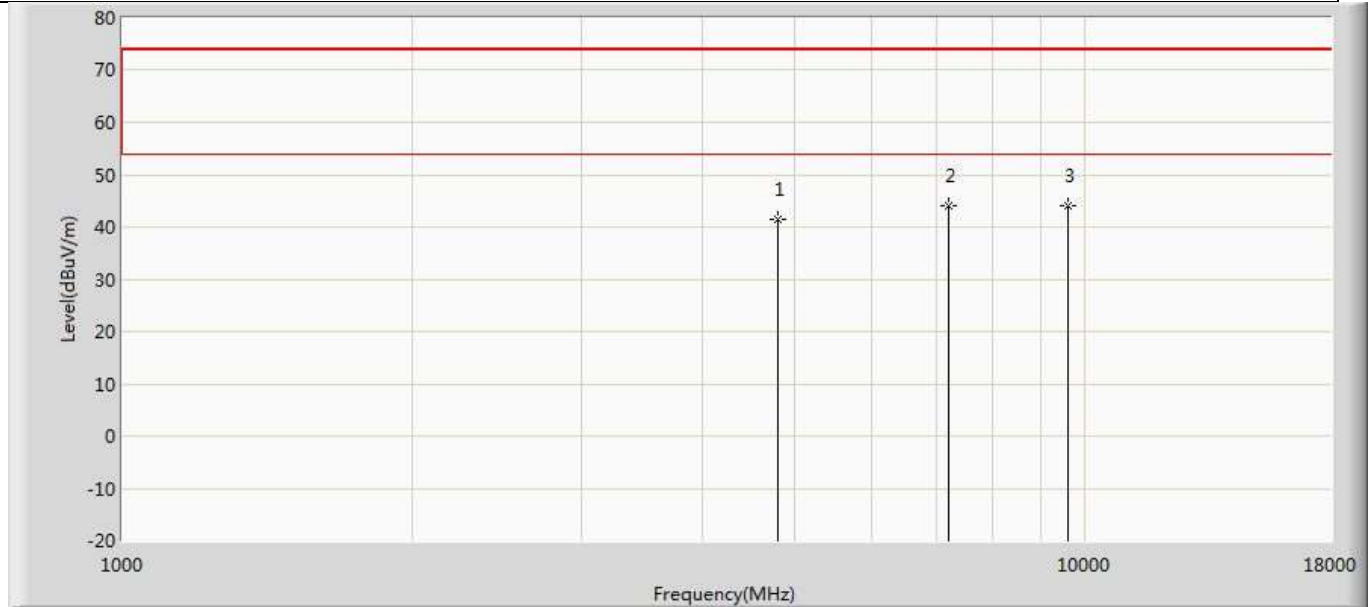


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	41.525	37.864	-32.475	74.000	3.662	PK
2		7206.000	43.920	37.257	-30.080	74.000	6.663	PK
3	*	9608.000	43.937	35.801	-30.063	74.000	8.137	PK

Profile: 2040805R	Page No.: 91
Engineer: YULIU	
Site: AC5	Time: 2020/05/19 - 19:48
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2440MHz	

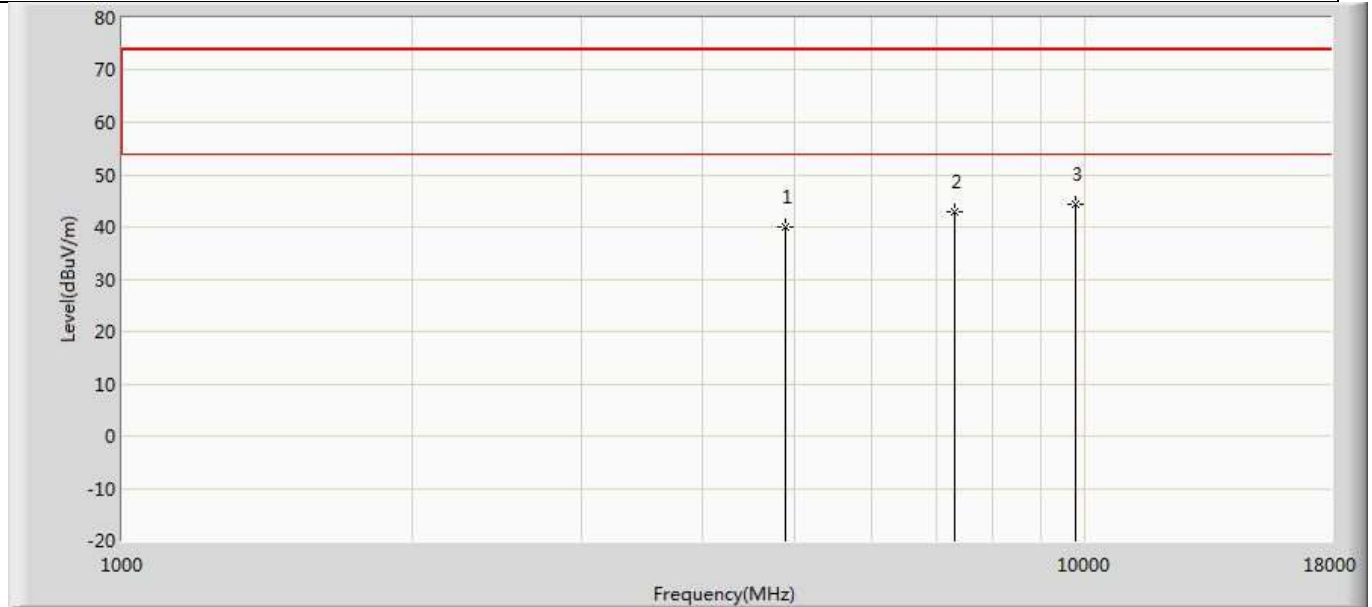


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4880.000	40.060	36.419	-33.940	74.000	3.640	PK
2		7320.000	42.821	36.136	-31.179	74.000	6.685	PK
3	*	9760.000	44.299	35.595	-29.701	74.000	8.704	PK

Profile: 2040805R	Page No.: 92
Engineer: YULIU	
Site: AC5	Time: 2020/05/19 - 19:48
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2440MHz	

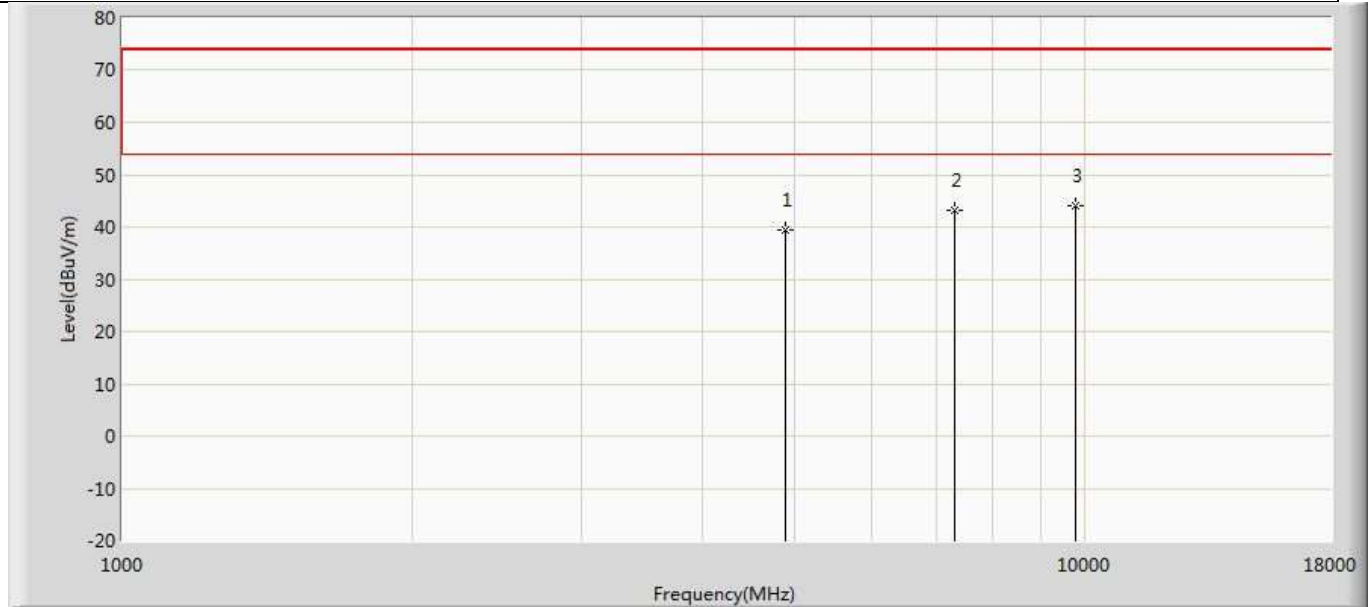


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4880.000	39.521	35.880	-34.479	74.000	3.640	PK
2		7320.000	43.086	36.401	-30.914	74.000	6.685	PK
3	*	9760.000	44.184	35.480	-29.816	74.000	8.704	PK

Profile: 2040805R	Page No.: 93
Engineer: YULIU	
Site: AC5	Time: 2020/05/19 - 19:48
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz	

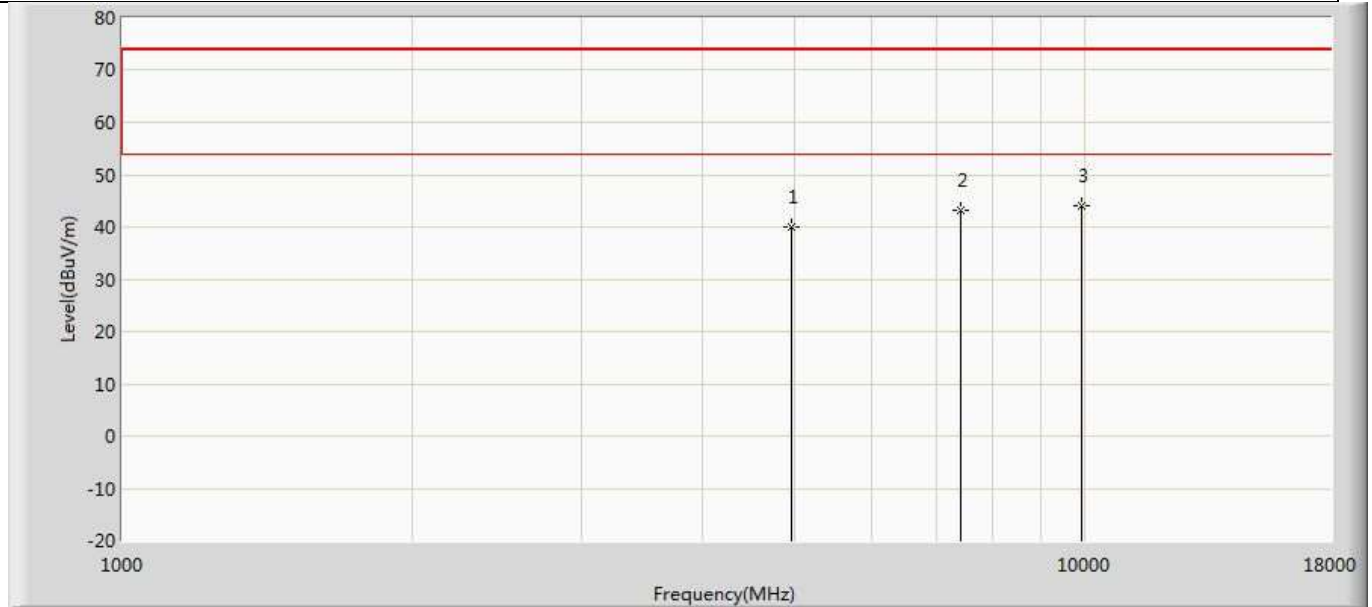


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	39.984	36.373	-34.016	74.000	3.611	PK
2		7440.000	43.247	36.662	-30.753	74.000	6.585	PK
3	*	9920.000	44.058	35.333	-29.942	74.000	8.725	PK

Profile: 2040805R	Page No.: 94
Engineer: YULIU	
Site: AC5	Time: 2020/05/19 - 19:49
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz	

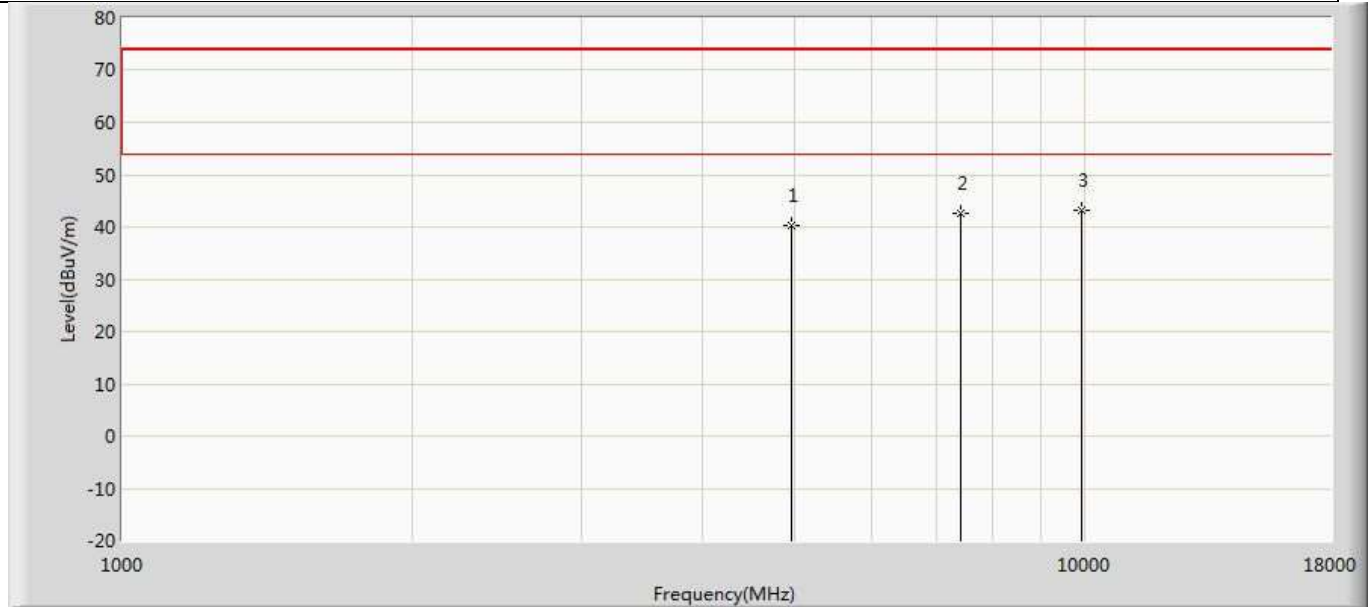


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	40.325	36.714	-33.675	74.000	3.611	PK
2		7440.000	42.523	35.938	-31.477	74.000	6.585	PK
3	*	9920.000	43.261	34.536	-30.739	74.000	8.725	PK

Profile: 2040805R	Page No.: 95
Engineer: YULIU	
Site: AC5	Time: 2020/05/19 - 19:49
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2402MHz	

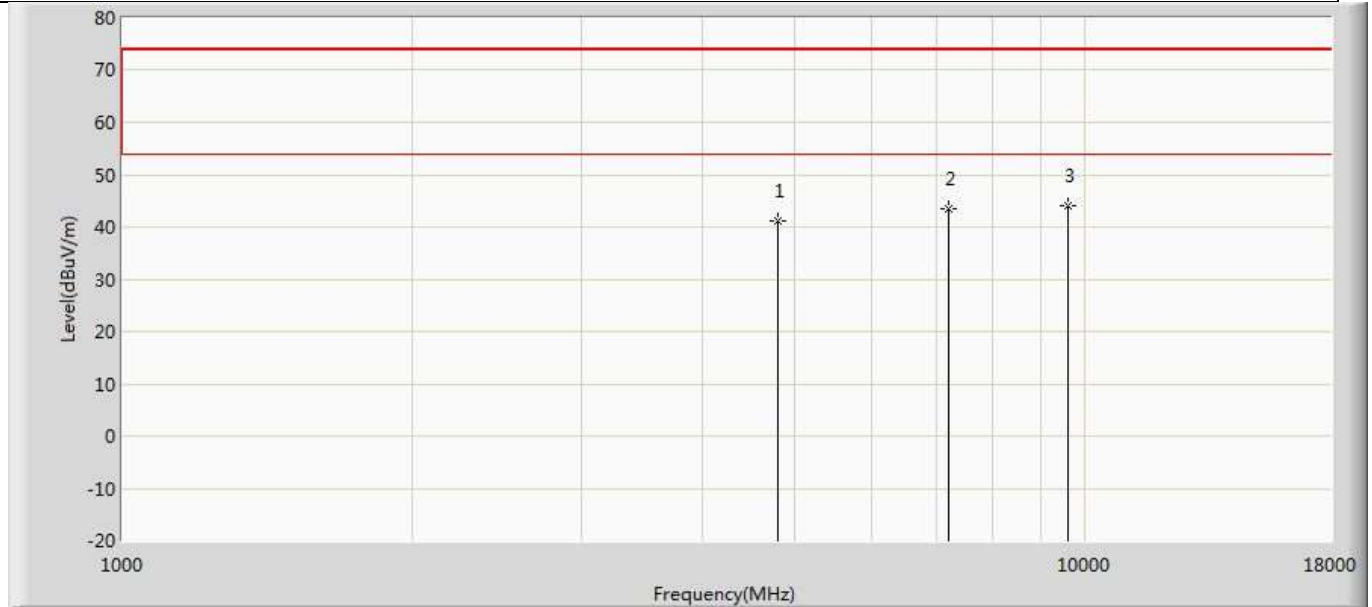


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	41.018	37.357	-32.982	74.000	3.662	PK
2		7206.000	43.607	36.944	-30.393	74.000	6.663	PK
3	*	9608.000	44.068	35.932	-29.932	74.000	8.137	PK

Profile: 2040805R	Page No.: 96
Engineer: YULIU	
Site: AC5	Time: 2020/05/19 - 19:49
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2402MHz	

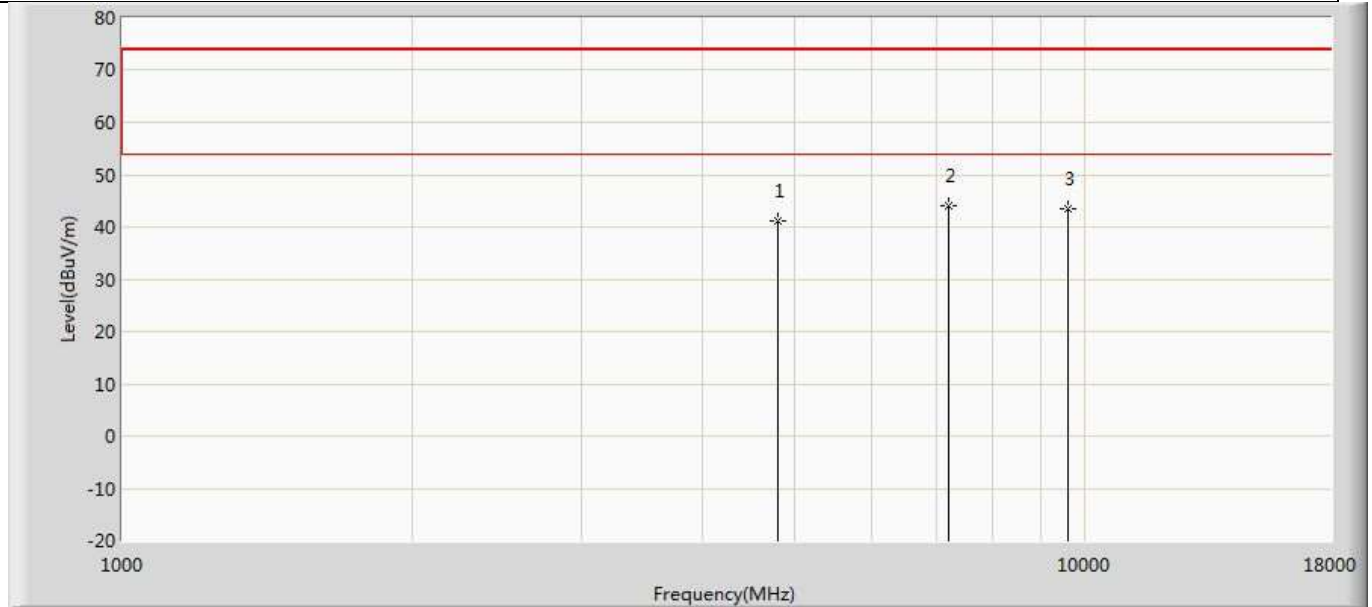


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	41.285	37.624	-32.715	74.000	3.662	PK
2	*	7206.000	43.984	37.321	-30.016	74.000	6.663	PK
3		9608.000	43.502	35.366	-30.498	74.000	8.137	PK

Profile: 2040805R	Page No.: 97
Engineer: YULIU	
Site: AC5	Time: 2020/05/19 - 19:49
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2440MHz	

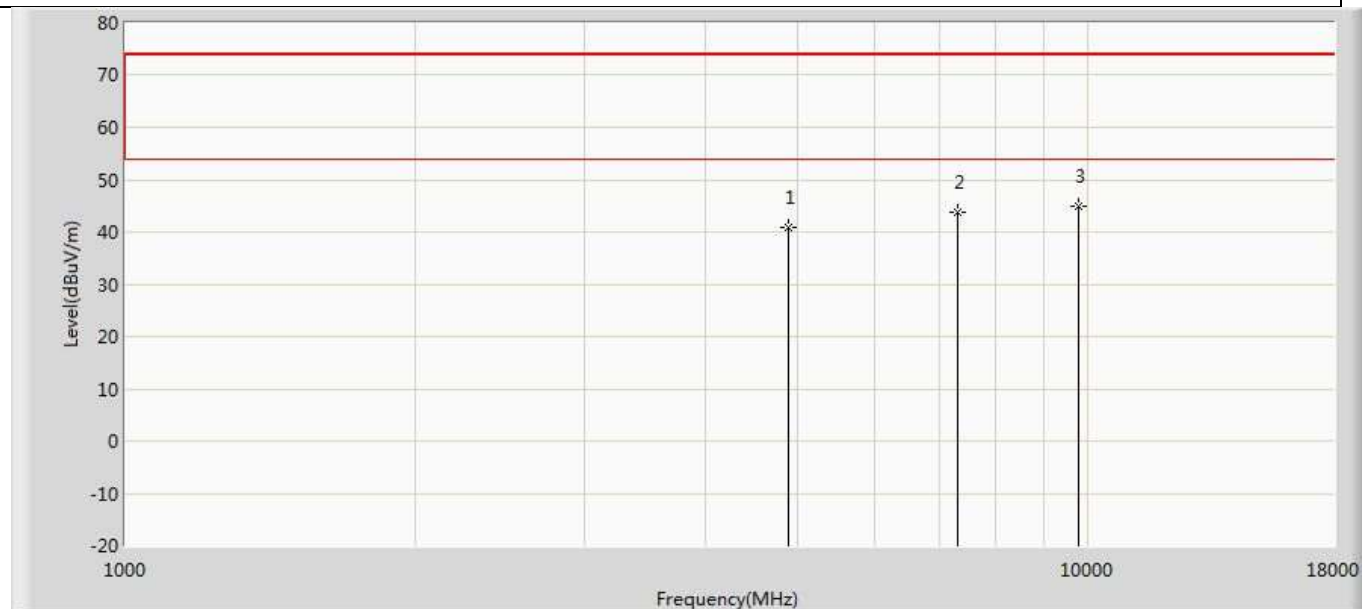


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4880.000	40.927	37.286	-33.073	74.000	3.640	PK
2		7320.000	43.645	36.960	-30.355	74.000	6.685	PK
3	*	9760.000	44.789	36.085	-29.211	74.000	8.704	PK

Profile: 2040805R	Page No.: 98
Engineer: YULIU	
Site: AC5	Time: 2020/05/19 - 19:49
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2440MHz	

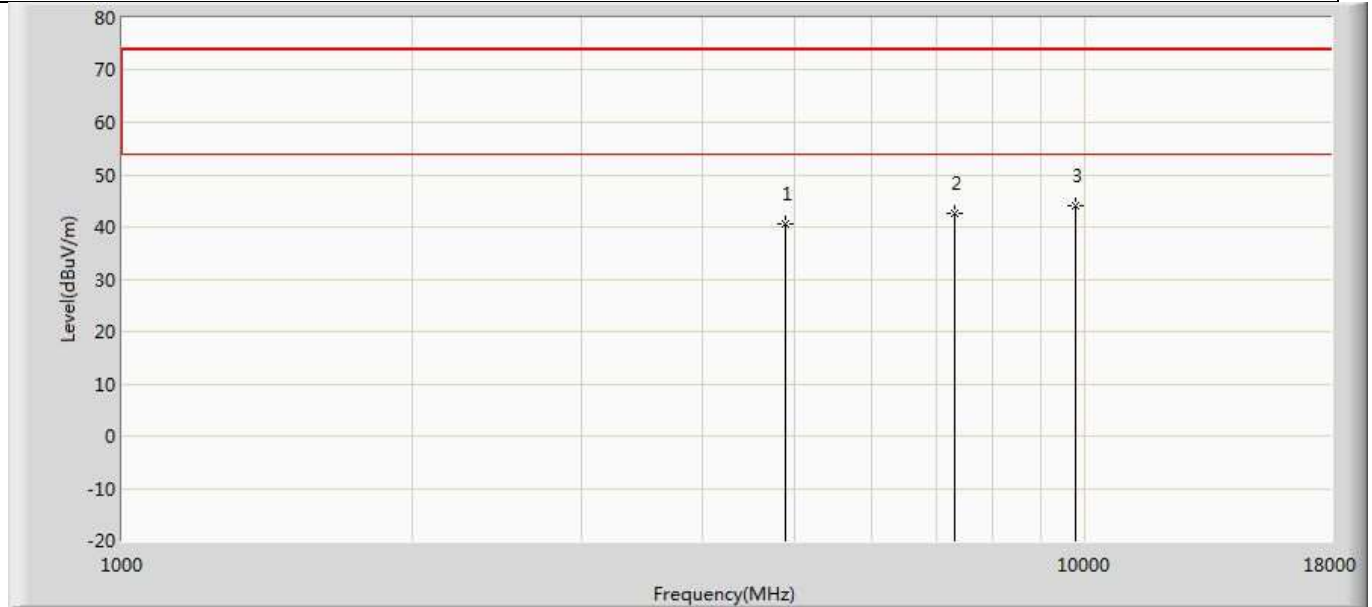


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4880.000	40.636	36.995	-33.364	74.000	3.640	PK
2		7320.000	42.716	36.031	-31.284	74.000	6.685	PK
3	*	9760.000	44.016	35.312	-29.984	74.000	8.704	PK

Profile: 2040805R	Page No.: 99
Engineer: YULIU	
Site: AC5	Time: 2020/05/19 - 19:49
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2480MHz	

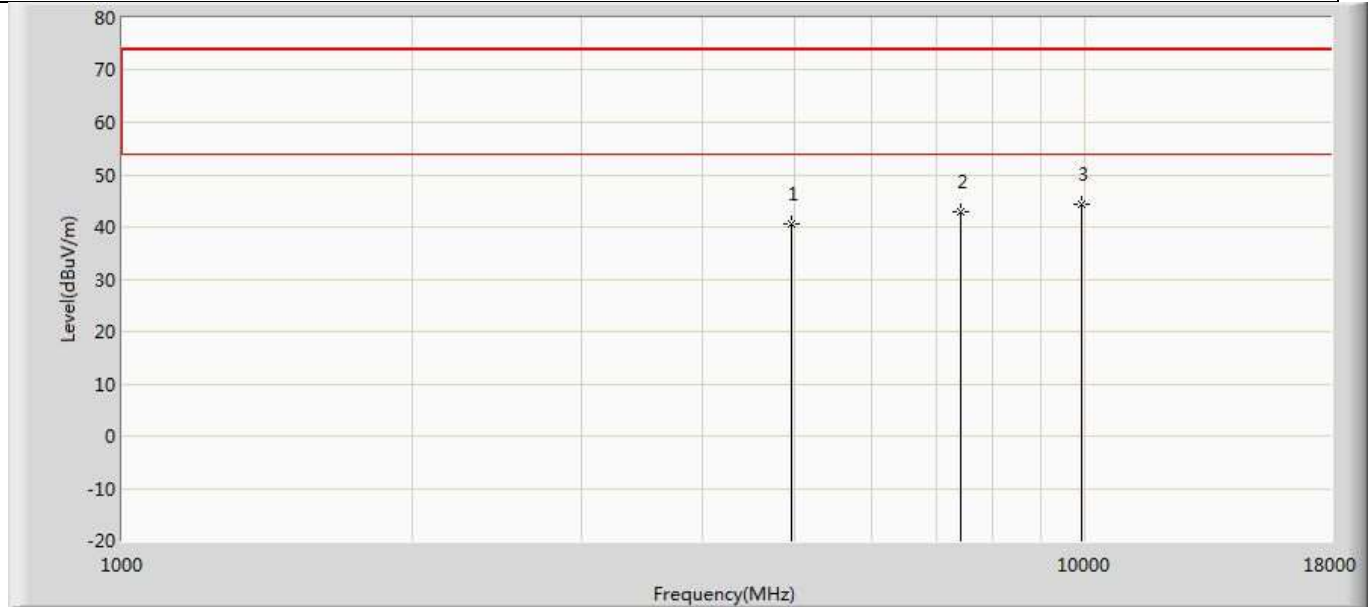

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	40.630	37.019	-33.370	74.000	3.611	PK
2		7440.000	42.915	36.330	-31.085	74.000	6.585	PK
3	*	9920.000	44.236	35.511	-29.764	74.000	8.725	PK

Profile: 2040805R	Page No.: 100
Engineer: YULIU	
Site: AC5	Time: 2020/05/19 - 19:49
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2480MHz	

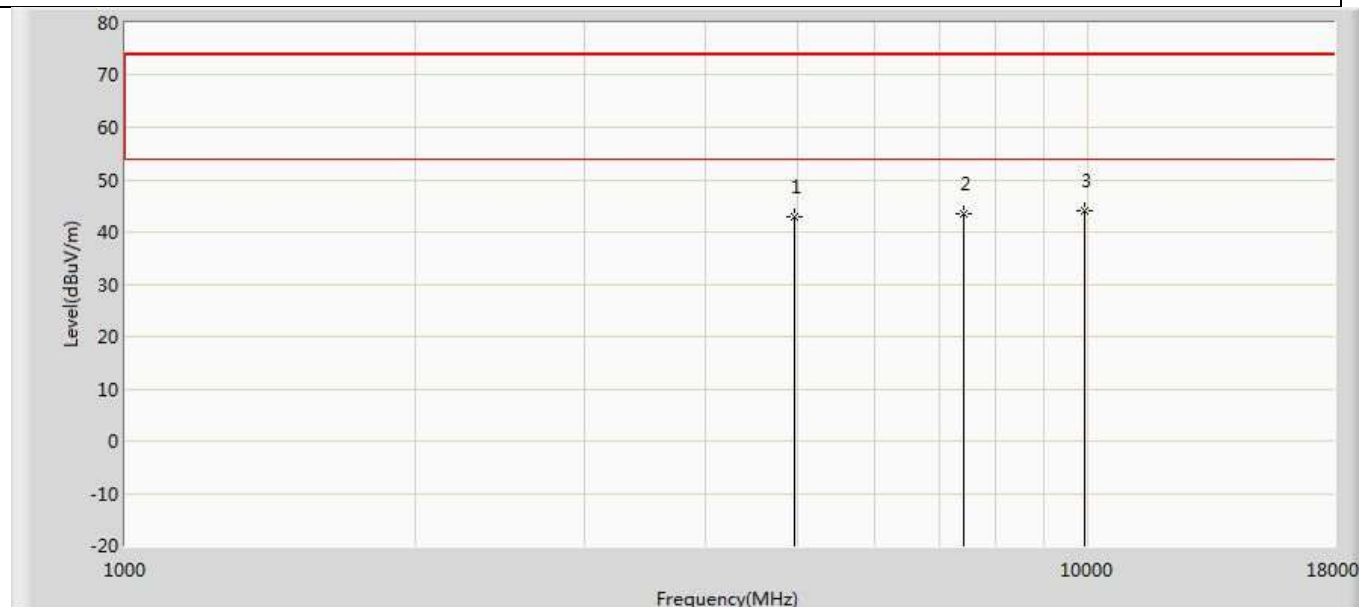


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	42.828	39.217	-31.172	74.000	3.611	PK
2		7440.000	43.431	36.846	-30.569	74.000	6.585	PK
3	*	9920.000	44.120	35.395	-29.880	74.000	8.725	PK

Note:

1. Measured Level = Reading Level + Factor.
2. The test frequency range, 9kHz~30MHz, 18GHz~26GHz, both of the worst case are at least 20dB below the limits, therefore no data appear in the report.
3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.
4. As the radiated emission was performed, so conducted emission was not tested.

The worst case of Radiated Emission below 1GHz:

Site: AC2	Time: 2020/05/11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: SuZ-2141	Polarity: Horizontal
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 1	

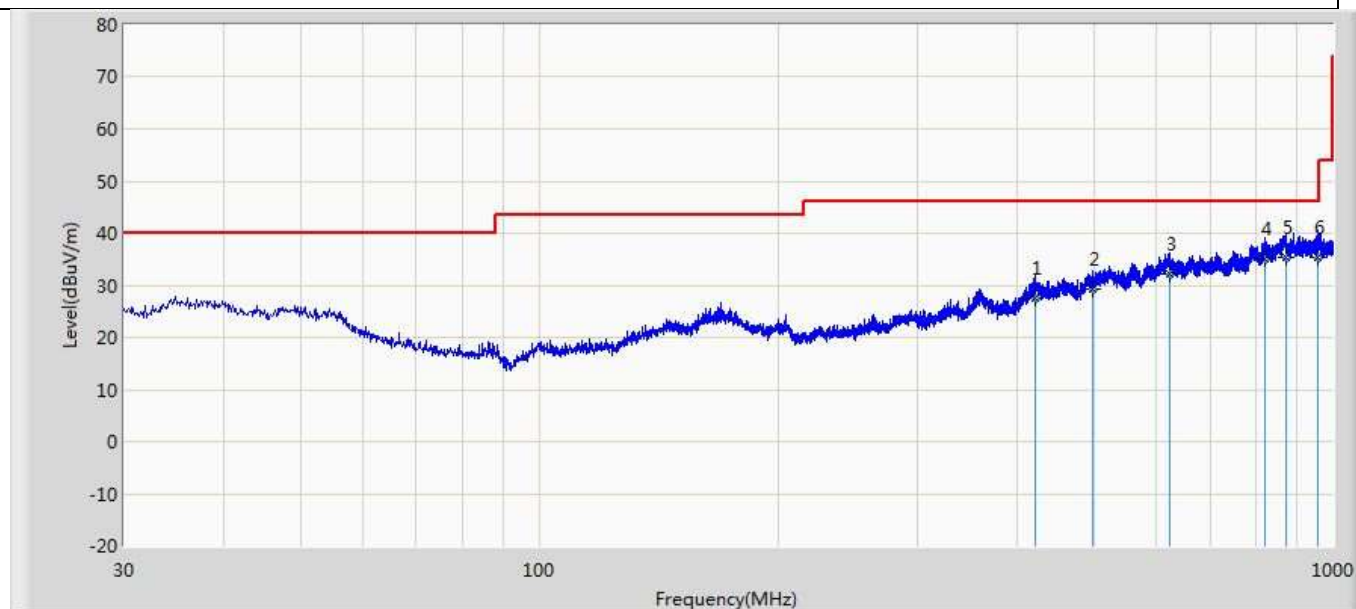


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Probe (dB/m)	Cable (dB)	Amp (dB)	Ant Pos (cm)	Table Pos (deg)	Type
1		422.001	27.565	0.600	-18.435	46.000	19.023	7.942	0.000	100	57	QP
2		497.904	29.293	1.300	-16.707	46.000	19.827	8.166	0.000	100	44	QP
3		623.276	32.224	1.100	-13.776	46.000	22.624	8.499	0.000	100	222	QP
4		820.670	35.118	1.300	-10.882	46.000	24.824	8.993	0.000	100	340	QP
5		873.900	35.417	0.900	-10.583	46.000	25.406	9.111	0.000	100	83	QP
6	*	958.770	35.469	0.500	-10.531	46.000	25.659	9.310	0.000	100	30	QP

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

Site: AC2	Time: 2020/05/11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: SuZ-2141	Polarity: Vertical
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 1	

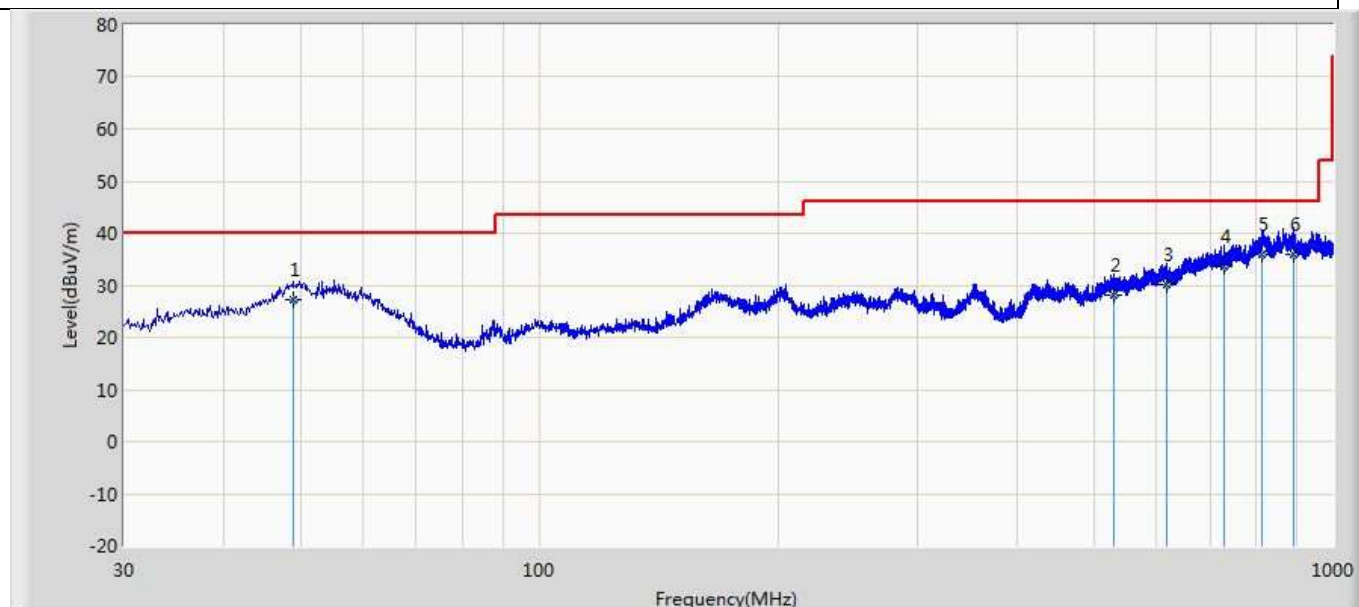

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Probe (dB/m)	Cable (dB)	Amp (dB)	Ant Pos (cm)	Table Pos (deg)	Type
1		48.915	27.336	2.400	-12.664	40.000	18.450	6.486	0.000	100	71	QP
2		530.760	28.095	0.700	-17.905	46.000	19.140	8.255	0.000	100	127	QP
3		617.578	30.166	1.500	-15.834	46.000	20.182	8.485	0.000	100	250	QP
4		729.370	33.685	2.000	-12.315	46.000	22.913	8.772	0.000	100	203	QP
5		814.730	35.842	0.700	-10.158	46.000	26.162	8.980	0.000	100	264	QP
6	*	891.360	35.922	0.700	-10.078	46.000	26.072	9.150	0.000	100	81	QP

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

4.3 Emissions in non-restricted frequency band

VERDICT: PASS


4.3.1 Limit

Standard	FCC Part 15 Subpart C Paragraph 15.247(d)
RF Output power (Detection methods)	Limit(dB)
RF Output power(Average detector)	30dBc(Note1)
RF Output power(PK detector)	20dBc(Note2)

Note 1: If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).

Note 2: If the maximum peak conducted output power procedure was used, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).

4.3.2 Test Setup

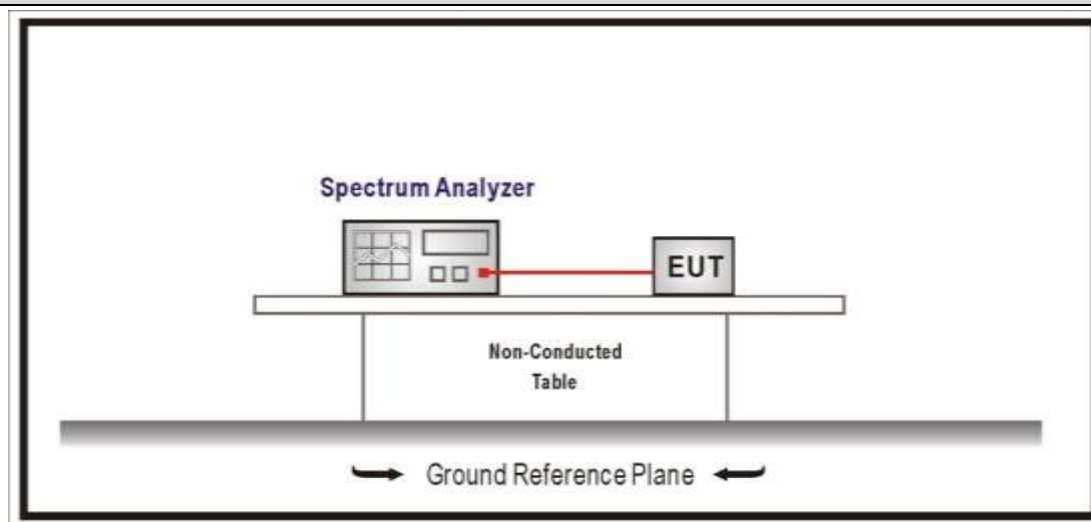

4.3.3 Test Procedure


References Rule	Chapter	Description
☒ ANSI C63.10	11.11	Emissions in non-restricted frequency bands
☒ ANSI C63.10	11.11.1	General
☒ ANSI C63.10	11.11.2	Reference level measurement
☒ ANSI C63.10	11.11.3	Emission level measurement

4.3.4 Test Data

Mode	Channel	Test Frequency (MHz)	Maximum In-Band PSD[a] (dBm/100kHz)	Frequency (MHz)	Out-Band PSD[b] (dBm/100kHz)	[a]-[b] (dB)	Limit (dB)	Result
1	00	2402	3.956	2400	-52.776	56.732	>20	Pass
	39	2480	3.745	2500	-62.862	66.607	>20	Pass
2	00	2402	4.509	2400	-26.993	31.502	>20	Pass
	39	2480	4.049	2500	-63.635	67.684	>20	Pass

Note 1: The worst data plot as below:

Mode2/CH00/2402MHz

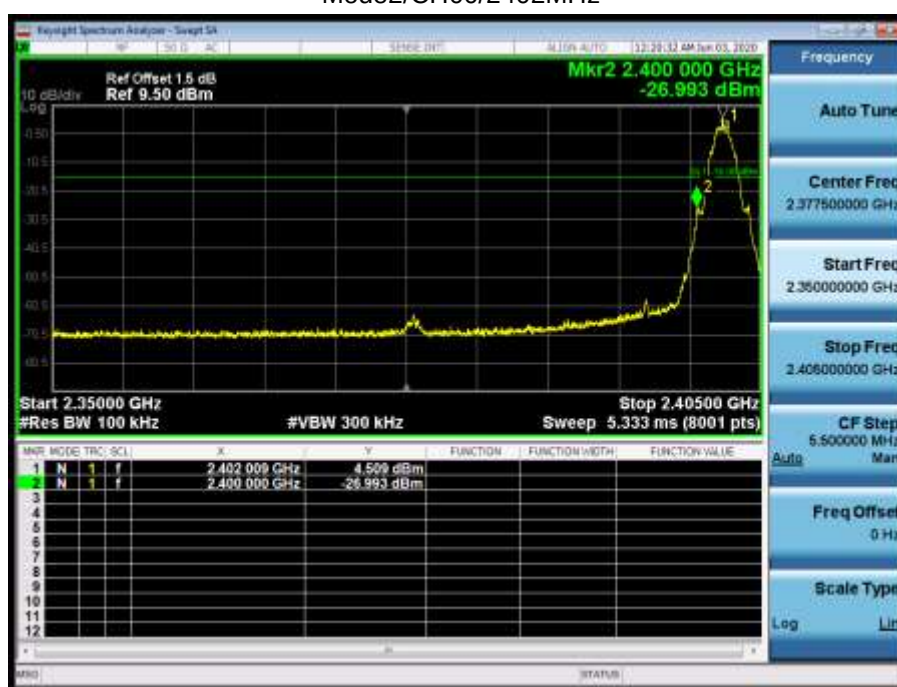


4.4 Duty cycle

VERDICT: PASS

4.4.1 Limit

N/A

4.4.2 Test Setup

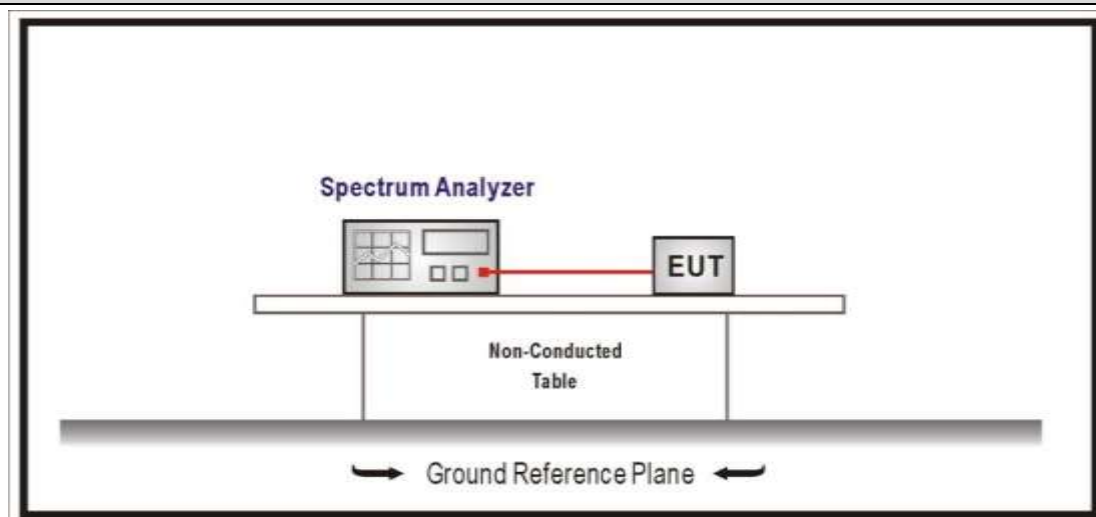

4.4.3 Test Procedure

References Rule		Chapter	Description
☒	ANSI C63.10	11.6	Duty cycle (D), transmission duration (T), and maximum power control level


4.4.4 Test Data

Test Mode	Tx On (ms)	Tx Off (ms)	VBW	Tx On + Tx Off (ms)	Duty Cycle (%)
Mode 1	2.1	0.4	0.476 kHz	2.5	84
Mode 2	1.07	0.81	0.935 kHz	1.88	57


Note 1: T means the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Note 2: According to KDB 558074, when test for Radiated Emission Band Edge and Radiated Emission, for average detector set: $VBW \geq 1/T$ will be used.

Mode 1 CH19 2440MHz

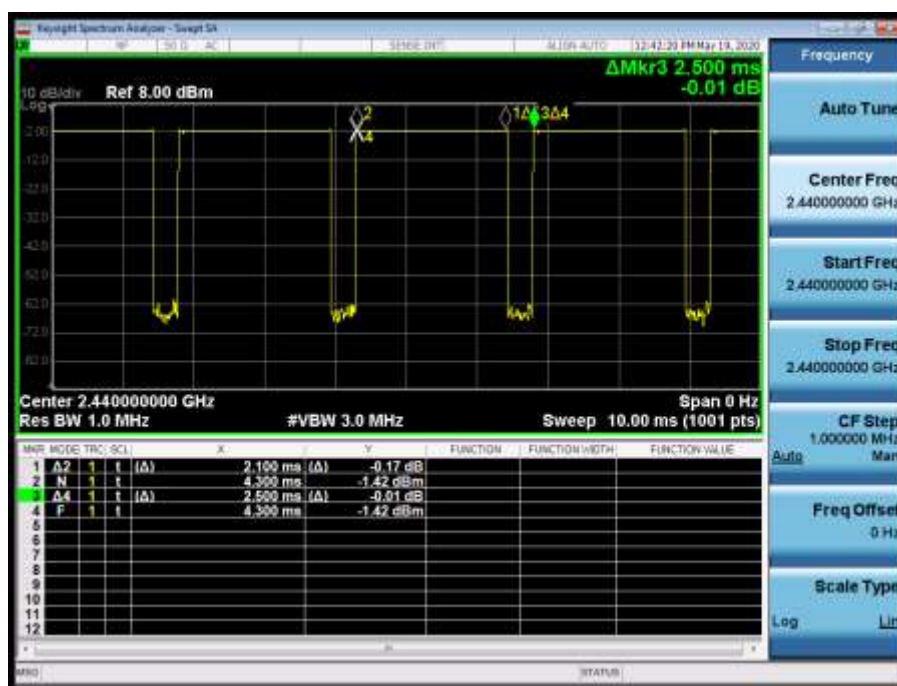

Mode 2 CH19 2440MHz

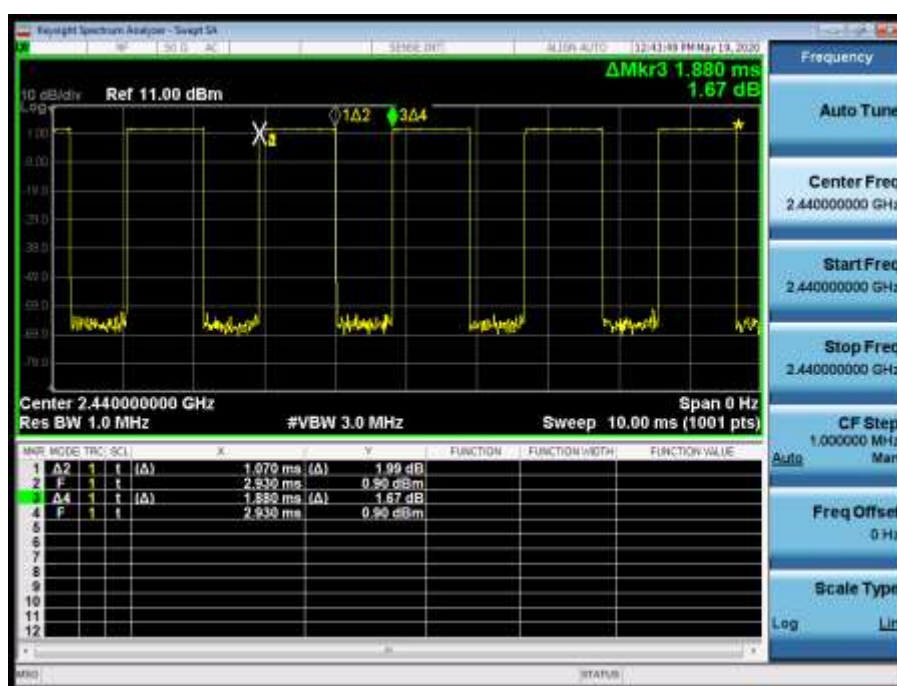


4.5 Radiated Emission Band Edge**VERDICT: PASS****4.5.1 Limit**

Standard		FCC Part 15 Subpart C Paragraph 15.247(d) , 15.209		
Frequency bands (MHz)	Detector	Limit (dB μ V/m)	RBW (MHz)	Distance (m)
2310-2390	PK	74	1	3
2483.5-2500	AV	54	1	3

Note: The field strength of emissions appearing within these frequency bands shall not exceed the limits.

4.5.2 Test Setup


Above 1GHz Test Setup:

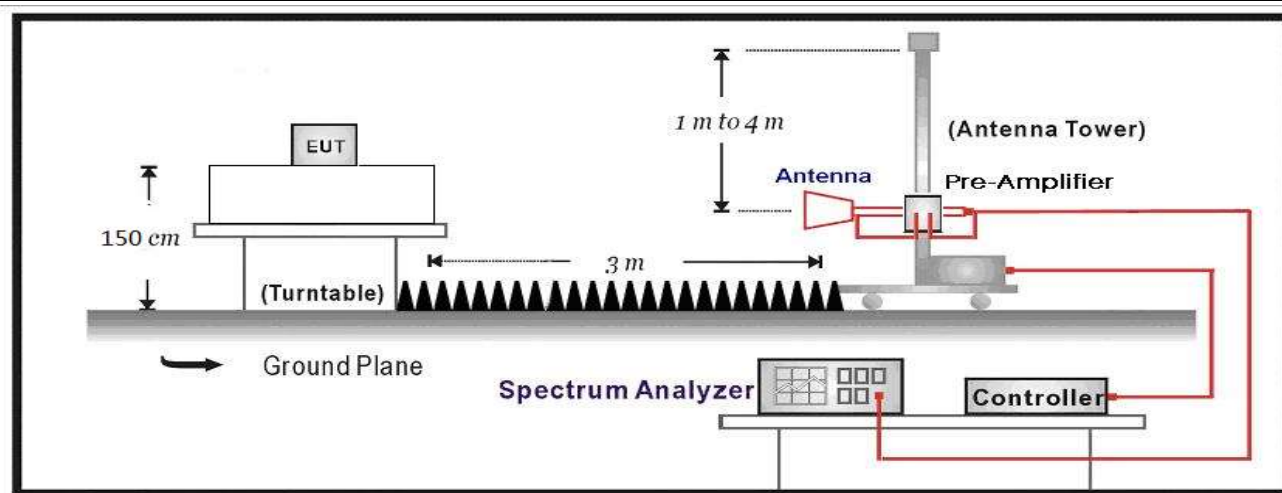**4.5.3 Test Procedure**

	References Rule	Chapter	Description
☒	ANSI C63.10	6.10	Band-edge testing
☒	☒ ANSI C63.10	6.10.5	Restricted-band band-edge measurements
☐	☐ ANSI C63.10	6.10.6	Marker-delta method
☒	ANSI C63.10	11.12	Emissions in restricted frequency bands
☒	☒ ANSI C63.10	11.12.1	Radiated emission measurements
☒	☒ ANSI C63.10	11.12.2.7	Radiated spurious emission test
☐	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
☐	ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
☒	ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz


4.5.4 Test Data

Profile: 2040805R	Page No.: 25
Engineer: YULIU	
Site: AC5	Time: 2020/05/14 - 16:25
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz	

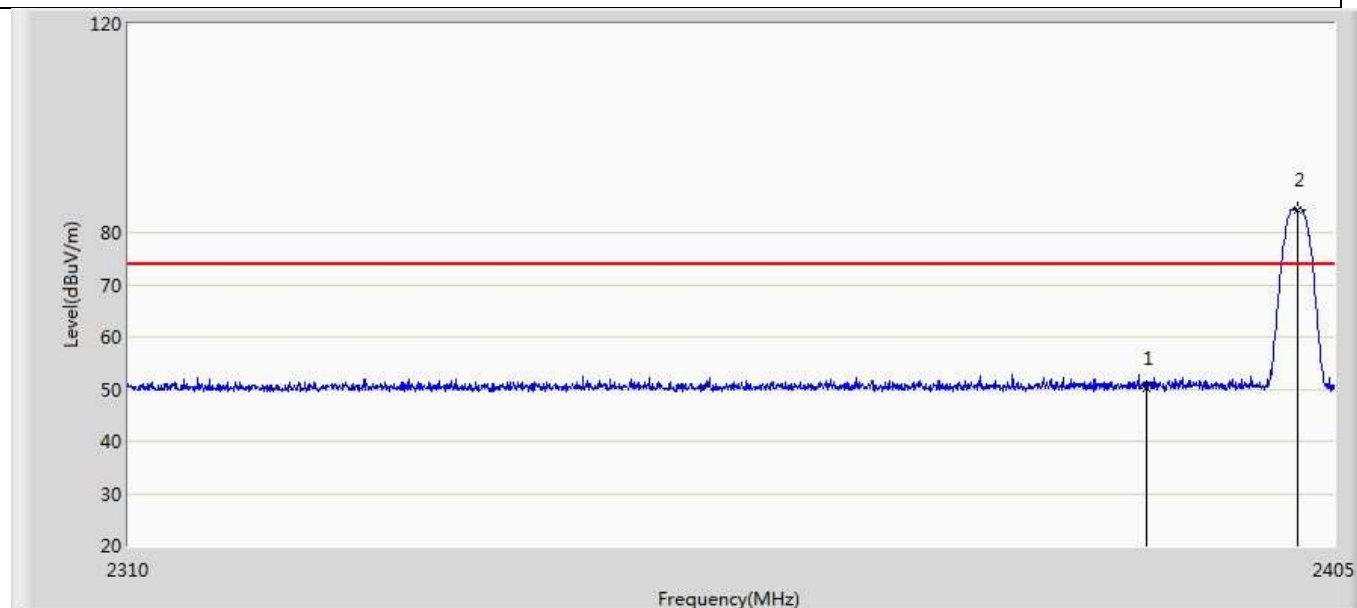


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	50.135	14.820	-23.865	74.000	35.315	PK
2	*	2402.103	84.489	49.177	N/A	N/A	35.312	PK

Profile: 2040805R	Page No.: 26
Engineer: YULIU	
Site: AC5	Time: 2020/05/14 - 16:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz	

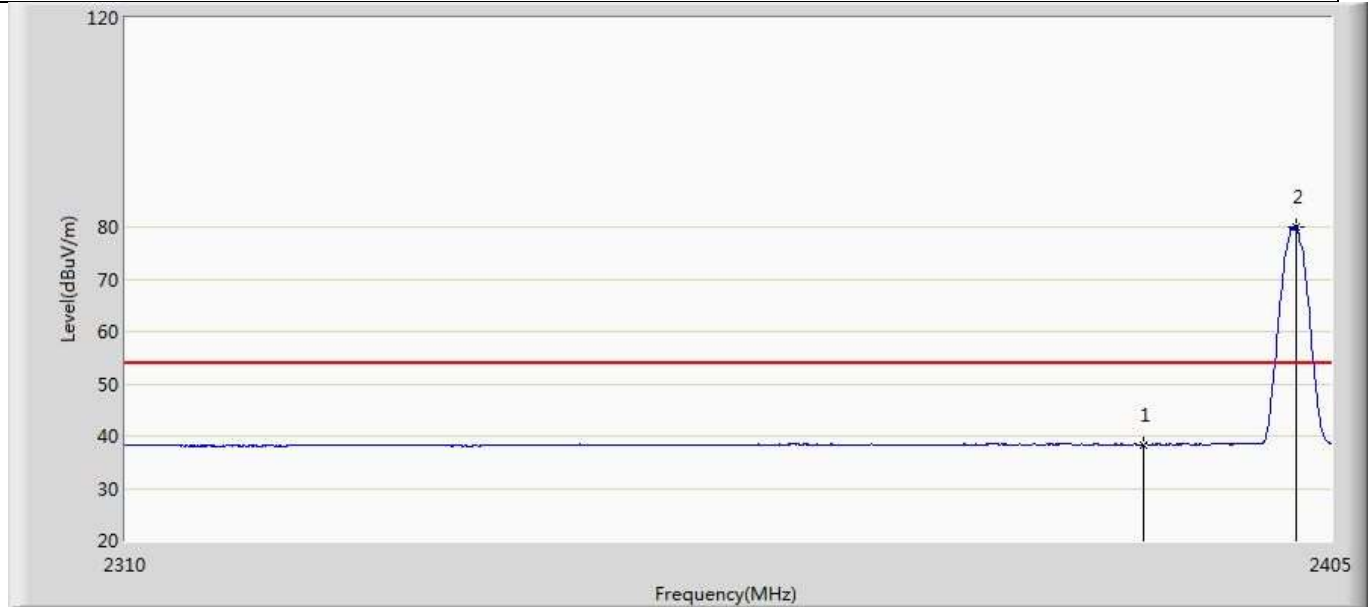


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	38.360	3.045	-15.640	54.000	35.315	AV
2	*	2402.150	80.095	44.783	N/A	N/A	35.312	AV

Profile: 2040805R	Page No.: 27
Engineer: YULIU	
Site: AC5	Time: 2020/05/14 - 16:30
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz	

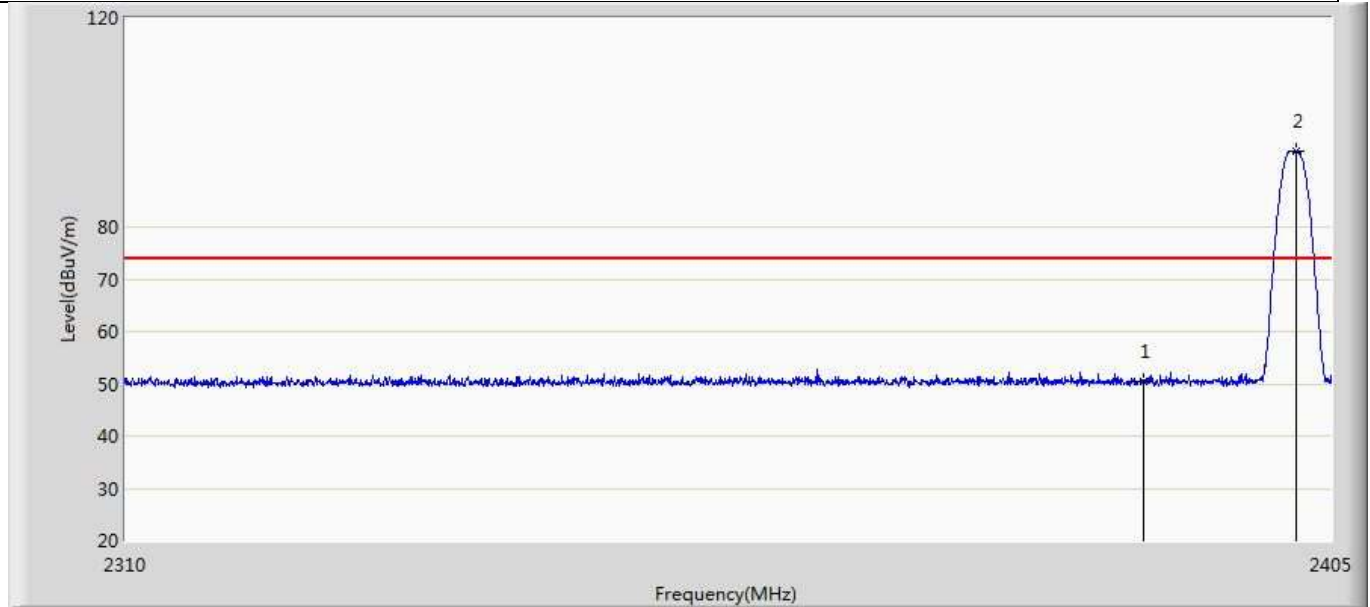


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	50.407	15.092	-23.593	74.000	35.315	PK
2	*	2402.150	94.483	59.171	N/A	N/A	35.312	PK

Profile: 2040805R	Page No.: 28
Engineer: YULIU	
Site: AC5	Time: 2020/05/14 - 16:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz	

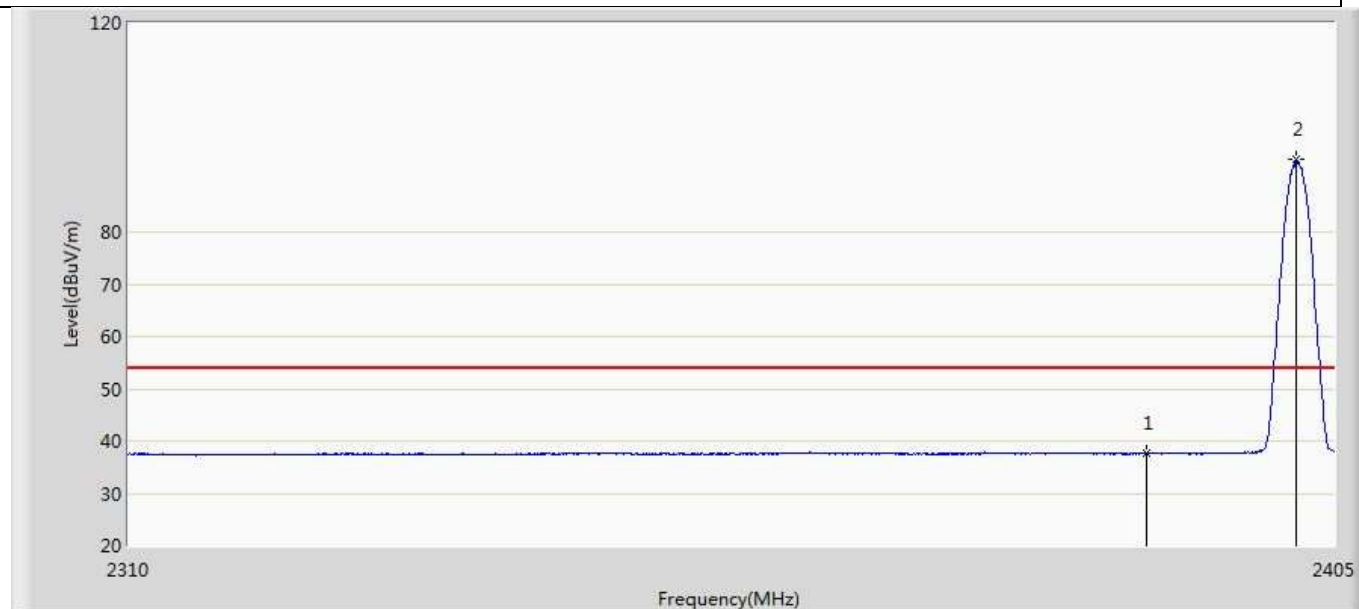


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	37.614	2.299	-16.386	54.000	35.315	AV
2	*	2401.960	93.798	58.486	N/A	N/A	35.312	AV

Profile: 2040805R	Page No.: 29
Engineer: YULIU	
Site: AC5	Time: 2020/05/14 - 16:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz	

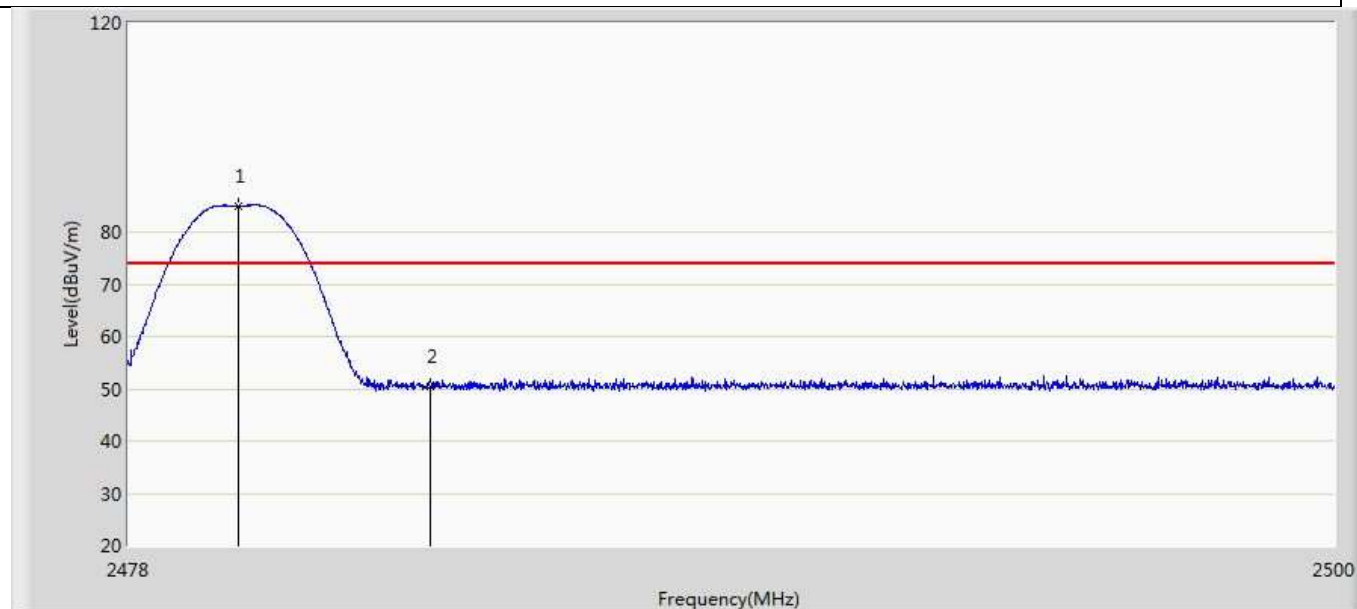


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.013	85.063	49.764	N/A	N/A	35.299	PK
2		2483.500	50.542	15.244	-23.458	74.000	35.297	PK

Profile: 2040805R	Page No.: 30
Engineer: YULIU	
Site: AC5	Time: 2020/05/14 - 16:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz	

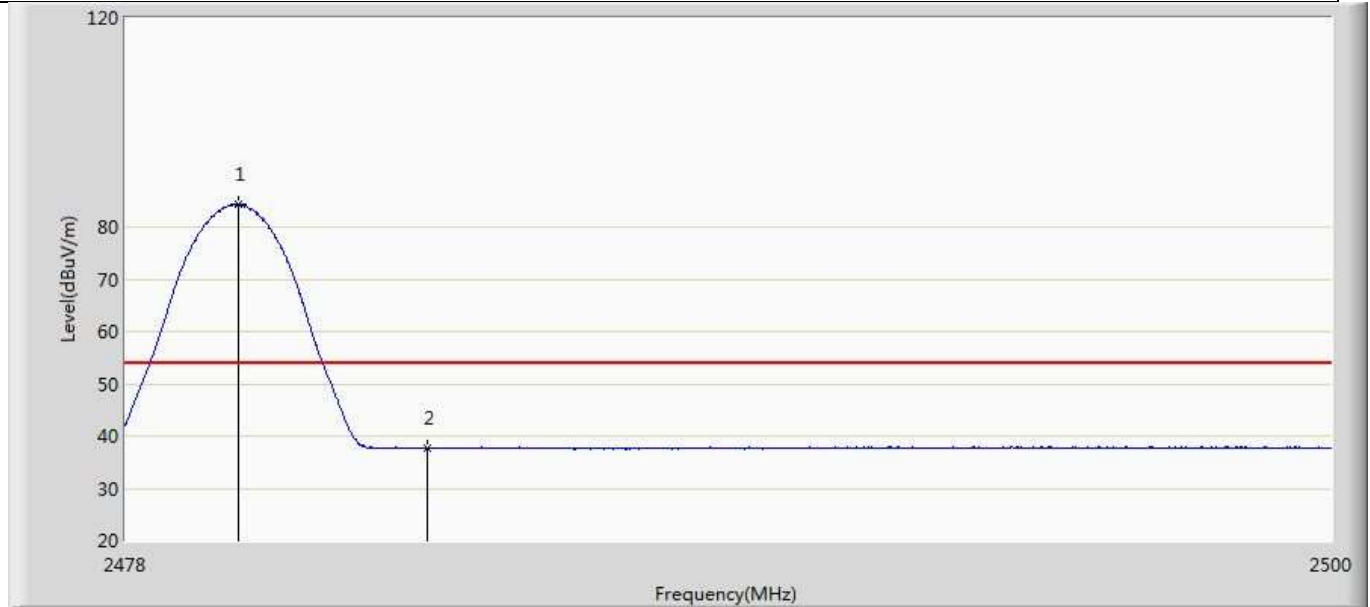


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.046	84.258	48.959	N/A	N/A	35.299	AV
2		2483.500	37.689	2.391	-16.311	54.000	35.297	AV

Profile: 2040805R	Page No.: 31
Engineer: YULIU	
Site: AC5	Time: 2020/05/14 - 16:41
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz	

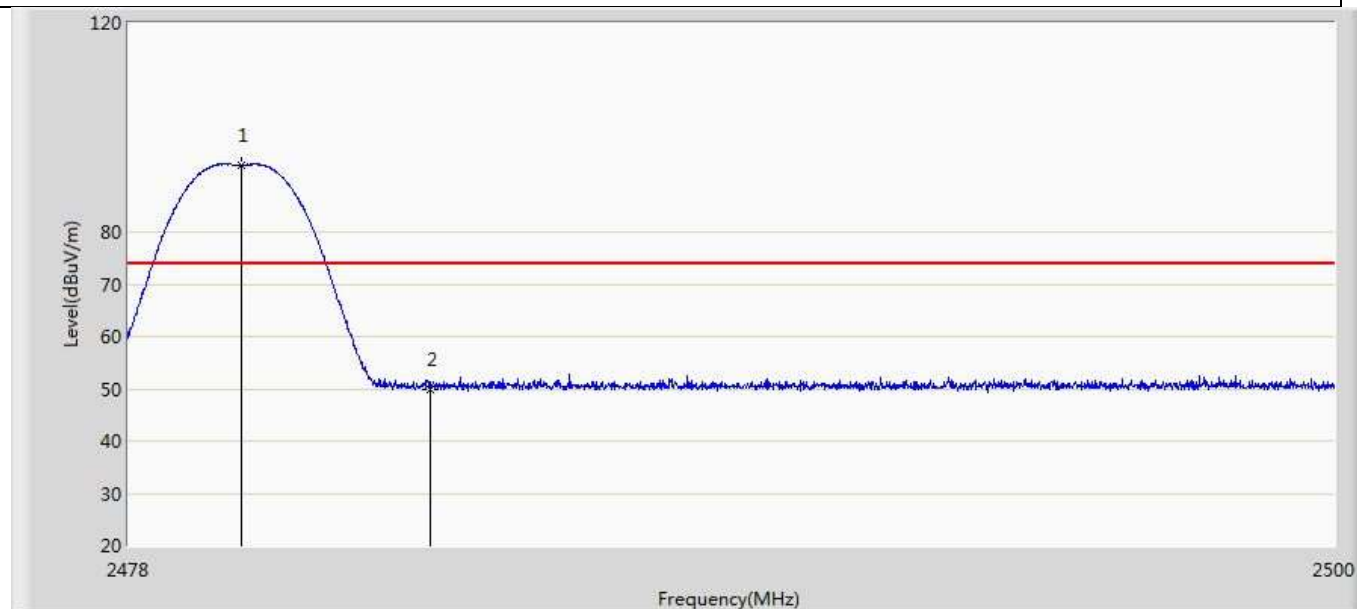


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.046	92.853	57.554	N/A	N/A	35.299	PK
2		2483.500	49.977	14.679	-24.023	74.000	35.297	PK

Profile: 2040805R	Page No.: 32
Engineer: YULIU	
Site: AC5	Time: 2020/05/14 - 16:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz	

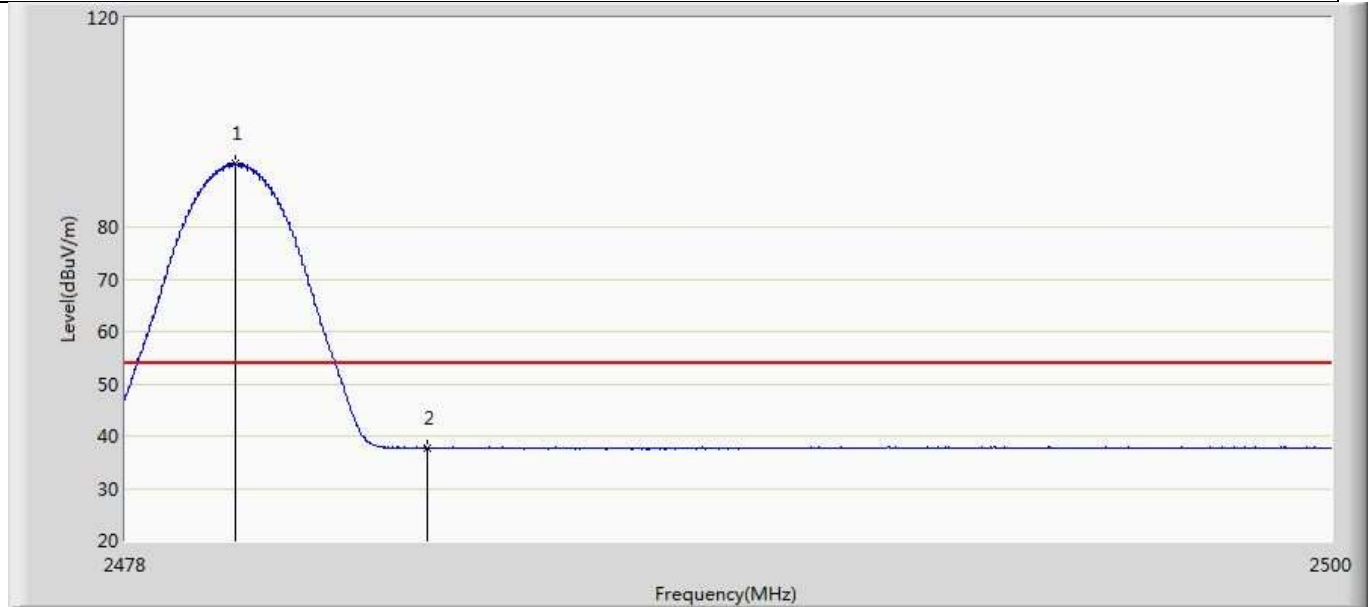


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.002	92.248	56.949	N/A	N/A	35.299	AV
2		2483.500	37.634	2.336	-16.366	54.000	35.297	AV

Profile: 2040805R	Page No.: 33
Engineer: YULIU	
Site: AC5	Time: 2020/05/14 - 16:45
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2402MHz	

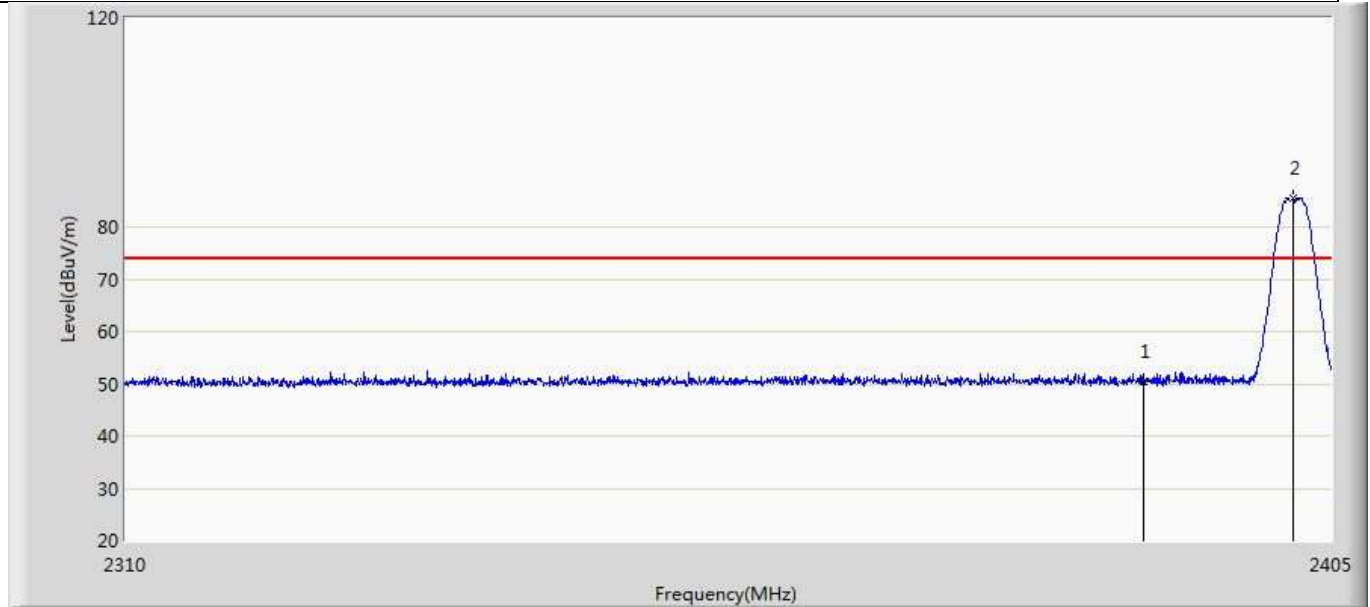


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	50.553	15.238	-23.447	74.000	35.315	PK
2	*	2402.008	85.438	50.126	N/A	N/A	35.312	PK

Profile: 2040805R	Page No.: 34
Engineer: YULIU	
Site: AC5	Time: 2020/05/14 - 16:48
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2402MHz	

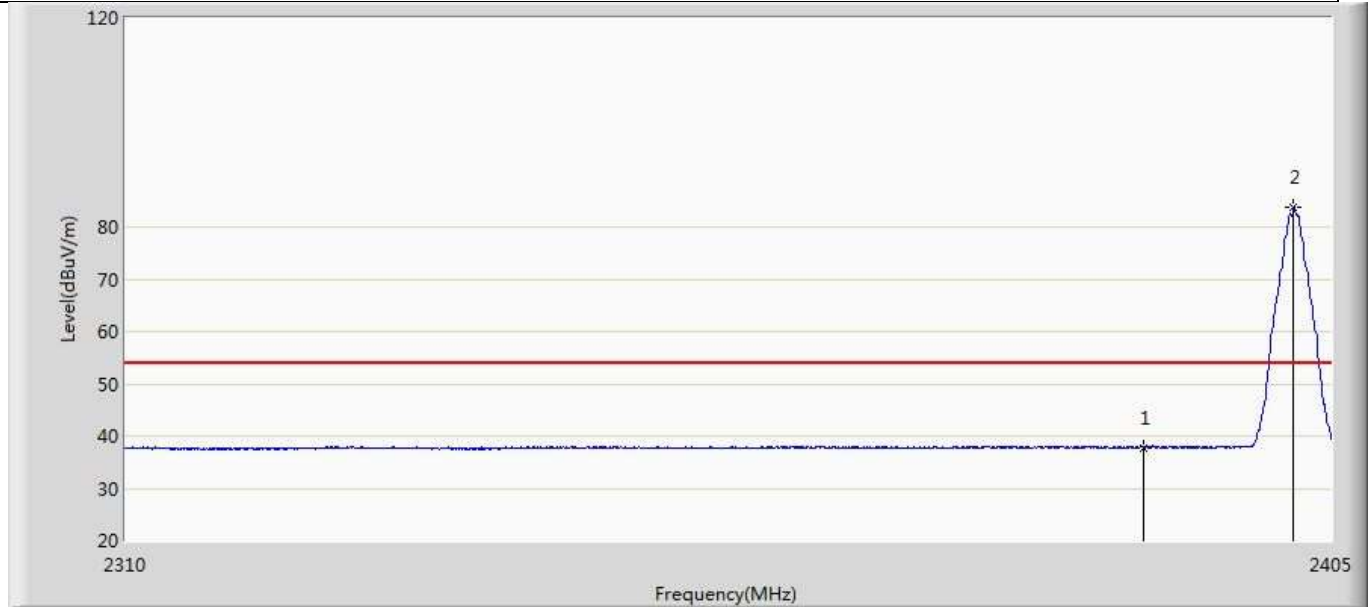


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	37.679	2.364	-16.321	54.000	35.315	AV
2	*	2402.008	83.692	48.380	N/A	N/A	35.312	AV

Profile: 2040805R	Page No.: 35
Engineer: YULIU	
Site: AC5	Time: 2020/05/14 - 16:51
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2402MHz	

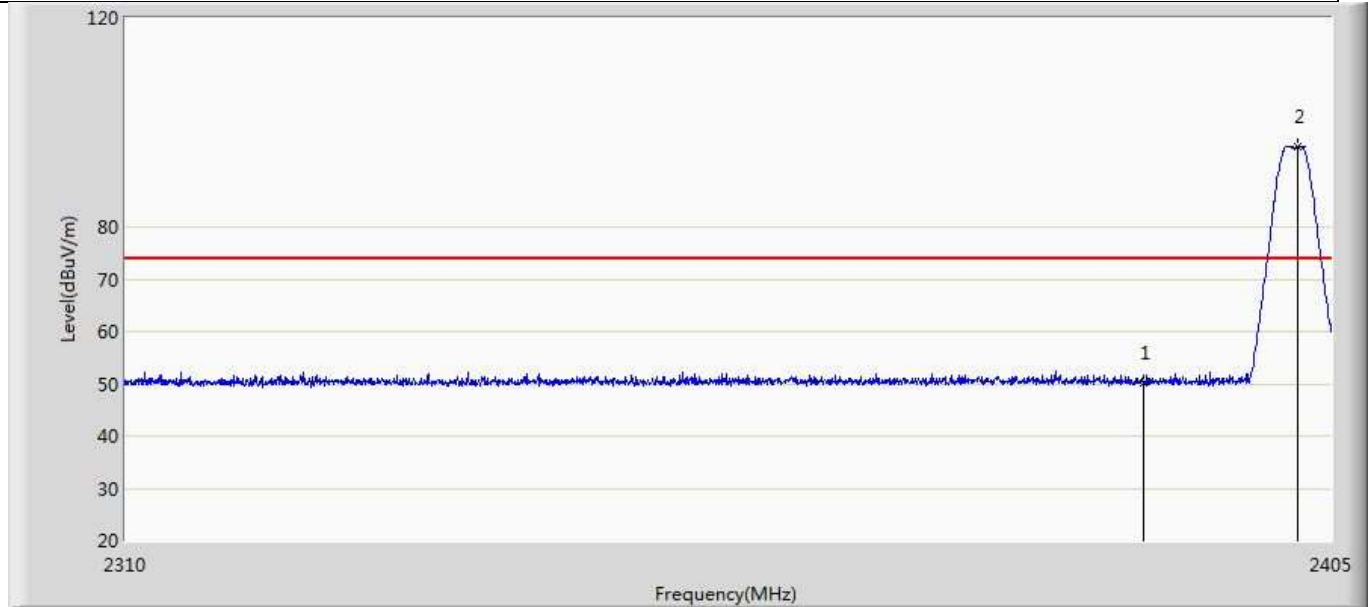


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	50.141	14.826	-23.859	74.000	35.315	PK
2	*	2402.292	95.342	60.030	N/A	N/A	35.312	PK

Profile: 2040805R	Page No.: 36
Engineer: YULIU	
Site: AC5	Time: 2020/05/14 - 16:54
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2402MHz	

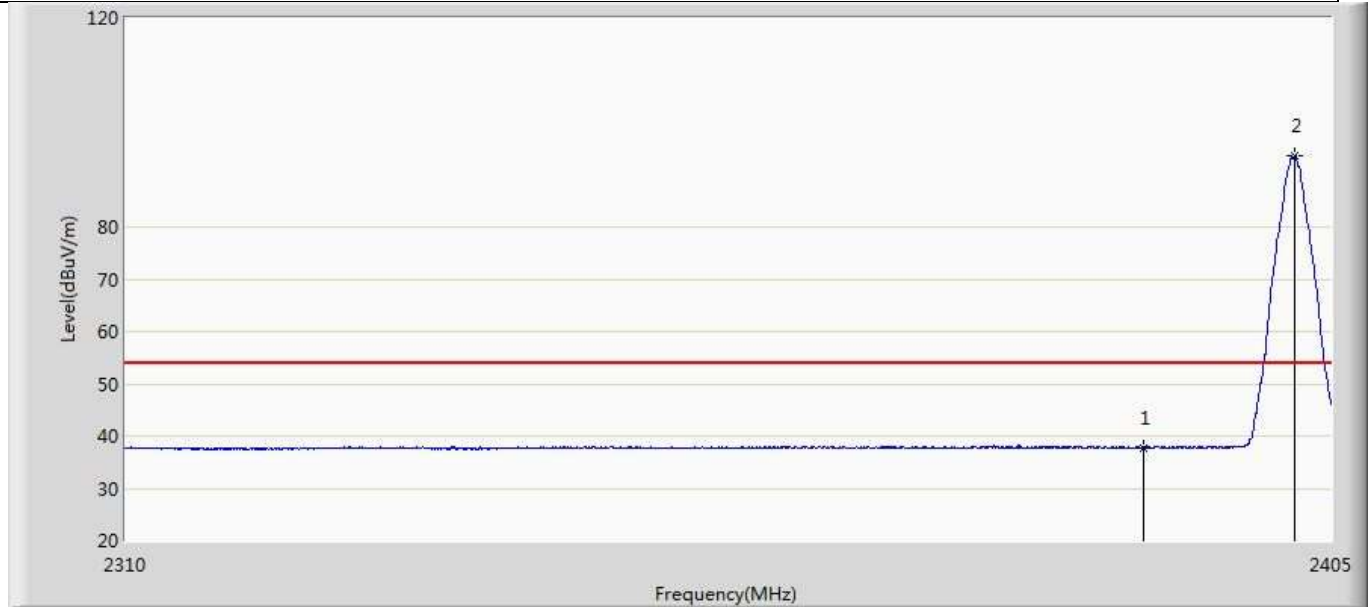


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	37.768	2.453	-16.232	54.000	35.315	AV
2	*	2402.055	93.554	58.242	N/A	N/A	35.312	AV

Profile: 2040805R	Page No.: 37
Engineer: YULIU	
Site: AC5	Time: 2020/05/14 - 16:56
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2480MHz	

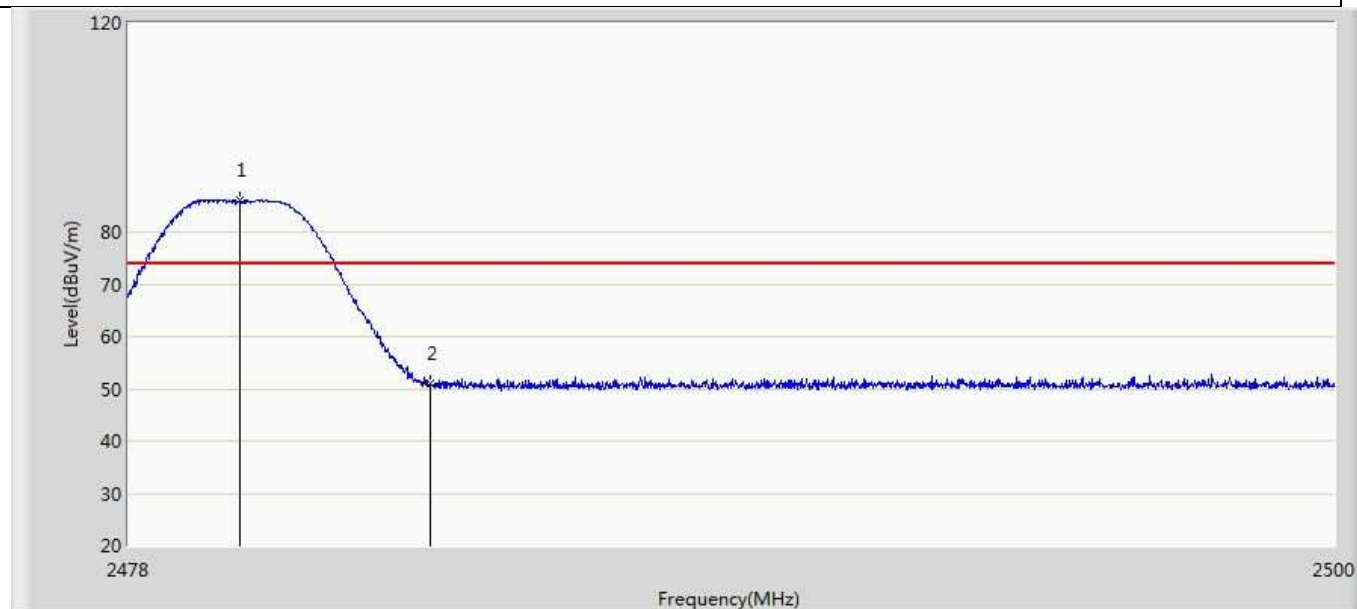


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.035	86.056	50.757	N/A	N/A	35.299	PK
2		2483.500	51.121	15.823	-22.879	74.000	35.297	PK

Profile: 2040805R	Page No.: 38
Engineer: YULIU	
Site: AC5	Time: 2020/05/14 - 16:59
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2480MHz	

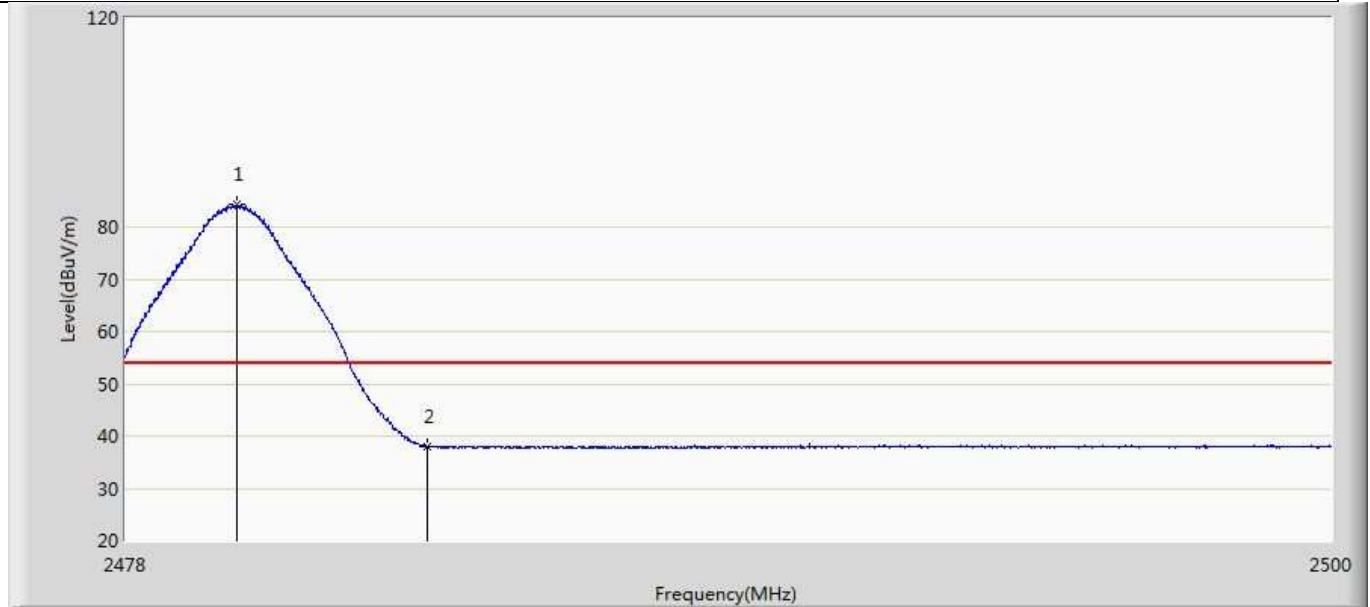


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.024	84.289	48.990	N/A	N/A	35.299	AV
2		2483.500	37.949	2.651	-16.051	54.000	35.297	AV

Profile: 2040805R	Page No.: 39
Engineer: YULIU	
Site: AC5	Time: 2020/05/14 - 17:01
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2480MHz	

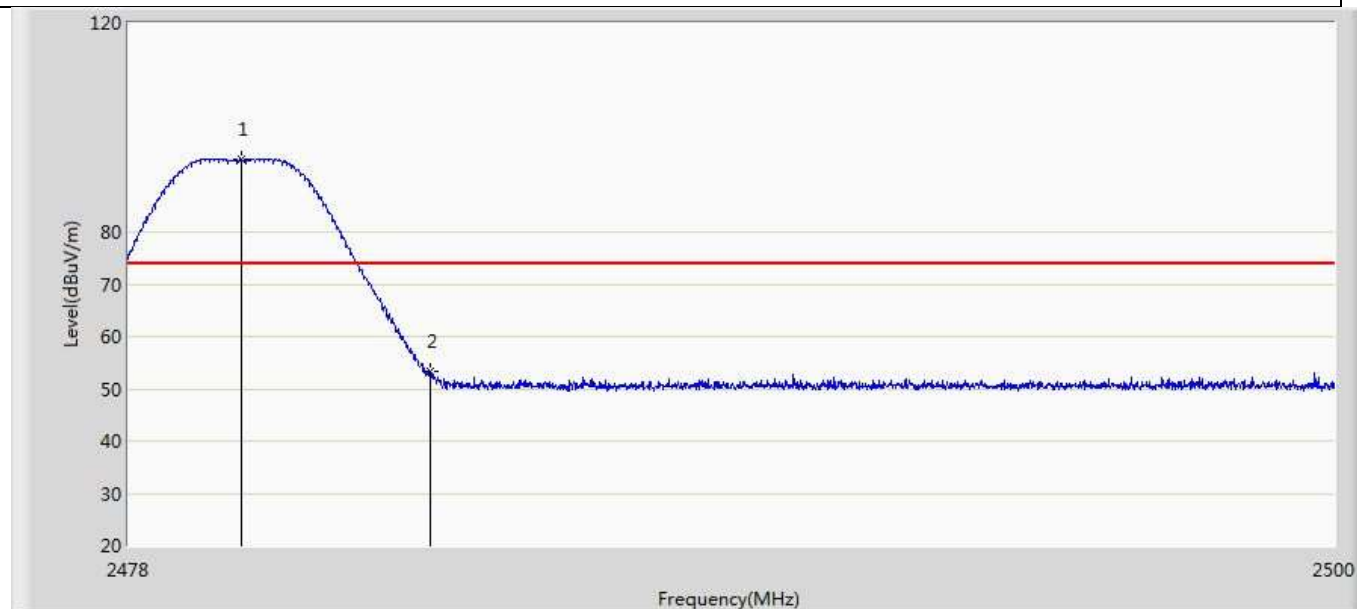

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.046	93.792	58.493	N/A	N/A	35.299	PK
2		2483.500	53.476	18.178	-20.524	74.000	35.297	PK

Profile: 2040805R	Page No.: 40
Engineer: YULIU	
Site: AC5	Time: 2020/05/14 - 17:03
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2480MHz	

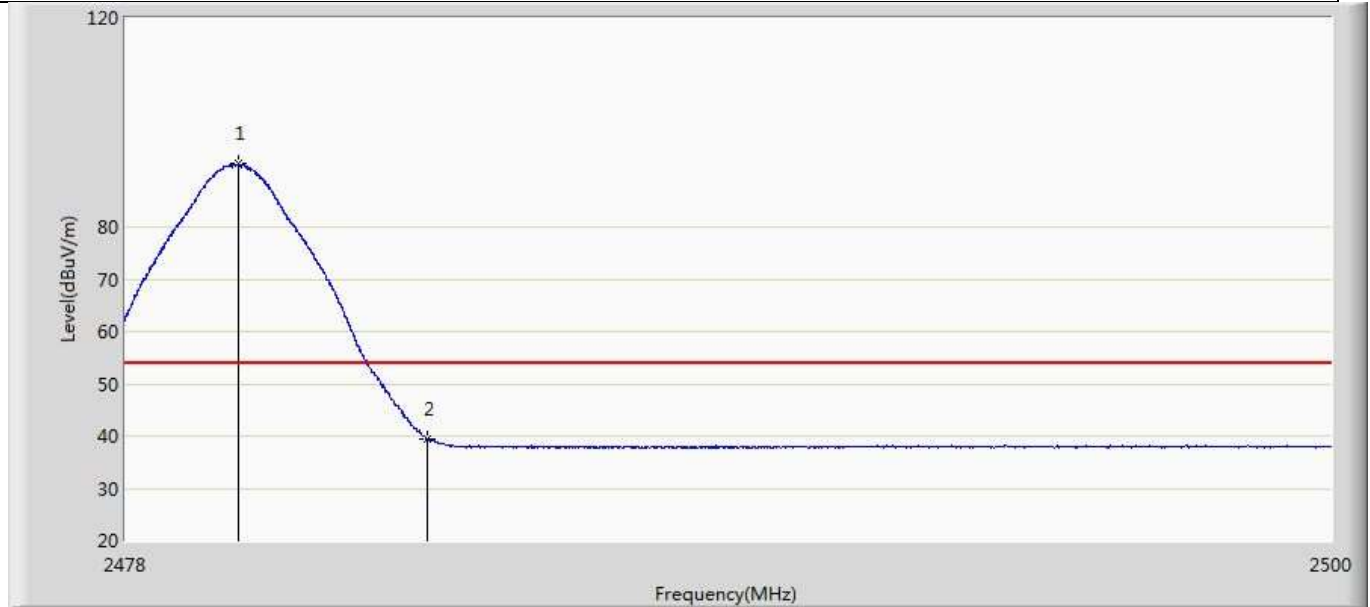


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.046	92.050	56.751	N/A	N/A	35.299	AV
2		2483.500	39.548	4.250	-14.452	54.000	35.297	AV

4.6 DTS Bandwidth**VERDICT: PASS****4.6.1 Limit**

Standard	FCC Part 15 Subpart C Paragraph 15.247 (a)(2)
-----------------	---

Systems using digital modulation techniques operate in the 2400-2483.5 MHz. The minimum 6 dB bandwidth shall be at least 500 kHz

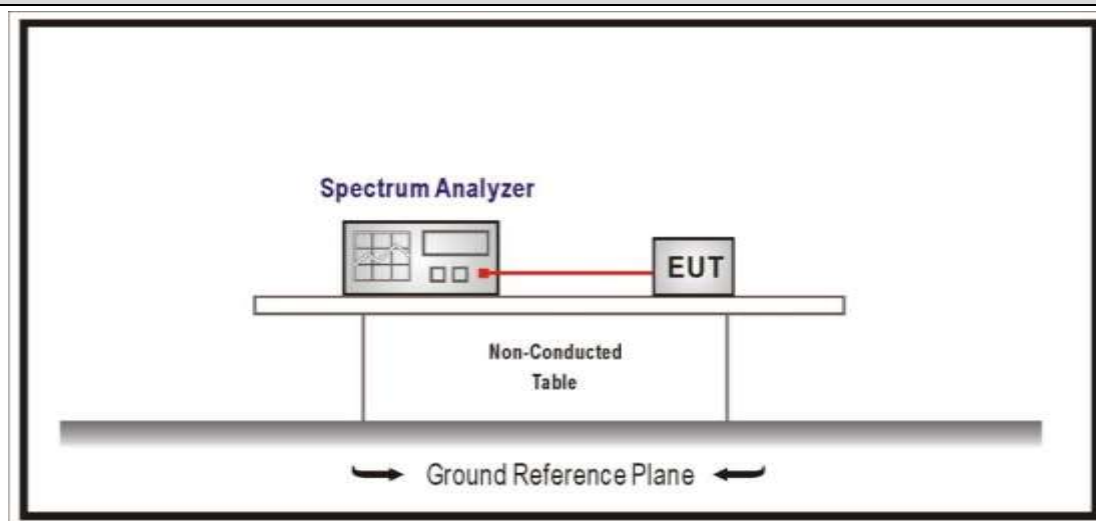4.6.2 Test Setup**4.6.3 Test Procedure**

	Reference Rule	Chapter	Description
☒	ANSI C63.10	11.8	DTS bandwidth
☐	ANSI C63.10	11.8.1	Option 1
☒	ANSI C63.10	11.8.2	Option 2

4.6.4 Test Data

Mode	CH.	Test Freq. (MHz)	99% Occupied Bandwidth (kHz)	6dB Occupied Bandwidth (kHz)	Limit (kHz)	Result
1	00	2402	1103.8	787.9	>500	Pass
	19	2440	1115.5	762.6	>500	Pass
	39	2480	1113.0	757.8	>500	Pass
2	00	2402	2192.2	1109	>500	Pass
	19	2440	2152.5	1107	>500	Pass
	39	2480	2265.2	1105	>500	Pass

Note : The worst case of Occupied Bandwidth as below:


99% Occupied Bandwidth

Mode 2 CH00 (2402MHz)



6dB Occupied Bandwidth

Mode 1 CH39 (2480MHz)

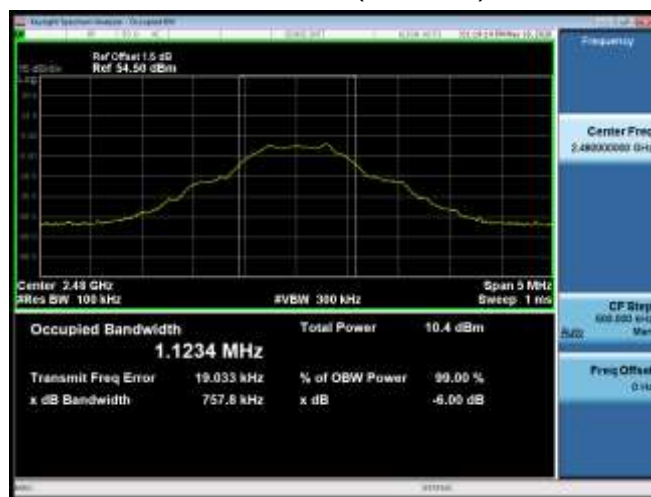


4.7 Fundamental emission output power**VERDICT: PASS****4.7.1 Limit**

Standard		FCC Part 15 Subpart C Paragraph 15.247 (b)(3)
☒	GTX < 6dBi	$P_{out} \leq 30 \text{ dBm}$
☐	GTX > 6dBi	
☐	Non-Fix point-point	$P_{out} \leq 30 - (GTX - 6)$
☐	Fix point-point	$P_{out} \leq 30 - [(GTX - 6)]/3$
☐	Point-to-multipoint	$P_{out} \leq 30 - (GTX - 6)$
☐	Overlap Beams	$P_{out} \leq 30 - [(GTX - 6)]/3$
☐	Aggregate power transmitted simultaneously on all beams	$P_{out} \leq 30 - [(GTX - 6)]/3$
☐	single directional beam	$P_{out} \leq 30 - [(GTX - 6)]/3 + 8 \text{ dB}$

Note 1 : GTX directional gain of transmitting antennas.

Note 2 : Pout is maximum peak conducted output power .

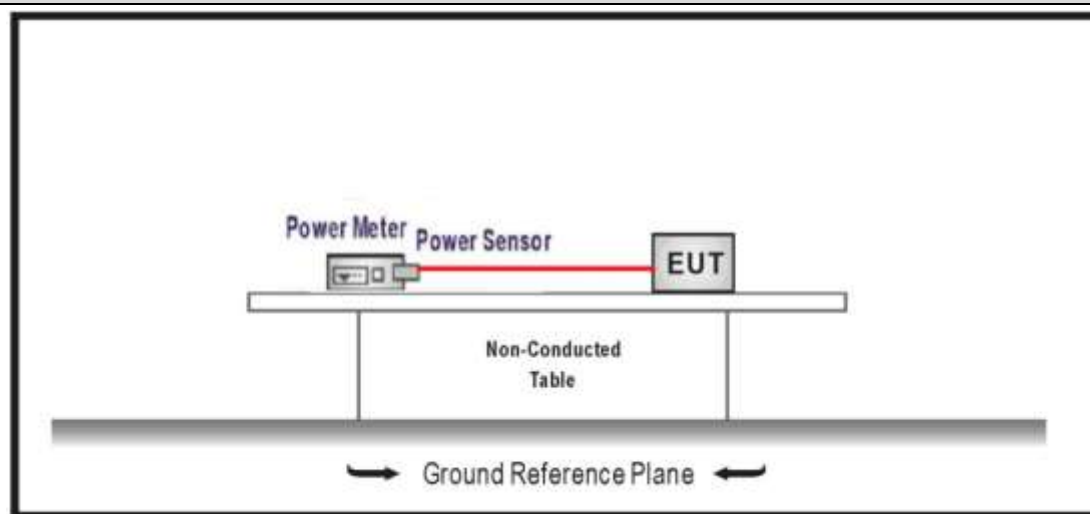4.7.2 Test Setup

4.7.3 Test Procedure

	References Rule			Chapter	Description		
☒	ANSI C63.10			11.9	Fundamental emission output power		
	☒	ANSI C63.10			11.9.1	Maximum peak conducted output power	
		☐	ANSI C63.10	11.9.1.1	RBW ≥ DTS bandwidth		
		☐	ANSI C63.10	11.9.1.2	Integrated band power method		
		☐	ANSI C63.10	11.9.1.3	PKPM1 Peak power meter method		
	☐	ANSI C63.10			11.9.2	Maximum conducted (average) output power	
		☐	ANSI C63.10			11.9.2.2	Measurement using a spectrum analyzer (SA)
			☐	ANSI C63.10	11.9.2.2.2	Method AVGSA-1(Duty cycle≥98%)	
			☐	ANSI C63.10	11.9.2.2.3	Method AVGSA-1A(Duty cycle≥98%)	
			☐	ANSI C63.10	11.9.2.2.4	Method AVGSA-2(Duty cycle≤98%)	
			☐	ANSI C63.10	11.9.2.2.5	Method AVGSA-2A(Duty cycle≤98%)	
			☐	ANSI C63.10	11.9.2.2.4	Method AVGSA-3	
			☐	ANSI C63.10	11.9.2.2.5	Method AVGSA-3A	
		☒	ANSI C63.10			11.9.2.3	Measurement using a power meter (PM)
			☒	ANSI C63.10	11.9.2.3.1	Method AVGPM	
			☐	ANSI C63.10	11.9.2.3.2	Method AVGPM-G	

4.7.4 Test Data

Mode	Channel	Test Frequency (MHz)	Power Output (dBm)	Limit (dBm)	Result
Mode 1	00	2402	3.36	≤ 30	Pass
	19	2440	3.34	≤ 30	Pass
	39	2480	3.42	≤ 30	Pass
Mode 2	00	2402	3.74	≤ 30	Pass
	19	2440	3.76	≤ 30	Pass
	39	2480	3.83	≤ 30	Pass

4.8 Power Density


VERDICT: PASS

4.8.1 Limit:

Standard	FCC Part 15 Subpart C Paragraph 15.247 (b)(3)
-----------------	---

Power Spectral Density $\leq 8\text{dBm}/3\text{kHz}$

4.8.2 Test Setup

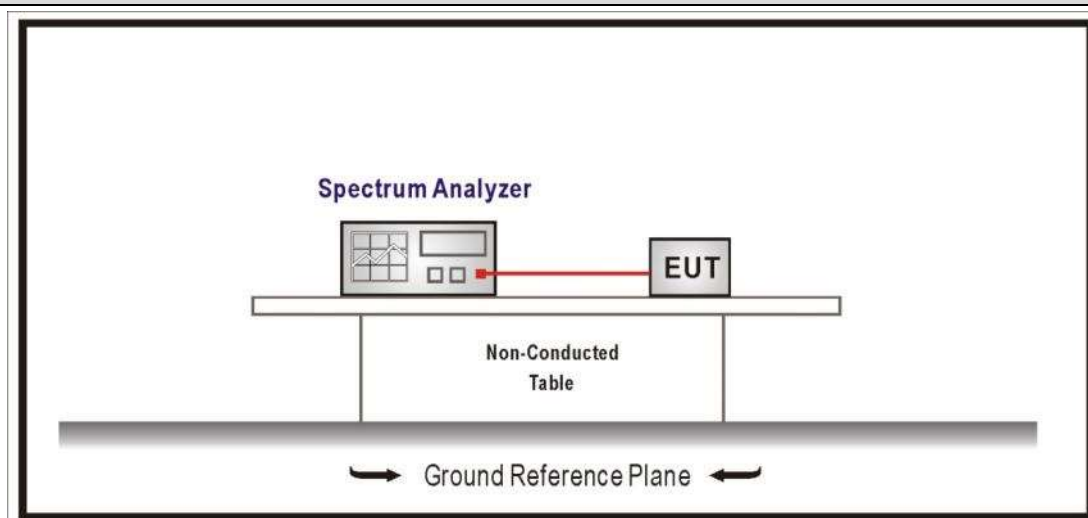

4.8.3 Test Procedure


	References Rule		Chapter	Description
☒	ANSI C63.10		11.10	Maximum power spectral density level in the fundamental emission
	☒	ANSI C63.10	11.10.2	Method PKPSD (peak PSD)
	☐	ANSI C63.10	11.10.3	Method AVGPSD-1(Duty cycle $\geq 98\%$)
	☐	ANSI C63.10	11.10.4	Method AVGPSD-1A(Duty cycle $\geq 98\%$)
	☐	ANSI C63.10	11.10.5	Method AVGPSD-2(Duty cycle $< 98\%$)
	☐	ANSI C63.10	11.10.6	Method AVGPSD-2A(Duty cycle $< 98\%$)
	☐	ANSI C63.10	11.10.7	Method AVGPSD-3
	☐	ANSI C63.10	11.10.8	Method AVGPSD-3A

4.8.4 Test Data

Mode	Channel	Test Frequency (MHz)	Measurement PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
Mode 1	00	2402	-11.872	≤8	Pass
	19	2440	-11.452	≤8	Pass
	39	2480	-11.143	≤8	Pass
Mode 2	00	2402	-12.138	≤8	Pass
	19	2440	-12.233	≤8	Pass
	39	2480	-12.204	≤8	Pass

Note : The worst case of PSD as below:

Mode 1 CH39(2480MHz)

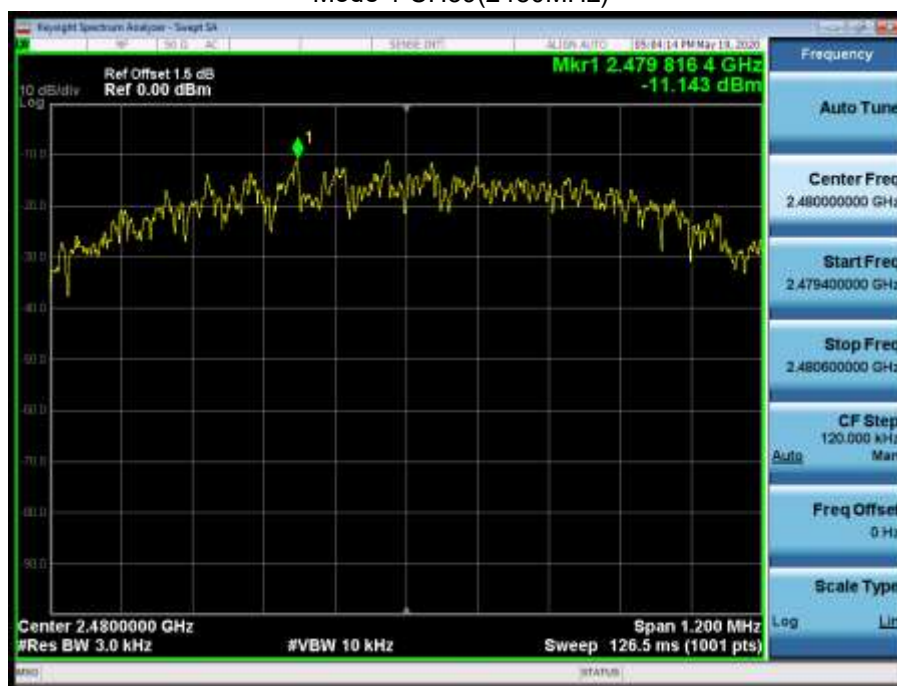

4.9 Antenna Requirement**VERDICT: PASS****4.9.1 Limit:**

Standard	FCC Part 15 Subpart C Paragraph 15.203
An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.	

4.9.2 Antenna Connector Construction:

- | | |
|-------------------------------------|--|
| ☒ | The use of a permanently attached antenna |
| ☐ | The antenna use of a unique coupling to the intentional radiator |
| ☐ | The use of a nonstandard antenna jack or electrical connector |

Please refer to the attached document "Internal Photograph" to show the antenna connector.

5 TEST SETUP PHOTO AND EUT PHOTO

Remark: The test setup photo and EUT Photo please see appendix.

_____ The End _____