


FCC RF Test Report

For

Shenzhen Hangshi Technology Co.,Ltd

Test Standards:	<u>Part 15C Subpart C §15.249</u>
Product Description:	<u>2.4G MOUSE</u>
Tested Model:	<u>MW162</u>
Additional Model No.:	<u>N/A</u>
Brand Name:	<u>N/A</u>
FCC ID:	2AKHJMW162
Classification	DXT- Part 15 Low Power Transceiver, Rx Verified
Report No.:	<u>EC1812018F01</u>
Tested Date:	<u>2018-12-24 to 2019-01-22</u>
Issued Date:	<u>2019-01-22</u>
Prepared By:	 Tiny Yang/ Engineer
Approved By:	 Bacon Wu / RF Manager

Hunan Ecloud Testing Technology Co., Ltd.

Building A1, Changsha E Center, No. 18 Xiangtai Avenue, Liuyang Economic and
Technological Development Zone, Hunan, P.R.C

Tel.: +86-731-89634887 Fax.: +86-731-89634887

www.hn-ecloud.com

Note: The test results in this report apply exclusively to the tested model / sample. Without written approval of Hunan Ecloud Testing Technology Co., Ltd., the test report shall not be reproduced except in full.

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	2019.01.22	Valid	Original Report

TABLE OF CONTENTS

1	TEST LABORATORY	5
1.1	Test facility	5
2	GENERAL DESCRIPTION.....	6
2.1	Applicant	6
2.2	Manufacturer	6
2.3	General Description Of EUT	6
2.4	Modification of EUT	7
2.5	Applicable Standards	7
3	TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	8
3.1	Descriptions of Test Mode	8
3.2	Test Mode	9
3.3	Support Equipment	10
3.4	Test Setup	10
3.5	Measurement Results Explanation Example	12
4	TEST RESULT	13
4.1	20dB Occupy Bandwidth Measurement	13
4.2	Field Strength of The Fundamental Signal, Radiated Band Edges and Spurious Emission Measurement	16
4.3	AC Conducted Emission Measurement.....	46
4.4	Antenna Requirements	49
5	LIST OF MEASURING EQUIPMENT	50
6	UNCERTAINTY OF EVALUATION.....	51

APPENDIX A. SETUP PHOTOGRAPHS

APPENDIX B. EUT EXTERNAL PHOTOGRAPHS

APPENDIX C. EUT INTERNAL PHOTOGRAPHS

Summary of Test Result

FCC Rule	Description	Limit	Result	Remark
15.215(c)	20dB Bandwidth	NA	Pass	-
15.249(a)	Field strength of the fundamental signal	15.249(a)	Pass	
15.249(a)(d)/15.209	Radiated Band Edges and Radiated Spurious Emission	15.249(a)(d)/15.209	Pass	Under limit -1.35 dB at 9720 MHz
15.207	AC Conducted Emission	15.207(a)	Pass	Under limit -24.05 dB at 0.697 MHz
15.203	Antenna Requirement	N/A	Pass	-

1 Test Laboratory

1.1 Test facility

CNAS (accreditation number: L11138)

Hunan Ecloud Testing Technology Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

FCC (Designation number: CN1244 , Test Firm Registration Number: 793308)

Hunan Ecloud Testing Technology Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

ISED(CAB identifier: CN0012)

Hunan Ecloud Testing Technology Co., Ltd. has been listed on the Wireless Device Testing Laboratories list of innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements.

A2LA (Certificate Code : 4895.01)

Hunan Ecloud Testing Technology Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

2 General Description

2.1 Applicant

Shenzhen Hangshi Technology Co.,Ltd

Hangshi Technology Park, Democracy West Industry Area, Shajing Town, Bao'an District, Shenzhen, China

2.2 Manufacturer

Shenzhen Hangshi Technology Co., Ltd

Hangshi Technology Park, Democracy West Industry Area, Shajing Town, Bao'an District, Shenzhen, China

2.3 General Description Of EUT

Product	2.4G MOUSE
Model No.	MW162
Additional No.	N/A
Difference Description	N/A
FCC ID	2AKHJMW162
IC ID	N/A
Power Supply	5Vdc (adapter or host equipment) 3.7Vdc (Li-ion)
Modulation Technology	DXT- Part 15 Low Power Transceiver, Rx Verified
Modulation Type	GFSK
Operating Frequency	2405MHz~2470MHz
Number Of Channel	8
Antenna Type	PCB Antenna type with -1.2dBi gain
I/O Ports	Refer to user's manual
Cable Supplied	N/A

NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

2.4 Modification of EUT

No modifications are made to the EUT during all test items.

2.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.249
- ♦ ANSI C63.10-2013

3 Test Configuration of Equipment Under Test

3.1 Descriptions of Test Mode

The Operation Frequency each of channel as follows:

Operation Frequency each of channel			
Channel	Frequency	Channel	Frequency
01	2405MHz	05	2440MHz
02	2413MHz	06	2450MHz
03	2422MHz	07	2460MHz
04	2430MHz	08	2470MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test

- a. Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.
- b. The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that Y orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Y orientation.

3.2 Test Mode

3.2.1 Antenna Port Conducted Measurement

Summary table of Test Cases	
Test Item	2.4G Wireless
Conducted Test Cases	Mode 1: CH01_2405 MHz Mode 2: CH04_2430 MHz Mode 3: CH08_2470 MHz

3.2.2 Radiated Emission Test (Below 1GHz)

Radiated Test Cases	2.4G Wireless	
	Transmitting	Mode 1: CH01_2405 MHz Mode 2: CH04_2430 MHz Mode 3: CH08_2470 MHz
	Transmitting+Charging	Mode 1: CH01_2405 MHz Mode 2: CH04_2430 MHz Mode 3: CH08_2470 MHz

- Note : 1. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
2. All above modes were tested, but only the worst case test mode 1 while transmitting was reported.

3.2.3 Radiated Emission Test (Above 1GHz)

Radiated Test Cases	2.4G Wireless	
	Transmitting	Mode 1: CH01_2405 MHz Mode 2: CH04_2430 MHz Mode 3: CH08_2470 MHz
	Transmitting+Charging	Mode 1: CH01_2405 MHz Mode 2: CH04_2430 MHz Mode 3: CH08_2470 MHz

- Note : 1. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
2. All above modes were tested, but only the worst case transmitting was reported.

3.2.4 Power Line Conducted Emission Test:

AC Conducted Emission	Mode 1 : Wireless 2.4G Link + USB Cable (Charging from Adapter)
-----------------------	---


3.3 Support Equipment

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Adapter	HTC	TC E250	N/A	N/A	N/A
2.	Micro-USB Cable	HTC	N/A	N/A	N/A	unshielded 1.2m
3.	Notebook	Lenovo	E540	FCC DoC	N/A	shielded cable DC O/P 1.8 m unshielded AC I/P cable 1.2 m


3.4 Test Setup

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.


Setup diagram for Conducted Test

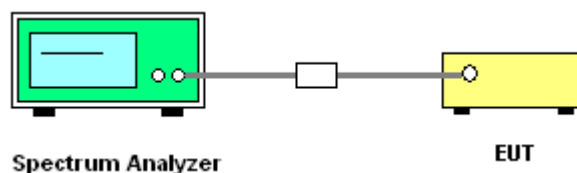


Setup diagram for Raidation(9KHz~30MHz) Test

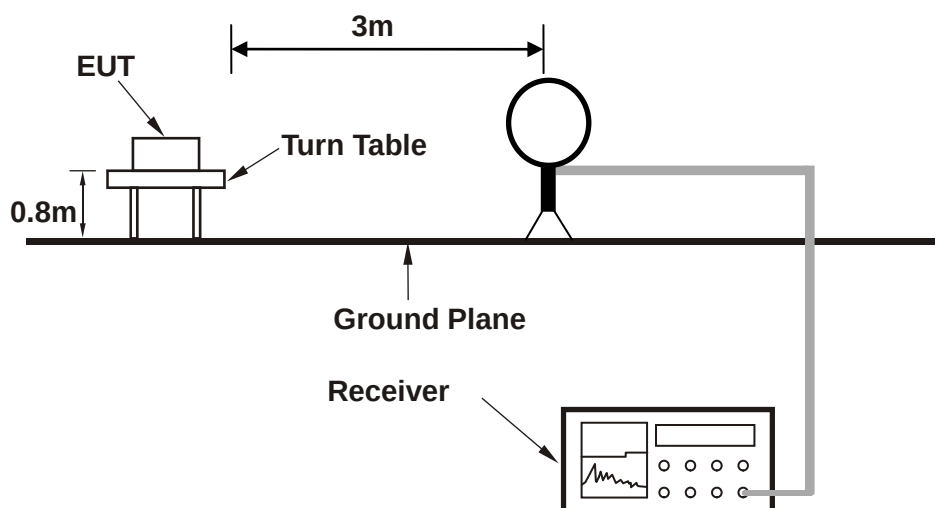


Setup diagram for Raidation(Below 1G) Test

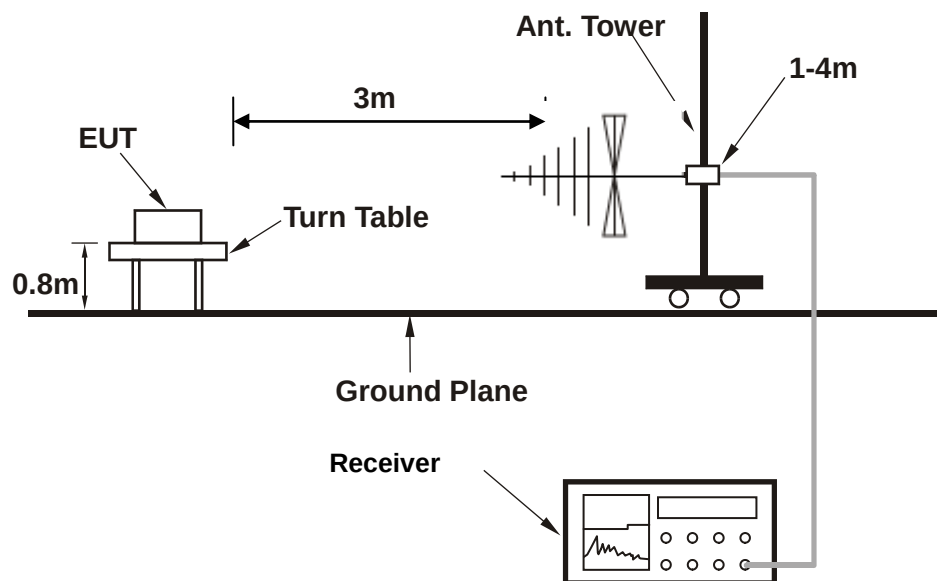

Setup diagram for Raidation(Above1G) Test

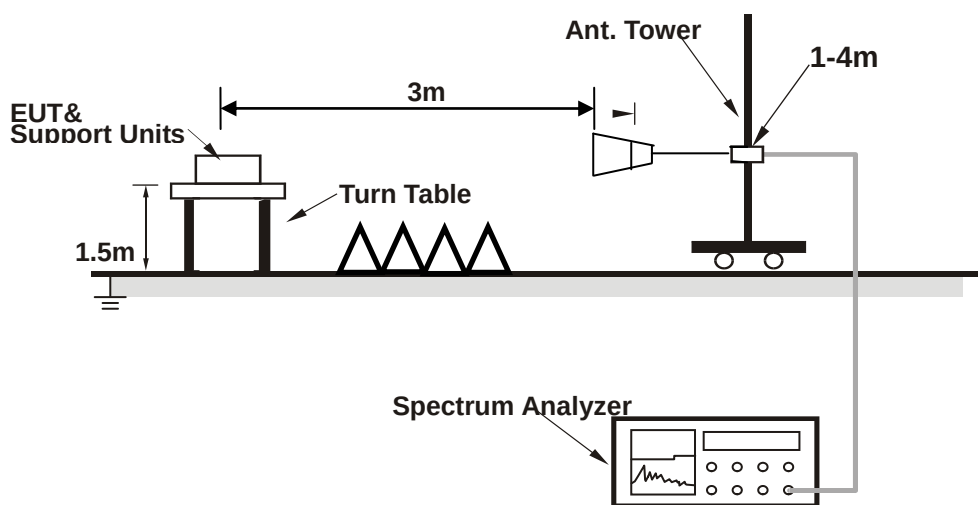

Setup diagram for AC Conducted Emission Test

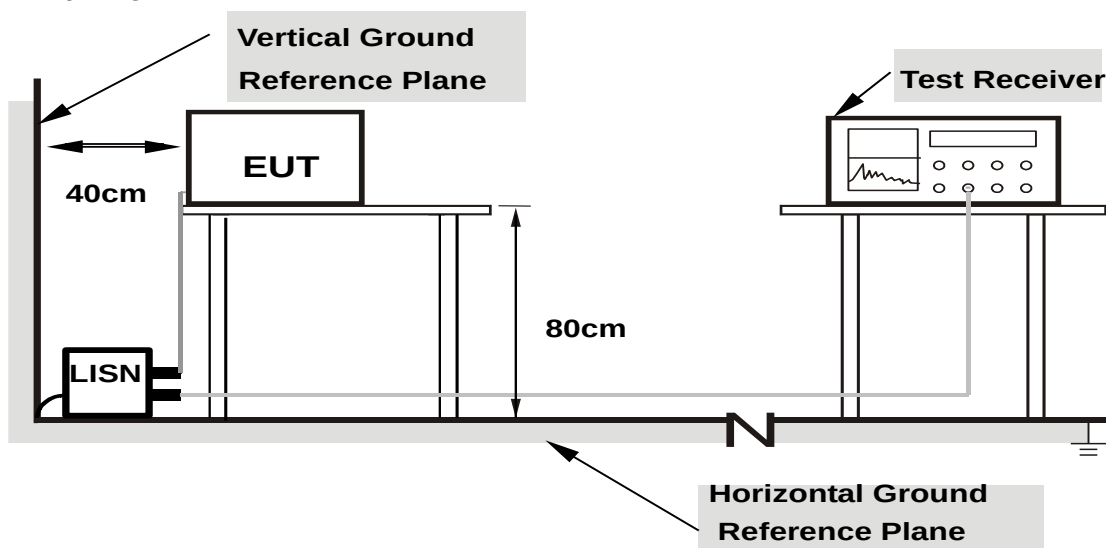

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.5 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 5 + 10 = 15 \text{ (dB)} \end{aligned}$$

4 Test Result

4.1 20dB Occupy Bandwidth Measurement

4.1.1 Limit of 20dB Occupy Bandwidth

None; for reporting purposes only.


4.1.2 Test Procedures

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.
Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;
RBW = 1% to 5% of the 20 dB bandwidth; VBW = approximately 3 times RBW; Sweep = auto;
Detector function = peak; Trace = max hold.


4.1.3 Test Result of 20dB Bandwidth

Test Mode :	2.4G Wireless Transmitting	Temperature :	21~23℃
Test Engineer :	Damon Zhang	Relative Humidity :	41~43%
Channel.	20dB Bandwidth [MHz]	Verdict	
LCH	2.623	PASS	
MCH	2.619	PASS	
HCH	2.636	PASS	


20dB Plot

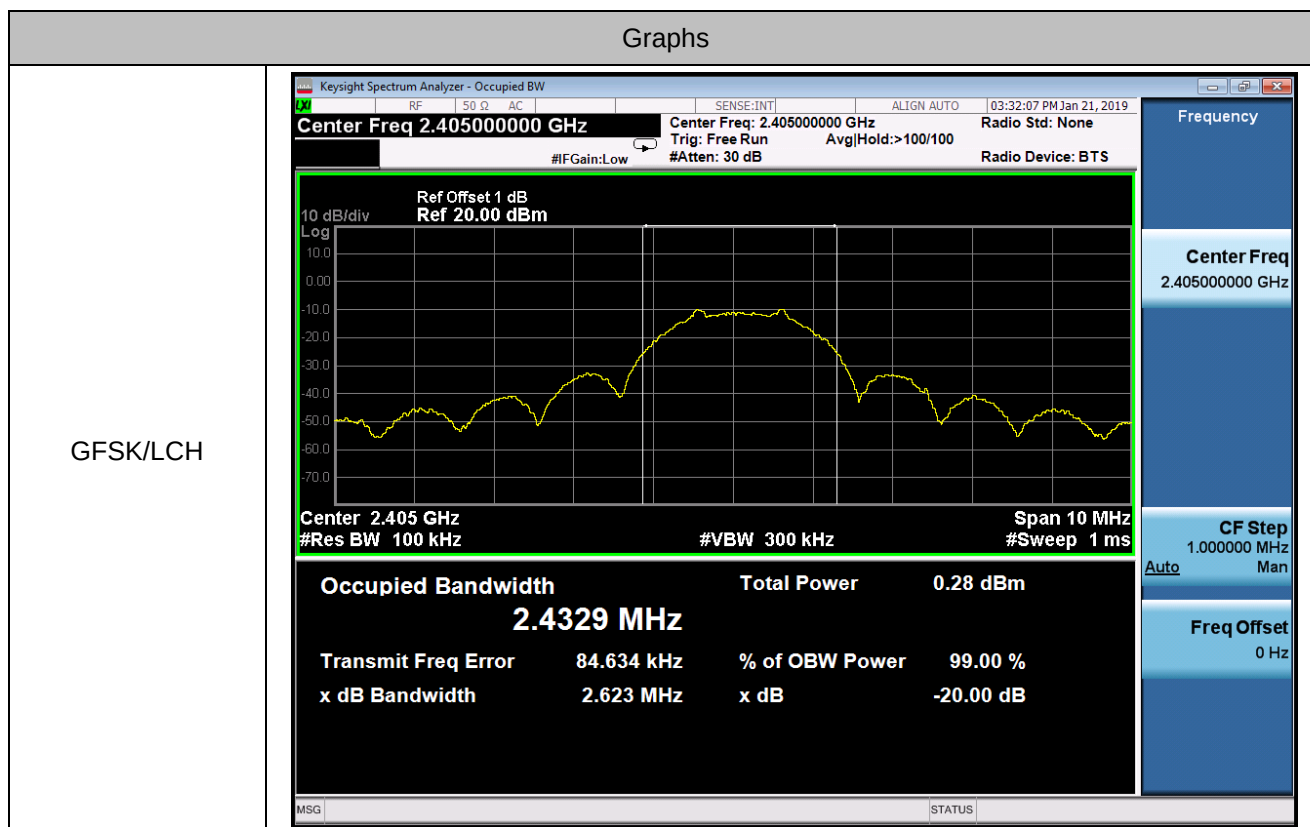

GFSK/MCH

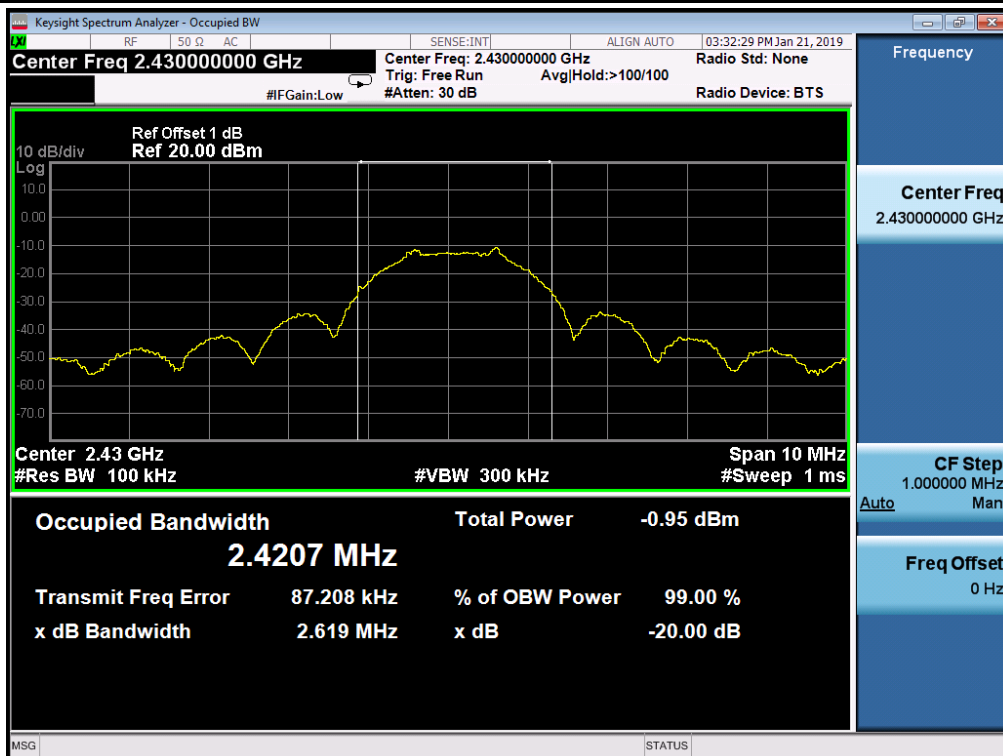

GFSK/HCH

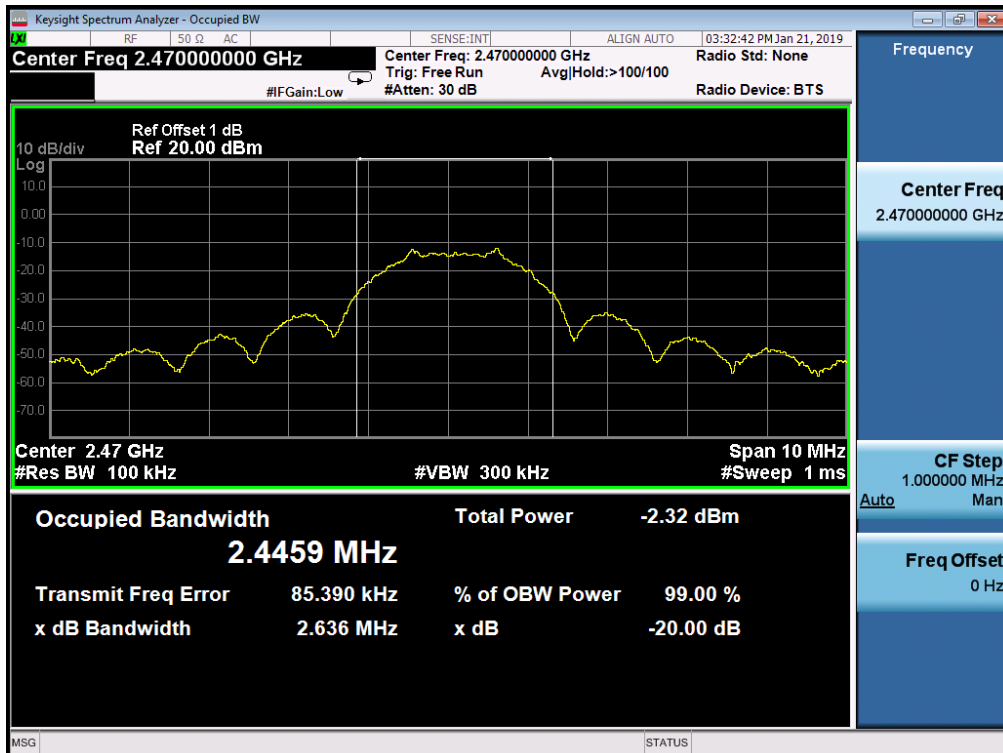

4.2 Field Strength of The Fundamental Signal, Radiated Band Edges and Spurious Emission Measurement

4.2.1 Limit of Fundamental Signal, Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209&15.249 limits as below.


Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Frequency (MHz)	Field Strength (millivolts/meter)	Measurement Distance (meters)
2400-2483.5	50	3m

Note: The frequency range from 9KHz to 10th harmonic (25GHz) are checked, and no any emissions were found from 18GHz to 25GHz, So the radiated emissions from 18GHz to 25GHz were not record.

4.2.2 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The measurement distance is 3 meter.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; VBW RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement:
 VBW = 10 Hz, when duty cycle is no less than 98 percent.
 VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

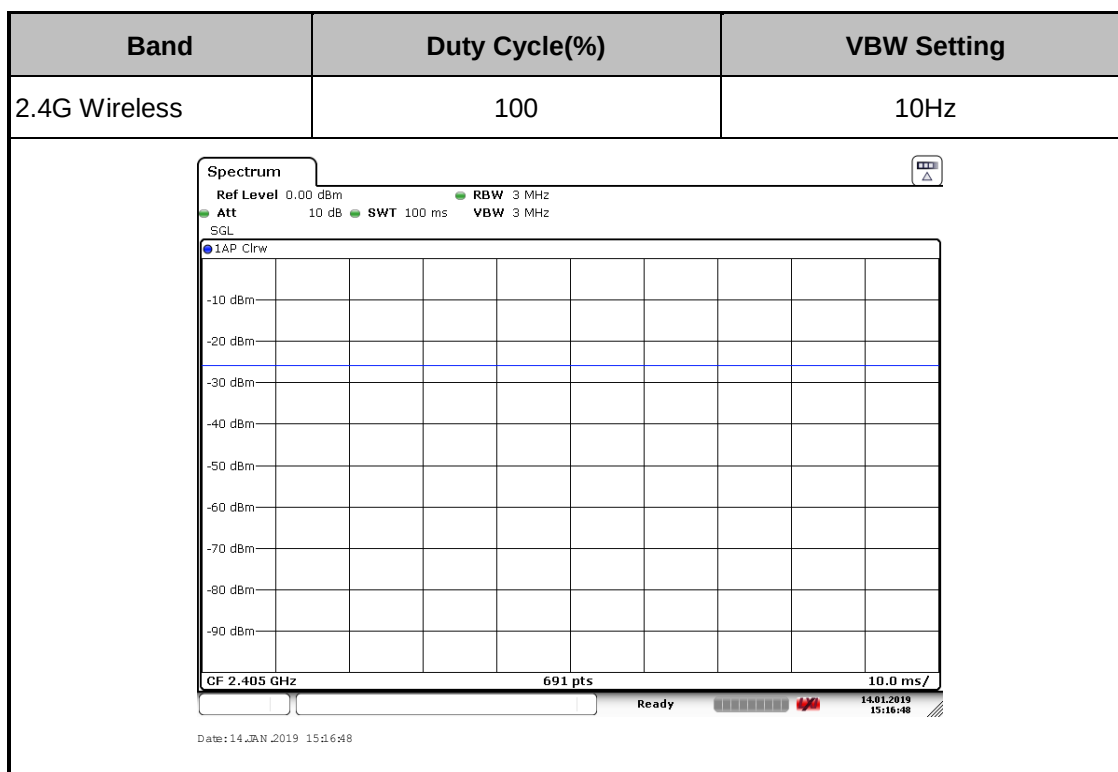


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

4.2.3 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.


4.2.4 Field Strength of The Fundamental Signal

Test Site	: 3m Chamber	Temp/Humi	: 18°C/ 60%
Tested by	: Damon	Power rating:	DC 3.7V
Model No.	: MW162	Pol/Phase	: HORIZONTAL
EUT	: 2.4G MOUSE		
Test Mode	: 2405MHz Tx mode		

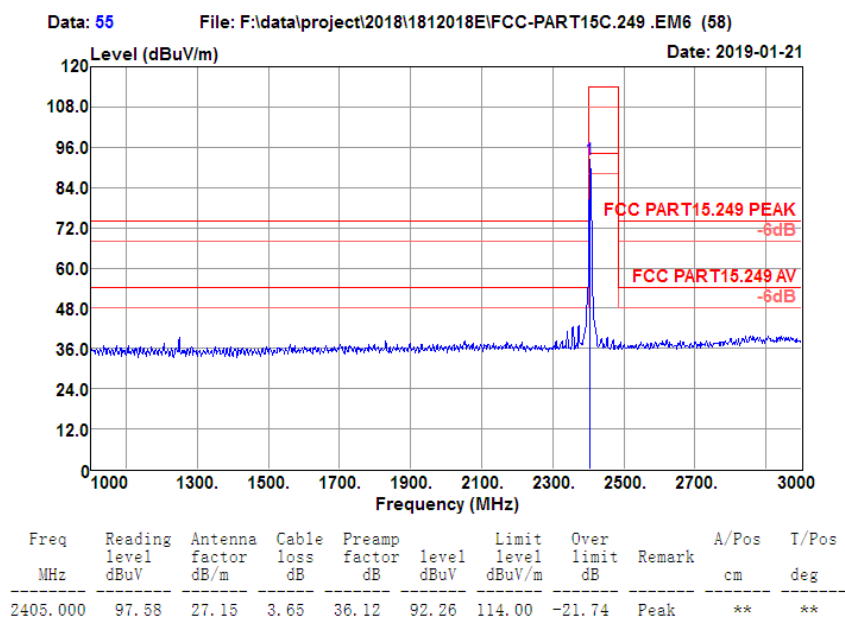

Test Site	: 3m Chamber	Temp/Humi	: 18°C/ 60%
Tested by	: Damon	Power rating:	DC 3.7V
Model No.	: MW162	Pol/Phase	: VERTICAL
EUT	: 2.4G MOUSE		
Test Mode	: 2405MHz Tx mode		


Data: 49 File: F:\data\project\2018\1812018E\FCC-PART15C.249.EM6 (58)

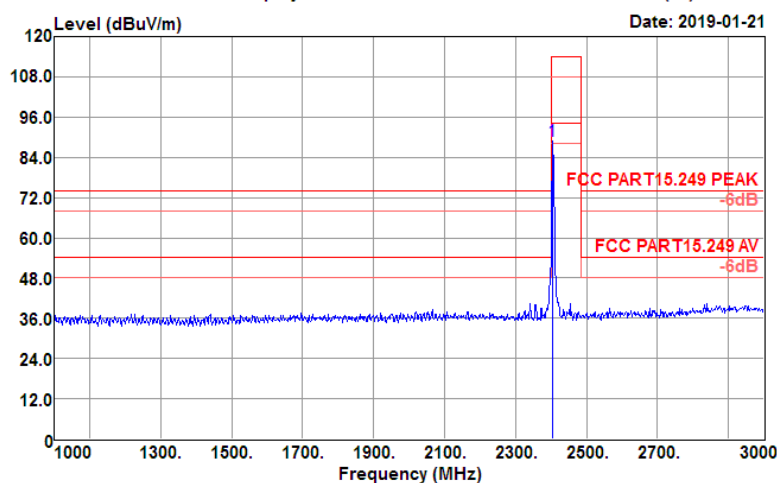

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark	A/Pos cm	T/Pos deg
2405.000	94.03	27.15	3.65	36.12	88.71	114.00	-25.29	Peak	**	**

Test Site	: 3m Chamber	Temp/Humi	: 18°C/ 60%
Tested by	: Damon	Power rating:	DC 3.7V
Model No.	: MW162	Pol/Phase	: HORIZONTAL
EUT	: 2.4G MOUSE		
Test Mode	: 2430MHz Tx mode		


Data: 56 File: F:\data\project\2018\1812018E\FCC-PART15C.249.EM6 (58)

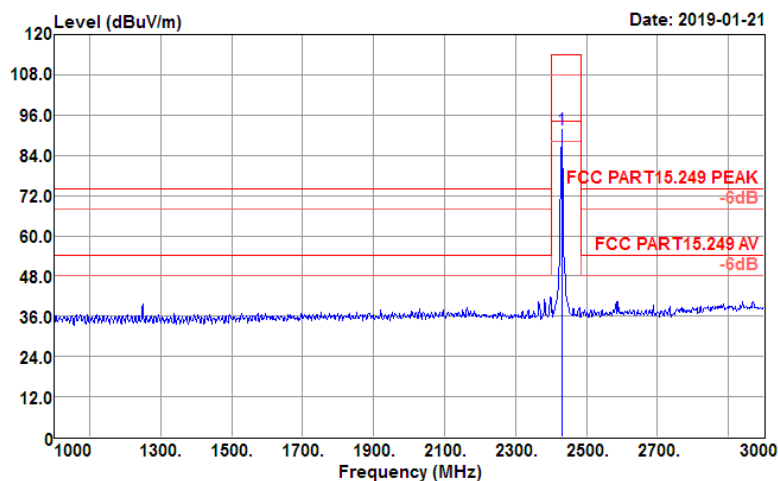

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark	A/Pos cm	T/Pos deg
2430.000	96.91	27.22	3.66	36.19	91.60	114.00	-22.40	Peak	**	**


Test Site	: 3m Chamber	Temp/Humi	: 18°C/ 60%
Tested by	: Damon	Power rating:	DC 3.7V
Model No.	: MW162	Pol/Phase	: VERTICAL
EUT	: 2.4G MOUSE		
Test Mode	: 2430MHz Tx mode		

Data: 50 File: F:\data\project\2018\1812018E\FCC-PART15C.249.EM6 (58)

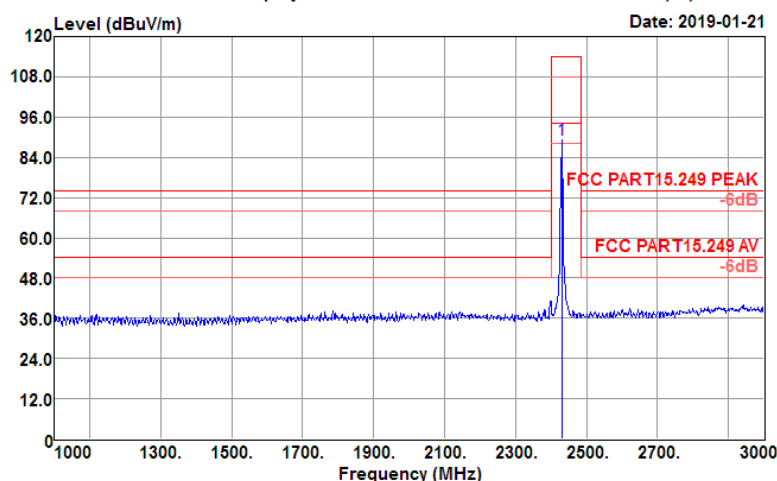

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark	A/Pos cm	T/Pos deg
2430.000	94.56	27.22	3.66	36.19	89.25	114.00	-24.75	Peak	**	**


Test Site	: 3m Chamber	Temp/Humi	: 18°C/ 60%
Tested by	: Damon	Power rating	: DC 3.7V
Model No.	: MW162	Pol/Phase	: HORIZONTAL
EUT	: 2.4G MOUSE		
Test Mode	: 2470MHz Tx mode		

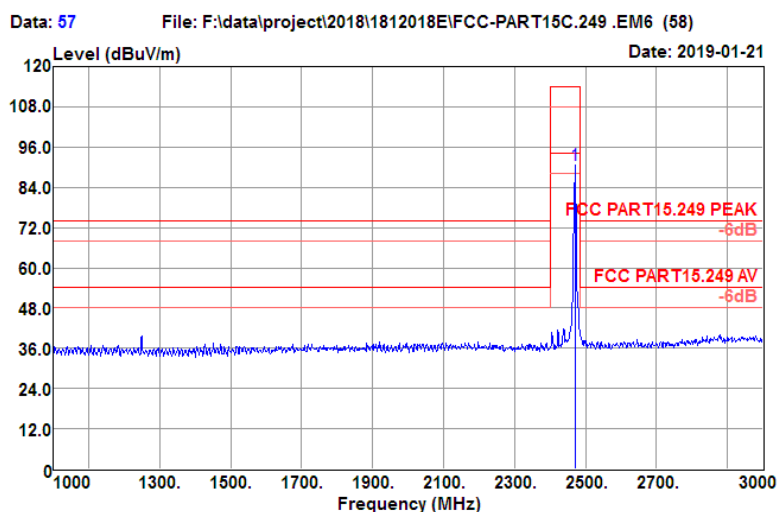

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark	A/Pos cm	T/Pos deg
2470.000	96.02	27.32	3.67	36.29	90.72	114.00	-23.28	Peak	**	**

Test Site	: 3m Chamber	Temp/Humi	: 18°C/ 60%
Tested by	: Damon	Power rating:	DC 3.7V
Model No.	: MW162	Pol/Phase	: VERTICAL
EUT	: 2.4G MOUSE		
Test Mode	: 2470MHz Tx mode		

Data: 48 File: F:\data\project\2018\1812018E\FCC-PART15C.249.EM6 (58)

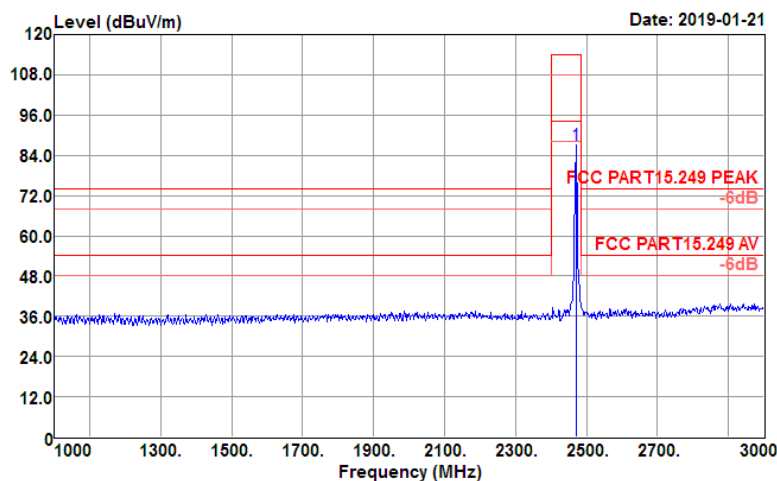


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark	A/Pos cm	T/Pos deg
2470.000	92.28	27.32	3.67	36.29	86.98	114.00	-27.02	Peak	**	**

4.2.5 Test Result of Radiated Spurious at Band Edges

Low Channel Horizontal:


Test Site	: 3m Chamber	Temp/Humi	: 18°C/ 60%
Tested by	: Damon	Power rating:	DC 3.7V
Model No.	: MW162	Pol/Phase	: HORIZONTAL
EUT	: 2.4G MOUSE		
Test Mode	: 2405MHz Tx mode		

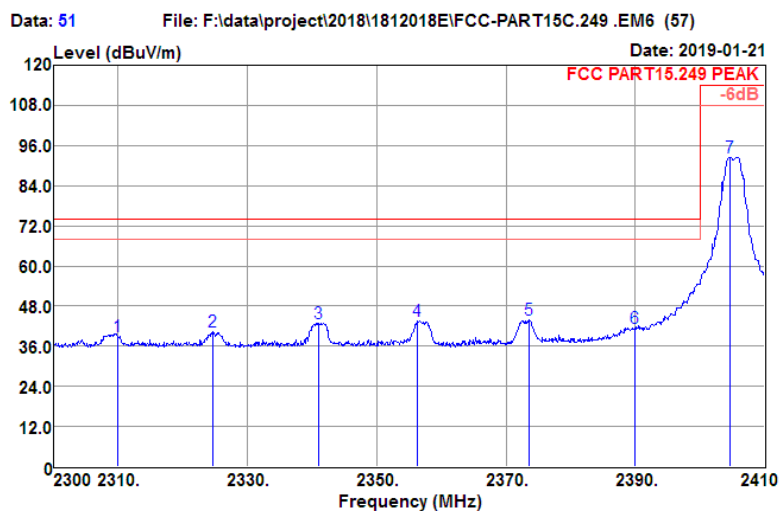

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark	A/Pos cm	I/Pos deg
2310.000	44.38	26.91	3.56	35.87	38.98	74.00	-35.02	Peak	**	**
2324.640	45.70	26.94	3.57	35.91	40.30	74.00	-33.70	Peak	**	**
2341.030	48.27	26.99	3.59	35.95	42.90	74.00	-31.10	Peak	**	**
2356.210	48.86	27.03	3.60	35.99	43.50	74.00	-30.50	Peak	**	**
2373.480	49.21	27.07	3.62	36.04	43.86	74.00	-30.14	Peak	**	**
2390.000	46.61	27.11	3.64	36.08	41.28	74.00	-32.72	Peak	**	**
2404.610	97.86	27.15	3.65	36.12	92.54	114.00	-21.46	Peak	**	**

Test Site	: 3m Chamber	Temp/Humi	: 18°C/ 60%
Tested by	: Damon	Power rating:	DC 3.7V
Model No.	: MW162	Pol/Phase	: HORIZONTAL
EUT	: 2.4G MOUSE		
Test Mode	: 2405MHz Tx mode		


Data: 52 File: F:\data\project\2018\1812018E\FCC-PART15C.249.EM6 (57)

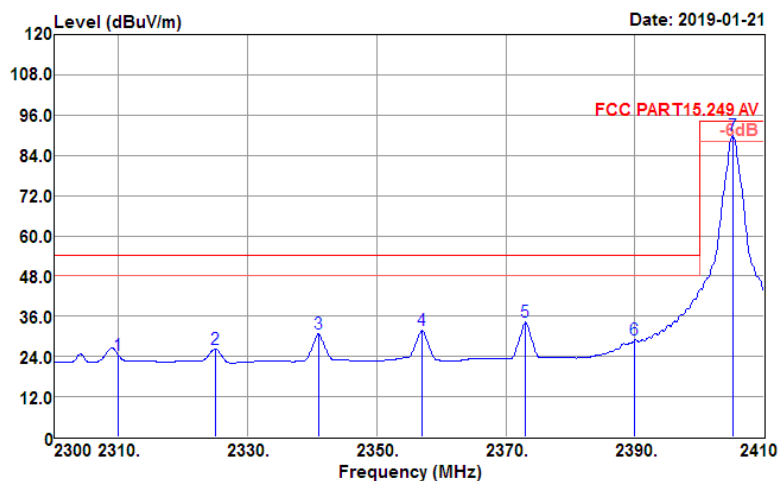

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark	A/Pos cm	T/Pos deg
2310.000	29.71	26.91	3.56	35.87	24.31	54.00	-29.69	Average	188	319
2324.970	31.70	26.94	3.57	35.91	26.30	54.00	-27.70	Average	188	319
2341.030	36.07	26.99	3.59	35.95	30.70	54.00	-23.30	Average	188	319
2357.090	37.19	27.03	3.60	35.99	31.83	54.00	-22.17	Average	188	319
2373.040	39.52	27.07	3.62	36.03	34.18	54.00	-19.82	Average	188	319
2390.000	34.24	27.11	3.64	36.08	28.91	54.00	-25.09	Average	188	319
2405.160	95.16	27.15	3.65	36.12	89.84	94.00	-4.16	Average	188	319


Low Channel Vertical:

Test Site	: 3m Chamber	Temp/Humi	: 18°C/ 60%
Tested by	: Damon	Power rating:	DC 3.7V
Model No.	: MW162	Pol/Phase	: VERTICAL
EUT	: 2.4G MOUSE		
Test Mode	: 2405MHz Tx mode		

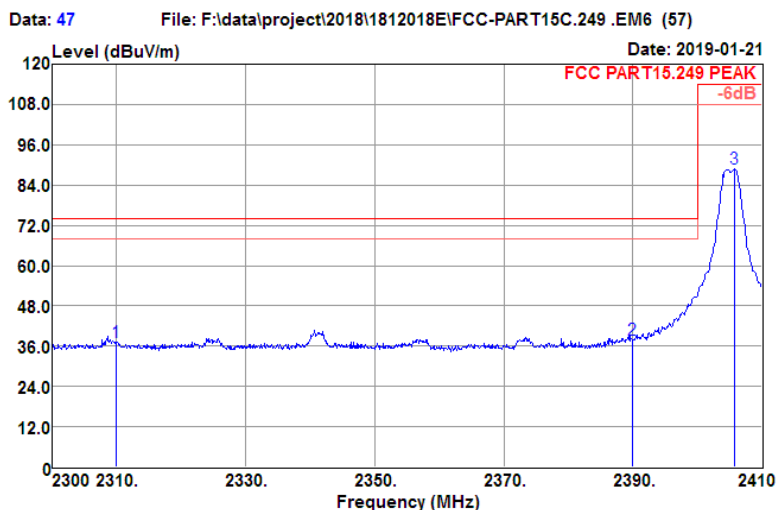

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamplifier factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark	A/Pos cm	T/Pos deg
2310.000	42.61	26.91	3.56	35.87	37.21	74.00	-36.79	Peak	**	**
2390.000	43.39	27.11	3.64	36.08	38.06	74.00	-35.94	Peak	**	**
2405.710	94.02	27.15	3.65	36.12	88.70	114.00	-25.30	Peak	**	**


Test Site	: 3m Chamber	Temp/Humi	: 18°C/ 60%
Tested by	: Damon	Power rating:	DC 3.7V
Model No.	: MW162	Pol/Phase	: VERTICAL
EUT	: 2.4G MOUSE		
Test Mode	: 2405MHz Tx mode		

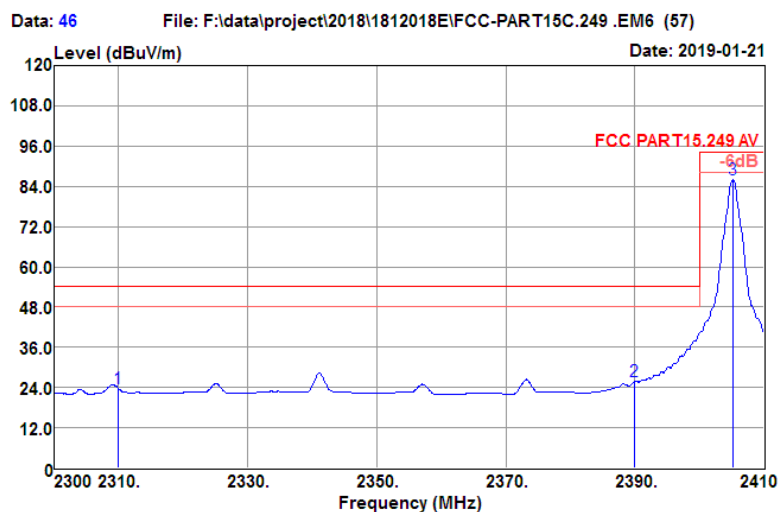

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark	A/Pos cm	T/Pos deg
2310.000	29.10	26.91	3.56	35.87	23.70	54.00	-30.30	Average	332	360
2390.000	31.20	27.11	3.64	36.08	25.87	54.00	-28.13	Average	332	360
2405.160	91.34	27.15	3.65	36.12	86.02	94.00	-7.98	Average	332	360


High Channel Horizontal:

Test Site	: 3m Chamber	Temp/Humi	: 18°C/ 60%
Tested by	: Damon	Power rating:	DC 3.7V
Model No.	: MW162	Pol/Phase	: HORIZONTAL
EUT	: 2.4G MOUSE		
Test Mode	: 2470MHz Tx mode		

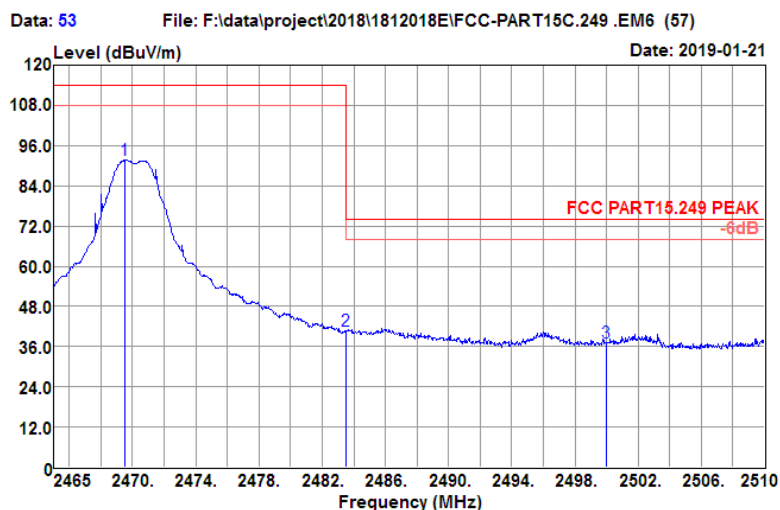

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark	A/Pos cm	T/Pos deg
2469.500	96.90	27.32	3.67	36.29	91.60	114.00	-22.40	Peak	**	**
2483.500	46.11	27.36	3.68	36.33	40.82	74.00	-33.18	Peak	**	**
2500.000	42.32	27.40	3.68	36.37	37.03	74.00	-36.97	Peak	**	**


Test Site	: 3m Chamber	Temp/Humi	: 18°C/ 60%
Tested by	: Damon	Power rating:	DC 3.7V
Model No.	: MW162	Pol/Phase	: HORIZONTAL
EUT	: 2.4G MOUSE		
Test Mode	: 2470MHz Tx mode		

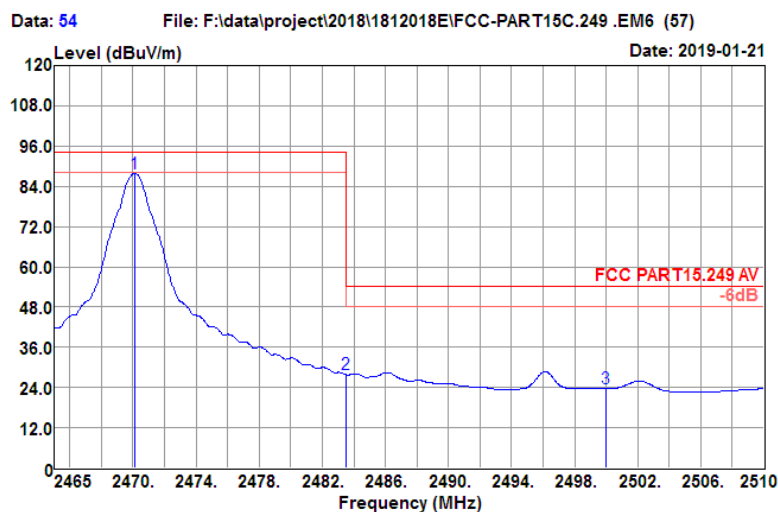

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark	A/Pos cm	T/Pos deg
2470.085	93.13	27.32	3.67	36.29	87.83	94.00	-6.17	Average	188	232
2483.500	33.14	27.36	3.68	36.33	27.85	54.00	-26.15	Average	188	232
2500.000	29.05	27.40	3.68	36.37	23.76	54.00	-30.24	Average	188	232


High Channel Vertical:

Test Site	: 3m Chamber	Temp/Humi	: 18°C/ 60%
Tested by	: Damon	Power rating:	DC 3.7V
Model No.	: MW162	Pol/Phase	: VERTICAL
EUT	: 2.4G MOUSE		
Test Mode	: 2470MHz Tx mode		

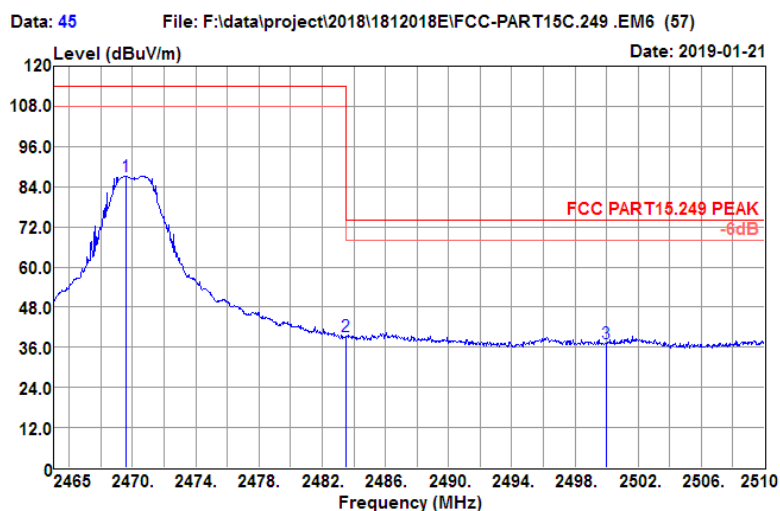

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamplifier factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark	A/Pos cm	T/Pos deg
2469.590	92.34	27.32	3.67	36.29	87.04	114.00	-26.96	Peak	**	**
2483.500	44.69	27.36	3.68	36.33	39.40	74.00	-34.60	Peak	**	**
2500.000	42.36	27.40	3.68	36.37	37.07	74.00	-36.93	Peak	**	**

Test Site	: 3m Chamber	Temp/Humi	: 18°C/ 60%
Tested by	: Damon	Power rating:	DC 3.7V
Model No.	: MW162	Pol/Phase	: VERTICAL
EUT	: 2.4G MOUSE		
Test Mode	: 2470MHz Tx mode		

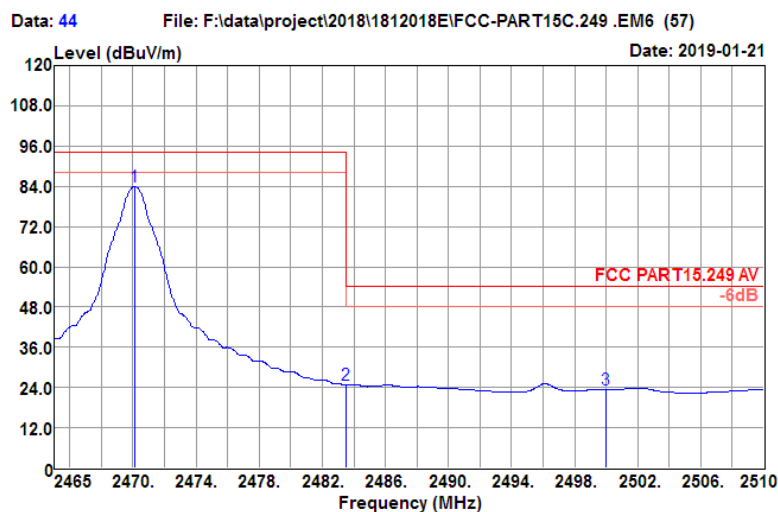


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark	A/Pos cm	T/Pos deg
2470.130	89.28	27.32	3.67	36.29	83.98	94.00	-10.02	Average	313	164
2483.500	30.01	27.36	3.68	36.33	24.72	54.00	-29.28	Average	313	164
2500.000	28.64	27.40	3.68	36.37	23.35	54.00	-30.65	Average	313	164

4.2.6 Test Result of Radiated Spurious Emission

Low Channel Horizontal:


Test Site	: 3m Chamber	Temp/Humi	: 18°C / 60%
Tested by	: Damon	Power rating	: DC 3.7V
Model No.	: MW162	Pol/Phase	: HORIZONTAL
EUT	: 2.4G MOUSE		
Test Mode	: 2405MHz Tx mode		

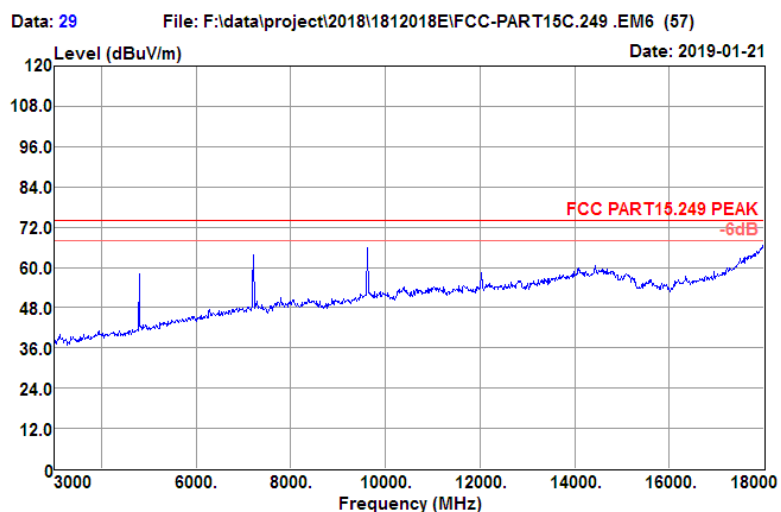

Test Site	: 3m Chamber	Temp/Humi	: 18°C/ 60%
Tested by	: Damon	Power rating:	DC 3.7V
Model No.	: MW162	Pol/Phase	: HORIZONTAL
EUT	: 2.4G MOUSE		
Test Mode	: 2405MHz Tx mode		

Data: 34 File: F:\data\project\2018\1812018E\FCC-PART15C.249.EM6 (57)


Level (dBuV/m) Date: 2019-01-21

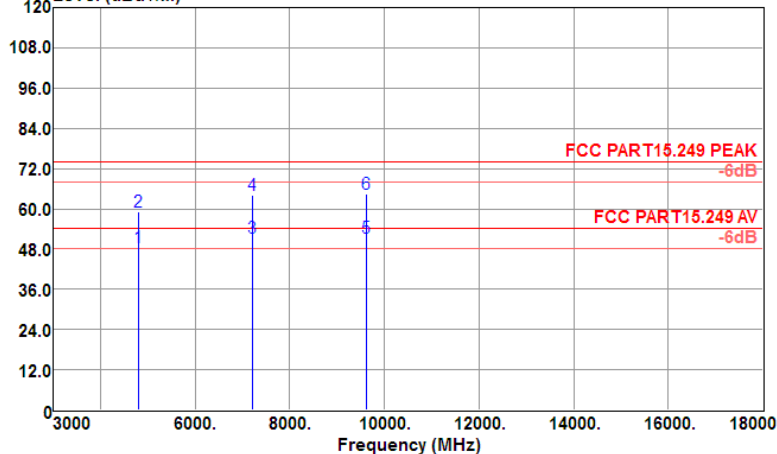

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark	A/Pos cm	T/Pos deg
4810.000	48.11	31.24	5.44	36.27	48.52	54.00	-5.48	Average	150	95
4810.000	58.89	31.24	5.44	36.27	59.30	74.00	-14.70	Peak	150	95
7215.000	42.68	35.89	6.96	34.25	51.28	54.00	-2.72	Average	150	216
7215.000	55.60	35.89	6.96	34.25	64.20	74.00	-9.80	Peak	150	216
9620.000	39.94	37.82	7.79	34.13	51.42	54.00	-2.58	Average	150	355
9620.000	53.04	37.82	7.79	34.13	64.52	74.00	-9.48	Peak	150	360


Low Channel Vertical:

Test Site	: 3m Chamber	Temp/Humi	: 18°C/ 60%
Tested by	: Damon	Power rating:	DC 3.7V
Model No.	: MW162	Pol/Phase	: VERTICAL
EUT	: 2.4G MOUSE		
Test Mode	: 2405MHz Tx mode		

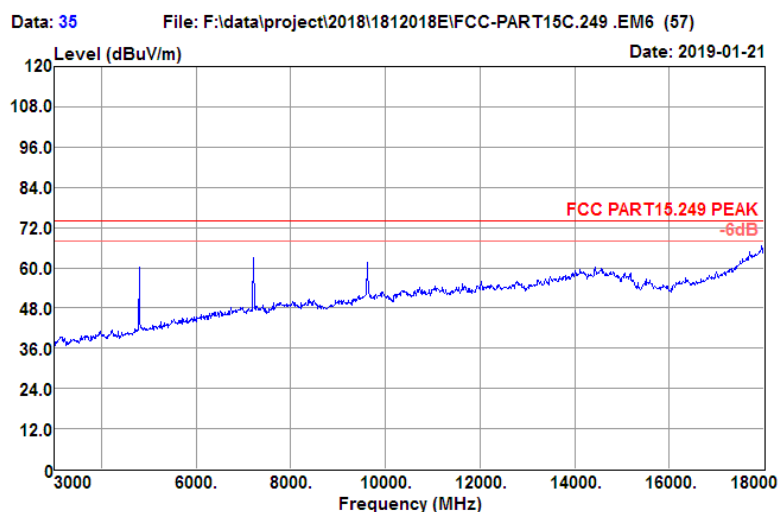

Test Site	: 3m Chamber	Temp/Humi	: 18°C/ 60%
Tested by	: Damon	Power rating:	DC 3.7V
Model No.	: MW162	Pol/Phase	: VERTICAL
EUT	: 2.4G MOUSE		
Test Mode	: 2405MHz Tx mode		


Data: 40 File: F:\data\project\2018\1812018E\FCC-PART15C.249.EM6 (57)

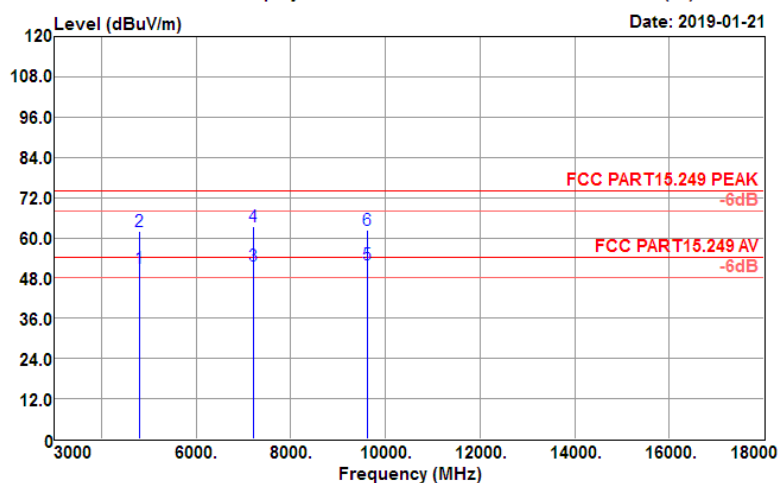

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark	A/Pos cm	T/Pos deg
4810.000	50.69	31.24	5.44	36.27	51.10	54.00	-2.90	Average	325	313
4810.000	61.40	31.24	5.44	36.27	61.81	74.00	-12.19	Peak	325	313
7215.000	43.12	35.89	6.96	34.25	51.72	54.00	-2.28	Average	185	268
7215.000	54.95	35.89	6.96	34.25	63.55	74.00	-10.45	Peak	185	260
9620.000	40.40	37.82	7.79	34.13	51.88	54.00	-2.12	Average	166	336
9620.000	50.98	37.82	7.79	34.13	62.46	74.00	-11.54	Peak	166	326

Middle Channel Horizontal:


Test Site	: 3m Chamber	Temp/Humi	: 18°C/ 60%
Tested by	: Damon	Power rating:	DC 3.7V
Model No.	: MW162	Pol/Phase	: HORIZONTAL
EUT	: 2.4G MOUSE		
Test Mode	: 2430MHz Tx mode		

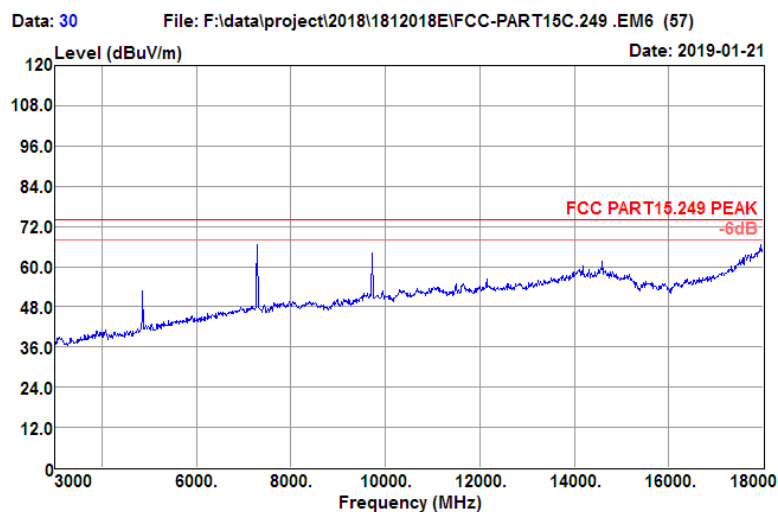

Test Site	: 3m Chamber	Temp/Humi	: 18°C/ 60%
Tested by	: Damon	Power rating:	DC 3.7V
Model No.	: MW162	Pol/Phase	: HORIZONTAL
EUT	: 2.4G MOUSE		
Test Mode	: 2430MHz Tx mode		

Data: 33 File: F:\data\project\2018\1812018E\FCC-PART15C.249.EM6 (57)


Level (dBuV/m) Date: 2019-01-21

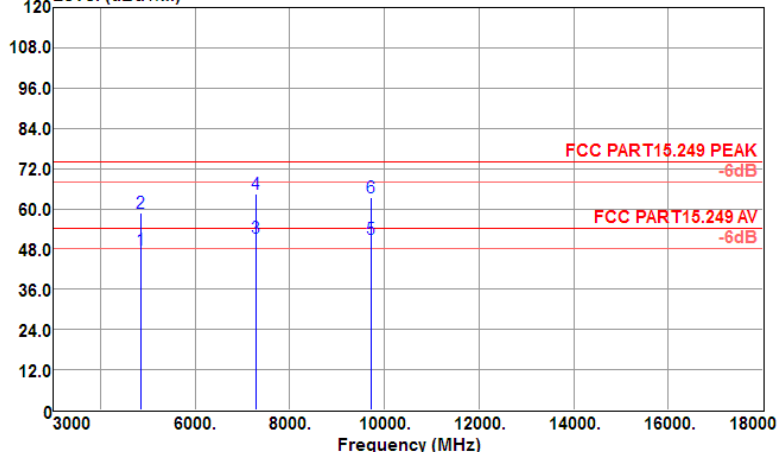

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark	A/Pos cm	T/Pos deg
4860.000	47.39	31.36	5.42	36.25	47.92	54.00	-6.08	Average	340	95
4860.000	58.29	31.36	5.42	36.25	58.82	74.00	-15.18	Peak	340	86
7290.000	42.45	36.07	7.18	34.33	51.37	54.00	-2.63	Average	150	57
7290.000	55.58	36.07	7.18	34.33	64.50	74.00	-9.50	Peak	150	51
9720.000	39.30	38.00	7.92	34.18	51.04	54.00	-2.96	Average	150	12
9720.000	51.65	38.00	7.92	34.18	63.39	74.00	-10.61	Peak	150	29

Middle Channel Vertical:


Test Site	: 3m Chamber	Temp/Humi	: 18°C/ 60%
Tested by	: Damon	Power rating:	DC 3.7V
Model No.	: MW162	Pol/Phase	: VERTICAL
EUT	: 2.4G MOUSE		
Test Mode	: 2430MHz Tx mode		

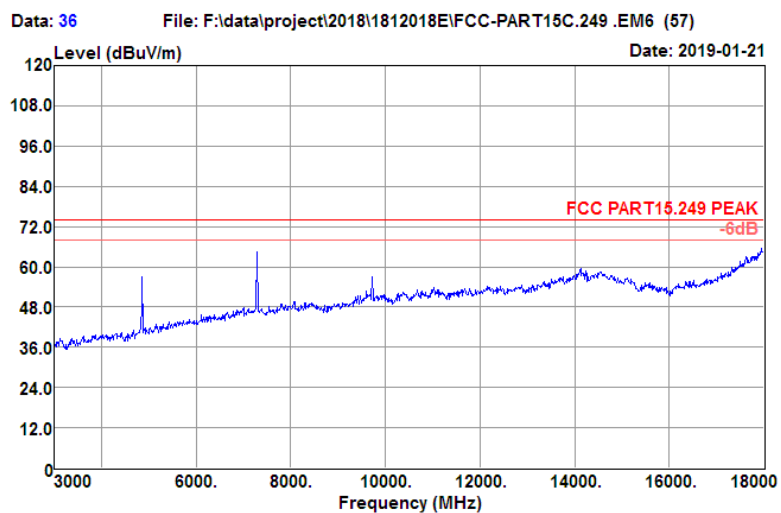

Test Site	: 3m Chamber	Temp/Humi	: 18°C/ 60%
Tested by	: Damon	Power rating:	DC 3.7V
Model No.	: MW162	Pol/Phase	: VERTICAL
EUT	: 2.4G MOUSE		
Test Mode	: 2430MHz Tx mode		

Data: 39 File: F:\data\project\2018\1812018E\FCC-PART15C.249.EM6 (57)


Level (dBuV/m) Date: 2019-01-21

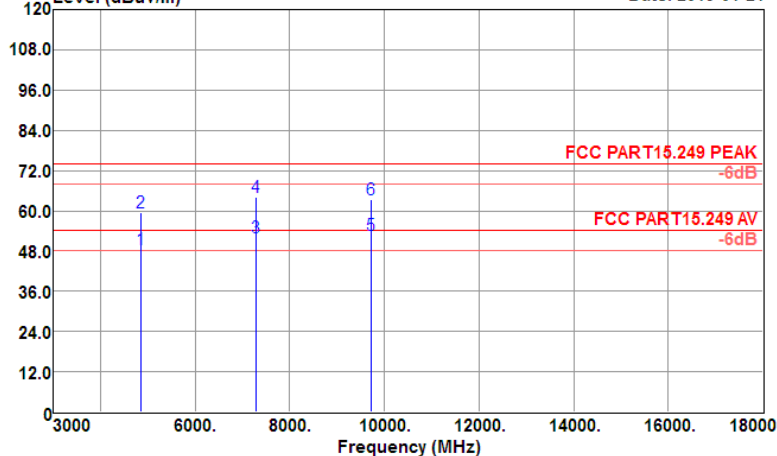

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark	A/Pos cm	T/Pos deg
4860.000	48.00	31.36	5.42	36.25	48.53	54.00	-5.47	Average	177	183
4860.000	58.83	31.36	5.42	36.25	59.36	74.00	-14.64	Peak	177	135
7290.000	43.07	36.07	7.18	34.33	51.99	54.00	-2.01	Average	220	77
7290.000	55.08	36.07	7.18	34.33	64.00	74.00	-10.00	Peak	220	77
9720.000	40.91	38.00	7.92	34.18	52.65	54.00	-1.35	Average	170	35
9720.000	51.48	38.00	7.92	34.18	63.22	74.00	-10.78	Peak	170	57


High Channel Horizontal:

Test Site	: 3m Chamber	Temp/Humi	: 18°C/ 60%
Tested by	: Damon	Power rating:	DC 3.7V
Model No.	: MW162	Pol/Phase	: HORIZONTAL
EUT	: 2.4G MOUSE		
Test Mode	: 2470MHz Tx mode		

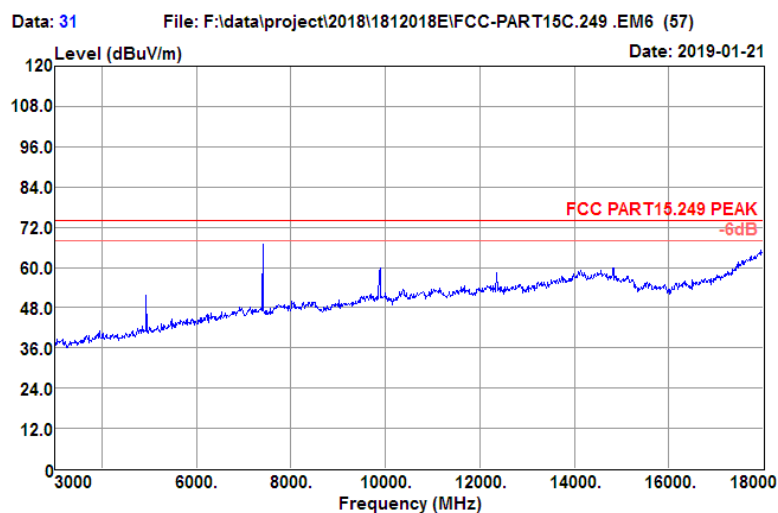

Test Site	: 3m Chamber	Temp/Humi	: 18°C/ 60%
Tested by	: Damon	Power rating:	DC 3.7V
Model No.	: MW162	Pol/Phase	: HORIZONTAL
EUT	: 2.4G MOUSE		
Test Mode	: 2470MHz Tx mode		


Data: 32 File: F:\data\project\2018\1812018E\FCC-PART15C.249.EM6 (57)

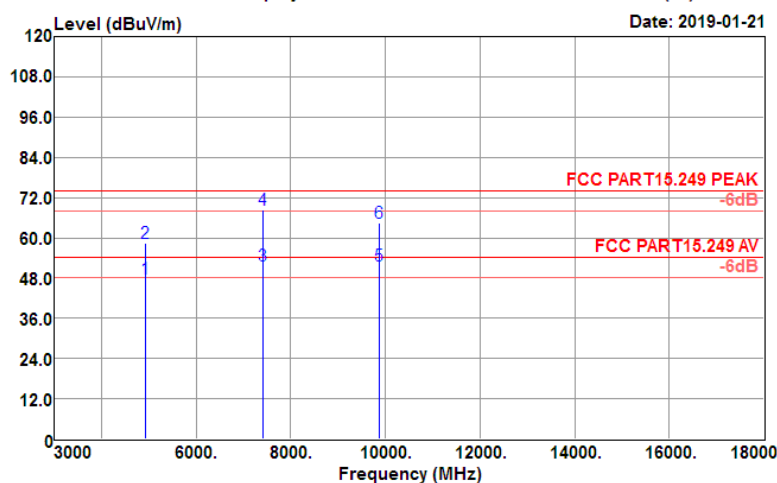

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark	A/Pos cm	T/Pos deg
4940.000	47.13	31.56	5.37	36.22	47.84	54.00	-6.16	Average	259	300
4940.000	57.72	31.56	5.37	36.22	58.43	74.00	-15.57	Peak	259	308
7410.000	42.45	36.34	7.49	34.44	51.84	54.00	-2.16	Average	150	339
7410.000	59.03	36.34	7.49	34.44	68.42	74.00	-5.58	Peak	150	341
9880.000	39.72	38.28	8.04	34.25	51.79	54.00	-2.21	Average	150	354
9880.000	52.23	38.28	8.04	34.25	64.30	74.00	-9.70	Peak	150	360

High Channel Vertical:


Test Site	: 3m Chamber	Temp/Humi	: 18°C/ 60%
Tested by	: Damon	Power rating:	DC 3.7V
Model No.	: MW162	Pol/Phase	: VERTICAL
EUT	: 2.4G MOUSE		
Test Mode	: 2470MHz Tx mode		

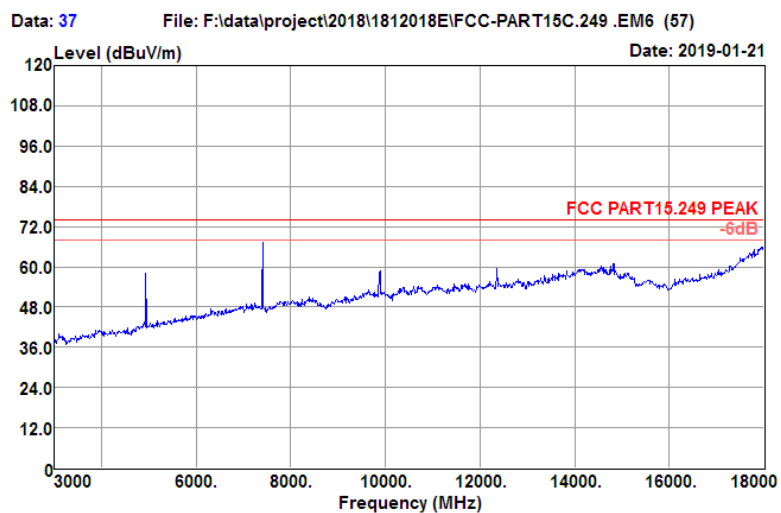

Test Site	: 3m Chamber	Temp/Humi	: 18°C/ 60%
Tested by	: Damon	Power rating:	DC 3.7V
Model No.	: MW162	Pol/Phase	: VERTICAL
EUT	: 2.4G MOUSE		
Test Mode	: 2470MHz Tx mode		

Data: 38 File: F:\data\project\2018\1812018E\FCC-PART15C.249.EM6 (57)

Level (dBuV/m) Date: 2019-01-21

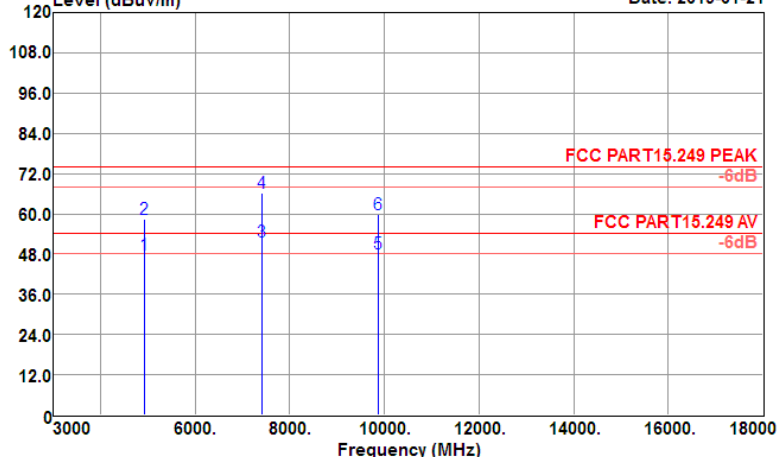


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark	A/Pos cm	T/Pos deg
4940.000	47.19	31.56	5.37	36.22	47.90	54.00	-6.10	Average	150	103
4940.000	57.80	31.56	5.37	36.22	58.51	74.00	-15.49	Peak	150	103
7410.000	42.27	36.34	7.49	34.44	51.66	54.00	-2.34	Average	150	168
7410.000	56.78	36.34	7.49	34.44	66.17	74.00	-7.83	Peak	150	360
9880.000	36.19	38.28	8.04	34.25	48.26	54.00	-5.74	Average	172	243
9880.000	47.85	38.28	8.04	34.25	59.92	74.00	-14.08	Peak	170	265

4.2.7 Test Result of Radiated Spurious Emission (30MHz ~ 1GHz)

Horizontal:


Test Site	: 3m Chamber	Temp/Humi	: 18°C/ 60%
Tested by	: Damon	Power rating:	DC 3.7V
Model No.	: MW162	Pol/Phase	: HORIZONTAL
EUT	: 2.4G MOUSE		
Test Mode	: Tx mode		

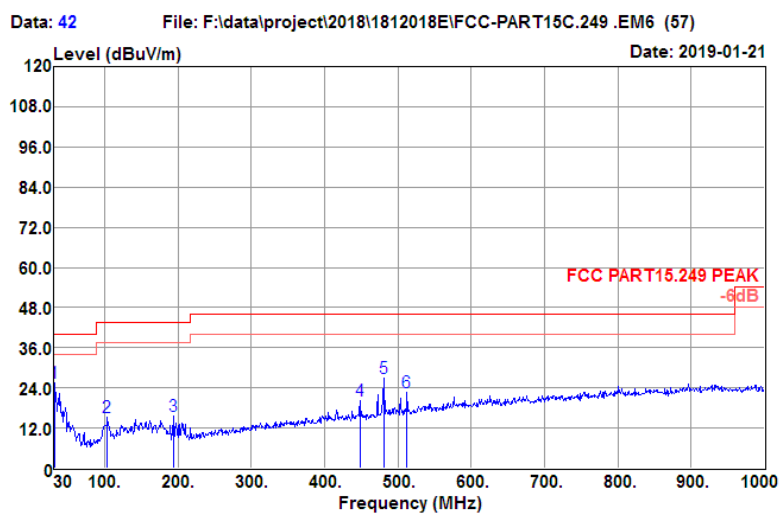

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark	A/Pos cm	T/Pos deg
30.970	43.97	13.24	0.96	32.52	25.65	40.00	-14.35	Peak	**	**
103.720	35.12	10.57	1.99	32.45	15.23	43.50	-28.27	Peak	**	**
192.960	35.21	10.32	2.78	32.54	15.77	43.50	-27.73	Peak	**	**
448.070	32.96	15.62	4.28	32.51	20.35	46.00	-25.65	Peak	**	**
480.080	38.82	16.16	4.50	32.54	26.94	46.00	-19.06	Peak	**	**
512.090	33.93	16.73	4.57	32.57	22.66	46.00	-23.34	Peak	**	**

Vertical:

Test Site	: 3m Chamber	Temp/Humi	: 18°C/ 60%
Tested by	: Damon	Power rating:	DC 3.7V
Model No.	: MW162	Pol/Phase	: VERTICAL
EUT	: 2.4G MOUSE		
Test Mode	: Tx mode		

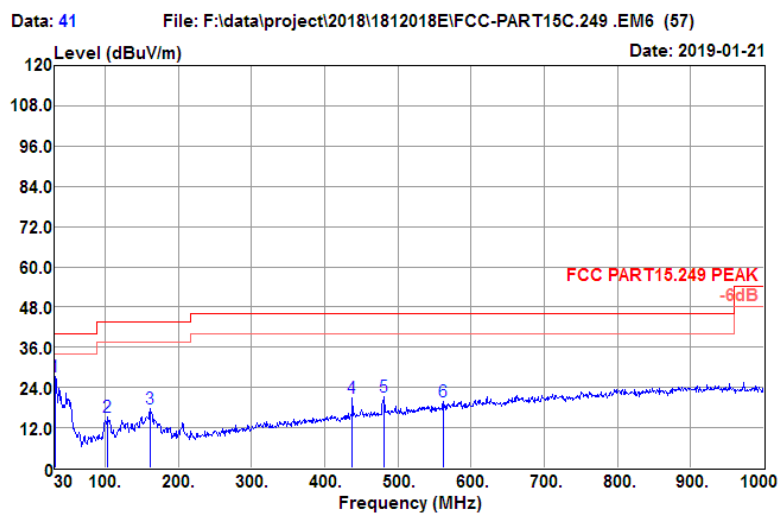

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark	A/Pos cm	T/Pos deg
30.970	45.67	13.24	0.96	32.52	27.35	40.00	-12.65	Peak	**	**
103.720	35.04	10.57	1.99	32.45	15.15	43.50	-28.35	Peak	**	**
161.920	33.60	14.01	2.49	32.52	17.58	43.50	-25.92	Peak	**	**
437.400	33.57	15.44	4.22	32.50	20.73	46.00	-25.27	Peak	**	**
480.080	32.98	16.16	4.50	32.54	21.10	46.00	-24.90	Peak	**	**
562.530	30.03	17.69	4.84	32.64	19.92	46.00	-26.08	Peak	**	**

4.3 AC Conducted Emission Measurement

4.3.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.


Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

4.3.2 Test Procedures


6. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
7. Connect EUT to the power mains through a line impedance stabilization network (LISN).
8. All the support units are connecting to the other LISN.
9. The LISN provides 50 ohm coupling impedance for the measuring instrument.
10. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
11. Both sides of AC line were checked for maximum conducted interference.
12. The frequency range from 150 kHz to 30 MHz was searched.
13. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

4.3.3 Test Result of AC Conducted Emission

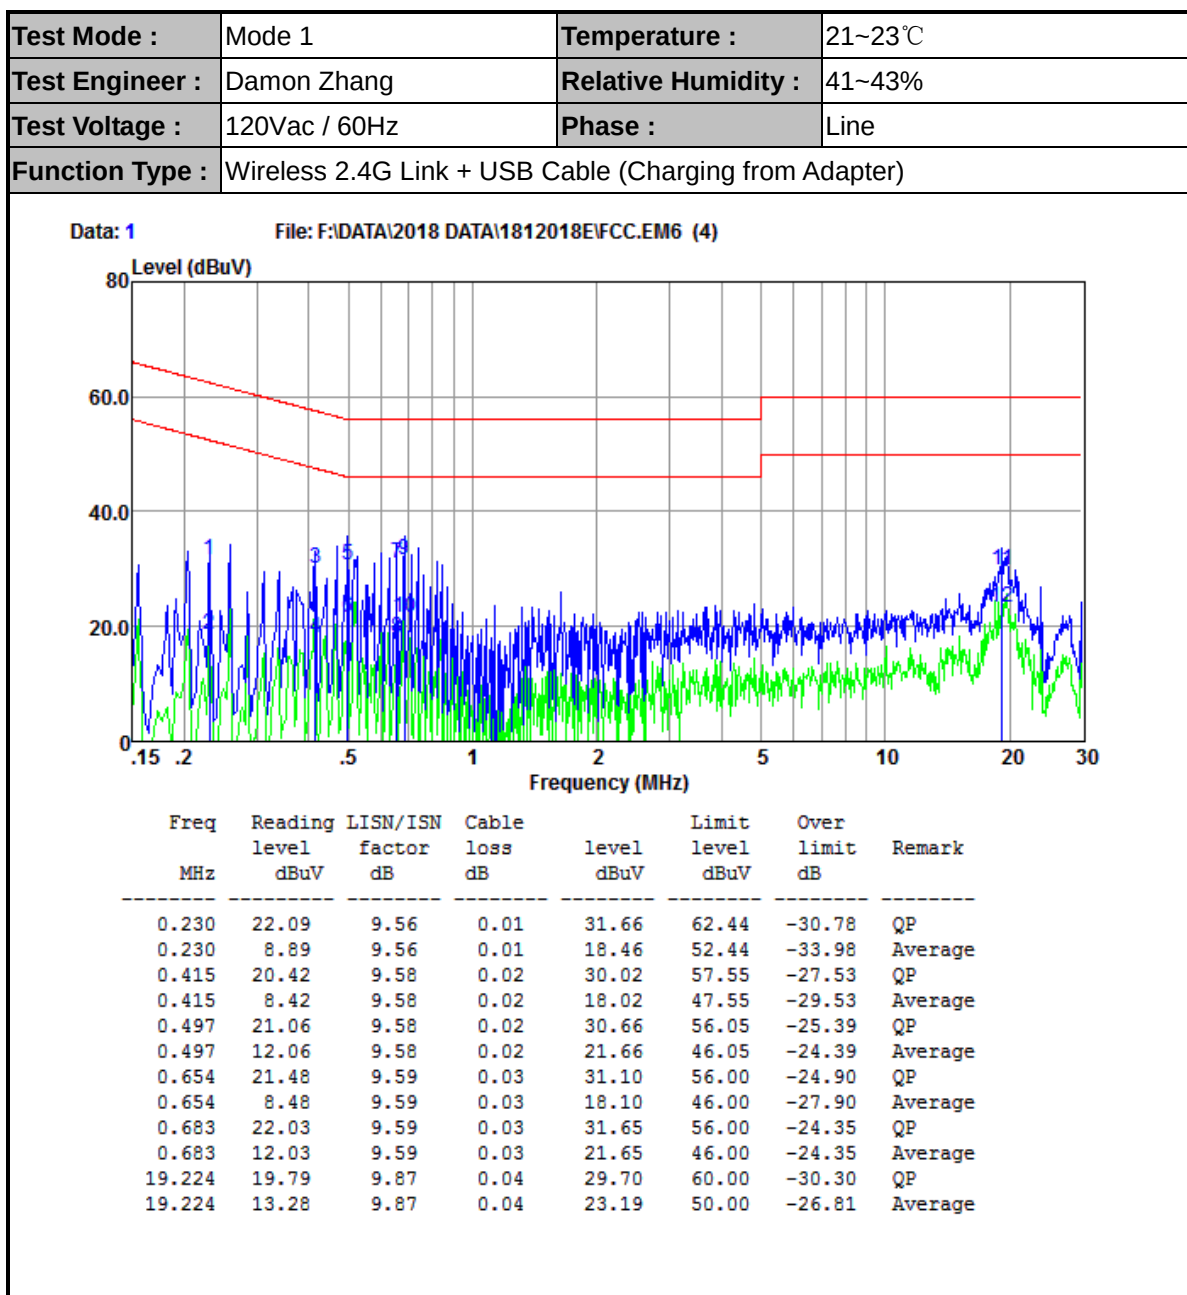

Test Mode :	Mode 1	Temperature :	21~23℃
Test Engineer :	Damon Zhang	Relative Humidity :	41~43%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	Wireless 2.4G Link + USB Cable (Charging from Adapter)		

Data: 3 File: F:\DATA\2018 DATA\1812018\FCC.EM6 (4)

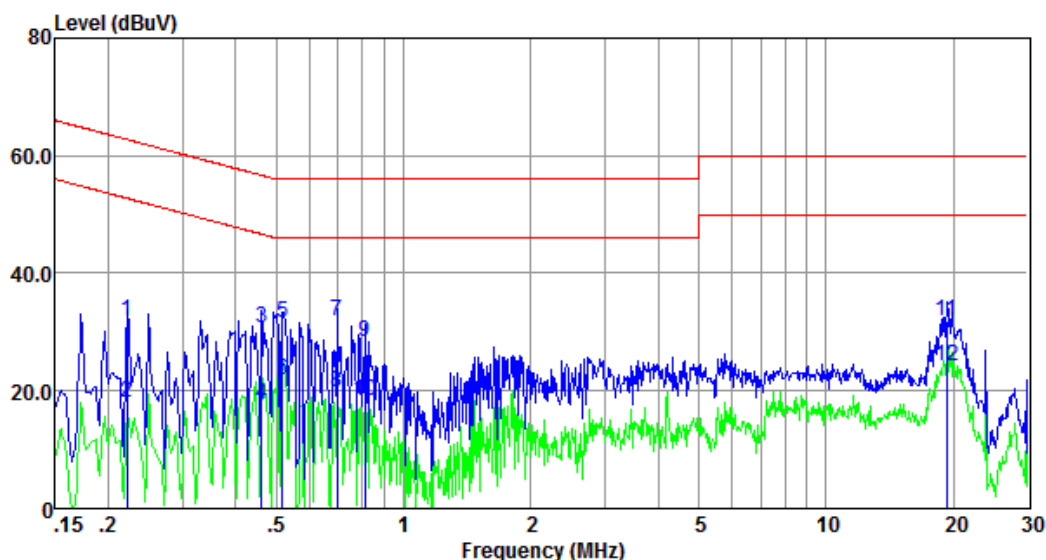

Freq MHz	Reading level dBuV	LISN/ISN factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
0.222	22.30	9.58	0.01	31.89	62.74	-30.85	QP
0.222	8.31	9.58	0.01	17.90	52.74	-34.84	Average
0.461	20.92	9.62	0.02	30.56	56.67	-26.11	QP
0.461	8.12	9.62	0.02	17.76	46.67	-28.91	Average
0.516	21.83	9.63	0.02	31.48	56.00	-24.52	QP
0.516	12.29	9.63	0.02	21.94	46.00	-24.06	Average
0.697	22.28	9.64	0.03	31.95	56.00	-24.05	QP
0.697	10.22	9.64	0.03	19.89	46.00	-26.11	Average
0.809	18.70	9.64	0.03	28.37	56.00	-27.63	QP
0.809	8.62	9.64	0.03	18.29	46.00	-27.71	Average
19.326	22.04	9.92	0.04	32.00	60.00	-28.00	QP
19.326	14.25	9.92	0.04	24.21	50.00	-25.79	Average

4.4 Antenna Requirements

4.4.1 Standard Applicable

According to antenna requirement of §15.203.


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded..

4.4.2 Antenna Connected Construction

An embedded-in antenna design is used.

4.4.3 Antenna Gain

The antenna peak gain of EUT is -1.2 dBi.

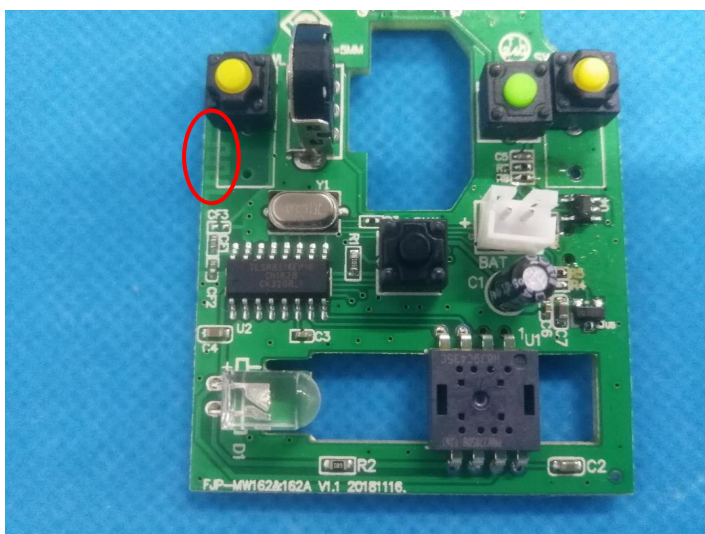

5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Due Date	Remark
Spectrum Analyzer	Keysight	N9010A	MY56070788	2018-03-02	2019-03-01	Conducted
Power Sensor	Keysight	U2021XA	MY56510025	2018-03-02	2019-03-01	Conducted
Power Sensor	Keysight	U2021XA	MY57030005	2018-03-02	2019-03-01	Conducted
Power Sensor	Keysight	U2021XA	MY56510018	2018-03-02	2019-03-01	Conducted
Power Sensor	Keysight	U2021XA	MY56480002	2018-03-02	2019-03-01	Conducted
Thermal Chamber	Sanmtest	SMC-408-CD	2435	2018-07-05	2019-07-04	Conducted
Base Station	R&S	CMW 270	101231	2018-03-17	2019-03-16	Conducted
Signal Generator (Interferer)	Keysight	N5182B	MY56200384	2018-04-10	2019-04-09	Conducted
Signal Generator (Blocker)	Keysight	N5171B	MY56200661	2018-03-15	2019-03-14	Conducted

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV 30	103728	2018-03-02	2019-03-01	Radiation
Amplifier	Sonoma	310	363917	2018-03-06	2019-03-05	Radiation
Amplifier	Schwarzbeck	BBV 9718	327	2018-03-14	2019-03-13	Radiation
Amplifier	Narda	TTA1840-35-HG	2034380	2018-07-18	2019-07-17	Radiation
Broadband Antenna	Schwarzbeck	VULB 9168	9168-757	2017-03-03	2020-03-02	Radiation
Horn Antenna	Schwarzbeck	BBHA 9120 D	1677	2017-03-03	2020-03-02	Radiation
Horn Antenna	COM-POWER	AH-1840	101117	2018-06-20	2021-06-19	Radiation
Test Software	Auidx	E3	6.111221a	N/A	N/A	Radiation
Filter	Micro-Tronics	BRM 50702	G266	N/A	N/A	Radiation

N/A: No Calibration Required

6 Uncertainty of Evaluation

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.64dB
Radiated emission	30MHz ~ 1GMHz	5.05dB
	1GHz ~ 18GHz	5.06 dB
	18GHz ~ 40GHz	3.65dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.