

TEST REPORT

Reference No...... : WTH25X01006451W001
FCC ID : 2BEWXSC316
Applicant : Zhejiang Lingzhu Technology Co., Ltd.
Address : Room 302, No 1 Building Huace Center, Xihu District, Hangzhou 310000, China
Manufacturer : The same as Applicant
Address : The same as Applicant
Product Name : Smart Camera
Model No...... : SC316-WB4A
Standards : FCC Part 15.407
Date of Receipt sample : 2025-01-09
Date of Test..... : 2025-01-09 to 2025-02-17
Date of Issue : 2025-02-17
Test Report Form No. : WTX_Part 15_407W
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

Tris Li

Tris Li/ Project Engineer

Approved by:

Jason Su

Jason Su/ Manager

TABLE OF CONTENTS

1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2 TEST STANDARDS.....	6
1.3 TEST METHODOLOGY	6
1.4 TABLE FOR PARAMETERS OF TEST SOFTWARE SETTING.....	6
1.5 EUT OPERATING DURING TEST.....	7
1.6 TEST FACILITY	7
1.7 EUT SETUP AND TEST MODE	8
1.8 MEASUREMENT UNCERTAINTY	9
1.9 TEST EQUIPMENT LIST AND DETAILS	10
2. SUMMARY OF TEST RESULTS.....	14
3. ANTENNA REQUIREMENT	15
3.1 STANDARD APPLICABLE	15
3.2 EVALUATION INFORMATION	15
4. AUTOMATICALLY DISCONTINUE TRANSMISSION	16
4.1 STANDARD APPLICABLE	16
4.2 SUMMARY OF TEST RESULTS.....	16
5. POWER SPECTRAL DENSITY	17
5.1 STANDARD APPLICABLE	17
5.2 TEST PROCEDURE	17
5.3 SUMMARY OF TEST RESULTS/PLOTS.....	18
6. EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH	19
6.1 STANDARD APPLICABLE	19
6.2 TEST PROCEDURE	19
6.3 SUMMARY OF TEST RESULTS/PLOTS.....	21
7. MAXIMUM CONDUCTED OUTPUT POWER	22
7.1 STANDARD APPLICABLE	22
7.2 TEST PROCEDURE	22
7.3 SUMMARY OF TEST RESULTS/PLOTS.....	23
8. RADIATED SPURIOUS EMISSIONS	24
8.1 STANDARD APPLICABLE	24
8.2 TEST PROCEDURE	24
8.3 TEST RECEIVER SETUP	26
8.4 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	26
8.5 SUMMARY OF TEST RESULTS/PLOTS.....	26
9. FREQUENCY STABILITY	83
9.1 STANDARD APPLICABLE	83
9.2 TEST PROCEDURE	83
9.3 SUMMARY OF TEST RESULTS/PLOTS.....	83
10. CONDUCTED EMISSIONS	84
10.1 TEST PROCEDURE.....	84
10.2 BASIC TEST SETUP BLOCK DIAGRAM	84
10.3 TEST RECEIVER SETUP	84
10.4 SUMMARY OF TEST RESULTS/PLOTS	84
APPENDIX SUMMARY	89
APPENDIX A.....	90
APPENDIX B.....	104
APPENDIX C.....	130
APPENDIX D.....	145

APPENDIX PHOTOGRAPHS.....147

Report version

Version No.	Date of issue	Description
Rev.00	2025-02-17	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	Smart Camera
Trade Name:	/
Model No.:	SC316-WB4A
Adding Model(s):	SC316-WB4, SC316-WB4B, SC316-WB4C, SC316-WB4D, SC316-WB4E, SC316-WB4F, SC316-WB4G, SC316-WB3A, SC316-WB3, SC316-WB3B, SC316-WB3C, SC316-WB3D, SC316-WB3E, SC316-WB3F, SC316-WB3G, SC316-WB5A, SC316-WB5, SC316-WB5B, SC316-WB5C, SC316-WB5D, SC316-WB5E, SC316-WB5F, SC316-WB5G
Rated Voltage:	AC 120V
Battery Capacity:	/
Power Adapter:	Model: DCT06W050100US-C1 Input: 100-240V ~50/60Hz 200mA Output: DC 5V 1A
<i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model SC316-WB4A, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11a, 802.11n(HT20), 802.11n-HT40, 802.11ac-VHT20/40, 802.11ax-HE20/40
Frequency Range:	5180-5240MHz, 5745-5825MHz
Max. RF Output Power:	Band 1: 14.58dBm (Conducted) Band 4: 14.16dBm (Conducted)
Type of Modulation:	802.11a: OFDM /64-QAM,16-QAM, QPSK, BPSK 802.11n: OFDM /64-QAM,16-QAM, QPSK, BPSK 802.11ac: OFDM /256-QAM 802.11ax: OFDMA/1024-QAM
Type of Antenna:	PCB Antenna
Antenna Gain:	Band 1:1.45dBi Band 4:1.31dBi
<i>Note The Antenna Gain is provided by the customer and can affect the validity of results.</i>	

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.407: General technical requirements.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

KDB789033 D02 v02r01: Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-Nii) Devices Part 15, Subparte.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB789033 D02 v02r01. The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Table for parameters of Test Software setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Mode	Test Frequency (MHz)					
	NCB: 20MHz					
	5180	5200	5240	5745	5785	5825
802.11a 6Mbps	15	15	15	15	15	15
802.11n-HT20 MCS0	14	14	14	14	14	14
802.11ac-HT20 MCS0	14	14	14	14	14	14
Mode	NCB: 40MHz					
	5190		5230		5755	5795
802.11n-HT40 MCS0	13		13		13	13
802.11ac-HT40 MCS0	13		13		13	13

1.5 EUT Operating during test

EUT was programmed to be in continuously transmitting mode. During the test, EUT operation to normal function and programs under Android were executed.

1.6 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A and the CAB identifier is CN0057.

1.7 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11a	5180MHz,5200MHz,5240MHz,5745MHz, 5785MHz,5825MHz
TM2	802.11n-HT20	5180MHz,5200MHz,5240MHz,,5745MHz, 5785MHz,5825MHz
TM3	802.11ac-HT20	5180MHz,5200MHz,5240MHz,5745MHz, 5785MHz,5825MHz
TM4	802.11ax-HT20	5180MHz,5200MHz,5240MHz,5745MHz, 5785MHz,5825MHz
TM5	802.11n-HT40	5190MHz,5230MHz,5755MHz,5795MHz
TM6	802.11ac-HT40	5190MHz,5230MHz,5755MHz,5795MHz
TM7	802.11ax-VH40	5190MHz,5230MHz,5755MHz,5795MHz
Note: All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report.		

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	45~75 %
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
Type-C Cable	1.52	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

1.8 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.9 Test Equipment List and Details

Fixed asset Number	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
WTXE1041A 1001	Communication Tester	Rohde & Schwarz	CMW500	148650	2024-02-24	2025-02-23
WTXE1005A 1005	Spectrum Analyzer	Agilent	N9020A	US471401 02	2024-03-19	2025-03-18
WTXE1084A 1001	Spectrum Analyzer	Agilent	N9020A	MY543205 48	2024-02-24	2025-02-23
WTXE1004A 1-001	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2024-02-27	2025-02-26
WTXE1103A 1003	Attenuator	Pasternack	PE4007-4	/	2024-02-24	2025-02-23
WTXE1003A 1-005	Coaxial Cable	/	0M4RFC	/	2025-01-03	2025-07-02
☐ Chamber A: Below 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2024-02-24	2025-02-23
WTXE1001A 1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2024-03-19	2025-03-18
WTXE1007A 1001	Amplifier	HP	8447F	2805A034 75	2024-02-24	2025-02-23
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2024-02-26	2025-02-25
WTXE1010A 1006	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2024-02-24	2025-02-23
WTXE1104A 1032-1	Coaxial Cable	/	RC_6G-N-M	/	2024-03-15	2025-03-14
WTXE1104A 1032-2	Coaxial Cable	/	RC_6G-N-M	/	2024-03-15	2025-03-14
WTXE1104A 1032-3	Coaxial Cable	/	RC_6G-N-M	/	2024-03-15	2025-03-14
☐ Chamber A: Above 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2024-02-24	2025-02-23
WTXE1001A 1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2024-03-19	2025-03-18
WTXE1065A 1001	Amplifier	C&D	PAP-1G18	2002	2024-02-27	2025-02-26
WTXE1010A 1005	Horn Antenna	ETS	3117	00086197	2024-02-26	2025-02-25

WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2024-03-17	2025-03-16
WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2024-02-29	2025-02-28
WTXE1104A 1033-1	Coaxial Cable	/	C16-07-07	/	2024-03-15	2025-03-14
WTXE1104A 1033-2	Coaxial Cable	/	C16-07-07	/	2024-03-15	2025-03-14
WTXE1104A 1033-3	Coaxial Cable	/	C16-07-07	/	2024-03-15	2025-03-14
☐ Chamber B:Below 1GHz						
WTXE1010A 1006	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2024-03-17	2027-03-16
WTXE1038A 1001	Amplifier	Agilent	8447D	2944A104 57	2024-02-24	2025-02-23
WTXE1001A 1002	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2024-02-24	2025-02-23
WTXE1104A 1031-1	Coaxial Cable	/	1.5MRFC-LWB3	/	2024-07-03	2025-07-02
WTXE1104A 1031-2	Coaxial Cable	/	RG 316	/	2024-07-03	2025-07-02
WTXE1104A 1031-3	Coaxial Cable	/	RG 316	/	2024-07-03	2025-07-02
☒ Chamber C:Below 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2024-02-27	2025-02-26
WTXE1010A 1013-1	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2024-04-18	2027-04-17
WTXE1007A 1002	Amplifier	HP	8447F	2944A038 69	2024-02-24	2025-02-23
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2024-02-26	2025-02-25
WTXE1104A 1034-1	Coaxial Cable	/	RC_6G-N-M	/	2024-07-03	2025-07-02
WTXE1104A 1034-2	Coaxial Cable	/	RC_6G-N-M	/	2024-07-03	2025-07-02
WTXE1104A 1034-3	Coaxial Cable	/	RC_6G-N-M	/	2024-07-03	2025-07-02
☒ Chamber C: Above 1GHz						
WTXE1093A	EMI Test	Rohde &	ESIB 26	100401	2024-02-27	2025-02-26

1001	Receiver	Schwarz				
WTXE1103A 1005	Horn Antenna	POAM	RTF-118A	1820	2023-03-10	2026-03-09
WTXE1103A 1006	Amplifier	Tonscend	TAP01018050	AP22E806 235	2024-02-27	2025-02-26
WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2024-03-17	2025-03-16
WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2024-02-29	2025-02-28
WTXE1104A 1035-1	Coaxial Cable	/	RC-18G-N-M	/	2024-07-03	2025-07-02
WTXE1104A 1035-2	Coaxial Cable	/	RC-18G-N-M	/	2024-07-03	2025-07-02
WTXE1104A 1035-3	Coaxial Cable	/	RC-18G-N-M	/	2024-07-03	2025-07-02
☐ Conducted Room 1#						
WTXE1104A 1029	EMI Test Receiver	Rohde & Schwarz	ESCI	100525	2024-12-08	2025-12-07
WTXE1002A 1001	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2024-02-24	2025-02-23
WTXE1003A 1001	AC LISN	Schwarz beck	NSLK8126	8126-279	2024-02-24	2025-02-23
WTXE1104A 1036	Coaxial Cable	/	RG 316	/	2024-07-03	2025-07-02
WTXE1104A 1038	Coaxial Cable	/	6MRFC-DP	/	2024-07-03	2025-07-02
☒ Conducted Room 2#						
WTXE1001A 1004	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2024-02-24	2025-02-23
WTXE1003A 1003	LISN	Rohde & Schwarz	ENV 216	100097	2024-02-24	2025-02-23
WTXE1104A 1037	Coaxial Cable	/	RG 316	/	2024-07-03	2025-07-02

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission A)	Farad	EZ-EMC	RA-03A1 (1.1.4.2)
EMI Test Software (Radiated Emission B)	Farad	EZ-EMC	RA-03A1 (1.1.4.2)
EMI Test Software (Radiated Emission C)	Farad	EZ-EMC	RA-03A1-2 (1.1.4.2)
EMI Test Software (Conducted Emission Room 1#)	Farad	EZ-EMC	3A1*CE-RE 1.1.4.3
EMI Test Software (Conducted Emission Room 2#)	Farad	EZ-EMC	3A1*CE-RE 1.1.4.3

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203; §15.405	Antenna Requirement	Compliant
15.407 (c)	Automatically Discontinue Transmission	Compliant
§15.207; §15.407(b)(6)	Conducted Emission	Compliant
§15.407(a)(1),(2)	Power Spectral Density	Compliant
§15.407(e)	Emission Bandwidth and Occupied Bandwidth	Compliant
§15.407(a)(1),(2)	Maximum Conducted Output Power	Compliant
§15.407(b)(1),(2),(3),(4)	Undesirable emission	Compliant
§15.205; §15.407(b)(1),(2),(3)	Radiated Emission	Compliant
§15.407(g)	Frequency Stability	Compliant
§15.407(h)	Dynamic Frequency Selection (DFS)	Compliant

N/A: Not applicable.

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Evaluation Information

This product has a PCB antenna, fulfill the requirement of this section.

4. Automatically Discontinue Transmission

4.1 Standard Applicable

According to FCC Part 15.407(c), the device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

4.2 Summary of Test Results

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

5. Power Spectral Density

5.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11 \text{ dBm} + 10 \log B$, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

5.2 Test Procedure

According to 789033 D02 v02r01 General UNII Test Procedures New Rules v02, the following is the measurement procedure.

For devices operating in the bands 5.15-5.25GHz, 5.25-5.35GHz, and 5.47-5.725GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85GHz, the rules specify a measurement bandwidth of 500kHz. Many spectrum analyzers do not have 500kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500kHz, "provided that the measured power is integrated over the full

reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1MHz, or 500kHz). If measurements are performed using a reduced resolution bandwidth ($< 1\text{MHz}$, or $< 500\text{kHz}$) and integrated over 1 MHz, or 500kHz bandwidth, the following adjustments to the procedures apply:

- a) Set $\text{RBW} \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $\text{VBW} \geq 3 \text{ RBW}$.
- c) If measurement bandwidth of Maximum PSD is specified in 500kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas $\text{RBW} (< 500\text{kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/\text{RBW})$ to the measured result, whereas $\text{RBW} (< 1\text{MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100kHz for the sections 5.c) and 5.d) above, since $\text{RBW}=100\text{kHz}$ is available on nearly all spectrum analyzers.

5.3 Summary of Test Results/Plots

Please refer to Appendix A

6. Emission Bandwidth and Occupied Bandwidth

6.1 Standard Applicable

According to 15.407(a) and (e):

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10 \log B$, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(e) Within the 5.725-5.85GHz band, the minimum 6dB bandwidth of U-NII devices shall be at least 500kHz.

6.2 Test Procedure

According to 789033 D02 v02r0r section C&D, the following is the measurement procedure.

1. Emission Bandwidth (EBW)

a) Set RBW = approximately 1% of the emission bandwidth.

b) Set the VBW > RBW.

- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85GHz Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

D. 99 Percent Occupied Bandwidth

The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in section II.G.3.d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the EBW to 789033 D02 v02r01 General UNII Test Procedures New Rules v01 define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

The following procedure shall be used for measuring (99 %) power bandwidth:

- 1. Set center frequency to the nominal EUT channel center frequency.
- 2. Set span = 1.5 times to 5.0 times the OBW.
- 3. Set RBW = 1 % to 5 % of the OBW
- 4. Set VBW $\geq 3 \times$ RBW
- 5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- 6. Use the 99 % power bandwidth function of the instrument (if available).
- 7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency.

Reference No.: WTH25X01006451W001

The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

6.3 Summary of Test Results/Plots

Please refer to Appendix B

7. Maximum Conducted Output Power

7.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10 \log B$, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

7.2 Test Procedure

According to KDB789033 D02 v02r01 section E, the following is the measurement procedure.

- (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (ii) Set RBW = 1MHz.
- (iii) Set VBW $\geq$ 3MHz.
- (iv) Number of points in sweep ≥ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that

narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq$ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".

(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

7.3 Summary of Test Results/Plots

Please refer to Appendix C

8. Radiated Spurious Emissions

8.1 Standard Applicable

According to §15.407(b), undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25GHz band: All emissions outside of the 5.15-5.35GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35GHz band: All emissions outside of the 5.15-5.35GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725GHz band: All emissions outside of the 5.47-5.725GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85GHz band:
 - (i) All emissions shall be limited to a level of -27dBm/MHz at 75MHz or more above or below the band edge increasing linearly to 10dBm/MHz at 25MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6dBm/MHz at 5MHz above or below the band edge, and from 5MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

According to §15.407(b)(6), Unwanted emissions below 1GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

According to §15.407(b)(7), The provisions of §15.205 apply to intentional radiators operating under this section.

789033 D02 v02r01 General UNII Test Procedures New Rules v01

If radiated measurements are performed, field strength is then converted to EIRP as follows:

$$\text{EIRP} = ((E \cdot d)^2) / 30$$

where:

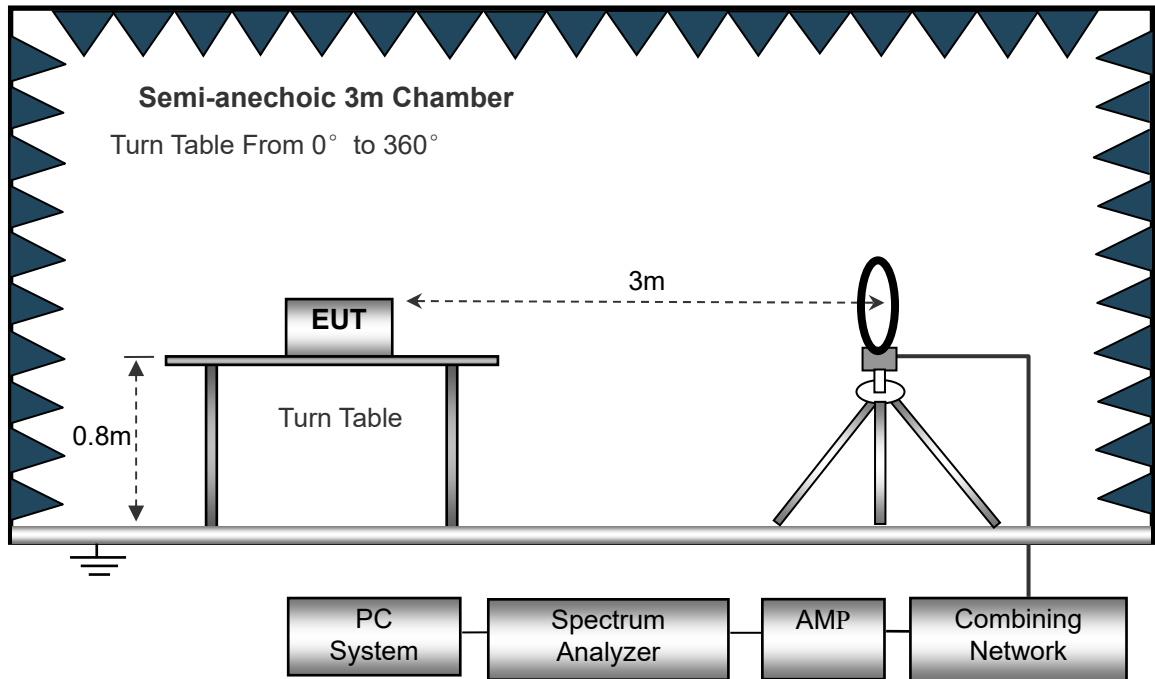
- E is the field strength in V/m;
- d is the measurement distance in meters;
- EIRP is the equivalent isotropically radiated power in watts.

8.2 Test Procedure


The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.407(b)(6) and FCC Part 15.209 Limit..

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.


The test setup for emission measurement below 30MHz.



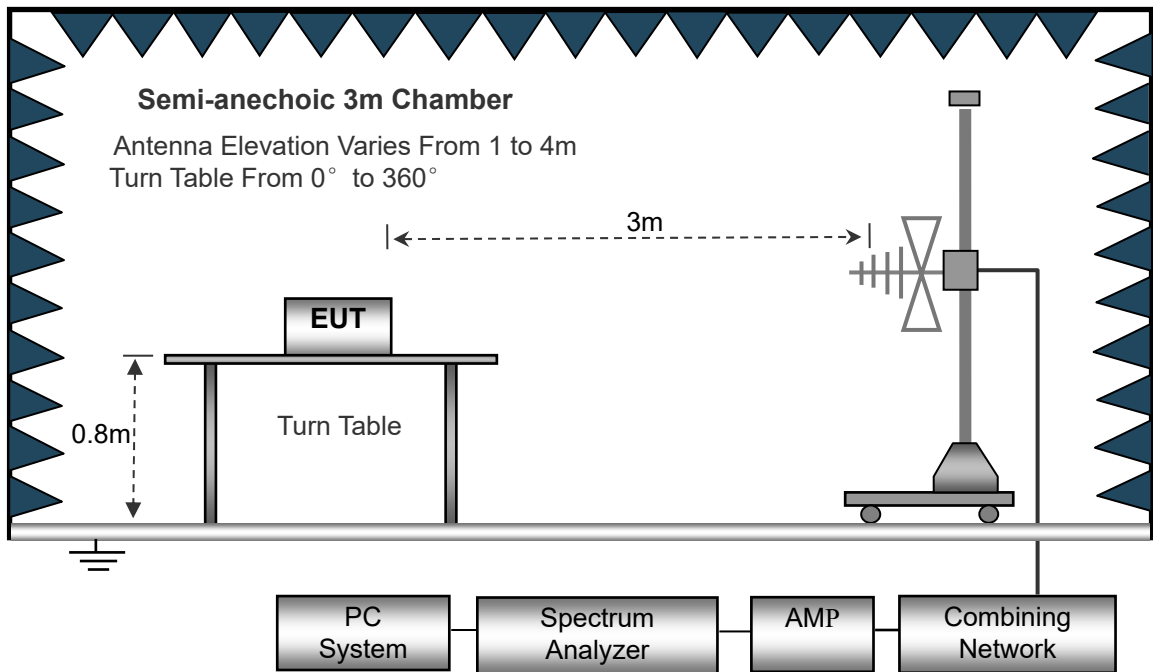The test setup for emission measurement from 30MHz to 1GHz.



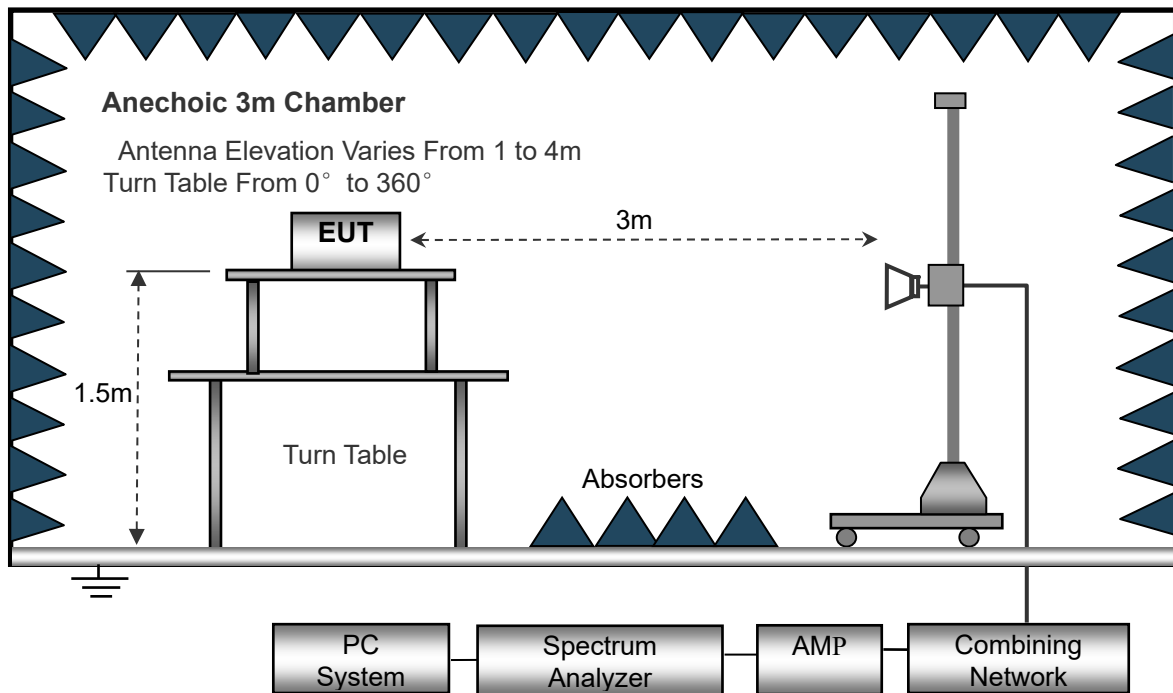The test setup for emission measurement above 1GHz.



8.3 Test Receiver Setup

During the radiated emission test for above 1GHz, the test receiver was set with the following configurations:

For peak detector:

RBW = 1000kHz, VBW = 3000kHz, Sweep Time = Auto

For average detector:

RBW = 1000kHz, VBW = 10Hz, Sweep Time = Auto

8.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for Class B. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

8.5 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

- Spurious Emission From 30MHz to 1GHz
- 5150-5250MHz


802.11a			
Test Channel	5180MHz(Worst case)	Polarity:	Horizontal

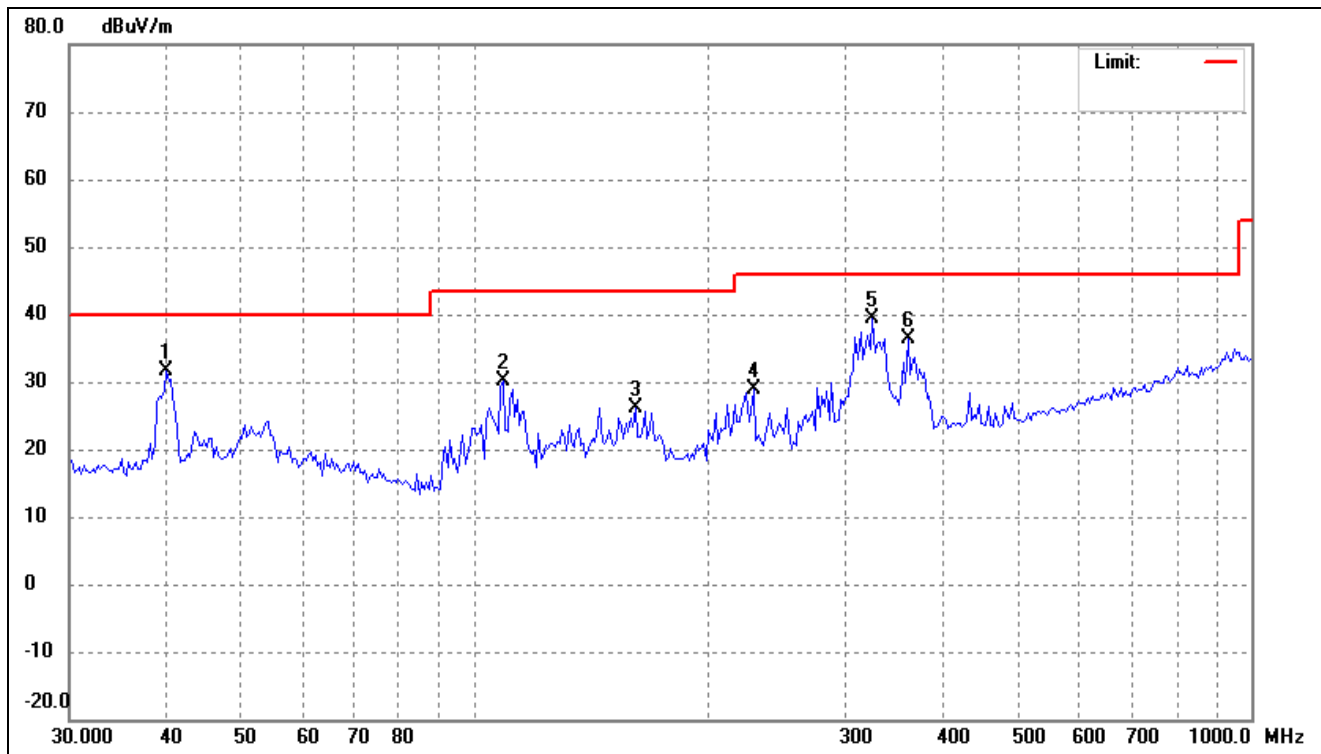

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	40.0173	39.62	-7.95	31.67	40.00	-8.33	-	-	peak
2	108.5455	41.46	-11.21	30.25	43.50	-13.25	-	-	peak
3	160.8852	34.19	-8.08	26.11	43.50	-17.39	-	-	peak
4	228.6173	39.91	-11.15	28.76	46.00	-17.24	-	-	peak
5	324.8645	46.70	-7.33	39.37	46.00	-6.63	-	-	peak
6	360.9775	43.15	-6.86	36.29	46.00	-9.71	-	-	peak


802.11a

Test Channel	5180MHz(Worst case)	Polarity:	Vertical
--------------	---------------------	-----------	----------

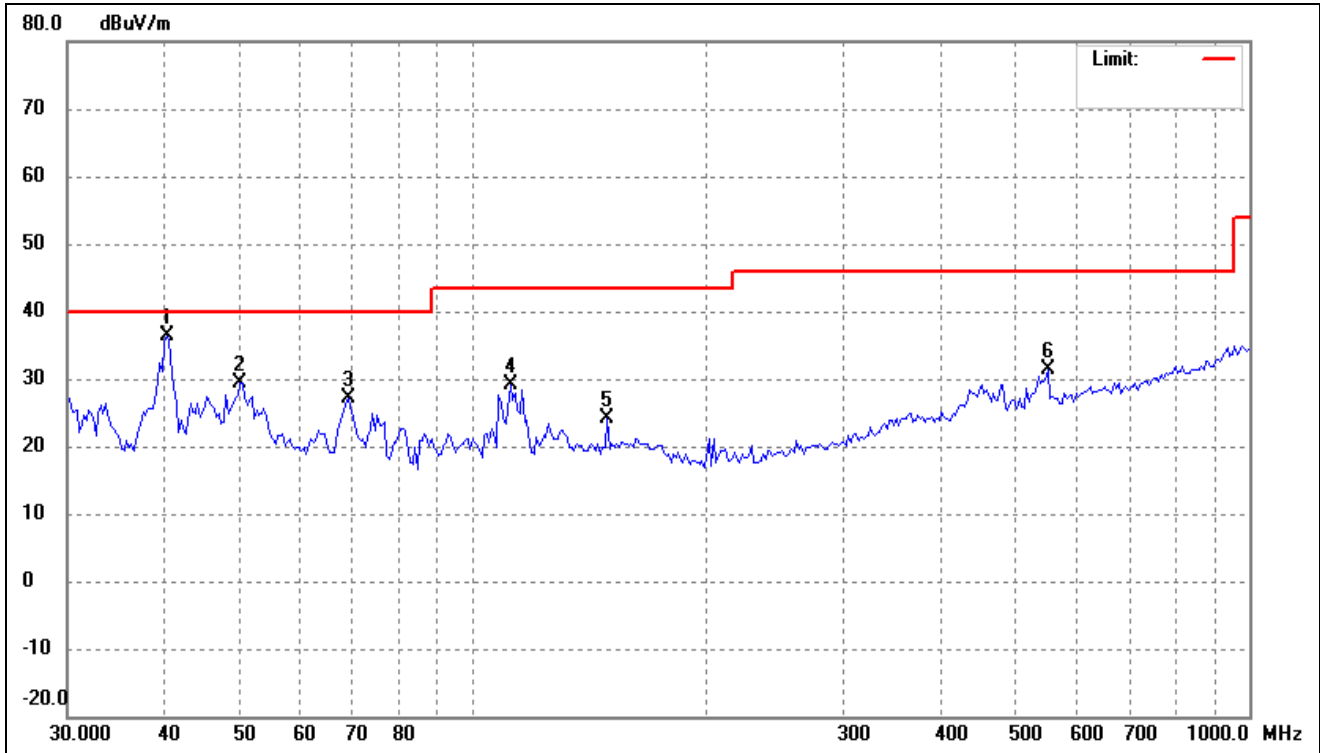


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	40.2995	44.30	-7.96	36.34	40.00	-3.66	-	-	peak
2	50.1080	37.08	-7.59	29.49	40.00	-10.51	-	-	peak
3	69.2297	37.20	-10.11	27.09	40.00	-12.91	-	-	peak
4	111.6399	40.12	-10.89	29.23	43.50	-14.27	-	-	peak
5	148.9175	32.18	-8.14	24.04	43.50	-19.46	-	-	peak
6	550.2902	34.80	-3.54	31.26	46.00	-14.74	-	-	peak

802.11n-HT20			
Test Channel	5180MHz(worst case)	Polarity:	Horizontal

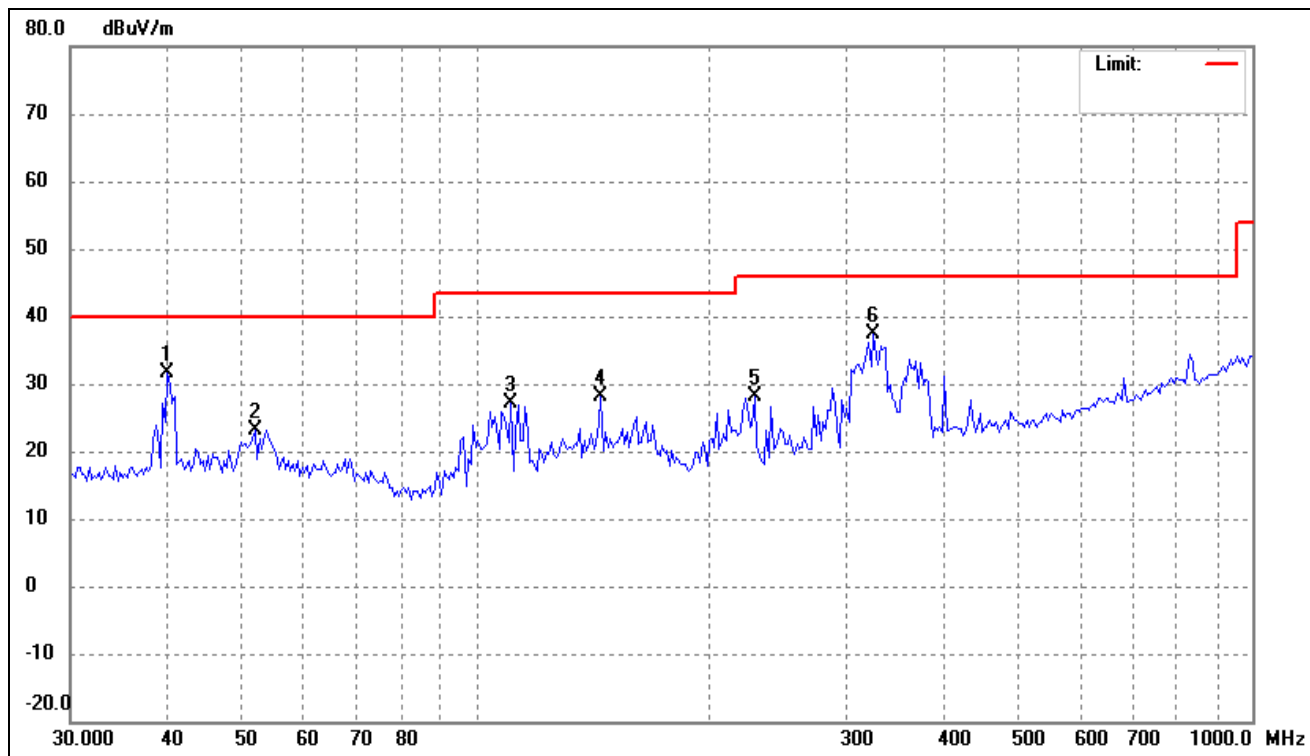


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	40.0173	39.68	-7.95	31.73	40.00	-8.27	-	-	peak
2	51.8998	30.81	-7.79	23.02	40.00	-16.98	-	-	peak
3	110.8581	38.00	-10.98	27.02	43.50	-16.48	-	-	peak
4	144.7899	36.50	-8.49	28.01	43.50	-15.49	-	-	peak
5	228.6173	39.22	-11.15	28.07	46.00	-17.93	-	-	peak
6	324.8645	44.59	-7.33	37.26	46.00	-8.74	-	-	peak

802.11n-HT20			
Test Channel	5180MHz(worst case)	Polarity:	Vertical

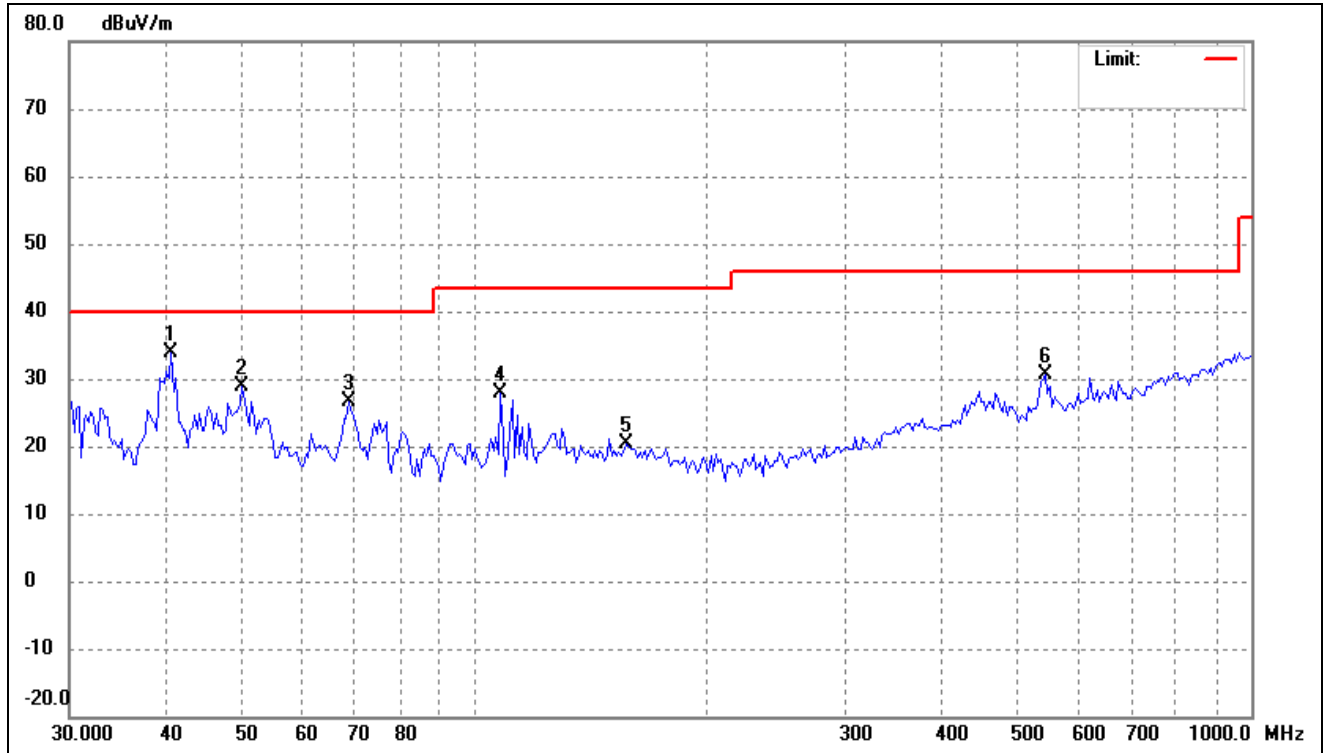


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	40.5837	41.76	-7.96	33.80	40.00	-6.20	-	-	peak
2	50.1080	36.55	-7.59	28.96	40.00	-11.04	-	-	peak
3	68.7450	36.58	-10.03	26.55	40.00	-13.45	-	-	peak
4	107.7854	39.23	-11.27	27.96	43.50	-15.54	-	-	peak
5	156.4259	28.52	-8.05	20.47	43.50	-23.03	-	-	peak
6	542.6104	34.29	-3.78	30.51	46.00	-15.49	-	-	peak

802.11ac-HT20			
Test Channel	5180MHz(worst case)	Polarity:	Horizontal

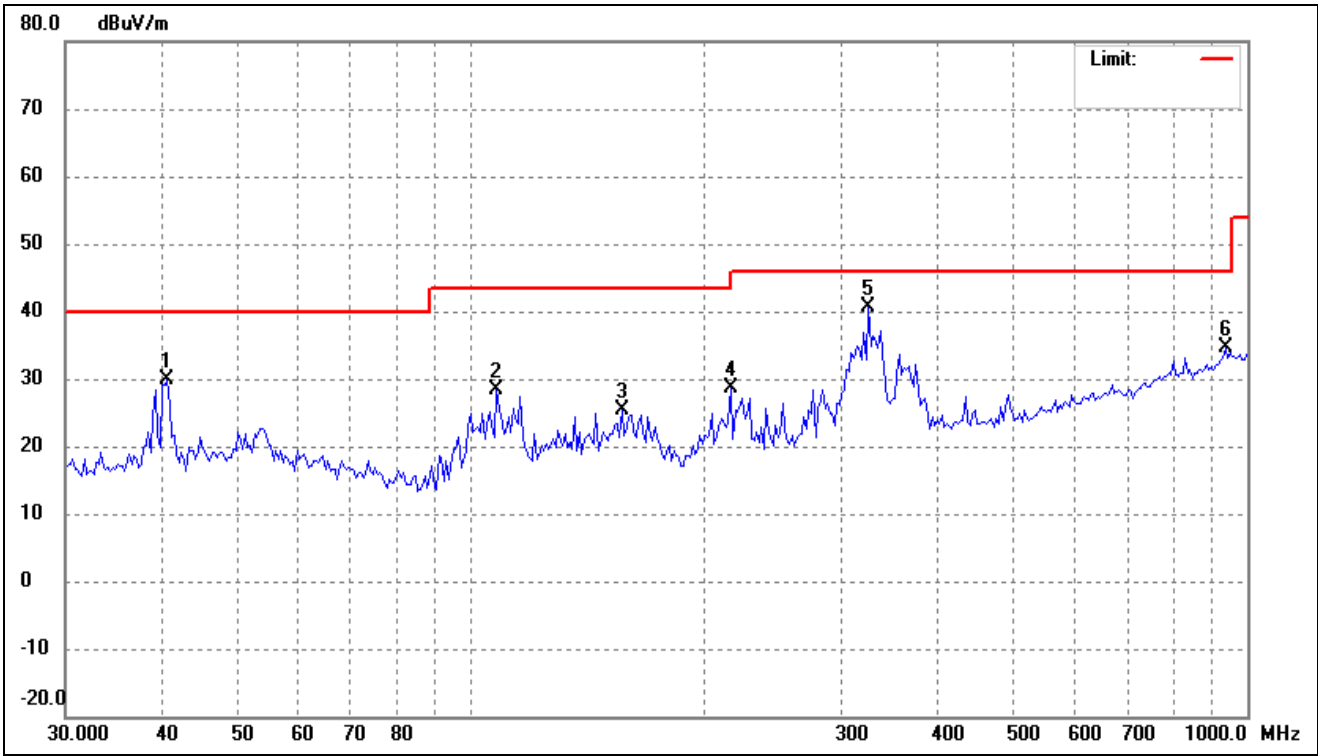


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	40.5837	37.83	-7.96	29.87	40.00	-10.13	-	-	peak
2	107.7854	39.72	-11.27	28.45	43.50	-15.05	-	-	peak
3	156.4259	33.44	-8.05	25.39	43.50	-18.11	-	-	peak
4	216.1197	40.09	-11.55	28.54	46.00	-17.46	-	-	peak
5	324.8645	48.01	-7.33	40.68	46.00	-5.32	-	-	peak
6	938.7139	31.66	3.03	34.69	46.00	-11.31	-	-	peak

802.11ac-HT20			
Test Channel	5180MHz(worst case)	Polarity:	Vertical

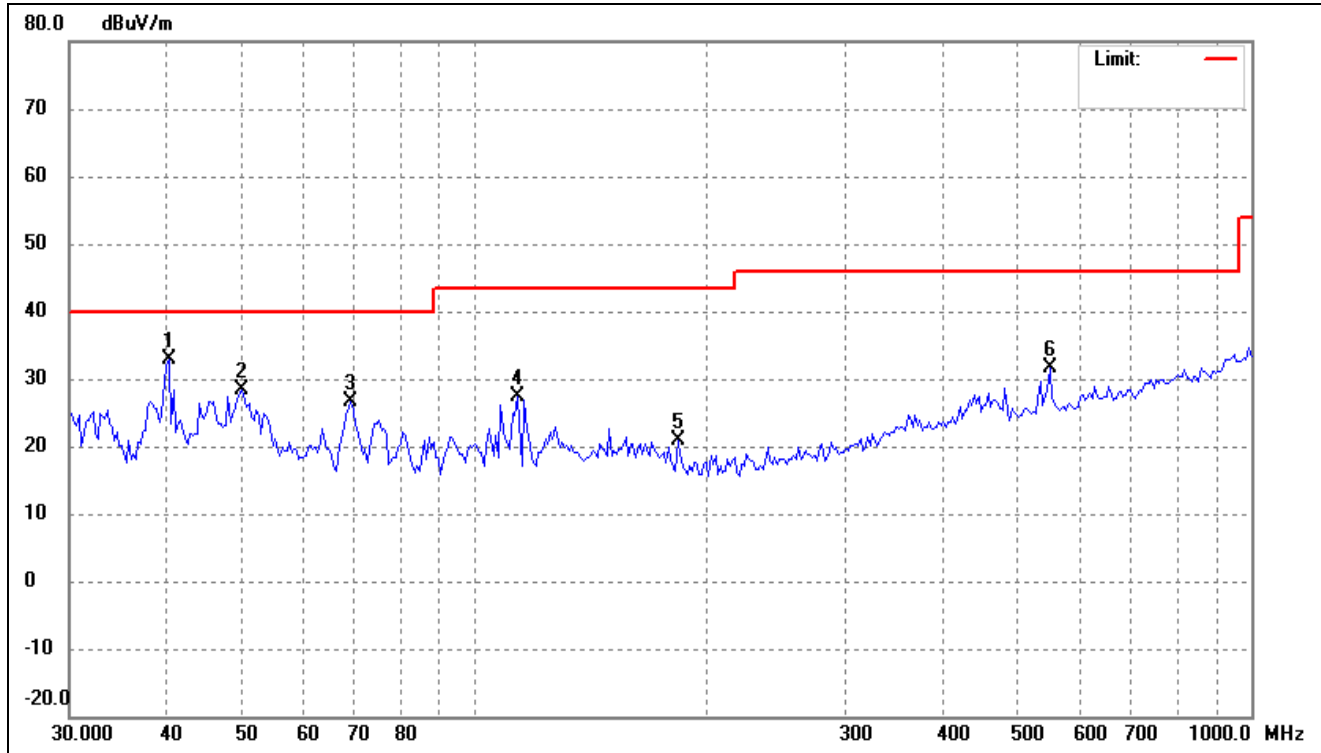


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	40.2995	40.85	-7.96	32.89	40.00	-7.11	-	-	peak
2	50.1080	35.88	-7.59	28.29	40.00	-11.71	-	-	peak
3	69.2297	36.73	-10.11	26.62	40.00	-13.38	-	-	peak
4	113.2200	38.05	-10.72	27.33	43.50	-16.17	-	-	peak
5	182.5785	30.99	-10.02	20.97	43.50	-22.53	-	-	peak
6	550.2902	35.16	-3.54	31.62	46.00	-14.38	-	-	peak

802.11ax-HE20			
Test Channel	5180MHz(worst case)	Polarity:	Horizontal

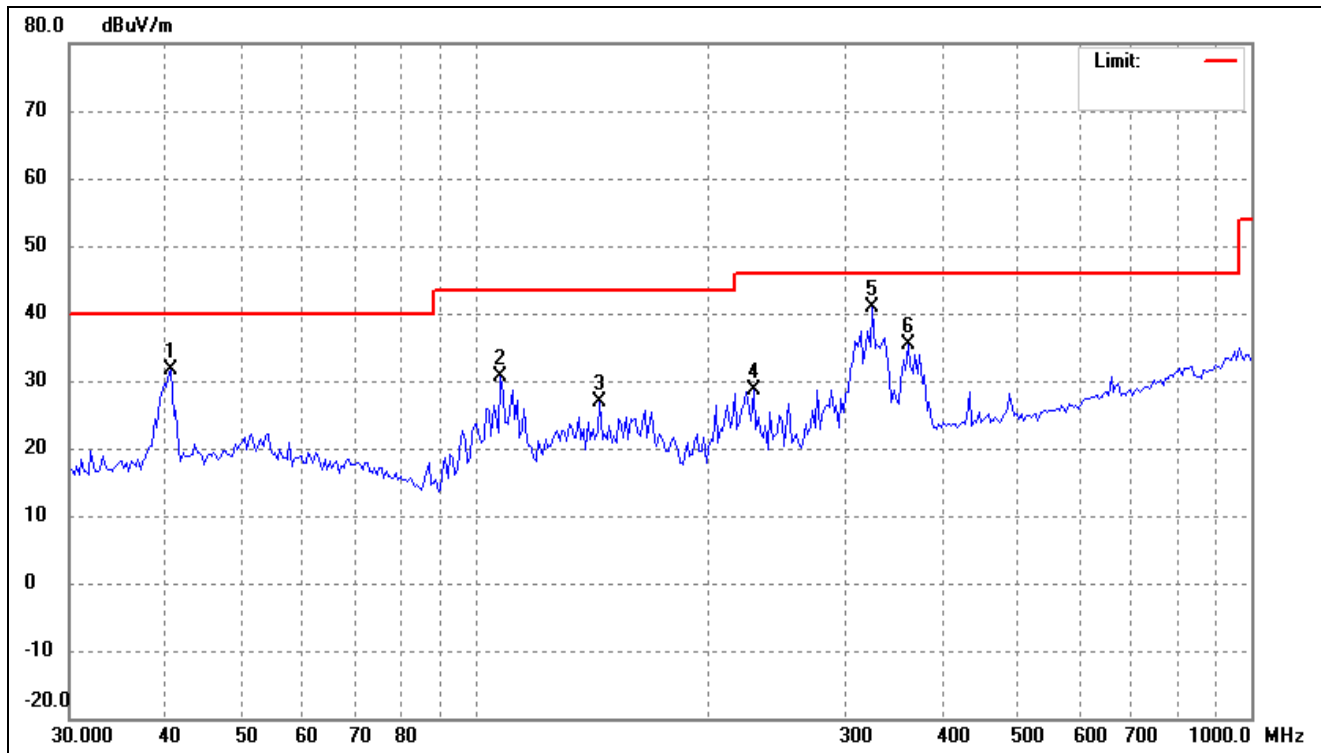


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	40.5837	39.64	-7.96	31.68	40.00	-8.32	-	-	peak
2	107.7854	41.94	-11.27	30.67	43.50	-12.83	-	-	peak
3	144.7899	35.32	-8.49	26.83	43.50	-16.67	-	-	peak
4	228.6173	39.78	-11.15	28.63	46.00	-17.37	-	-	peak
5	324.8645	48.27	-7.33	40.94	46.00	-5.06	-	-	peak
6	360.9775	42.13	-6.86	35.27	46.00	-10.73	-	-	peak

802.11ax-HE20			
Test Channel	5180MHz(worst case)	Polarity:	Vertical

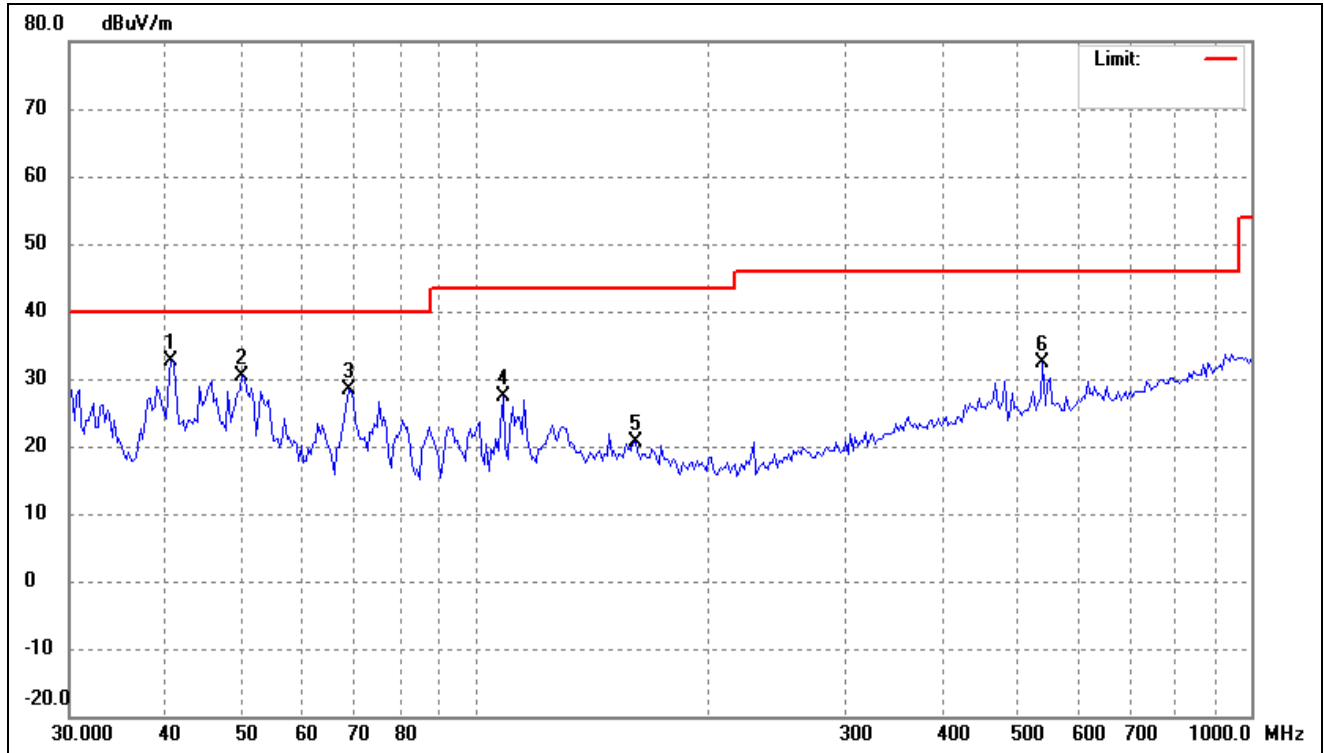

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	40.5837	40.50	-7.96	32.54	40.00	-7.46	-	-	peak
2	50.1080	38.07	-7.59	30.48	40.00	-9.52	-	-	peak
3	68.7450	38.35	-10.03	28.32	40.00	-11.68	-	-	peak
4	108.5455	38.71	-11.21	27.50	43.50	-16.00	-	-	peak
5	160.8852	28.63	-8.08	20.55	43.50	-22.95	-	-	peak
6	538.8107	36.18	-3.90	32.28	46.00	-13.72	-	-	peak

802.11n-HT40			
Test Channel	5190MHz(worst case)	Polarity:	Horizontal

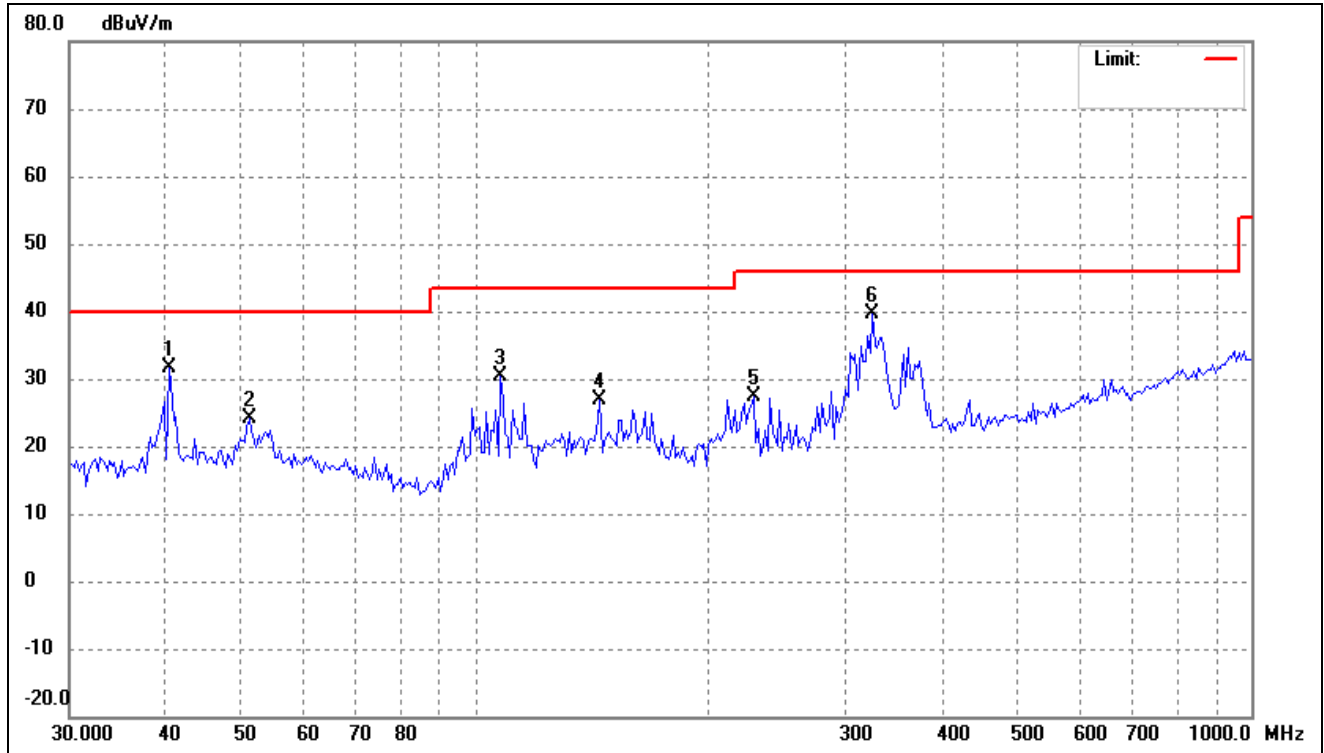

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	40.2995	39.49	-7.96	31.53	40.00	-8.47	-	-	peak
2	51.1756	31.73	-7.72	24.01	40.00	-15.99	-	-	peak
3	107.7854	41.55	-11.27	30.28	43.50	-13.22	-	-	peak
4	144.7899	35.27	-8.49	26.78	43.50	-16.72	-	-	peak
5	228.6173	38.51	-11.15	27.36	46.00	-18.64	-	-	peak
6	324.8645	47.02	-7.33	39.69	46.00	-6.31	-	-	peak

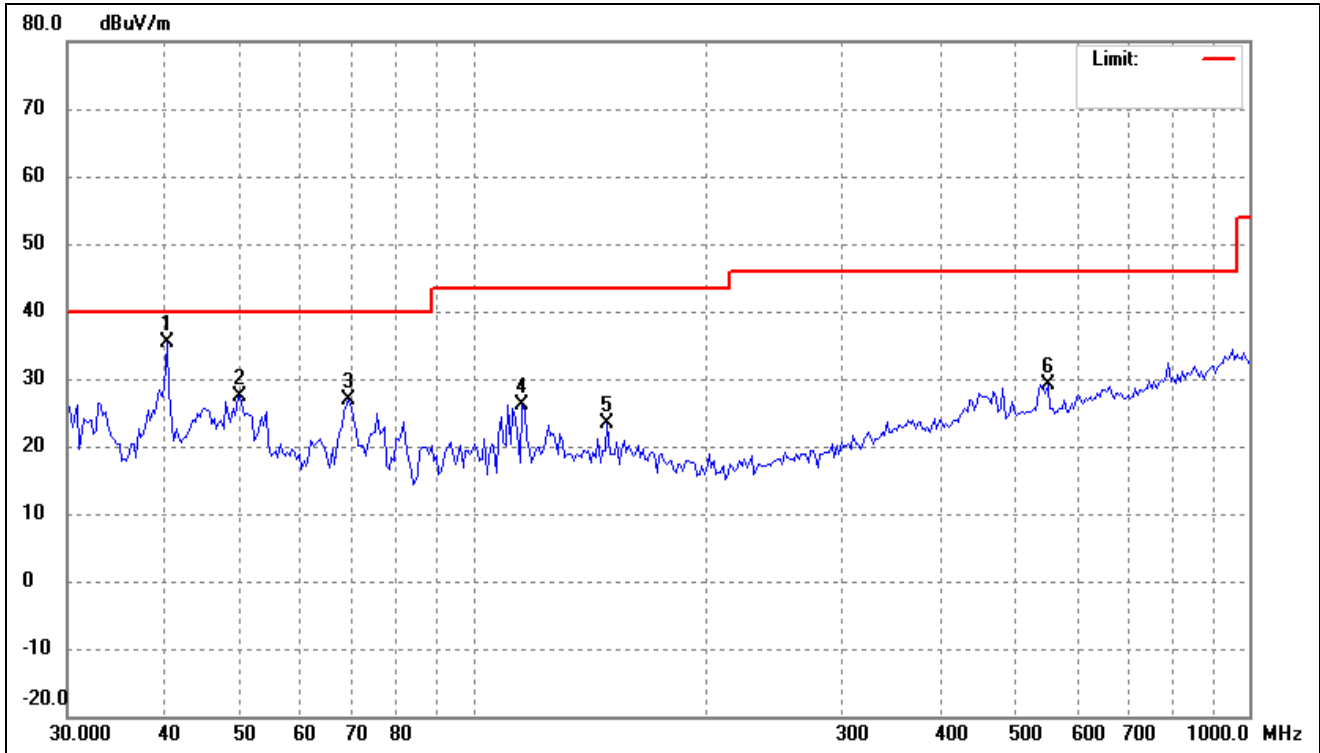
802.11n-HT40

Test Channel

5190MHz(worst case)


Polarity:

Vertical




No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	40.2995	43.40	-7.96	35.44	40.00	-4.56	-	-	peak
2	50.1080	35.07	-7.59	27.48	40.00	-12.52	-	-	peak
3	69.2297	37.03	-10.11	26.92	40.00	-13.08	-	-	peak
4	115.6322	36.66	-10.47	26.19	43.50	-17.31	-	-	peak
5	148.9175	31.40	-8.14	23.26	43.50	-20.24	-	-	peak
6	550.2902	32.79	-3.54	29.25	46.00	-16.75	-	-	peak

802.11ac-HT40			
Test Channel	5190MHz(worst case)	Polarity:	Horizontal

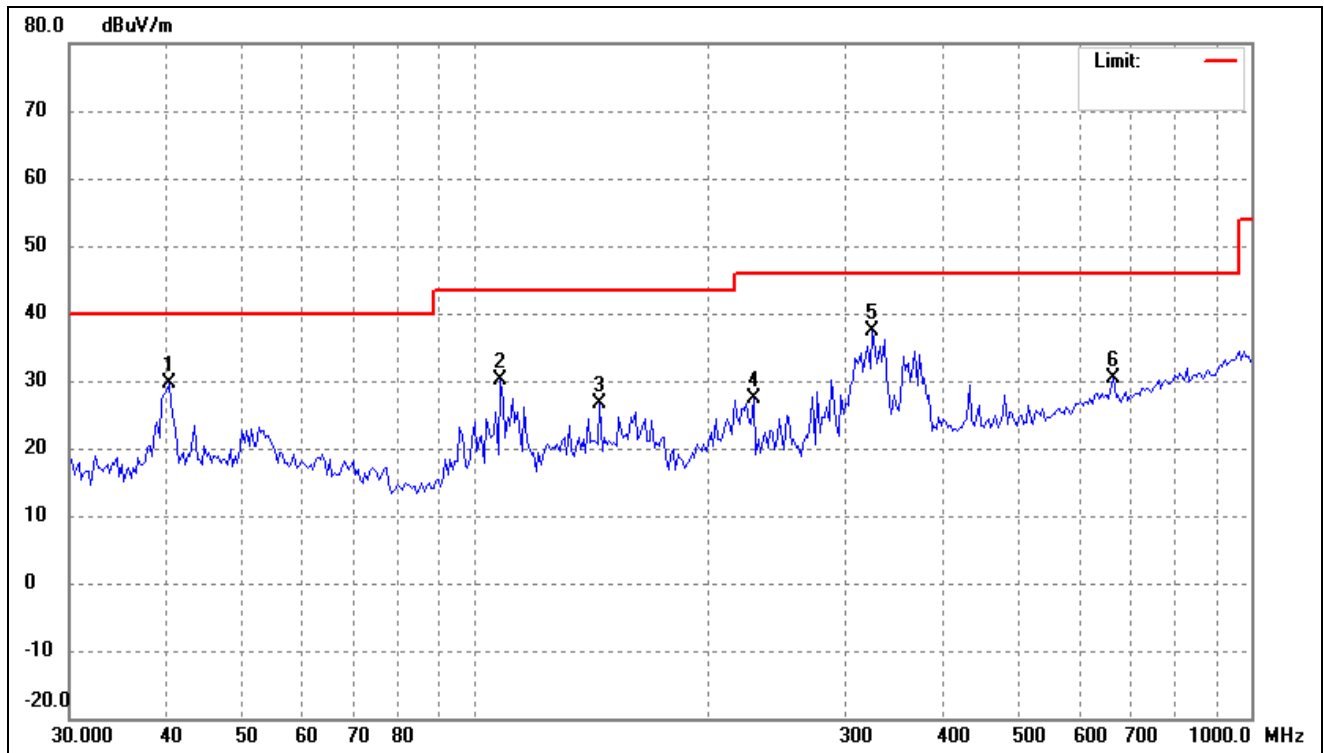


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	40.2995	37.62	-7.96	29.66	40.00	-10.34	-	-	peak
2	107.7854	41.47	-11.27	30.20	43.50	-13.30	-	-	peak
3	144.7899	35.00	-8.49	26.51	43.50	-16.99	-	-	peak
4	228.6173	38.41	-11.15	27.26	46.00	-18.74	-	-	peak
5	324.8645	44.82	-7.33	37.49	46.00	-8.51	-	-	peak
6	665.2610	31.80	-1.45	30.35	46.00	-15.65	-	-	peak

802.11ac-HT40			
Test Channel	5190MHz(worst case)	Polarity:	Vertical

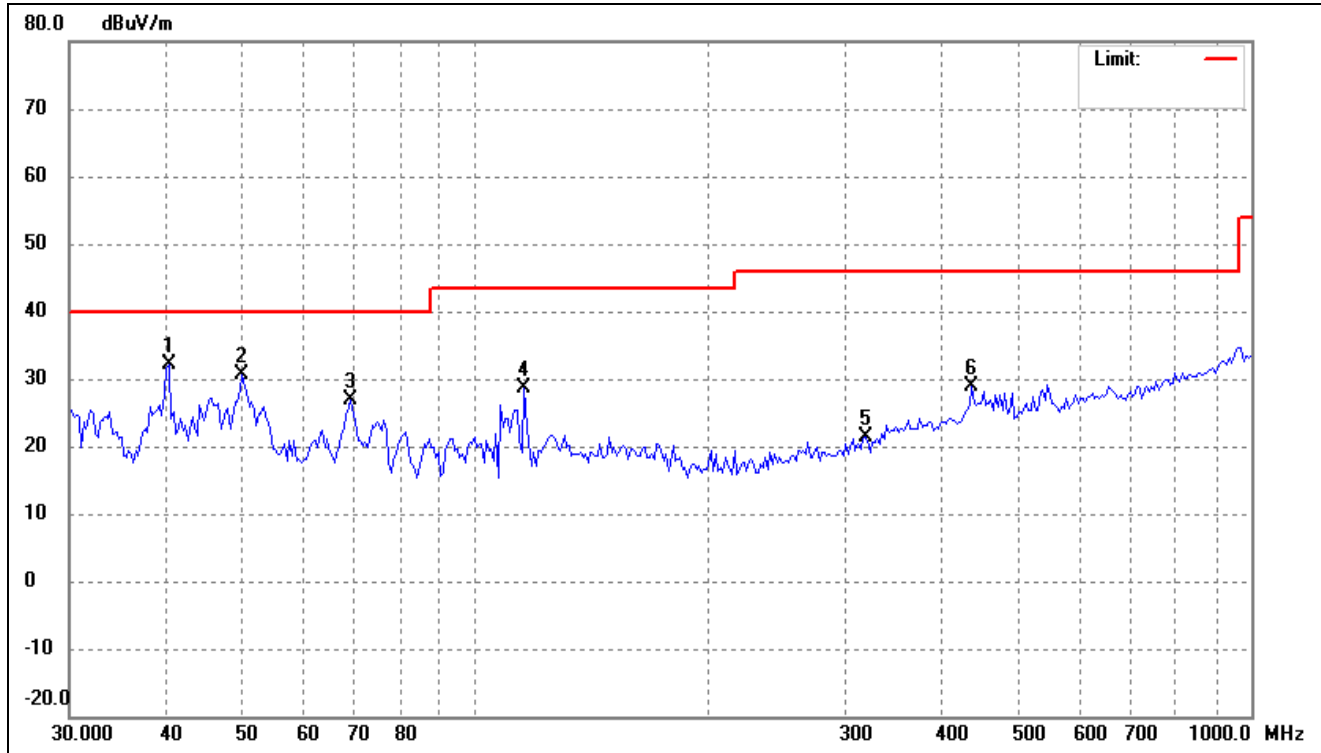


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	40.2995	40.20	-7.96	32.24	40.00	-7.76	-	-	peak
2	50.1080	38.21	-7.59	30.62	40.00	-9.38	-	-	peak
3	69.2297	36.93	-10.11	26.82	40.00	-13.18	-	-	peak
4	115.6322	39.03	-10.47	28.56	43.50	-14.94	-	-	peak
5	318.0875	28.84	-7.47	21.37	46.00	-24.63	-	-	peak
6	436.3956	34.38	-5.47	28.91	46.00	-17.09	-	-	peak

802.11ax-HE40			
Test Channel	5190MHz(worst case)	Polarity:	Horizontal

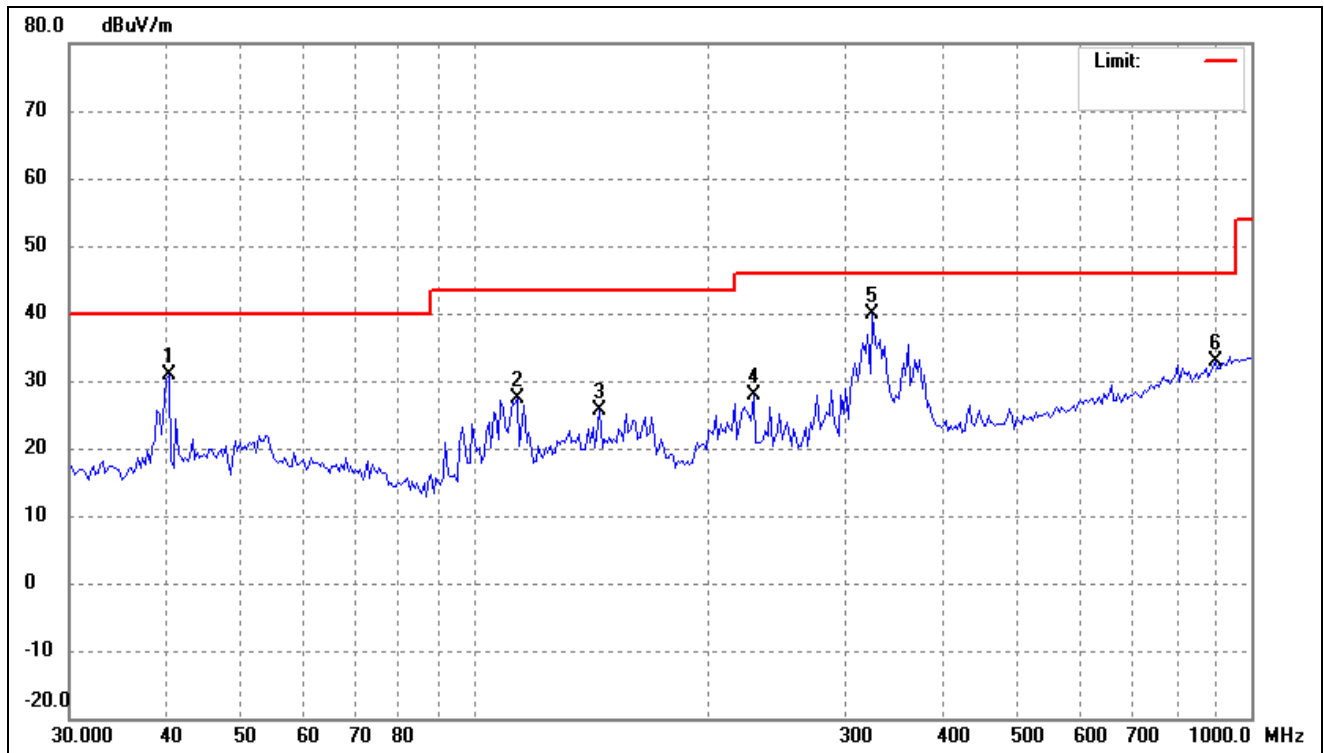

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	40.2995	38.80	-7.96	30.84	40.00	-9.16	-	-	peak
2	113.2200	38.08	-10.72	27.36	43.50	-16.14	-	-	peak
3	144.7899	34.17	-8.49	25.68	43.50	-17.82	-	-	peak
4	228.6173	39.07	-11.15	27.92	46.00	-18.08	-	-	peak
5	324.8645	47.24	-7.33	39.91	46.00	-6.09	-	-	peak
6	899.9577	30.69	2.09	32.78	46.00	-13.22	-	-	peak


802.11ax-HE40			
Test Channel	5190MHz(worst case)	Polarity:	Vertical

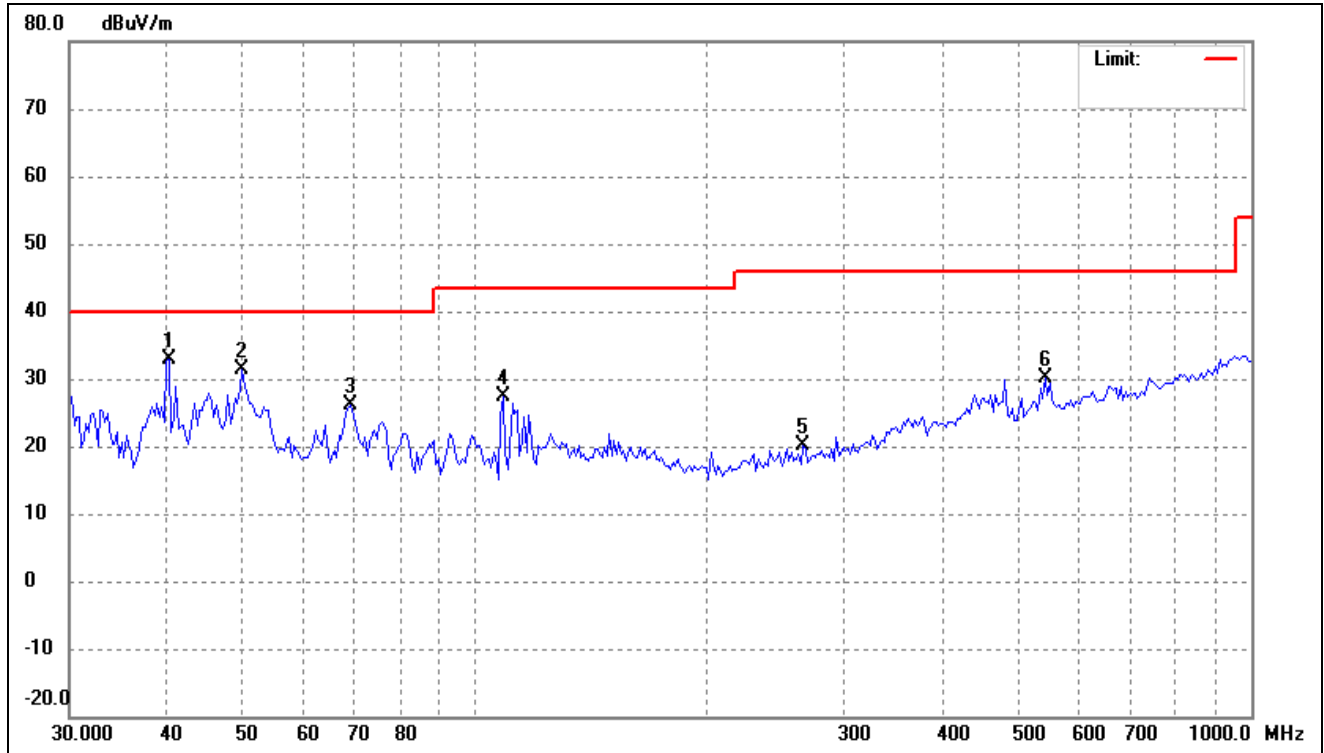

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	40.2995	40.80	-7.96	32.84	40.00	-7.16	-	-	peak
2	50.1080	39.05	-7.59	31.46	40.00	-8.54	-	-	peak
3	69.2297	36.29	-10.11	26.18	40.00	-13.82	-	-	peak
4	108.5455	38.58	-11.21	27.37	43.50	-16.13	-	-	peak
5	264.9709	29.29	-9.08	20.21	46.00	-25.79	-	-	peak
6	542.6104	33.87	-3.78	30.09	46.00	-15.91	-	-	peak

➤ 5725-5850MHz


802.11a			
Test Channel	5745MHz(worst case)	Polarity:	Horizontal

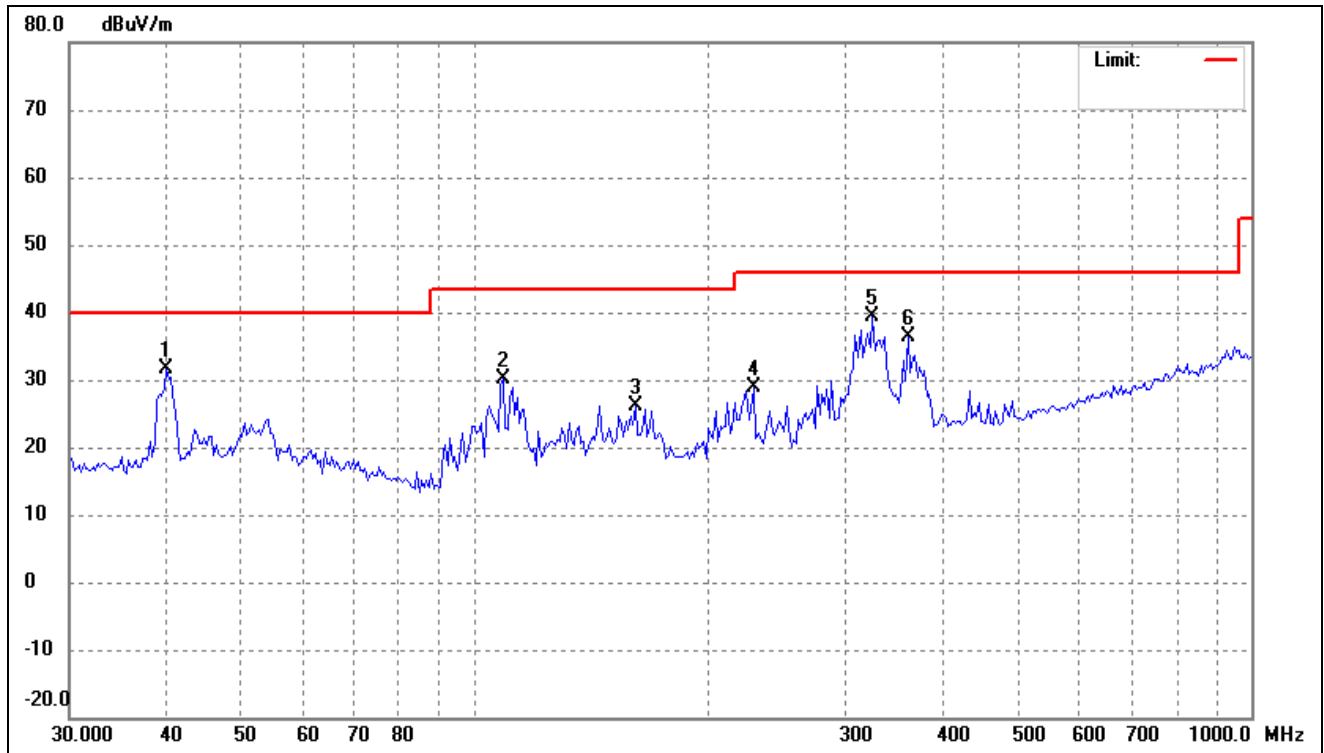

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	40.0173	39.62	-7.95	31.67	40.00	-8.33	-	-	peak
2	108.5455	41.46	-11.21	30.25	43.50	-13.25	-	-	peak
3	160.8852	34.19	-8.08	26.11	43.50	-17.39	-	-	peak
4	228.6173	39.91	-11.15	28.76	46.00	-17.24	-	-	peak
5	324.8645	46.70	-7.33	39.37	46.00	-6.63	-	-	peak
6	360.9775	43.15	-6.86	36.29	46.00	-9.71	-	-	peak


802.11a

Test Channel	5745MHz(worst case)	Polarity:	Vertical
--------------	---------------------	-----------	----------

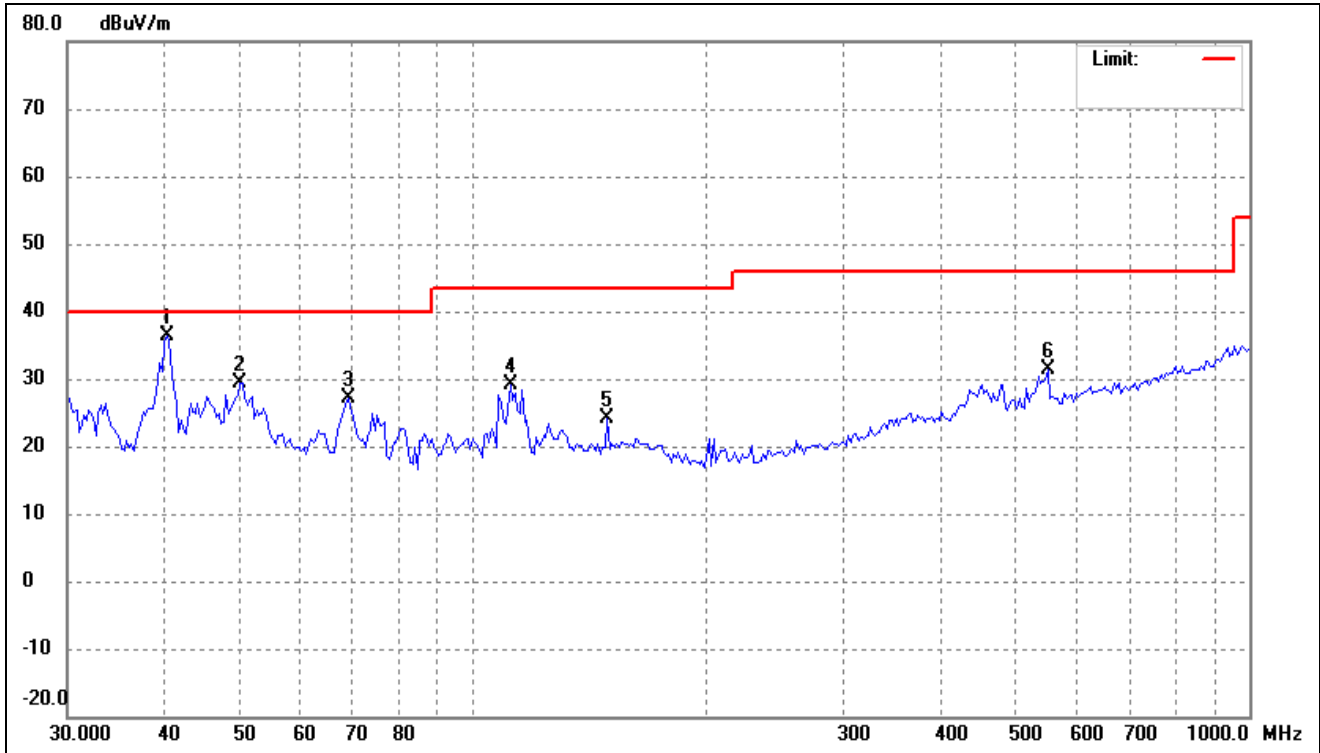

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	40.2995	44.30	-7.96	36.34	40.00	-3.66	-	-	peak
2	50.1080	37.08	-7.59	29.49	40.00	-10.51	-	-	peak
3	69.2297	37.20	-10.11	27.09	40.00	-12.91	-	-	peak
4	111.6399	40.12	-10.89	29.23	43.50	-14.27	-	-	peak
5	148.9175	32.18	-8.14	24.04	43.50	-19.46	-	-	peak
6	550.2902	34.80	-3.54	31.26	46.00	-14.74	-	-	peak

802.11n-HT20			
Test Channel	5745MHz(worst case)	Polarity:	Horizontal

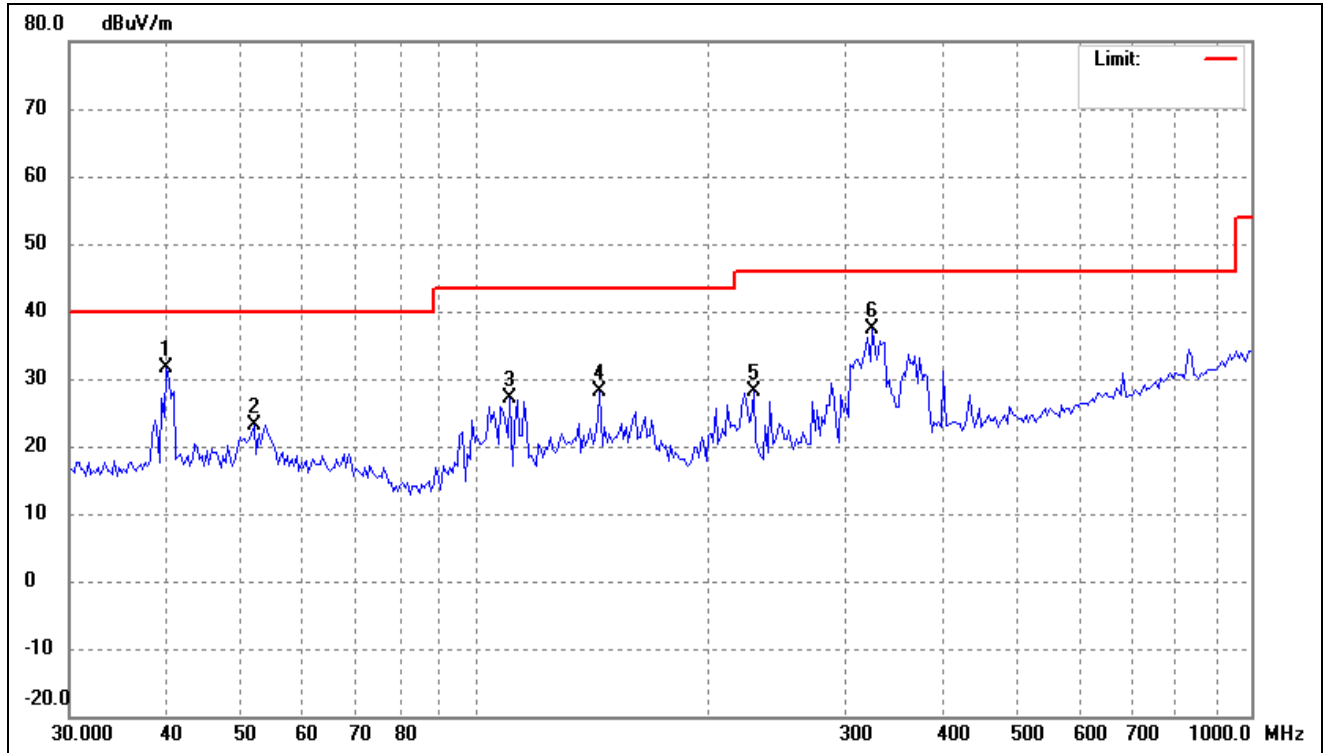

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	40.0173	39.68	-7.95	31.73	40.00	-8.27	-	-	peak
2	51.8998	30.81	-7.79	23.02	40.00	-16.98	-	-	peak
3	110.8581	38.00	-10.98	27.02	43.50	-16.48	-	-	peak
4	144.7899	36.50	-8.49	28.01	43.50	-15.49	-	-	peak
5	228.6173	39.22	-11.15	28.07	46.00	-17.93	-	-	peak
6	324.8645	44.59	-7.33	37.26	46.00	-8.74	-	-	peak

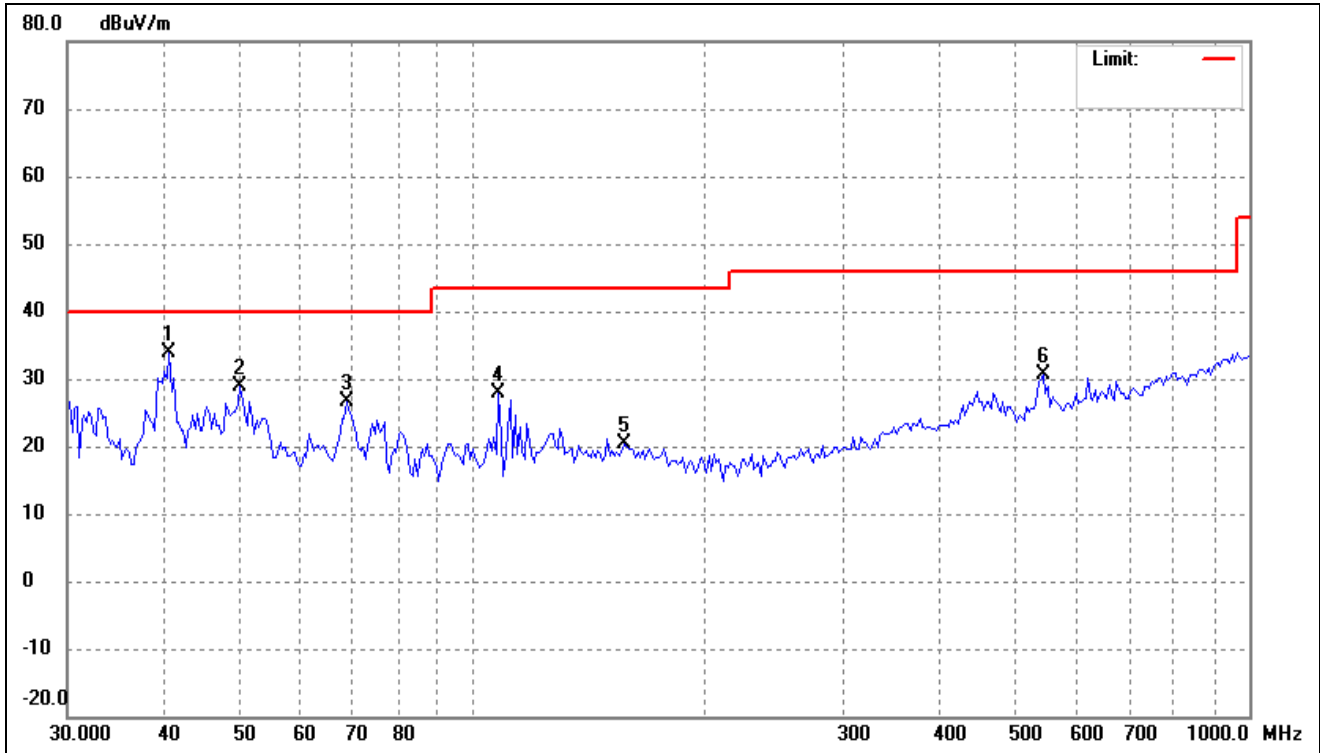
802.11n-HT20

Test Channel

5745MHz(worst case)


Polarity:

Vertical




No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	40.5837	41.76	-7.96	33.80	40.00	-6.20	-	-	peak
2	50.1080	36.55	-7.59	28.96	40.00	-11.04	-	-	peak
3	68.7450	36.58	-10.03	26.55	40.00	-13.45	-	-	peak
4	107.7854	39.23	-11.27	27.96	43.50	-15.54	-	-	peak
5	156.4259	28.52	-8.05	20.47	43.50	-23.03	-	-	peak
6	542.6104	34.29	-3.78	30.51	46.00	-15.49	-	-	peak

802.11ac-HT20			
Test Channel	5745MHz(worst case)	Polarity:	Horizontal

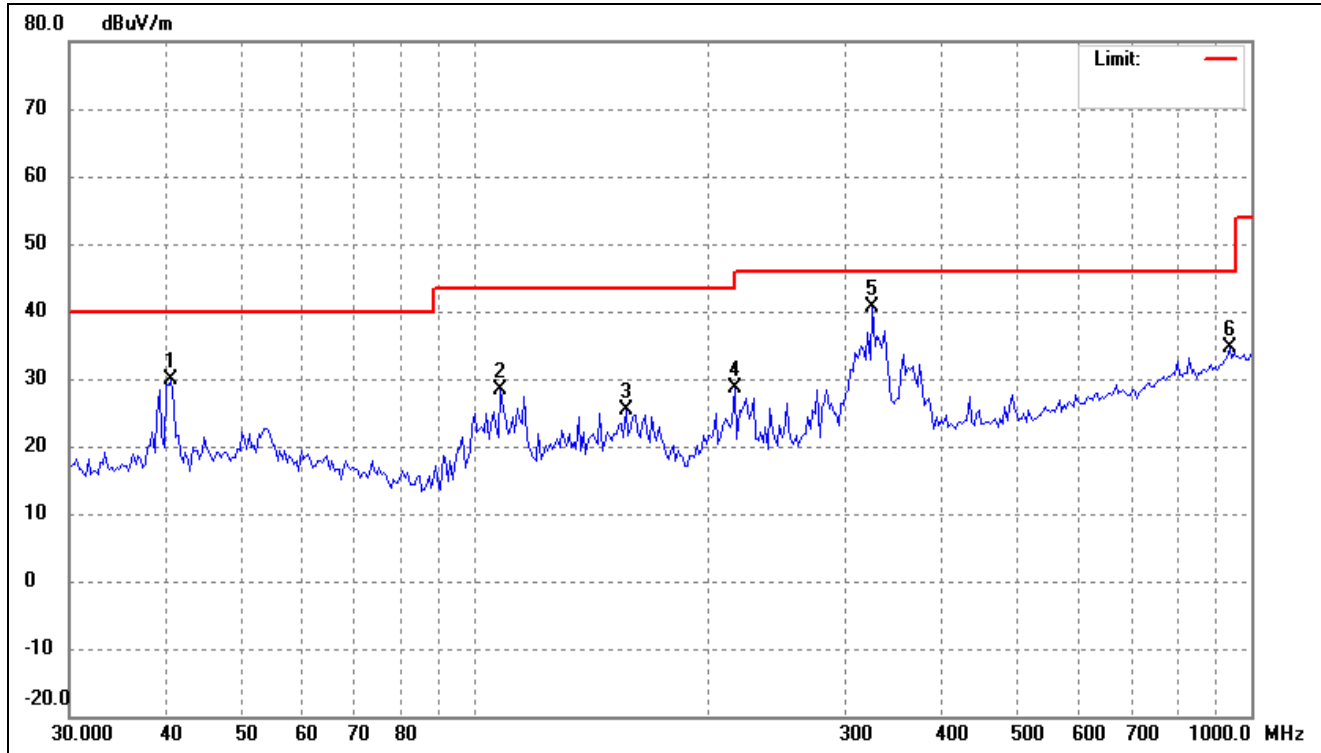


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	40.5837	37.83	-7.96	29.87	40.00	-10.13	-	-	peak
2	107.7854	39.72	-11.27	28.45	43.50	-15.05	-	-	peak
3	156.4259	33.44	-8.05	25.39	43.50	-18.11	-	-	peak
4	216.1197	40.09	-11.55	28.54	46.00	-17.46	-	-	peak
5	324.8645	48.01	-7.33	40.68	46.00	-5.32	-	-	peak
6	938.7139	31.66	3.03	34.69	46.00	-11.31	-	-	peak

802.11ac-HT20			
Test Channel	5745MHz(worst case)	Polarity:	Vertical

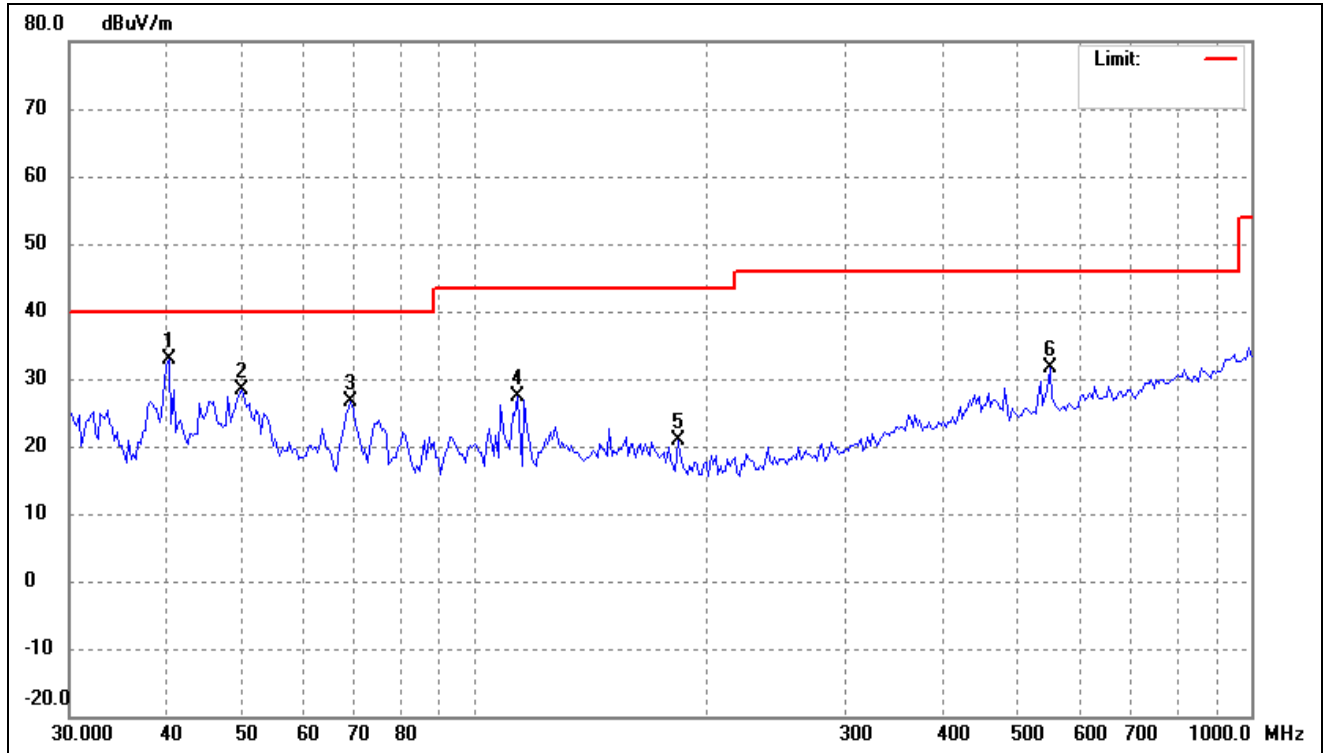


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	40.2995	40.85	-7.96	32.89	40.00	-7.11	-	-	peak
2	50.1080	35.88	-7.59	28.29	40.00	-11.71	-	-	peak
3	69.2297	36.73	-10.11	26.62	40.00	-13.38	-	-	peak
4	113.2200	38.05	-10.72	27.33	43.50	-16.17	-	-	peak
5	182.5785	30.99	-10.02	20.97	43.50	-22.53	-	-	peak
6	550.2902	35.16	-3.54	31.62	46.00	-14.38	-	-	peak

802.11ax-HE20			
Test Channel	5745MHz(worst case)	Polarity:	Horizontal

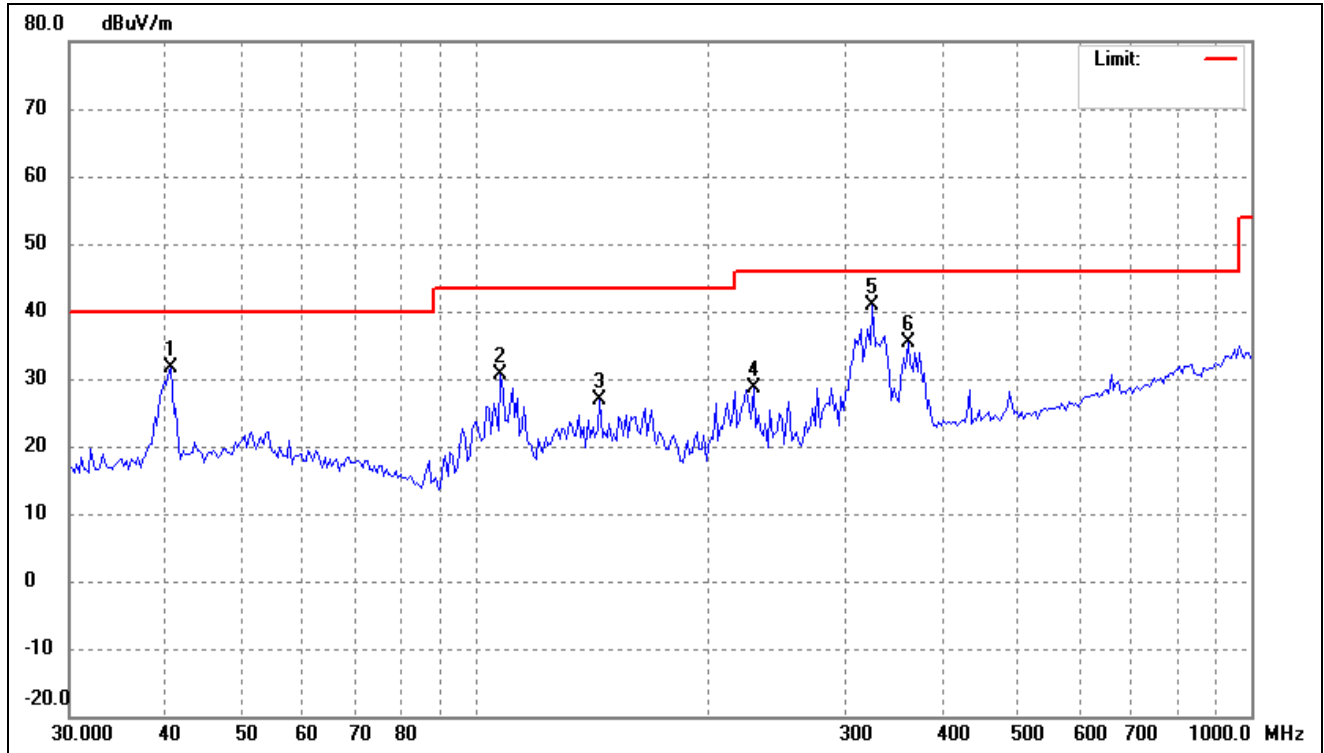


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	40.5837	39.64	-7.96	31.68	40.00	-8.32	-	-	peak
2	107.7854	41.94	-11.27	30.67	43.50	-12.83	-	-	peak
3	144.7899	35.32	-8.49	26.83	43.50	-16.67	-	-	peak
4	228.6173	39.78	-11.15	28.63	46.00	-17.37	-	-	peak
5	324.8645	48.27	-7.33	40.94	46.00	-5.06	-	-	peak
6	360.9775	42.13	-6.86	35.27	46.00	-10.73	-	-	peak

802.11ax-HE20			
Test Channel	5745MHz(worst case)	Polarity:	Vertical

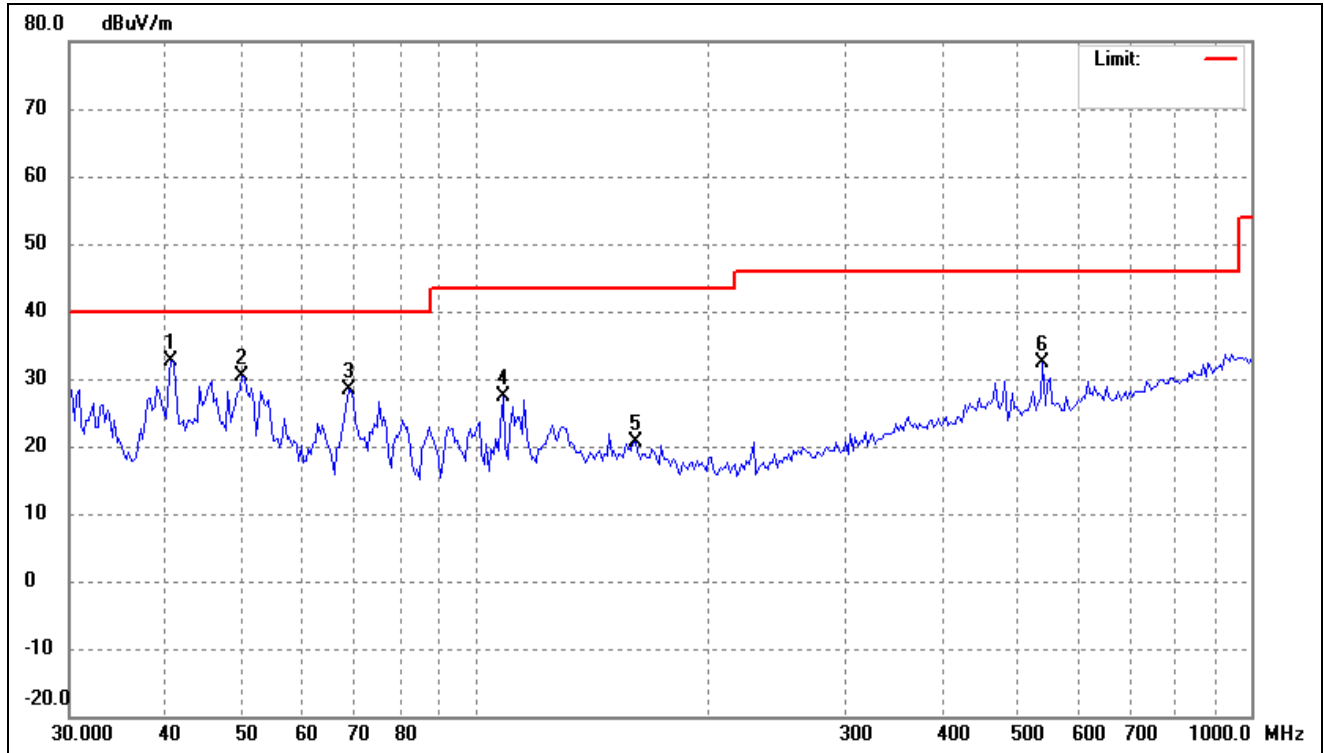


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	40.5837	40.50	-7.96	32.54	40.00	-7.46	-	-	peak
2	50.1080	38.07	-7.59	30.48	40.00	-9.52	-	-	peak
3	68.7450	38.35	-10.03	28.32	40.00	-11.68	-	-	peak
4	108.5455	38.71	-11.21	27.50	43.50	-16.00	-	-	peak
5	160.8852	28.63	-8.08	20.55	43.50	-22.95	-	-	peak
6	538.8107	36.18	-3.90	32.28	46.00	-13.72	-	-	peak

802.11n-HT40			
Test Channel	5755MHz(worst case)	Polarity:	Horizontal

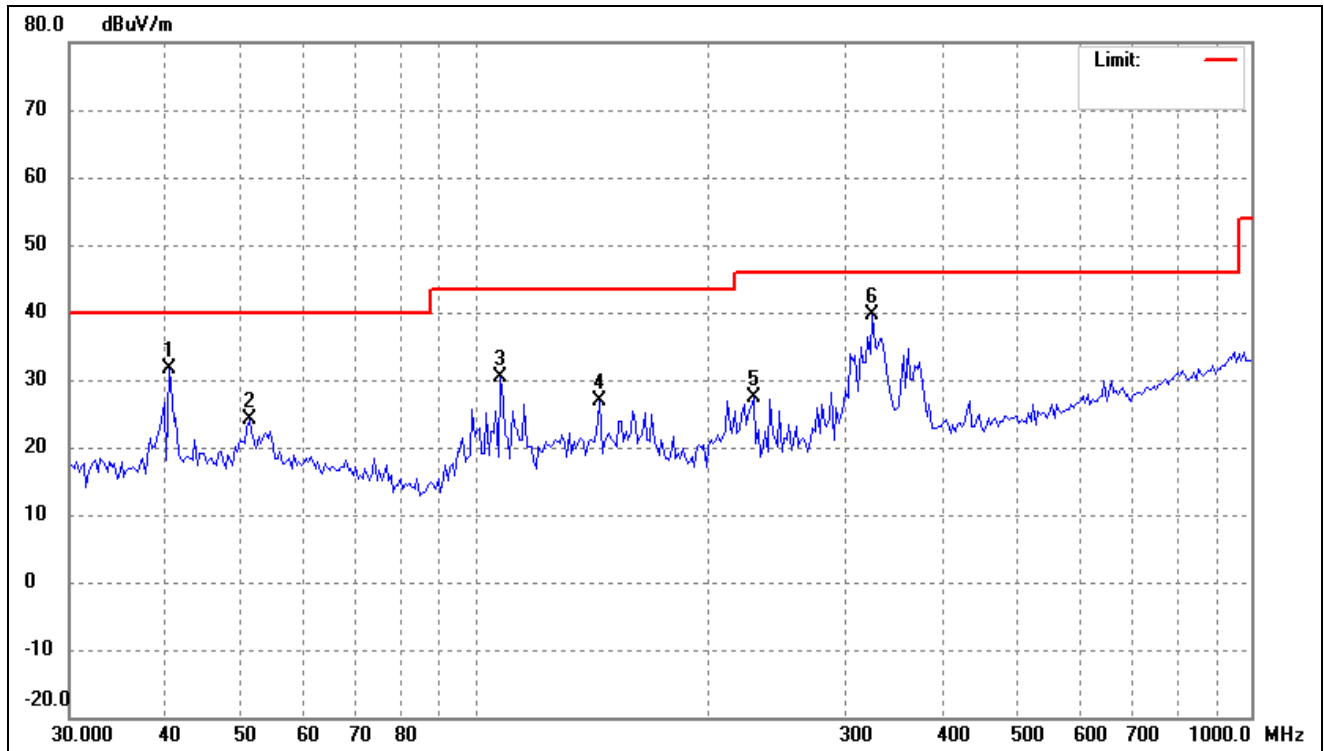


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	40.2995	39.49	-7.96	31.53	40.00	-8.47	-	-	peak
2	51.1756	31.73	-7.72	24.01	40.00	-15.99	-	-	peak
3	107.7854	41.55	-11.27	30.28	43.50	-13.22	-	-	peak
4	144.7899	35.27	-8.49	26.78	43.50	-16.72	-	-	peak
5	228.6173	38.51	-11.15	27.36	46.00	-18.64	-	-	peak
6	324.8645	47.02	-7.33	39.69	46.00	-6.31	-	-	peak

802.11n-HT40			
Test Channel	5755MHz(worst case)	Polarity:	Vertical

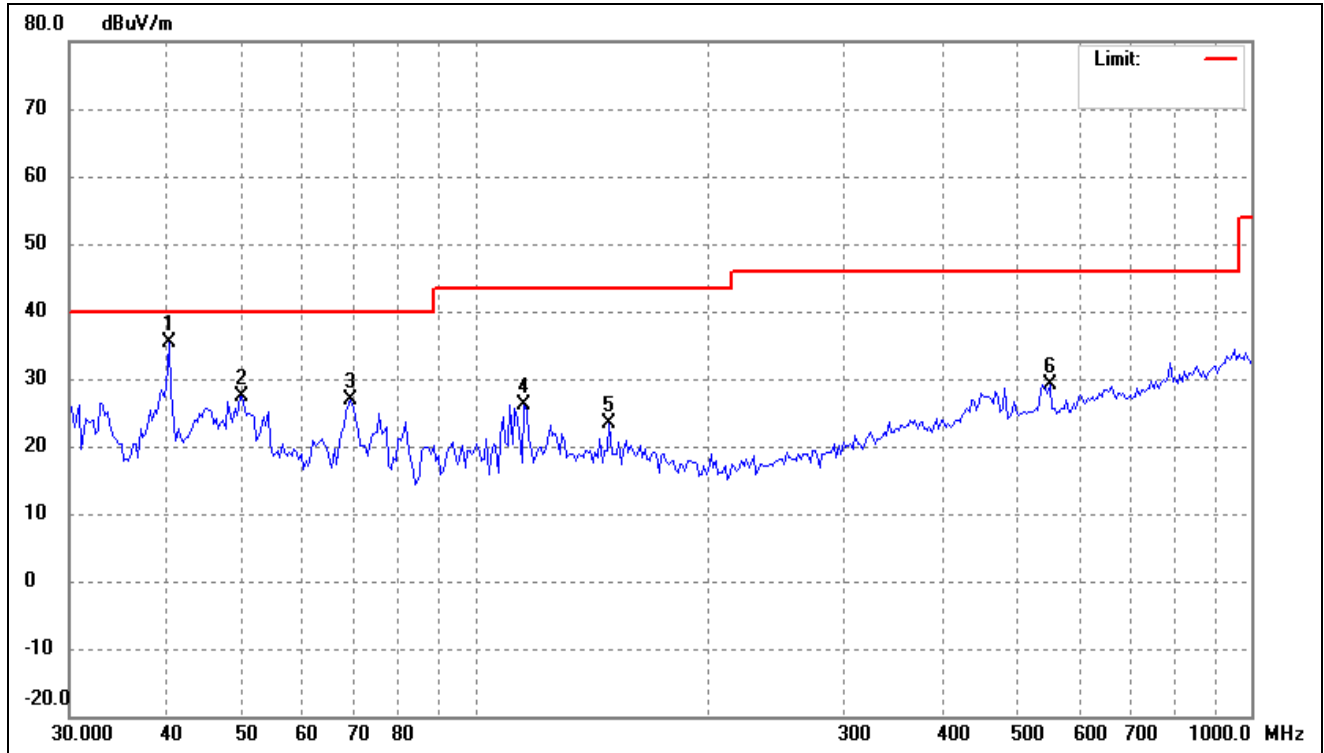


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	40.2995	43.40	-7.96	35.44	40.00	-4.56	-	-	peak
2	50.1080	35.07	-7.59	27.48	40.00	-12.52	-	-	peak
3	69.2297	37.03	-10.11	26.92	40.00	-13.08	-	-	peak
4	115.6322	36.66	-10.47	26.19	43.50	-17.31	-	-	peak
5	148.9175	31.40	-8.14	23.26	43.50	-20.24	-	-	peak
6	550.2902	32.79	-3.54	29.25	46.00	-16.75	-	-	peak

802.11ac-HT40			
Test Channel	5755MHz(worst case)	Polarity:	Horizontal

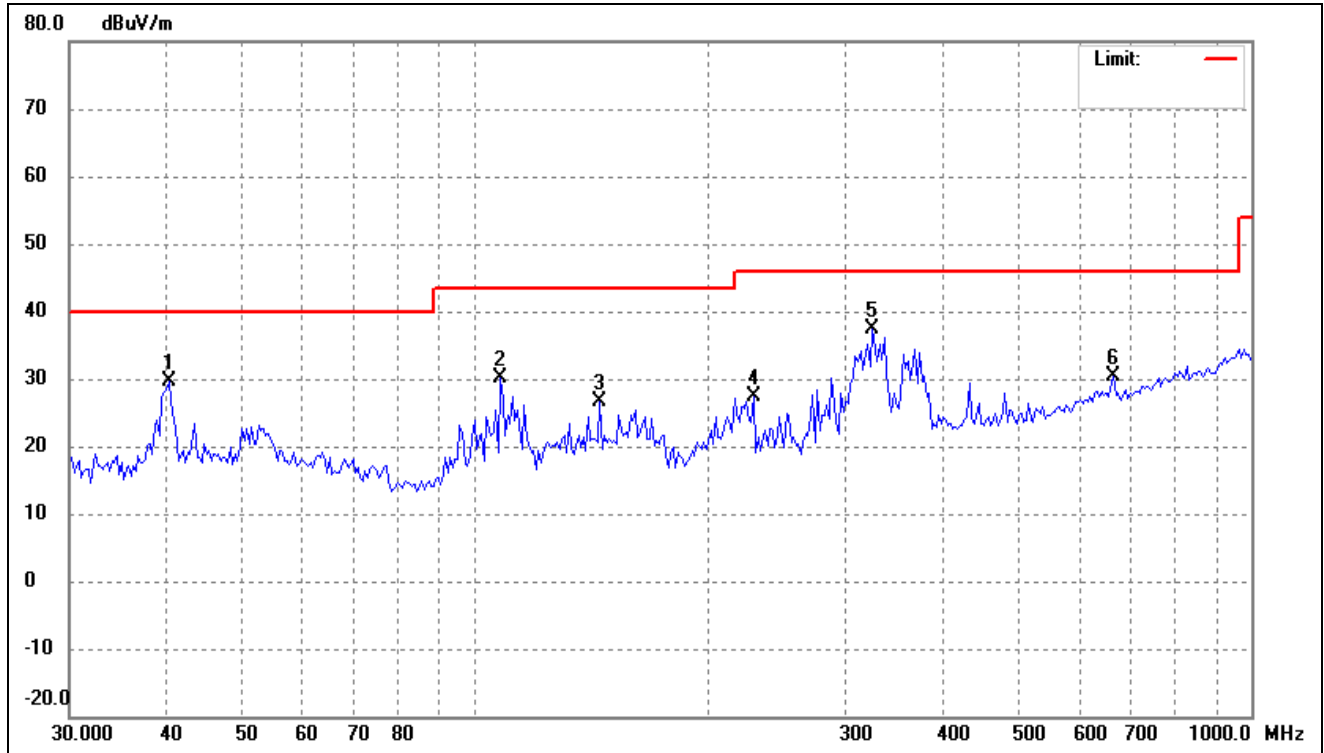


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	40.2995	37.62	-7.96	29.66	40.00	-10.34	-	-	peak
2	107.7854	41.47	-11.27	30.20	43.50	-13.30	-	-	peak
3	144.7899	35.00	-8.49	26.51	43.50	-16.99	-	-	peak
4	228.6173	38.41	-11.15	27.26	46.00	-18.74	-	-	peak
5	324.8645	44.82	-7.33	37.49	46.00	-8.51	-	-	peak
6	665.2610	31.80	-1.45	30.35	46.00	-15.65	-	-	peak

802.11ac-HT40			
Test Channel	5755MHz(worst case)	Polarity:	Vertical

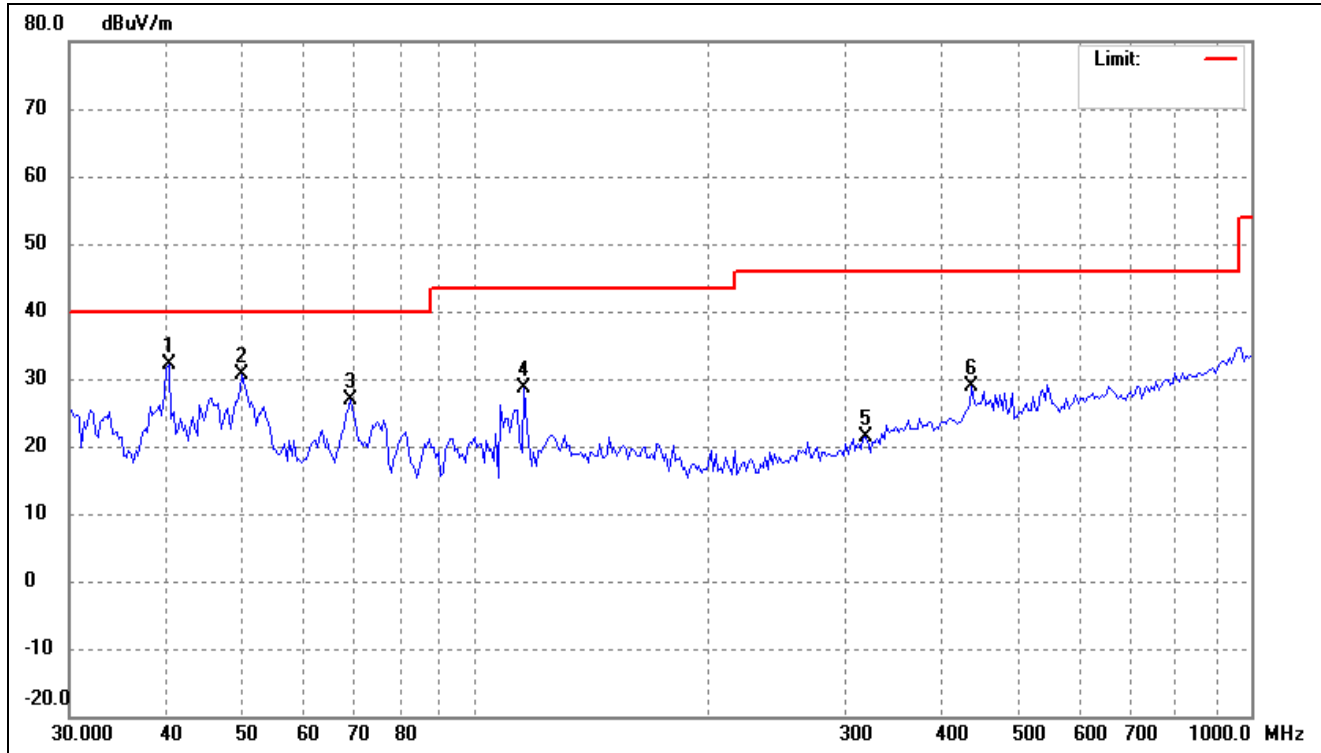


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	40.2995	40.20	-7.96	32.24	40.00	-7.76	-	-	peak
2	50.1080	38.21	-7.59	30.62	40.00	-9.38	-	-	peak
3	69.2297	36.93	-10.11	26.82	40.00	-13.18	-	-	peak
4	115.6322	39.03	-10.47	28.56	43.50	-14.94	-	-	peak
5	318.0875	28.84	-7.47	21.37	46.00	-24.63	-	-	peak
6	436.3956	34.38	-5.47	28.91	46.00	-17.09	-	-	peak

802.11ax-HE40			
Test Channel	5755MHz(worst case)	Polarity:	Horizontal

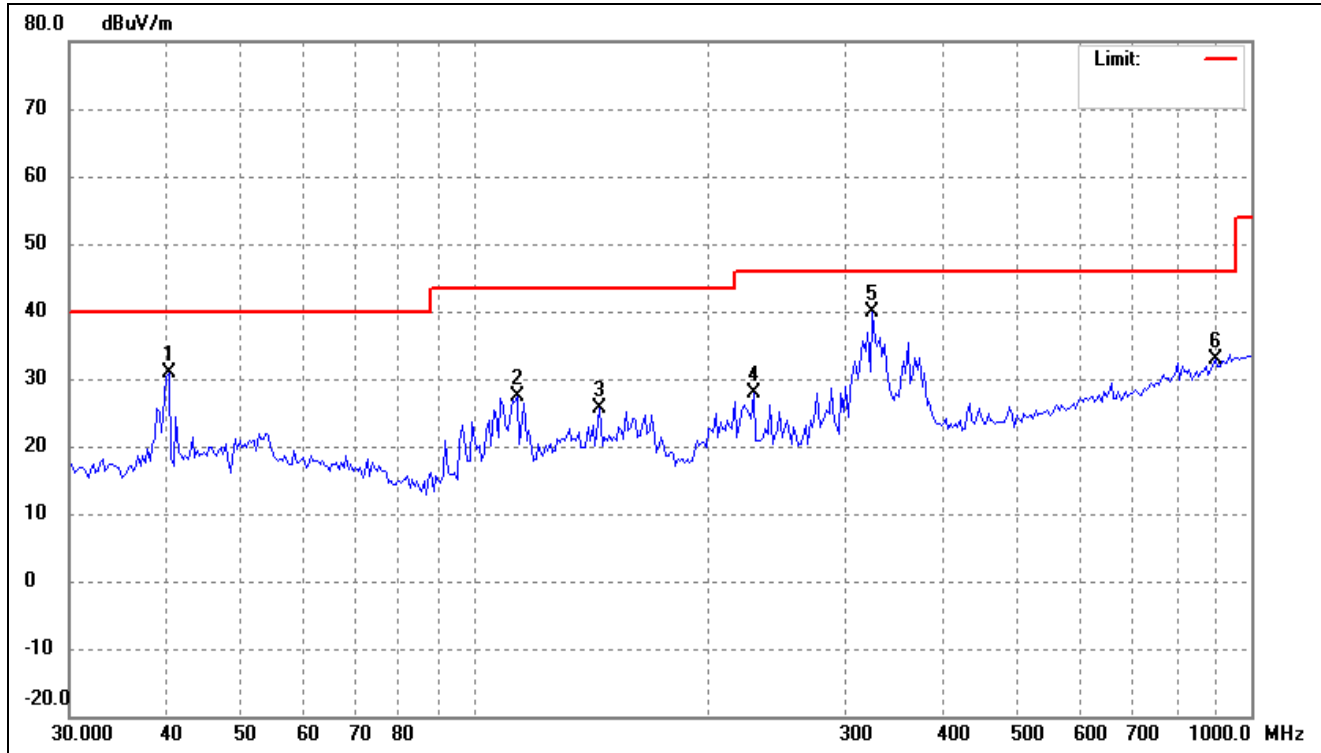

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	40.2995	38.80	-7.96	30.84	40.00	-9.16	-	-	peak
2	113.2200	38.08	-10.72	27.36	43.50	-16.14	-	-	peak
3	144.7899	34.17	-8.49	25.68	43.50	-17.82	-	-	peak
4	228.6173	39.07	-11.15	27.92	46.00	-18.08	-	-	peak
5	324.8645	47.24	-7.33	39.91	46.00	-6.09	-	-	peak
6	899.9577	30.69	2.09	32.78	46.00	-13.22	-	-	peak

802.11ax-HE40			
Test Channel	5755MHz(worst case)	Polarity:	Vertical

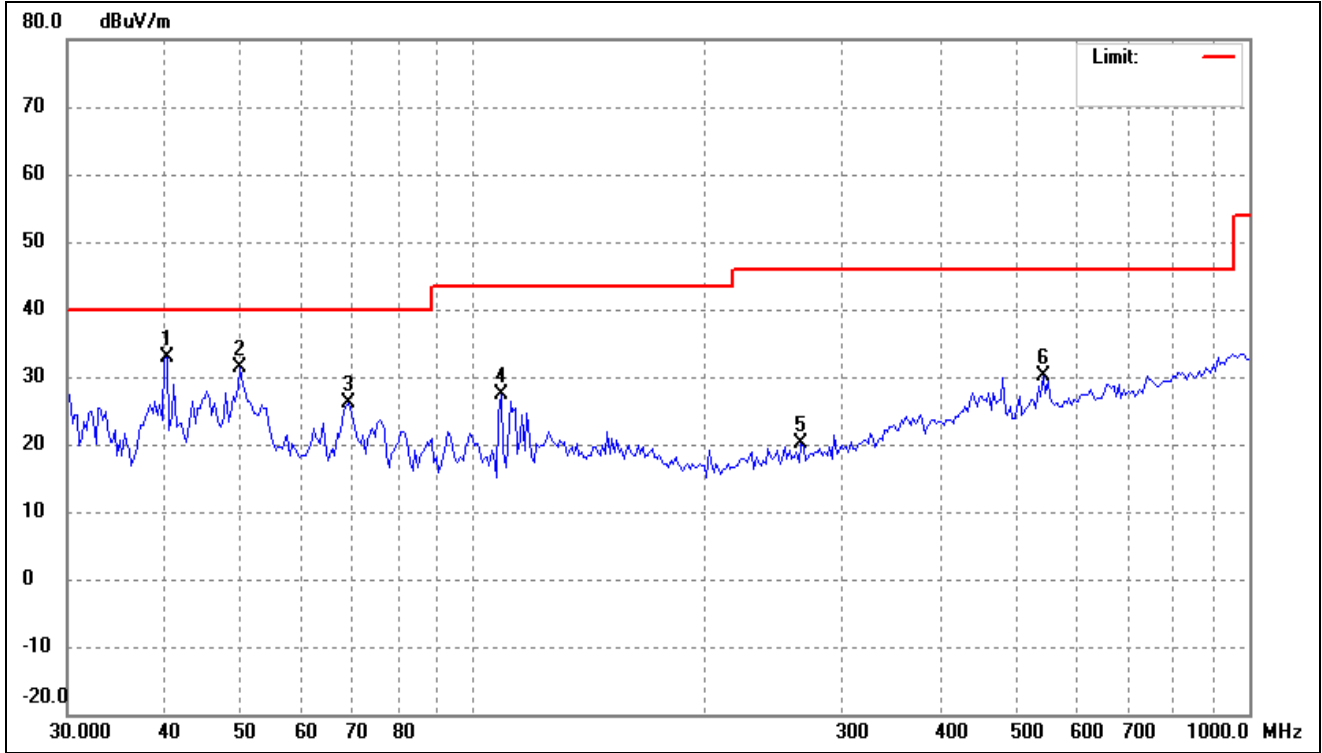


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	40.2995	40.80	-7.96	32.84	40.00	-7.16	-	-	peak
2	50.1080	39.05	-7.59	31.46	40.00	-8.54	-	-	peak
3	69.2297	36.29	-10.11	26.18	40.00	-13.82	-	-	peak
4	108.5455	38.58	-11.21	27.37	43.50	-16.13	-	-	peak
5	264.9709	29.29	-9.08	20.21	46.00	-25.79	-	-	peak
6	542.6104	33.87	-3.78	30.09	46.00	-15.91	-	-	peak

Remark: '-'Means' the test Degree and Height are not recorded by the test software and only show the worst case in the test report.


➤ Spurious Emission above 1GHz

802.11a- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

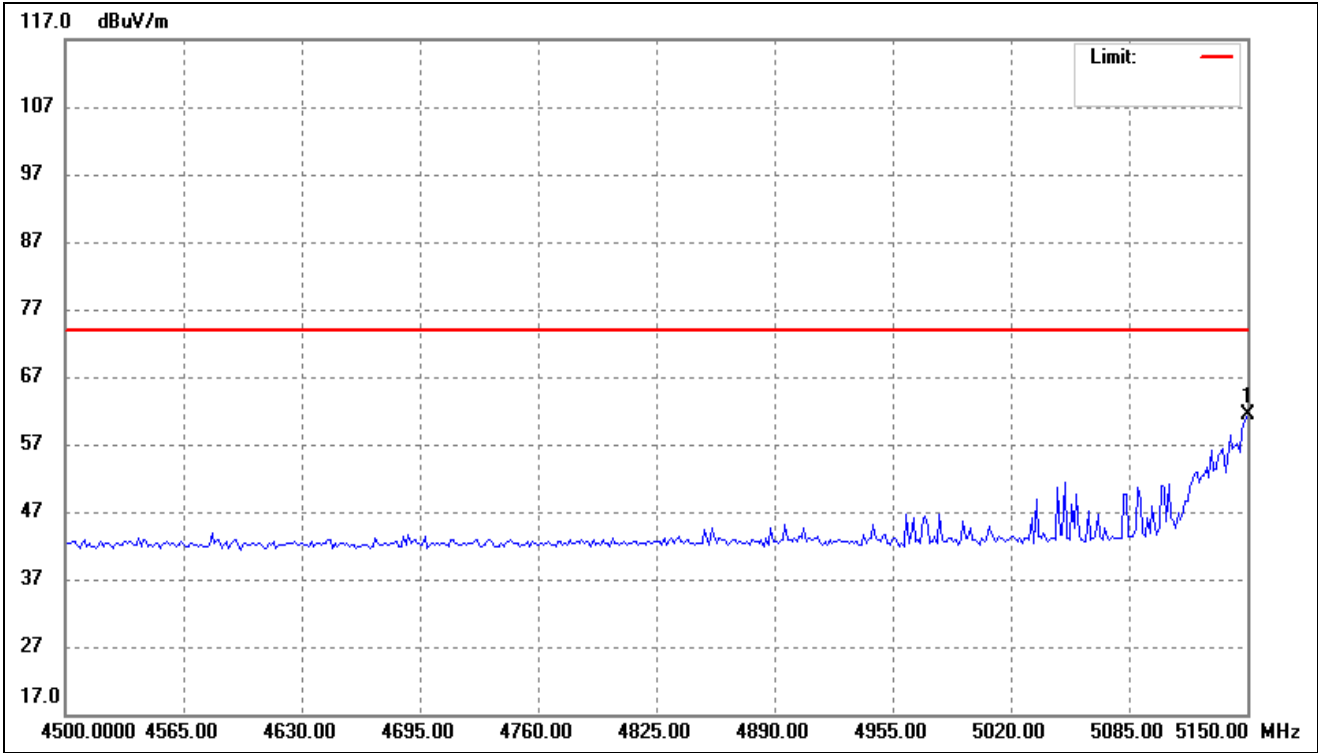


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5150.000	73.99	-12.53	61.46	74.00	-12.54	-	-	peak

802.11a- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

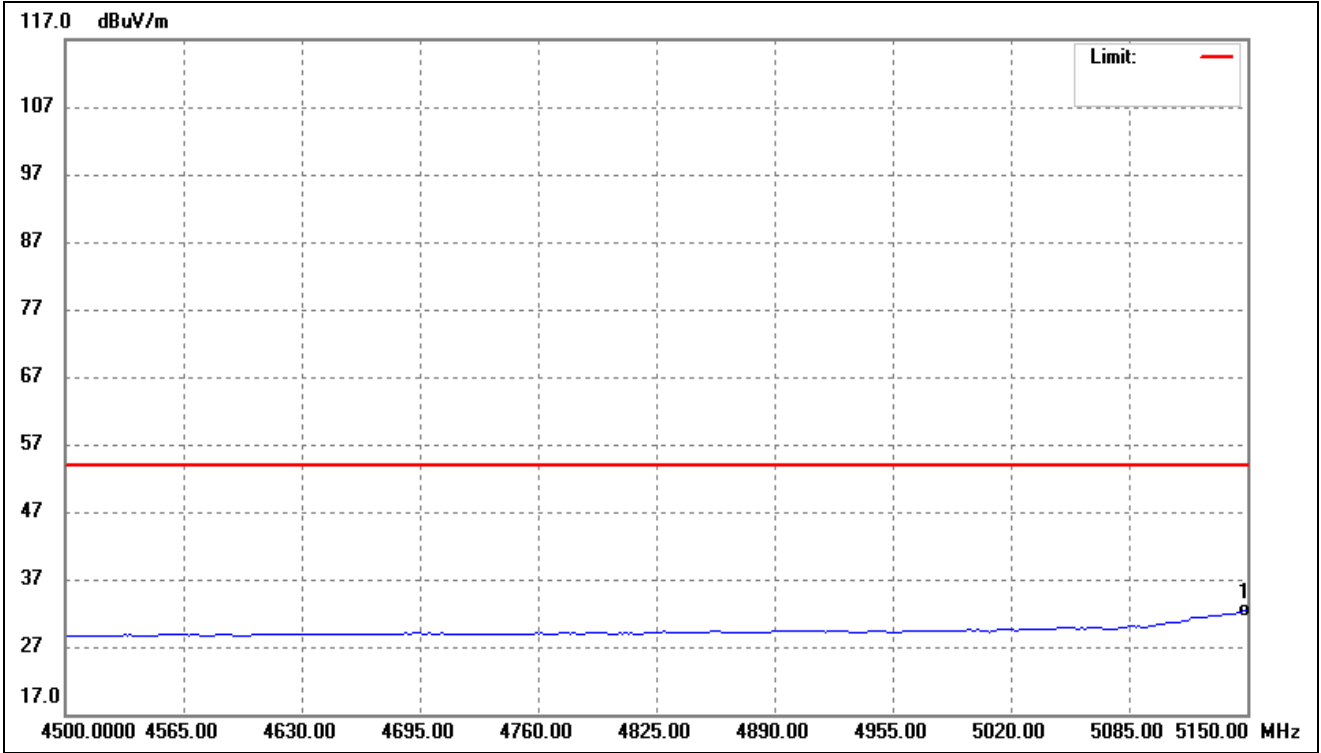


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5150.000	45.02	-12.53	32.49	54.00	-21.51	-	-	AVG

802.11n-HT20- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

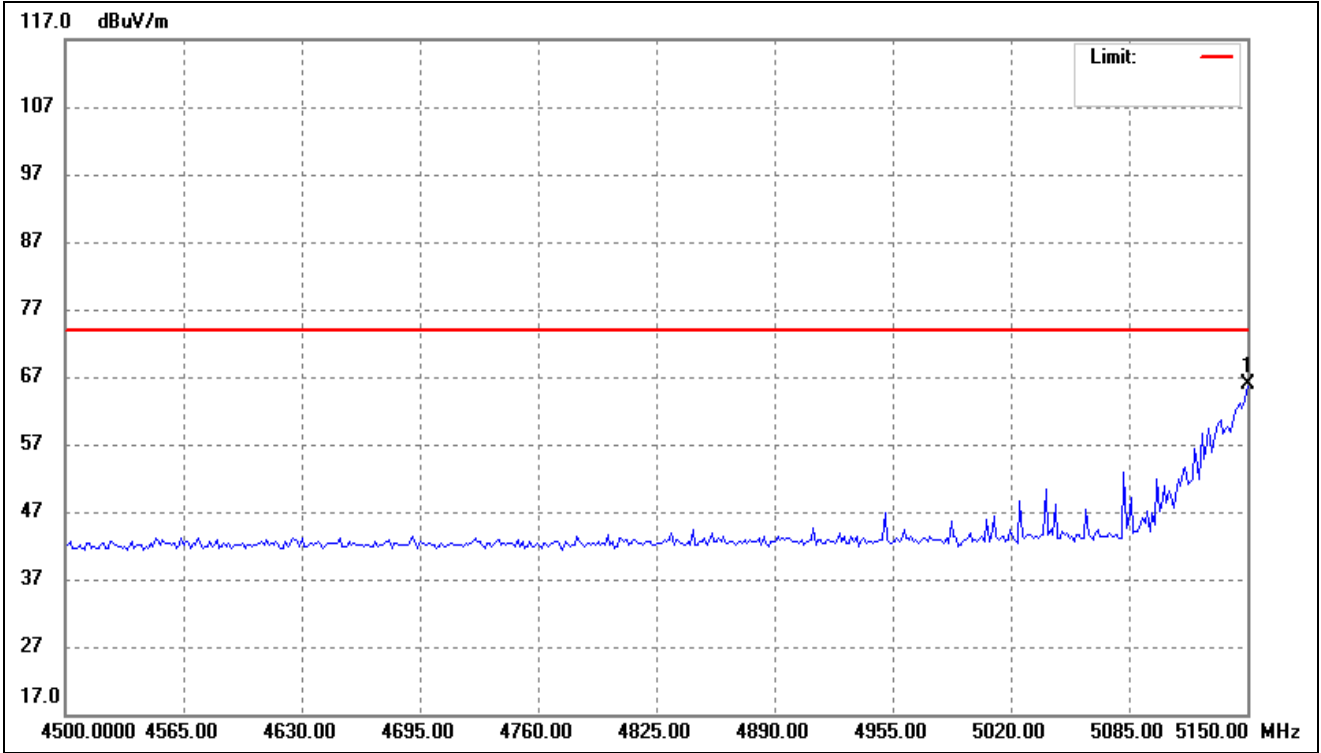


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5150.000	78.31	-12.53	65.78	74.00	-8.22	-	-	peak

802.11n-HT20- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

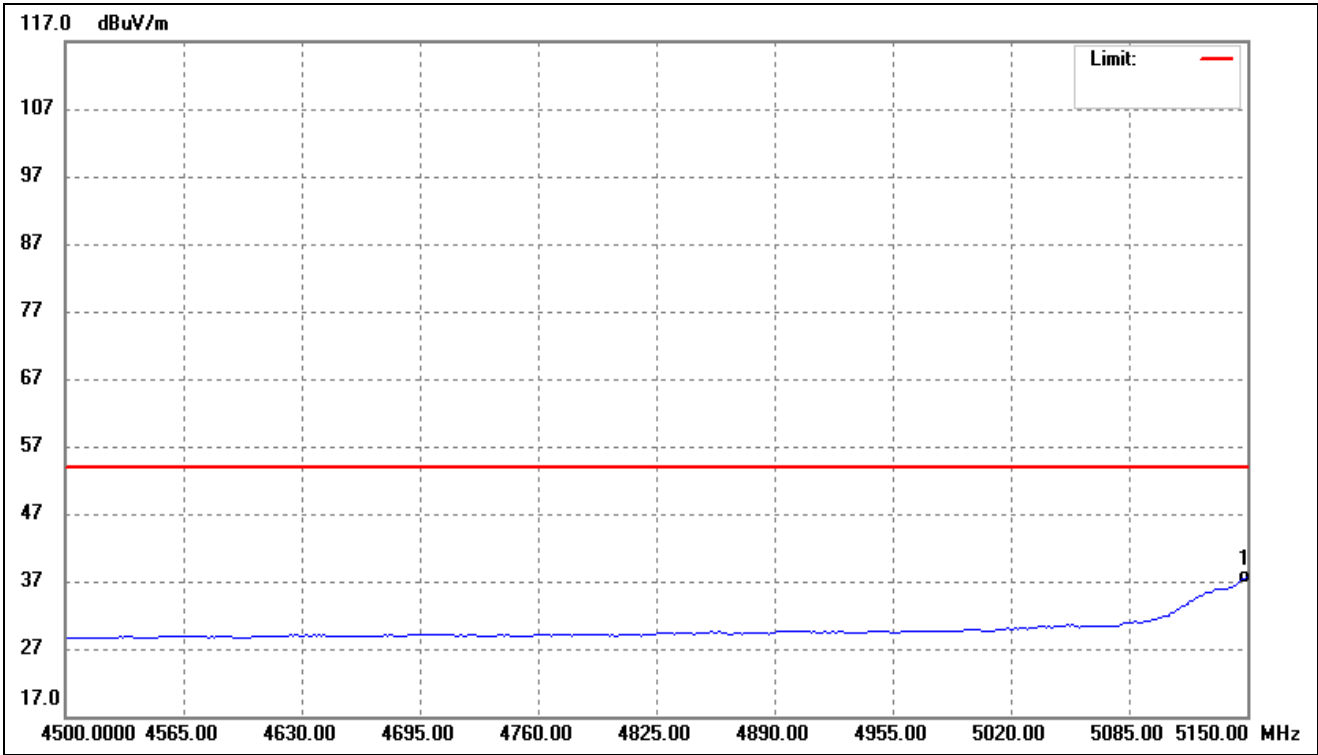


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5150.000	50.27	-12.53	37.74	54.00	-16.26	-	-	AVG

802.11ac-HT20- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

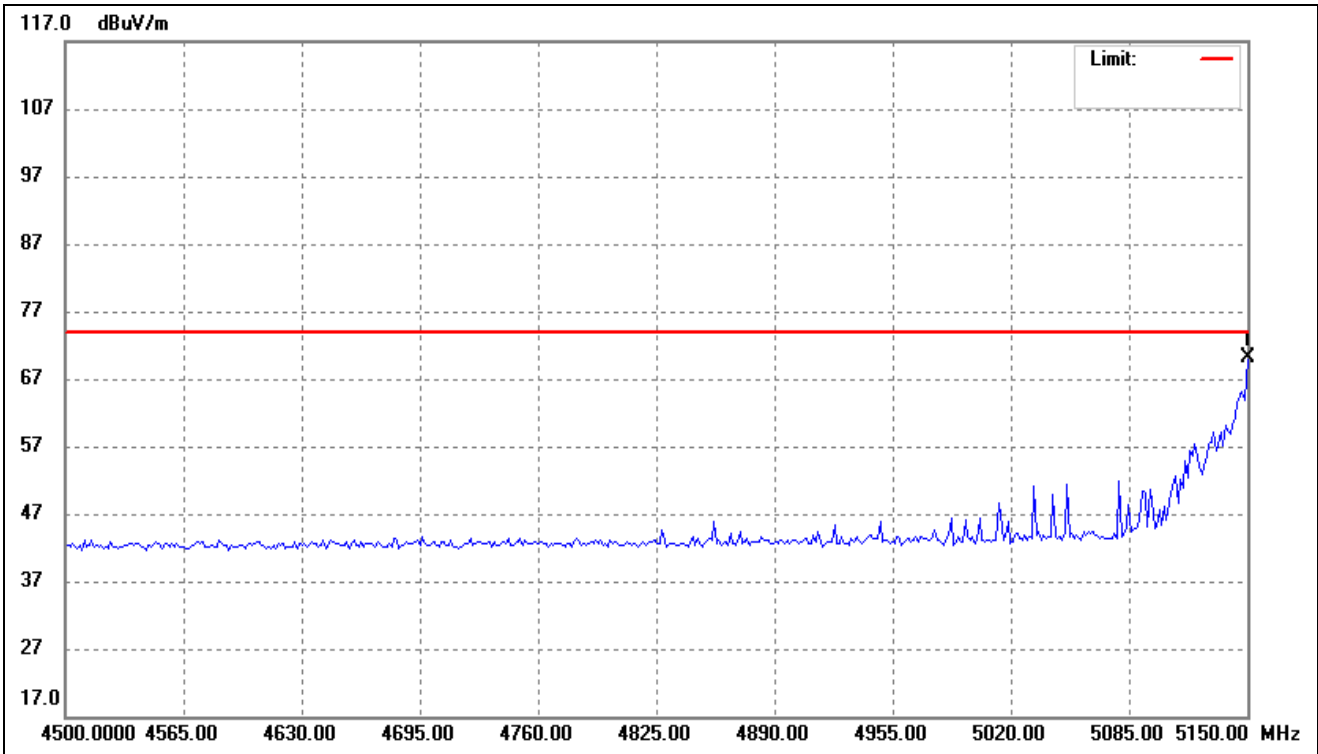


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	5150.000	82.68	-12.53	70.15	74.00	-3.85	-	-	peak

802.11ac-HT20- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

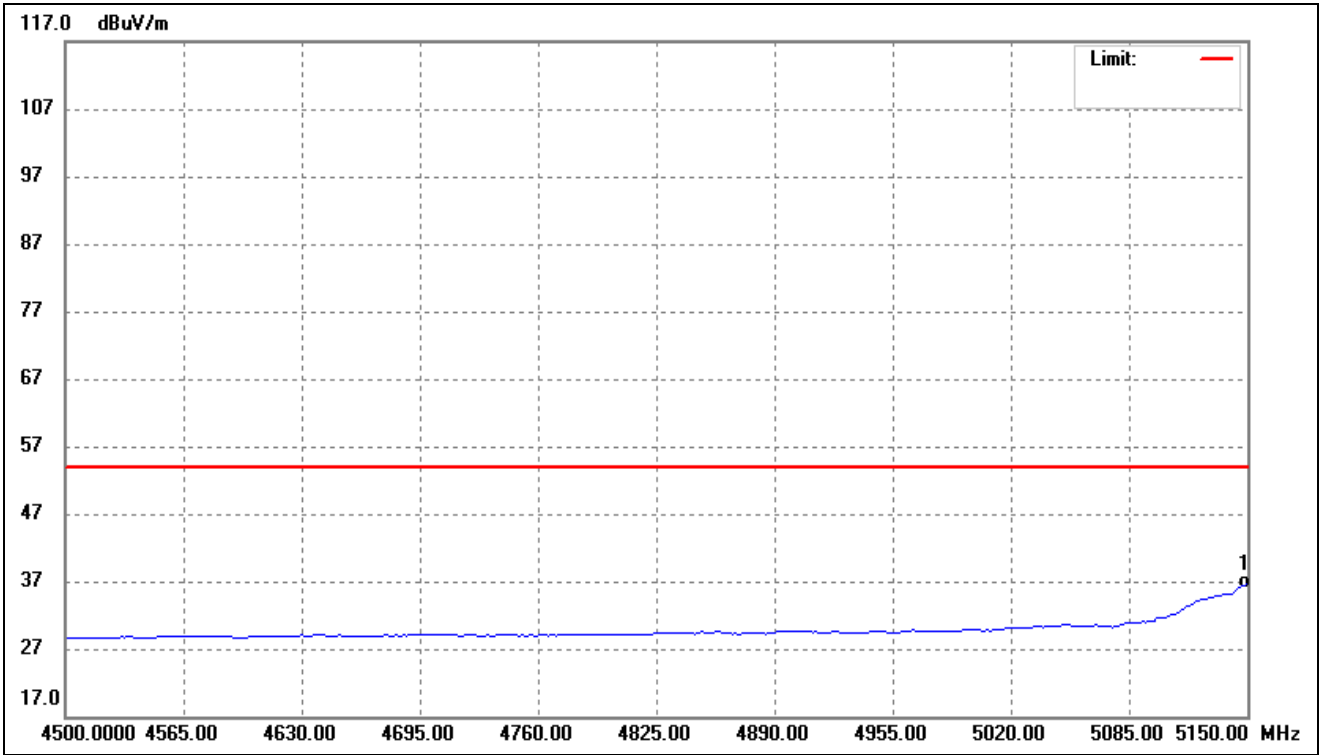


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5150.000	49.29	-12.53	36.76	54.00	-17.24	-	-	AVG

02.11ax-HE20- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

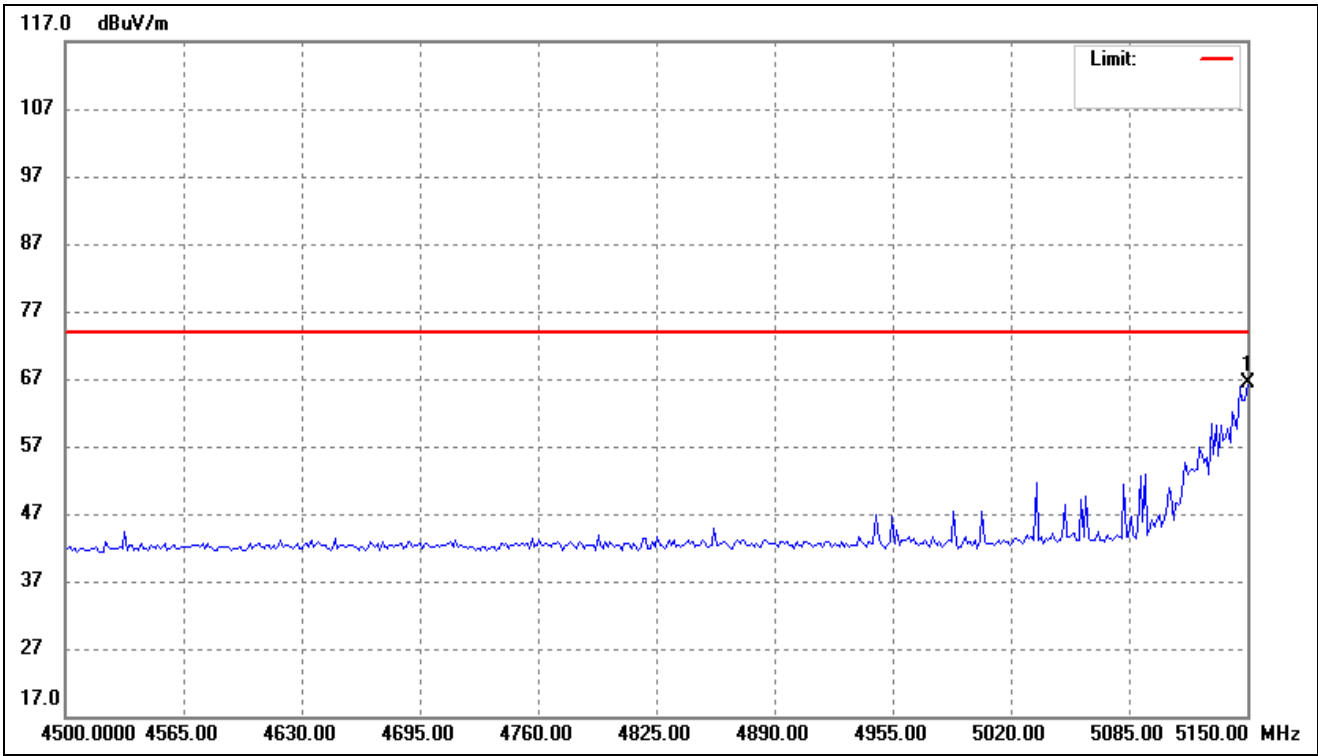

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	5150.000	78.82	-12.53	66.29	74.00	-7.71	-	-	peak

802.11ax-HE20- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

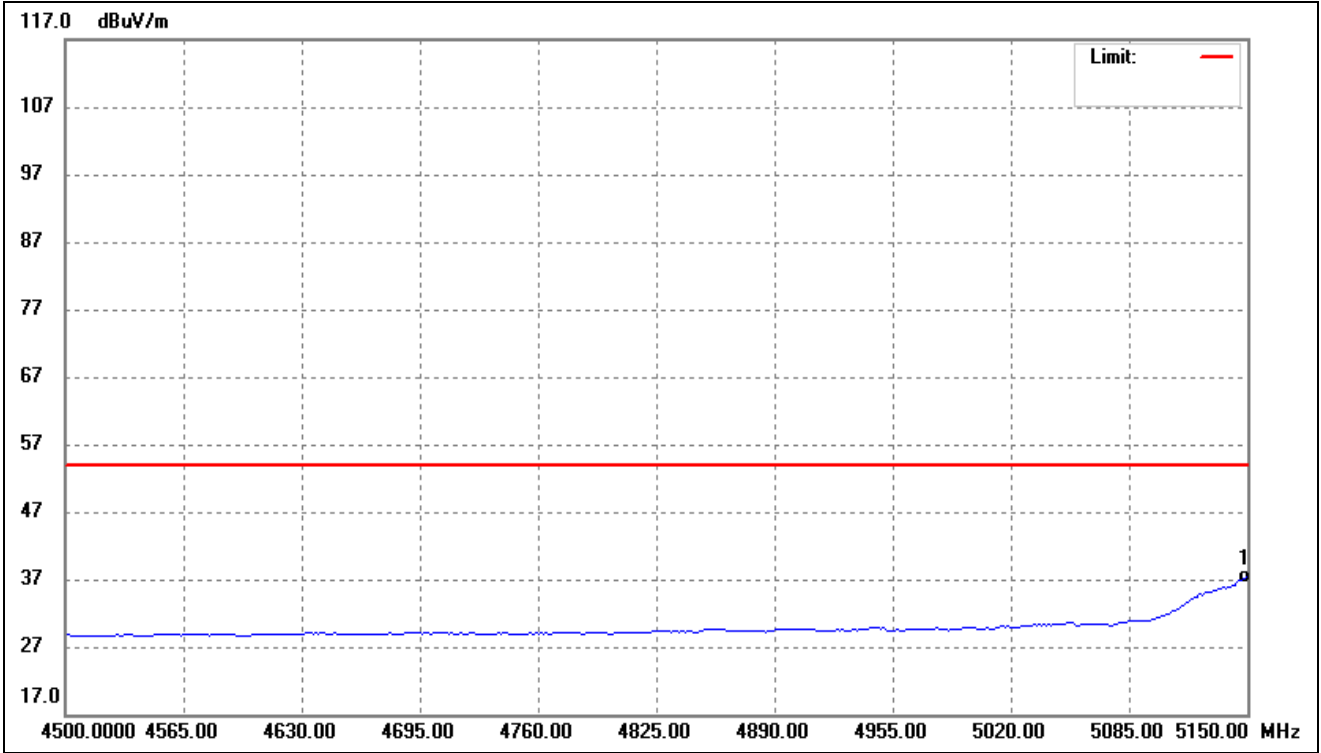


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5150.000	49.80	-12.53	37.27	54.00	-16.73	-	-	AVG

802.11n-HT40- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)




No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5144.790	82.09	-12.57	69.52	74.00	-4.48	-	-	peak

802.11n-HT40- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

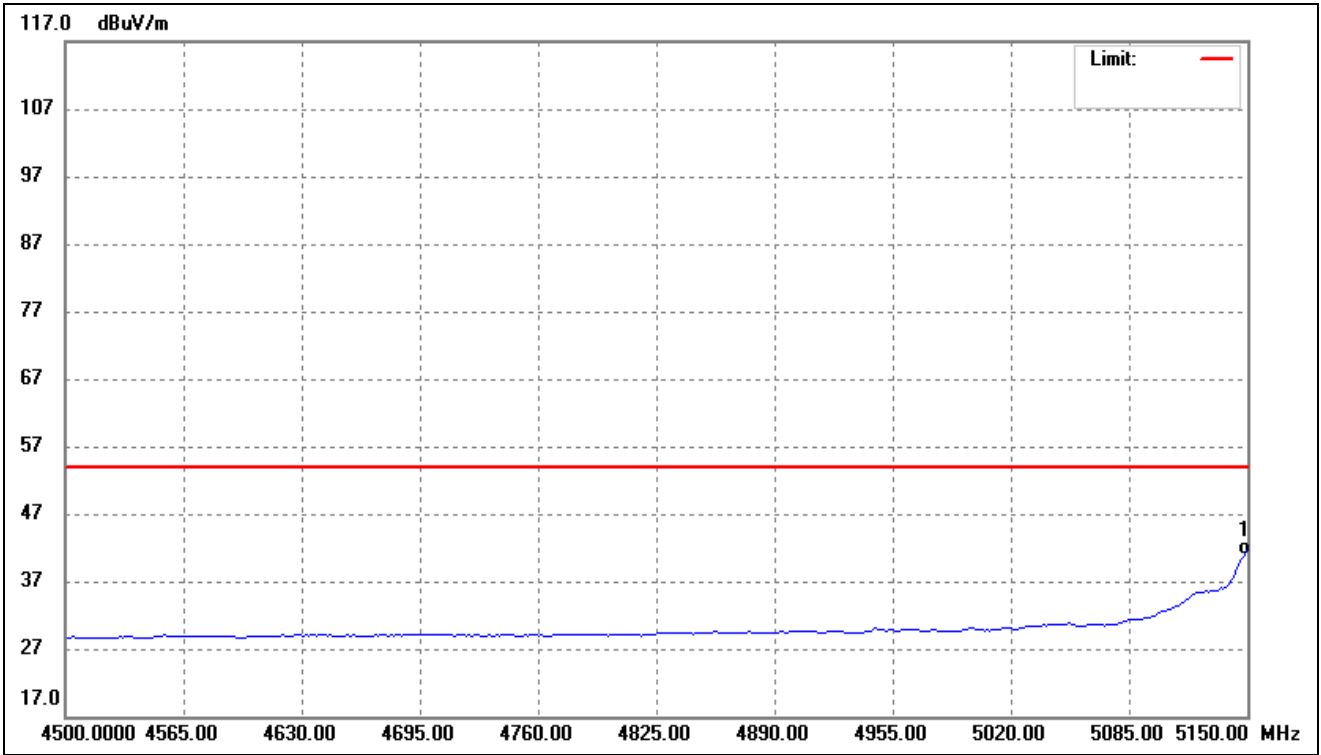


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5150.000	54.42	-12.53	41.89	54.00	-12.11	-	-	AVG

802.11ac-HT40- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

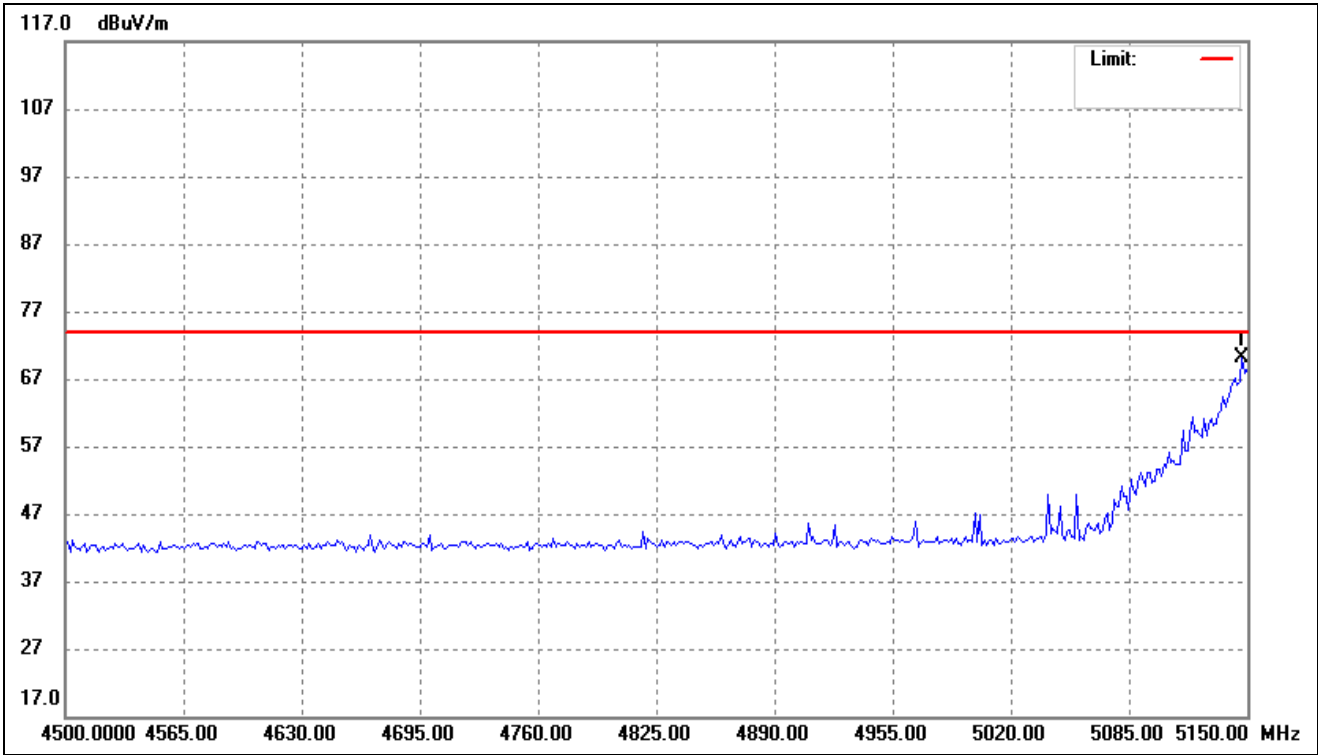


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5147.395	82.62	-12.54	70.08	74.00	-3.92	-	-	peak

802.11ac-HT40- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

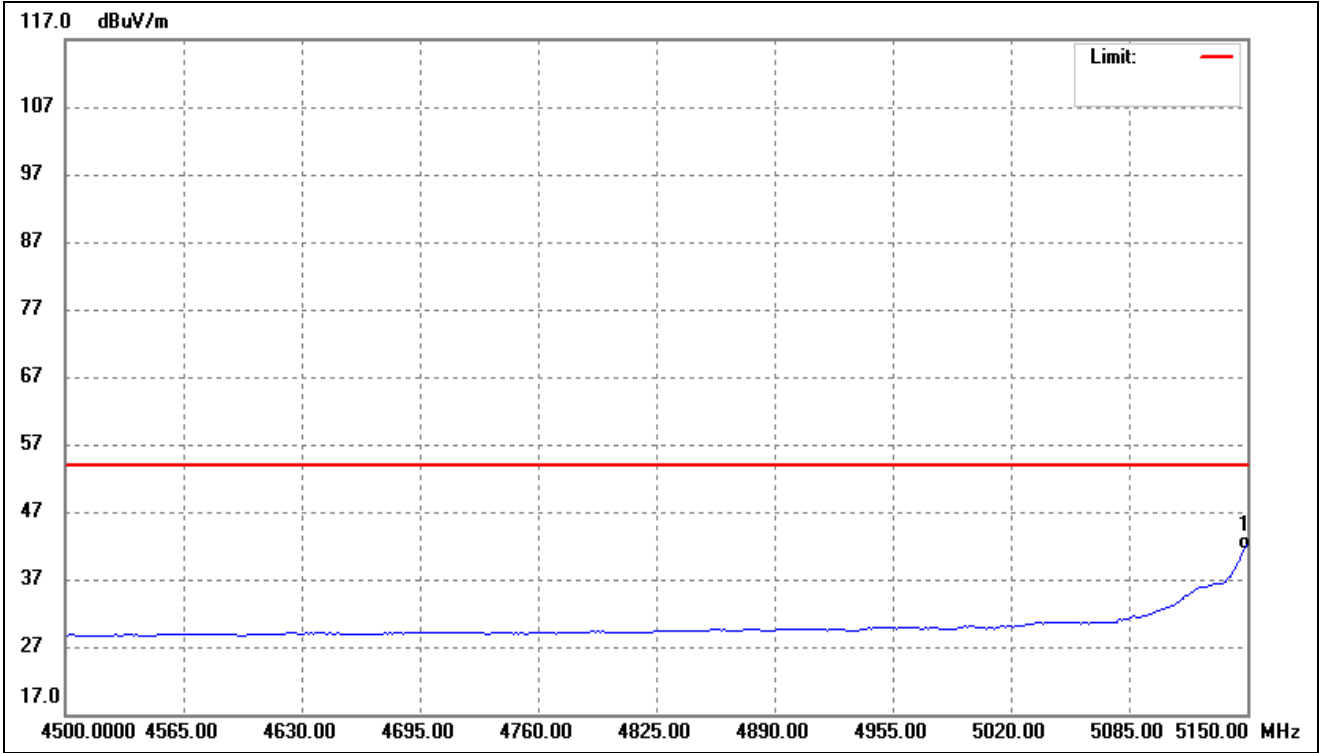


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5150.000	54.79	-12.53	42.26	54.00	-11.74	-	-	AVG

802.11ax-HE40- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

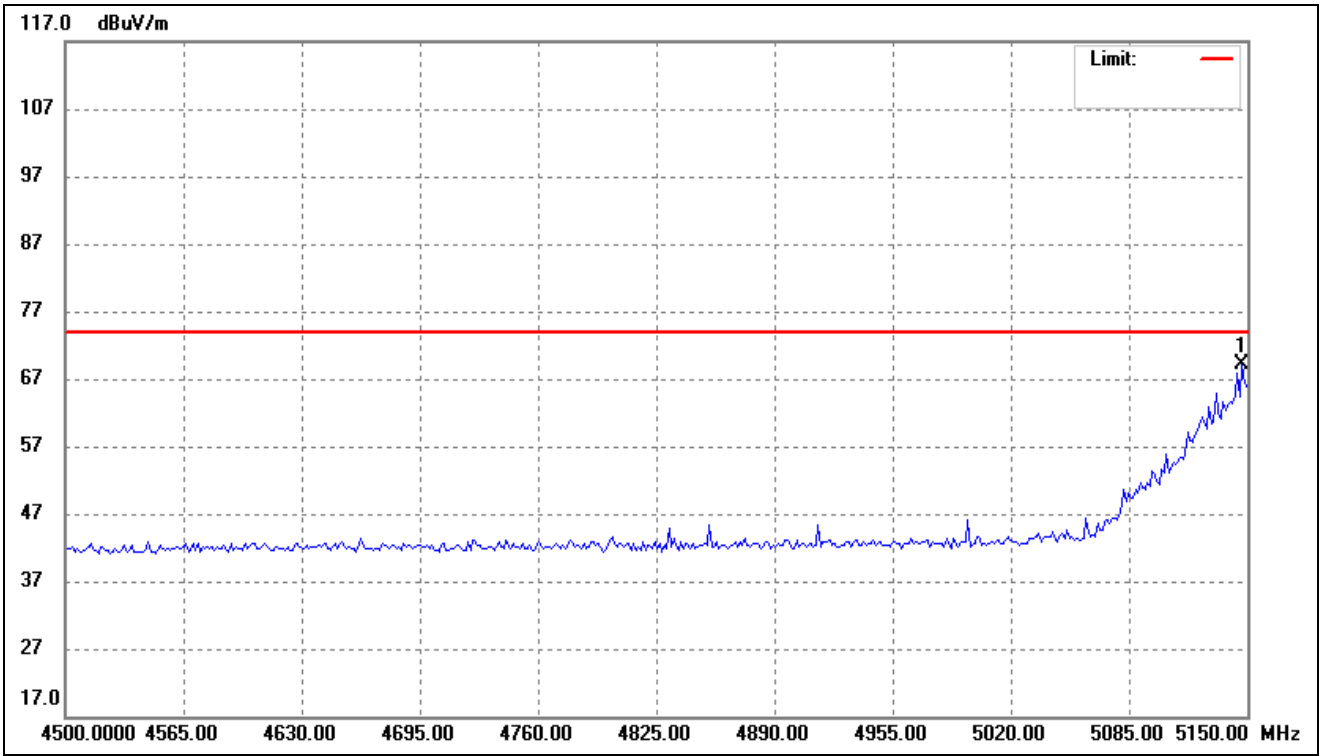

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5147.395	81.56	-12.54	69.02	74.00	-4.98	-	-	peak

802.11ax-HE40- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

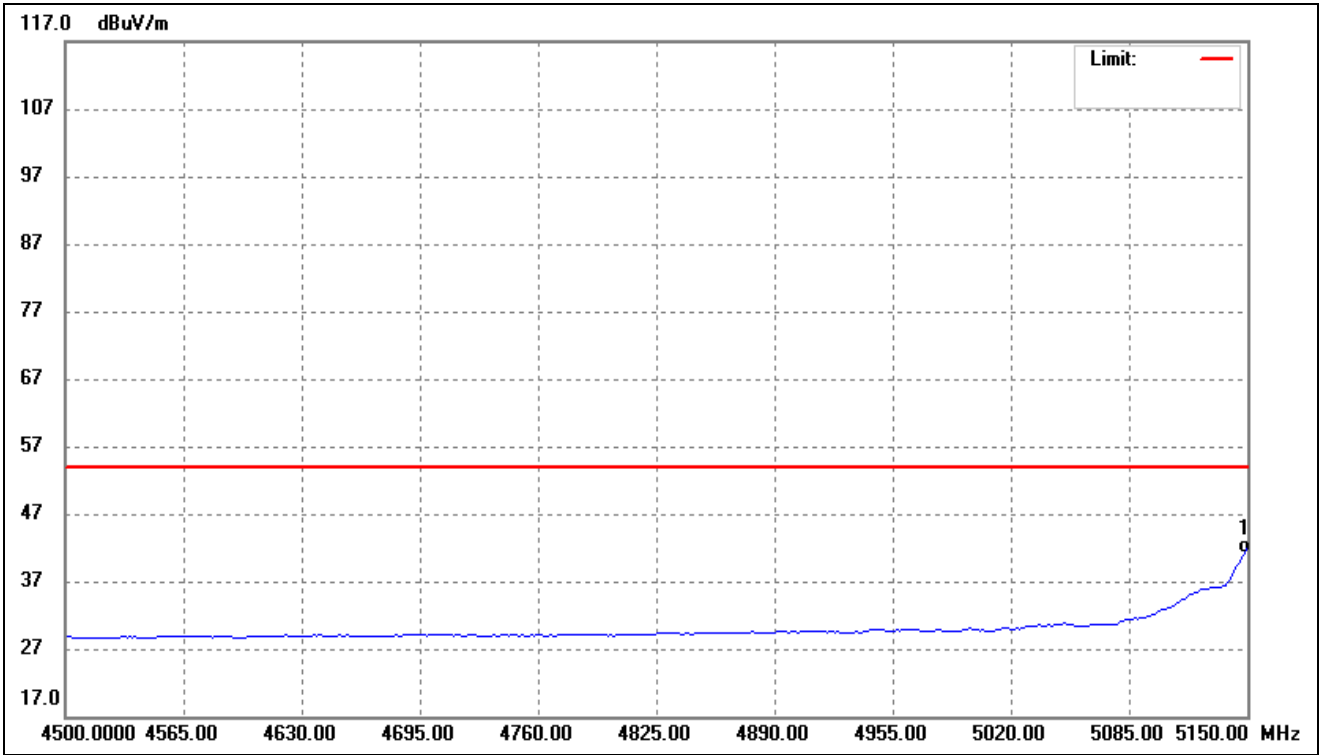

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5150.000	54.59	-12.53	42.06	54.00	-11.94	-	-	AVG

Note: The Restricted Bandedge was tested in Horizontal /Vertical and the worst case position data was reported.

Remark: ‘-’Means’ the test Degree and Height is not recorded by the test software and only show the worst case in the test report.

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11a)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	54.33	7.11	61.44	74.00	54.33	H	PK
10360	37.60	7.11	44.71	54.00	37.60	H	AV
10360	57.08	7.11	64.19	74.00	57.08	V	PK
10360	34.99	7.11	42.10	54.00	34.99	V	AV
Middle Channel (5200MHz)							
10400	54.97	7.22	62.19	74.00	-11.81	H	PK
10400	37.72	7.22	44.94	54.00	-9.06	H	AV
10400	57.24	7.22	64.46	74.00	-9.54	V	PK
10400	33.01	7.22	40.23	54.00	-13.77	V	AV
High Channel (5240MHz)							
10480	55.14	7.69	62.83	74.00	-11.17	H	PK
10480	36.30	7.69	43.99	54.00	-10.01	H	AV
10480	57.74	7.69	65.43	74.00	-8.57	V	PK
10480	35.05	7.69	42.74	54.00	-11.26	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	55.49	9.45	64.94	74.00	-9.06	H	PK
11490	35.84	9.45	45.29	54.00	-8.71	H	AV
11490	57.95	9.45	67.40	74.00	-6.60	V	PK
11490	33.17	9.45	42.62	54.00	-11.38	V	AV
Middle Channel (5785MHz)							
11570	55.33	9.62	64.95	74.00	-9.05	H	PK
11570	36.32	9.62	45.94	54.00	-8.06	H	AV
11570	58.49	9.62	68.11	74.00	-5.89	V	PK
11570	33.74	9.62	43.36	54.00	-10.64	V	AV
High Channel (5825MHz)							
11650	56.28	9.84	66.12	74.00	-7.88	H	PK
11650	36.29	9.84	46.13	54.00	-7.87	H	AV
11650	57.68	9.84	67.52	74.00	-6.48	V	PK
11650	33.22	9.84	43.06	54.00	-10.94	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-43.69	-27
Highest	Above 5350	-40.10	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-36.42	-27
	5715 to 5725	-35.75	-17
Highest	5850 to 5860	-28.02	-17
	Above 5860	-27.46	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11n HT20)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	57.03	7.11	64.14	74.00	-9.86	H	PK
10360	37.56	7.11	44.67	54.00	-9.33	H	AV
10360	57.32	7.11	64.43	74.00	-9.57	V	PK
10360	32.64	7.11	39.75	54.00	-14.25	V	AV
Middle Channel (5200MHz)							
10400	56.15	7.22	63.37	74.00	-10.63	H	PK
10400	37.00	7.22	44.22	54.00	-9.78	H	AV
10400	57.74	7.22	64.96	74.00	-9.04	V	PK
10400	32.33	7.22	39.55	54.00	-14.45	V	AV
High Channel (5240MHz)							
10480	58.12	7.69	65.81	74.00	-8.19	H	PK
10480	37.95	7.69	45.64	54.00	-8.36	H	AV
10480	57.69	7.69	65.38	74.00	-8.62	V	PK
10480	40.95	7.69	48.64	54.00	-5.36	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	56.78	9.45	66.23	74.00	-7.77	H	PK
11490	39.63	9.45	49.08	54.00	-4.92	H	AV
11490	58.32	9.45	67.77	74.00	-6.23	V	PK
11490	41.88	9.45	51.33	54.00	-2.67	V	AV
Middle Channel (5785MHz)							
11570	58.68	9.62	68.30	74.00	-5.70	H	PK
11570	39.42	9.62	49.04	54.00	-4.96	H	AV
11570	57.22	9.62	66.84	74.00	-7.16	V	PK
11570	41.98	9.62	51.60	54.00	-2.40	V	AV
High Channel (5825MHz)							
11650	57.45	9.84	67.29	74.00	-6.71	H	PK
11650	38.13	9.84	47.97	54.00	-6.03	H	AV
11650	55.30	9.84	65.14	74.00	-8.86	V	PK
11650	39.13	9.84	48.97	54.00	-5.03	V	AV

➤ Out of Band edge 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-40.46	-27
Highest	Above 5350	-41.70	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-41.55	-27
	5715 to 5725	-37.56	-17
Highest	5850 to 5860	-47.30	-17
	Above 5860	-48.27	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz,, 5.725-5.850GHz (802.11ac HT20)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	55.24	7.11	62.35	74.00	-11.65	H	PK
10360	42.02	7.11	49.13	54.00	-4.87	H	AV
10360	57.12	7.11	64.23	74.00	-9.77	V	PK
10360	39.26	7.11	46.37	54.00	-7.63	V	AV
Middle Channel (5200MHz)							
10400	57.04	7.22	64.26	74.00	-9.74	H	PK
10400	42.42	7.22	49.64	54.00	-4.36	H	AV
10400	57.14	7.22	64.36	74.00	-9.64	V	PK
10400	40.92	7.22	48.14	54.00	-5.86	V	AV
High Channel (5240MHz)							
10480	57.15	7.69	64.84	74.00	-9.16	H	PK
10480	39.31	7.69	47.00	54.00	-7.00	H	AV
10480	58.88	7.69	66.57	74.00	-7.43	V	PK
10480	37.54	7.69	45.23	54.00	-8.77	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	58.57	9.45	68.02	74.00	-5.98	H	PK
11490	41.58	9.45	51.03	54.00	-2.97	H	AV
11490	58.13	9.45	67.58	74.00	-6.42	V	PK
11490	40.89	9.45	50.34	54.00	-3.66	V	AV
Middle Channel (5785MHz)							
11570	56.55	9.62	66.17	74.00	-7.83	H	PK
11570	39.51	9.62	49.13	54.00	-4.87	H	AV
11570	57.79	9.62	67.41	74.00	-6.59	V	PK
11570	41.32	9.62	50.94	54.00	-3.06	V	AV
High Channel (5825MHz)							
11650	55.58	9.84	65.42	74.00	-8.58	H	PK
11650	41.44	9.84	51.28	54.00	-2.72	H	AV
11650	57.41	9.84	67.25	74.00	-6.75	V	PK
11650	39.32	9.84	49.16	54.00	-4.84	V	AV

➤ Out of Band edge 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-41.89	-27
Highest	Above 5350	-42.52	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-41.42	-27
	5715 to 5725	-37.05	-17
Highest	5850 to 5860	-47.95	-17
	Above 5860	-48.45	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz,, 5.725-5.850GHz (802.11ax HE20)
- Harmonics And Spurious Emissions

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel (5180MHz)							
10360	55.11	7.11	62.22	74.00	-11.78	H	PK
10360	40.98	7.11	48.09	54.00	-5.91	H	AV
10360	57.41	7.11	64.52	74.00	-9.48	V	PK
10360	38.42	7.11	45.53	54.00	-8.47	V	AV
Middle Channel (5200MHz)							
10400	56.50	7.22	63.72	74.00	-10.28	H	PK
10400	41.18	7.22	48.40	54.00	-5.60	H	AV
10400	57.74	7.22	64.96	74.00	-9.04	V	PK
10400	40.64	7.22	47.86	54.00	-6.14	V	AV
High Channel (5240MHz)							
10480	56.66	7.69	64.35	74.00	-9.65	H	PK
10480	39.36	7.69	47.05	54.00	-6.95	H	AV
10480	58.89	7.69	66.58	74.00	-7.42	V	PK
10480	37.51	7.69	45.20	54.00	-8.80	V	AV

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel (5745MHz)							
11490	58.06	9.45	67.51	74.00	-6.49	H	PK
11490	40.83	9.45	50.28	54.00	-3.72	H	AV
11490	58.46	9.45	67.91	74.00	-6.09	V	PK
11490	41.02	9.45	50.47	54.00	-3.53	V	AV
Middle Channel (5785MHz)							
11570	55.42	9.62	65.04	74.00	-8.96	H	PK
11570	39.75	9.62	49.37	54.00	-4.63	H	AV
11570	56.90	9.62	66.52	74.00	-7.48	V	PK
11570	40.17	9.62	49.79	54.00	-4.21	V	AV
High Channel (5825MHz)							
11650	57.39	9.84	67.23	74.00	-6.77	H	PK
11650	41.36	9.84	51.20	54.00	-2.80	H	AV
11650	57.08	9.84	66.92	74.00	-7.08	V	PK
11650	38.99	9.84	48.83	54.00	-5.17	V	AV

➤ Out of Band edge 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-40.14	-27
Highest	Above 5350	-41.76	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-41.18	-27
	5715 to 5725	-37.60	-17
Highest	5850 to 5860	-47.79	-17
	Above 5860	-48.52	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11n HT40)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5190MHz)							
10380	57.98	7.89	65.87	74.00	-8.13	H	PK
10380	38.18	7.89	46.07	54.00	-7.93	H	AV
10380	59.03	7.89	66.92	74.00	-7.08	V	PK
10380	41.08	7.89	48.97	54.00	-5.03	V	AV
High Channel (5230MHz)							
10460	57.51	7.97	65.48	74.00	-8.52	H	PK
10460	40.49	7.97	48.46	54.00	-5.54	H	AV
10460	58.28	7.97	66.25	74.00	-7.75	V	PK
10460	40.65	7.97	48.62	54.00	-5.38	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5755MHz)							
11510	57.74	9.45	67.19	74.00	-6.81	H	PK
11510	39.75	9.45	49.20	54.00	-4.80	H	AV
11510	56.26	9.45	65.71	74.00	-8.29	V	PK
11510	41.12	9.45	50.57	54.00	-3.43	V	AV
High Channel (5795MHz)							
11590	57.73	9.27	67.00	74.00	-7.00	H	PK
11590	40.07	9.27	49.34	54.00	-4.66	H	AV
11590	56.76	9.27	66.03	74.00	-7.97	V	PK
11590	37.57	9.27	46.84	54.00	-7.16	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-39.24	-27
Highest	Above 5350	-38.16	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-41.89	-27
	5715 to 5725	-35.60	-17
Highest	5850 to 5860	-37.73	-17
	Above 5860	-38.59	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11ac HT40)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5190MHz)							
10380	58.37	7.89	66.26	74.00	-7.74	H	PK
10380	40.21	7.89	48.10	54.00	-5.90	H	AV
10380	58.74	7.89	66.63	74.00	-7.37	V	PK
10380	41.93	7.89	49.82	54.00	-4.18	V	AV
High Channel (5230MHz)							
10460	55.15	7.97	63.12	74.00	-10.88	H	PK
10460	37.50	7.97	45.47	54.00	-8.53	H	AV
10460	56.22	7.97	64.19	74.00	-9.81	V	PK
10460	41.74	7.97	49.71	54.00	-4.29	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5755MHz)							
11510	57.45	9.45	66.90	74.00	-7.10	H	PK
11510	38.83	9.45	48.28	54.00	-5.72	H	AV
11510	56.93	9.45	66.38	74.00	-7.62	V	PK
11510	41.31	9.45	50.76	54.00	-3.24	V	AV
High Channel (5795MHz)							
11590	58.07	9.27	67.34	74.00	-6.66	H	PK
11590	40.25	9.27	49.52	54.00	-4.48	H	AV
11590	56.36	9.27	65.63	74.00	-8.37	V	PK
11590	39.09	9.27	48.36	54.00	-5.64	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-39.81	-27
Highest	Above 5350	-38.52	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-41.66	-27
	5715 to 5725	-35.80	-17
Highest	5850 to 5860	-37.41	-17
	Above 5860	-38.56	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11ax HE40)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5190MHz)							
10380	58.78	7.89	66.67	74.00	-7.33	H	PK
10380	39.77	7.89	47.66	54.00	-6.34	H	AV
10380	58.97	7.89	66.86	74.00	-7.14	V	PK
10380	40.38	7.89	48.27	54.00	-5.73	V	AV
High Channel (5230MHz)							
10460	56.59	7.97	64.56	74.00	-9.44	H	PK
10460	38.79	7.97	46.76	54.00	-7.24	H	AV
10460	55.71	7.97	63.68	74.00	-10.32	V	PK
10460	41.58	7.97	49.55	54.00	-4.45	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5755MHz)							
11510	56.58	9.45	66.03	74.00	-7.97	H	PK
11510	38.74	9.45	48.19	54.00	-5.81	H	AV
11510	58.16	9.45	67.61	74.00	-6.39	V	PK
11510	42.04	9.45	51.49	54.00	-2.51	V	AV
High Channel (5795MHz)							
11590	56.37	9.27	65.64	74.00	-8.36	H	PK
11590	39.46	9.27	48.73	54.00	-5.27	H	AV
11590	56.33	9.27	65.60	74.00	-8.40	V	PK
11590	38.75	9.27	48.02	54.00	-5.98	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-39.80	-27
Highest	Above 5350	-38.54	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-41.60	-27
	5715 to 5725	-35.84	-17
Highest	5850 to 5860	-37.41	-17
	Above 5860	-38.70	-27
Note: the data just list the worst cases			

Note: Testing is carried out with frequency rang 9kHz to 40Ghz, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

9. Frequency Stability

9.1 Standard Applicable

According to §15.407(g), manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

9.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode.

9.3 Summary of Test Results/Plots

Please refer to Appendix D

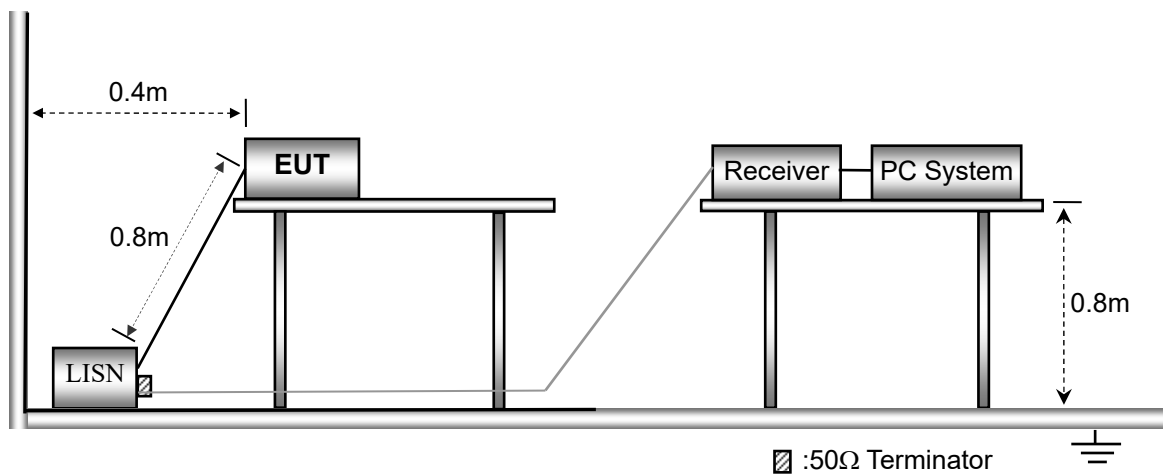
10. Conducted Emissions

10.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.

10.2 Basic Test Setup Block Diagram



10.3 Test Receiver Setup


During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150kHz
Stop Frequency	30MHz
Sweep Speed	Auto
IF Bandwidth	10kHz
Quasi-Peak Adapter Bandwidth	9kHz
Quasi-Peak Adapter Mode	Normal

10.4 Summary of Test Results/Plots


Band 1

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

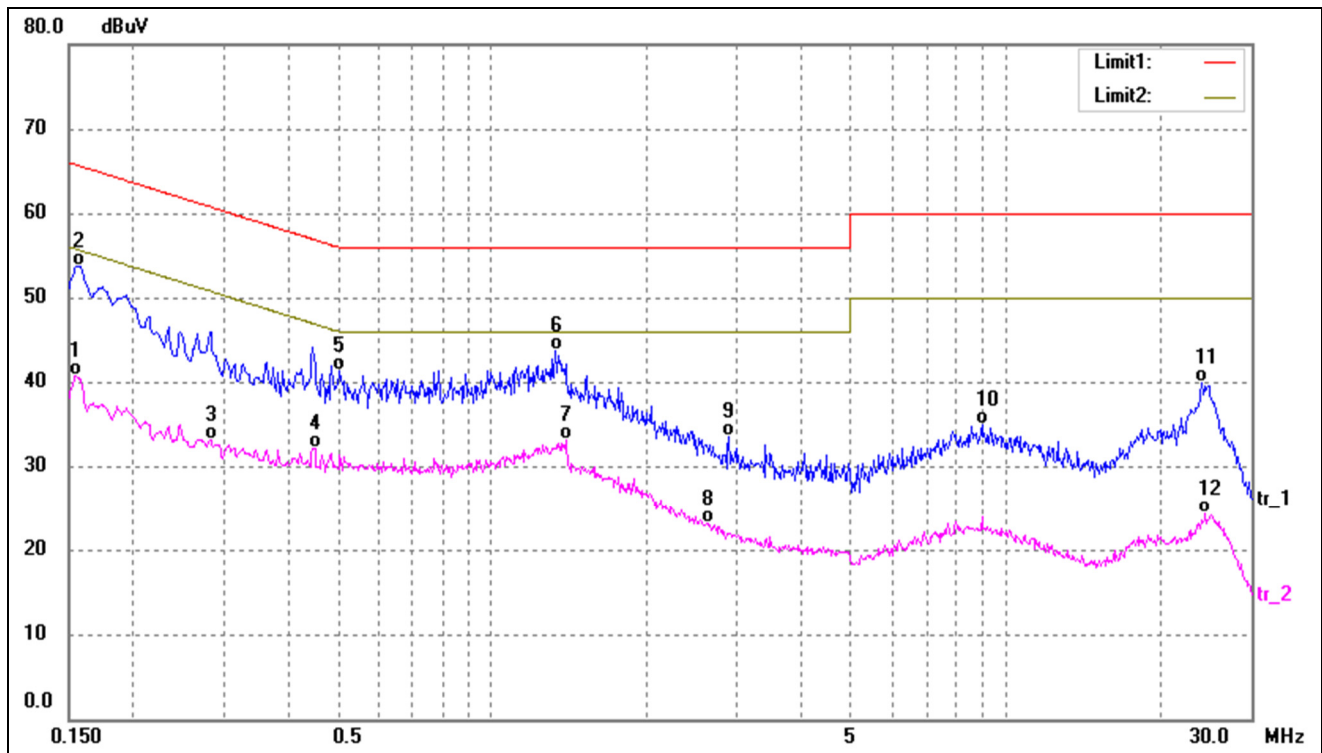

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1539	31.01	9.75	40.76	55.78	-15.02	AVG
2*	0.1580	44.01	9.73	53.74	65.56	-11.82	QP
3	0.2819	23.45	9.63	33.08	50.76	-17.68	AVG
4	0.4500	22.48	9.71	32.19	46.87	-14.68	AVG
5	0.5060	31.49	9.74	41.23	56.00	-14.77	QP
6	1.3300	34.02	9.65	43.67	56.00	-12.33	QP
7	1.3940	23.52	9.65	33.17	46.00	-12.83	AVG
8	2.6380	13.49	9.62	23.11	46.00	-22.89	AVG
9	2.8940	23.83	9.62	33.45	56.00	-22.55	QP
10	8.9860	25.15	9.84	34.99	60.00	-25.01	QP
11	24.0660	29.89	10.11	40.00	60.00	-20.00	QP
12	24.4580	14.19	10.09	24.28	50.00	-25.72	AVG


Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

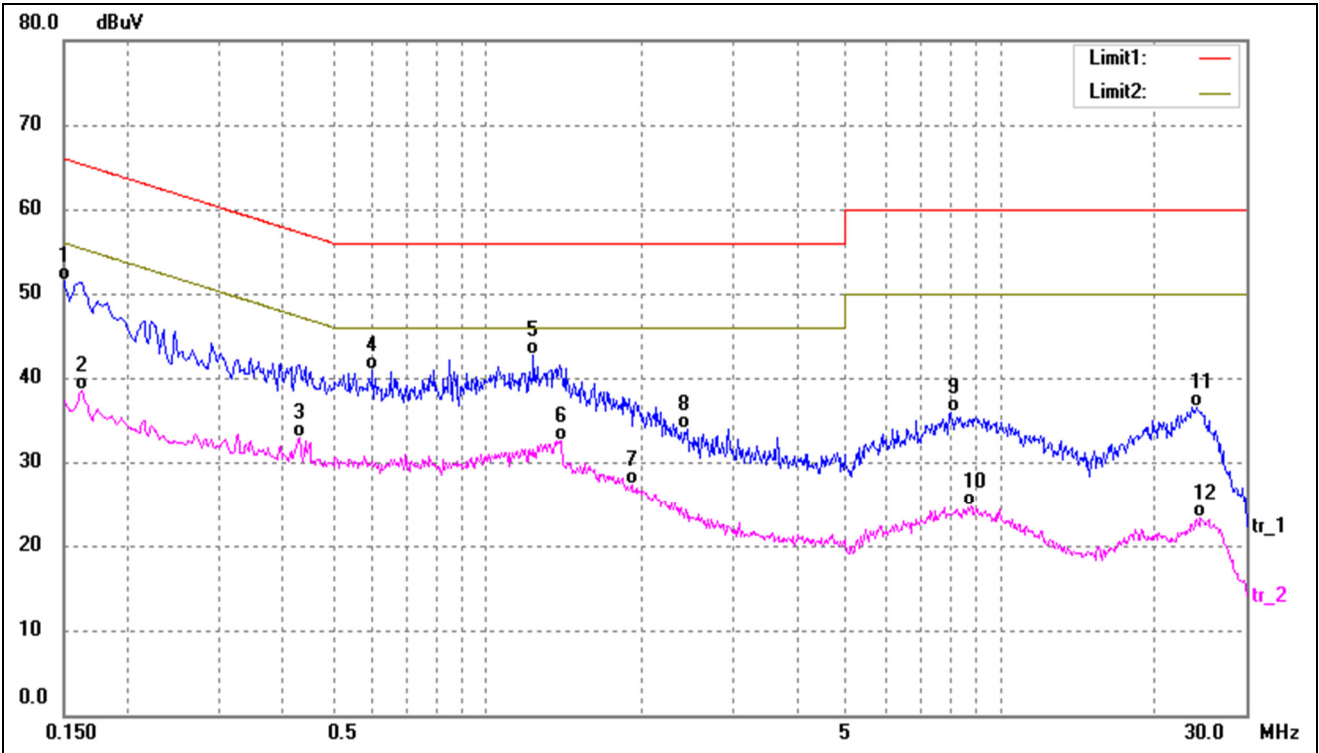

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1500	41.69	9.76	51.45	65.99	-14.54	QP
2	0.1620	28.84	9.72	38.56	55.36	-16.80	AVG
3	0.4300	23.14	9.70	32.84	47.25	-14.41	AVG
4	0.5980	31.15	9.72	40.87	56.00	-15.13	QP
5*	1.2300	33.12	9.66	42.78	56.00	-13.22	QP
6	1.3980	22.91	9.65	32.56	46.00	-13.44	AVG
7	1.9140	17.61	9.62	27.23	46.00	-18.77	AVG
8	2.4539	24.29	9.62	33.91	56.00	-22.09	QP
9	7.9820	26.00	9.82	35.82	60.00	-24.18	QP
10	8.7660	14.81	9.84	24.65	50.00	-25.35	AVG
11	24.0220	26.36	10.11	36.47	60.00	-23.53	QP
12	24.4220	13.12	10.09	23.21	50.00	-26.79	AVG


Band 4

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

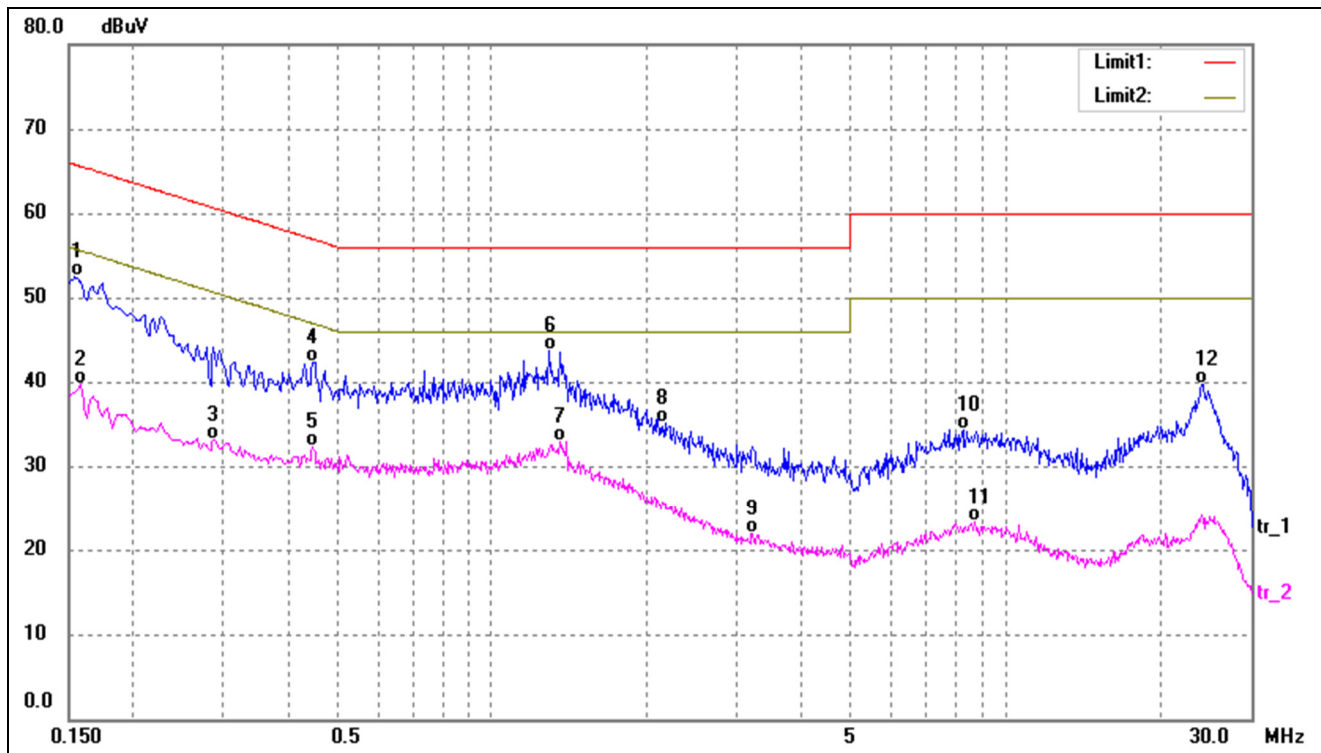

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1539	42.78	9.75	52.53	65.78	-13.25	QP
2	0.1580	30.01	9.73	39.74	55.56	-15.82	AVG
3	0.2860	23.54	9.63	33.17	50.64	-17.47	AVG
4	0.4460	32.55	9.71	42.26	56.95	-14.69	QP
5	0.4460	22.51	9.71	32.22	46.95	-14.73	AVG
6*	1.2940	34.06	9.66	43.72	56.00	-12.28	QP
7	1.3580	23.19	9.65	32.84	46.00	-13.16	AVG
8	2.1700	25.46	9.62	35.08	56.00	-20.92	QP
9	3.2100	12.24	9.63	21.87	46.00	-24.13	AVG
10	8.2700	24.47	9.83	34.30	60.00	-25.70	QP
11	8.6940	13.47	9.83	23.30	50.00	-26.70	AVG
12	24.0340	29.66	10.11	39.77	60.00	-20.23	QP

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

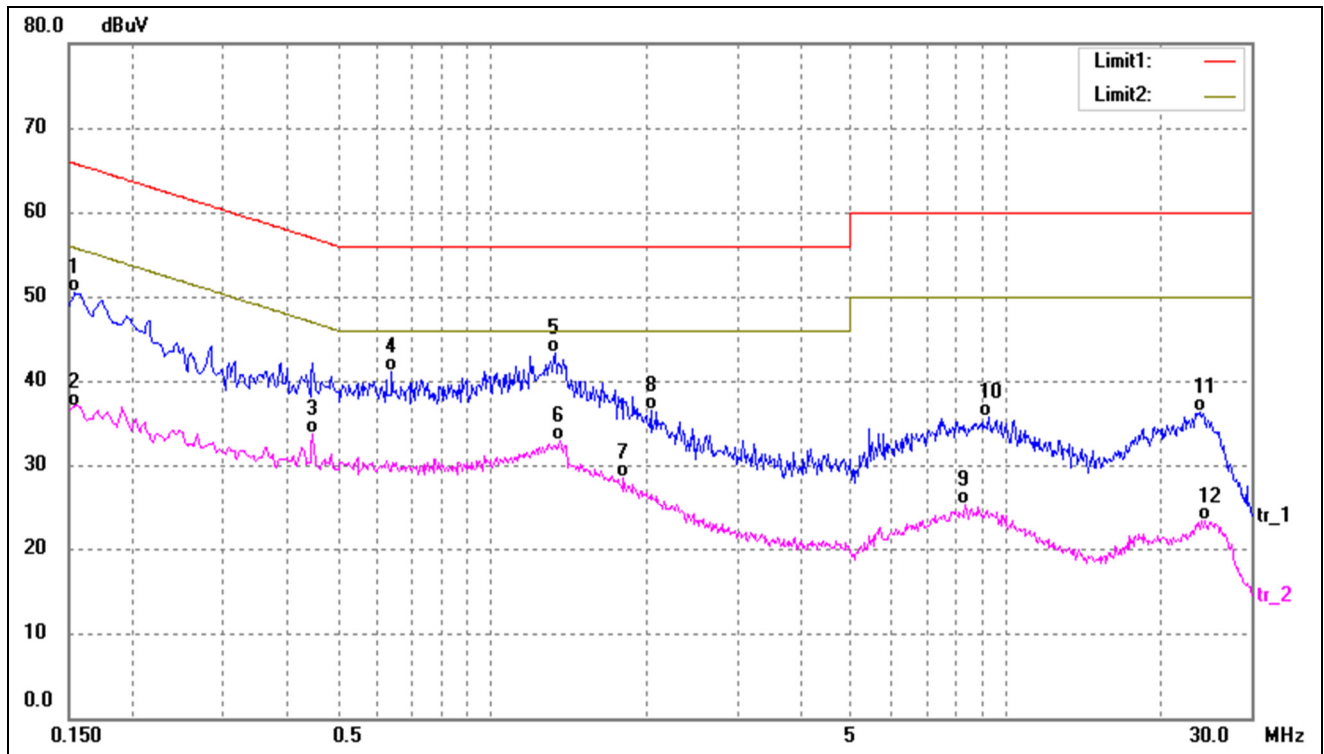

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1539	40.69	9.75	50.44	65.78	-15.34	QP
2	0.1539	27.13	9.75	36.88	55.78	-18.90	AVG
3	0.4460	24.03	9.71	33.74	46.95	-13.21	AVG
4	0.6380	31.35	9.70	41.05	56.00	-14.95	QP
5*	1.3300	33.68	9.65	43.33	56.00	-12.67	QP
6	1.3580	23.16	9.65	32.81	46.00	-13.19	AVG
7	1.8020	18.96	9.63	28.59	46.00	-17.41	AVG
8	2.0380	26.89	9.62	36.51	56.00	-19.49	QP
9	8.3580	15.52	9.83	25.35	50.00	-24.65	AVG
10	9.2580	25.83	9.86	35.69	60.00	-24.31	QP
11	23.8580	26.25	10.11	36.36	60.00	-23.64	QP
12	24.4940	13.26	10.09	23.35	50.00	-26.65	AVG

APPENDIX SUMMARY

Project No.	WTH25X01006451W	Test Engineer	Timi Huang
Start date	2025/2/7	Finish date	2025/2/8
Temperature	22.8℃	Humidity	33%
RF specifications	U-NII		

APPENDIX	Description of Test Item	Result
A	Power Spectral Density	Compliant
B	Emission Bandwidth and Occupied Bandwidth	Compliant
C	Maximum Conducted Output Power	Compliant
D	Frequency Stability	Compliant




APPENDIX A




Power Spectral Density			
U-NII-1:5150-5250MHz			
Operating mode	Test Channel	Power Spectral Density dBm/MHz	Limit (dBm/MHz)
802.11a	5180	-1.71	11
	5200	-1.60	11
	5240	-1.00	11
802.11n-HT20	5180	1.86	11
	5200	1.01	11
	5240	1.72	11
802.11n-HT40	5190	-1.96	11
	5230	-1.39	11
802.11ac-VHT20	5180	1.84	11
	5200	0.93	11
	5240	1.58	11
802.11ac-VHT40	5190	-3.06	11
	5230	-1.43	11
802.11ax-HE20	5180	1.61	11
	5200	0.70	11
	5240	1.54	11
802.11ax-HE40	5190	-2.17	11
	5230	-2.55	11




U-NII-3: 5725-5850MHz					
Operating mode	Test Channel	Power Spectral Density dBm/300kHz	Factor	Power Spectral Density* dBm/500kHz	Limit dBm/500kHz
802.11a	5745	-6.95	2.22	-4.73	30
	5785	-7.32	2.22	-5.1	30
	5825	-7.68	2.22	-5.46	30
802.11n-HT20	5745	-3.11	2.22	-0.89	30
	5785	-3.52	2.22	-1.3	30
	5825	-4.02	2.22	-1.8	30
802.11n HT40	5755	-7.28	2.22	-5.06	30
	5795	-7.68	2.22	-5.46	30




802.11ac-VHT20	5745	-4.19	2.22	-1.97	30
	5785	-3.60	2.22	-1.38	30
	5825	-3.84	2.22	-1.62	30
802.11ac-VHT40	5755	-7.23	2.22	-5.01	30
	5795	-7.70	2.22	-5.48	30
802.11ax-HE20	5745	-4.45	2.22	-2.23	30
	5785	-3.88	2.22	-1.66	30
	5825	-4.29	2.22	-2.07	30
802.11ax-HE40	5755	-7.54	2.22	-5.32	30
	5795	-8.02	2.22	-5.8	30
*Note: Maximum PSD=PSD(dBm/300kHz)+10log(500kHz/300kHz)=2.22					

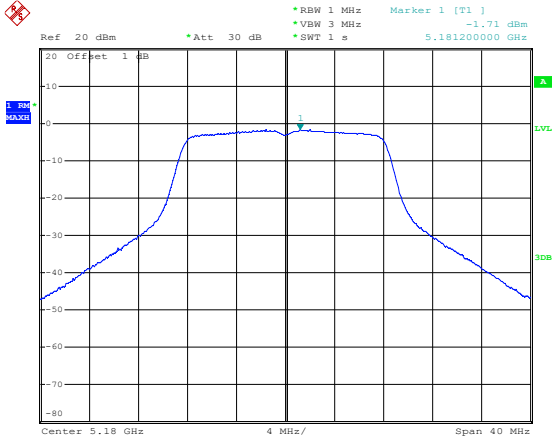
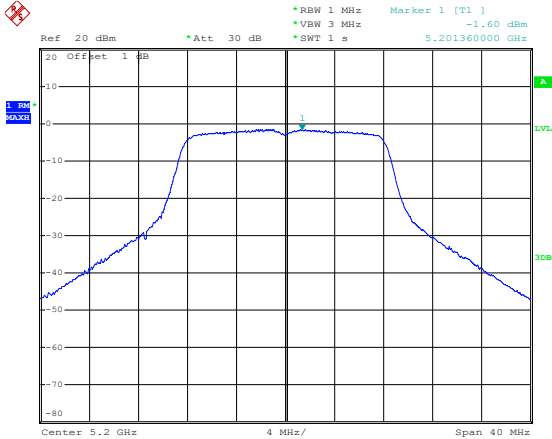
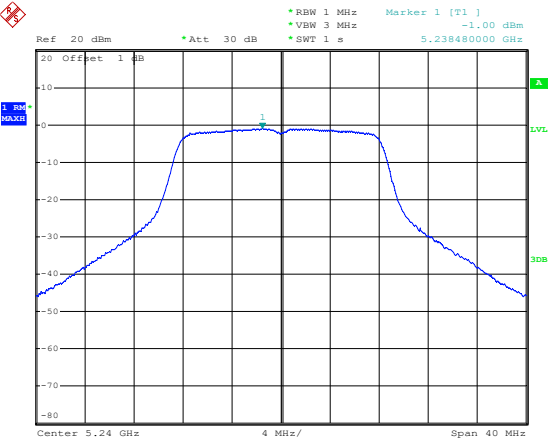
5150-5250MHz




802.11a-Low	 Ref: 20 dBm, Att: 30 dB, RBW: 1 MHz, VBW: 3 MHz, SWT: 1 s, Marker 1 [T1]: -1.71 dBm, 5.181200000 GHz Center: 5.18 GHz, 4 MHz/, Span: 40 MHz Date: 8.FEB.2025 14:31:31
802.11a-Middle	 Ref: 20 dBm, Att: 30 dB, RBW: 1 MHz, VBW: 3 MHz, SWT: 1 s, Marker 1 [T1]: -1.60 dBm, 5.201360000 GHz Center: 5.2 GHz, 4 MHz/, Span: 40 MHz Date: 8.FEB.2025 14:32:00
802.11a-High	 Ref: 20 dBm, Att: 30 dB, RBW: 1 MHz, VBW: 3 MHz, SWT: 1 s, Marker 1 [T1]: -1.00 dBm, 5.238480000 GHz Center: 5.24 GHz, 4 MHz/, Span: 40 MHz Date: 8.FEB.2025 14:33:27

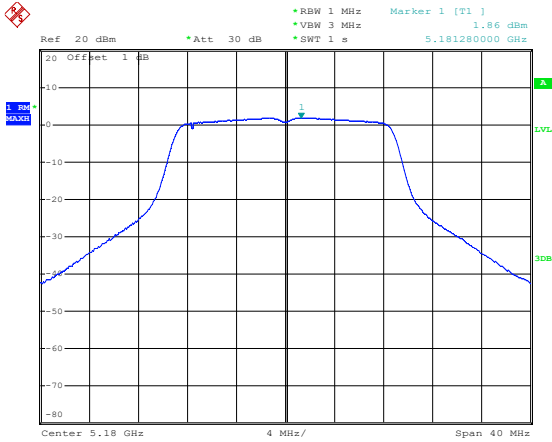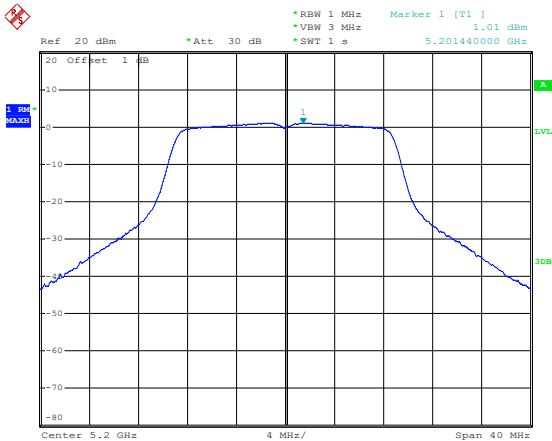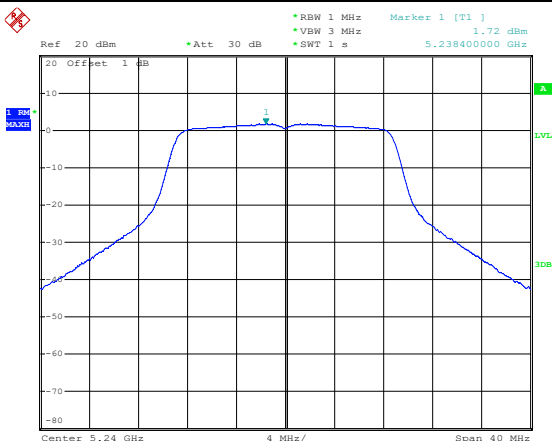802.11n-HT20-Low	 Ref 20 dBm *Att 30 dB *RBW 1 MHz Marker 1 [T1] 1.86 dBm *VSW 3 MHz *SWT 1 s 5.181280000 GHz Center 5.18 GHz 4 MHz/ Span 40 MHz Date: 8.FEB.2025 14:28:18
802.11n-HT20-Middle	 Ref 20 dBm *Att 30 dB *RBW 1 MHz Marker 1 [T1] 1.01 dBm *VSW 3 MHz *SWT 1 s 5.201440000 GHz Center 5.2 GHz 4 MHz/ Span 40 MHz Date: 8.FEB.2025 14:27:43
802.11n-HT20-High	 Ref 20 dBm *Att 30 dB *RBW 1 MHz Marker 1 [T1] 1.72 dBm *VSW 3 MHz *SWT 1 s 5.238400000 GHz Center 5.24 GHz 4 MHz/ Span 40 MHz Date: 8.FEB.2025 14:26:38

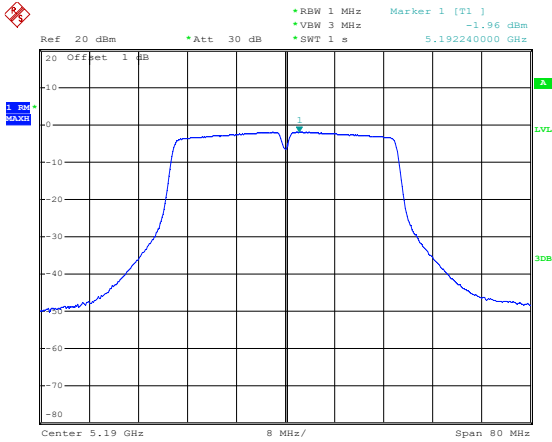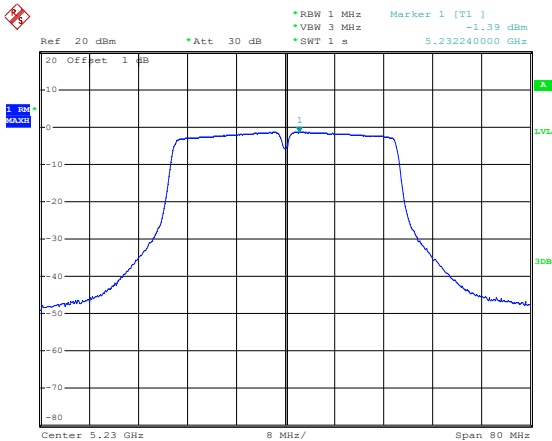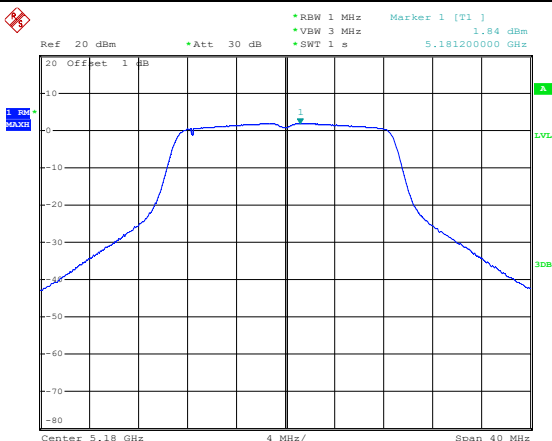802.11n-HT40-Low	 Ref 20 dBm *Att 30 dB *RBW 1 MHz *VSW 3 MHz *SWT 1 s Marker 1 [T1] -1.96 dBm 5.192240000 GHz 20 Offset 1 dB Center 5.19 GHz 8 MHz/ Span 80 MHz Date: 8.FEB.2025 14:21:08
802.11n-HT40-High	 Ref 20 dBm *Att 30 dB *RBW 1 MHz *VSW 3 MHz *SWT 1 s Marker 1 [T1] -1.39 dBm 5.232240000 GHz 20 Offset 1 dB Center 5.23 GHz 8 MHz/ Span 80 MHz Date: 8.FEB.2025 14:20:38
802.11ac-VHT20-Low	 Ref 20 dBm *Att 30 dB *RBW 1 MHz *VSW 3 MHz *SWT 1 s Marker 1 [T1] 1.84 dBm 5.181200000 GHz 20 Offset 1 dB Center 5.18 GHz 4 MHz/ Span 40 MHz Date: 8.FEB.2025 14:24:53

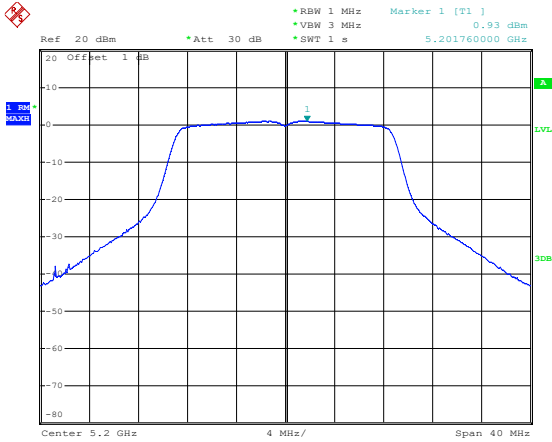
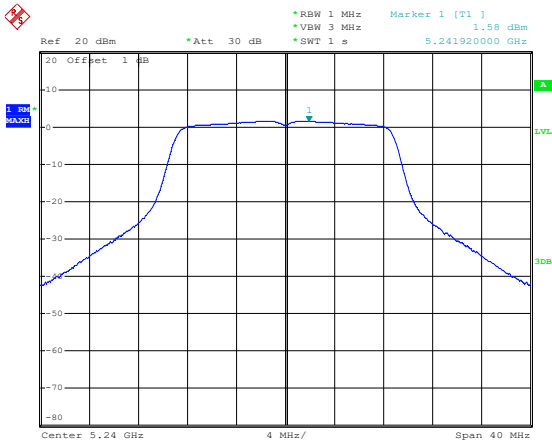
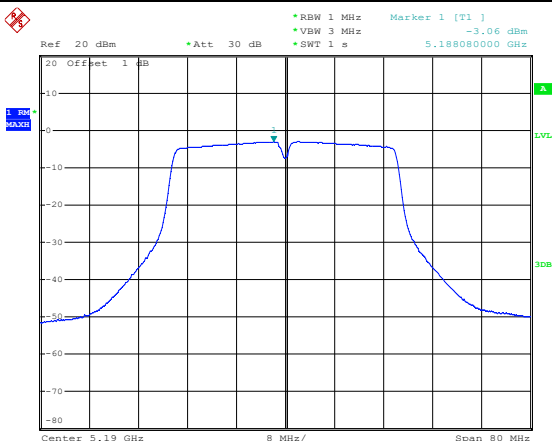
802.11ac-VHT20-Middle	 Ref 20 dBm *Att 30 dB *RBW 1 MHz *VSW 3 MHz *SWT 1 s Marker 1 [T1] 0.93 dBm 5.201760000 GHz Center 5.2 GHz 4 MHz/ Span 40 MHz Date: 8.FEB.2025 14:25:38
802.11ac-VHT20-High	 Ref 20 dBm *Att 30 dB *RBW 1 MHz *VSW 3 MHz *SWT 1 s Marker 1 [T1] 1.58 dBm 5.241920000 GHz Center 5.24 GHz 4 MHz/ Span 40 MHz Date: 8.FEB.2025 14:26:07
802.11ac-VHT40-Low	 Ref 20 dBm *Att 30 dB *RBW 1 MHz *VSW 3 MHz *SWT 1 s Marker 1 [T1] -3.06 dBm 5.188080000 GHz Center 5.19 GHz 8 MHz/ Span 80 MHz Date: 8.FEB.2025 14:18:49

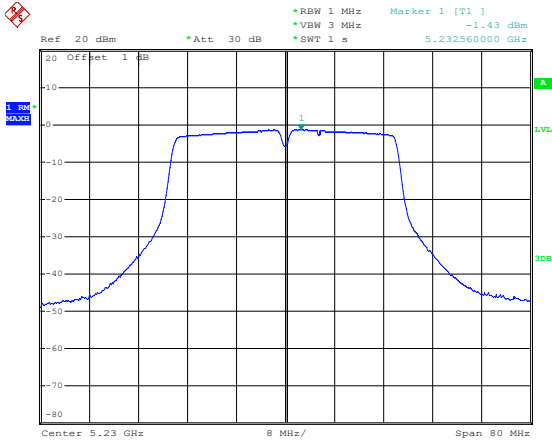
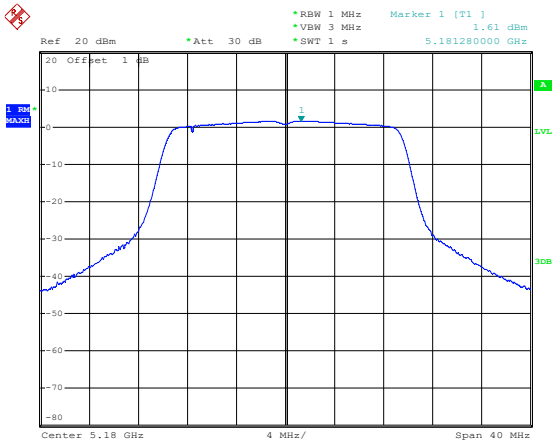
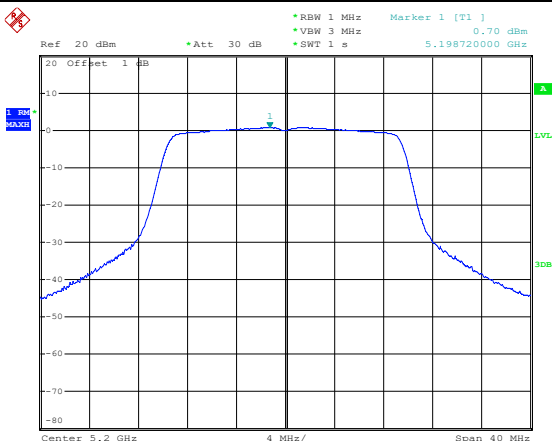
802.11ac-VHT40-High	 Ref 20 dBm *Att 30 dB *RBW 1 MHz *VBW 3 MHz *SWT 1 s Marker 1 [T1] 1.43 dBm 5.232560000 GHz Center 5.23 GHz 8 MHz/ Span 80 MHz Date: 8.FEB.2025 14:19:22
802.11ax-HE 20-Low	 Ref 20 dBm *Att 30 dB *RBW 1 MHz *VBW 3 MHz *SWT 1 s Marker 1 [T1] 1.61 dBm 5.181280000 GHz Center 5.18 GHz 4 MHz/ Span 40 MHz Date: 8.FEB.2025 14:24:21
802.11ax-HE 20-Middle	 Ref 20 dBm *Att 30 dB *RBW 1 MHz *VBW 3 MHz *SWT 1 s Marker 1 [T1] 0.70 dBm 5.198720000 GHz Center 5.2 GHz 4 MHz/ Span 40 MHz Date: 8.FEB.2025 14:23:23

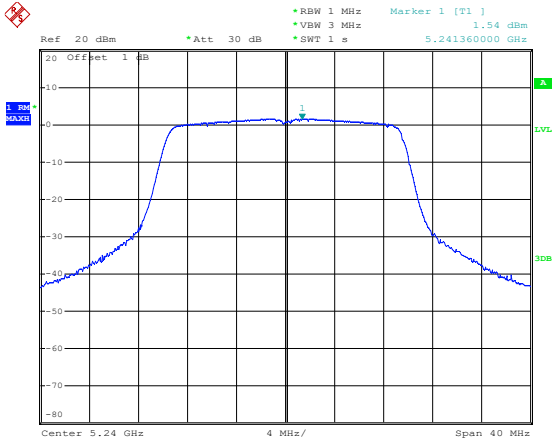
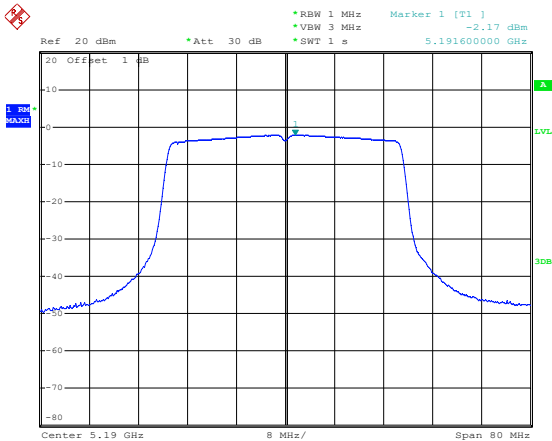
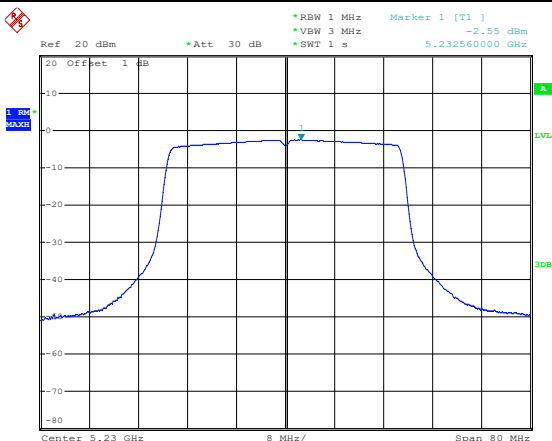
802.11ax-HE 20-High	 Date: 8.FEB.2025 14:22:15
802.11ax-HE40-Low	 Date: 8.FEB.2025 14:18:12
802.11ax-HE40-High	 Date: 8.FEB.2025 14:17:21




5725-5850MHz




802.11a-Low	Ref 20 dBm *Att 30 dB RBW 300 kHz Marker 1 [T1] -6.95 dBm VBW 1 MHz 5.741240000 GHz SWT 1 s 20 Offset 1 dB 1 RBW MAX 1 LVL 3dB Center 5.745 GHz 4 MHz/ Span 40 MHz Date: 7.FEB.2025 16:54:22
802.11a-Middle	Ref 20 dBm *Att 30 dB RBW 300 kHz Marker 1 [T1] -7.32 dBm VBW 1 MHz 5.777400000 GHz SWT 1 s 20 Offset 1 dB 1 RBW MAX 1 LVL 3dB Center 5.785 GHz 4 MHz/ Span 40 MHz Date: 7.FEB.2025 16:55:00
802.11a-High	Ref 20 dBm *Att 30 dB RBW 300 kHz Marker 1 [T1] -7.68 dBm VBW 1 MHz 5.822360000 GHz SWT 1 s 20 Offset 1 dB 1 RBW MAX 1 LVL 3dB Center 5.825 GHz 4 MHz/ Span 40 MHz Date: 7.FEB.2025 16:55:37

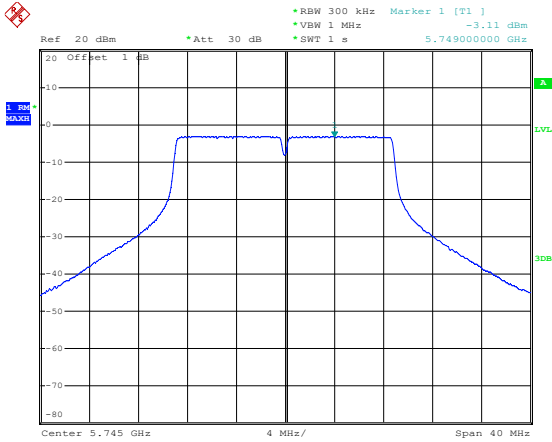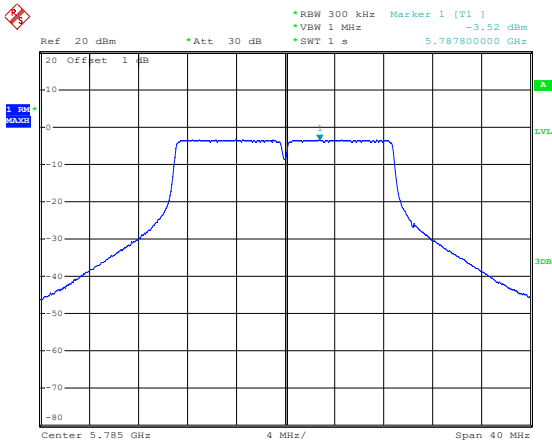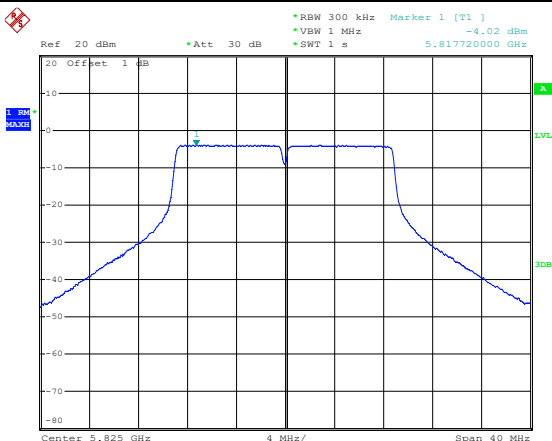802.11n-HT20-Low	 Ref 20 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] -3.11 dBm *VBW 1 MHz *SWT 1 s 5.74500000 GHz Center 5.745 GHz 4 MHz/ Span 40 MHz Date: 7.FEB.2025 16:51:52
802.11n-HT20-Middle	 Ref 20 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] -3.52 dBm *VBW 1 MHz *SWT 1 s 5.787800000 GHz Center 5.785 GHz 4 MHz/ Span 40 MHz Date: 7.FEB.2025 16:51:15
802.11n-HT20-High	 Ref 20 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] -4.02 dBm *VBW 1 MHz *SWT 1 s 5.817200000 GHz Center 5.825 GHz 4 MHz/ Span 40 MHz Date: 7.FEB.2025 16:50:42

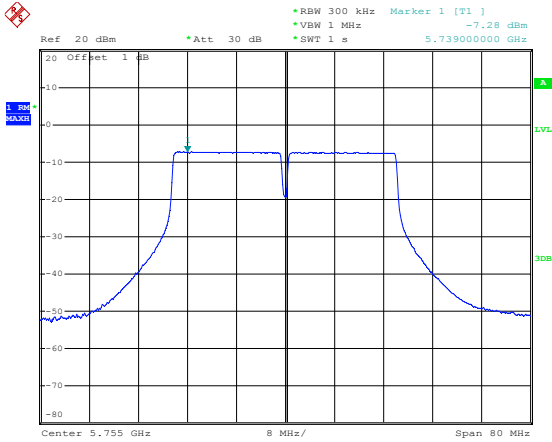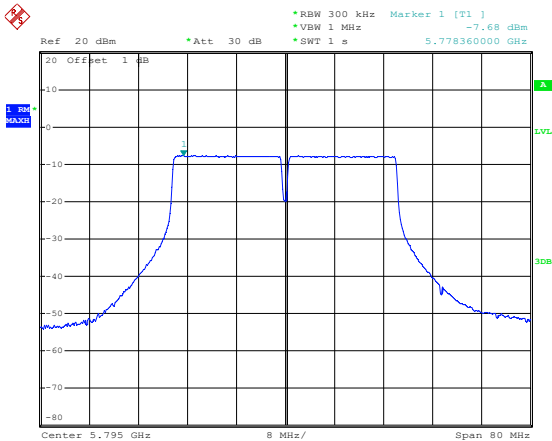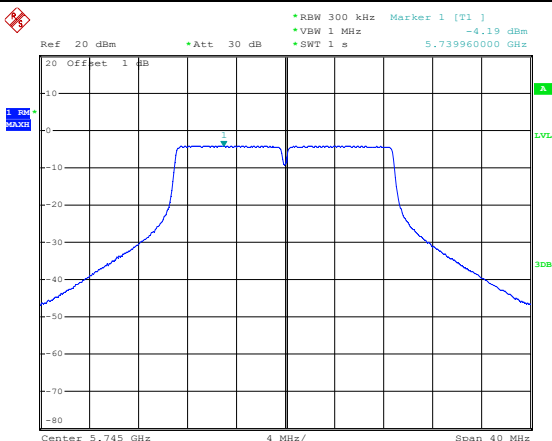802.11n-HT40-Low	 Ref 20 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] -7.28 dBm *VBW 1 MHz *SWT 1 s 5.73900000 GHz Center 5.755 GHz 8 MHz/ Span 80 MHz Date: 7.FEB.2025 16:43:51
802.11n-HT40-High	 Ref 20 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] -7.68 dBm *VBW 1 MHz *SWT 1 s 5.778360000 GHz Center 5.795 GHz 8 MHz/ Span 80 MHz Date: 7.FEB.2025 16:44:20
802.11ac-VHT20-Low	 Ref 20 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] -4.19 dBm *VBW 1 MHz *SWT 1 s 5.739960000 GHz Center 5.745 GHz 4 MHz/ Span 40 MHz Date: 7.FEB.2025 16:48:49

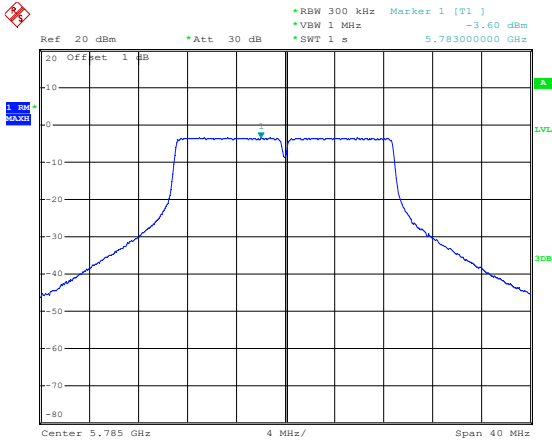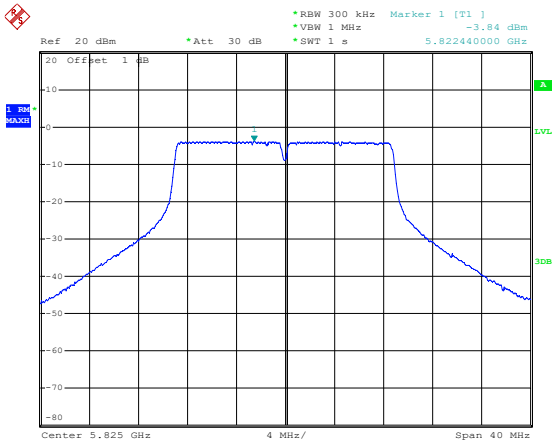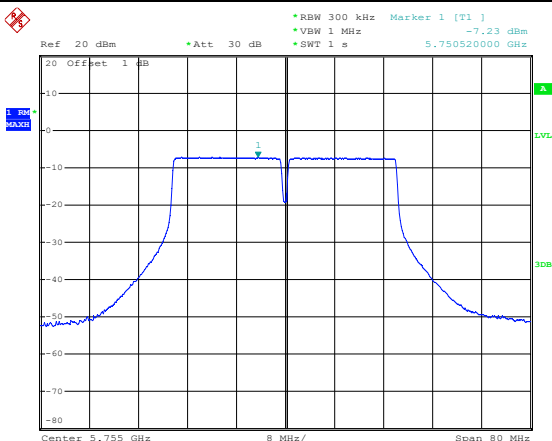802.11ac-VHT20-Middle	 Ref 20 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] -3.60 dBm *VBW 1 MHz *SWT 1 s 5.78300000 GHz Center 5.785 GHz 4 MHz/ Span 40 MHz Date: 7.FEB.2025 16:49:16
802.11ac-VHT20-High	 Ref 20 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] -3.84 dBm *VBW 1 MHz *SWT 1 s 5.82244000 GHz Center 5.825 GHz 4 MHz/ Span 40 MHz Date: 7.FEB.2025 16:49:41
802.11ac-VHT40-Low	 Ref 20 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] -7.23 dBm *VBW 1 MHz *SWT 1 s 5.750520000 GHz Center 5.755 GHz 8 MHz/ Span 80 MHz Date: 7.FEB.2025 16:42:54

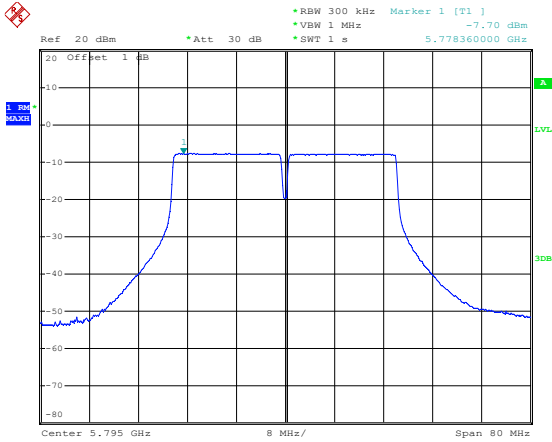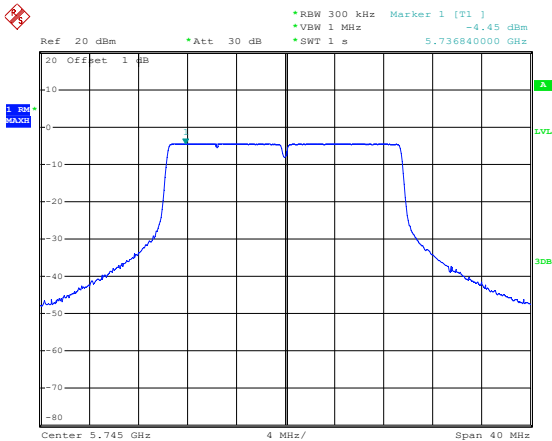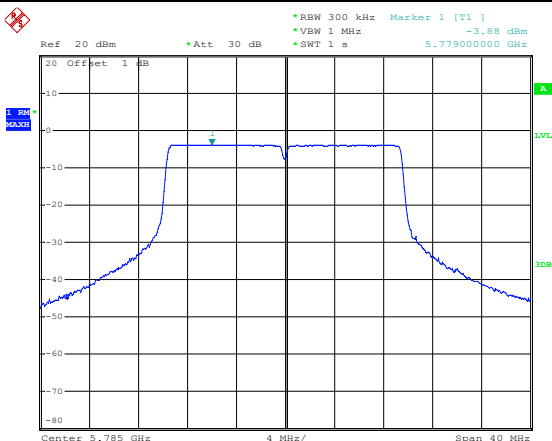802.11ac-VHT40-High	 Ref 20 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] -7.70 dBm *VBW 1 MHz *SWT 1 s 5.778360000 GHz Center 5.795 GHz 8 MHz/ Span 80 MHz Date: 7.FEB.2025 16:42:15
802.11ax-HE 20-Low	 Ref 20 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] -4.45 dBm *VBW 1 MHz *SWT 1 s 5.736840000 GHz Center 5.745 GHz 4 MHz/ Span 40 MHz Date: 7.FEB.2025 16:48:13
802.11ax-HE 20-Middle	 Ref 20 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] -3.88 dBm *VBW 1 MHz *SWT 1 s 5.779000000 GHz Center 5.785 GHz 4 MHz/ Span 40 MHz Date: 7.FEB.2025 16:47:23

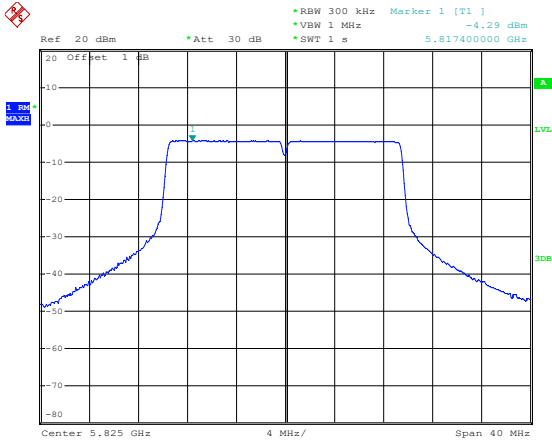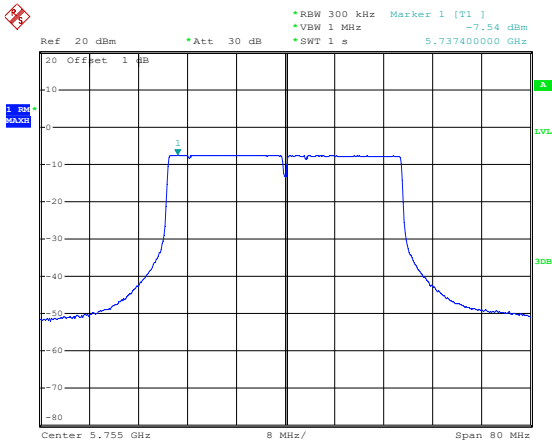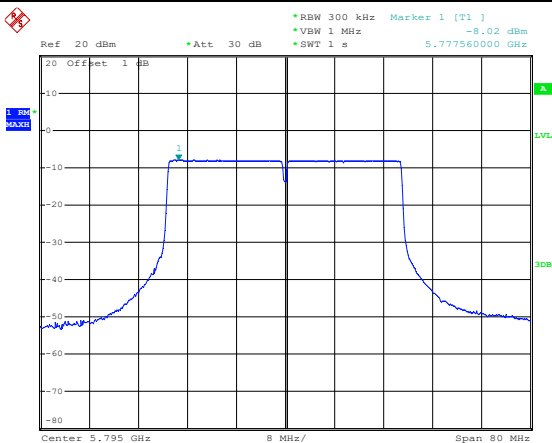802.11ax-HE 20-High	 Date: 7.FEB.2025 16:46:28
802.11ax-HE40-Low	 Date: 7.FEB.2025 16:40:25
802.11ax-HE40-High	 Date: 7.FEB.2025 16:41:17

APPENDIX B

Emission Bandwidth and Occupied Bandwidth

U-NII-1:5150-5250MHz				
Test Mode	Test Channel MHz	26 dB Bandwidth MHz	99% Bandwidth MHz	Limit MHz
802.11a	5180	23.60	17.20	Pass
	5200	24.80	17.12	Pass
	5240	23.70	17.12	Pass
802.11n-HT20	5180	27.36	18.64	Pass
	5200	26.52	18.64	Pass
	5240	26.88	18.56	Pass
802.11n-HT40	5190	43.20	38.08	Pass
	5230	45.00	38.24	Pass
802.11ac-VHT20	5180	27.36	18.64	Pass
	5200	27.24	18.64	Pass
	5240	26.64	18.56	Pass
802.11ac-VHT40	5190	44.60	37.92	Pass
	5230	44.60	38.08	Pass
802.11ax-HE20	5180	25.92	19.36	Pass
	5200	25.68	19.36	Pass
	5240	25.56	19.44	Pass
802.11ax-HE40	5190	43.20	39.04	Pass
	5230	43.60	38.88	Pass


U-NII-3: 5725-5850MHz				
Test Mode	Test Channel MHz	6 dB Bandwidth MHz	99% Bandwidth MHz	Limit MHz
802.11a	5745	16.64	17.28	≥500
	5785	16.56	17.28	≥500
	5825	16.56	17.36	≥500
802.11n-HT20	5745	17.84	18.88	≥500
	5785	17.84	18.80	≥500
	5825	17.84	18.88	≥500

802.11n-HT40	5755	36.80	38.72	≥500
	5795	36.64	38.56	≥500
802.11ac-VHT20	5745	17.84	18.80	≥500
	5785	17.76	18.88	≥500
	5825	17.76	18.80	≥500
802.11ac-VHT40	5755	36.80	38.56	≥500
	5795	36.64	38.40	≥500
802.11ax-HE20	5745	19.20	19.68	≥500
	5785	19.20	19.68	≥500
	5825	19.28	19.52	≥500
802.11ax-HE40	5755	38.56	39.20	≥500
	5795	38.56	39.20	≥500


26 dB Bandwidth
5150-5250MHz

802.11a-Low	Date: 8.FEB.2025 14:53:03
802.11a-Middle	Date: 8.FEB.2025 14:53:37
802.11a-High	Date: 8.FEB.2025 14:54:16

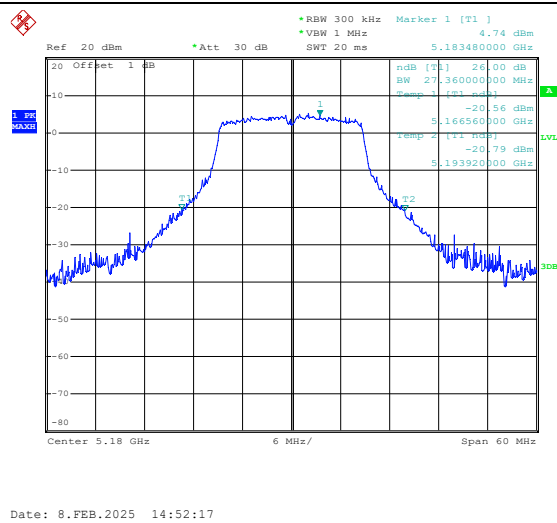
802.11n-HT20-Low



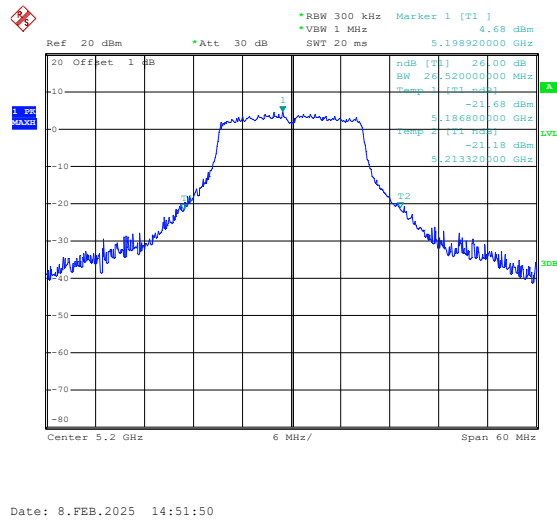802.11n-HT20-Middle



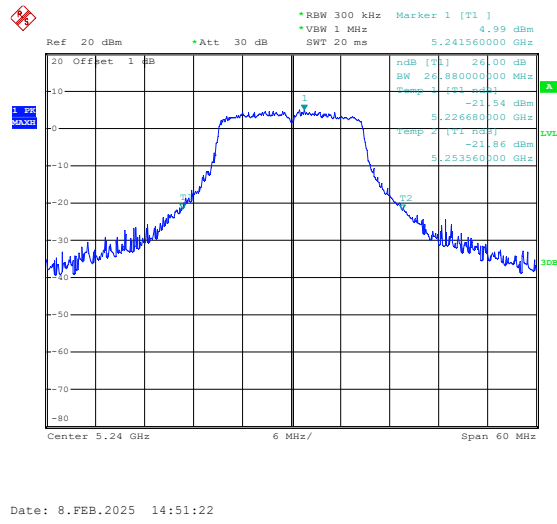802.11n-HT20-High



802.11n-HT40-Low

Ref 20 dBm Att 30 dB RBW 300 kHz VBW 1 MHz SWT 20 ms Marker 1 [T1] 5.19500000 GHz 2.99 dBm

20 Offset 1 dB

10 MHz/ Span 100 MHz

Center 5.19 GHz

802.11n-HT40-High

Ref 20 dBm Att 30 dB RBW 300 kHz VBW 1 MHz SWT 20 ms Marker 1 [T1] 5.23640000 GHz 1.65 dBm

20 Offset 1 dB

10 MHz/ Span 100 MHz

Center 5.23 GHz

802.11ac-VHT20-Low




Ref 20 dBm Att 30 dB RBW 300 kHz VBW 1 MHz SWT 20 ms Marker 1 [T1] 5.17720000 GHz 4.96 dBm

20 Offset 1 dB



6 MHz/ Span 60 MHz

Center 5.18 GHz



802.11ac-VHT20-Middle	Ref 20 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] 4.01 dBm *VBW 1 MHz SWT 20 ms 5.197960000 GHz ndB [T1] 26.60 dB BW 27.240000000 MHz Samp 1 [T1] 44.01 dBm 5.186320000 GHz -22.54 dBm Samp 2 [T1] 44.01 dBm -21.91 dBm 5.213560000 GHz Center 5.2 GHz 6 MHz/ Span 60 MHz Date: 8.FEB.2025 14:50:06
802.11ac-VHT20-High	Ref 20 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] 4.77 dBm *VBW 1 MHz SWT 20 ms 5.240840000 GHz ndB [T1] 26.60 dB BW 26.640000000 MHz Samp 1 [T1] 44.01 dBm 5.226800000 GHz -21.60 dBm Samp 2 [T1] 44.01 dBm -20.96 dBm 5.253440000 GHz Center 5.24 GHz 6 MHz/ Span 60 MHz Date: 8.FEB.2025 14:50:47
802.11ac-VHT40-Low	Ref 20 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] 0.21 dBm *VBW 1 MHz SWT 20 ms 5.184600000 GHz ndB [T1] 26.60 dB BW 44.600000000 MHz Samp 1 [T1] 44.01 dBm 5.167800000 GHz -27.22 dBm Samp 2 [T1] 44.01 dBm -26.39 dBm 5.212400000 GHz Center 5.19 GHz 10 MHz/ Span 100 MHz Date: 8.FEB.2025 14:45:08

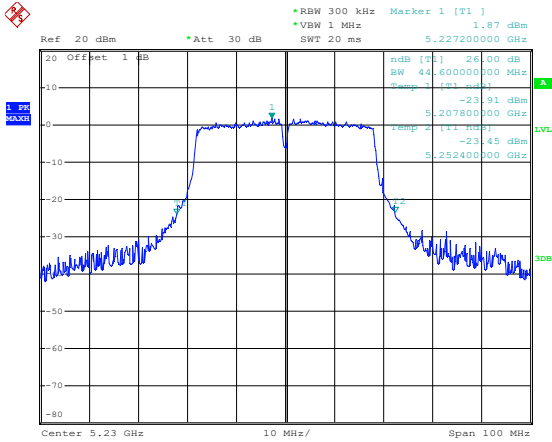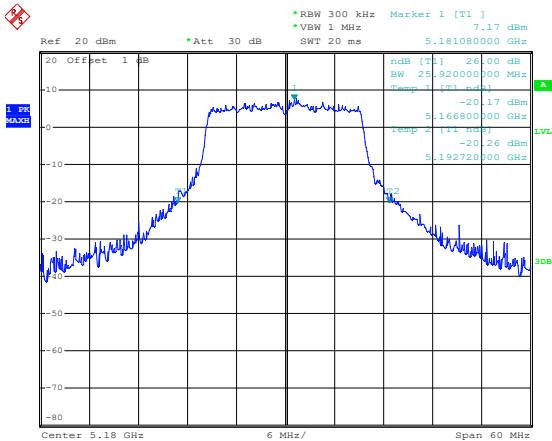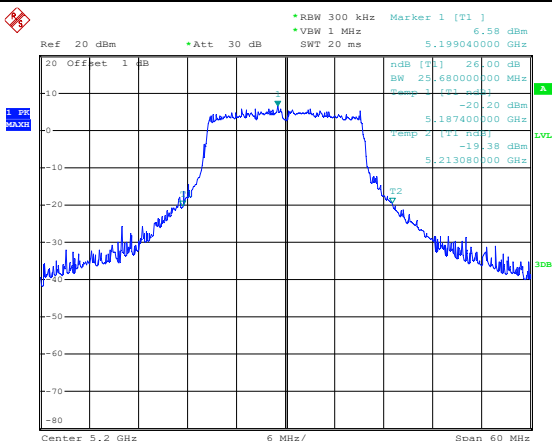802.11ac-VHT40-High	 Ref 20 dBm *Att 30 dB SWT 20 ms 5.227200000 GHz ndB [T1] 26.00 dB BW 40.60000000 MHz Temp 1 [T1] -23.91 dBm 5.207800000 GHz Temp 2 [T2] -23.45 dBm 5.252400000 GHz Center 5.23 GHz 10 MHz/ Span 100 MHz Date: 8.FEB.2025 14:45:38
802.11ax-HE 20-Low	 Ref 20 dBm *Att 30 dB SWT 20 ms 5.181080000 GHz ndB [T1] 26.00 dB BW 25.92000000 MHz Temp 1 [T1] -20.17 dBm 5.166800000 GHz Temp 2 [T2] -20.26 dBm 5.192720000 GHz Center 5.18 GHz 6 MHz/ Span 60 MHz Date: 8.FEB.2025 14:49:01
802.11ax-HE 20-Middle	 Ref 20 dBm *Att 30 dB SWT 20 ms 5.199040000 GHz ndB [T1] 26.00 dB BW 25.68000000 MHz Temp 1 [T1] -20.20 dBm 5.187400000 GHz Temp 2 [T2] -19.38 dBm 5.213080000 GHz Center 5.2 GHz 6 MHz/ Span 60 MHz Date: 8.FEB.2025 14:48:27



802.11ax-HE 20-High	Date: 8.FEB.2025 14:47:57
802.11ax-HE40-Low	Date: 8.FEB.2025 14:44:35
802.11ax-HE40-High	Date: 8.FEB.2025 14:44:05

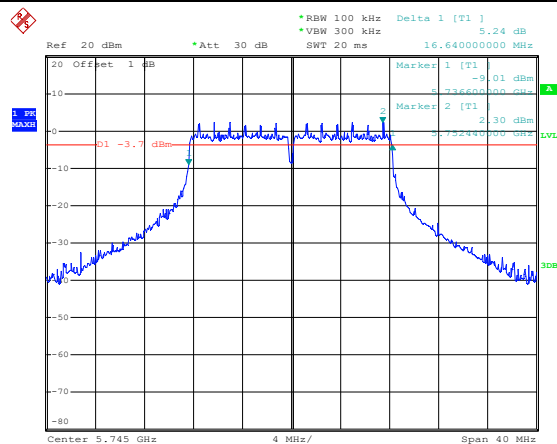




Date: 7.FEB.2025 17:25:59


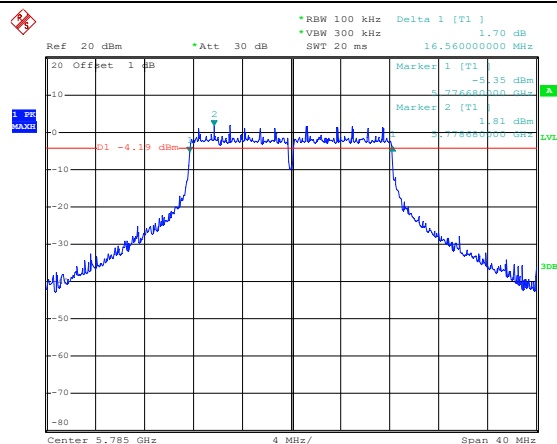






Date: 7.FEB.2025 17:26:55


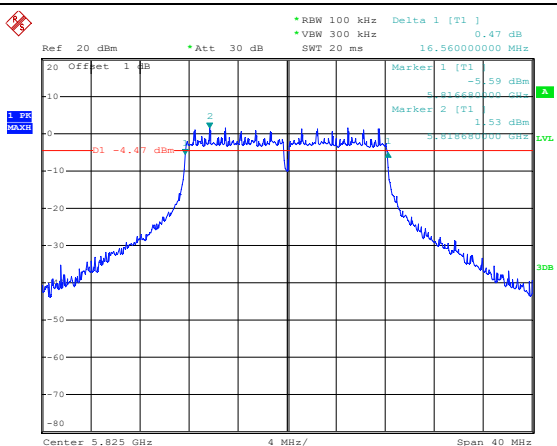






Date: 7.FEB.2025 17:27:49

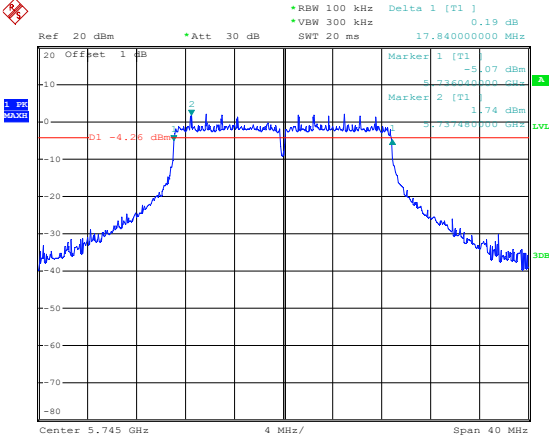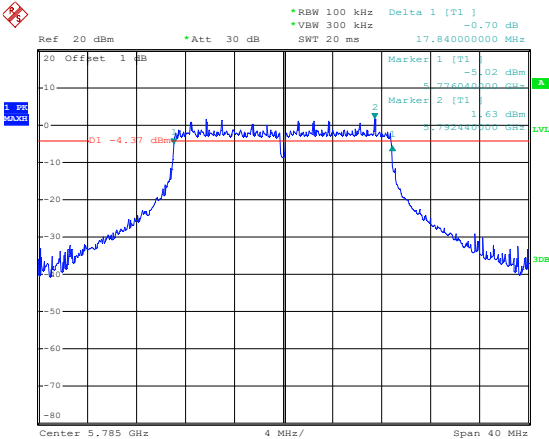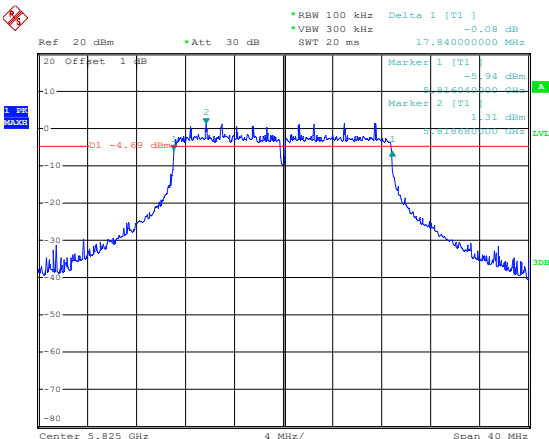802.11n-HT20-Low	 Date: 7.FEB.2025 17:24:43
802.11n-HT20-Middle	 Date: 7.FEB.2025 17:23:56
802.11n-HT20-High	 Date: 7.FEB.2025 17:23:01

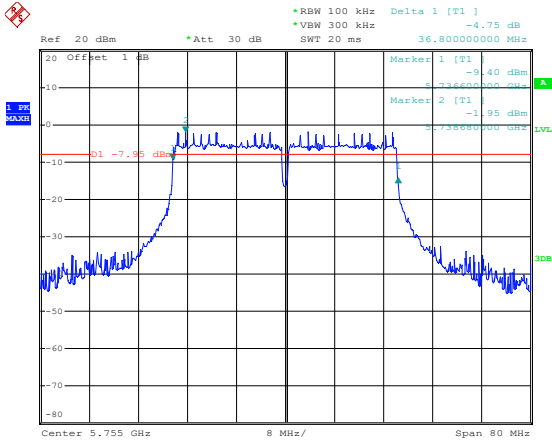
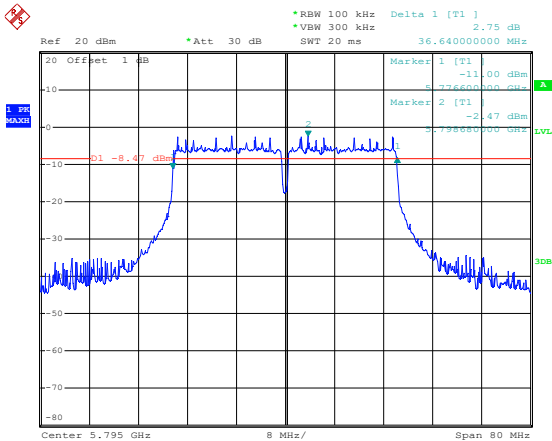
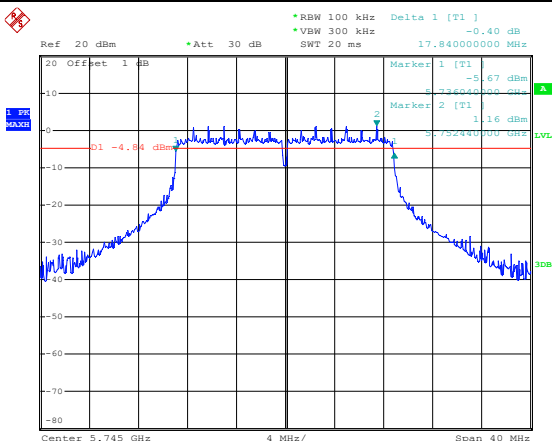
802.11n-HT40-Low	 Ref 20 dBm *Att 30 dB RBW 100 kHz VBW 300 kHz SWT 20 ms Delta 1 [T1] -4.75 dB Marker 1 [T1] -9.40 dBm 5.75600000 GHz Marker 2 [T1] -1.95 dBm 5.75600000 GHz OL -7.95 dBm Center 5.755 GHz 8 MHz/ Span 80 MHz Date: 7.FEB.2025 17:15:37
802.11n-HT40-High	 Ref 20 dBm *Att 30 dB RBW 100 kHz VBW 300 kHz SWT 20 ms Delta 1 [T1] 2.75 dB Marker 1 [T1] -11.00 dBm 5.79600000 GHz Marker 2 [T1] -2.47 dBm 5.79600000 GHz OL -8.47 dBm Center 5.795 GHz 8 MHz/ Span 80 MHz Date: 7.FEB.2025 17:14:42
802.11ac-VHT20-Low	 Ref 20 dBm *Att 30 dB RBW 100 kHz VBW 300 kHz SWT 20 ms Delta 1 [T1] -0.40 dB Marker 1 [T1] -5.67 dBm 5.74600000 GHz Marker 2 [T1] 1.16 dBm 5.74600000 GHz OL -4.84 dBm Center 5.745 GHz 4 MHz/ Span 40 MHz Date: 7.FEB.2025 17:20:10

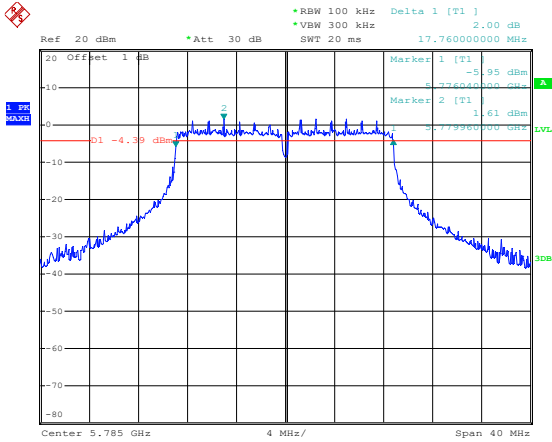
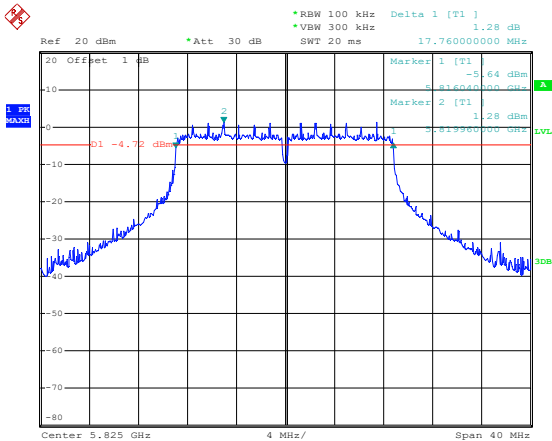
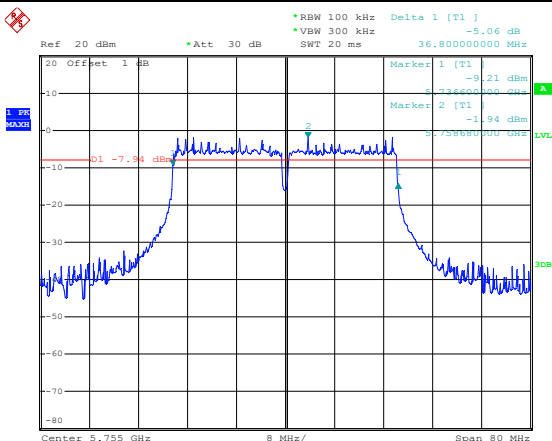
802.11ac-VHT20-Middle	 Ref 20 dBm *Att 30 dB SWT 20 ms 17.760000000 MHz Marker 1 [T1] -1.95 dBm Marker 2 [T1] 1.61 dBm Center 5.785 GHz 4 MHz/ Span 40 MHz Date: 7.FEB.2025 17:21:16
802.11ac-VHT20-High	 Ref 20 dBm *Att 30 dB SWT 20 ms 17.760000000 MHz Marker 1 [T1] -5.64 dBm Marker 2 [T1] 1.28 dBm Center 5.825 GHz 4 MHz/ Span 40 MHz Date: 7.FEB.2025 17:22:12
802.11ac-VHT40-Low	 Ref 20 dBm *Att 30 dB SWT 20 ms 36.800000000 MHz Marker 1 [T1] -9.21 dBm Marker 2 [T1] -1.94 dBm Center 5.755 GHz 8 MHz/ Span 80 MHz Date: 7.FEB.2025 17:13:01

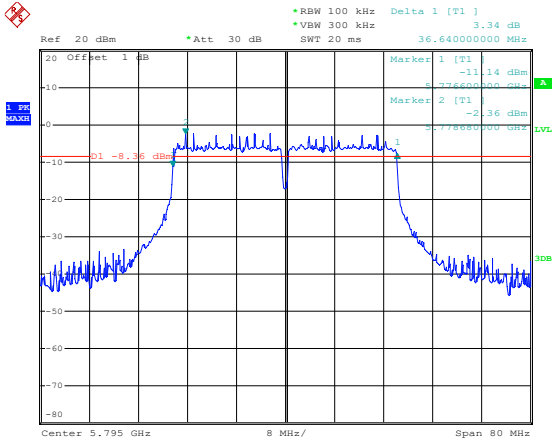
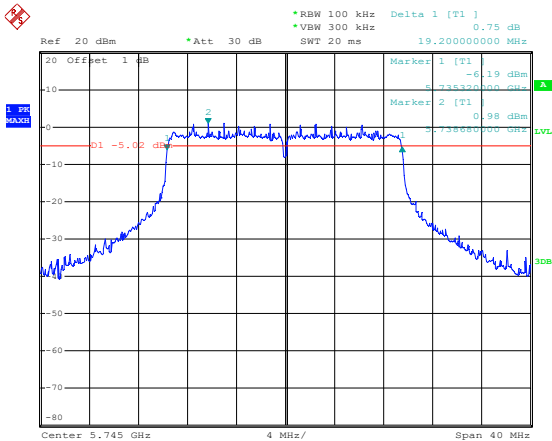
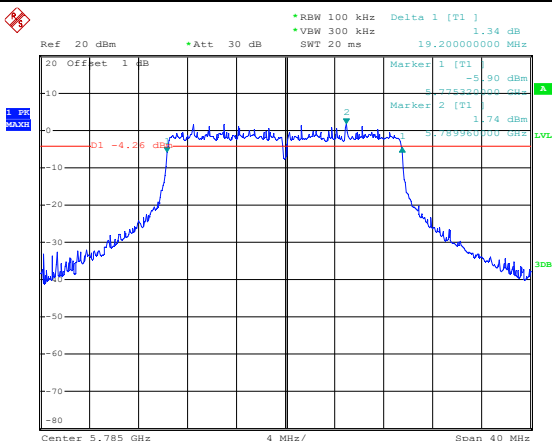
802.11ac-VHT40-High	 Ref 20 dBm *Att 30 dB RBW 100 kHz Delta 1 [T1] 3.34 dB VBW 300 kHz SWT 20 ms 36.64000000 MHz Marker 1 [T1] -11.14 dBm Marker 2 [T1] -2.36 dBm Center 5.795 GHz 8 MHz/ Span 80 MHz Date: 7.FEB.2025 17:13:54
802.11ax-HE 20-Low	 Ref 20 dBm *Att 30 dB RBW 100 kHz Delta 1 [T1] 0.75 dB VBW 300 kHz SWT 20 ms 19.20000000 MHz Marker 1 [T1] -6.19 dBm Marker 2 [T1] 0.98 dBm Center 5.745 GHz 4 MHz/ Span 40 MHz Date: 7.FEB.2025 17:18:51
802.11ax-HE 20-Middle	 Ref 20 dBm *Att 30 dB RBW 100 kHz Delta 1 [T1] 1.34 dB VBW 300 kHz SWT 20 ms 19.20000000 MHz Marker 1 [T1] -5.90 dBm Marker 2 [T1] 1.74 dBm Center 5.785 GHz 4 MHz/ Span 40 MHz Date: 7.FEB.2025 17:18:02

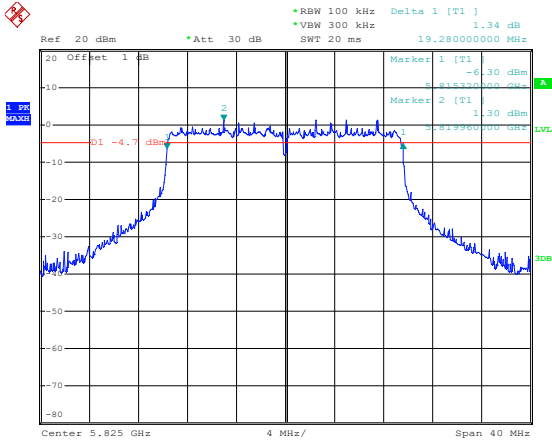
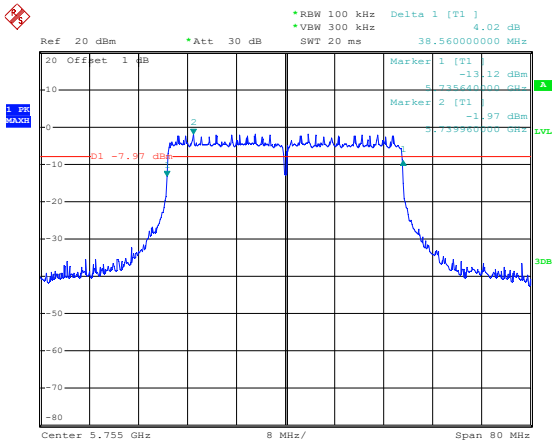
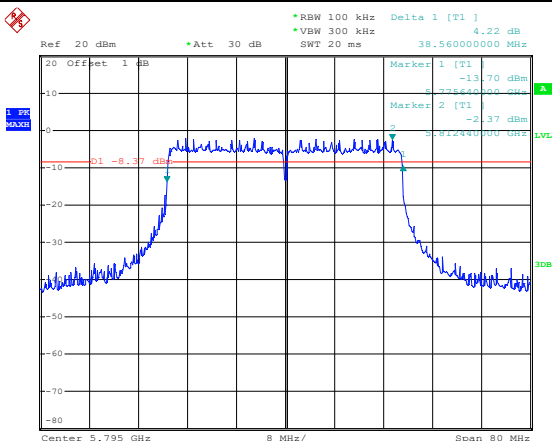
802.11ax-HE 20-High	 Ref 20 dBm *Att 30 dB SWT 20 ms 19.280000000 MHz Marker 1 [T1] -6.30 dBm 5.813300000 GHz Marker 2 [T1] 1.30 dBm 5.819900000 GHz Center 5.825 GHz 4 MHz/ Span 40 MHz Date: 7.FEB.2025 17:17:14
802.11ax-HE40-Low	 Ref 20 dBm *Att 30 dB SWT 20 ms 38.560000000 MHz Marker 1 [T1] -13.12 dBm 5.735640000 GHz Marker 2 [T1] -1.97 dBm 5.739960000 GHz Center 5.755 GHz 8 MHz/ Span 80 MHz Date: 7.FEB.2025 17:12:03
802.11ax-HE40-High	 Ref 20 dBm *Att 30 dB SWT 20 ms 38.560000000 MHz Marker 1 [T1] -13.70 dBm 5.735640000 GHz Marker 2 [T1] -2.37 dBm 5.742440000 GHz Center 5.795 GHz 8 MHz/ Span 80 MHz Date: 7.FEB.2025 17:08:55

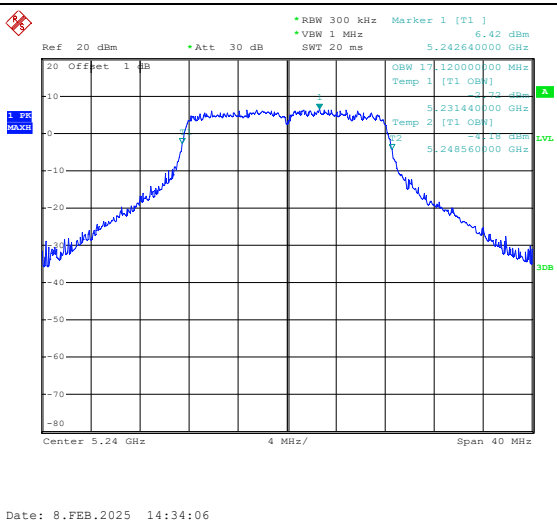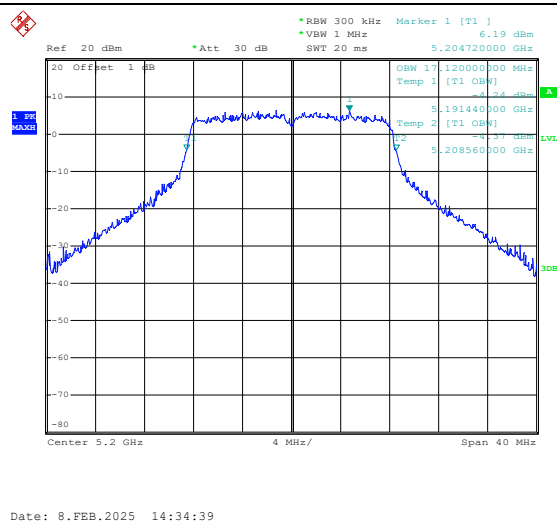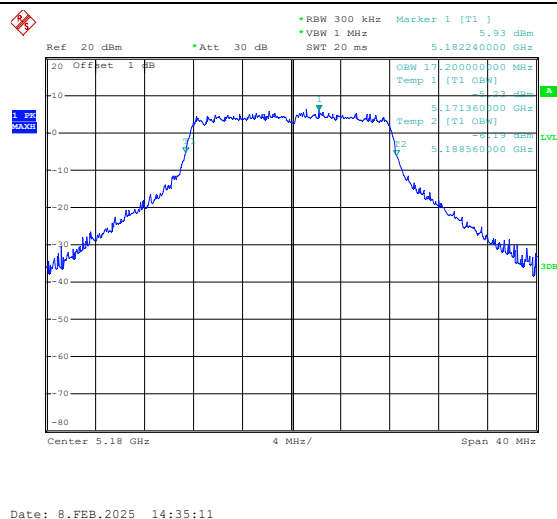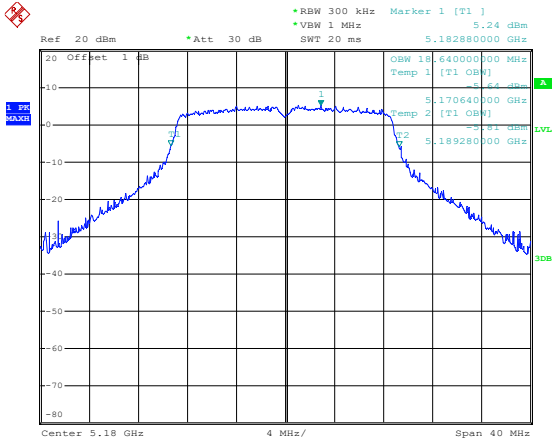
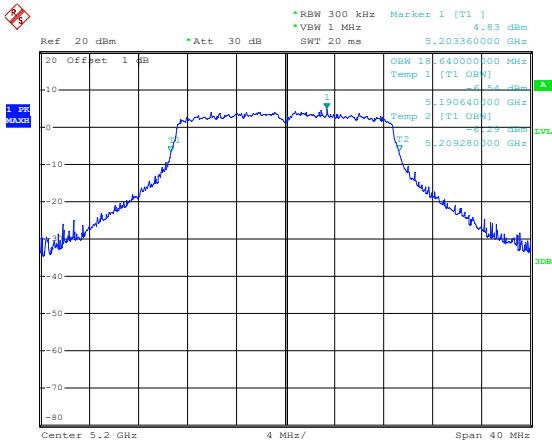
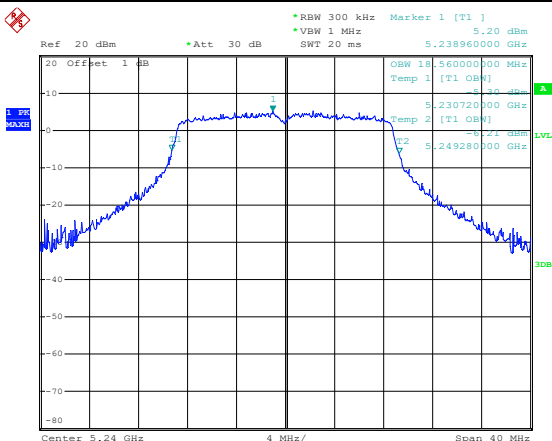
99% Bandwidth
5150-5250MHz






802.11n-HT20-Low	 Date: 8.FEB.2025 14:35:40
802.11n-HT20-Middle	 Date: 8.FEB.2025 14:36:08
802.11n-HT20-High	 Date: 8.FEB.2025 14:36:36

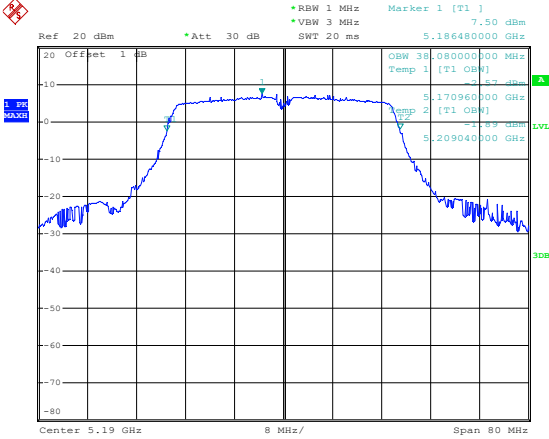
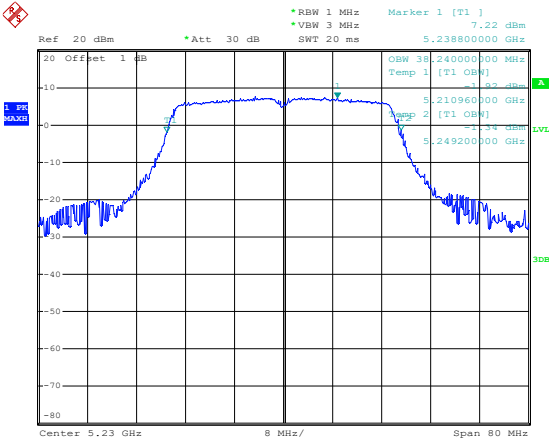
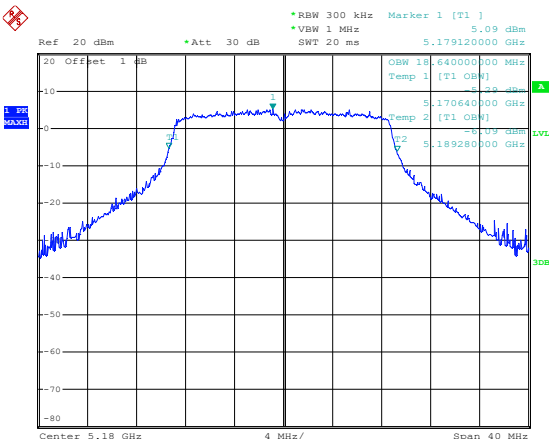
802.11n-HT40-Low	 Date: 8.FEB.2025 14:40:26
802.11n-HT40-High	 Date: 8.FEB.2025 14:40:59
802.11ac-VHT20-Low	 Date: 8.FEB.2025 14:38:01

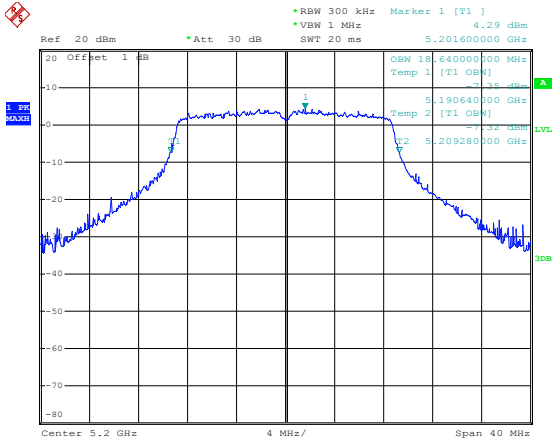
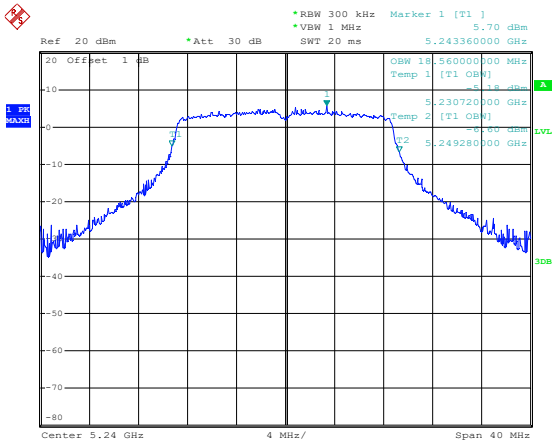
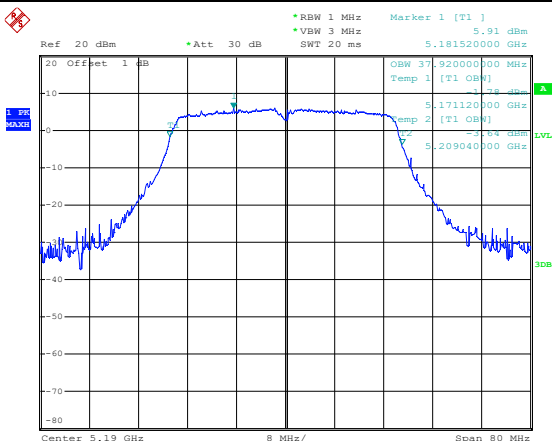
802.11ac-VHT20-Middle	 Date: 8.FEB.2025 14:37:30
802.11ac-VHT20-High	 Date: 8.FEB.2025 14:37:05
802.11ac-VHT40-Low	 Date: 8.FEB.2025 14:42:05

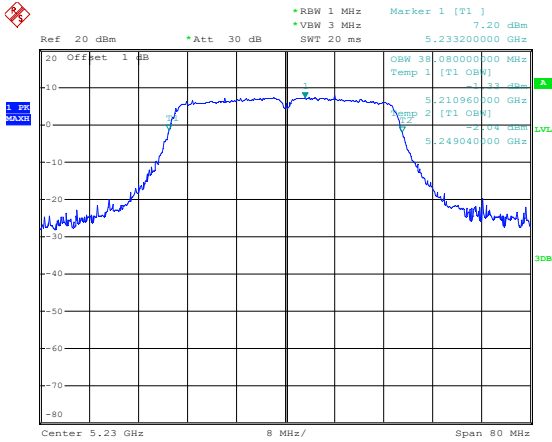
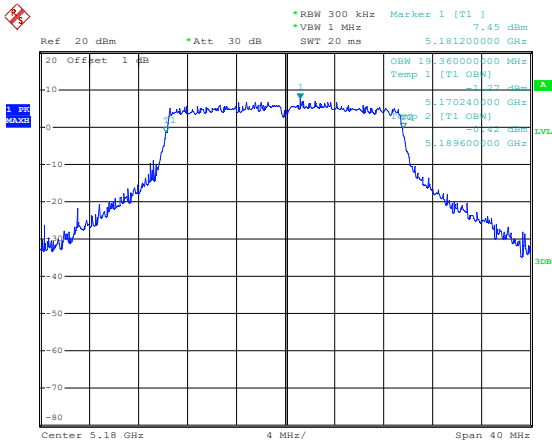
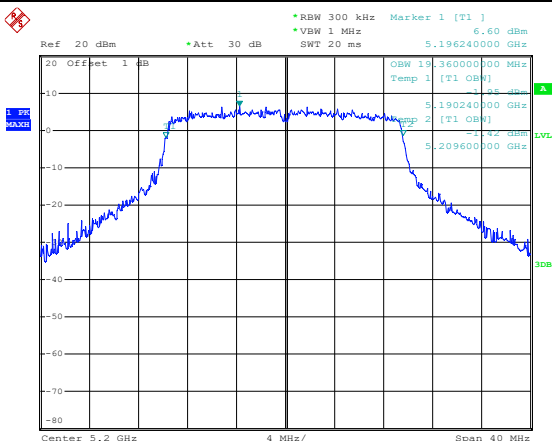
802.11ac-VHT40-High	 Date: 8.FEB.2025 14:41:35
802.11ax-HE 20-Low	 Date: 8.FEB.2025 14:38:29
802.11ax-HE 20-Middle	 Date: 8.FEB.2025 14:38:58

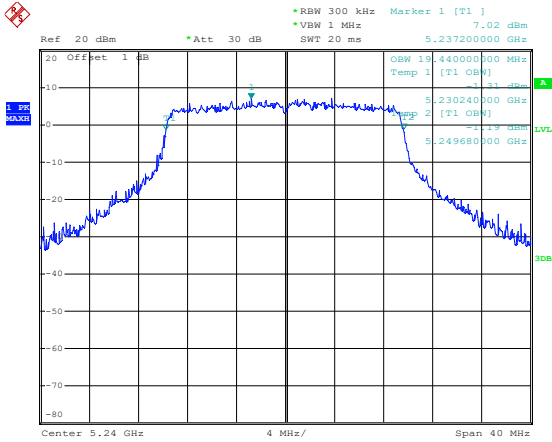
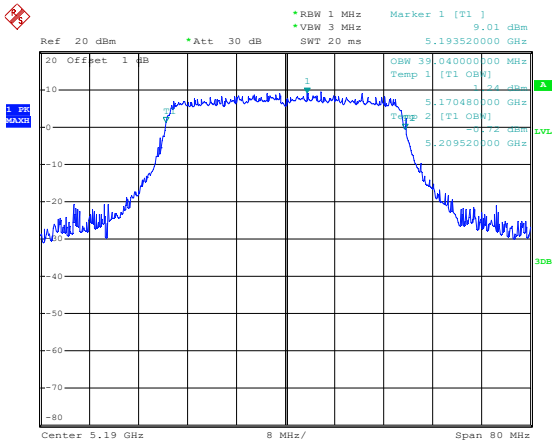
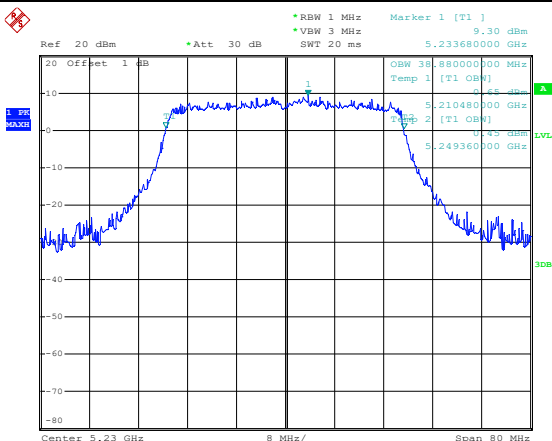
802.11ax-HE 20-High	 Ref 20 dBm *Att 30 dB SWT 20 ms 5.237200000 GHz Marker 1 [T1] OBW 19.44000000 MHz Temp 1 [T1 OBW] 9.01 dBm 5.230240000 GHz Temp 2 [T1 OBW] 5.249680000 GHz Center 5.24 GHz 4 MHz/ Span 40 MHz Date: 8.FEB.2025 14:39:30
802.11ax-HE40-Low	 Ref 20 dBm *Att 30 dB SWT 20 ms 5.193520000 GHz Marker 1 [T1] OBW 38.88000000 MHz Temp 1 [T1 OBW] 9.01 dBm 5.170480000 GHz Temp 2 [T1 OBW] 5.209520000 GHz Center 5.19 GHz 8 MHz/ Span 80 MHz Date: 8.FEB.2025 14:42:37
802.11ax-HE40-High	 Ref 20 dBm *Att 30 dB SWT 20 ms 5.233680000 GHz Marker 1 [T1] OBW 38.88000000 MHz Temp 1 [T1 OBW] 9.30 dBm 5.210480000 GHz Temp 2 [T1 OBW] 5.249360000 GHz Center 5.23 GHz 8 MHz/ Span 80 MHz Date: 8.FEB.2025 14:43:15

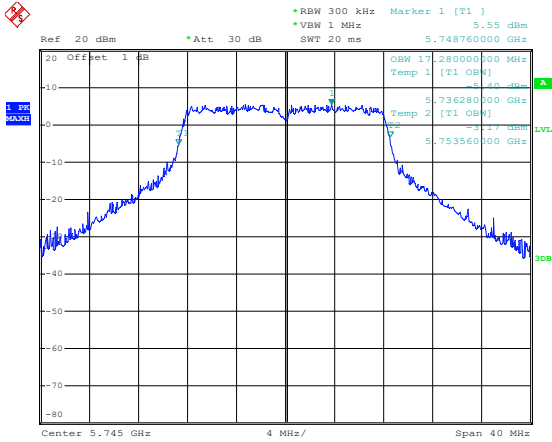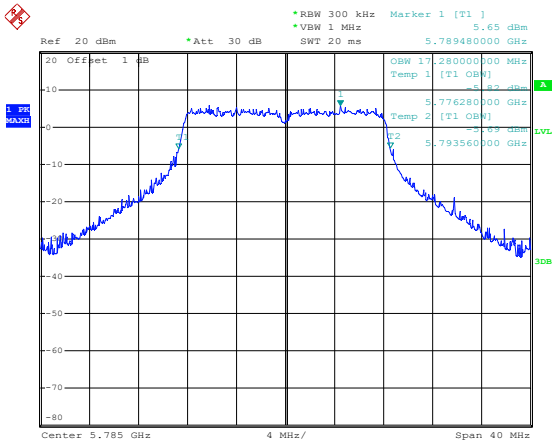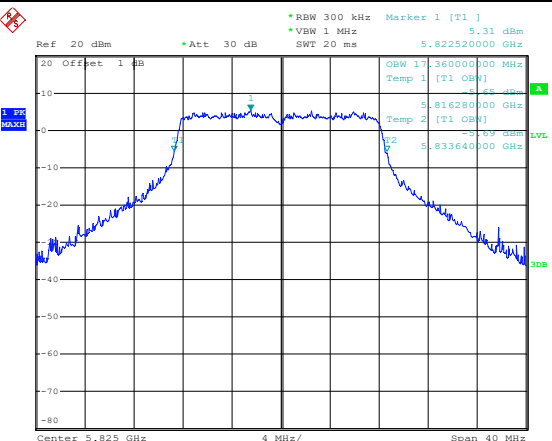99% dB Bandwidth
5725-5850MHz

802.11a-Low	 Date: 7.FEB.2025 16:59:19
802.11a-Middle	 Date: 7.FEB.2025 16:58:54
802.11a-High	 Date: 7.FEB.2025 16:58:20

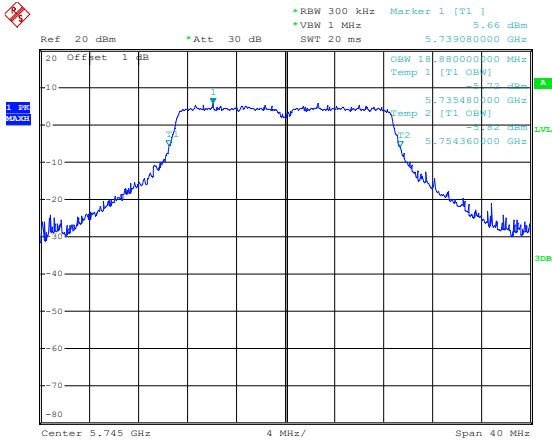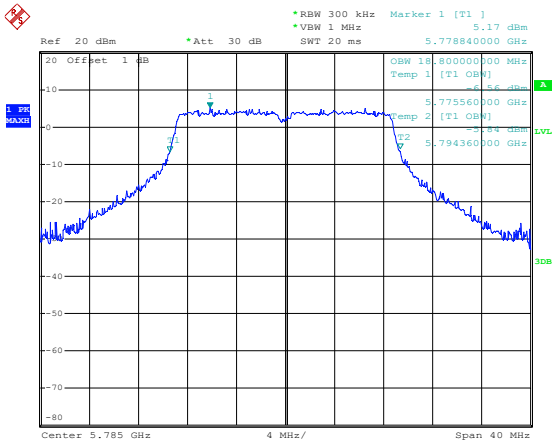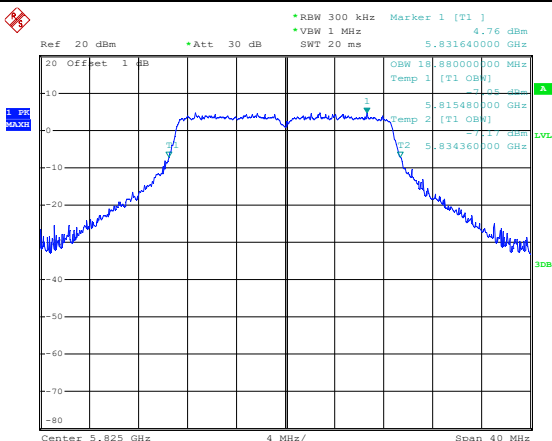802.11n-HT20-Low	 Ref 20 dBm *Att 30 dB SWT 20 ms 5.739080000 GHz Marker 1 [T1] 5.66 dBm OSW 18.880000000 MHz Temp 1 [T1 OSW] -5.66 dBm 5.735480000 GHz Temp 2 [T1 OSW] -5.66 dBm 5.754360000 GHz Center 5.745 GHz 4 MHz/ Span 40 MHz Date: 7.FEB.2025 16:59:49
802.11n-HT20-Middle	 Ref 20 dBm *Att 30 dB SWT 20 ms 5.778840000 GHz Marker 1 [T1] 5.17 dBm OSW 18.880000000 MHz Temp 1 [T1 OSW] -5.17 dBm 5.775560000 GHz Temp 2 [T1 OSW] -5.17 dBm 5.794360000 GHz Center 5.785 GHz 4 MHz/ Span 40 MHz Date: 7.FEB.2025 17:00:16
802.11n-HT20-High	 Ref 20 dBm *Att 30 dB SWT 20 ms 5.831640000 GHz Marker 1 [T1] 4.76 dBm OSW 18.880000000 MHz Temp 1 [T1 OSW] -4.76 dBm 5.815480000 GHz Temp 2 [T1 OSW] -4.76 dBm 5.834360000 GHz Center 5.825 GHz 4 MHz/ Span 40 MHz Date: 7.FEB.2025 17:00:43

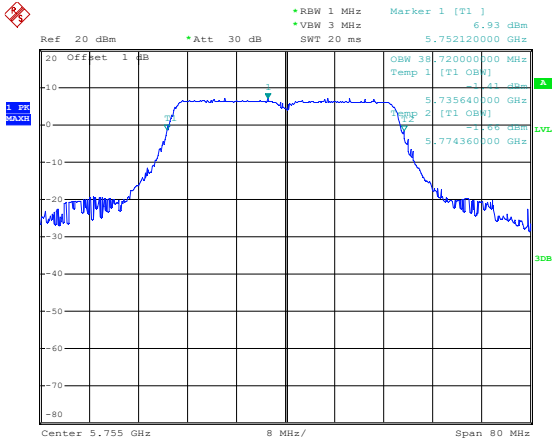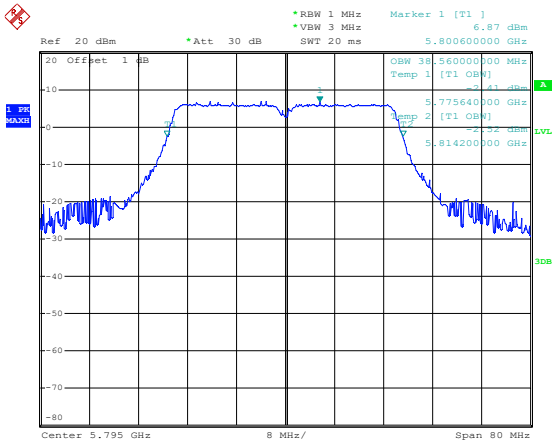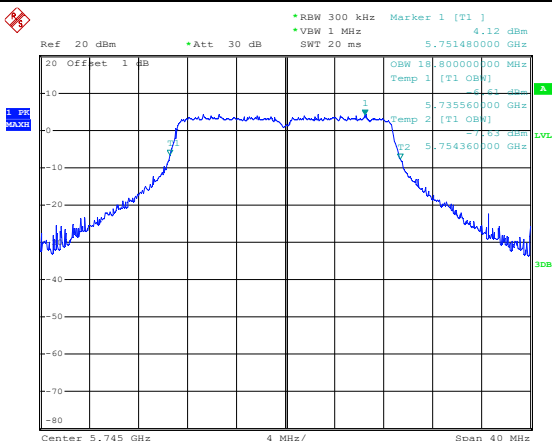802.11n-HT40-Low	 Date: 7.FEB.2025 17:04:23
802.11n-HT40-High	 Date: 7.FEB.2025 17:04:55
802.11ac-VHT20-Low	 Date: 7.FEB.2025 17:02:05

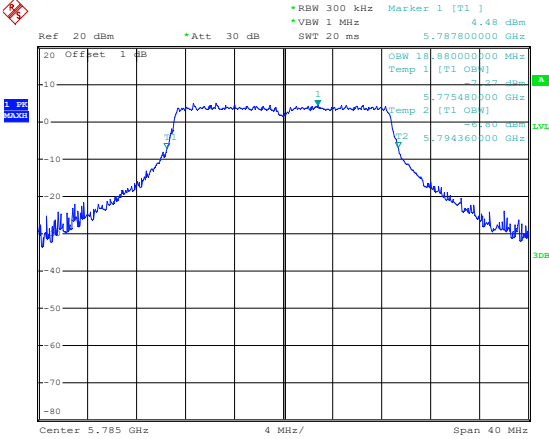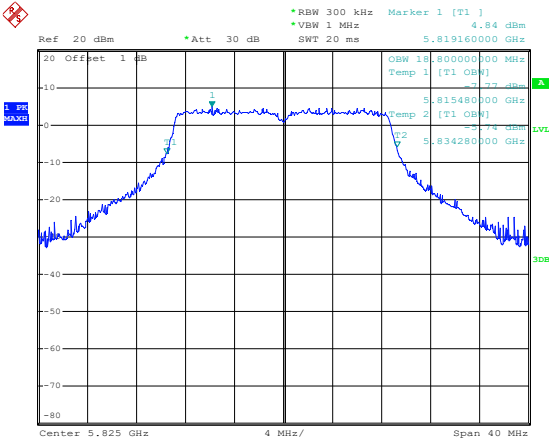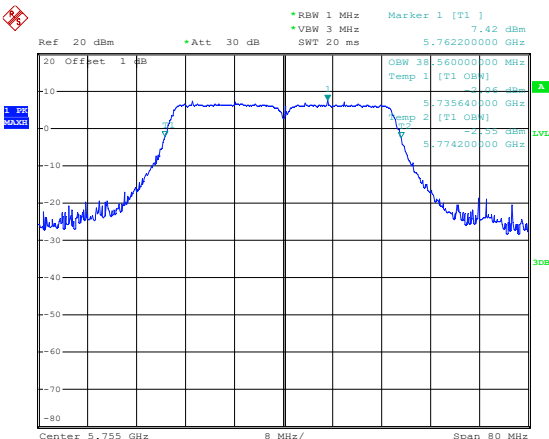802.11ac-VHT20-Middle	 Date: 7.FEB.2025 17:01:39
802.11ac-VHT20-High	 Date: 7.FEB.2025 17:01:15
802.11ac-VHT40-Low	 Date: 7.FEB.2025 17:05:51

802.11ac-VHT40-High

Ref: 20 dBm, Att: 30 dB, RBW: 1 MHz, VBW: 3 MHz, SWT: 20 ms, Marker 1 [T1], 5.79036000 GHz, 7.01 dBm

OSW: 38.40000000 MHz, Temp: 1 [T1: OSW], 1.93 dBm

5.77564000 GHz, 5.79036000 GHz, 5.81404000 GHz

Center: 5.795 GHz, Span: 80 MHz

Date: 7.FEB.2025 17:05:25

802.11ax-HE 20-Low

Ref: 20 dBm, Att: 30 dB, RBW: 300 kHz, VBW: 1 MHz, SWT: 20 ms, Marker 1 [T1], 5.73916000 GHz, 5.91 dBm

OSW: 19.68000000 MHz, Temp: 1 [T1: OSW], 1.18 dBm

5.73508000 GHz, 5.75080000 GHz, 5.75476000 GHz

Center: 5.745 GHz, Span: 40 MHz

Date: 7.FEB.2025 17:02:38

802.11ax-HE 20-Middle

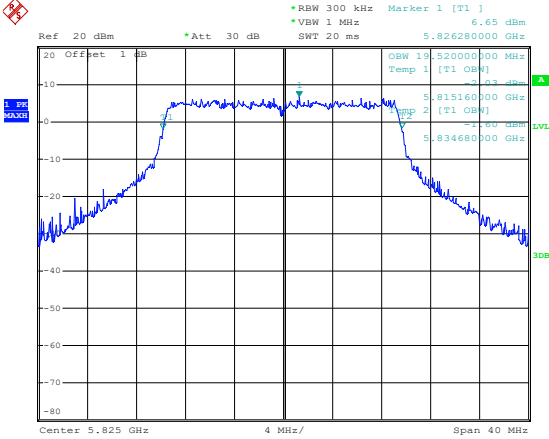
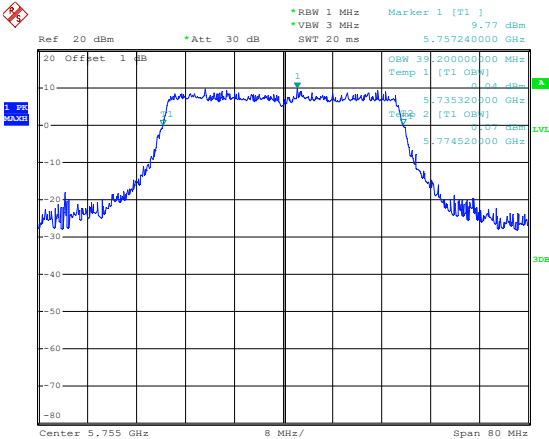
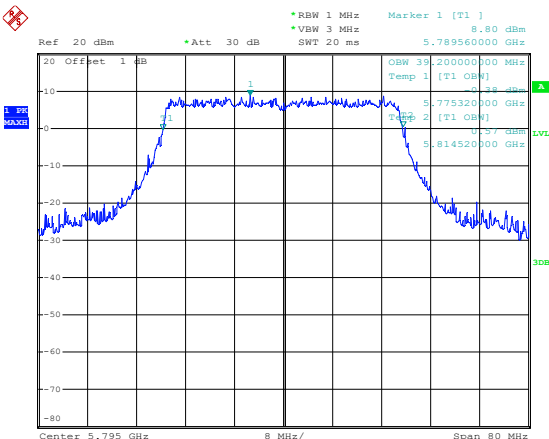
Ref: 20 dBm, Att: 30 dB, RBW: 300 kHz, VBW: 1 MHz, SWT: 20 ms, Marker 1 [T1], 5.78604000 GHz, 7.51 dBm

OSW: 19.68000000 MHz, Temp: 1 [T1: OSW], 1.39 dBm

5.77508000 GHz, 5.79476000 GHz

Center: 5.785 GHz, Span: 40 MHz

Date: 7.FEB.2025 17:03:07

802.11ax-HE 20-High	 Date: 7.FEB.2025 17:03:34
802.11ax-HE40-Low	 Date: 7.FEB.2025 17:06:22
802.11ax-HE40-High	 Date: 7.FEB.2025 17:06:55




APPENDIX C

Maximum Conducted Output Power




U-NII-1:5150-5250MHz			
Test mode	Frequency MHz	Output Power dBm	Limit dBm
802.11a	5180	14.02	23.98
	5200	14.01	23.98
	5240	14.58	23.98
802.11n-HT20	5180	13.93	23.98
	5200	13.11	23.98
	5240	13.80	23.98
802.11n-HT40	5190	12.85	23.98
	5230	13.48	23.98
802.11ac-VHT20	5180	13.90	23.98
	5200	13.03	23.98
	5240	13.68	23.98
802.11ac-VHT40	5190	12.80	23.98
	5230	12.45	23.98
802.11ax-HE20	5180	13.68	23.98
	5200	13.01	23.98
	5240	13.60	23.98
802.11ax-HE40	5190	12.89	23.98
	5230	12.40	23.98




U-NII-3: 5725-5850MHz			
Test mode	Frequency MHz	Output Power dBm	Limit dBm
802.11a	5745	14.16	30.00
	5785	13.75	30.00
	5825	13.43	30.00
802.11n-HT20	5745	13.87	30.00
	5785	13.41	30.00
	5825	13.08	30.00
802.11n-HT40	5755	12.80	30.00
	5795	12.31	30.00
802.11ac-VHT20	5745	13.02	30.00
	5785	13.29	30.00
	5825	13.07	30.00
802.11ac-VHT40	5755	12.77	30.00
	5795	12.39	30.00
802.11ax-HE20	5745	13.01	30.00
	5785	13.32	30.00
	5825	13.08	30.00
802.11ax-HE40	5755	12.92	30.00
	5795	12.40	30.00

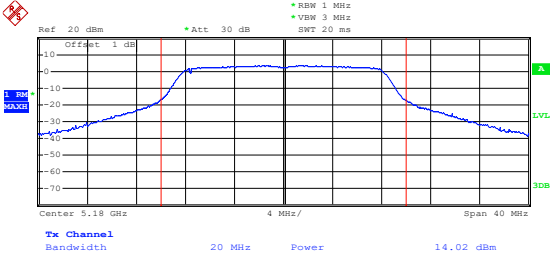
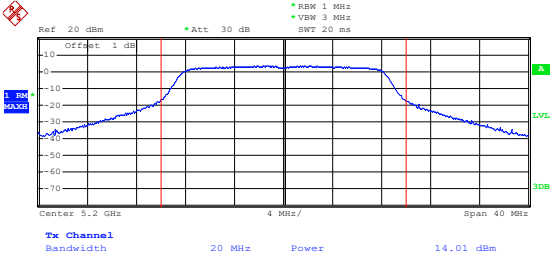
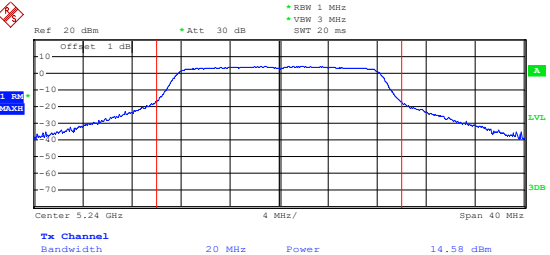
5150-5250MHz

802.11a-Low	 Date: 8.FEB.2025 13:59:17
802.11a-Middle	 Date: 8.FEB.2025 14:00:34
802.11a-High	 Date: 8.FEB.2025 14:01:18

802.11n-HT20-Low	Date: 8.FEB.2025 14:05:18
802.11n-HT20-Middle	Date: 8.FEB.2025 14:04:04
802.11n-HT20-High	Date: 8.FEB.2025 14:03:21

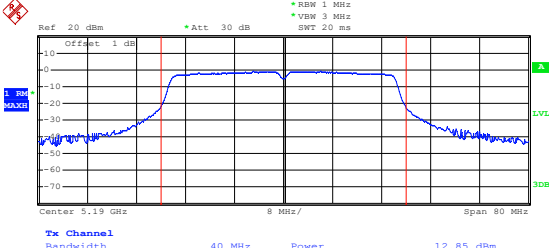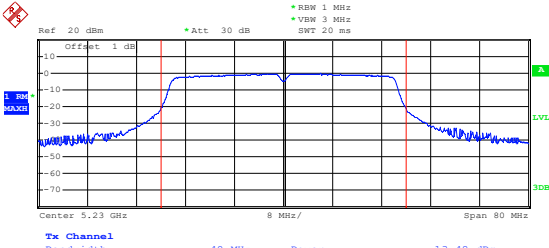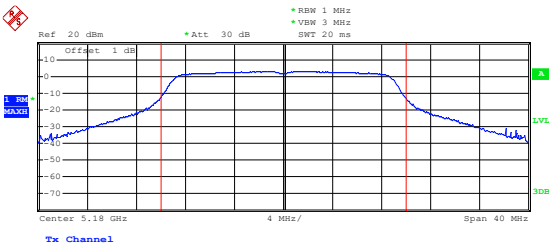802.11n-HT40-Low	 Date: 8.FEB.2025 14:10:15
802.11n-HT40-High	 Date: 8.FEB.2025 14:10:50
802.11ac-VHT20-Low	 Date: 8.FEB.2025 14:06:17

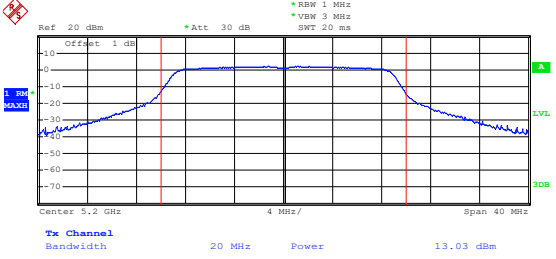
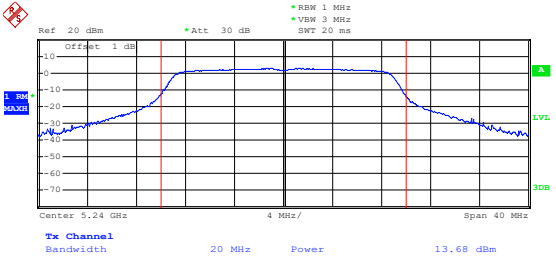
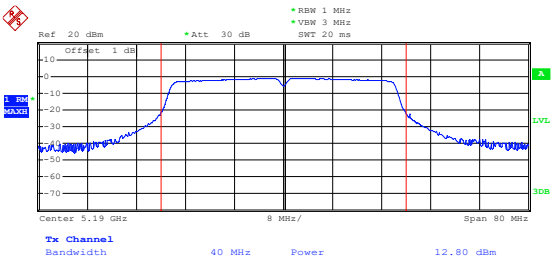
802.11ac-VHT20-Middle	 Date: 8.FEB.2025 14:06:57
802.11ac-VHT20-High	 Date: 8.FEB.2025 14:07:28
802.11ac-VHT40-Low	 Date: 8.FEB.2025 14:12:29

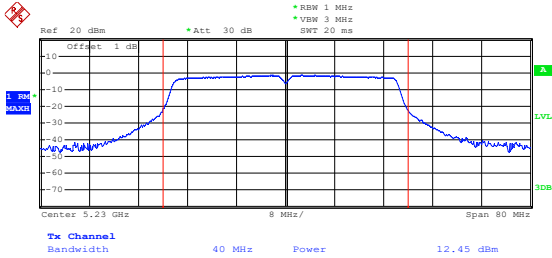
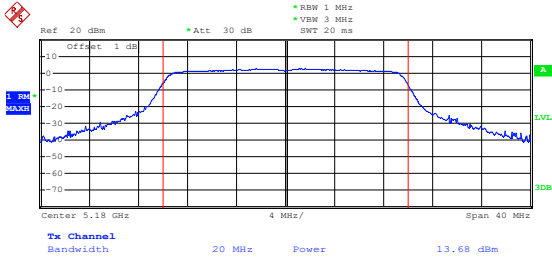
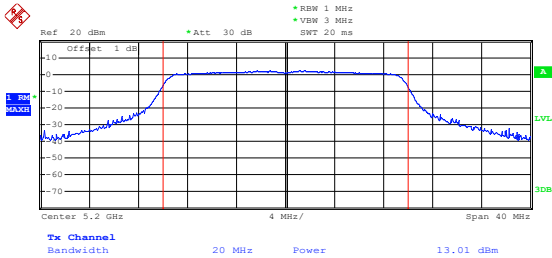
802.11ac-VHT40-High	 Date: 8.FEB.2025 14:11:42
802.11ax-HE 20-Low	 Date: 8.FEB.2025 14:08:53
802.11ax-HE 20-Middle	 Date: 8.FEB.2025 14:08:33




802.11ax-HE 20-High	Date: 8.FEB.2025 14:08:02
802.11ax-HE40-Low	Date: 8.FEB.2025 14:13:19
802.11ax-HE40-High	Date: 8.FEB.2025 14:14:02

Reference No.: WTH25X01006451W001

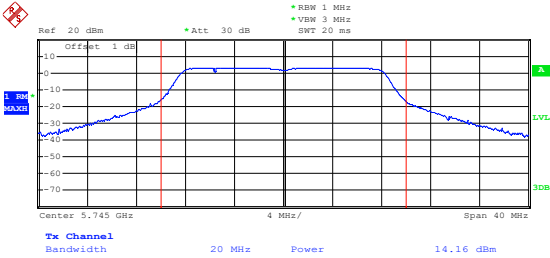
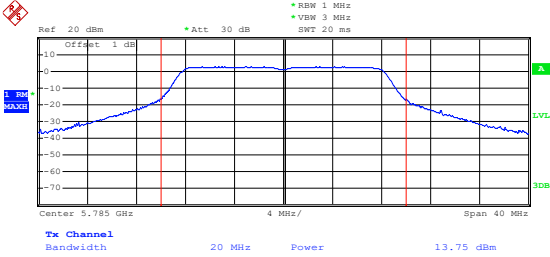
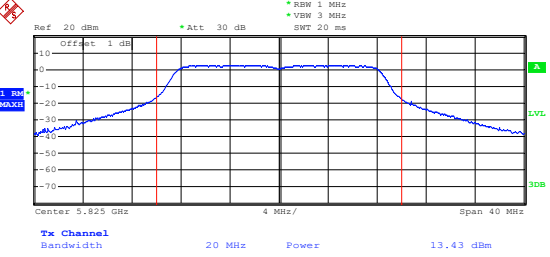
5725-5850MHz




802.11a-Low	 Ref 20 dBm *Att 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Offset 1 dB Center 5.745 GHz 4 MHz/ Span 40 MHz Tx Channel Bandwidth 20 MHz Power 14.16 dBm Date: 7.FEB.2025 15:46:07
802.11a-Middle	 Ref 20 dBm *Att 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Offset 1 dB Center 5.785 GHz 4 MHz/ Span 40 MHz Tx Channel Bandwidth 20 MHz Power 13.75 dBm Date: 7.FEB.2025 15:51:17
802.11a-High	 Ref 20 dBm *Att 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Offset 1 dB Center 5.825 GHz 4 MHz/ Span 40 MHz Tx Channel Bandwidth 20 MHz Power 13.43 dBm Date: 7.FEB.2025 15:57:21

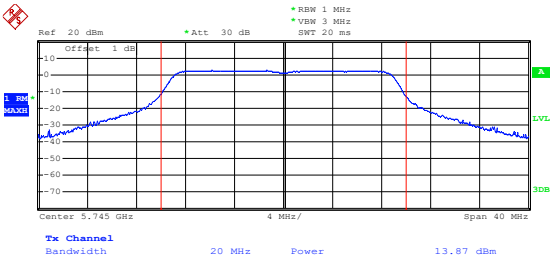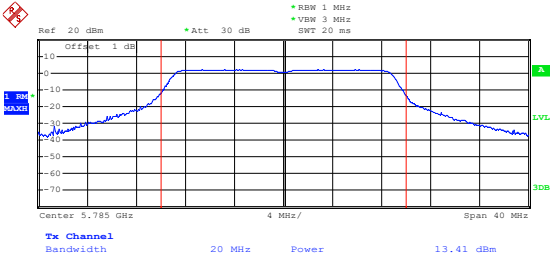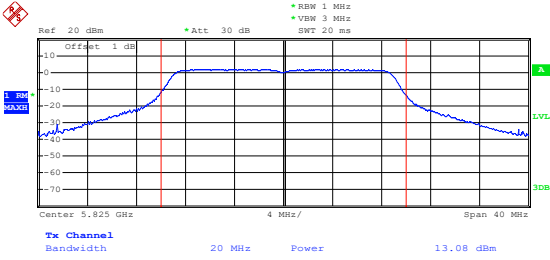802.11n-HT20-Low	 Date: 7.FEB.2025 16:05:04
802.11n-HT20-Middle	 Date: 7.FEB.2025 16:04:31
802.11n-HT20-High	 Date: 7.FEB.2025 16:03:45

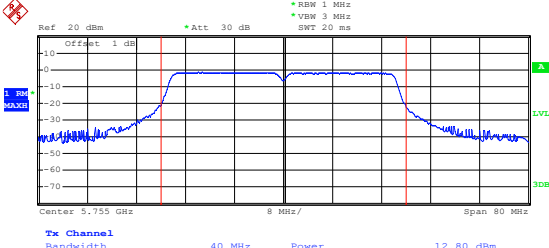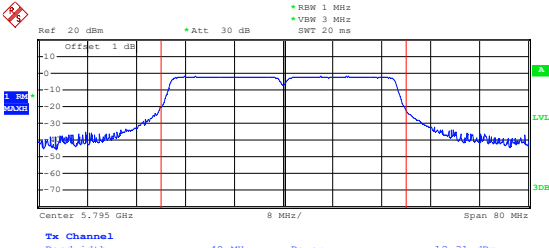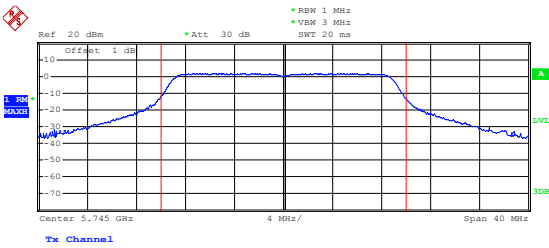802.11n-HT40-Low	 Date: 7.FEB.2025 16:18:07
802.11n-HT40-High	 Date: 7.FEB.2025 16:18:33
802.11ac-VHT20-Low	 Date: 7.FEB.2025 16:07:21

802.11ac-VHT20-Middle	Date: 7.FEB.2025 16:09:06
802.11ac-VHT20-High	Date: 7.FEB.2025 16:09:42
802.11ac-VHT40-Low	Date: 7.FEB.2025 16:13:43

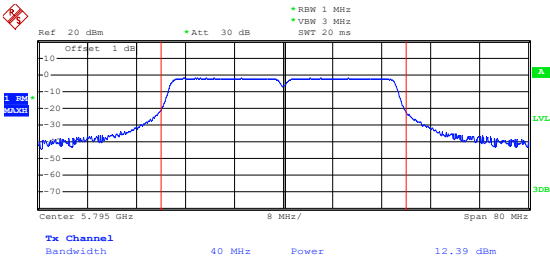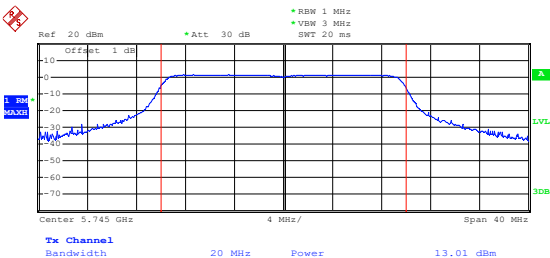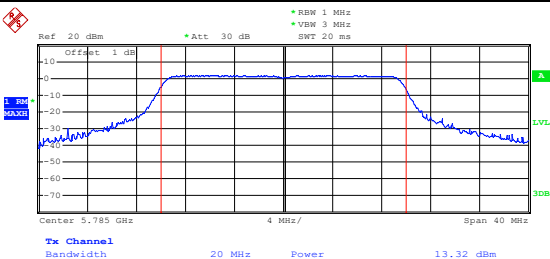802.11ac-VHT40-High	 Ref 20 dBm Offset 1 dB Att 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Center 5.795 GHz 8 MHz/ Span 80 MHz Tx Channel Bandwidth 40 MHz Power 12.39 dBm Date: 7.FEB.2025 16:14:33
802.11ax-HE 20-Low	 Ref 20 dBm Offset 1 dB Att 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Center 5.745 GHz 4 MHz/ Span 40 MHz Tx Channel Bandwidth 20 MHz Power 13.01 dBm Date: 7.FEB.2025 16:12:03
802.11ax-HE 20-Middle	 Ref 20 dBm Offset 1 dB Att 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Center 5.785 GHz 4 MHz/ Span 40 MHz Tx Channel Bandwidth 20 MHz Power 13.32 dBm Date: 7.FEB.2025 16:11:01

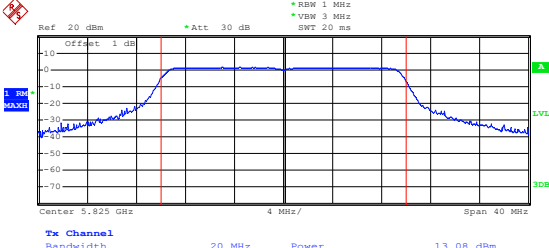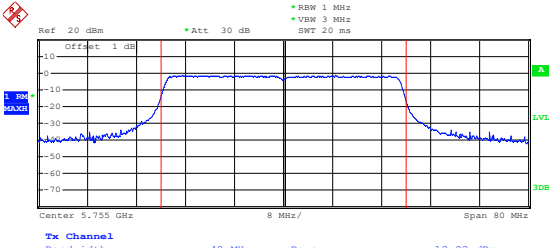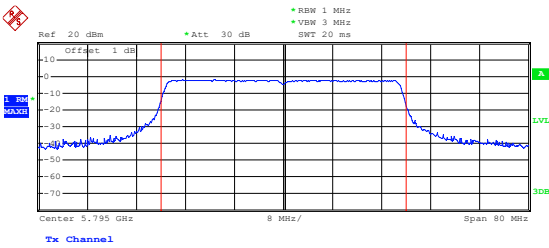802.11ax-HE 20-High	 Ref 20 dBm Offset 1 dB Att 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Center 5.825 GHz 4 MHz/ Span 40 MHz Tx Channel Bandwidth 20 MHz Power 13.08 dBm Date: 7.FEB.2025 16:10:31
802.11ax-HE40-Low	 Ref 20 dBm Offset 1 dB Att 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Center 5.755 GHz 8 MHz/ Span 80 MHz Tx Channel Bandwidth 40 MHz Power 12.92 dBm Date: 7.FEB.2025 16:16:22
802.11ax-HE40-High	 Ref 20 dBm Offset 1 dB Att 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Center 5.795 GHz 8 MHz/ Span 80 MHz Tx Channel Bandwidth 40 MHz Power 12.40 dBm Date: 7.FEB.2025 16:15:27

APPENDIX D

Frequency Stability

U-NII-1:5150-5250MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	5.0	-30	501	0.096
100%		-20	503	0.097
100%		-10	500	0.096
100%		0	502	0.097
100%		+10	501	0.096
100%		+20	503	0.097
100%		+30	496	0.095
100%		+40	501	0.096
100%		+50	501	0.096
Low Battery power	5.50	+20	502	0.097
High Battery power	4.50	+20	503	0.097

U-NII-1:5725-5850MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	5.0	-30	500	0.086
100%		-20	503	0.087
100%		-10	496	0.086
100%		0	502	0.087
100%		+10	497	0.086
100%		+20	498	0.086
100%		+30	502	0.087
100%		+40	505	0.087
100%		+50	500	0.086
Low Battery power	5.50	+20	499	0.086
High Battery power	4.50	+20	504	0.087

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

***** END OF REPORT *****