


FUNCTION DISPLAY

LCD type

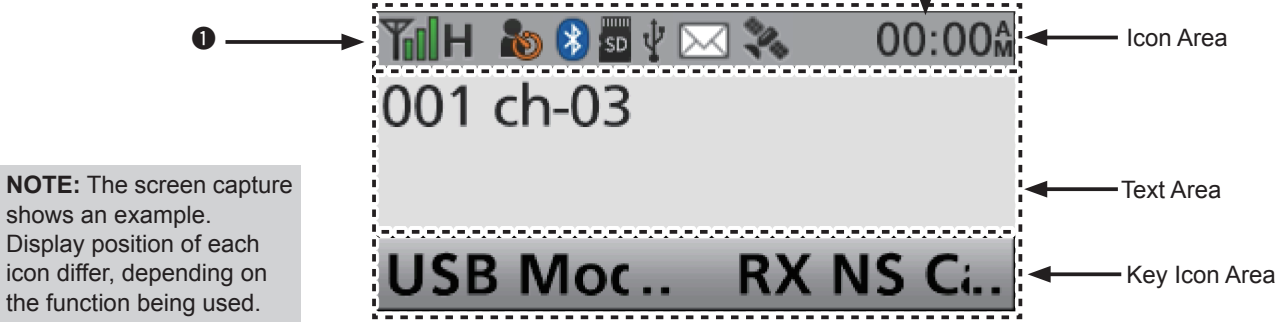

◇ Icon Area

Indicators

- ① **SIGNAL STRENGTH INDICATOR**
Displays the relative received signal strength.
- ② **CLOCK**
Displays the current time.

Icons

POWER ICON L1 L2 H

- “L1” is displayed when the output power is set to low.
- “L2” is displayed when the output power is set to mid.
- “H” is displayed when the output power is set to high.

AUDIBLE ICON [Speaker Icon]

Displayed when the channel is in the ‘audible’ (unmute) mode.

MESSAGE ICON [Envelope Icon]

- Displayed when a received message (Short Data Message or Status Message) is stored in the message memory.
- Blinks when an unread message is in the message memory.

BELL ICON [Bell Icon]

Displayed when a matching signal is received, depending on the presetting.

SCAN ICON [Scan Icon]

- Displayed while scanning.
- Blinks while a scan is paused.

SCAN TARGET CHANNEL ICON [Star Icon]

- Displayed when the channel is selected as a scan target channel.

SCRAMBLER ICON [Scrambler Icon]

// for the Analog mode //

- Displayed when the Voice Scrambler function is ON.
- Blinks when receiving a scrambled signal.

// for the Digital mode //

- Displayed when the Voice Encryption function is ON.
- Blinks when receiving an encrypted signal.

GPS ICON [GPS Icon]

- Displayed when a valid position data is received.

RECORD ICON [Record Icon]

- Displayed when the Record function is ON.
- Blinks while recording the audio.

TALK AROUND ICON

Displayed when the Talk Around function is ON.

PHONE ICON [Phone Icon]

- Displayed when the transceiver is connected to a telephone network on the selected channel.
- Blinks while receiving a phone call.

BROADCAST CALL ICON [Broadcast Call Icon]

- Displayed when the Broadcast Call function is ON.
- Blinks while receiving a Broadcast Call.

SITE LOCK ICON [Site Lock Icon]

Displayed when the Site Lock function is ON.

LONE WORKER ICON [Lone Worker Icon]

Displayed when the Lone Worker function is ON.

NOISE CANCEL ICON

Displayed when the Noise Cancel function is ON.

SURVEILLANCE ICON [Surveillance Icon]

Displayed when the Surveillance function is ON.

VOX ICON [VOX Icon]

Displayed when the VOX function is ON.

Bluetooth® ICON [Bluetooth Icon]

- Displayed when Bluetooth® is activated.
- Lights Blue when a Bluetooth® device is connected.
- Does not light when there is no Bluetooth® device connected.

microSD ICON [microSD Icon]

Displayed when a microSD card is inserted.

① “△” is displayed when the microSD card has not been formatted.

USB ICON [USB Icon]

Displayed when a USB device is connected.

◇ Text Area


Displays the selected Zone number, Channel number, and Channel name, if set.

◇ Key Icon Area

Displays the assigned function of [P1] and [P2].

① Ask your dealer about the assigned Software key function.

Segment type

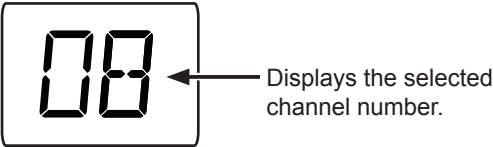

ICOM

INSTRUCTIONS

VHF DIGITAL TRANSCEIVERS

IC-F5400D series

UHF DIGITAL TRANSCEIVERS

IC-F6400D series

Thank you for choosing this Icom product.
READ ALL INSTRUCTIONS carefully and completely before using this product.

IMPORTANT

This instruction sheet includes some functions that are usable only when they are preset by your dealer. The transceiver may have other functions and operations that are not described in this instruction sheet. Ask your dealer for preset function details.


ANTENNA

A key element in the performance of any communication systems is the antenna. Contact your dealer for information regarding antennas and how to install them.

FUSE REPLACEMENT

Fuses are installed in the supplied DC power cable. If a fuse blows, track down the source of the problem, repair it, and then replace the damaged fuse with a new rated one.

- ① Fuse rating: 20A
USE only 20 A fuses

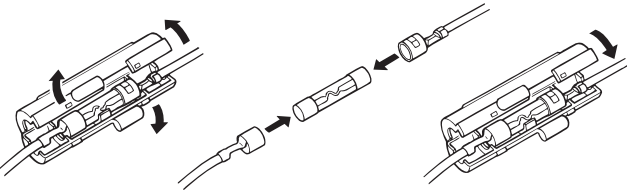


CLEANING

If the transceiver becomes dusty or dirty, wipe it clean with a soft, dry cloth.



DO NOT use harsh solvents such as Benzine or alcohol, as they may damage the transceiver's surfaces.

SUPPLIED ACCESSORIES

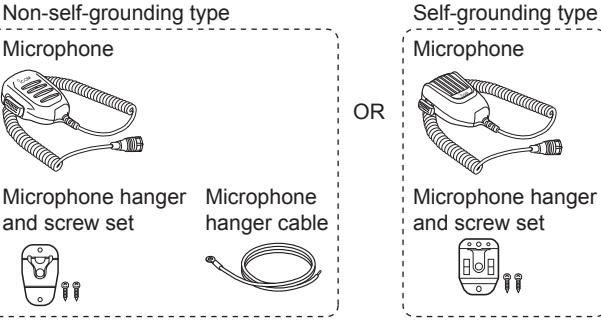

Mounting bracket

DC power cable

Bracket bolts

Mounting screws (M5×12)

Self-tapping screws (M5×16)

Flat washers

Spring washers

Nuts


NOTE: Some accessories may not be supplied, or the shape may be different, depending on the transceiver version.

Icom, Icom Inc. and the Icom logo are registered trademarks of Icom Incorporated (Japan) in Japan, the United States, the United Kingdom, Germany, France, Spain, Russia, Australia, New Zealand, and/or other countries. The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Icom inc. is under license. All other products or brands are registered trademarks or trademarks of their respective holders.


PANEL DESCRIPTION

NOTE: Different functions may have been assigned to the keys by your dealer, except for the Power key.

LCD type

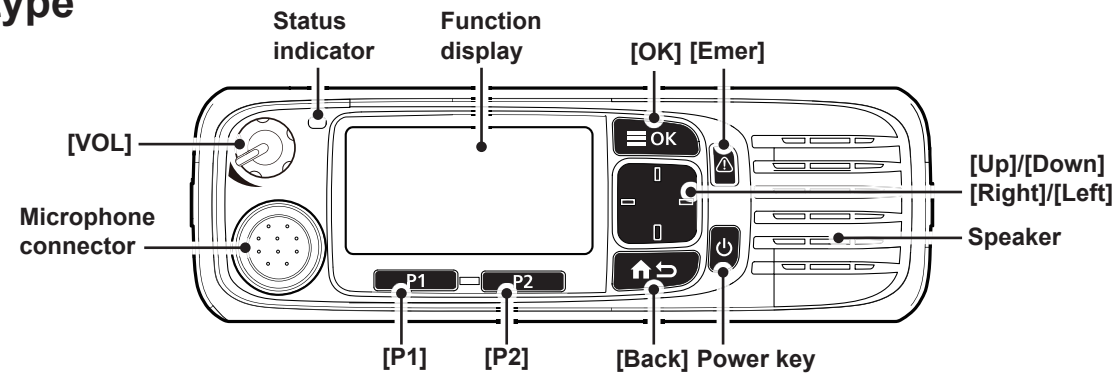

Segment type

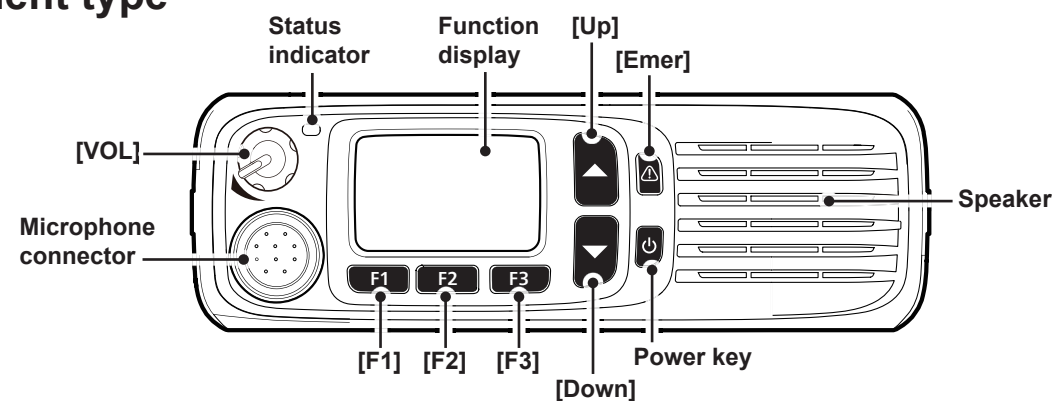

◇ About the Status indicator


- Lights red while transmitting.
- Lights green while receiving a signal, or when the squelch is open.

◇ About the Microphone connector

Connect the supplied or optional microphone.

NEVER connect non-specified microphones. The pin assignments may be different and may damage the transceiver.

REAR PANEL CONNECTION

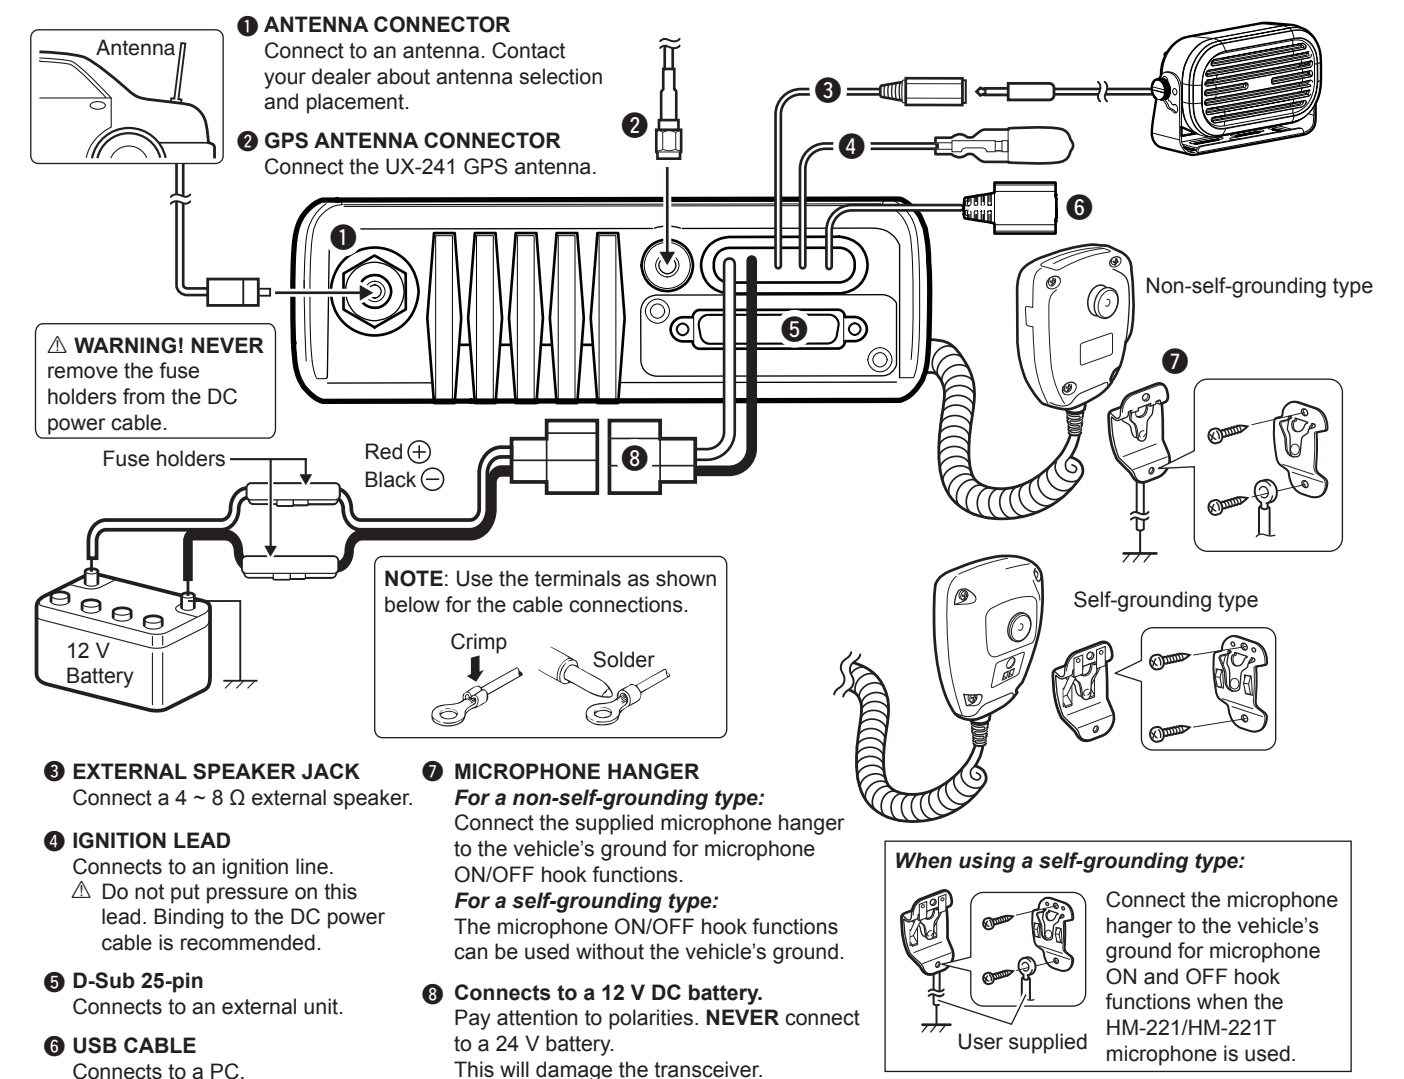

BASIC OPERATION

◇ Turning power ON

Hold down [⏻] for 2 seconds to turn ON the transceiver.

◇ Receiving and Transmitting

Receiving:

1. Push [Up] or [Down] to select a channel.
2. When receiving a call, rotate [VOL] to adjust the audio output level to a comfortable listening level.

Transmitting:

1. Wait until the channel is clear to avoid interference.
2. While holding down [PTT], speak at your normal voice level.
3. Release [PTT] to receive.

IMPORTANT:

- To maximize the readability of your signal:
1. After pushing [PTT], pause briefly before you start speaking.
 2. Hold the microphone 5 ~ 10 cm (2 ~ 4 inches) from your mouth, then speak at your normal voice level.

OPTIONS

- **RMK-5 SEPARATION KIT + OPC-2364 SEPARATION CABLE**
Enables you to separately install the transceiver's main unit from the front panel for convenient operation.
- **RMK-7 DUAL HEAD KIT + OPC-2364 SEPARATION CABLE**
Enables you to separately install the transceiver's main unit from the front panel for convenient operation.
- **SP-30, SP-35, SP-35L EXTERNAL SPEAKERS**
Input impedance: 4 Ω
SP-30: Rated input= 20 W, Maximum input = 30 W
SP-35/SP35L: Rated input= 5 W, Maximum input = 7 W
- **HM-218, HM-220, HM-220T, HM-221, HM-221T HAND MICROPHONES**
HM-218: Command microphone with a built-in speaker
HM-220: Self-grounding heavy duty microphone
HM-220T: Self-grounding heavy duty DTMF microphone
HM-221: Hand microphone
HM-221T: DTMF microphone
- **SM-29 DESKTOP MICROPHONE**
- **UX-241 GPS ANTENNA**
Enables you to use the GPS function.