

# FCC TEST REPORT

**FCC ID:2ASBQ-65AMVF58**

**Report No.** : SSP24080153-1E

**Applicant** : Shanghai I-Pivot Intelligent Technology Co., Ltd

**Product Name** : 65inch interactive kiosk,single sided screen

**Model Name** : 65AMVF58-P03-Bk

**Test Standard** : FCC Part 15.225

**Date of Issue** : 2024-08-23



**Shenzhen CCUT Quality Technology Co., Ltd.**

1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen,  
Guangdong, China; (Tel.:+86-755-23406590 website: [www.ccuttest.com](http://www.ccuttest.com))

This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen CCUT Quality Technology Co., Ltd.

**Test Report Basic Information**

<b>Applicant</b> .....:	Shanghai I-Pivot Intelligent Technology Co., Ltd Room 404, Unit 62, No. 4499 Dushi Road, Minhang District, Shanghai, China, Address of Applicant.....: 200000
<b>Manufacturer</b> .....:	Shanghai I-Pivot Intelligent Technology Co., Ltd Room 404, Unit 62, No. 4499 Dushi Road, Minhang District, Shanghai, China, Address of Manufacturer.....: 200000
<b>Product Name</b> .....:	65inch interactive kiosk,single sided screen
<b>Brand Name</b> .....:	-
<b>Main Model</b> .....:	65AMVF58-P03-Bk
<b>Series Models</b> .....:	65AMVF59-P03-Bk
<b>Test Standard</b> .....:	FCC Part 15 Subpart C ANSI C63.4-2014 ANSI C63.10-2013
<b>Date of Test</b> .....	2024-08-20 to 2024-08-23
<b>Test Result</b> .....:	PASS
<b>Tested By</b> .....	<u>Coke Huang</u> (Coke Huang)
<b>Reviewed By</b> .....:	<u>Lieber Ouyang</u> (Lieber Ouyang)
<b>Authorized Signatory</b> .....:	<u>Lahm Peng</u> (Lahm Peng)
<p>Note : This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen CCUT Quality Technology Co., Ltd.. All test data presented in this test report is only applicable to presented test sample.</p>	



## CONTENTS

<b>1. General Information .....</b>	<b>5</b>
1.1 Product Information .....	5
1.2 Test Setup Information .....	6
1.3 Compliance Standards .....	7
1.4 Test Facilities .....	7
1.5 List of Measurement Instruments .....	8
1.6 Measurement Uncertainty .....	9
<b>2. Summary of Test Results .....</b>	<b>10</b>
<b>3. Antenna Requirement .....</b>	<b>11</b>
3.1 Standard and Limit .....	11
3.2 Test Result .....	11
<b>4. Conducted Emissions .....</b>	<b>12</b>
4.1 Standard and Limit .....	12
4.2 Test Procedure .....	12
4.3 Test Data and Results .....	13
<b>5. Radiated Emissions .....</b>	<b>16</b>
5.1 Standard and Limit .....	16
5.2 Test Procedure .....	16
5.3 Test Data and Results .....	18
<b>6. Band-edge Emissions .....</b>	<b>23</b>
6.1 Standard and Limit .....	23
6.2 Test Procedure .....	23
6.3 Test Data and Results .....	23
<b>7. Frequency Stability .....</b>	<b>26</b>
7.1 Standard and Limit .....	26
7.2 Test Procedure .....	26
7.3 Test Data and Results .....	26
<b>8. Occupied Bandwidth .....</b>	<b>28</b>
8.1 Standard and Limit .....	28
8.2 Test Procedure .....	28
8.3 Test Data and Results .....	28

Revision History

Revision	Issue Date	Description	Revised By
V1.0	2024-08-23	Initial Release	Lahm Peng

## 1. General Information

### 1.1 Product Information

Product Name:	65inch interactive kiosk,single sided screen
Trade Name:	-
Main Model:	65AMVF58-P03-Bk
Series Models:	65AMVF59-P03-Bk
Rated Voltage:	AC 100-240V, 50/60Hz
Power Adapter:	-
Battery:	-
Test Sample No:	SSP24080153-1
Hardware Version:	V1.0
Software Version:	V1.0
Note 1: The test data is gathered from a production sample, provided by the manufacturer.	
Note 2: The color of appearance and model name of series models listed are different from the main model, but the circuit and the electronic construction are the same, declared by the manufacturer.	

Wireless Specification	
Wireless Standard:	RFID
Operating Frequency:	13.56MHz
Max. Field Strength:	70.83dBuV/m
Modulation:	FSK
Antenna Gain:	0dBi
Type of Antenna:	Loop Antenna
Type of Device:	<input type="checkbox"/> Portable Device <input checked="" type="checkbox"/> Mobile Device <input type="checkbox"/> Modular Device

## 1.2 Test Setup Information

List of Test Modes			
Test Mode	Description	Remark	
TM1	Transmitting	13.56MHz	
TM2	-	-	
TM3	-	-	
List and Details of Auxiliary Cable			
Description	Length (cm)	Shielded/Unshielded	With/Without Ferrite
-	-	-	-
-	-	-	-
List and Details of Auxiliary Equipment			
Description	Manufacturer	Model	Serial Number
-	-	-	-
-	-	-	-

### 1.3 Compliance Standards

Compliance Standards	
FCC Part 15 Subpart C	FEDERAL COMMUNICATIONS COMMISSION, RADIO FREQUENCY DEVICES, Intentional Radiators
All measurements contained in this report were conducted with all above standards	
According to standards for test methodology	
FCC Part 15 Subpart C	FEDERAL COMMUNICATIONS COMMISSION, RADIO FREQUENCY DEVICES, Intentional Radiators
ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.
ANSI C63.10-2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
Maintenance of compliance is the responsibility of the manufacturer or applicant. Any modification of the product, which result is lowering the emission, should be checked to ensure compliance has been maintained.	

### 1.4 Test Facilities

Laboratory Name:	<b>Shenzhen CCUT Quality Technology Co., Ltd.</b> 1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen, Guangdong, China
CNAS Laboratory No.:	L18863
A2LA Certificate No.:	6893.01
FCC Registration No:	583813
ISED Registration No.:	CN0164
All measurement facilities used to collect the measurement data are located at 1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen, Guangdong, China.	

## 1.5 List of Measurement Instruments

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Conducted Emissions					
AMN	ROHDE&SCHWARZ	ENV216	101097	2024-08-07	2025-08-06
EMI Test Receiver	ROHDE&SCHWARZ	ESPI	100242	2024-08-07	2025-08-06
Test Cable	N/A	Cable 5	N/A	2024-08-07	2025-08-06
EMI Test Software	FARA	EZ-EMC	EMEC-3A1+	N/A	N/A
Radiated Emissions					
EMI Test Receiver	ROHDE&SCHWARZ	ESPI	100154	2024-08-07	2025-08-06
Spectrum Analyzer	KEYSIGHT	N9020A	MY48030972	2024-08-07	2025-08-06
Amplifier	SCHWARZBECK	BBV 9743B	00251	2024-08-07	2025-08-06
Amplifier	HUABO	YXL0518-2.5-45	--	2024-08-07	2025-08-06
Attenuator	QUANJUDA	6dB	220731	2024-08-07	2025-08-06
Loop Antenna	DAZE	ZN30900C	21104	2024-08-03	2025-08-02
Broadband Antenna	SCHWARZBECK	VULB 9168	01320	2024-08-03	2025-08-02
Horn Antenna	SCHWARZBECK	BBHA 9120D	02553	2024-08-03	2025-08-02
Test Cable	N/A	Cable 1	N/A	2024-08-07	2025-08-06
Test Cable	N/A	Cable 2	N/A	2024-08-07	2025-08-06
Test Cable	N/A	Cable 3	N/A	2024-08-07	2025-08-06
Test Cable	N/A	Cable 4	N/A	2024-08-07	2025-08-06
EMI Test Software	FARA	EZ-EMC	FA-03A2 RE+	N/A	N/A
Conducted RF Testing					
RF Test System	MWRFTTest	MW100-RFCB	220418SQS-37	2024-08-07	2025-08-06
Spectrum Analyzer	KEYSIGHT	N9020A	AT0-90521	2024-08-07	2025-08-06
Signal Generator	Agilent	N5182A	MY47071192	2024-08-07	2025-08-06
Radio Tester	ROHDE&SCHWARZ	CMW500	2K50-126968	2024-08-07	2025-08-06
Temperature Chamber	ASTUOD	TT-5166	53269	2024-03-13	2025-03-12



## 1.6 Measurement Uncertainty

Test Item	Conditions	Uncertainty
Conducted Emissions	9kHz ~ 30MHz	±1.64 dB
Radiated Emissions	9kHz ~ 30MHz	±2.88 dB
	30MHz ~ 1GHz	±3.32 dB
	1GHz ~ 18GHz	±3.50 dB
	18GHz ~ 40GHz	±3.66 dB
Frequency Stability	9kHz ~ 26GHz	±0.16 ppm
Occupied Bandwidth	9kHz ~ 26GHz	±4.0 %
DC Voltage	DC 0~30V	±0.1 %
Temperature	-40~50℃	±0.3℃

## 2. Summary of Test Results

FCC Rule	Description of Test Item	Result
FCC Part 15.203	Antenna Requirement	Passed
FCC Part 15.207	Conducted Emissions	Passed
FCC Part 15.209, 15.225(a)	Radiated Emissions	Passed
FCC Part 15.225(b)(c)	Out of Band Emissions	Passed
FCC Part 15.225(e)	Frequency Stability	Passed
FCC Part 15.215(c)	Occupied Bandwidth	Passed
Passed: The EUT complies with the essential requirements in the standard Failed: The EUT does not comply with the essential requirements in the standard N/A: Not applicable		

### **3. Antenna Requirement**

---

#### **3.1 Standard and Limit**

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### **3.2 Test Result**

This product has an Loop antenna, fulfill the requirement of this section.

## 4. Conducted Emissions

### 4.1 Standard and Limit


According to the rule FCC Part 15.207, Conducted emissions limit, the limit for a wireless device as below:

Frequency of Emission (MHz)	Conducted emissions (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Note 1: Decreases with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz  
 Note 2: The lower limit applies at the band edges

### 4.2 Test Procedure

Test is conducting under the description of ANSI C63.10 - 2013 section 6.2.

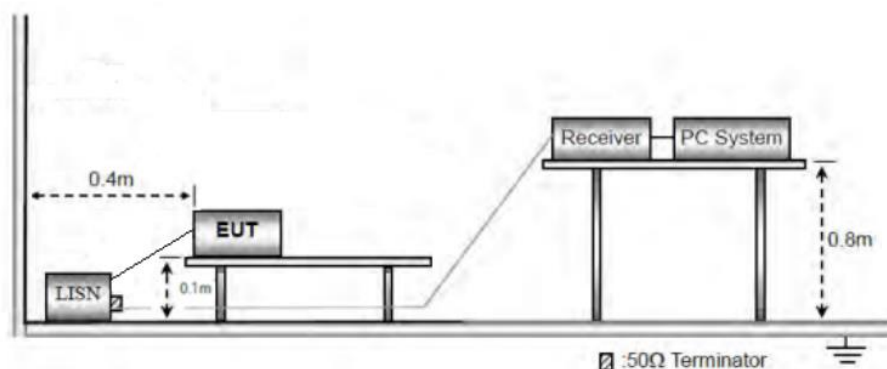

Test Setup Block Diagram

Test Setup Block Diagram

a) The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

b) The following is the setting of the receiver

Attenuation: 10dB

Start Frequency: 0.15MHz

Stop Frequency: 30MHz

IF Bandwidth: 9kHz

c) The EUT was placed 0.1 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.

d) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

e) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

f) LISN is at least 80 cm from nearest part of EUT chassis.

g) For the actual test configuration, please refer to the related Item - photographs of the test setup.

### **4.3 Test Data and Results**

Based on all tested data, the EUT complied with the FCC Part 15.207 standard limit for a wireless device, and with the worst case as below:

Remark: Level = Reading + Factor, Margin = Level - Limit


## Test Plots and Data of Conducted Emissions

Tested Mode: TM1

Test Voltage: AC 120V/60Hz

Test Power Line: Neutral

Remark:

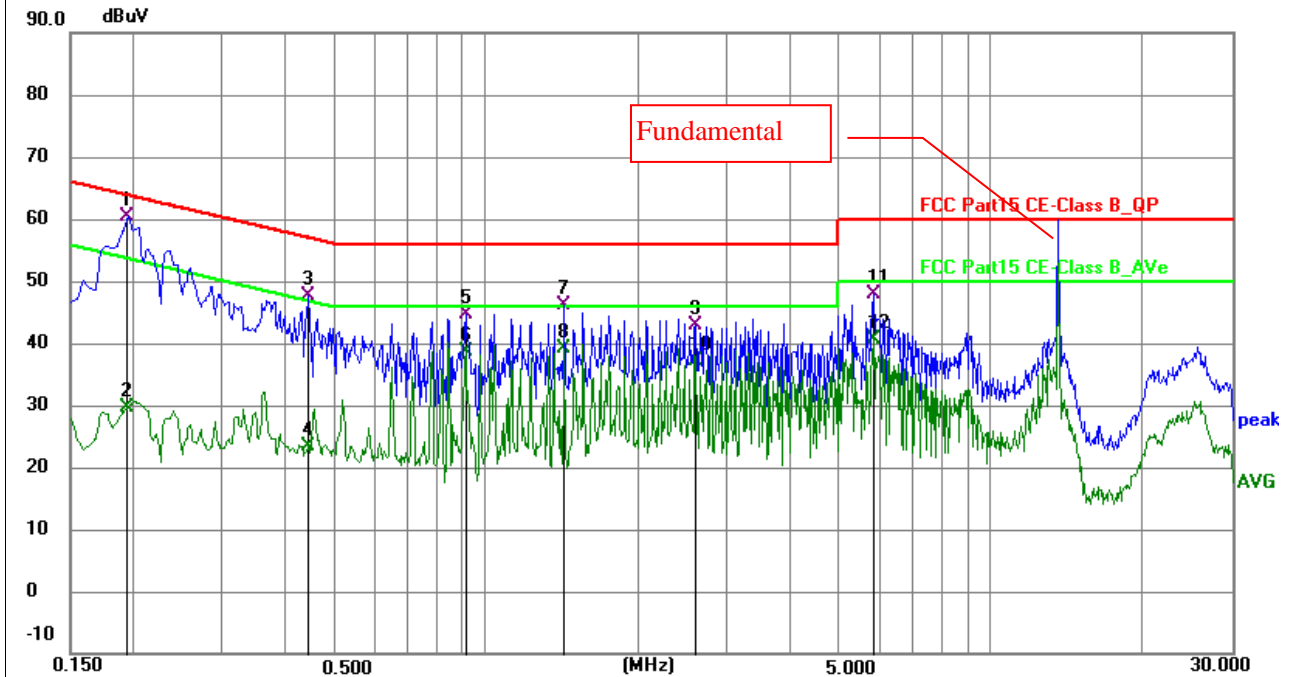

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1 *	0.1949	50.92	9.51	60.43	63.83	-3.40	QP	P	
2	0.1949	20.17	9.51	29.68	53.83	-24.15	AVG	P	
3	0.4425	37.81	9.94	47.75	57.01	-9.26	QP	P	
4	0.4425	13.44	9.94	23.38	47.01	-23.63	AVG	P	
5	0.9103	35.00	9.59	44.59	56.00	-11.41	QP	P	
6	0.9103	29.16	9.59	38.75	46.00	-7.25	AVG	P	
7	1.4280	36.17	10.03	46.20	56.00	-9.80	QP	P	
8	1.4280	29.06	10.03	39.09	46.00	-6.91	AVG	P	
9	2.5980	32.68	10.08	42.76	56.00	-13.24	QP	P	
10	2.5980	27.15	10.08	37.23	46.00	-8.77	AVG	P	
11	5.8380	37.70	10.23	47.93	60.00	-12.07	QP	P	
12	5.8380	30.44	10.23	40.67	50.00	-9.33	AVG	P	


## Test Plots and Data of Conducted Emissions

Tested Mode: TM1

Test Voltage: AC 120V/60Hz

Test Power Line: Live

Remark:

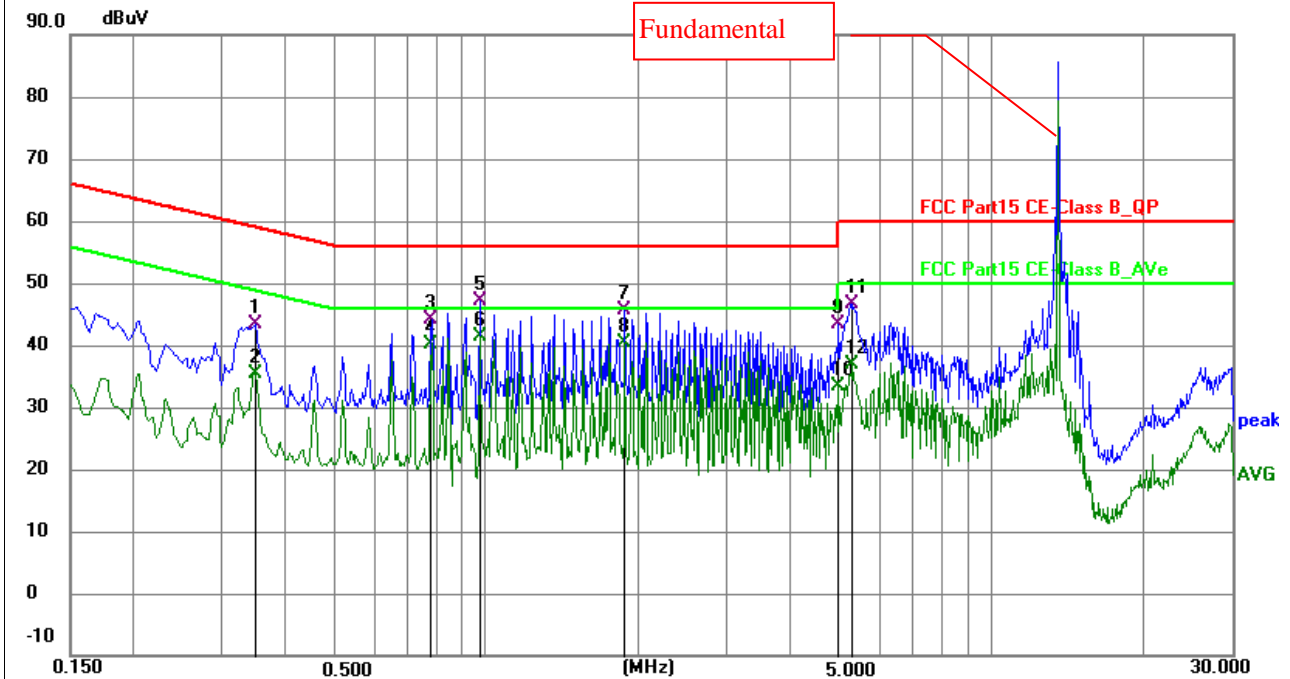

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.3480	33.50	9.78	43.28	59.01	-15.73	QP	P	
2	0.3480	25.70	9.78	35.48	49.01	-13.53	AVG	P	
3	0.7799	34.30	9.91	44.21	56.00	-11.79	QP	P	
4	0.7799	30.19	9.91	40.10	46.00	-5.90	AVG	P	
5	0.9735	37.21	9.89	47.10	56.00	-8.90	QP	P	
6 *	0.9735	31.42	9.89	41.31	46.00	-4.69	AVG	P	
7	1.8825	35.69	10.05	45.74	56.00	-10.26	QP	P	
8	1.8825	30.42	10.05	40.47	46.00	-5.53	AVG	P	
9	4.9830	33.26	10.23	43.49	56.00	-12.51	QP	P	
10	4.9830	23.04	10.23	33.27	46.00	-12.73	AVG	P	
11	5.3205	36.49	10.24	46.73	60.00	-13.27	QP	P	
12	5.3205	26.65	10.24	36.89	50.00	-13.11	AVG	P	

## 5. Radiated Emissions

### 5.1 Standard and Limit

According to §15.225(a), The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15848 microvolts/meter at 30 meters.

According to §15.225(d) The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in §15.209.

According to the rule FCC Part 15.209, Radiated emission limit for a wireless device as below:


Frequency of Emission (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3
Note: The more stringent limit applies at transition frequencies.		

*Note: Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.*


### 5.2 Test Procedure

Test is conducting under the description of ANSI C63.10 - 2013 section 6.3 to 6.6.




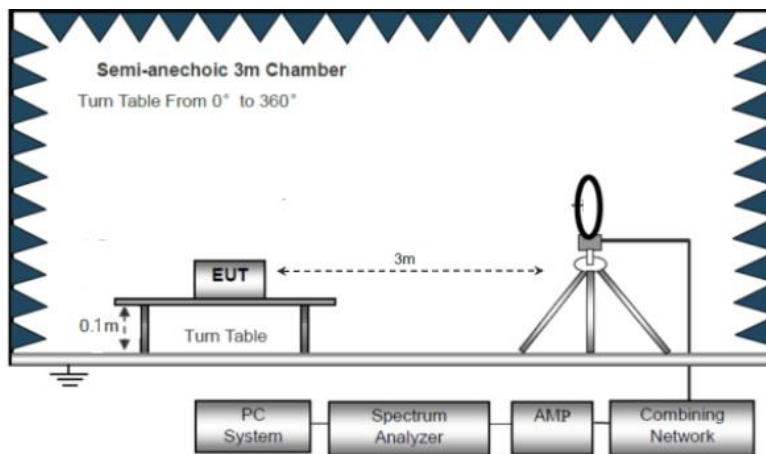

Block Diagram of Radiated Emission Below 30MHz

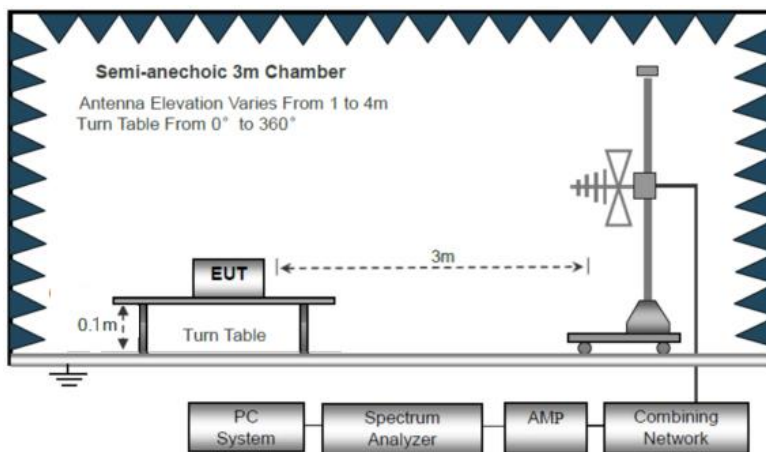

Block Diagram of Radiated Emission From 30MHz to 1GHz

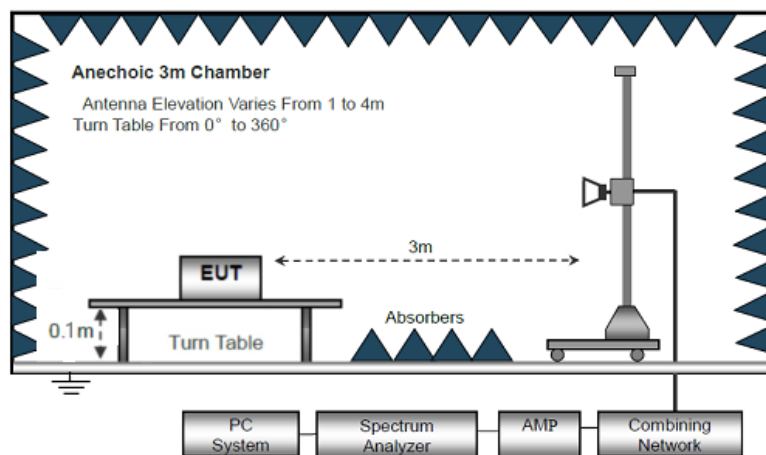

Block Diagram of Radiated Emission Above 1GHz

- a) The EUT is placed on a turntable, which is 0.1m above ground plane for test frequency range below 1GHz, and 1.5m above ground plane for test frequency range above 1GHz.
- b) EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
- c) Use the following spectrum analyzer settings:  
Span = wide enough to fully capture the emission being measured  
RBW = 1 MHz for  $f \geq 1\text{GHz}$ , 100 kHz for  $f < 1\text{GHz}$ , 10kHz for  $f < 30\text{MHz}$   
VBW  $\geq$  RBW, Sweep = auto  
Detector function = peak  
Trace = max hold
- d) Follow the guidelines in ANSI C63.4-2014 with respect to maximizing the emission by rotating the EUT, adjusting the measurement antenna height and polarization, etc. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, submit this data. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- e) The peak level, once corrected, must comply with the limit specified in Section 15.209. Set the RBW = 1MHz, VBW = 10Hz, Detector = PK for AV value, while maintaining all of the other instrument settings.
- f) For the actual test configuration, please refer to the related item - EUT test photos.

### 5.3 Test Data and Results

Based on all tested data, the EUT complied with the FCC Part 15.225 standard limit for a wireless device, and with the worst case as below:


Remark: Level = Reading + Factor, Margin = Level - Limit

## Test Plots and Data of Radiated Emissions

Tested Mode: TM1

Test Antenna Polarization: Coplaner

Remark:

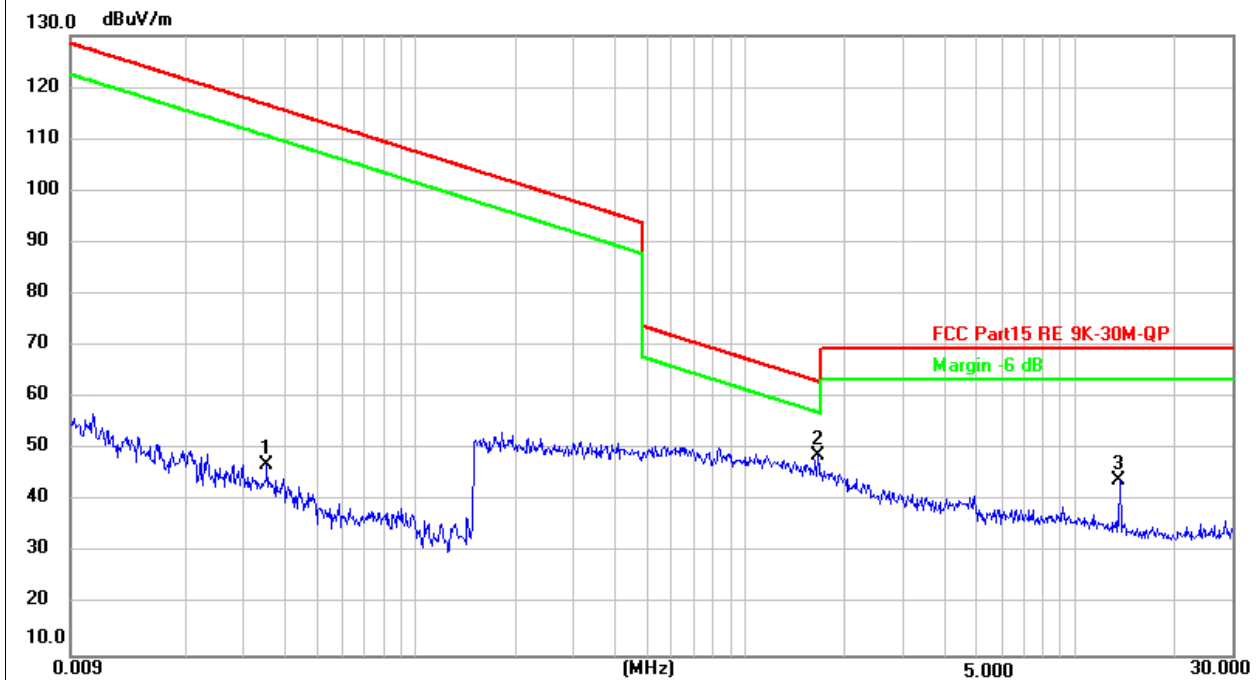

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	0.0352	14.53	32.39	46.92	116.66	-69.74	QP	100	360	P	
2 *	1.6450	22.73	26.03	48.76	63.27	-14.51	QP	100	173	P	
3	13.5600	17.97	25.96	43.93	69.50	-25.57	QP	100	11	P	

## Test Plots and Data of Radiated Emissions

Tested Mode: TM1

Test Antenna Polarization: Coaxial

Remark:



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	0.0105	21.69	35.89	57.58	127.16	-69.58	QP	100	214	P	
2	0.3302	25.64	25.80	51.44	97.23	-45.79	QP	100	85	P	
3 *	13.5600	22.47	25.96	48.43	69.50	-21.07	QP	100	45	P	

Note 1: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.


Note 2: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The measurements greater than 20dB below the limit from 9kHz to 30MHz.

Note 3: For 9kHz-30MHz, Distance extrapolation factor =  $40 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

## Radiated Emission Test Data (30MHz to 1GHz)


Tested Mode:	TM1
Test Antenna Polarization:	Horizontal
Remark:	

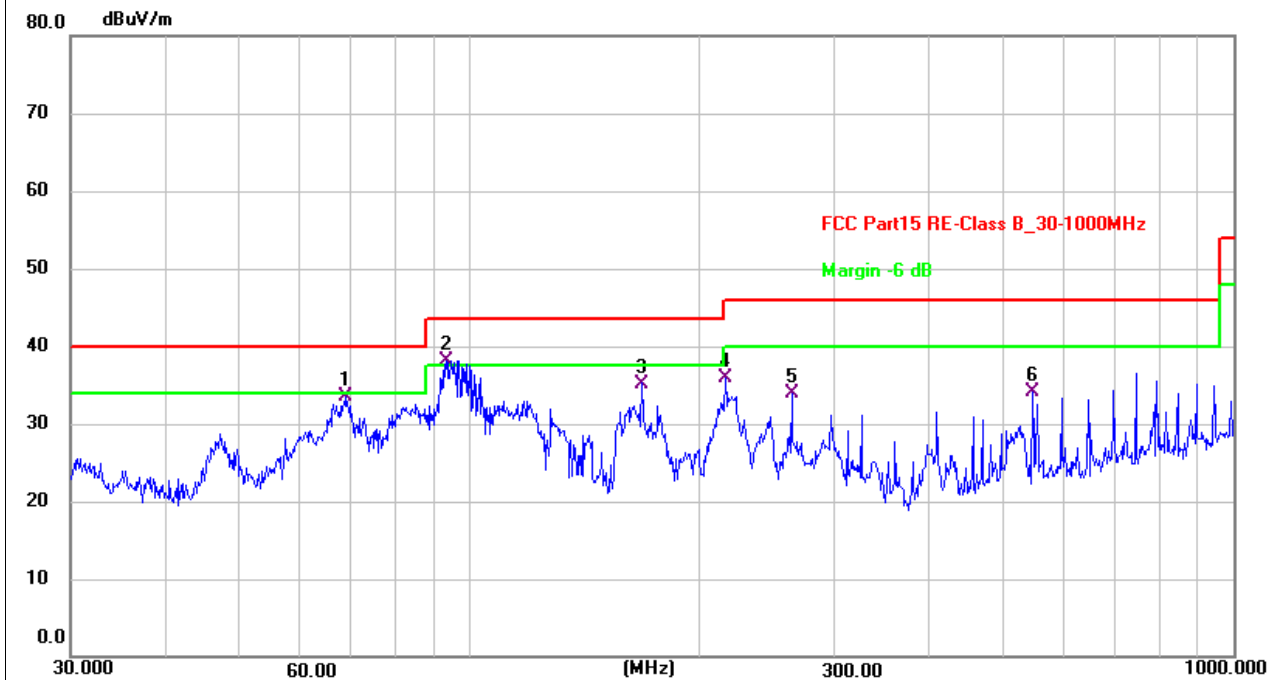

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	68.6310	44.29	-10.78	33.51	40.00	-6.49	QP	100	214	P	
2 *	93.1131	51.32	-13.17	38.15	43.50	-5.35	QP	100	35	P	
3	167.8242	44.65	-9.45	35.20	43.50	-8.30	QP	100	285	P	
4	216.0240	47.38	-11.40	35.98	46.00	-10.02	QP	100	4	P	
5	263.8190	43.35	-9.45	33.90	46.00	-12.10	QP	100	64	P	
6	545.1825	37.09	-2.96	34.13	46.00	-11.87	QP	100	8	P	

## Radiated Emission Test Data (30MHz to 1GHz)

Tested Mode:	TM1
Test Antenna Polarization:	Vertical
Remark:	

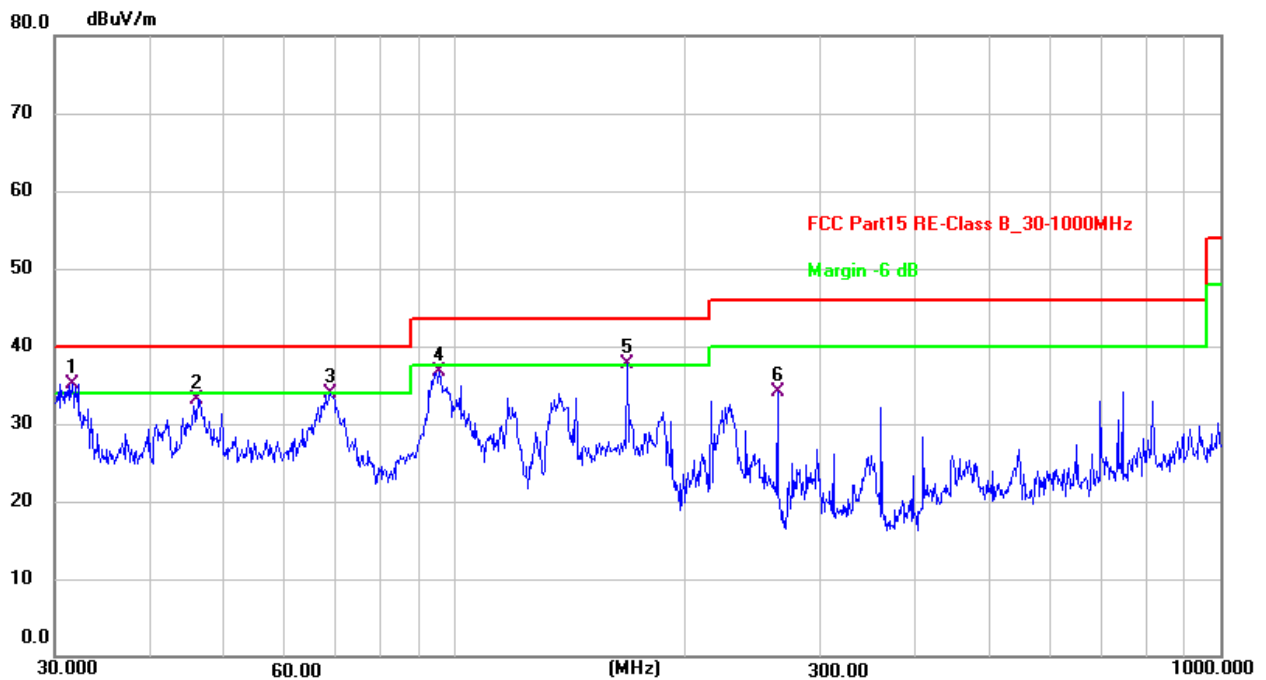

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	31.6201	43.94	-8.84	35.10	40.00	-4.90	QP	100	124	P	
2	46.1779	42.35	-9.16	33.19	40.00	-6.81	QP	100	31	P	
3	68.8721	44.69	-10.81	33.88	40.00	-6.12	QP	100	85	P	
4	95.4270	49.78	-12.98	36.80	43.50	-6.70	QP	100	149	P	
5 !	167.8242	47.07	-9.45	37.62	43.50	-5.88	QP	100	256	P	
6	263.8190	43.53	-9.45	34.08	46.00	-11.92	QP	100	2	P	

## 6. Band-edge Emissions


### 6.1 Standard and Limit

According to FCC 15.225 (b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

According to FCC 15.225 (c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

### 6.2 Test Procedure

Test is conducting under the description of ANSI C63.10 - 2013 section 6.3 to 6.4 and section 6.10.

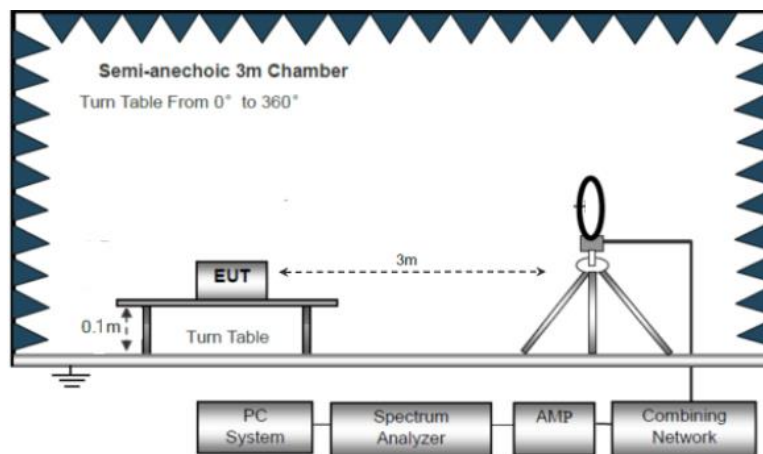

Test Setup Block Diagram

As the radiated emissions testing, set the RBW=10kHz VBW=30kHz, observed the outside band of 13.11MHz to 14.01MHz, than mark the higher-level emission for comparing with the FCC rules.

### 6.3 Test Data and Results

Based on all tested data, the EUT complied with the FCC Part 15.225 standard limit, and with the worst case as below:


Remark: Level = Reading + Factor, Margin = Level - Limit

## Test Plots and Data of Out of Band Emissions

Tested Mode: TM1

Test Antenna Polarization: Horizontal

Remark:

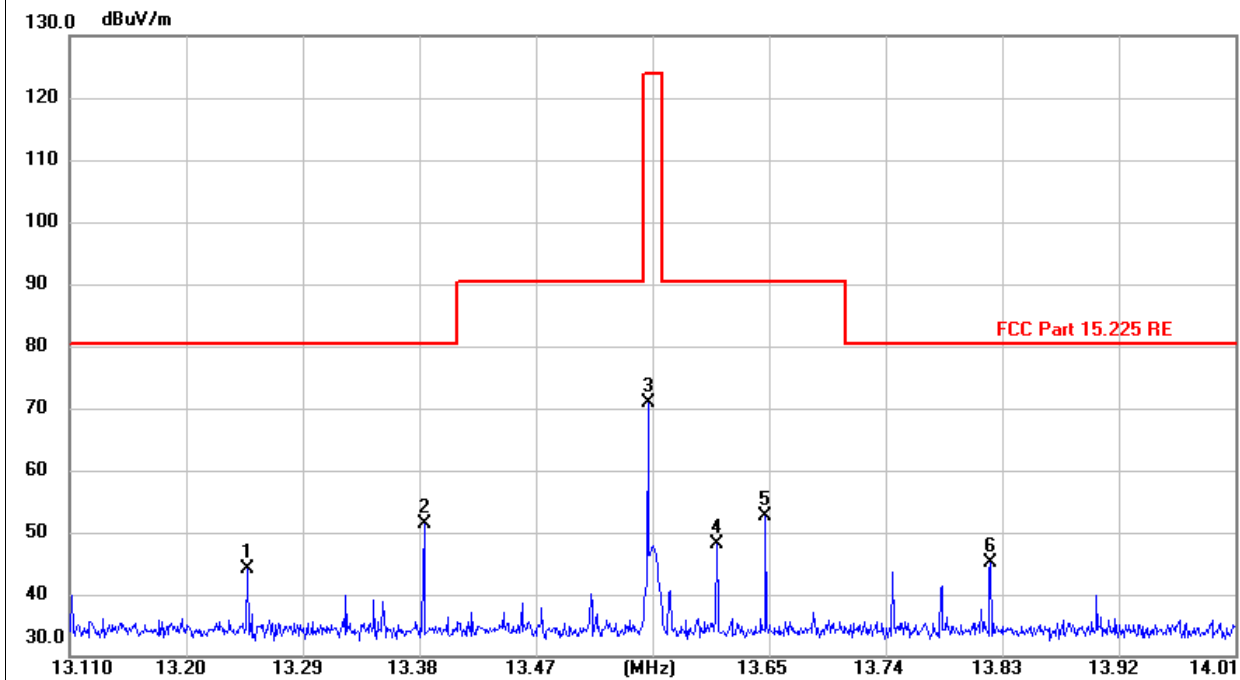

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	13.2468	18.02	26.01	44.03	80.50	-36.47	QP	100	191	P	
2 *	13.3834	25.28	25.99	51.27	80.50	-29.23	QP	100	151	P	
3	13.5564	44.87	25.96	70.83	124.00	-53.17	QP	100	41	P	
4	13.6095	22.26	25.96	48.22	90.47	-42.25	QP	100	211	P	
5	13.6471	26.55	25.96	52.51	90.47	-37.96	QP	100	91	P	
6	13.8210	19.14	25.92	45.06	80.50	-35.44	QP	100	131	P	




## Test Plots and Data of Out of Band Emissions

Tested Mode: TM1

Test Antenna Polarization: Vertical

Remark:

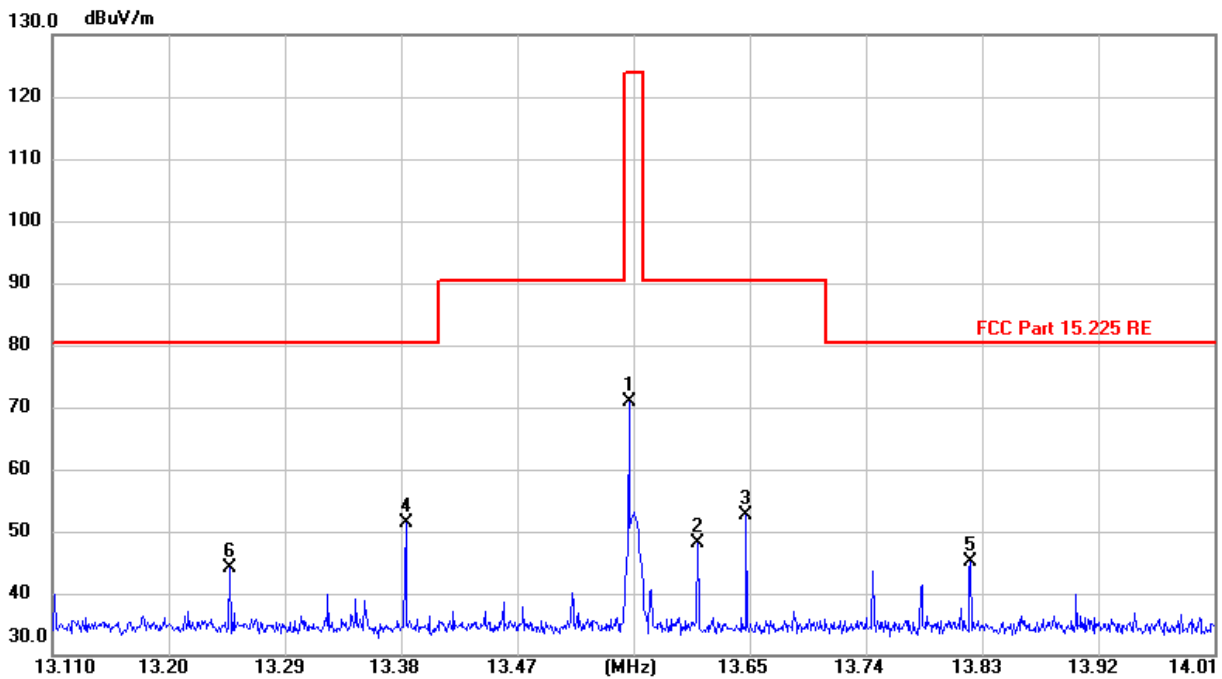

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	13.5564	44.87	25.96	70.83	124.00	-53.17	QP	100	171	P	
2	13.6095	22.26	25.96	48.22	90.47	-42.25	QP	100	126	P	
3	13.6471	26.55	25.96	52.51	90.47	-37.96	QP	100	61	P	
4 *	13.3834	25.28	25.99	51.27	80.50	-29.23	QP	100	341	P	
5	13.8210	19.14	25.92	45.06	80.50	-35.44	QP	100	33	P	
6	13.2468	18.02	26.01	44.03	80.50	-36.47	QP	100	251	P	


## 7. Frequency Stability

### 7.1 Standard and Limit

According to 15.225(e) The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  of the operating frequency over a temperature variation of  $-20$  degrees to  $+50$  degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

### 7.2 Test Procedure

Test is conducting under the description of ANSI C63.10-2013 section 6.8.

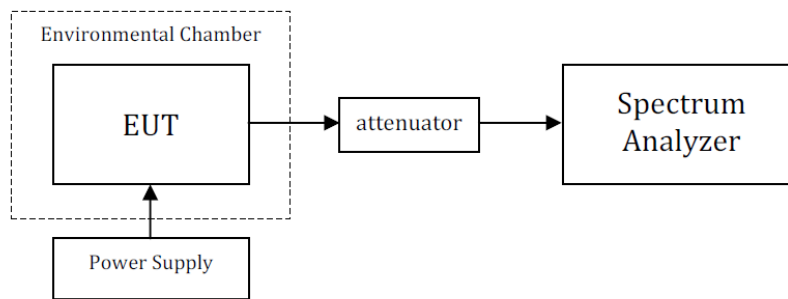

Test Setup Block Diagram

### 7.3 Test Data and Results

Reference Frequency: 13.56MHz, Limit: 100ppm			
Temperature (°C)	Power Supplied (VAC)	Frequency Error	
		Error (Hz)	Error (ppm)
50	120	166	12.24
40	120	142	10.47
30	120	128	9.44
20	120	105	7.74
10	120	95	7.01
0	120	86	6.34
-10	120	76	5.60
-20	120	53	3.91

Reference Frequency: 13.56MHz, Limit: 100ppm			
Temperature (°C)	Power Supplied (VAC)	Frequency Error	
		Error (Hz)	Error (ppm)
20	108	109	8.04
	132	104	7.67

## 8. Occupied Bandwidth

### 8.1 Standard and Limit


According to 15.215 (c), intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

### 8.2 Test Procedure

According to the ANSI 63.10-2013, section 6.9, the emission bandwidth test method as follows.

- 1) Remove the antenna from the EUT and connect to the spectrum analyzer via a low loss RF cable.
  - 2) Set the spectrum analyzer to any one measured frequency within its operating range.
  - 3) Set RBW = 8.2Hz, VBW = 82Hz, Sweep = Auto.
  - 4) Set a reference level on the measuring instrument equal to the highest peak value.
  - 5) Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level.
- Record the frequency difference as the emission bandwidth.

All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down and 99% bandwidth of the emission.

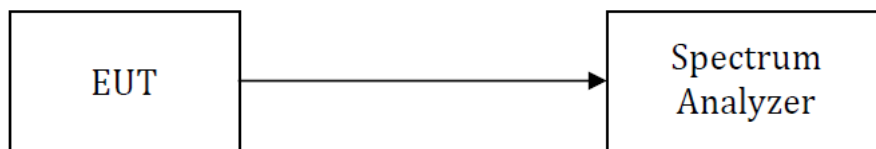


Test Setup Block Diagram

### 8.3 Test Data and Results

Test Frequency	20dB Bandwidth	99% Bandwidth
13.56MHz	71Hz	174Hz

Test Plots of Occupied Bandwidth

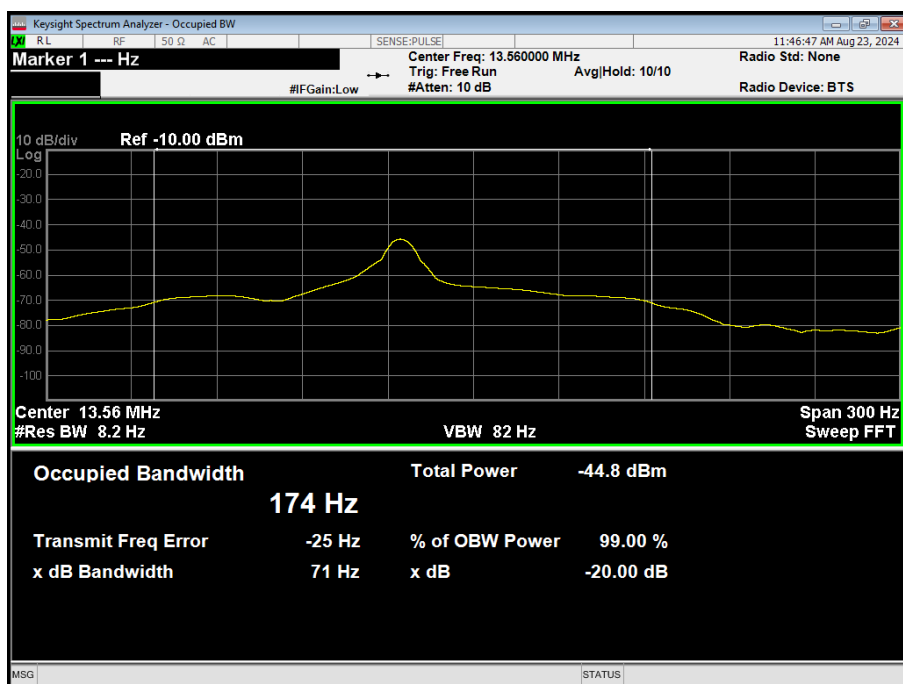

\*\*\*\*\* END OF REPORT \*\*\*\*\*