



Test Report No.:
FCC2024-0014-RF

TEST REPORT

FCC ID	:	2A8UO-346657
Applicant	:	DECATHLON AMERICA LLC
Product Name	:	HRM Belt
Mode No.	:	8801209

CVC Testing Technology Co., Ltd.




Applicant	Name: DECATHLON AMERICA LLC Address: 1160 Battery Street, San Francisco, CA, 94111, USA		
Manufacturer	Name: Qingdao Magene Intelligence Technology Co.,Ltd. Address: Room 302, Building 3, No.328A Chengkang Road, Xiazhuang Subdistrict, Chengyang District.Qingdao, Shandong.China		
Equipment Under Test	Product Name : HRM Belt Model No. : 8801209 Trade mark : Decathlon Serial no. : — Sampling : 1-1		
Date of Receipt.	2024.4.18	Date of Testing	2024.5.8
Test Specification		Test Result	
FCC CFR47 Part 15C Radio Frequency Devices ANSI C63.10-2020/Cor1-2023 KDB 558074 D01 15.247 Meas Guidance v05r02		PASS	
Evaluation of Test Result	The equipment under test was found to comply with the requirements of the standards applied. Seal of CVC Date of issue: 2024. 06. 04		
Approved by: Chen Huawen 	Reviewed by: Xu Zhenfei 	Tested by: Lu Weiji 	
Other Aspects: NONE.			
Abbreviations: Pass= passed Fail = failed N/A= not applicable EUT= equipment, sample(s) under tested			
This test report relates only to the EUT, and shall not be reproduced except in full, without written approval of CVC .			

TABLE OF CONTENTS

1. GENERAL PRODUCT INFORMATION 4

1.1 GENERAL INFORMATION 4

2. TEST SITES5

2.1 TEST FACILITIES 5

2.2 DESCRIPTION OF NON-STANDARD METHOD AND DEVIATIONS 5

2.3 LIST OF TEST AND MEASUREMENT INSTRUMENTS 5

3. TEST CONFIGURATION 6

3.1 TEST MODE6

3.2 DUTY CYCLE7

4. SUMMARY OF MEASUREMENT RESULTS 8

5. MEASUREMENT PROCEDURE9

5.1 CONDUCTED EMISSION 9

5.2 RADIATED EMISSION12

5.3 MAXIMUM CONDUCTED OUTPUT POWER.....23

5.4 MINIMUM 6 DB BANDWIDTH 25

5.5 OCCUPIED CHANNEL BANDWIDTH..... 27

5.6 BAND EDGE MEASUREMENT 29

5.7 MAXIMUM POWER SPECTRAL DENSITY31

5.8 SPURIOUS RF CONDUCTED EMISSIONS 33

6. APPENDIX A 35

1. General Product Information

1.1 General information

Product Name	HRM Belt
Model No.	8801209
Additional model	N/A
Power Supply	DC 3V from battery
Serial Number(SN)	000000880629
firmware	V2.0
software	V1.20
specific power settings	Bluetooth(Low Energy): Default
Antenna Type	PCB Antenna
Antenna Connector	A permanently attached antenna
Antenna Gain	-3.13 dBi (provided by client)
Beamforming gain	Unsupported (provided by client)
Frequency Range	Bluetooth(Low Energy): 2402~2480MHz
Channel Number	Bluetooth(Low Energy):40 Channels
Type of Modulation	Bluetooth(Low Energy):GFSK
Max. Conducted Power	Bluetooth(Low Energy): -3.12dBm
Operate Temp.Range	-10~50℃

Note:

1. The information of the EUT is declared by the manufacturer.
2. The laboratory is not responsible for the product technical specification provided by the client.

2. Test Sites

2.1 Test Facilities

The tests and measurements refer to this report were performed by RF testing Lab. of CVC Testing Technology Co., Ltd.

Add.: No.3, Tiantaiyi Road, Kaitai Avenue, Science City, Guangzhou,Guangdong,510663, People's Republic of China

Telephone : +86-20-32293888

Fax : +86-20-32293889

FCC(Test firm designation number: CN1282)

IC(Test firm CAB identifier number: CN0103)

2.2 Description of Non-standard Method and Deviations

The testing and measurement methods used in this report are applied by all standard methods. Not any non-standard method or deviation from the used standards was used.

2.3 List of Test and Measurement Instruments

Refer to **Appendix A**.

3. Test Configuration

3.1 Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Test Mode	Antenna Delivery	Test Channel
Bluetooth(LE_1M)	1TX / 1RX	0,19,39

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate and different channels. Preliminary tests have been done on all the configuration for confirming worst case. Data rate below means worst-case rate of each test item.

Worst-case data rates and channels are shown as following table.

Test Mode	Data Rate		
	Antenna 1	Antenna 2	MIMO
Bluetooth(LE_1M)	1	/	/

Test Items	Test Antennas	Test Modes	Test Channels
Conducted Emissions	Antenna 1	Bluetooth(Low Energy)	N/A
Radiated Emissions	Antenna 1	Bluetooth(Low Energy)	0
Radiated Emissions (Band Edge)	Antenna 1	Bluetooth(Low Energy)	0,39
Maximum conducted output power	Antenna 1	Bluetooth(Low Energy)	0,19,39
Minimum 6 dB bandwidth	Antenna 1	Bluetooth(Low Energy)	0,19,39
Occupied Channel Bandwidth	Antenna 1	Bluetooth(Low Energy)	0,19,39
Band Edge Measurement	Antenna 1	Bluetooth(Low Energy)	0,39
Maximum Power spectral density	Antenna 1	Bluetooth(Low Energy)	0,19,39
Spurious RF Conducted Emissions	Antenna 1	Bluetooth(Low Energy)	0,19,39

3.2 Duty cycle

TestMode	Antenna	Channel	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	Limit	Verdict
BLE_1M	Ant1	2402	0.39	0.62	62.90	---	---
		2440	0.39	0.62	62.90	---	---
		2480	0.39	0.62	62.90	---	---

4. Summary of measurement results

Summary of measurements of results	Clause in FCC rules	Verdict	Note
Conducted Emissions	15.207	N/A	See Note1
Radiated Emissions	15.247(d),15.205,15.209	PASS	/
Maximum conducted output power	15.247(b)(3)	PASS	Appendix D of Test diagram
Minimum 6 dB bandwidth	15.247(a)(2)	PASS	Appendix B of Test diagram
Occupied Channel Bandwidth	15.247(a)(2)	PASS	Appendix C of Test diagram
Band Edge Measurement	15.247(d)	PASS	Appendix F of Test diagram
Maximum Power spectral density	15.247(e)	PASS	Appendix E of Test diagram
Spurious RF Conducted Emissions	15.247(d)	PASS	Appendix G of Test diagram
Note1:This product is battery powered and is not suitable for conduction emission tests.			

5. Measurement procedure

5.1 Conducted Emission

Ambient condition:

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement:

The EUT was setup according to ANSI C63.10, 2020 for compliance to FCC 47CFR 15.247 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.


The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.

Limits:

Frequency (MHz)	Conducted Limits(dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46*
0.5 - 5	56	46
5 - 30	60	50
Note 1: The lower limit shall apply at the transition frequencies.		
Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.		

Test Setup:

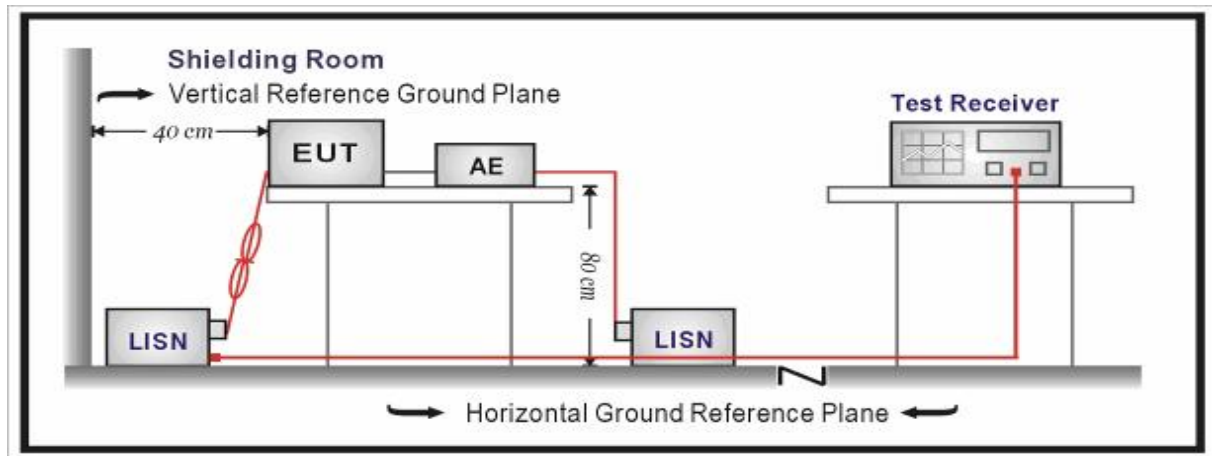

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Level = Reading + Factor.

Measurement Uncertainty:

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$. $U = 3.12$ dB.

Test Results:

This product is battery powered and is not suitable for conduction emission tests.

5.2 Radiated Emission

Ambient condition:

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement:

The EUT was setup and tested according to ANSI C63.10, 2013.

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from Antenna to the EUT was 3 meters.

The Antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the Antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.

The resolution bandwidth below 1GHz setting on the field strength meter is 120 kHz and above 1GHz is 1MHz.

The frequency range from 30MHz to 10th harmonic is checked.

Note: When doing emission measurement above 1GHz, the horn Antenna will be bended down a little (as horn Antenna has the narrow beamwidth) in order to keeping the Antenna in the “cone of radiation” of EUT. The 3dB beamwidth is 10~60 degrees for H-plane and 10~90 degrees for E-plane.

Limits:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).


Frequency	Limit ($\mu\text{V/m}$)	Limit ($\text{dB}\mu\text{V/m @3m}$)	Remark
0.009MHz-0.490MHz	2400/F(kHz)@300m	20lg(240000/F(kHz))	Quasi-peak Level
0.490MHz~1.705MHz	24000/F(kHz)@30m	20lg(240000/F(kHz))	Quasi-peak Level
1.705MHz~30.0MHz	30@30m	49.54	Quasi-peak Level
30MHz-88MHz	100@3m	40.0	Quasi-peak Level
88MHz-216MHz	150@3m	43.5	Quasi-peak Level
216MHz-960MHz	200@3m	46.0	Quasi-peak Level
960MHz-1GHz	500@3m	54.0	Quasi-peak Level
Above 1GHz	500@3m	54.0	Average Level
	5000@3m	74.0	Peak Level

Spurious Radiated Emissions are permitted in any of the frequency bands listed below:


MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.
12.57675-12.57725	322-335.4	3600-4400	/
13.36-13.41	/	/	/

Test Setup:


Below 30MHz Test Setup:

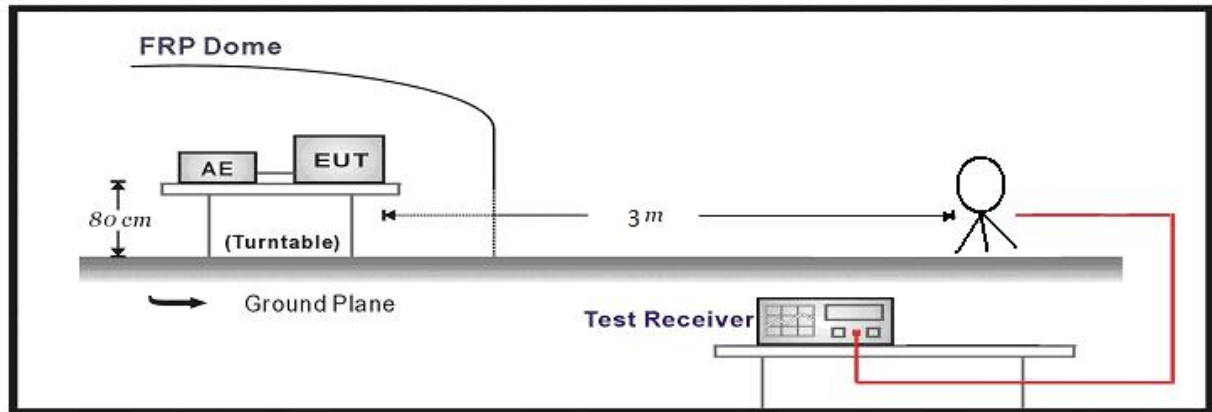

Below 1GHz Test Setup:

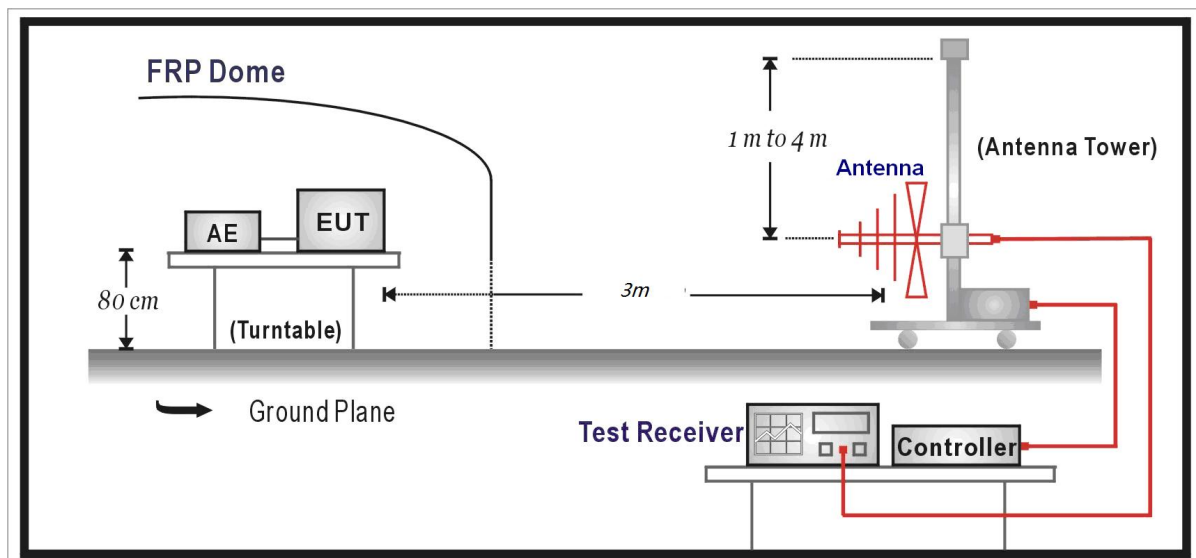

Above 1GHz Test Setup:

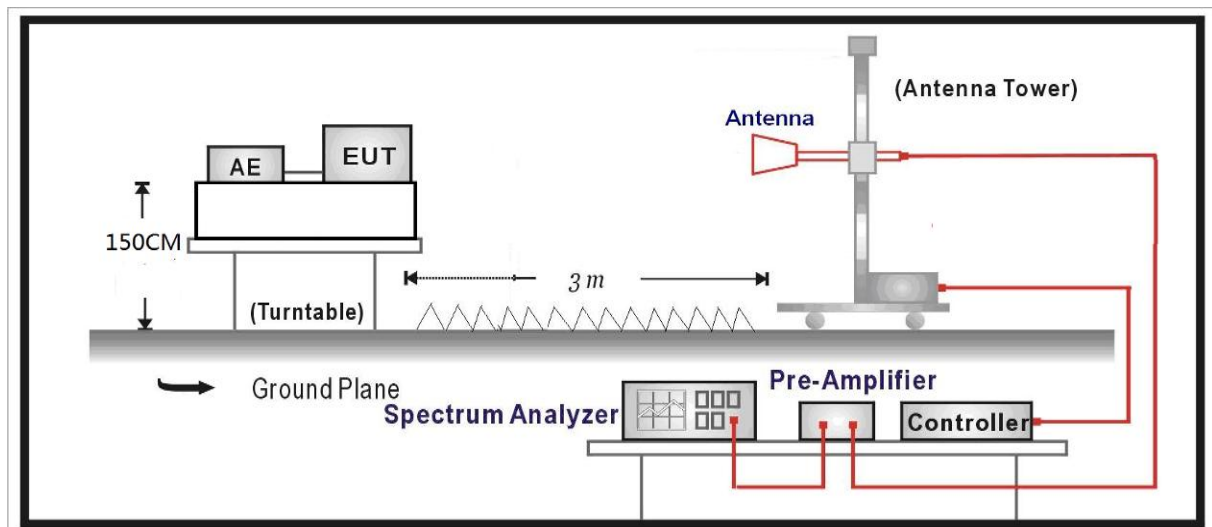

Measurement Data:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Level = Reading - Factor

Factor = Preamplifier Factor – Antenna Factor–Cable Loss

Measurement Uncertainty:

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
9KHz-30MHz	3.55 dB
30MHz-200MHz	4.19 dB
200MHz-1GHz	3.63 dB
Above 1GHz	3.68 dB


Test Results:

Bluetooth(Low Energy):

During the test, the Radiates Emission from 30MHz to 40GHz was performed in Bluetooth(Low Energy) all modes with all channels and all antennas. BLE(1Mbps), channel 0, antenna 1 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

Radiates Emission	9k~1G
Test channel	Worst-Case
Polarity	Horizontal


Final Data List							
Frequency [MHz]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Pass/Fail
191.805	18.6	32.5	43.5	11.0	168.5	137.6	PASS
240.312	20.4	42.7	46.0	3.3	118.7	173.5	PASS
263.953	20.9	38.1	46.0	7.9	113.5	157.3	PASS
287.593	21.2	39.4	46.0	6.6	110.0	146.1	PASS
335.744	23	38.4	46.0	7.6	108.7	132.8	PASS
383.724	24	38.6	46.0	7.4	100.0	170.0	PASS

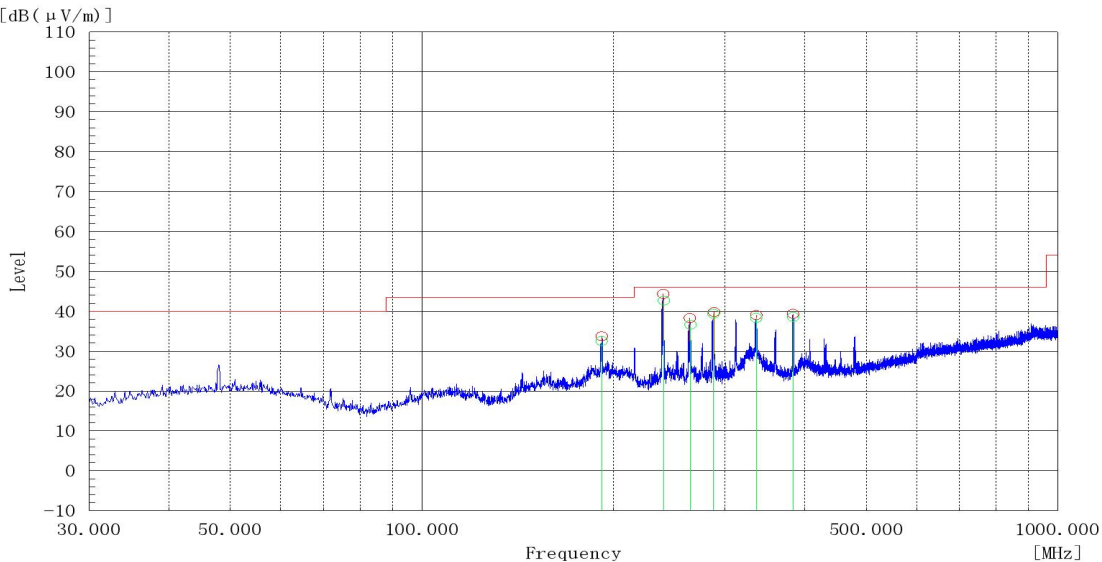

Note: The emission levels of 9kHz-30MHz were greater than 20dB margin.

Radiates Emission	9k~1G
Test channel	Worst-Case
Polarity	Vertical

Final Data List							
Frequency [MHz]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Pass/Fail
48.072	21.1	34.9	40.0	5.1	103.3	110.4	PASS
72.081	16	26.1	40.0	13.9	100.0	92.2	PASS
191.964	18.6	34.1	43.5	9.4	99.9	94.8	PASS
239.941	20.4	35.4	46.0	10.6	165.2	103.1	PASS
282.369	21.3	31.7	46.0	14.3	170.5	112.7	PASS
931.647	33.2	30.5	46.0	15.5	285.1	194.5	PASS

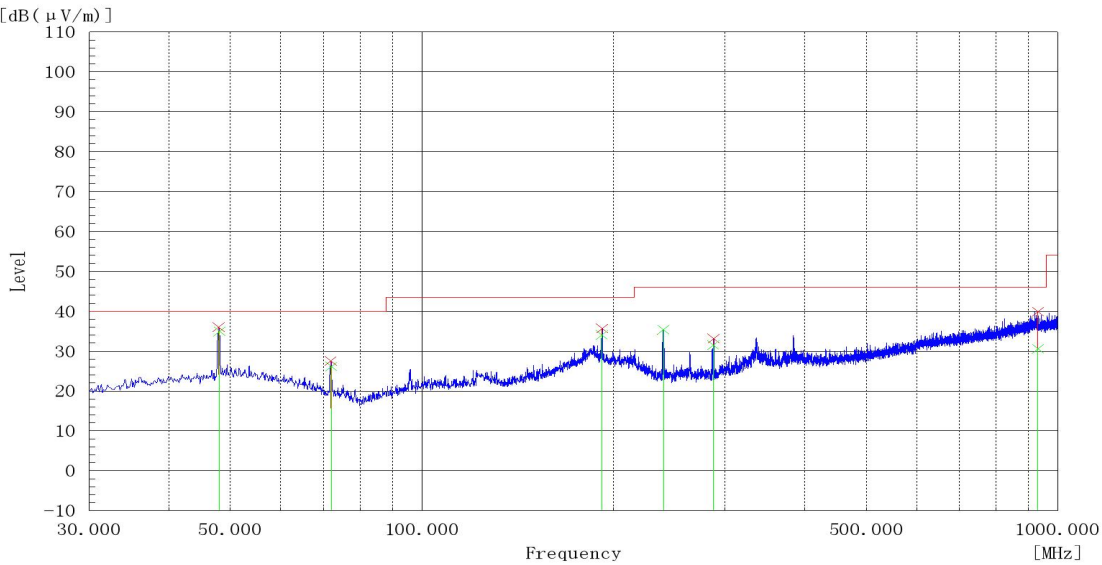

Note: The emission levels of 9kHz-30MHz were greater than 20dB margin.

Radiates Emission		1G~3G							
Test channel		Worst-Case							
polarization		Horizontal							
Suspected List									
Frequency[MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detect or	Height [cm]	Angle deg	Pass/ Fail
1486.928	-6.21	45.02	38.81	74.00	35.19	PK	150	116.3	PASS
2402.487	-5.14	91.66	86.52	74.00	-12.52	PK	150	34.9	---
3642.228	-4.76	40.90	36.14	74.00	37.86	PK	150	296.7	PASS
4436.574	-1.92	42.89	40.97	74.00	33.03	PK	150	233.4	PASS
4796.928	-1.67	42.72	41.05	74.00	32.95	PK	150	187.3	PASS
4960.585	-1.54	53.01	51.47	74.00	22.53	PK	150	49.3	PASS
1486.543	-6.21	31.25	25.04	54.00	28.96	AV	150	116.3	PASS
2402.736	-5.14	91.67	86.53	54.00	-32.53	AV	150	34.9	---
3642.582	-4.76	26.44	21.68	54.00	32.32	AV	150	296.7	PASS
4436.285	-1.92	25.26	23.34	54.00	30.66	AV	150	233.4	PASS
4796.295	-1.67	27.80	26.13	54.00	27.87	AV	150	187.3	PASS
4960.948	-1.54	51.46	49.92	54.00	4.08	AV	150	49.3	PASS

Note: The signal beyond the limit is carrier

Radiates Emission		1G~3G							
Test channel		Worst-Case							
polarization		Vertical							
Suspected List									
Frequency[MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detect or	Height [cm]	Angle deg	Pass/ Fail
1533.028	-6.12	41.84	35.72	74.00	38.28	PK	150	131	PASS
2024.295	-5.58	41.85	36.27	74.00	37.73	PK	150	88	PASS
2402.568	-5.14	81.18	76.04	74.00	-2.04	PK	150	88	---
3166.278	-5.35	42.93	37.58	74.00	36.42	PK	150	330	PASS
3643.386	-4.76	45.69	40.93	74.00	33.07	PK	150	230	PASS
4783.276	-1.67	49.83	48.16	74.00	25.84	PK	150	88	PASS
1533.487	-6.12	27.86	21.74	54.00	32.26	AV	150	59	PASS
2024.395	-5.58	25.26	19.68	54.00	34.32	AV	150	117	PASS
2402.205	-5.14	81.06	75.92	54.00	-21.92	AV	150	117	---
3166.271	-5.35	28.72	23.37	54.00	30.63	AV	150	345	PASS
3643.527	-4.76	26.65	21.89	54.00	32.11	AV	150	159	PASS
4783.162	-1.67	27.88	26.21	54.00	27.79	AV	150	88	PASS

Note: The signal beyond the limit is carrier

Radiates Emission		3G~18G							
Test channel		Worst-Case							
polarization		Horizontal							
Suspected List									
Frequency[MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detect or	Height [cm]	Angle deg	Pass/ Fail
4330.6572	-0.49	40.72	40.23	74.00	33.77	PK	150	174	PASS
4960.6584	1.29	55.36	56.65	74.00	17.35	PK	150	210	PASS
7093.9746	8.04	29.98	38.02	74.00	35.98	PK	150	115	PASS
9291.6639	10.63	27.54	38.17	74.00	35.83	PK	150	341	PASS
12761.4857	12.66	27.37	40.03	74.00	33.97	PK	150	115	PASS
13871.5748	14.40	25.54	39.94	74.00	34.06	PK	150	19	PASS
4330.6572	-0.49	15.07	14.58	54.00	39.42	AV	150	31	PASS
4960.6584	1.29	27.63	28.92	54.00	25.08	AV	150	210	PASS
7093.9746	8.07	15.06	23.13	54.00	30.87	AV	150	359	PASS
9291.6639	10.68	13.63	24.31	54.00	29.69	AV	150	329	PASS
12761.4857	12.66	13.21	25.87	54.00	28.13	AV	150	317	PASS
13871.5748	14.40	17.84	32.24	54.00	21.76	AV	150	359	PASS

Radiates Emission		3G~18G							
Test channel		Worst-Case							
polarization		Vertical							
Suspected List									
Frequency[MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detect or	Height [cm]	Angle deg	Pass/ Fail
4330.6287	-0.49	35.83	35.34	74.00	38.66	PK	150	41	PASS
4960.6109	1.29	34.05	35.34	74.00	38.66	PK	150	149	PASS
6757.8864	6.77	29.51	36.28	74.00	37.72	PK	150	315	PASS
8414.0823	9.04	30.34	39.38	74.00	34.62	PK	150	196	PASS
11550.8395	11.15	29.59	40.74	74.00	33.26	PK	150	1	PASS
14591.6984	17.15	28.27	45.42	74.00	28.58	PK	150	53	PASS
4330.6287	-0.49	14.84	14.35	54.00	39.65	AV	150	41	PASS
4960.6109	1.29	15.67	16.96	54.00	37.04	AV	150	149	PASS
6757.8864	6.77	13.95	20.72	54.00	33.28	AV	150	358	PASS
8414.0823	9.04	12.68	21.72	54.00	32.28	AV	150	124	PASS
11550.8395	11.15	13.62	24.77	54.00	29.23	AV	150	327	PASS
14591.6984	17.15	16.25	33.40	54.00	20.60	AV	150	339	PASS

Radiates Emission		18G~40G							
Test channel		Worst-Case							
polarization		Horizontal							
Suspected List									
Frequency[MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detect or	Height [cm]	Angle deg	Pass/ Fail
19456.5958	1.33	38.13	39.46	74.00	34.54	PK	150	240	PASS
21372.9295	1.74	37.32	39.06	74.00	34.94	PK	150	290	PASS
23051.7286	2.94	37.10	40.04	74.00	33.96	PK	150	110	PASS
25366.3784	4.25	36.36	40.61	74.00	33.39	PK	150	150	PASS
28206.8286	5.52	37.69	43.21	74.00	30.79	PK	150	160	PASS
30070.4929	6.67	37.66	44.33	74.00	29.67	PK	150	230	PASS
19350.9486	1.33	29.18	30.51	54.00	23.49	AV	150	310	PASS
21370.7772	1.74	26.74	28.48	54.00	25.52	AV	150	220	PASS
23150.7918	3.02	28.17	31.19	54.00	22.81	AV	150	150	PASS
25410.3857	4.26	25.34	29.60	54.00	24.40	AV	150	350	PASS
28184.8768	5.51	24.97	30.48	54.00	23.52	AV	150	30	PASS
30070.4291	6.67	25.62	32.29	54.00	21.71	AV	150	230	PASS

Radiates Emission		18G~40G							
Test channel		Worst-Case							
polarization		Vertical							
Suspected List									
Frequency[MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detect or	Height [cm]	Angle deg	Pass/ Fail
19419.1958	1.33	37.90	39.23	74.00	34.77	PK	150	100	PASS
21663.3286	1.82	38.07	39.89	74.00	34.11	PK	150	270	PASS
23744.7847	3.50	38.99	42.49	74.00	31.51	PK	150	30	PASS
25944.9928	4.48	37.95	42.43	74.00	31.57	PK	150	280	PASS
28730.4885	5.84	36.88	42.72	74.00	31.28	PK	150	60	PASS
31031.9374	6.24	36.93	43.17	74.00	30.83	PK	150	170	PASS
19410.3291	1.33	27.24	28.57	54.00	25.43	AV	150	210	PASS
21678.7209	1.82	27.58	29.40	54.00	24.60	AV	150	140	PASS
23768.9876	3.52	28.16	31.68	54.00	22.32	AV	150	50	PASS
26002.2584	4.50	25.23	29.73	54.00	24.27	AV	150	210	PASS
28708.4252	5.83	25.46	31.29	54.00	22.71	AV	150	20	PASS
31117.7112	6.21	24.94	31.15	54.00	22.85	AV	150	240	PASS

Band Edge:

During the test, the Band Edge was performed in Bluetooth(Low Energy) all modes with all channels and all antennas. BLE(1Mbps), channel 0, 39, antenna 1 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

Test mode			Bluetooth(LE_1M)						
Test channel			Lowest channel						
polarization			Horizontal						
Suspected List									
Frequency [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Height [cm]	Angle deg	Pass/ Fail
2324.392	36.47	21.32	57.79	74.00	16.21	PK	150	202	PASS
2335.749	36.58	17.80	54.38	74.00	19.62	PK	150	355	PASS
2390.139	37.07	15.54	52.61	74.00	21.39	PK	150	102	PASS
2324.310	36.47	2.96	39.43	54.00	14.57	AV	150	343	PASS
2335.728	36.58	2.44	39.02	54.00	14.98	AV	150	188	PASS
2390.139	37.07	2.52	39.59	54.00	14.41	AV	150	272	PASS

Test mode			Bluetooth(LE_1M)						
Test channel			Lowest channel						
polarization			Vertical						
Suspected List									
Frequency [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Height [cm]	Angle deg	Pass/ Fail
2323.748	36.47	16.01	52.48	74.00	21.52	PK	150	4	PASS
2347.328	36.68	13.29	49.97	74.00	24.03	PK	150	72	PASS
2390.139	37.07	12.43	49.50	74.00	24.50	PK	150	4	PASS
2323.997	36.47	2.27	38.74	54.00	15.26	AV	150	4	PASS
2347.328	36.68	2.85	39.53	54.00	14.47	AV	150	157	PASS
2390.139	37.07	2.92	39.99	54.00	14.01	AV	150	4	PASS

Test mode			Bluetooth(LE_1M)						
Test channel			Highest channel						
polarization			Horizontal						
Suspected List									
Frequency [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Height [cm]	Angle deg	Pass/ Fail
2483.5484	37.54	17.52	55.06	74.00	18.94	PK	150	227	PASS
2500.3295	37.62	14.81	52.43	74.00	21.57	PK	150	313	PASS
2539.7482	37.77	14.56	52.33	74.00	21.67	PK	150	354	PASS
2483.5484	37.54	3.25	40.79	54.00	13.21	AV	150	313	PASS
2500.3482	37.62	2.59	40.21	54.00	13.79	AV	150	157	PASS
2539.7285	37.77	2.44	40.21	54.00	13.79	AV	150	242	PASS

Test mode			Bluetooth(LE_1M)						
Test channel			Highest channel						
polarization			Vertical						
Suspected List									
Frequency [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Height [cm]	Angle deg	Pass/ Fail
2483.5484	37.54	13.74	51.28	74.00	22.72	PK	150	237	PASS
2509.7492	37.65	14.30	51.95	74.00	22.05	PK	150	53	PASS
2535.5765	37.75	14.05	51.80	74.00	22.20	PK	150	95	PASS
2483.5484	37.54	2.68	40.22	54.00	13.78	AV	150	237	PASS
2509.7721	37.65	2.42	40.07	54.00	13.93	AV	150	2	PASS
2535.5875	37.75	2.74	40.49	54.00	13.51	AV	150	110	PASS

5.3 Maximum conducted output power

Ambient condition:

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement:

The EUT was tested according to DTS test procedure of ANSI C63.10 for compliance to FCC 47CFR 15.247 requirements. The maximum conducted output power using ANSI C63.10 section 11.9.2.3 AVGPM Average power meter method.

1. Power meter and sensor's minimum video bandwidth is 50MHz, larger than 802.11n(40MHz) bandwidth;
2. Fast responding diode sensors respond immediately to changes in power level to reduce total test time.
3. Use average detector to test.

During the process of the testing, The EUT was connected to Spectrum Analyzer with a known loss. The EUT is max power transmission with proper modulation. The Average detector is used. We use Maximum Average Conducted Output Power Level Method AVGSA-2 in KDB 558074 D01 /KDB662911 D01 for this test.

The conducted Power is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically.


Limits:

Average Output Power	$\leq 1W$ (30dBm)
----------------------	-------------------

Note: the conducted output power limit specified above is based on the use the antennas with directional gains that do not exceed 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated Levels above, as appropriate, by the amount in dB that the directional gain of antenna exceeds 6 dBi.

Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Test Setup:



Measurement Uncertainty:

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.44$ dB.

Test Results:

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	-3.12	≤30	PASS
	Ant1	2440	-4.35	≤30	PASS
	Ant1	2480	-3.81	≤30	PASS

5.4 Minimum 6 dB Bandwidth

Ambient condition:

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement:


The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable. RBW is set to 100 kHz; VBW is set to 300 kHz on spectrum analyzer.
Detector=Peak, Trace mode=Max hold.

Limits:

Rule Part 15.247 (a) (2) specifies that “Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.”

Minimum 6dB Bandwidth	≥ 500 kHz
-----------------------	-----------

Test Setup:



Measurement Uncertainty:

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 936 \text{ Hz}$.

Test Results:

TestMode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.70	2401.61	2402.31	≥0.5	PASS
		2440	0.68	2439.63	2440.31	≥0.5	PASS
		2480	0.68	2479.64	2480.32	≥0.5	PASS

5.5 Occupied Channel Bandwidth

Ambient condition:


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement:

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable. RBW is set to 50 kHz; VBW is set to 200 kHz on spectrum analyzer.

Detector=Peak, Trace mode=Max hold.

Test Setup:



Measurement Uncertainty:

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 936$ Hz.

Test Results:

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	1.035	2401.469	2402.504	---	---
		2440	1.039	2439.465	2440.504	---	---
		2480	1.043	2479.461	2480.504	---	---

5.6 Band Edge Measurement

Ambient condition:

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


Method of Measurement:

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable the band edge of the lowest and highest channels were measured. The peak detector is used and RBW is set to 100 kHz and VBW is set to 300 kHz on spectrum analyzer.

Limits:

Rule Part 15.247(d) specifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Test Setup:



Measurement Uncertainty:

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 936 \text{ Hz}$, $2 \text{ GHz}-3 \text{ GHz} = 1.407 \text{ dB}$.

Test Results:

TestMode	Antenna	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	Low	2402	-5.11	-51.97	≤-25.11	PASS
		High	2480	-6.99	-51.49	≤-26.99	PASS

5.7 Maximum Power Spectral Density

Ambient condition:

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement:

During the process of the testing, The EUT was connected to Spectrum Analyzer with a known loss. The EUT is max power transmission with proper modulation. The Average detector is used. We use Method AVGPSD-2 in KDB 558074 D01 for this test.


The conducted Power is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically.

Limits:

Rule Part 15.247(e) specifies that" For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Maximum Power Spectral Density	$\leq 8 \text{ dBm} / 3\text{kHz}$
--------------------------------	------------------------------------

Test Setup:



Measurement Uncertainty:

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.75\text{dB}$.

Test Results:

TestMode	Antenna	Channel	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-20.08	≤8	PASS
		2440	-21.30	≤8	PASS
		2480	-28.29	≤8	PASS

5.8 Spurious RF Conducted Emissions

Ambient condition:

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement:

The EUT was connected to the spectrum analyzer with a known loss. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. Set RBW to100kHz and VBW to 300 kHz, Sweep is set to AUTO .The test is in transmitting mode.

Limits:

Rule Part 15.247(d) pacifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

Test Setup:



Measurement Uncertainty:

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor k = 1.96.

Frequency	Uncertainty
100kHz-2GHz	0.684 dB
2GHz-26GHz	1.407 dB

Test Results:

TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	Reference	-5.92	-5.92	---	PASS
			30~1000	-5.92	-60.26	≤ -25.92	PASS
			1000~26500	-5.92	-48.39	≤ -25.92	PASS
		2440	Reference	-8.07	-8.07	---	PASS
			30~1000	-8.07	-60.78	≤ -28.07	PASS
			1000~26500	-8.07	-44.27	≤ -28.07	PASS
		2480	Reference	-6.11	-6.11	---	PASS
			30~1000	-6.11	-60.72	≤ -26.11	PASS
			1000~26500	-6.11	-48.29	≤ -26.11	PASS

6. Appendix A

Test Equipment	Type/Mode	SERIAL NO.	Equipment No.	Manufacturer	Cal. Due
Spectrum Analyzer	FSV40	101580	DZ-000238-3	R&S	2025/04/22
Comprehensive Test Instrument	CMW270	100304	DZ-000240-1	R&S	2024/12/03
Analog Signal Generator	SMB100A	181858	DZ-000238-2	R&S	2025/04/27
Vector Signal Generator	SGT100A	111661	DZ-000238-1	R&S	2025/04/27
RF Radio Frequency Switch	JS0806-2	19H9080187	DZ-000241	Tonscend	2025/04/27
Programmable DC Power Supply	E3644A	MY58036222	DZ-000178	KEYSIGHT	2025/04/11
3m Semi-Anechoic Chamber	FACT-4	ST08035	WKNA-0024	ETS	2024/12/12
5m Semi-Anechoic Chamber	SAC-5	SAC-5-2.0	EM-000557	COMTEST	2024/11/02
Spectrum Analyzer	N9010B	MY57470323	DZ-000174	KEYSIGHT	2025/01/02
EMI Test Receiver	N9038A-508	MY532290079	EM-000397	Agilent	2025/01/13
EMI Test Receiver	ESR7	102235	VG DY-0956	R&S	2025/01/13
loop antenna	HLA 6121	540046	EM-000546	TESEQ	2025/06/05
Broadband Antenna	VULB 9168	01537	EM-000736-1	SCHWAR ZBECK	2025/04/19
Broadband Antenna	VULB 9163	9163-530	EM-000342	SCHWAR ZBECK	2025/06/10
Waveguide Horn Antenna	HF906	360306/008	EM-000093	R&S	2025/01/03
Waveguide Horn Antenna	BBHA9170	00949	DZ-000209-2	SCHWAR ZBECK	2025/01/03
Bandstop Filters	SW-BSF-2400-100-7-A1	/	EM-000495	/	2024/08/29
Preamplifier	BBV 9721	9721-050	DZ-000209-1	SCHWAR ZBECK	2025/06/04
EMI Test Receiver	ESR3	102394	VG DY-0705	R&S	2025/01/14
LISN	NSLK 8127	8127644	EM-000370	SCHWAR ZBECK	2024/07/27
Plus Limiter (#2)	VTSD 9561	9561-F017	EM-000367	SCHWAR ZBECK	2025/08/30
Shielding Room(#2)	GP1A	001	WKNF-0006	LEINING	2024/08/07
Temperature and humidity meter	MHO-C201	/	DZ-000249-2	Seconds test	2024/09/23

Dynacomm	Software Release	Software Developer
TS1120-3 Test System(Conduction test)	3.3.38	Tonscend
TS+ (3m,Radiation test)	JS32-RE 4.0.0	Tonscend
TS+ (5m,Radiation test)	JS32-RE 5.0.0	Tonscend
TS+ (Conducted Emissions)	JS32-CE 3.0.0.1	Tonscend

_____ The End _____

Important

1. The test report is invalid without the official stamp of CVC;
2. Any part photocopies of the test report are forbidden without the written permission from CVC;
3. The test report is invalid without the signatures of Author and Reviewer;
4. The test report is invalid if altered;
5. Objections to the test report must be submitted to CVC within 15 days;
6. Generally, commission test is responsible for the tested samples only;
7. As for the test result, “—” or “ N/A” means “not applicable”, “ / ”means “not testing”, “P” means “pass” and “F” means “fail”.

Address: No.3,Tiantaiyi Road, Kaitai Avenue, Science City, Guangzhou, China (Test location)

Post Code: 510663 Tel: 020-32293888

FAX: 020 32293889 E-mail: office@cvc.org.cn