

## YS268 Single Function Remote Control Car

### Battery Installation:

#### -Transmitter:


1. Remove battery cover
2. Insert one 9Volt battery into the battery compartment
3. Replace battery cover firmly.

#### - Vehicle:

1. Remove battery cover
2. Insert 4 UM-3 1.5 Volt (AA) batteries into the battery compartment.
3. Replace battery cover firmly.

### Operating Instruction:

1. Turn the car switch to "ON" position.
2. Operate the car with transmitter.
3. Push and release the shaft to start the car in forward direction/ Reverse turning.
4. Turn the car's switch to the "OFF" position after used.
5. Remove all batteries from the transmitter and car

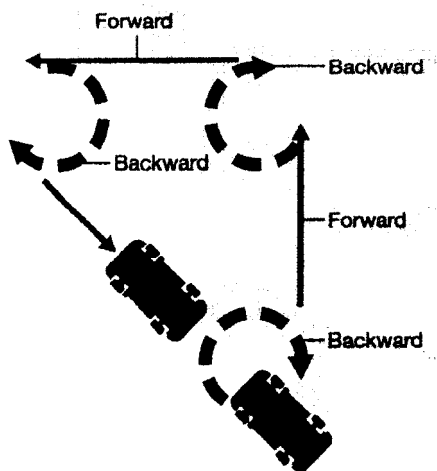

Note: The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modification could void the user's authority to operate the equipment.