



Test Report for FCC

FCC ID : TKWFS2-AWB2

| | | | | | |
|---|--|---|---|-------------|----|
| Report Number | | ESTRFC1706-004 | | | |
| Applicant | Company name | Suprema Inc | | | |
| | Address | 17F-5, Parkview officetower, , 248, Jeongjail-ro Bundang-gu, Seongnam-si, Gyeonggi-do South Korea | | | |
| | Telephone | +82-31-710-4908 | | | |
| Product | Product name | Face Station2 | | | |
| | Model No. | FS2-AWB | Manufacturer | Suprema Inc | |
| | Serial No. | NONE | Country of origin | KOREA | |
| Test date | 26-May-17 | | Date of issue | 19-Jun-17 | |
| Testing location | 140-16, Eongmalli-ro, Majang-myeon, Icheon-si, Gyeonggi-do, Rep. of Korea | | | | |
| Standard | FCC PART 15 Subpart C(15.209), ANSI C 63.10(2009) | | | | |
| Test item | <input checked="" type="checkbox"/> Conducted Emission | <input type="checkbox"/> Class A | <input checked="" type="checkbox"/> Class B | Test result | OK |
| | <input checked="" type="checkbox"/> Radiated Emission | <input type="checkbox"/> Class A | <input checked="" type="checkbox"/> Class B | Test result | OK |
| Measurement facility registration number | | 659627 | | | |
| Tested by | Senior Engineer H.K. Lee (Signature)  | | | | |
| Reviewed by | Engineering Manager I.K. Hong (Signature)  | | | | |
| Abbreviation | OK, Pass = Complied, Fail = Failed, N/A = not applicable | | | | |
| <p>* Note</p> <ul style="list-style-type: none"> - This test report is not permitted to copy partly without our permission - This test result is dependent on only equipment to be used - This test result based on a single evaluation of one sample of the above mentioned | | | | | |

Contents

| | |
|--|----|
| 1. Laboratory Information | 3 |
| 2. Description of EUT | 4 |
| 3. Test Standards | 5 |
| 4. Measurement condition | 6 |
| 5. Measurement of radiated emission | 8 |
| 5.1 Radiated emission limits, general requirements | 8 |
| 5.2 Measurement equipment | 8 |
| 5.3 Environmental conditions | 8 |
| 5.4 Test data | 9 |
| 6. Measurement of conducted emission | 10 |
| 6.1 Measurement equipment | 10 |
| 6.2 Environmental conditions | 10 |
| 6.3 Test data | 11 |
| 7. Photographs of test setup | 12 |
| 8. Photographs of EUT | 14 |

Appendix 1. Special diagram
Appendix 2. Antenna Requirement

1. Laboratory Information

1.1 General

This EUT (Equipment Under Test) has been shown to be capable of compliance with the applicable technical standards and is tested in accordance with the measurement procedures as indicated in this report. ESTECH Lab attests to accuracy of test data. All measurement reported herein were performed by ESTECH Co., Ltd.

ESTECH Lab assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

1.2 Test Lab.

Corporation Name : ESTECH Co., Ltd.

Head Office : Suite 1015 World Meridian II, 123 Gasan Digital 2-ro, Geumcheon-gu,
Seoul 153-759, R. O. Korea

EMC/Telecom/Safety Test Lab : 140-16, Eongmalli-ro, Majang-myeon, Icheon-si,
Gyeonggi-do, Rep, of Korea

1.3 Official Qualification(s)

KCC : Granted Accreditation from Ministry of Information & Communication for EMC, Safety
and Telecommunication

KOLAS : Accredited Lab By Korea Laboratory Accreditation Schema base on CENELEC

FCC : Filed Laboratory at Federal Communications Commission

VCCI : Granted Accreditation from Voluntary Control Council for Interference from ITE

2. Description of EUT

2.1 Summary of Equipment Under Test

Product : Face Station2
Model Number : FS2-AWB
Serial Number : NONE
Manufacturer : Suprema Inc.
Country of origin : KOREA
Operating Frequency : 117.4 kHz
Antenna Type : Coil Antenna
Modulation Type : ASK
Channel Spacing : 1

Power Rating : INPUT : (100 – 240) Va.c., (50 – 60) Hz, 1.7 A
: OUTPUT : 24.0 Vd.c., 2.5 A

Receipt Date : 5-Dec-16

X-tal list(s) or Frequencies generated : The highest operating frequency is 2 480 MHz

2.2 General descriptions of EUT

CPU 1.4 GHz Quad Core
Memory 8GB Flash + 1GB RAM
LCD 4" color TFT LCD (Resolution: 480 x 800)
Sound 24 bit/Voice DSP (echo cancel)
Operating temperature -20 °C ~ 50 °C
Storage temperature -40 °C ~ 70 °C
Operating humidity 0 % ~ 80 %, non-condensing
Storage humidity 0 % ~ 90 %, non-condensing
Camera CMOS VGA (720 x 480) pixels
Camera angle Visual : Diagonal 92.7° , IR : Diagonal 58°
Dimension (W x H x D) 141 mm x 125 mm x 164 mm (h)
Weight Device: 610 g (With Wall-Bracket)
RF Option RFID : 13.56 MHz / 117 kHz

3. Test Standards

Test Standard : FCC PART 15 (2010)

This Standard sets out the regulations under which an intentional, unintentional, or incidental radiator may be operated without an individual license. It also contains the technical specifications, administrative requirements and other conditions relating to the marketing of Part 15 devices.

Test Method : ANSI C 63.4 (2003)

This standard sets forth uniform methods of measurement of radio-frequency (RF) signals and noise emitted from both unintentional and intentional emitters of RF energy in the frequency range 9 kHz to 40 GHz. Methods for the measurement of radiated and AC power-line conducted radio noise are covered and may be applied to any such equipment unless otherwise specified by individual equipment requirements. These methods cover measurement of certain devices that deliberately radiate energy, such as intentional emitters, but does not cover licensed transmitters. This standard is not intended for certification/approval of avionic equipment or for industrial, scientific, and medical (ISM) equipment. These methods apply to the measurement of individual units or systems comprised of multiple units.

Summary of Test Results

| Applied Standard : 47 CFR Part 15, Subpart C | | | | |
|--|-----------------------------|--------|----------------------|-------|
| Standard | Test Type | Result | Remark | Limit |
| 15.203 | Antenna Requirement | Pass | See Appendix 2 | |
| 15.207 | AC Power Conducted Emission | Pass | Meet the requirement | |
| 15.205 | Restricted bands | Pass | Meet the requirement | |
| 15.209 | Radiated Emission | Pass | Meet the requirement | |


4. Measurement Condition

4.1 EUT Operation.

–The EUT was tested, under transmission / receiving

1. Normal communication with RF OUT Frequency(117 kHz).
2. Monitoring the operation status of frequency by using RF CARD.

4.2 Configuration and Peripherals

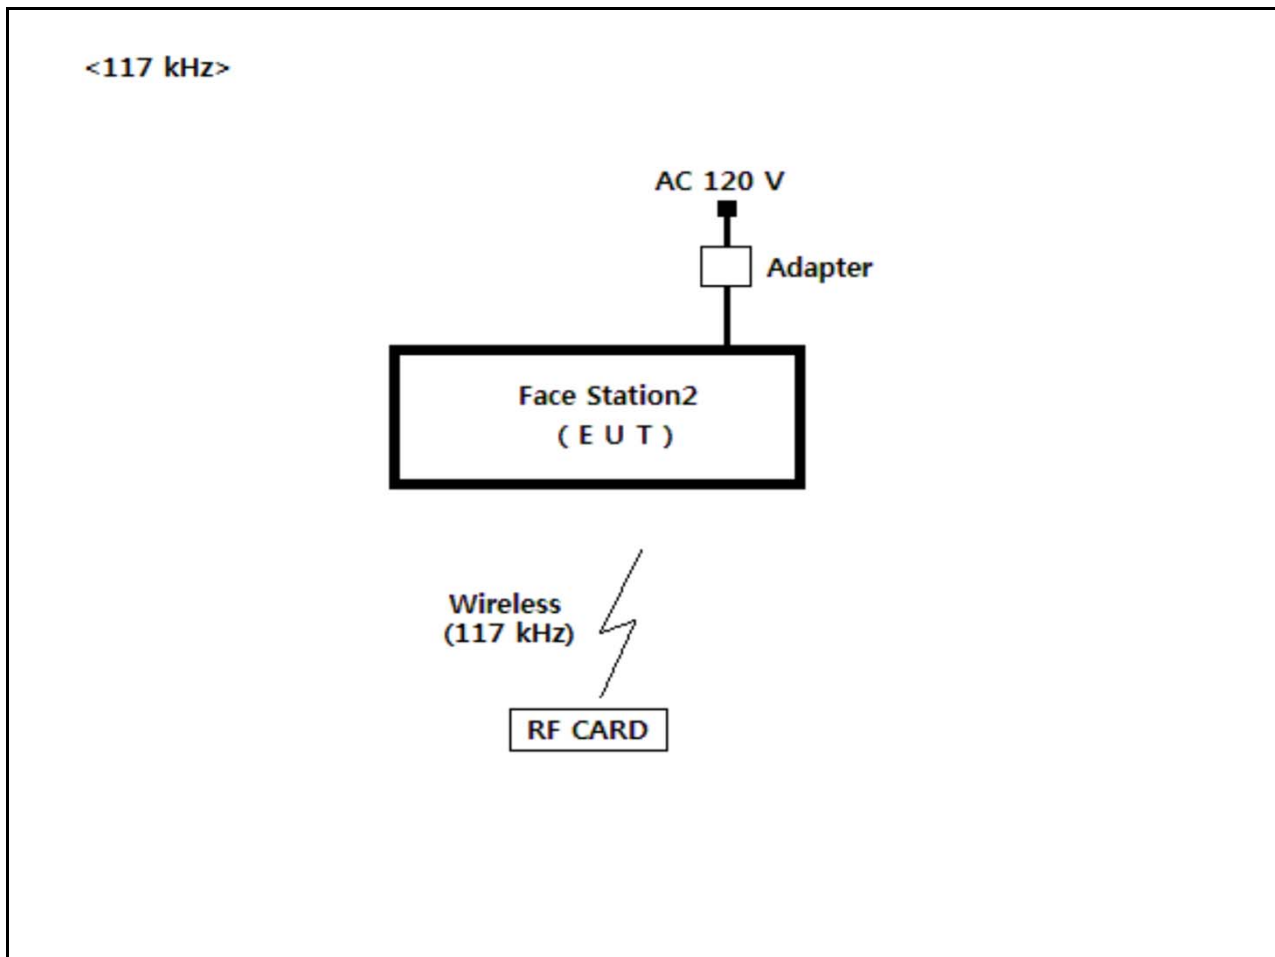

4.3 EUT and Support equipment

| Equipment Name | Model Name | S/N | Manufacturer | Remark (FCC ID) |
|----------------|-----------------|------|-------------------|-----------------|
| Face Station2 | FS2-AWB | NONE | Suprema Inc | EUT |
| Adapter | JPW128KA1200N05 | NONE | BridgePower Corp. | |
| RF CARD | NONE | NONE | Suprema Inc | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

4.4 Cable Connecting

| Start Equipment | | End Equipment | | Cable Standard | | Remark |
|-----------------|--------------------|---------------|--------------------|----------------|------------|--------|
| Name | I/O port | Name | I/O port | Length | Shielded | |
| Face Station2 | Power | Adapter | – | 2 | Unshielded | |
| Face Station2 | Wireless (117 kHz) | RF CARD | Wireless (117 kHz) | – | – | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

5. Measurement of radiated disturbance

The EUT was placed on the top of a rotating table 0.8 m above the ground at a 3 m Open test site. The table was rotated 360 ° to determine the position of the highest radiation. Then antenna is a loop antenna is fixed at one meter above the ground to determine the maximum value of the field strength. Both parallel and perpendicular of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0 degrees to 360 ° to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

5.1 Radiated emission limits, general requirements

Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field Strength(microvolt/meter) | Distance(meter) |
|-----------------|---------------------------------|-----------------|
| 0.009–0.490 | 2400/F(KHz) | 300 |
| 0.490–1.705 | 24000/F(KHz) | 30 |
| 1.705–30 | 30 | 30 |
| 30–88 | 100** | 3 |
| 88–216 | 150** | 3 |
| 216–960 | 200** | 3 |
| Above 960 | 500 | 3 |

* dBuV/m=20*log(uV/m) * Distance factor=40dB / decade(15.31(f))

5.2 Measurement equipments

| Equipment Name | Type | Manufacturer | Serial No. | Next Calibration date |
|--|-----------|-------------------|------------------------|-----------------------|
| TEST Receiver | ESCI7 | ROHDE & SCHWARZ | 100916 | 5–Nov–17 |
| Logbicon Antenna | VULB 9168 | SCHWARZBECK | 193 | 12–Oct–18 |
| Turn Table | DT3000–2t | Innco System GmbH | N/A | – |
| Antenna Mast | MA4000–EP | Innco System GmbH | N/A | – |
| Antenna Master & Turn table controller | CO2000–P | Innco System GmbH | CO2000/641 /28051111/L | – |
| Loop Antenna | HFH2–Z2 | ROHDE & SCHWARZ | 100188 | 22–Aug–17 |

5.3 Environmental Condition

Test Place 10 m Semi-anechoic chamber
 Temperature (°C) : 21.5 °C
 Humidity (%) : 51.6 % R.H.

5.4 Test data (9 kHz ~ 30 MHz)

Test Date : 26-May-17

Measurement Distance : 3 m

| Frequency (kHz) | Reading (dB μ V) | Vertical Position [Angle] | Height (m) | Correction Factor | | Result Value(Qeas-Peak) | | |
|--------------------|--|---------------------------------|---------------|-----------------------|---------------|-------------------------|--------------------------|----------------|
| | | | | Ant Factor (dB) | Cable (dB) | Limit (dB μ V/m) | Result (dB μ V/m) | Margin (dB) |
| 117.40 | 55.60 | 197 ° | 0.8 | 19.58 | 0.5 | 105.7 | 75.68 | -29.99 |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| Remark | <p>H : Horizontal, V : Vertical There did not measure any radiated spurious emission in the range 9 kHz to 30 MHz *There is no found Restricted bands. *The 300 m limit was converted to 3m Limit using square factor(x) as it was found by measurements as follows; 3 m Limit(dBuV/m) = $20\log(2400/F(\text{KHz}))+40\log(300/3)= 20\log(2400/125)+40\log(300/3)$</p> | | | | | | | |

5.4 Test data(30 MHz ~ 1 000 MHz)

Test Date : 26-May-17

Measurement Distance : 3 m

| Frequency (MHz) | Reading (dB μ V) | Position (V/H) | Height (m) | Correction Factor | | Result Value(Quasi-peak) | | |
|--------------------|---|-------------------|---------------|--------------------|---------------|--------------------------|--------------------------|----------------|
| | | | | Ant Factor (dB) | Cable (dB) | Limit (dB μ V/m) | Result (dB μ V/m) | Margin (dB) |
| 162.70 | 22.64 | V | 1.0 | 13.15 | 1.93 | 43.50 | 37.72 | 5.78 |
| 230.40 | 24.97 | H | 1.8 | 11.11 | 2.34 | 46.00 | 38.41 | 7.59 |
| 243.10 | 26.42 | H | 1.6 | 11.60 | 2.41 | 46.00 | 40.43 | 5.57 |
| 268.80 | 23.28 | H | 1.6 | 12.62 | 2.54 | 46.00 | 38.44 | 7.56 |
| 320.00 | 19.91 | H | 1.5 | 13.93 | 2.79 | 46.00 | 36.64 | 9.36 |
| 351.00 | 18.78 | H | 1.4 | 14.81 | 2.93 | 46.00 | 36.52 | 9.48 |
| 400.00 | 22.76 | H | 1.4 | 15.63 | 3.16 | 46.00 | 41.55 | 4.45 |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| Remark | H : Horizontal, V : Vertical *Result Value = Reading + Antenna + Cable loss *Correction Factor = Ant Factor + Cable *The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection | | | | | | | |

6. Measurement of conducted disturbance

The continuous disturbance voltage of AC Mains in the frequency from 0.15 MHz to 30 MHz was measured in accordance to FCC Part 15 (2010) & ANSI C 63.4 (2003). The test setup was made according to FCC Part 15 (2010) & ANSI C 63.4 (2003) in a shielded Room. The EUT was placed on a non-conductive table at least 0.8 m above the ground plan. A grounded vertical reference plane was positioned in a distance of 0.4 m from the EUT. The distance from the EUT to other metal surfaces was at least 0.8 m. The EUT was only earthen by its power cord through the line impedance stabilizing network. The power cord has been bundled to a length of 1.0 m. The test receiver with Quasi Peak detector complies with CISPR 16.

6.1 Measurement equipments

| Equipment Name | Type | Manufacturer | Serial No. | Next Calibration date |
|----------------|---------|-----------------|------------|-----------------------|
| TEST Receiver | ESHS 30 | Rohde & Schwarz | 828765/002 | 4-Nov-17 |
| LISN | ESH3-Z5 | Rohde & Schwarz | 838979/010 | 4-Nov-17 |
| Pulse Limiter | ESH3Z2 | Rohde & Schwarz | NONE | 4-Nov-17 |

6.2 Environmental Condition

Test Place : Shielded Room

Temperature (°C) : 22.7 °C

Humidity (% R.H.) : 51.6 % R.H.

6.3 Test data

Test Date : 26-May-17

| Frequency (MHz) | Correction Factor | | Line (H/N) | Quasi-peak Value | | | Average Value | | |
|--------------------|--|---------------|---------------|-----------------------|-------------------------|------------------------|-----------------------|-------------------------|----------------|
| | Lisn (dB) | Cable (dB) | | Limit (dB μ V) | Reading (dB μ V) | Result (dB μ V) | Limit (dB μ V) | Reading (dB μ V) | Result (dB) |
| 0.15 | 0.09 | 0.12 | N | 66.00 | 40.19 | 40.40 | 56.00 | 24.36 | 24.57 |
| 0.17 | 0.09 | 0.15 | N | 65.06 | 37.48 | 37.72 | 55.06 | 22.38 | 22.62 |
| 0.20 | 0.16 | 0.20 | H | 63.61 | 32.18 | 32.54 | 53.61 | 20.24 | 20.60 |
| 0.41 | 0.16 | 0.21 | H | 57.65 | 32.04 | 32.41 | 47.65 | 25.49 | 25.86 |
| 12.82 | 0.54 | 0.36 | H | 60.00 | 29.44 | 30.34 | 50.00 | 23.64 | 24.54 |
| 25.59 | 0.75 | 0.54 | H | 60.00 | 31.39 | 32.67 | 50.00 | 29.92 | 31.20 |
| 26.70 | 0.75 | 0.54 | H | 60.00 | 38.55 | 39.83 | 50.00 | 35.42 | 36.70 |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| Remark | H : Hot Line, N : Neutral Line *Correction Factor = Lisn + Cable *Result = Correction Factor + Reading | | | | | | | | |

7. Photographs of test setup

7.1 Setup for Radiated Test

[Test setup for below 30 MHz]



[Test setup for above 30 MHz]



7.3 Setup for Conducted Test : 0.15 MHz ~ 30 MHz

[Front]



[Rear]



8.0 Photographs of EUT

[Front]



[Rear]



8.1 Photographs of EUT

[Front]




[Label]



Appendix 1. Special diagram

*HOT LINE

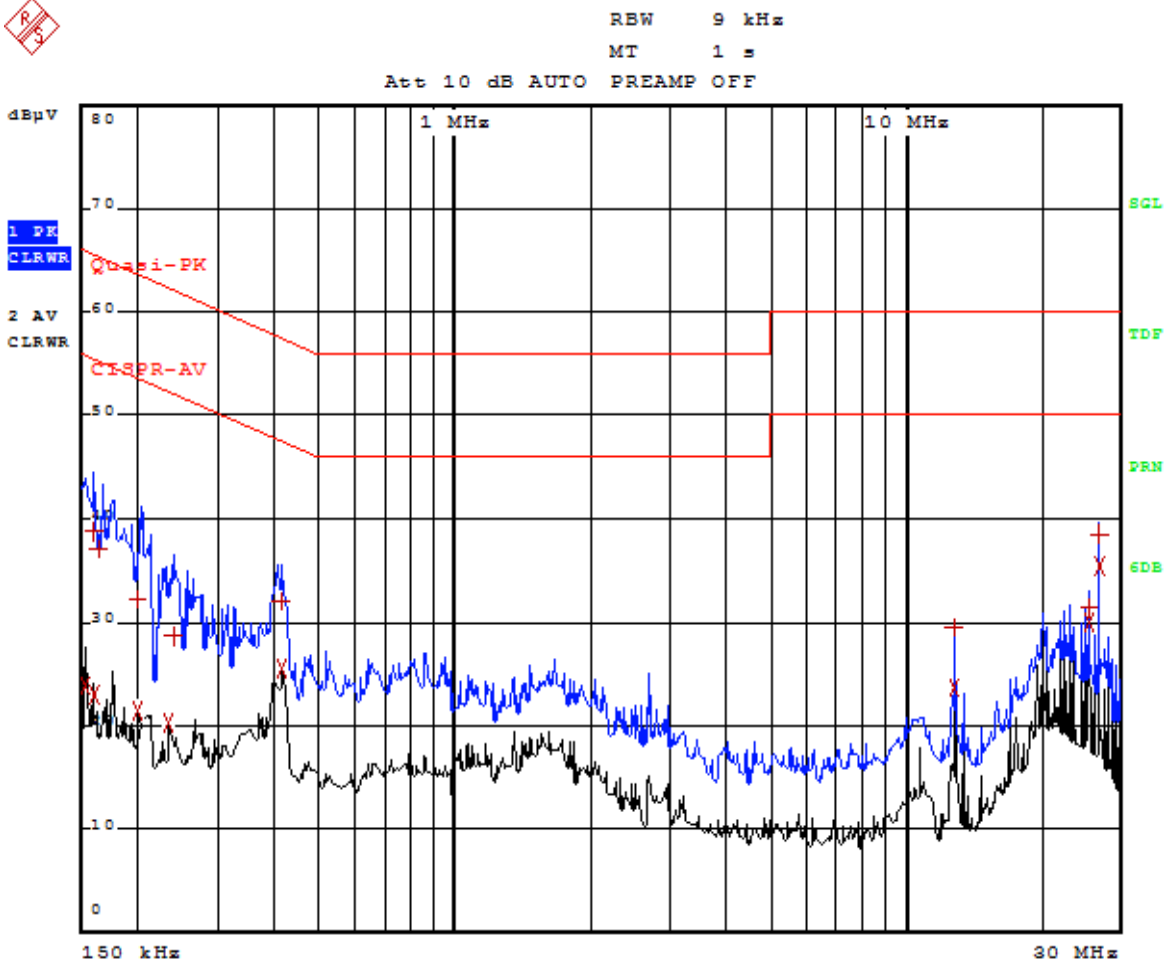


Comment: FS2-AWB_117k_HOT
Date: 26.MAY.2017 11:01:39

*NEUTRAL LINE



RBW 9 kHz
MT 1 s

Att 10 dB AUTO PREAMP OFF

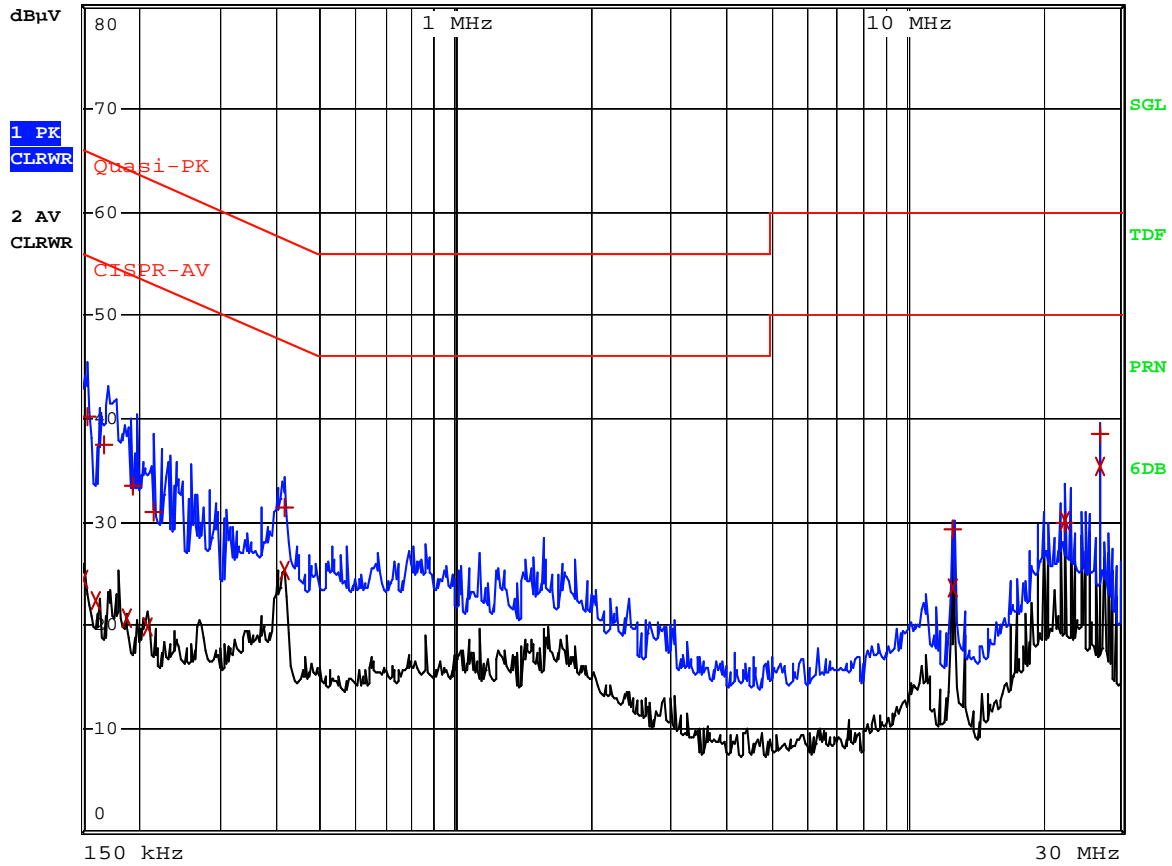

Comment: FS2-AWB_117k_NEUTRAL
Date: 26.MAY.2017 10:21:11

Appendix 2. Antenna Requirement

Regulation

According to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Result

–Complied

The transmitter has an integral Loop coil antenna.