

### 6.10.3 Procedure

- a) For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c) The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h) Test the EUT in the lowest channel, the middle channel, the highest channel.
- i) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j) Repeat above procedures until all frequencies measured was complete.

*Note 1: Scan from 9 kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. Fundamental frequency is blocked by filter, and only spurious emission is shown.*

*Note 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.*

*Note 3: The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:*


$$\text{Level (dBuV)} = \text{Reading (dBuV)} + \text{Factor (dB/m)}$$

#### 6.10.4 Test data

##### Below 1GHz

Remark: During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes, only the worst case lowest channel for DH5 was recorded in the report.

[Test mode: TX]; [Polarity: Horizontal]

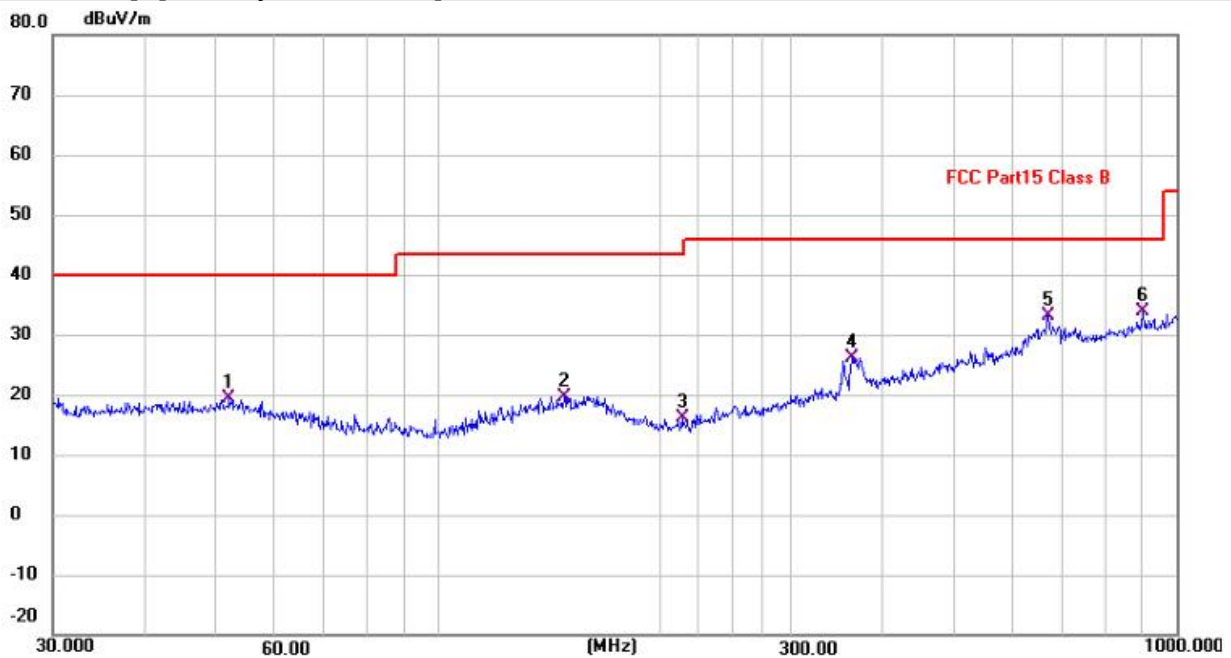

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	52.0251	-0.60	19.93	19.33	40.00	-20.67	QP
2	147.9214	-0.94	20.64	19.70	43.50	-23.80	QP
3	213.7634	-0.01	16.02	16.01	43.50	-27.49	QP
4	362.9844	4.59	21.58	26.17	46.00	-19.83	QP
5	670.4893	5.11	28.03	33.14	46.00	-12.86	QP
6 *	900.1474	2.96	30.92	33.88	46.00	-12.12	QP

**Test Result: Pass**

[Test mode: TX]; [Polarity: Vertical]



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	55.2207	2.01	19.31	21.32	40.00	-18.68	QP
2	105.2718	4.73	16.48	21.21	43.50	-22.29	QP
3	158.6677	0.69	20.51	21.20	43.50	-22.30	QP
4	369.4047	2.49	22.07	24.56	46.00	-21.44	QP
5	706.6999	1.06	28.73	29.79	46.00	-16.21	QP
6 *	932.2715	1.10	31.18	32.28	46.00	-13.72	QP

Test Result: Pass

Above 1GHz:

Remark: During the test, the Radiates Emission from above 1GHz was performed in all modes, only the worst case for DH5 was recorded in the report.


[Test mode: TX low channel]; [Polarity: Horizontal]



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4804.000	37.34	6.31	43.65	74.00	-30.35	peak
2		5817.500	38.27	8.97	47.24	74.00	-26.76	peak
3		7206.000	37.43	10.39	47.82	74.00	-26.18	peak
4		8038.250	38.28	11.71	49.99	74.00	-24.01	peak
5		9608.000	34.91	14.16	49.07	74.00	-24.93	peak
6	*	10541.00	35.12	16.80	51.92	74.00	-22.08	peak

Test Result: Pass

[Test mode: TX low channel]; [Polarity: Vertical]

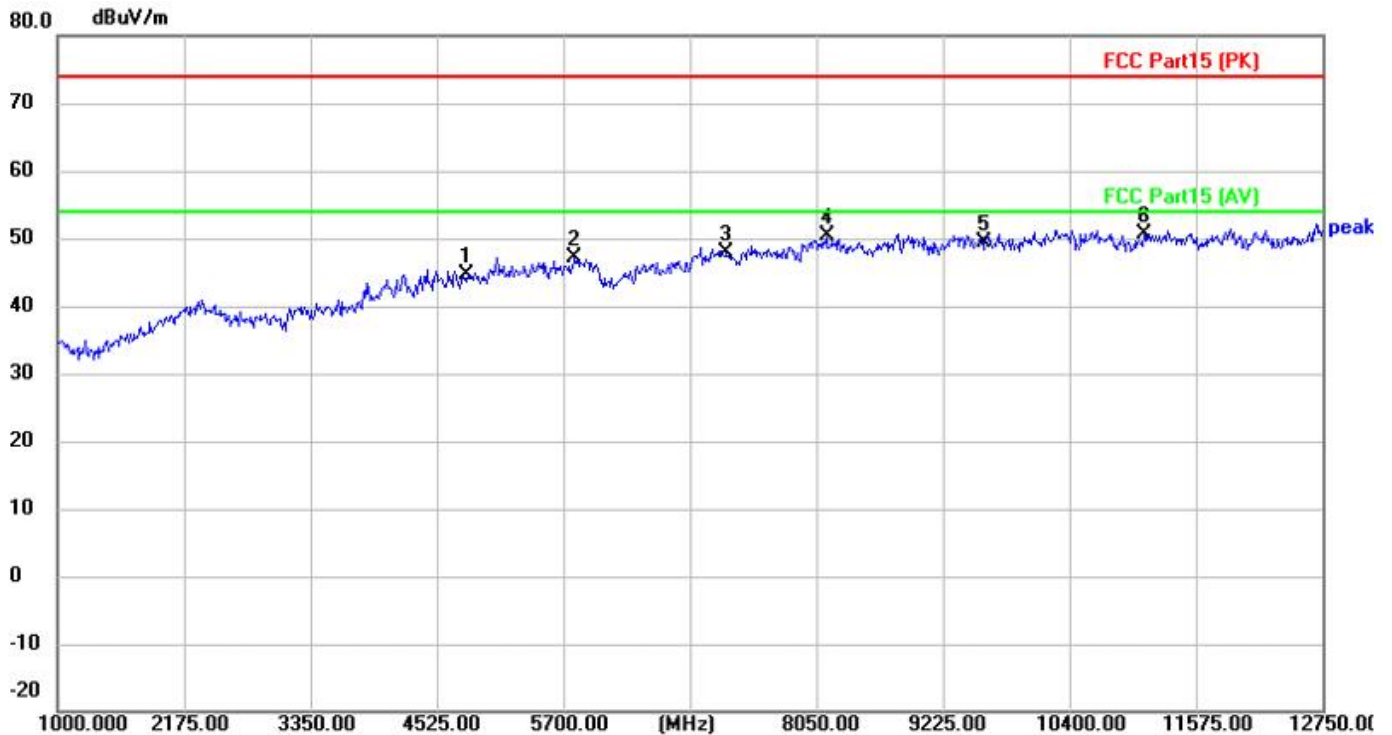

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4804.000	38.24	6.31	44.55	74.00	-29.45	peak
2		5805.750	38.07	9.00	47.07	74.00	-26.93	peak
3		7206.000	37.38	10.39	47.77	74.00	-26.23	peak
4		8144.000	38.62	11.68	50.30	74.00	-23.70	peak
5		9608.000	35.25	14.16	49.41	74.00	-24.59	peak
6	*	11093.25	32.76	17.92	50.68	74.00	-23.32	peak

Test Result: Pass




[Test mode: TX middle channel]; [Polarity: Horizontal]



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4882.000	37.46	6.43	43.89	74.00	-30.11	peak
2		6029.000	37.97	6.06	44.03	74.00	-29.97	peak
3		7323.000	39.83	10.17	50.00	74.00	-24.00	peak
4		8696.250	35.70	12.46	48.16	74.00	-25.84	peak
5		9764.000	33.29	14.96	48.25	74.00	-25.75	peak
6	*	11234.25	32.76	17.88	50.64	74.00	-23.36	peak

Test Result: Pass


[Test mode: TX middle channel]; [Polarity: Vertical]

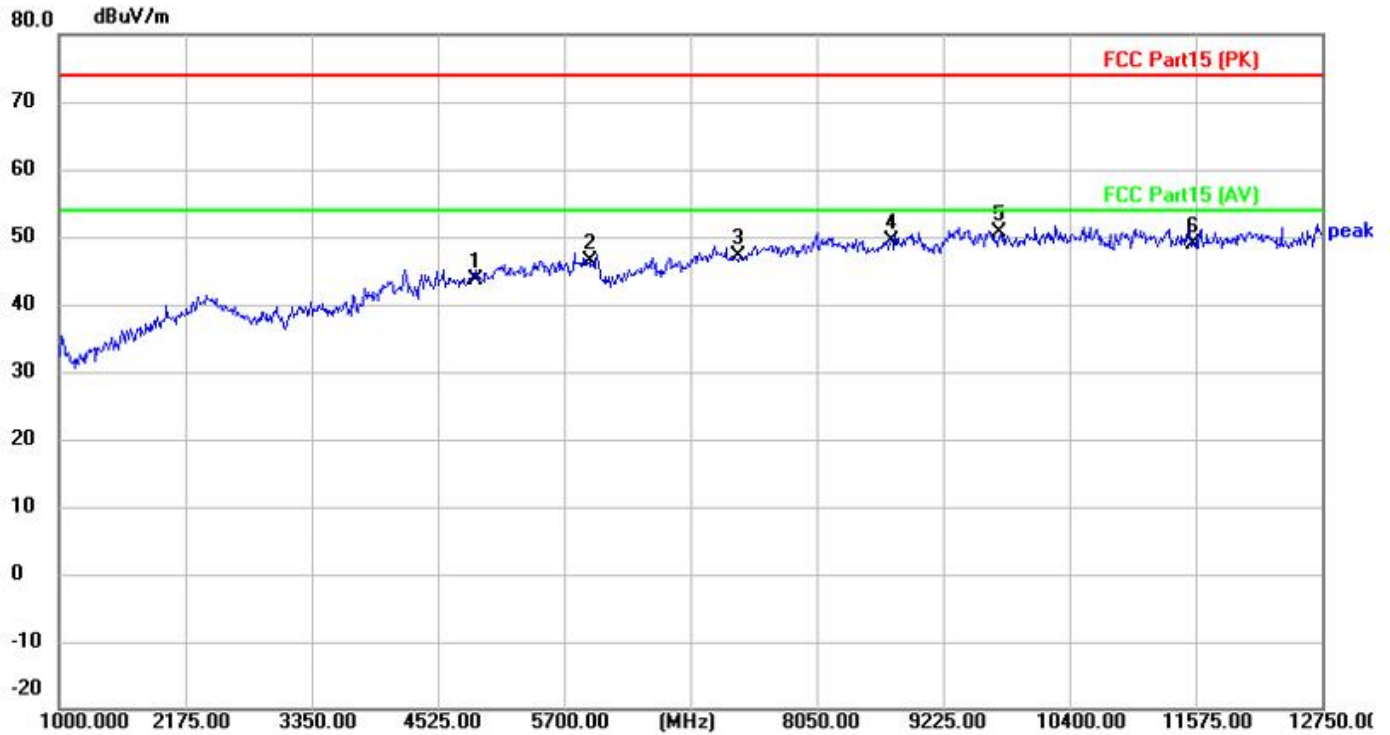

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4882.000	37.25	6.43	43.68	74.00	-30.32	peak
2		5935.000	37.42	9.06	46.48	74.00	-27.52	peak
3		7323.000	36.88	10.17	47.05	74.00	-26.95	peak
4		8743.250	36.91	12.51	49.42	74.00	-24.58	peak
5	*	9764.000	35.64	14.96	50.60	74.00	-23.40	peak
6		11551.50	29.46	19.42	48.88	74.00	-25.12	peak

Test Result: Pass

[Test mode: TX High channel]; [Polarity: Horizontal]

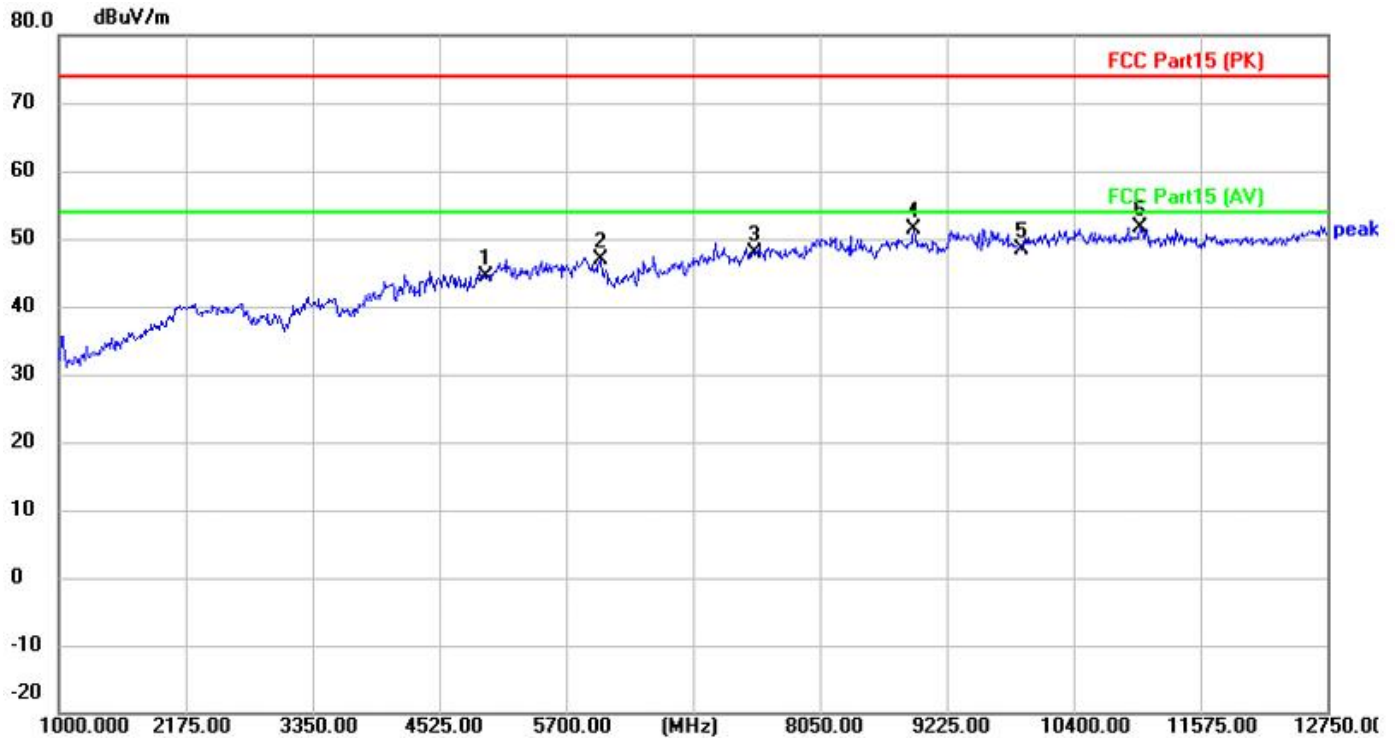


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4960.000	36.98	7.41	44.39	74.00	-29.61	peak
2		6017.250	40.96	5.96	46.92	74.00	-27.08	peak
3		7440.000	36.86	11.03	47.89	74.00	-26.11	peak
4		8919.500	38.24	13.26	51.50	74.00	-22.50	peak
5		9920.000	33.85	14.41	48.26	74.00	-25.74	peak
6	*	11011.00	33.97	17.68	51.65	74.00	-22.35	peak

Test Result: Pass



[Test mode: TX High channel]; [Polarity: Vertical]

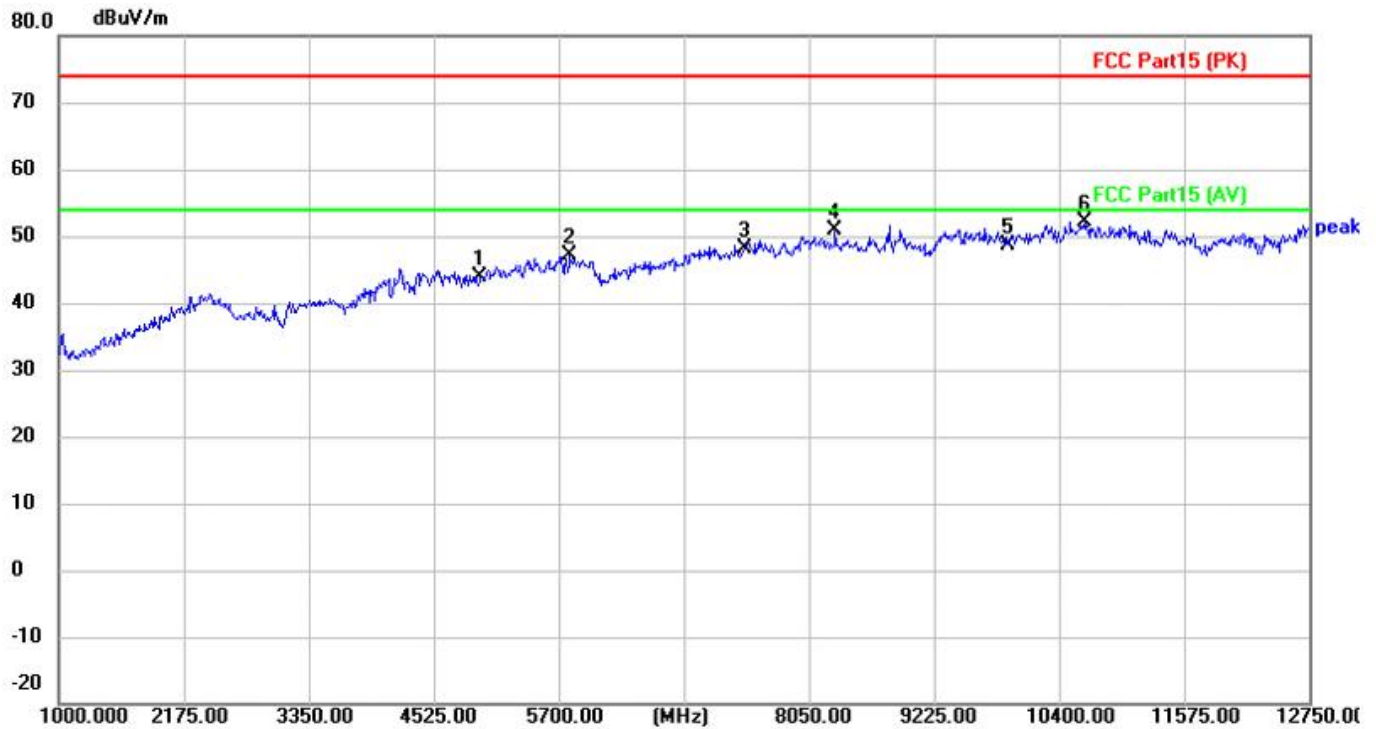

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4960.000	36.49	7.41	43.90	74.00	-30.10	peak
2		5805.750	38.21	9.00	47.21	74.00	-26.79	peak
3		7440.000	37.20	11.03	48.23	74.00	-25.77	peak
4		8296.750	39.67	11.29	50.96	74.00	-23.04	peak
5		9920.000	34.33	14.41	48.74	74.00	-25.26	peak
6	*	10646.75	35.42	16.72	52.14	74.00	-21.86	peak

Test Result: Pass

## 6.11 Radiated emissions which fall in the restricted bands

<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247
<b>Test Method</b>	ANSI C63.10 (2013) Section 6.10.5
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX


### 6.11.1 Limit

<b>Frequency(MHz)</b>	<b>Field strength(microvolts/meter)</b>	<b>Measurement distance(meters)</b>
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


*Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.*

### 6.11.2 Test setup


Below 1GHz:

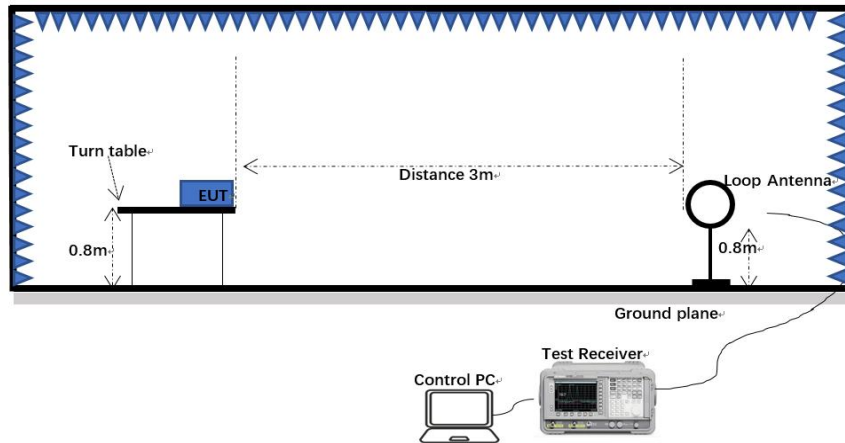

30MHz-1GHz:

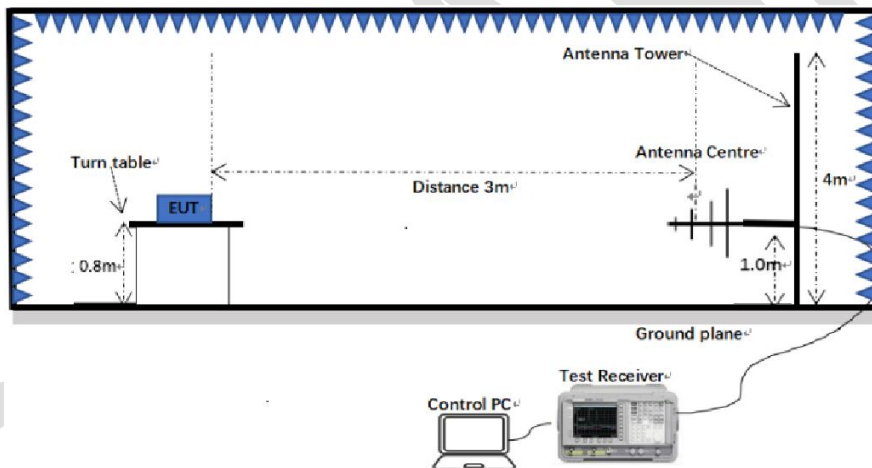

Above 1GHz:

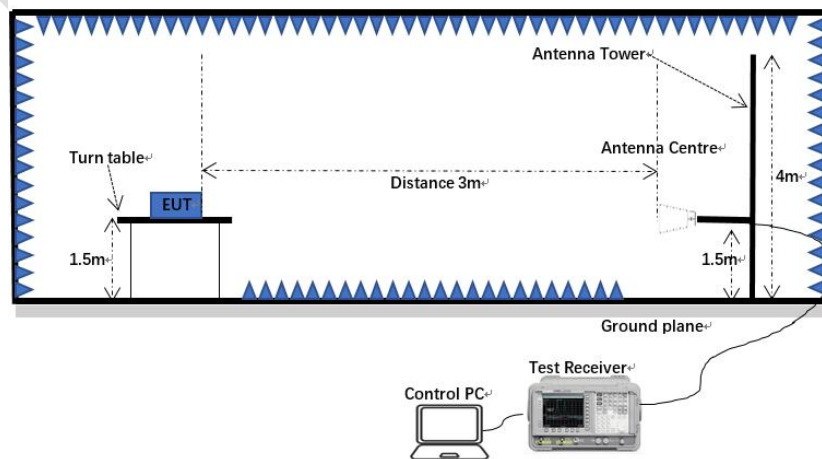

### 6.11.3 Procedure

- a) For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c) The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h) Test the EUT in the lowest channel, the middle channel, the highest channel.
- i) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j) Repeat above procedures until all frequencies measured was complete.


*Note 1: Level (dBuV) = Reading (dBuV) + Factor (dB/m)*

*Note 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.*

#### 6.11.4 Test data

Remark: During the test, the Radiates Emission restricted bands from above 1GHz was performed in all modes, only the worst case for DH5 was recorded in the report.

[Test mode: TX low channel]; [Polarity: Horizontal]

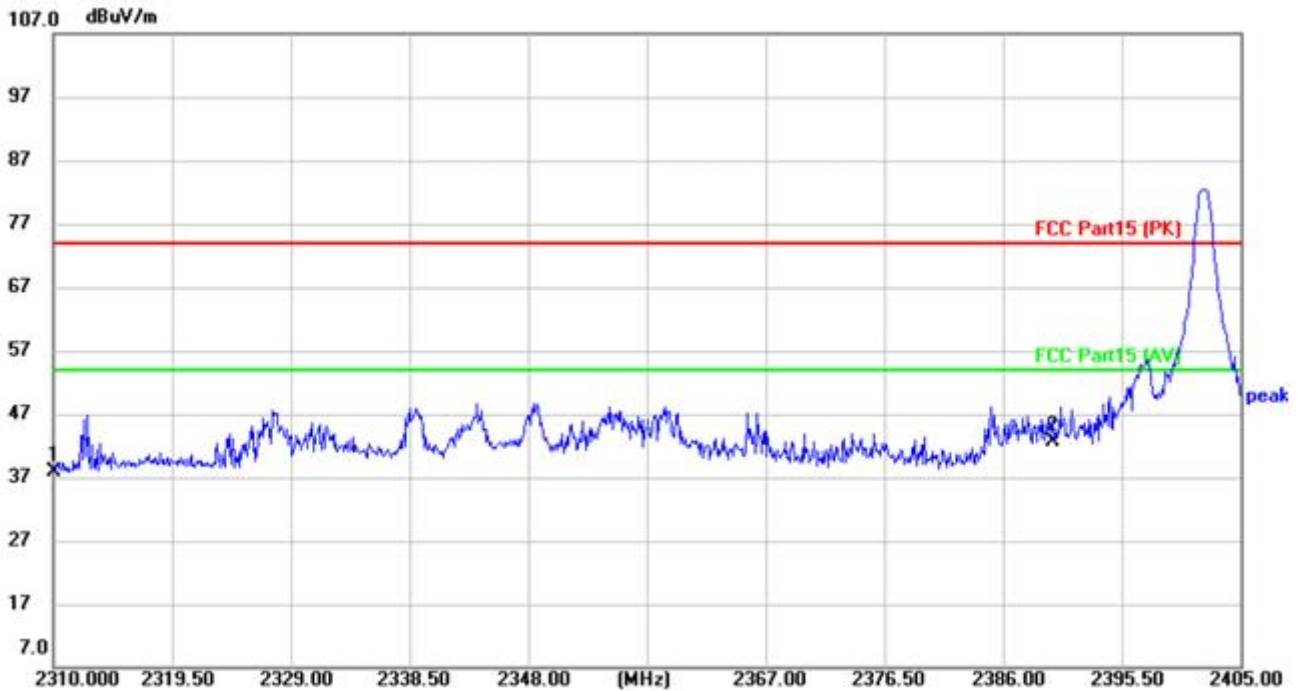


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2310.000	40.76	-2.87	37.89	74.00	-36.11	peak
2	*	2390.000	44.95	-2.44	42.51	74.00	-31.49	peak

**Test Result: Pass**




[Test mode:TX low channel]; [Polarity: Vertical]

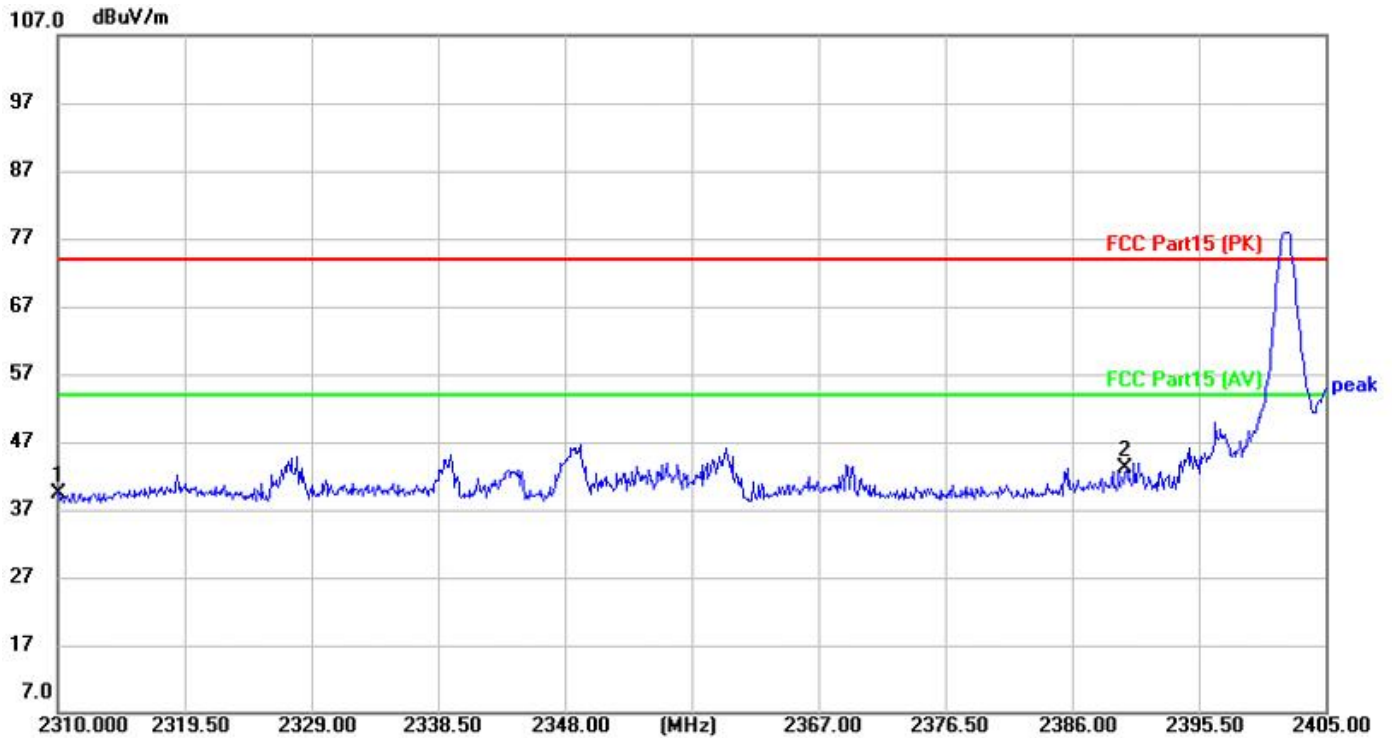

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2310.000	42.21	-2.87	39.34	74.00	-34.66	peak
2	*	2390.000	45.58	-2.44	43.14	74.00	-30.86	peak

Test Result: Pass


[Test mode: TX High channel]; [Polarity: Horizontal]

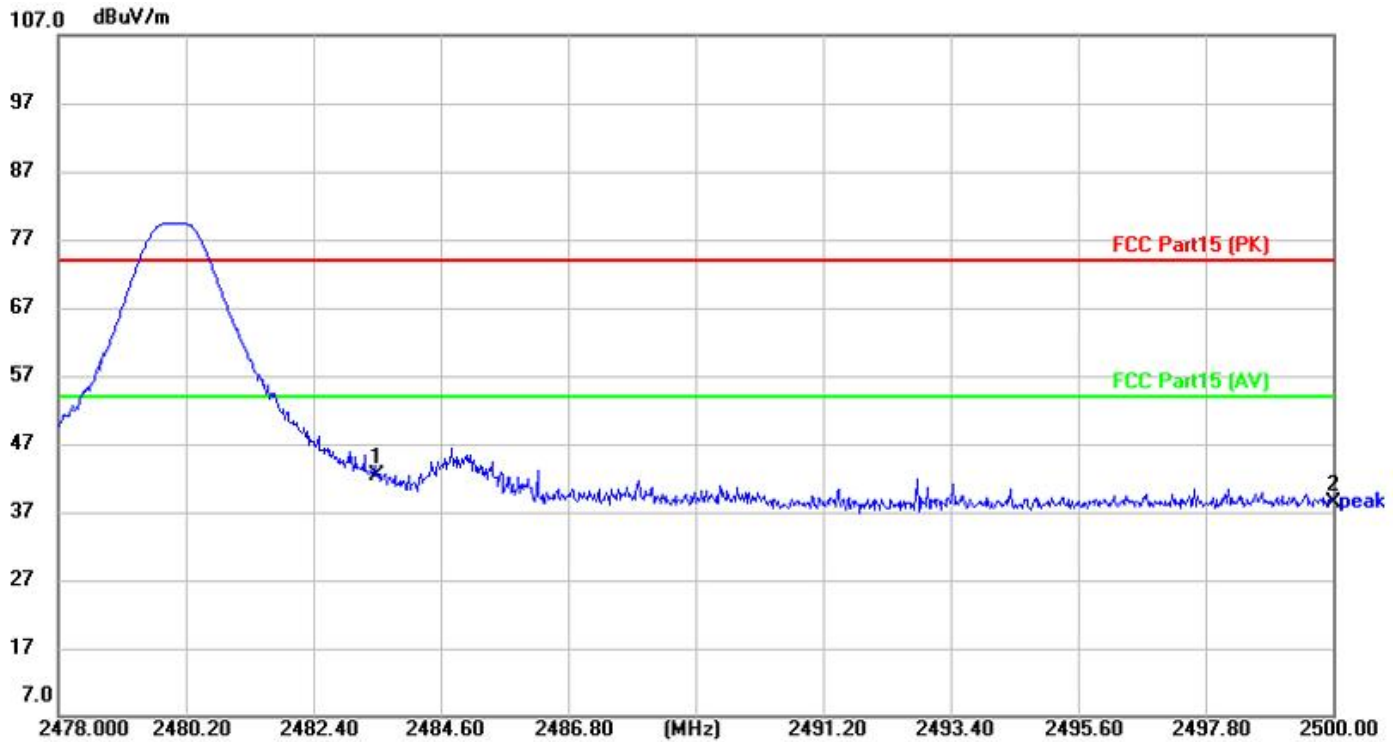

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	2483.500	45.39	-2.91	42.48	74.00	-31.52	peak
2		2500.000	41.44	-3.00	38.44	74.00	-35.56	peak

Test Result: Pass

[Test mode:TX High channel]; [Polarity: Vertical]

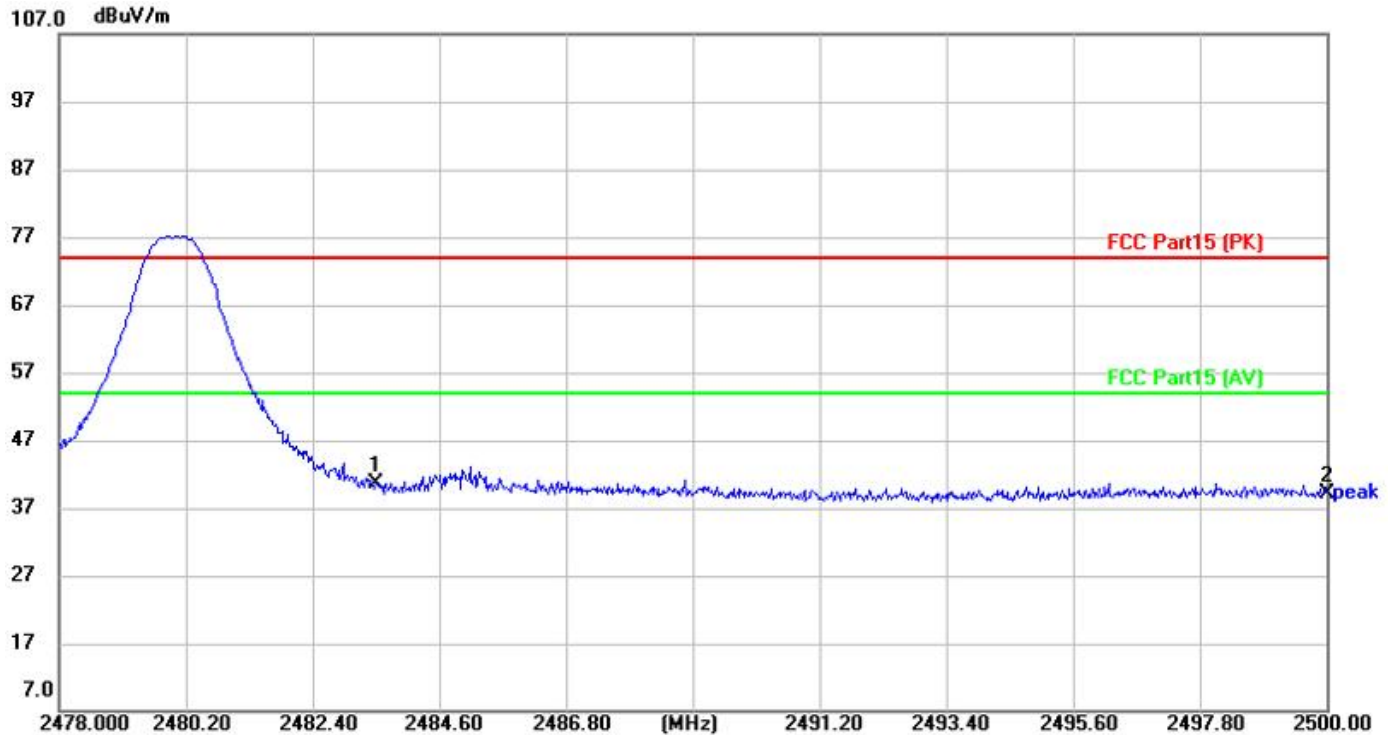

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	2483.500	43.65	-2.91	40.74	74.00	-33.26	peak
2		2500.000	42.03	-3.00	39.03	74.00	-34.97	peak


Test Result: Pass

## 7 Appendix A


### 7.1 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH1	2402	Ant1	0.992	21	Pass
NVNT	1-DH1	2441	Ant1	0.458	21	Pass
NVNT	1-DH1	2480	Ant1	0.018	21	Pass
NVNT	2-DH1	2402	Ant1	1.869	21	Pass
NVNT	2-DH1	2441	Ant1	1.364	21	Pass
NVNT	2-DH1	2480	Ant1	0.905	21	Pass
NVNT	3-DH1	2402	Ant1	2.396	21	Pass
NVNT	3-DH1	2441	Ant1	1.941	21	Pass
NVNT	3-DH1	2480	Ant1	1.494	21	Pass


Power NVNT 1-DH1 2402MHz Ant1

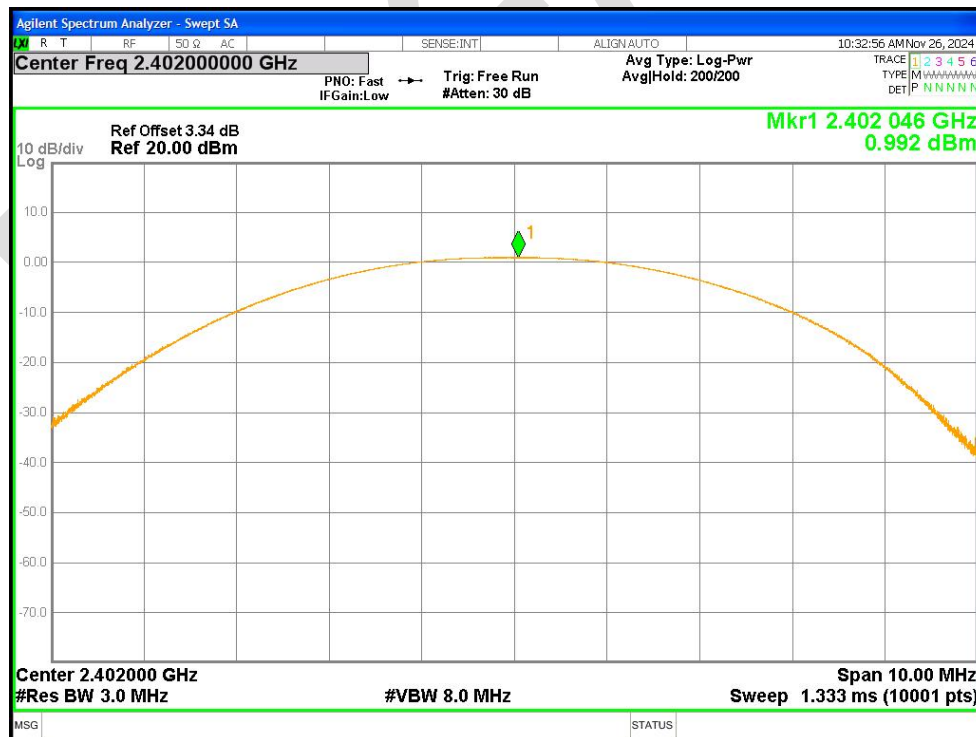

Power NVNT 1-DH1 2441MHz Ant1

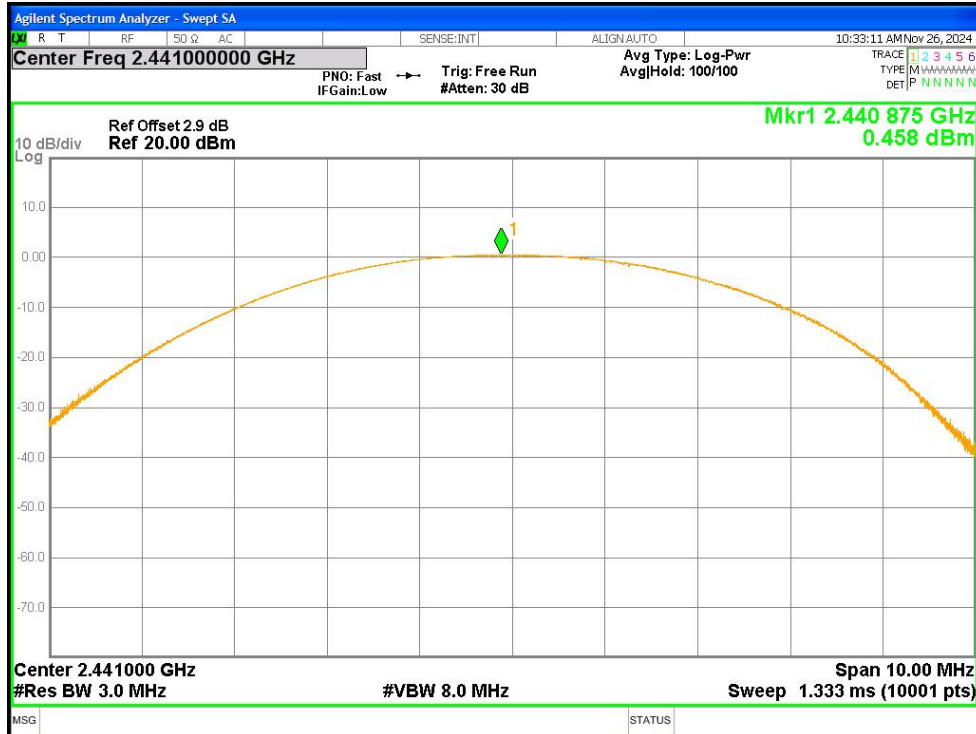


Power NVNT 1-DH1 2480MHz Ant1

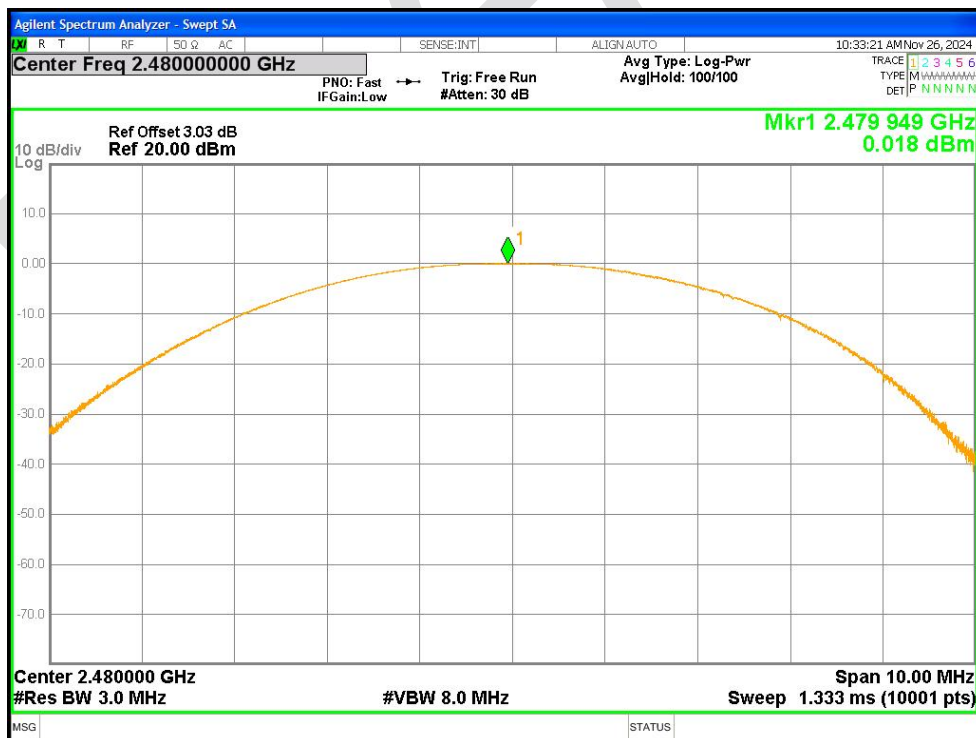





Power NVNT 2-DH1 2402MHz Ant1

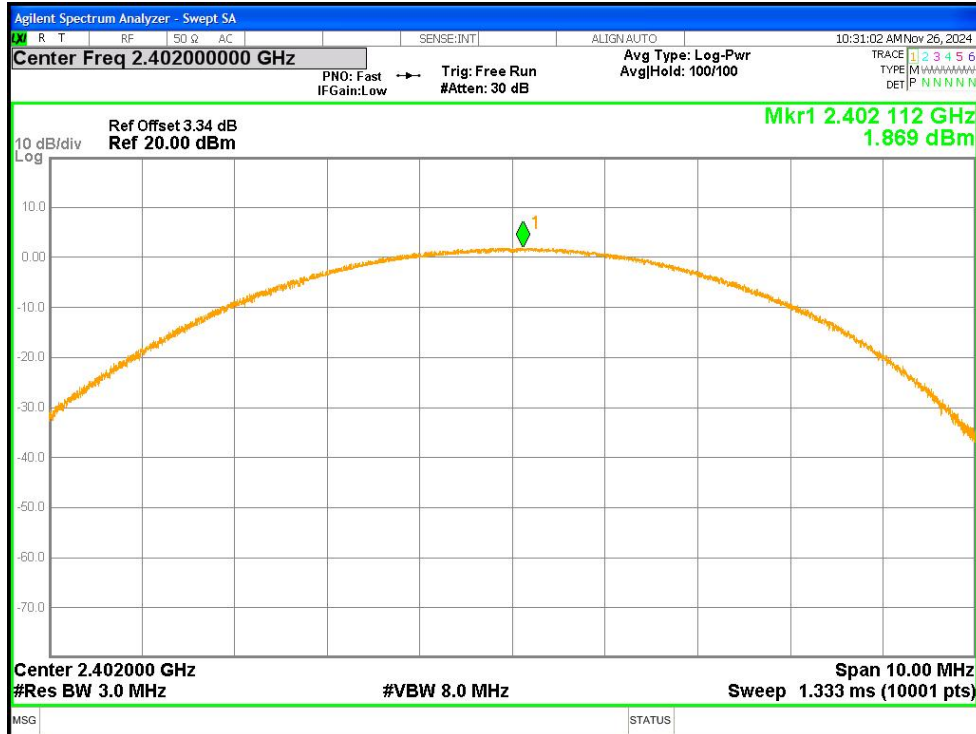


Power NVNT 2-DH1 2441MHz Ant1

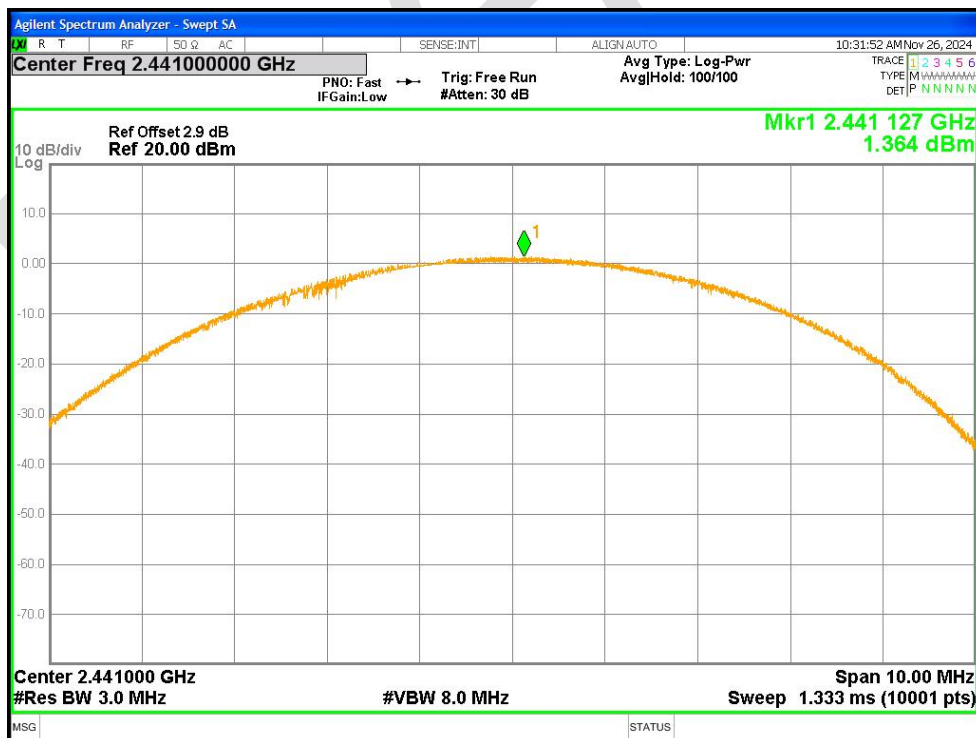


Power NVNT 2-DH1 2480MHz Ant1

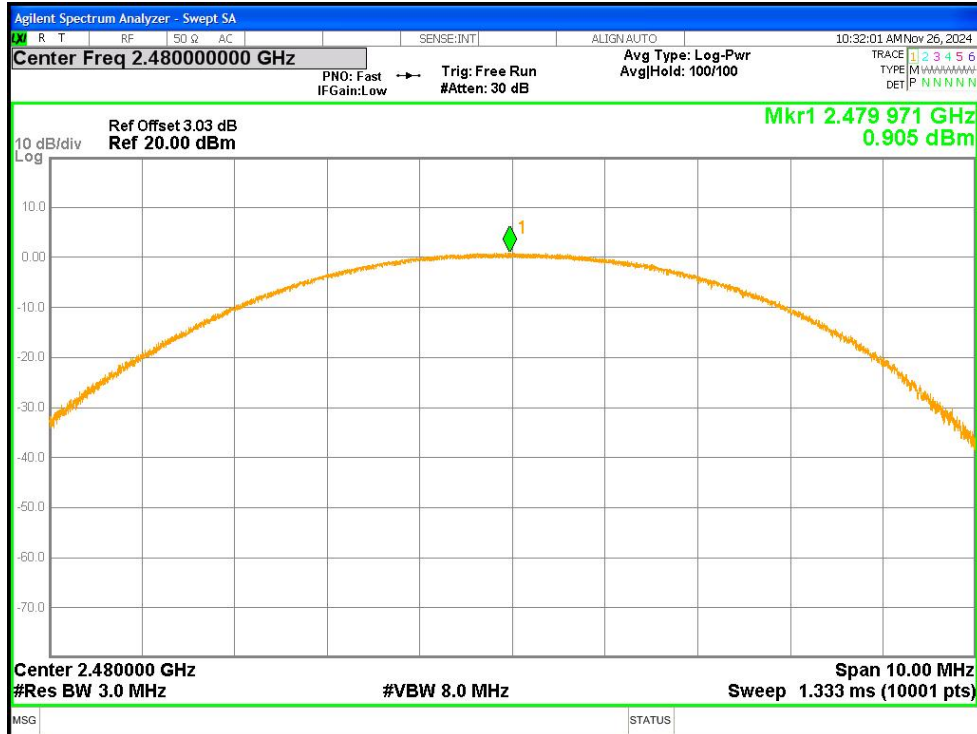


Power NVNT 3-DH1 2402MHz Ant1

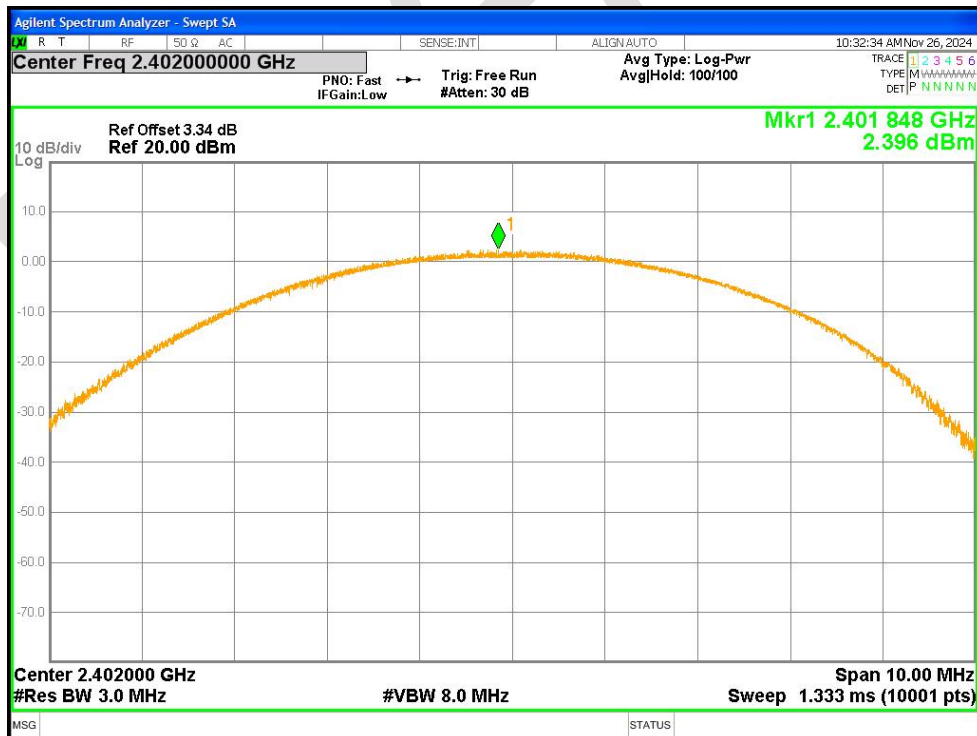

Power NVNT 3-DH1 2441MHz Ant1

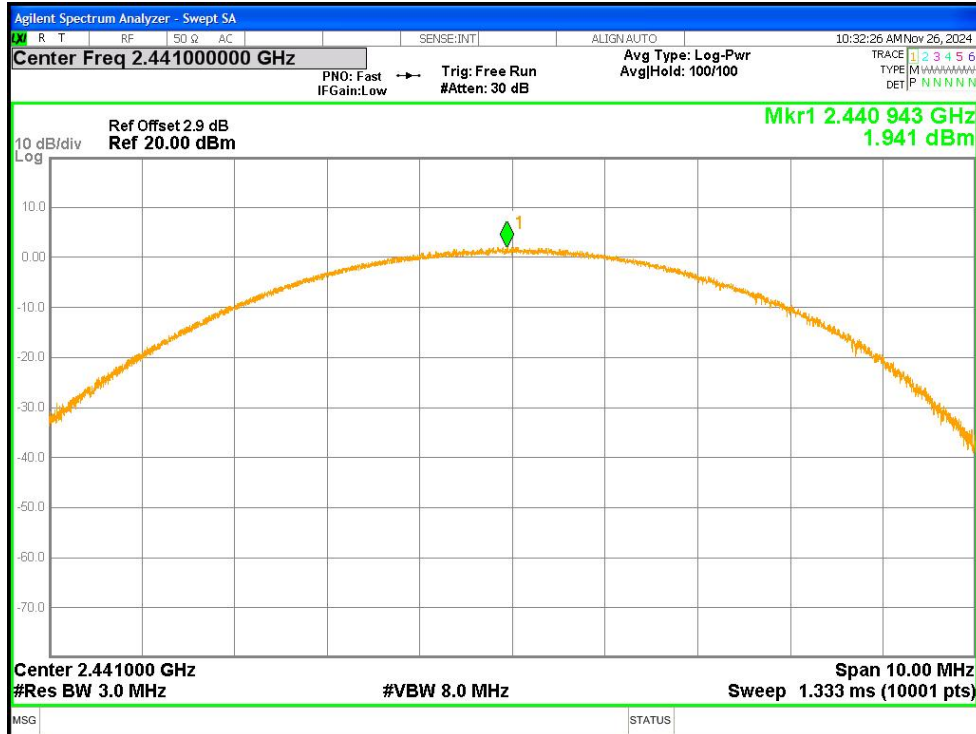


Power NVNT 3-DH1 2480MHz Ant1

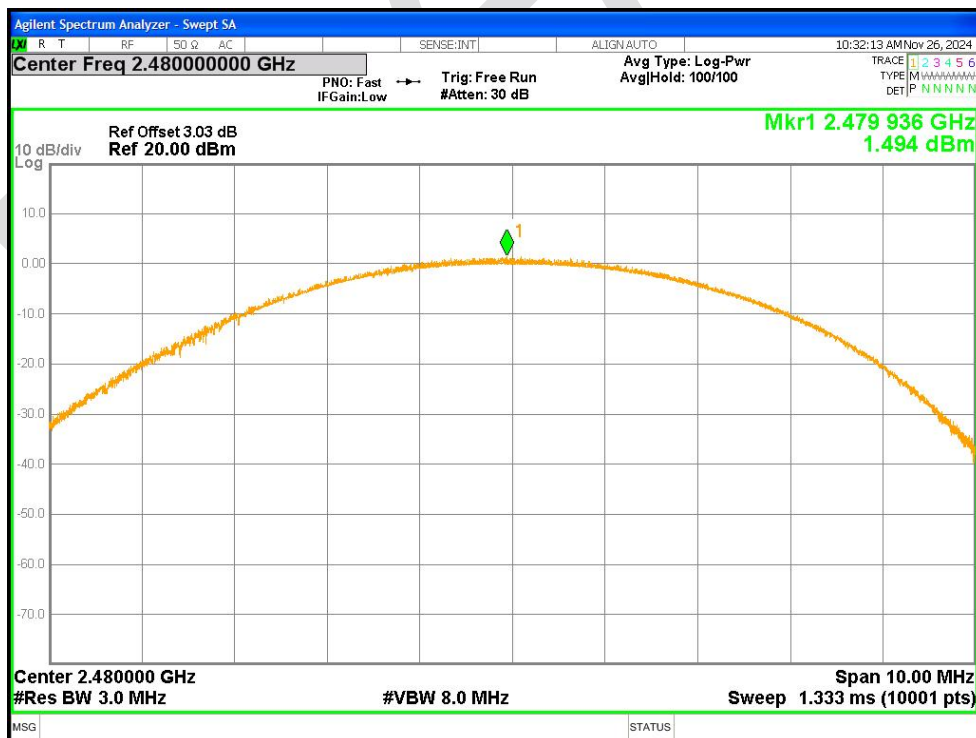


## 7.2 -20dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH1	2402	Ant1	0.879	N/A	Pass
NVNT	1-DH1	2441	Ant1	0.873	N/A	Pass
NVNT	1-DH1	2480	Ant1	0.87	N/A	Pass
NVNT	2-DH1	2402	Ant1	1.245	N/A	Pass
NVNT	2-DH1	2441	Ant1	1.243	N/A	Pass
NVNT	2-DH1	2480	Ant1	1.252	N/A	Pass
NVNT	3-DH1	2402	Ant1	1.215	N/A	Pass
NVNT	3-DH1	2441	Ant1	1.218	N/A	Pass
NVNT	3-DH1	2480	Ant1	1.214	N/A	Pass


-20dB Bandwidth NVNT 1-DH1 2402MHz Ant1

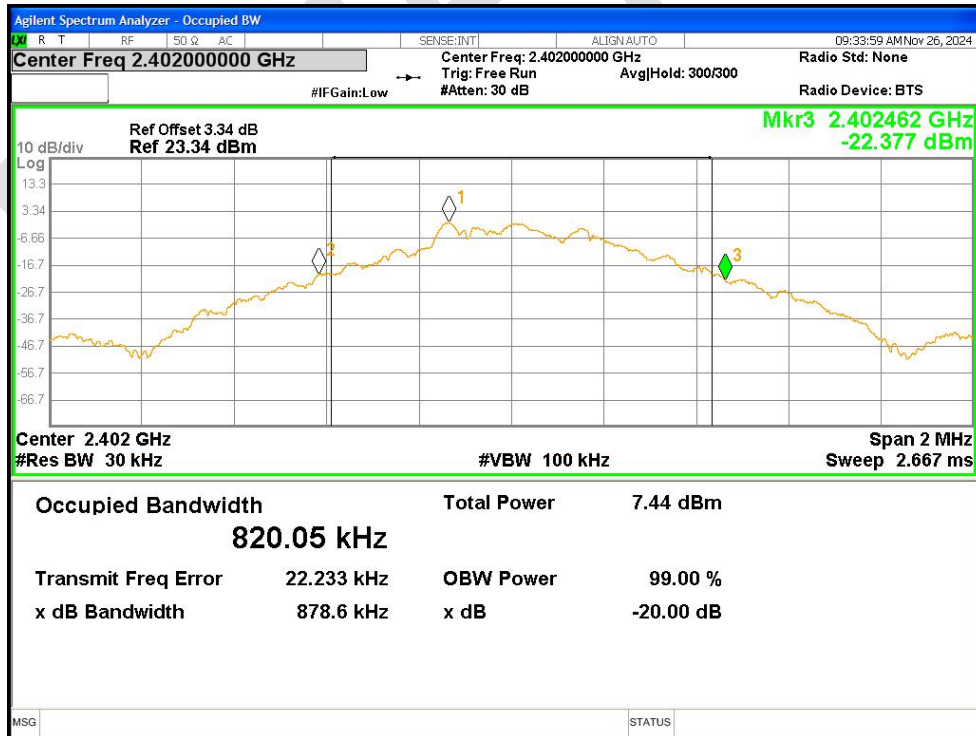

-20dB Bandwidth NVNT 1-DH1 2441MHz Ant1

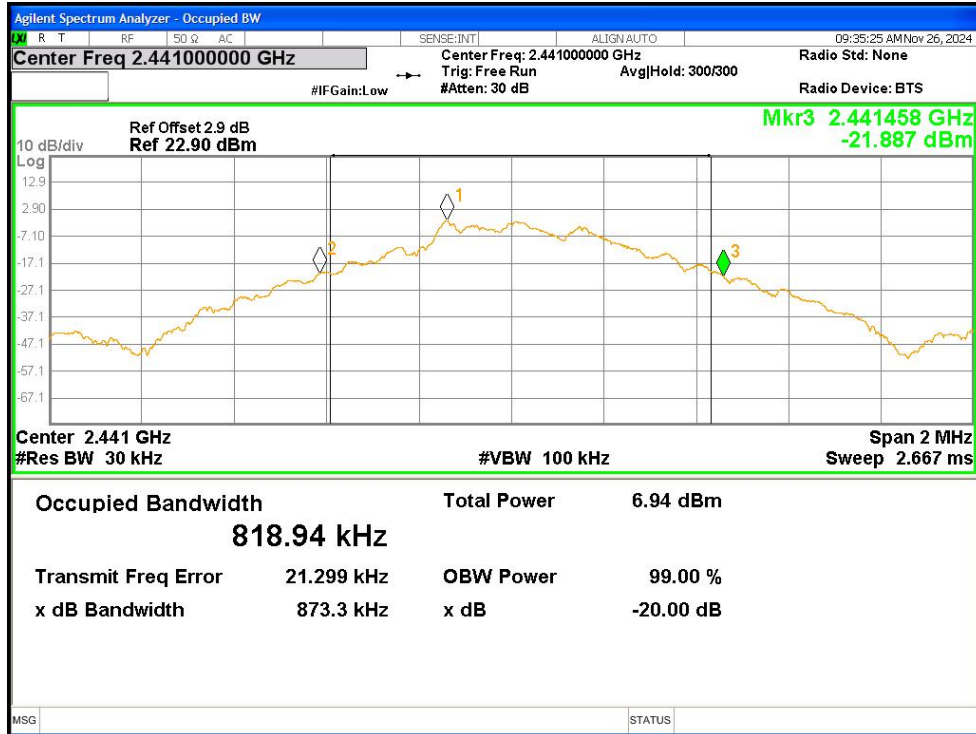


-20dB Bandwidth NVNT 1-DH1 2480MHz Ant1

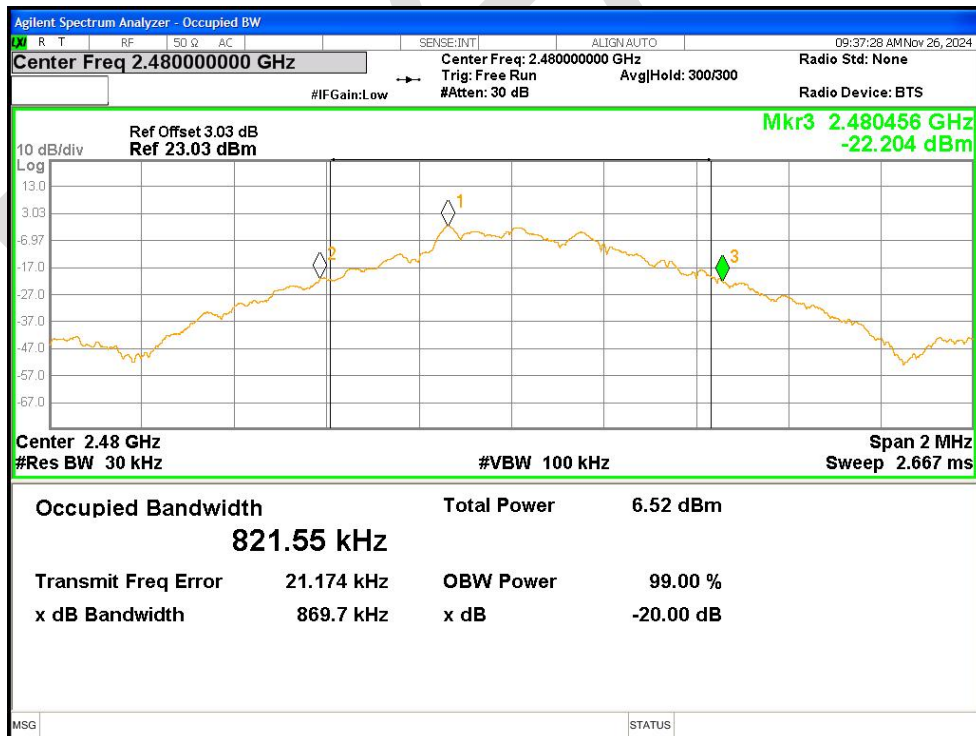





-20dB Bandwidth NVNT 2-DH1 2402MHz Ant1

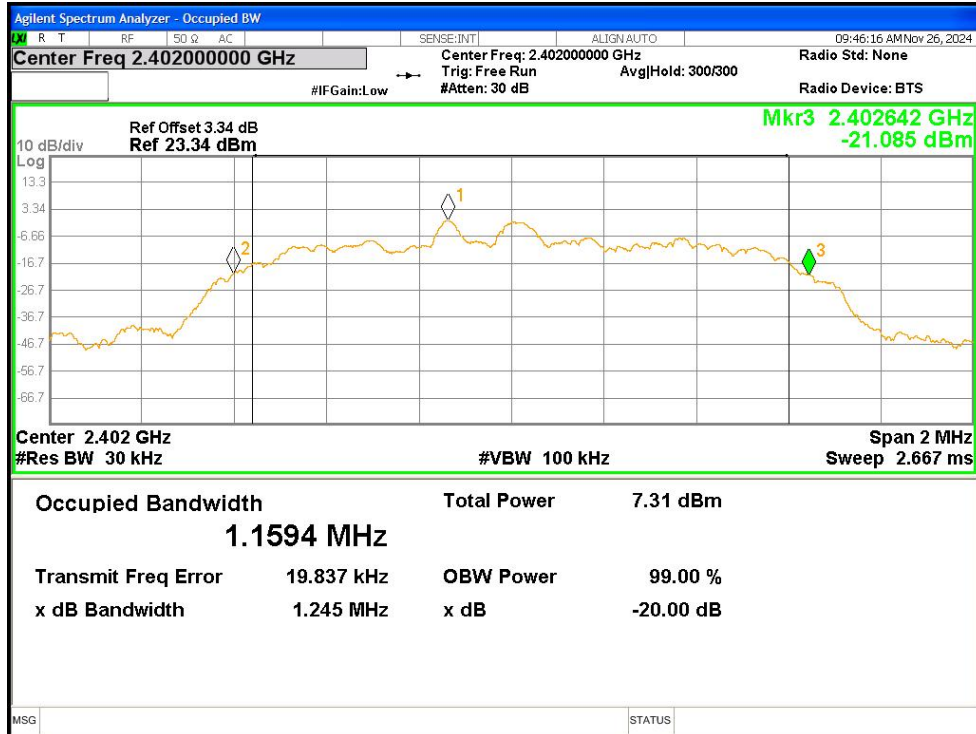

-20dB Bandwidth NVNT 2-DH1 2441MHz Ant1

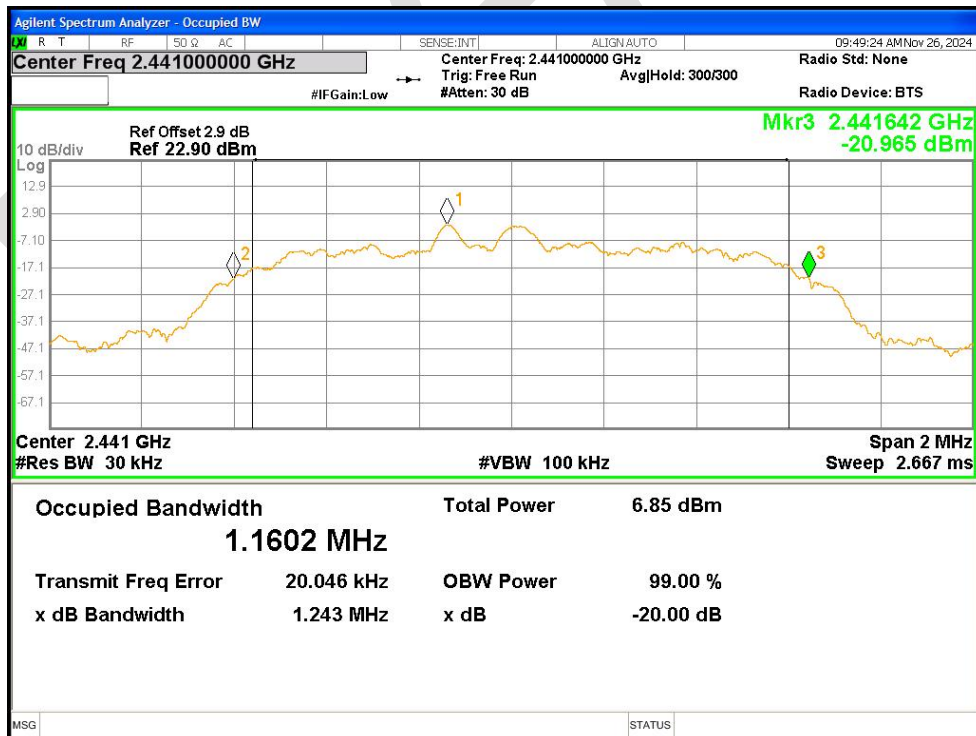

-20dB Bandwidth NVNT 2-DH1 2480MHz Ant1

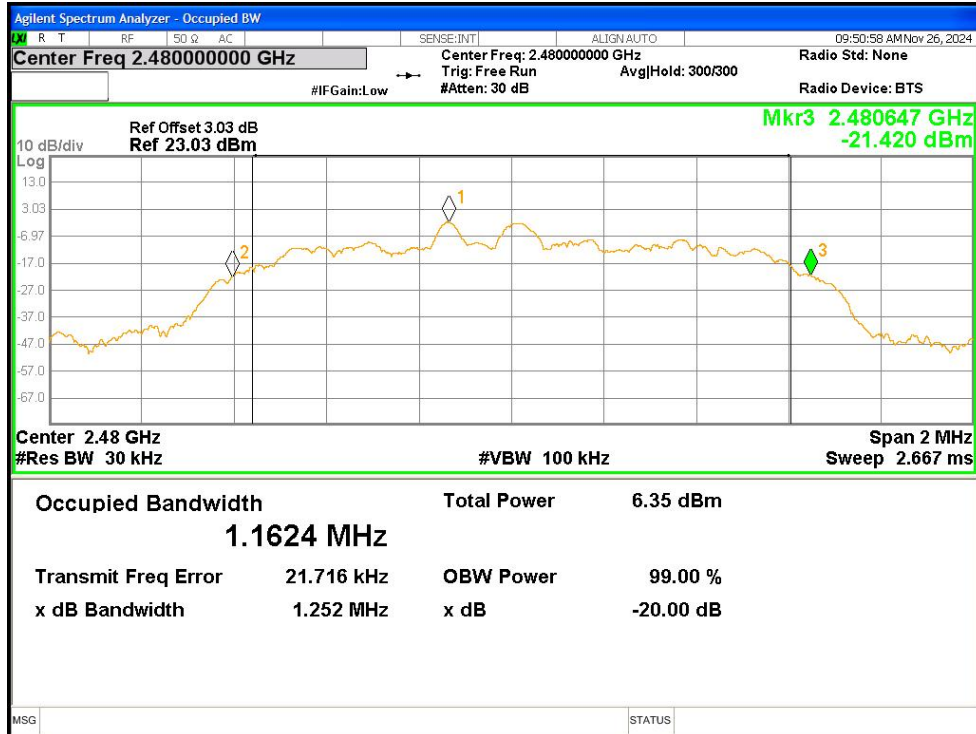

-20dB Bandwidth NVNT 3-DH1 2402MHz Ant1

