

# TEST REPORT

**Product Name:** WIFI Module

**Trade Mark:** Prowise

**Model No. / HVIN:** PW.2.12004.0002

**Add. Model No. / HVIN:** N/A

**Report Number:** 210118001RFC-3

**Test Standards:** FCC 47 CFR Part 15 Subpart C  
RSS-247 Issue 2  
RSS-Gen Issue 5

**FCC ID:** 2AQ5RWIFIAP6275P

**IC:** 24301-WIFIAP6275P

**Test Result:** PASS

**Date of Issue:** May 6, 2021

Prepared for:

**Shenzhen KTC Commercial Display Technology CO.,LTD.**  
**No.4023,Northern Wuhe Road,Bantian Street,Longgang**  
**District,Shenzhen City,Guangdong Province,P.R.China**

Prepared by:

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**  
**Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and**  
**technology park, Longhua district, Shenzhen, China**

**TEL: +86-755-2823 0888**

**FAX: +86-755-2823 0886**

Prepared by:



Kieron Luo

Project Engineer

Reviewed by:



Eric Yu

Project Supervisor

Approved by:

  
Kevin Liang  
Assistant Manager

Date:

May 6, 2021

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

## Version

| Version No. | Date        | Description |
|-------------|-------------|-------------|
| V1.0        | May 6, 2021 | Original    |



## Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: [info@uttlab.com](mailto:info@uttlab.com)

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

## CONTENTS

|                                                        |           |
|--------------------------------------------------------|-----------|
| <b>1. GENERAL INFORMATION</b>                          | <b>4</b>  |
| 1.1 CLIENT INFORMATION                                 | 4         |
| 1.2 EUT INFORMATION                                    | 4         |
| 1.2.1 GENERAL DESCRIPTION OF EUT                       | 4         |
| 1.2.2 DESCRIPTION OF ACCESSORIES                       | 4         |
| 1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD  | 4         |
| 1.4 OTHER INFORMATION                                  | 6         |
| 1.5 DESCRIPTION OF SUPPORT UNITS                       | 6         |
| 1.6 TEST LOCATION                                      | 6         |
| 1.7 TEST FACILITY                                      | 6         |
| 1.8 DEVIATION FROM STANDARDS                           | 7         |
| 1.9 ABNORMALITIES FROM STANDARD CONDITIONS             | 7         |
| 1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER       | 7         |
| 1.11 MEASUREMENT UNCERTAINTY                           | 7         |
| <b>2. TEST SUMMARY</b>                                 | <b>8</b>  |
| <b>3. EQUIPMENT LIST</b>                               | <b>9</b>  |
| <b>4. TEST CONFIGURATION</b>                           | <b>10</b> |
| 4.1 ENVIRONMENTAL CONDITIONS FOR TESTING               | 10        |
| 4.1.1 NORMAL OR EXTREME TEST CONDITIONS                | 10        |
| 4.1.2 RECORD OF NORMAL ENVIRONMENT                     | 10        |
| 4.2 TEST CHANNELS                                      | 10        |
| 4.3 EUT TEST STATUS                                    | 11        |
| 4.4 PRE-SCAN                                           | 11        |
| 4.5 TEST SETUP                                         | 12        |
| 4.5.1 FOR RADIATED EMISSIONS TEST SETUP                | 12        |
| 4.5.2 FOR CONDUCTED EMISSIONS TEST SETUP               | 13        |
| 4.5.3 FOR CONDUCTED RF TEST SETUP                      | 14        |
| 4.6 SYSTEM TEST CONFIGURATION                          | 14        |
| 4.7 DUTY CYCLE                                         | 15        |
| <b>5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION</b>   | <b>18</b> |
| 5.1 REFERENCE DOCUMENTS FOR TESTING                    | 18        |
| 5.2 ANTENNA REQUIREMENT                                | 18        |
| 5.3 CONDUCTED PEAK OUTPUT POWER                        | 19        |
| 5.4 6 dB BANDWIDTH & OCCUPIED BANDWIDTH                | 21        |
| 5.5 POWER SPECTRAL DENSITY                             | 31        |
| 5.6 CONDUCTED OUT OF BAND EMISSION                     | 37        |
| 5.7 RADIATED SPURIOUS EMISSIONS                        | 54        |
| 5.8 BAND EDGE MEASUREMENTS (RADIATED)                  | 63        |
| 5.9 CONDUCTED EMISSION                                 | 76        |
| <b>APPENDIX 1 PHOTOS OF TEST SETUP</b>                 | <b>79</b> |
| <b>APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS</b> | <b>79</b> |

## 1. GENERAL INFORMATION

### 1.1 CLIENT INFORMATION

|                                 |                                                                                                        |
|---------------------------------|--------------------------------------------------------------------------------------------------------|
| <b>Applicant:</b>               | Shenzhen KTC Commercial Display Technology CO.,LTD.                                                    |
| <b>Address of Applicant:</b>    | No.4023,Northern Wuhe Road,Bantian Street,Longgang District,Shenzhen City,Guangdong Province,P.R.China |
| <b>Manufacturer:</b>            | Shenzhen KTC Commercial Display Technology CO.,LTD.                                                    |
| <b>Address of Manufacturer:</b> | No.4023,Northern Wuhe Road,Bantian Street,Longgang District,Shenzhen City,Guangdong Province,P.R.China |

### 1.2 EUT INFORMATION

#### 1.2.1 General Description of EUT

|                               |                                 |                        |                      |
|-------------------------------|---------------------------------|------------------------|----------------------|
| <b>Product Name:</b>          | WIFI Module                     |                        |                      |
| <b>Model No. / HVIN:</b>      | PW.2.12004.0002                 |                        |                      |
| <b>Add. Model No. / HVIN:</b> | N/A                             |                        |                      |
| <b>Trade Mark:</b>            | Prowise                         |                        |                      |
| <b>DUT Stage:</b>             | Production Unit                 |                        |                      |
| <b>EUT Supports Function:</b> | 2.4 GHz ISM Band:               | IEEE 802.11b/g/n/ax    |                      |
|                               |                                 | Bluetooth 5.0          |                      |
|                               | 5 GHz U-NII Bands:              | 5 150 MHz to 5 250 MHz | IEEE 802.11a/n/ac/ax |
|                               |                                 | 5 250 MHz to 5 350 MHz | IEEE 802.11a/n/ac/ax |
|                               |                                 | 5 470 MHz to 5 725 MHz | IEEE 802.11a/n/ac/ax |
|                               |                                 | 5 725 MHz to 5 850 MHz | IEEE 802.11a/n/ac/ax |
| <b>Software Version:</b>      | 1.0.28                          |                        |                      |
| <b>Hardware Version:</b>      | A1                              |                        |                      |
| <b>Sample Received Date:</b>  | January 20, 2021                |                        |                      |
| <b>Sample Tested Date:</b>    | March 6, 2021 to March 27, 2021 |                        |                      |

#### 1.2.2 Description of Accessories

None.

### 1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

|                            |                                                                                                                                                                                                                 |                  |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| <b>Frequency Band:</b>     | 2400 MHz to 2483.5 MHz                                                                                                                                                                                          |                  |
| <b>Frequency Range:</b>    | 2412 MHz to 2462 MHz                                                                                                                                                                                            |                  |
| <b>Support Standards:</b>  | IEEE 802.11b, IEEE 802.11g, IEEE 802.11n-HT20, IEEE 802.11ax20                                                                                                                                                  |                  |
| <b>Type of Modulation:</b> | IEEE 802.11b: DSSS(CCK, DQPSK, DBPSK)<br>IEEE 802.11g: OFDM(64-QAM, 16-QAM, QPSK, BPSK)<br>IEEE 802.11n-HT20: OFDM(64-QAM, 16-QAM, QPSK, BPSK)<br>IEEE 802.11ax: OFDM(,256QAM,256QAM, 64QAM, 16QAM, QPSK, BPSK) |                  |
| <b>Data Rate:</b>          | IEEE 802.11b: Up to 11 Mbps<br>IEEE 802.11g: Up to 54 Mbps<br>IEEE 802.11n-HT20: Up to MCS15<br>IEEE 802.11ax20: Up to HE9                                                                                      |                  |
| <b>Number of Channels:</b> | IEEE 802.11b: 11<br>IEEE 802.11g: 11<br>IEEE 802.11n-HT20: 11<br>IEEE 802.11ax20: 11                                                                                                                            |                  |
| <b>Channel Separation:</b> | 5 MHz                                                                                                                                                                                                           |                  |
| <b>Antenna Type:</b>       | Chain 0                                                                                                                                                                                                         | External Antenna |
|                            | Chain 1                                                                                                                                                                                                         | External Antenna |

#### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

|                             |                 |                                                                                                                  |
|-----------------------------|-----------------|------------------------------------------------------------------------------------------------------------------|
| <b>Antenna Gain:</b>        | Chain 0         | 2.06 dBi                                                                                                         |
|                             | Chain 1         | 2.06 dBi                                                                                                         |
| <b>Maximum Peak Power:</b>  | SISO_ Chain 0   | IEEE 802.11b: 15.74 dBm<br>IEEE 802.11g: 15.37 dBm<br>IEEE 802.11n-HT20: 12.15 dBm<br>IEEE 802.11ax20: 12.44 dBm |
|                             | SISO_ Chain 1   | IEEE 802.11b: 15.21 dBm<br>IEEE 802.11g: 15.18 dBm<br>IEEE 802.11n-HT20: 12.39 dBm<br>IEEE 802.11ax20: 12.41 dBm |
|                             | MIMO_ Chain 0+1 | IEEE 802.11n-HT20: 15.28 dBm<br>IEEE 802.11ax20: 15.41 dBm                                                       |
|                             |                 |                                                                                                                  |
| <b>Maximum EIRP (dBm):</b>  | SISO_ Chain 0   | IEEE 802.11b: 17.80 dBm<br>IEEE 802.11g: 17.43 dBm<br>IEEE 802.11n-HT20: 14.21 dBm<br>IEEE 802.11ax20: 14.50 dBm |
|                             | SISO_ Chain 1   | IEEE 802.11b: 17.27 dBm<br>IEEE 802.11g: 17.24 dBm<br>IEEE 802.11n-HT20: 14.45 dBm<br>IEEE 802.11ax20: 14.47 dBm |
|                             | MIMO_ Chain 0+1 | IEEE 802.11n-HT20: 17.34 dBm<br>IEEE 802.11ax20: 17.47 dBm                                                       |
|                             |                 |                                                                                                                  |
| <b>Normal Test Voltage:</b> | 3.3 Vdc         |                                                                                                                  |

## 1.4 OTHER INFORMATION

| Operation Frequency Each of Channel                                         |                                               |
|-----------------------------------------------------------------------------|-----------------------------------------------|
| IEEE 802.11b,<br>IEEE 802.11g,<br>IEEE 802.11n-HT20<br>IEEE 802.11ax20      | $f = 2407 + 5k \text{ MHz}, k = 1, \dots, 11$ |
| Note:<br>f is the operating frequency (MHz);<br>k is the operating channel. |                                               |

## 1.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

### 1) Support Equipment

| Description         | Manufacturer | Model No.       | Serial Number   | Supplied by |
|---------------------|--------------|-----------------|-----------------|-------------|
| Notebook            | Lenovo       | Thinkpad        | PF-0EQBE3 15/11 | UnionTrust  |
| KTC power mainboard | KTC          | PW.1.17055.0001 | N/A             | Client      |

### 2) Support Cable

| Cable No. | Description   | Connector | Length     | Supplied by |
|-----------|---------------|-----------|------------|-------------|
| 1         | Antenna Cable | SMA       | 0.50 Meter | UnionTrust  |

## 1.6 TEST LOCATION

### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Telephone: +86 (0) 755 2823 0888

Fax: +86 (0) 755 2823 0886

## 1.7 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

### CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC/EN 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

### A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

### ISED Wireless Device Testing Laboratories

### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1



CAB identifier: CN0032

**FCC Accredited Lab.**

Designation Number: CN1194

Test Firm Registration Number: 259480

## 1.8 DEVIATION FROM STANDARDS

None.

## 1.9 ABNORMALITIES FROM STANDARD CONDITIONS

None.

## 1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

## 1.11 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

| No. | Item                            | Measurement Uncertainty |
|-----|---------------------------------|-------------------------|
| 1   | Conducted emission 9KHz-150KHz  | ±3.2 dB                 |
| 2   | Conducted emission 150KHz-30MHz | ±2.7 dB                 |
| 3   | Radiated emission 9KHz-30MHz    | ± 4.7 dB                |
| 4   | Radiated emission 30MHz-1GHz    | ± 4.6 dB                |
| 5   | Radiated emission 1GHz-18GHz    | ± 4.4 dB                |
| 6   | Radiated emission 18GHz-26GHz   | ± 4.6 dB                |
| 7   | Radiated emission 26GHz-40GHz   | ± 4.6 dB                |

## 2. TEST SUMMARY

| FCC 47 CFR Part 15 Subpart C Test Cases |                                                                                              |                                                 |        |
|-----------------------------------------|----------------------------------------------------------------------------------------------|-------------------------------------------------|--------|
| Test Item                               | Test Requirement                                                                             | Test Method                                     | Result |
| Antenna Requirement                     | FCC 47 CFR Part 15 Subpart C Section 15.203/15.247 (c)<br>RSS-Gen Issue 5, Section 6.8       | N/A                                             | PASS   |
| AC Power Line Conducted Emission        | FCC 47 CFR Part 15 Subpart C Section 15.207<br>RSS-Gen Issue 5, Section 8.8                  | ANSI C63.10-2013<br>Clause 6.2                  | PASS   |
| Conducted Peak Output Power             | FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(3)<br>RSS-247 Issue 2, Section 5.4(d)        | ANSI C63.10-2013<br>Clause 11.9.1.3             | PASS   |
| 6dB Bandwidth                           | FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(2)<br>RSS-247 Issue 2, Section 5.2(a)        | ANSI C63.10-2013<br>Clause 11.8.1               | PASS   |
| Occupied Bandwidth                      | RSS-Gen Issue 5, Section 6.7                                                                 | RSS-Gen Issue 5,<br>Section 6.7                 | PASS   |
| Power Spectral Density                  | FCC 47 CFR Part 15 Subpart C Section 15.247 (e)<br>RSS-247 Issue 2, Section 5.2(b)           | ANSI C63.10-2013<br>Clause 11.10.2              | PASS   |
| Conducted Out of Band Emission          | FCC 47 CFR Part 15 Subpart C Section 15.247(d)<br>RSS-247 Issue 2, Section 5.5               | ANSI C63.10-2013<br>Clause 11.11                | PASS   |
| Radiated Spurious Emissions             | FCC 47 CFR Part 15 Subpart C Section 15.205/15.209<br>RSS-Gen Issue 5, Section 6.13/8.9/8.10 | ANSI C63.10-2013<br>Clause 11.11 & Clause 11.12 | PASS   |
| Band Edge Measurements (Radiated)       | FCC 47 CFR Part 15 Subpart C Section 15.205/15.209<br>RSS-247 Issue 2, Section 5.5           | ANSI C63.10-2013<br>Clause 11.13                | PASS   |



### 3. EQUIPMENT LIST

| Radiated Emission Test Equipment List |                                   |              |            |                            |                         |                             |
|---------------------------------------|-----------------------------------|--------------|------------|----------------------------|-------------------------|-----------------------------|
| Used                                  | Equipment                         | Manufacturer | Model No.  | Serial Number              | Cal. date (mm dd, yyyy) | Cal. Due date (mm dd, yyyy) |
| <input checked="" type="checkbox"/>   | 3M Chamber & Accessory Equipment  | ETS-LINDGREN | 3M         | N/A                        | Jan. 22, 2021           | Jan. 21, 2024               |
| <input checked="" type="checkbox"/>   | Receiver                          | R&S          | ESIB26     | 100114                     | Nov. 18, 2020           | Nov. 17, 2021               |
| <input checked="" type="checkbox"/>   | EXA Spectrum Analyzer             | KEYSIGHT     | N9010A     | MY51440197                 | Nov. 14, 2020           | Nov. 13, 2022               |
| <input checked="" type="checkbox"/>   | Loop Antenna                      | ETS-LINDGREN | 6502       | 00202525                   | Nov. 14, 2020           | Nov. 13, 2022               |
| <input checked="" type="checkbox"/>   | Broadband Antenna                 | ETS-LINDGREN | 3142E      | 00201566                   | Nov. 14, 2020           | Nov. 13, 2022               |
| <input checked="" type="checkbox"/>   | 6dB Attenuator                    | Talent       | RA6A5-N-18 | 18103001                   | Nov. 10, 2020           | Nov. 9, 2021                |
| <input checked="" type="checkbox"/>   | Preamplifier                      | HP           | 8447F      | 2805A02960                 | May. 30, 2020           | May. 9, 2021                |
| <input type="checkbox"/>              | Broadband Antenna (Pre-amplifier) | ETS-LINDGREN | 3142E-PA   | 00201891                   | Nov. 18, 2020           | Nov. 17, 2021               |
| <input type="checkbox"/>              | 6dB Attenuator                    | Talent       | RA6A5-N-18 | 18103002                   | Nov. 14, 2020           | Nov. 13, 2022               |
| <input type="checkbox"/>              | Horn Antenna                      | ETS-LINDGREN | 3117       | 00164202                   | May. 30, 2020           | May. 29, 2021               |
| <input checked="" type="checkbox"/>   | Horn Antenna (Pre-amplifier)      | ETS-LINDGREN | 3117-PA    | 00201874                   | Dec. 03, 2018           | Dec. 03, 2021               |
| <input type="checkbox"/>              | Horn Antenna                      | ETS-LINDGREN | 3116C      | 00200180                   | Jun. 19, 2020           | Jun. 18, 2021               |
| <input checked="" type="checkbox"/>   | Horn Antenna (Pre-amplifier)      | ETS-LINDGREN | 3116C-PA   | 00202652                   | Nov. 14, 2020           | Nov. 13, 2022               |
| <input checked="" type="checkbox"/>   | Multi device Controller           | ETS-LINDGREN | 7006-001   | 00160105                   | N/A                     | N/A                         |
| <input checked="" type="checkbox"/>   | Test Software                     | Audix        | e3         | Software Version: 9.160323 |                         |                             |

| Conducted Emission Test Equipment List |               |              |           |                            |                         |                             |
|----------------------------------------|---------------|--------------|-----------|----------------------------|-------------------------|-----------------------------|
| Used                                   | Equipment     | Manufacturer | Model No. | Serial Number              | Cal. date (mm dd, yyyy) | Cal. Due date (mm dd, yyyy) |
| <input checked="" type="checkbox"/>    | Receiver      | R&S          | ESR7      | 1316.3003K07-101181-K3     | Nov. 18, 2020           | Nov. 17, 2021               |
| <input checked="" type="checkbox"/>    | Pulse Limiter | R&S          | ESH3-Z2   | 0357.8810.54               | Nov. 18, 2020           | Nov. 17, 2021               |
| <input checked="" type="checkbox"/>    | LISN          | R&S          | ESH2-Z5   | 860014/024                 | Nov. 18, 2020           | Nov. 17, 2021               |
| <input type="checkbox"/>               | LISN          | ETS-Lindgren | 3816/2SH  | 00201088                   | Nov. 18, 2020           | Nov. 17, 2021               |
| <input checked="" type="checkbox"/>    | Test Software | Audix        | e3        | Software Version: 9.160323 |                         |                             |

| Conducted RF test Equipment List    |                                         |              |           |               |                         |                             |
|-------------------------------------|-----------------------------------------|--------------|-----------|---------------|-------------------------|-----------------------------|
| Used                                | Equipment                               | Manufacturer | Model No. | Serial Number | Cal. date (mm dd, yyyy) | Cal. Due date (mm dd, yyyy) |
| <input checked="" type="checkbox"/> | EXA Spectrum Analyzer                   | KEYSIGHT     | N9010A    | MY51440197    | Nov. 10, 2020           | Nov. 09, 2021               |
| <input checked="" type="checkbox"/> | USB Wideband Power Sensor               | KEYSIGHT     | U2021XA   | MY55430035    | Nov. 10, 2020           | Nov. 09, 2021               |
| <input type="checkbox"/>            | USB Wideband Power Sensor               | KEYSIGHT     | U2021XA   | MY55430023    | Nov. 10, 2020           | Nov. 09, 2021               |
| <input checked="" type="checkbox"/> | MXG X-Series RF Vector Signal Generator | KEYSIGHT     | N5182B    | MY51350267    | Nov. 10, 2020           | Nov. 09, 2021               |

#### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

## 4. TEST CONFIGURATION

### 4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

#### 4.1.1 Normal or Extreme Test Conditions

| Environment Parameter                                           | Selected Values During Tests |             |                       |
|-----------------------------------------------------------------|------------------------------|-------------|-----------------------|
| Test Condition                                                  | Ambient                      |             |                       |
|                                                                 | Temperature (°C)             | Voltage (V) | Relative Humidity (%) |
| NT/NV                                                           | +15 to +35                   | 3.3Vdc      | 20 to 75              |
| <b>Remark:</b><br>1) NV: Normal Voltage; NT: Normal Temperature |                              |             |                       |

#### 4.1.2 Record of Normal Environment

| Test Item                          | Temperature (°C) | Relative Humidity (%) | Pressure (kPa) | Tested by   |
|------------------------------------|------------------|-----------------------|----------------|-------------|
| AC Power Line Conducted Emission   | 24.8             | 34                    | 99.82          | Tripp Jiang |
| Conducted Peak Output Power        | 24.8             | 55                    | 100.18         | Rocky Li    |
| 6dB Bandwidth & Occupied Bandwidth | 24.8             | 55                    | 100.18         | Rocky Li    |
| Power Spectral Density             | 24.8             | 55                    | 100.18         | Rocky Li    |
| Conducted Out of Band Emission     | 24.8             | 55                    | 100.18         | Rocky Li    |
| Radiated Spurious Emissions        | 23.6             | 52                    | 100.38         | Andy Lin    |
| Band Edge Measurements (Radiated)  | 23.6             | 52                    | 100.38         | Andy Lin    |

### 4.2 TEST CHANNELS

| Mode              | Tx/Rx Frequency      | Test RF Channel Lists |           |            |
|-------------------|----------------------|-----------------------|-----------|------------|
|                   |                      | Lowest(L)             | Middle(M) | Highest(H) |
| IEEE 802.11b      | 2412 MHz to 2462 MHz | Channel 1             | Channel 6 | Channel 11 |
|                   |                      | 2412 MHz              | 2437 MHz  | 2462 MHz   |
| IEEE 802.11g      | 2412 MHz to 2462 MHz | Channel 1             | Channel 6 | Channel 11 |
|                   |                      | 2412 MHz              | 2437 MHz  | 2462 MHz   |
| IEEE 802.11n-HT20 | 2412 MHz to 2462 MHz | Channel 1             | Channel 6 | Channel 11 |
|                   |                      | 2412 MHz              | 2437 MHz  | 2462 MHz   |
| IEEE 802.11ax20   | 2412 MHz to 2462 MHz | Channel 1             | Channel 6 | Channel 11 |
|                   |                      | 2412 MHz              | 2437 MHz  | 2462 MHz   |

### 4.3 EUT TEST STATUS

| Mode                                                                 | Tx/Rx Function | Description                                                                            |
|----------------------------------------------------------------------|----------------|----------------------------------------------------------------------------------------|
| IEEE 802.11b<br>IEEE 802.11g<br>IEEE 802.11n-HT20<br>IEEE 802.11ax20 | 1Tx/1Rx        | 1. Keep the EUT in continuously transmitting or receiving with modulation test single. |
| IEEE 802.11n-HT20<br>IEEE 802.11ax20                                 | 2Tx/2Rx        | 2. Keep the EUT in continuously transmitting or receiving with modulation test single. |

| Power Setting     |               |         |
|-------------------|---------------|---------|
| Mode              | Channel 1 -11 |         |
|                   | Chain 0       | Chain 1 |
| IEEE 802.11b      | 65            | 65      |
| IEEE 802.11g      | 65            | 65      |
| IEEE 802.11n-HT20 | 50            | 50      |
| IEEE 802.11ax20   | 50            | 50      |

| Test Software                    |
|----------------------------------|
| Test software name: adb command; |

### 4.4 PRE-SCAN

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and data rate. Following data rate was (were) selected for the final test as listed below

| Mode              | Worst-case data rates |
|-------------------|-----------------------|
| IEEE 802.11b      | 1 Mbps                |
| IEEE 802.11g      | 6 Mbps                |
| IEEE 802.11n-HT20 | MCS0                  |
| IEEE 802.11ax20   | HE0                   |

## 4.5 TEST SETUP

### 4.5.1 For Radiated Emissions test setup

Figure 1. Below 30MHz




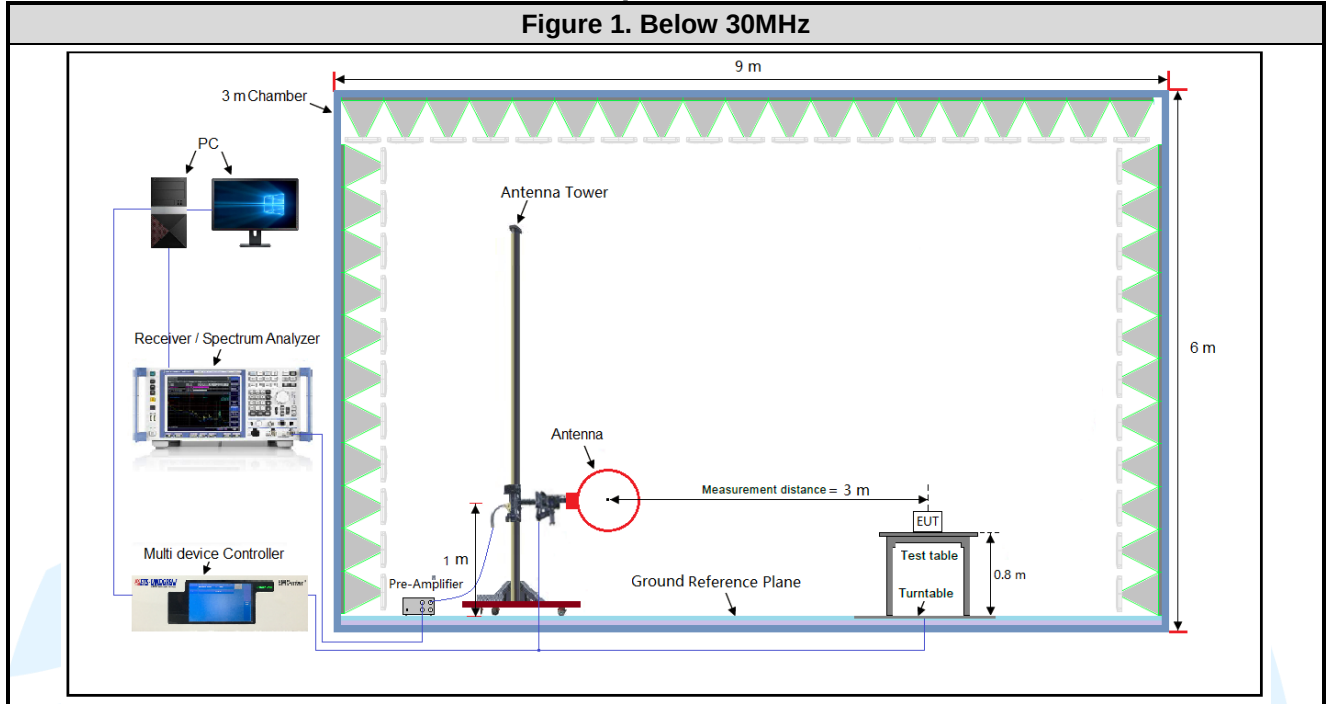


Figure 2. 30MHz to 1GHz

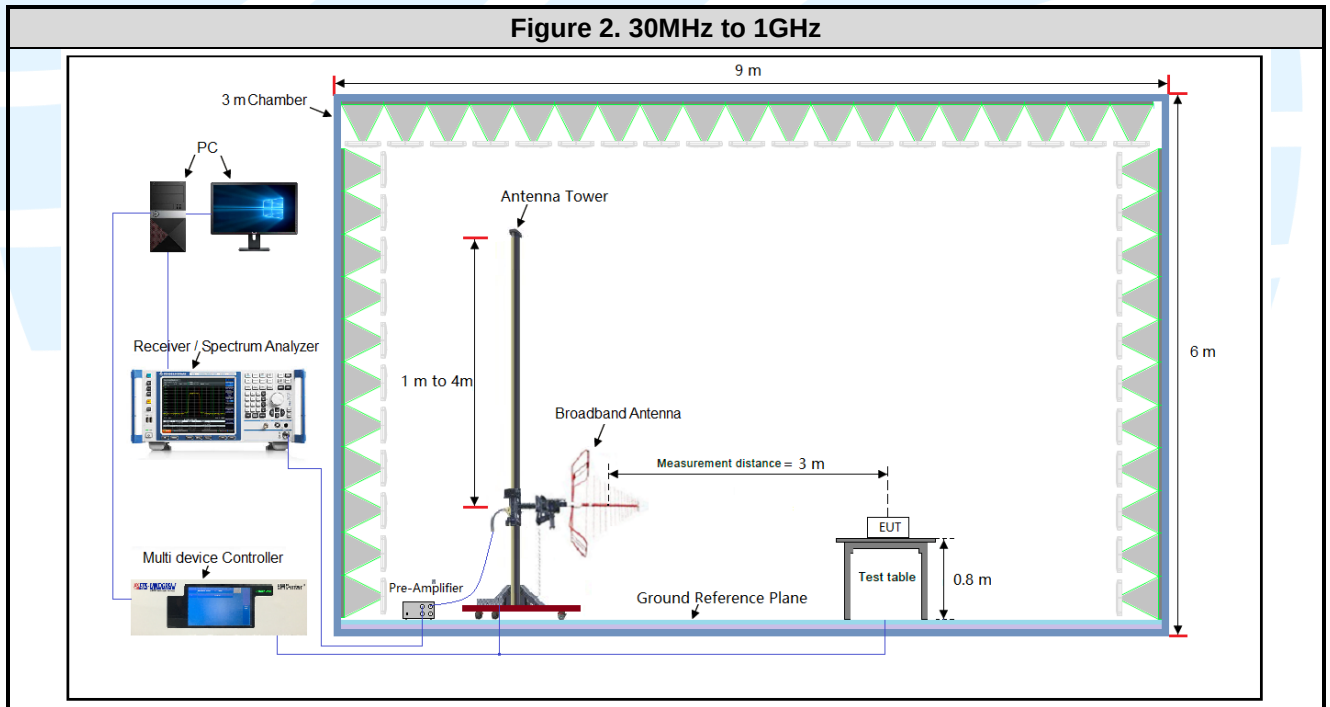


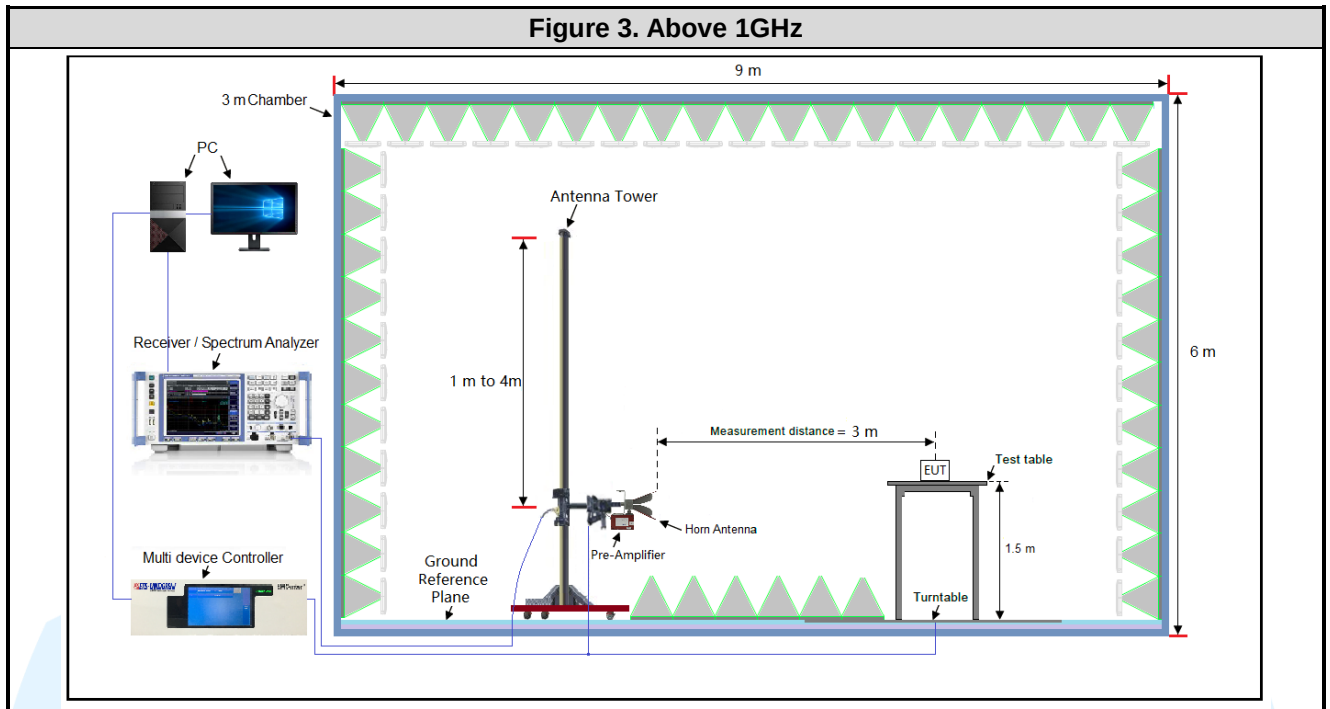

#### 4.5.2 For Conducted Emissions test setup

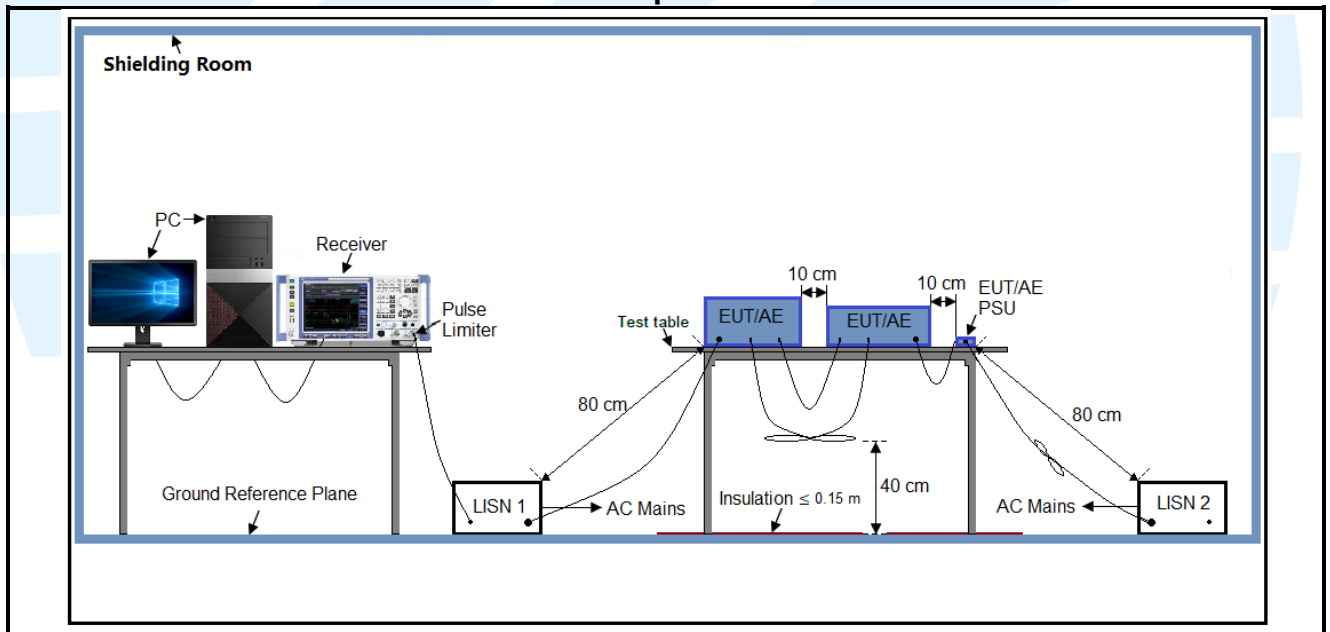

#### 4.5.3 For Conducted RF test setup

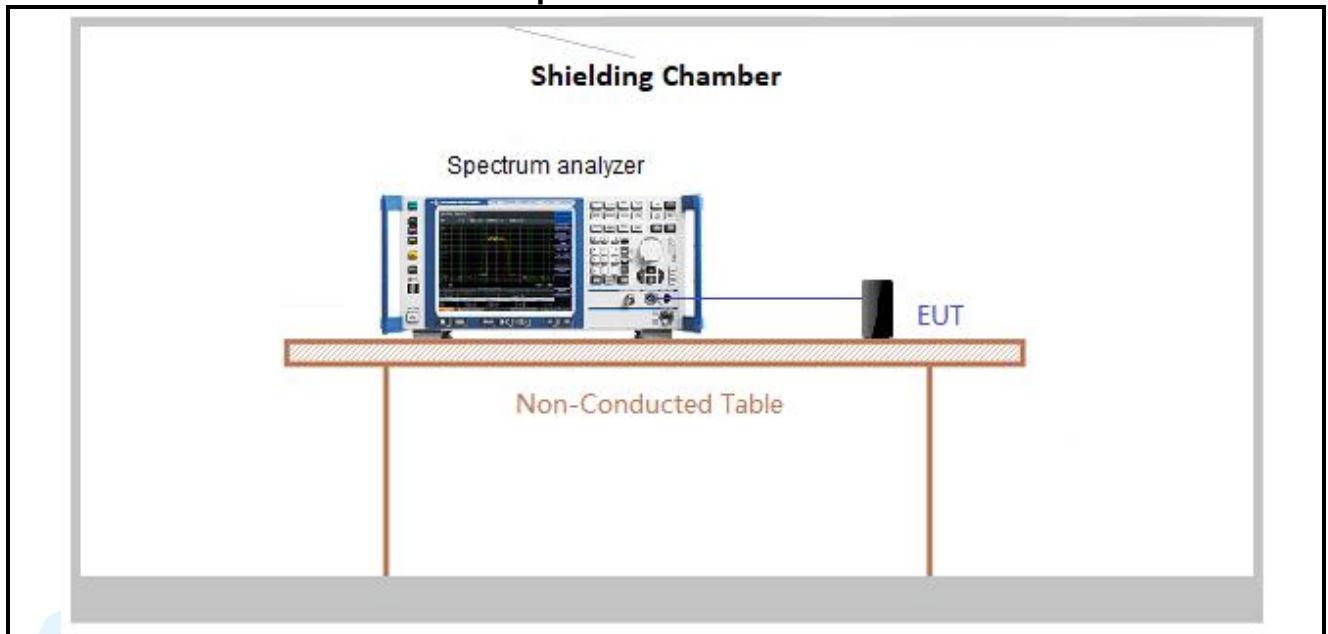

#### 4.6 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. Only the worst case data were recorded in this test report.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. Therefore, all final radiated testing was performed with the EUT in (see table below) orientation.

| Frequency  | Mode | Antenna Port | Worst-case axis positioning |
|------------|------|--------------|-----------------------------|
| Above 1GHz | 1TX  | Chain 0      | Z axis                      |
|            | 1TX  | Chain 1      | Z axis                      |
|            | 2TX  | Chain 0+1    | Z axis                      |

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.



## 4.7 DUTY CYCLE

Test Procedure: ANSI C63.10-2013 Clause 11.6.


### Test Results



| Mode              | Data rates (Mbps) | On Time (msec) | Period (msec) | Duty Cycle (linear) | Duty Cycle (%) | Duty Cycle Factor (dB) | 1/ T Minimum VBW (kHz) | Average Factor (dB) |
|-------------------|-------------------|----------------|---------------|---------------------|----------------|------------------------|------------------------|---------------------|
| IEEE 802.11b      | 1                 | 12.360         | 12.440        | 0.99                | 99.36          | 0.00                   | 0.01                   | -0.06               |
| IEEE 802.11g      | 6                 | 2.040          | 2.090         | 0.98                | 97.61          | 0.11                   | 0.49                   | -0.21               |
| IEEE 802.11n-HT20 | MCS0              | 0.220          | 0.255         | 0.86                | 86.27          | 0.64                   | 4.55                   | -1.28               |
| IEEE 802.11ax20   | MCS0              | 1.480          | 1.525         | 0.97                | 97.05          | 0.13                   | 0.68                   | -0.26               |


### Remark:

- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor =  $10 * \log(1/ \text{Duty cycle})$ ;
- 3) Average factor =  $20 \log_{10} \text{Duty Cycle}$ .

The test plots as follows

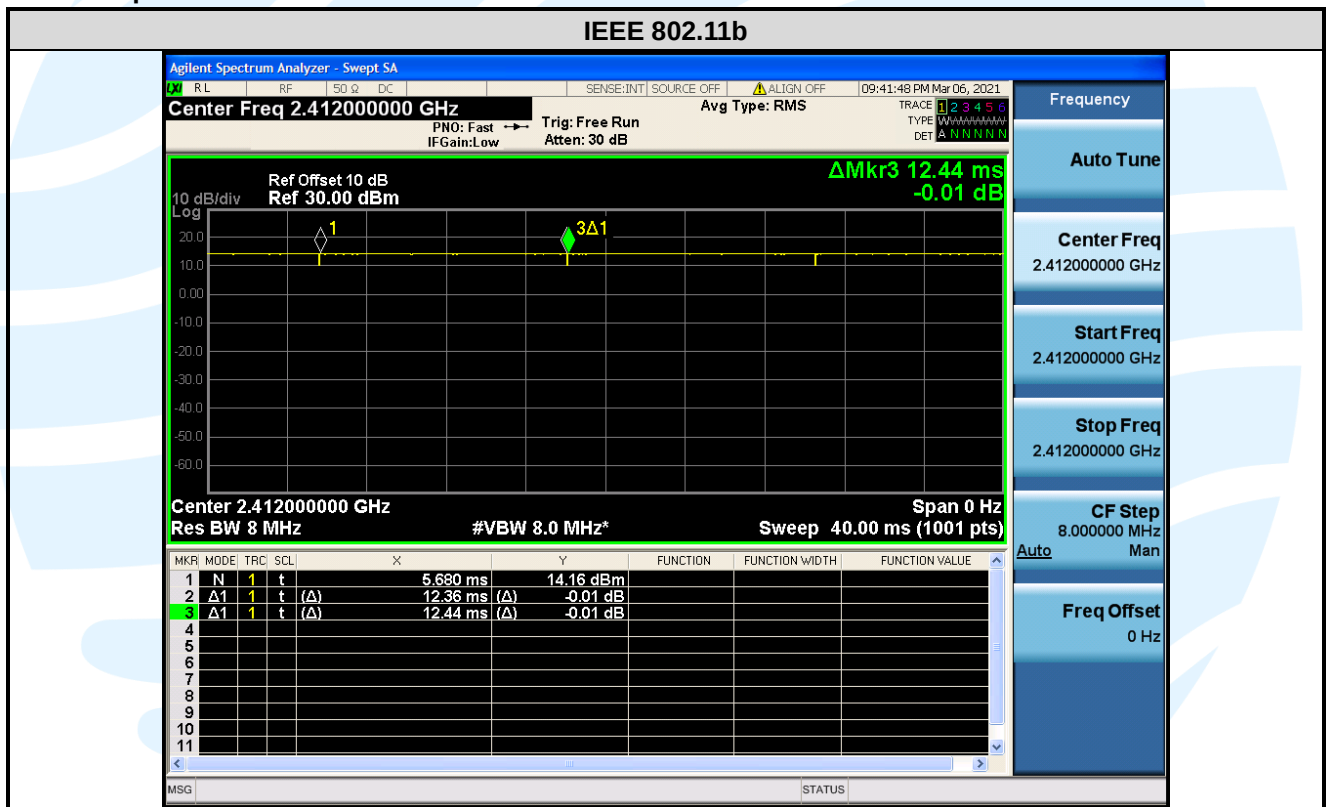

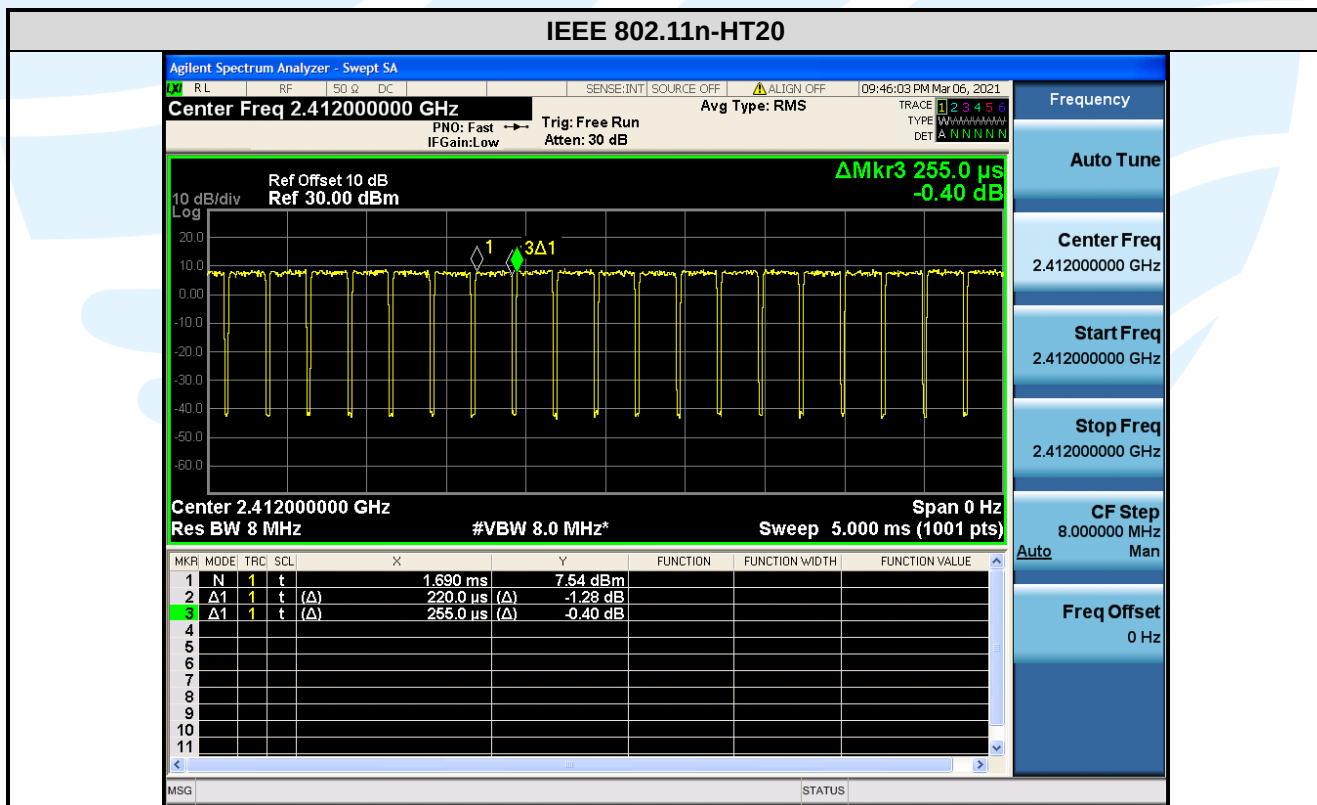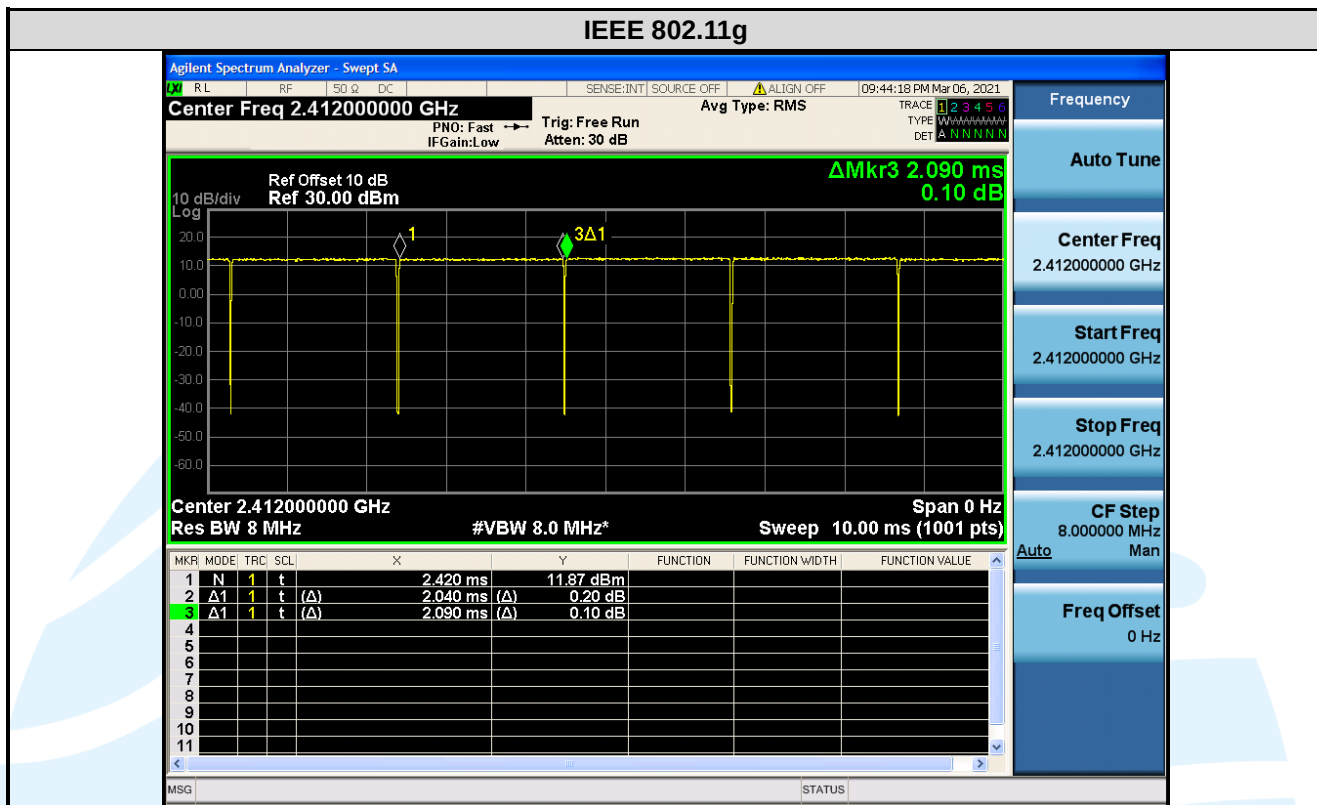

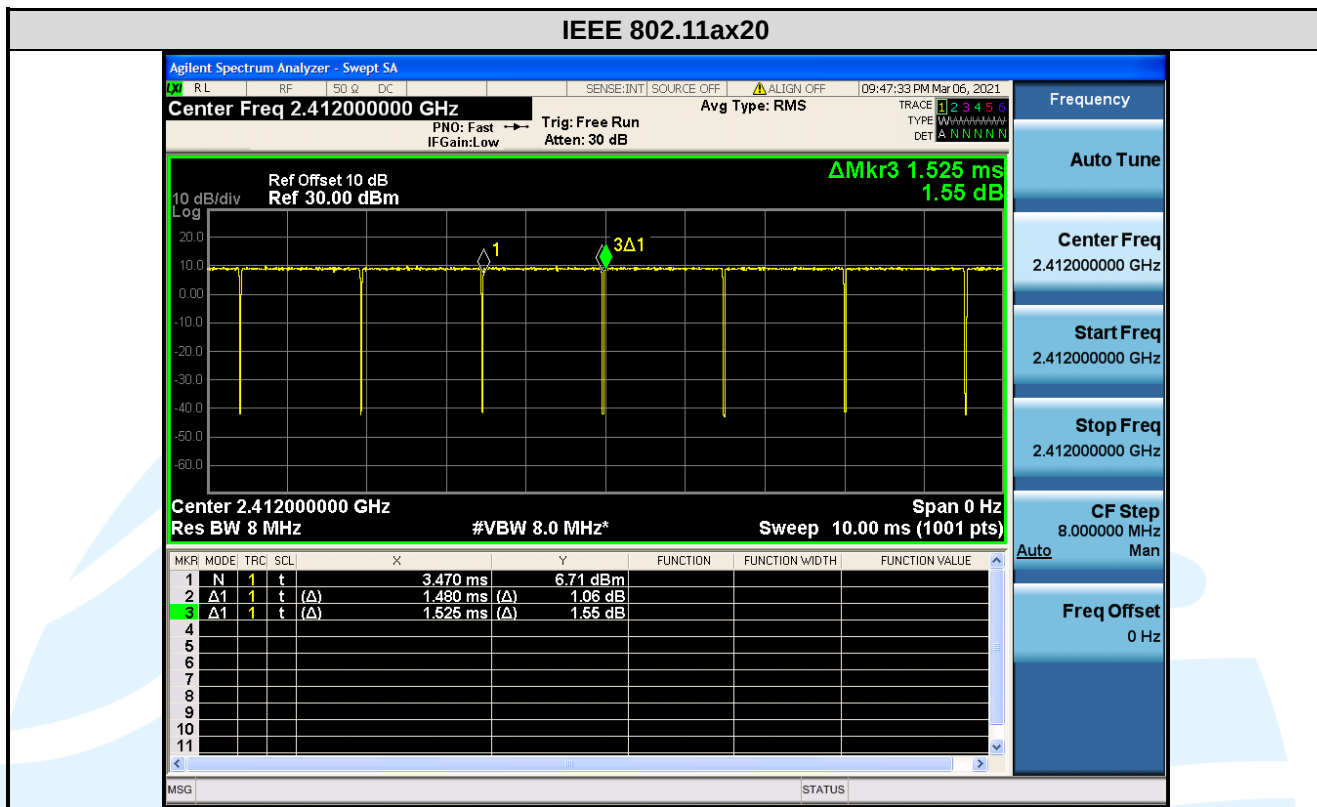

### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

## 5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

### 5.1 REFERENCE DOCUMENTS FOR TESTING

| No. | Identity                                          | Document Title                                                                                                                                                                            |
|-----|---------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | FCC 47 CFR Part 2                                 | Frequency allocations and radio treaty matters; general rules and regulations                                                                                                             |
| 2   | FCC 47 CFR Part 15                                | Radio Frequency Devices                                                                                                                                                                   |
| 3   | RSS-247 Issue 2                                   | Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices                                                              |
| 4   | RSS-Gen Issue 5                                   | General Requirements for Compliance of Radio Apparatus                                                                                                                                    |
| 5   | ANSI C63.10-2013                                  | American National Standard for Testing Unlicensed Wireless Devices                                                                                                                        |
| 6   | KDB 558074 D01 15.247 Meas Guidance v05r02        | Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules |
| 7   | KDB 662911 D01 Multiple Transmitter Output v02r01 | Emissions Testing of Transmitters with Multiple Outputs in the Same Band                                                                                                                  |

### 5.2 ANTENNA REQUIREMENT

| Standard Requirement                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>15.203 requirement:</b><br/>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p><b>15.247(b) (4) requirement:</b><br/>The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> <p><b>RSS-Gen Issue 5, Section 6.8 requirement:</b><br/>According to RSS-Gen Issue 5, Section 6.8, a transmitter can only be sold or operated with antennas with which it was certified. A transmitter may be certified with multiple antenna types. An antenna type comprises antennas having similar in-band and out-of-band radiation patterns.</p> <p><b>EUT Antenna:</b><br/>The antenna has a special interface and no consideration of replacement. The transmit signals are correlated with each other and the antenna gain of both chains is completely consistent, the best case directional gain of the antenna is 5.96 dBi (See section 5.3).</p> |

### 5.3 CONDUCTED PEAK OUTPUT POWER

- Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(3)  
RSS-247 Issue 2, Section 5.4(d)
- Test Method:** ANSI C63.10-2013 Clause 11.9.1.3
- Limit:** For systems using digital modulation in the 2400-2483.5 MHz bands: 1 Watt.
- Test Procedure:**
1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.
  2. Measure out each test modes' peak or average output power, record the power level.
- Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.
- Test Setup:** Refer to section 4.5.3 for details.
- Instruments Used:** Refer to section 3 for details

#### Test Results:

| Mode              | Channel/<br>Frequency<br>(MHz) | Maximum Conducted Peak Output Power (dBm) |               |                                   |                | Pass / Fail |
|-------------------|--------------------------------|-------------------------------------------|---------------|-----------------------------------|----------------|-------------|
|                   |                                | SISO_ Chain 0                             | SISO_ Chain 1 | Total Power<br>MIMO_ Chain<br>0+1 | Limit<br>(dBm) |             |
| IEEE 802.11b      | 1(2412)                        | 15.58                                     | 14.63         | ---                               | 30             | Pass        |
|                   | 6(2437)                        | 15.74                                     | 15.09         | ---                               | 30             | Pass        |
|                   | 11(2462)                       | 15.53                                     | 15.21         | ---                               | 30             | Pass        |
| IEEE 802.11g      | 1(2412)                        | 15.29                                     | 14.40         | ---                               | 30             | Pass        |
|                   | 6(2437)                        | 15.37                                     | 14.98         | ---                               | 30             | Pass        |
|                   | 11(2462)                       | 15.15                                     | 15.18         | ---                               | 30             | Pass        |
| IEEE 802.11n-HT20 | 1(2412)                        | 12.00                                     | 11.85         | 14.94                             | 30             | Pass        |
|                   | 6(2437)                        | 12.13                                     | 12.07         | 15.11                             | 30             | Pass        |
|                   | 11(2462)                       | 12.15                                     | 12.39         | 15.28                             | 30             | Pass        |
| IEEE 802.11ax20   | 1(2412)                        | 12.33                                     | 12.03         | 15.19                             | 30             | Pass        |
|                   | 6(2437)                        | 12.44                                     | 12.35         | 15.41                             | 30             | Pass        |
|                   | 11(2462)                       | 12.29                                     | 12.41         | 15.36                             | 30             | Pass        |

#### Remark:

1. Total (Chain 0+1) =  $10 \cdot \log[(10^{\text{Chain 0/10}}) + (10^{\text{Chain 1/10}})]$
2. Directional gain and the maximum conducted output power limit see table below:

| Frequency Band                                                                                                                                                                                                      | Chain 0 Antenna<br>Gain (dBi) | Chain 1 Antenna<br>Gain (dBi) | Correlated chains<br>directional gain (dBi) | Peak Power Limit<br>(dBm) |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|-------------------------------|---------------------------------------------|---------------------------|
| 2400 MHz to 2483.5 MHz                                                                                                                                                                                              | 2.06                          | 2.06                          | 5.07                                        | 30.00                     |
| Basic methodology with $N_{ANT}$ transmit antennas, each with the same directional gain $G_{ANT}$ dBi, being driven by $N_{ANT}$ transmitter outputs of equal power. Directional gain is to be computed as follows: |                               |                               |                                             |                           |
| If any transmit signals are <i>correlated</i> with each other,                                                                                                                                                      |                               |                               |                                             |                           |
| Directional gain = $G_{ANT} + 10 \log(N_{ANT})$ dBi                                                                                                                                                                 |                               |                               |                                             |                           |

For maximum e.i.r.p.

| Mode              | Channel/<br>Frequency<br>(MHz) | Maximum e.i.r.p. (dBm) |               |                                   |                | Pass / Fail |
|-------------------|--------------------------------|------------------------|---------------|-----------------------------------|----------------|-------------|
|                   |                                | SISO_ Chain 0          | SISO_ Chain 1 | Total Power<br>MIMO_ Chain<br>0+1 | Limit<br>(dBm) |             |
| IEEE 802.11b      | 1(2412)                        | 17.64                  | 16.69         | ---                               | 30             | Pass        |
|                   | 6(2437)                        | <b>17.80</b>           | 17.15         | ---                               | 30             | Pass        |
|                   | 11(2462)                       | 17.59                  | 17.27         | ---                               | 30             | Pass        |
| IEEE 802.11g      | 1(2412)                        | 17.35                  | 16.46         | ---                               | 30             | Pass        |
|                   | 6(2437)                        | 17.43                  | 17.04         | ---                               | 30             | Pass        |
|                   | 11(2462)                       | 17.21                  | 17.24         | ---                               | 30             | Pass        |
| IEEE 802.11n-HT20 | 1(2412)                        | 14.06                  | 13.91         | 17.00                             | 30             | Pass        |
|                   | 6(2437)                        | 14.19                  | 14.13         | 17.17                             | 30             | Pass        |
|                   | 11(2462)                       | 14.21                  | 14.45         | 17.34                             | 30             | Pass        |
| IEEE 802.11ax20   | 1(2412)                        | 14.39                  | 14.09         | 17.25                             | 30             | Pass        |
|                   | 6(2437)                        | 14.50                  | 14.41         | <b>17.47</b>                      | 30             | Pass        |
|                   | 11(2462)                       | 14.35                  | 14.47         | 17.42                             | 30             | Pass        |

## 5.46 DB BANDWIDTH & OCCUPIED BANDWIDTH

|                          |                                                                                                                                                                       |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                          | FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(2)                                                                                                                    |
| <b>Test Requirement:</b> | RSS-247 Issue 2, Section 5.2(a)<br>RSS-Gen Issue 5, Section 6.7                                                                                                       |
| <b>Test Method:</b>      | ANSI C63.10-2013 Clause 11.8.1<br>RSS-Gen Issue 5, Section 6.7                                                                                                        |
| <b>Limit:</b>            | For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz                                                                                       |
| <b>Test Procedure:</b>   | Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.<br>Use the following spectrum analyzer settings: |

### 6dB Bandwidth

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### Occupied Bandwidth

- Set RBW = 1% to 5% of the occupied bandwidth
- Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.


Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.


|                          |                                     |
|--------------------------|-------------------------------------|
| <b>Test Setup:</b>       | Refer to section 4.5.3 for details. |
| <b>Instruments Used:</b> | Refer to section 3 for details      |
| <b>Test Results:</b>     |                                     |





| Mode              | Channel/<br>Frequency<br>(MHz) | 6 dB<br>Bandwidth<br>(MHz) | 99%<br>Bandwidth<br>(MHz) | 6 dB<br>Bandwidth<br>Limit | Pass / Fail |
|-------------------|--------------------------------|----------------------------|---------------------------|----------------------------|-------------|
| <b>Chain 0</b>    |                                |                            |                           |                            |             |
| IEEE 802.11b      | 1(2412)                        | 7.564                      | 10.277                    | > 500 kHz                  | Pass        |
|                   | 6(2437)                        | 7.118                      | 10.328                    | > 500 kHz                  | Pass        |
|                   | 11(2462)                       | 7.579                      | 10.347                    | > 500 kHz                  | Pass        |
| IEEE 802.11g      | 1(2412)                        | 16.39                      | 16.493                    | > 500 kHz                  | Pass        |
|                   | 6(2437)                        | 16.39                      | 16.488                    | > 500 kHz                  | Pass        |
|                   | 11(2462)                       | 16.39                      | 16.471                    | > 500 kHz                  | Pass        |
| IEEE 802.11n-HT20 | 1(2412)                        | 17.62                      | 17.690                    | > 500 kHz                  | Pass        |
|                   | 6(2437)                        | 17.63                      | 17.696                    | > 500 kHz                  | Pass        |
|                   | 11(2462)                       | 17.63                      | 17.708                    | > 500 kHz                  | Pass        |
| IEEE 802.11ax20   | 1(2412)                        | 18.80                      | 18.861                    | > 500 kHz                  | Pass        |
|                   | 6(2437)                        | 18.92                      | 18.866                    | > 500 kHz                  | Pass        |
|                   | 11(2462)                       | 18.78                      | 18.870                    | > 500 kHz                  | Pass        |
| <b>Chain 1</b>    |                                |                            |                           |                            |             |
| IEEE 802.11b      | 1(2412)                        | 7.127                      | 10.495                    | > 500 kHz                  | Pass        |
|                   | 6(2437)                        | 8.036                      | 10.783                    | > 500 kHz                  | Pass        |
|                   | 11(2462)                       | 7.577                      | 10.501                    | > 500 kHz                  | Pass        |
| IEEE 802.11g      | 1(2412)                        | 16.39                      | 16.491                    | > 500 kHz                  | Pass        |
|                   | 6(2437)                        | 16.39                      | 16.494                    | > 500 kHz                  | Pass        |
|                   | 11(2462)                       | 16.39                      | 16.487                    | > 500 kHz                  | Pass        |
| IEEE 802.11n-HT20 | 1(2412)                        | 16.07                      | 16.346                    | > 500 kHz                  | Pass        |
|                   | 6(2437)                        | 17.66                      | 17.676                    | > 500 kHz                  | Pass        |
|                   | 11(2462)                       | 17.67                      | 17.664                    | > 500 kHz                  | Pass        |
| IEEE 802.11ax20   | 1(2412)                        | 18.89                      | 18.873                    | > 500 kHz                  | Pass        |
|                   | 6(2437)                        | 18.91                      | 18.869                    | > 500 kHz                  | Pass        |
|                   | 11(2462)                       | 18.92                      | 18.873                    | > 500 kHz                  | Pass        |

The test plots as follows:  
6 dB Bandwidth

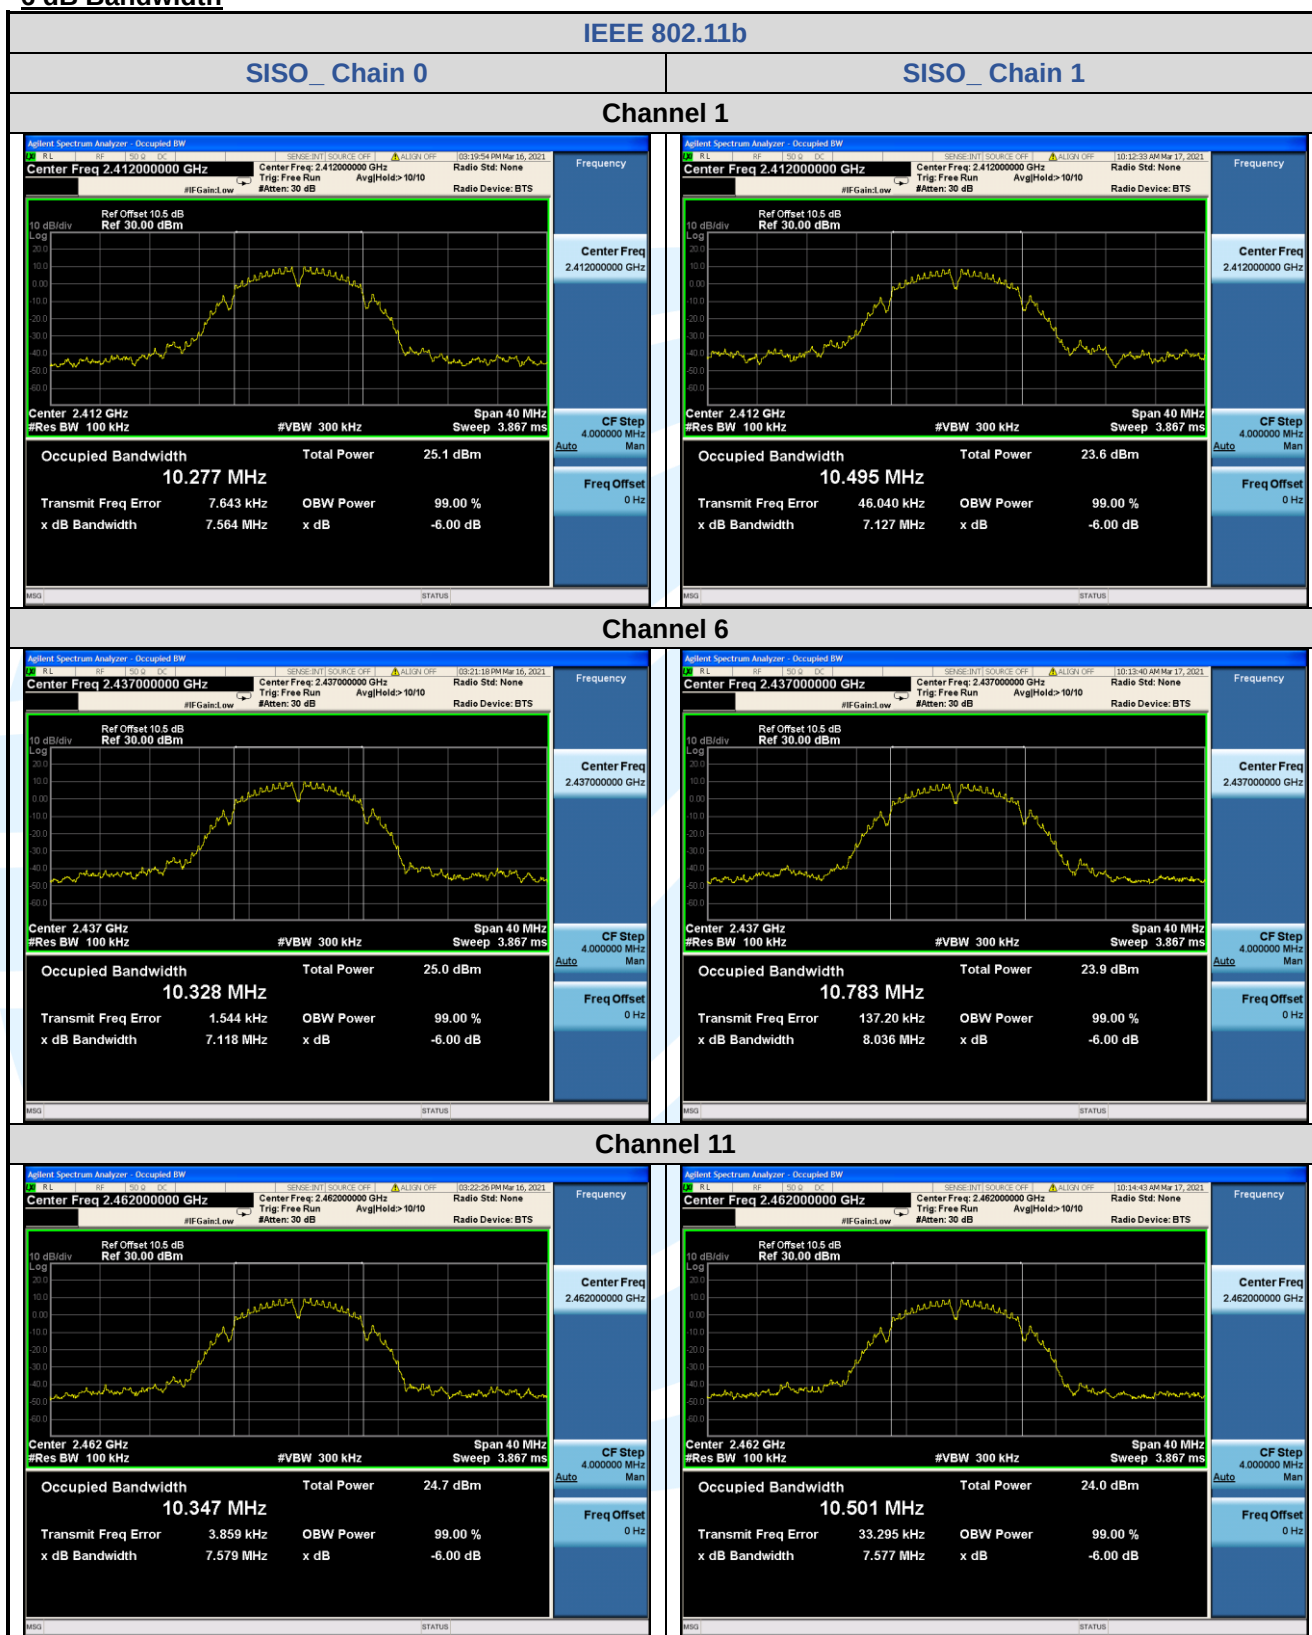

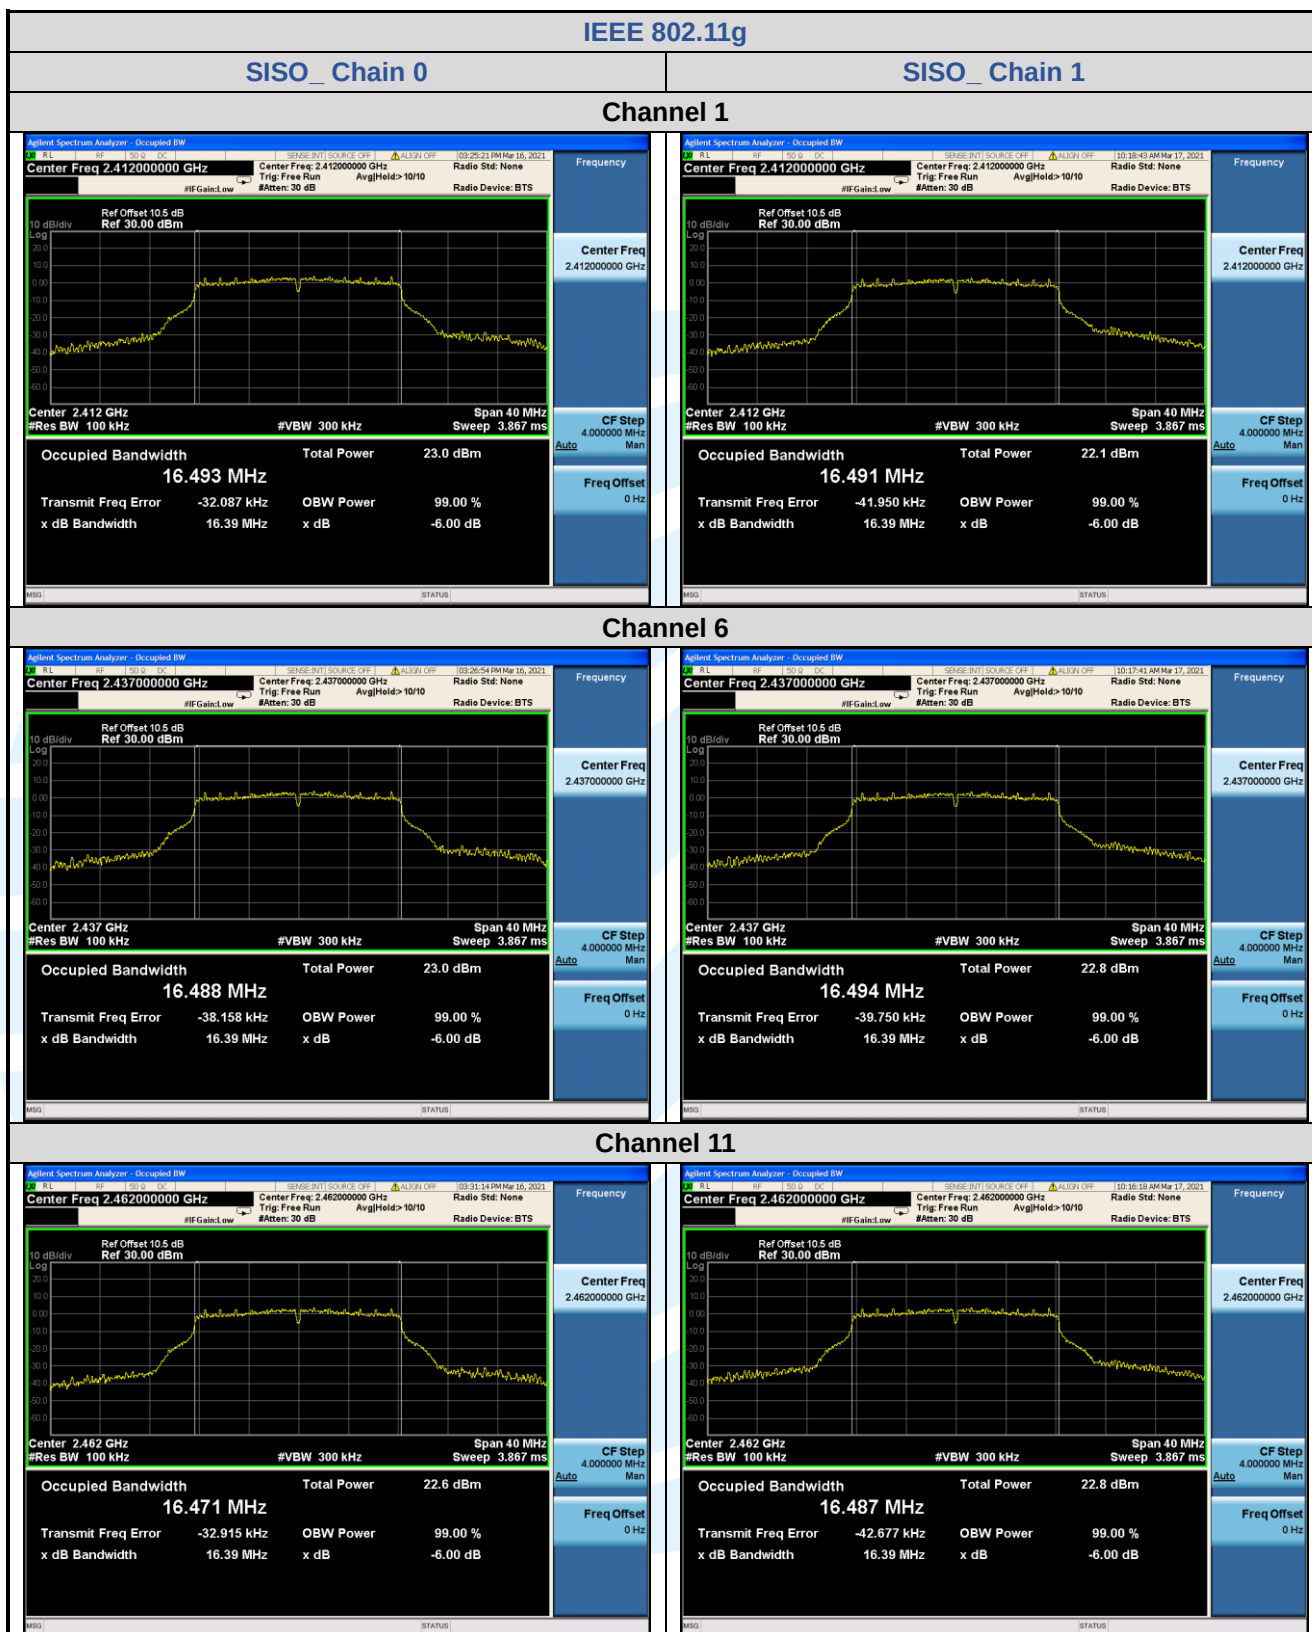

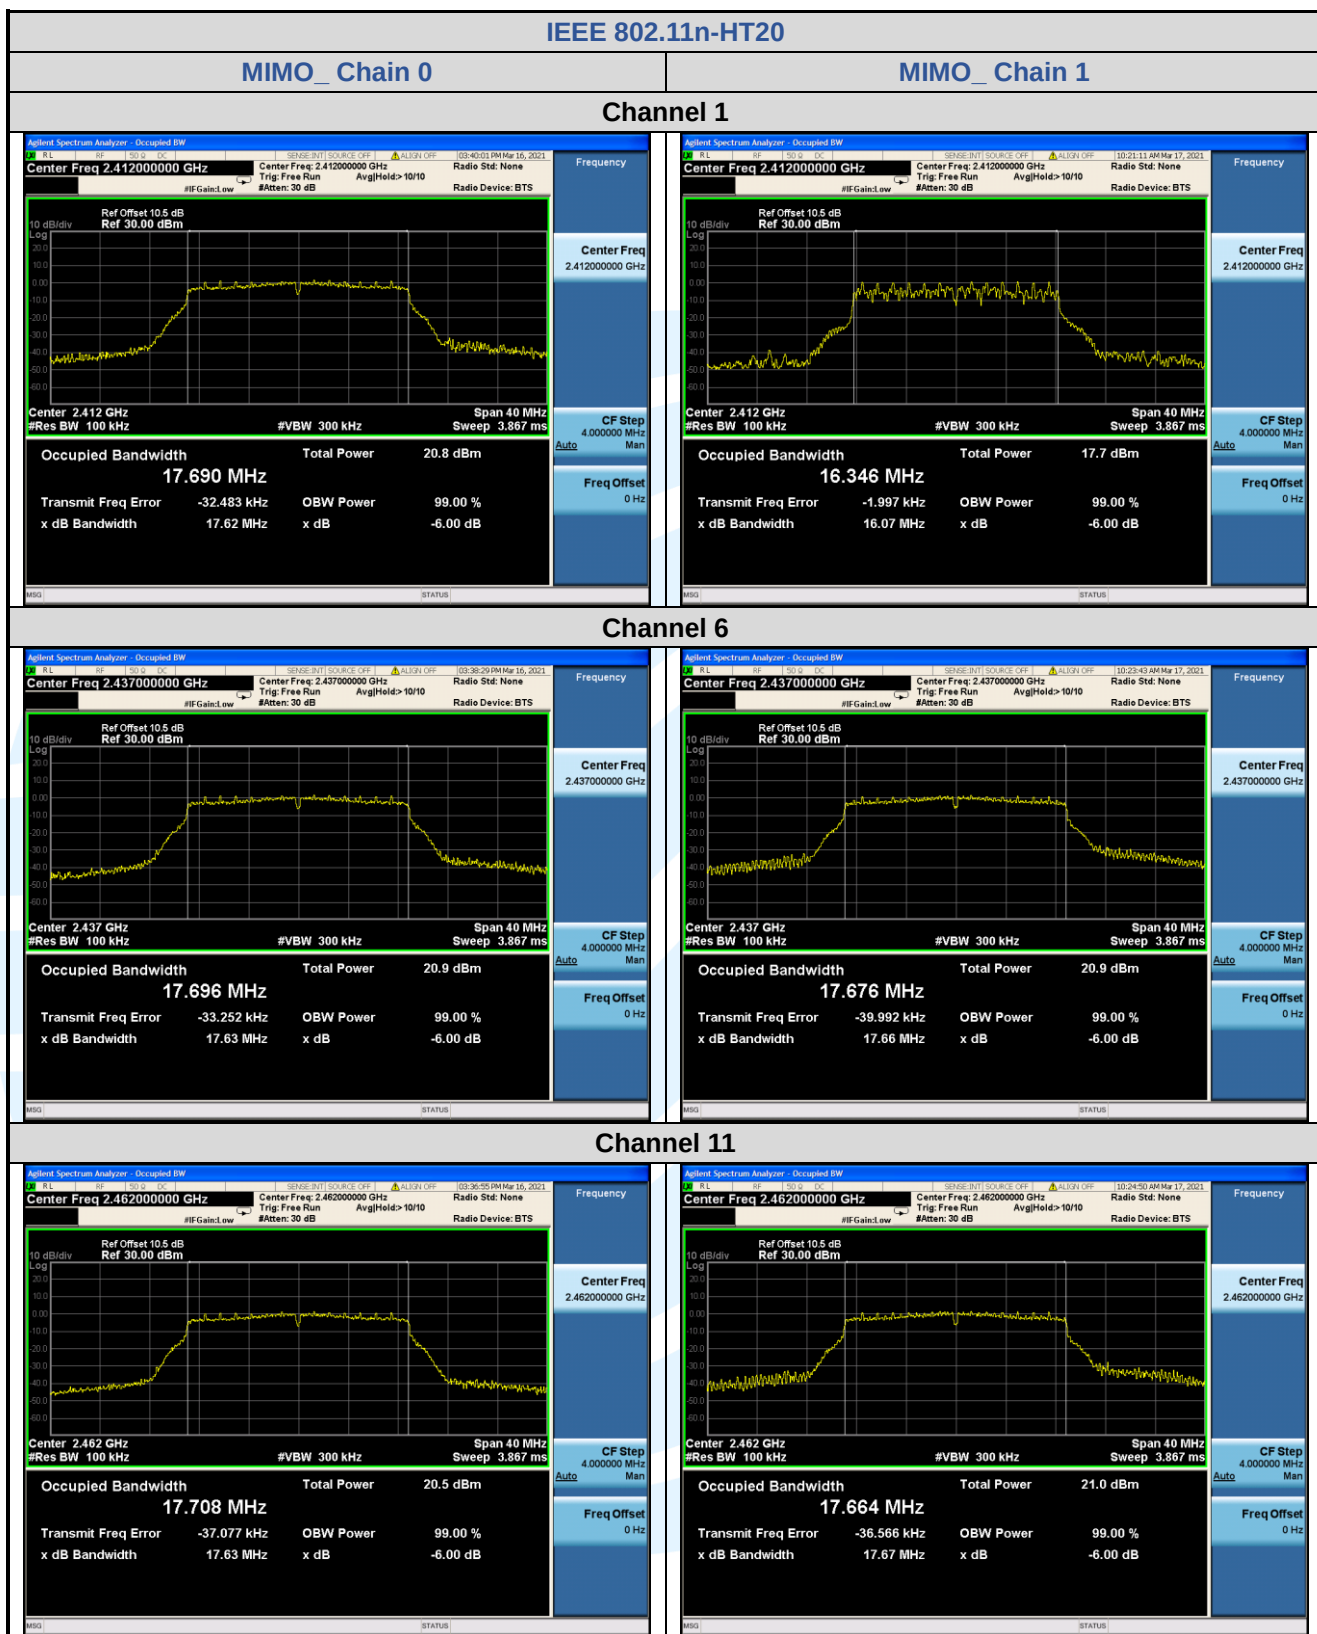

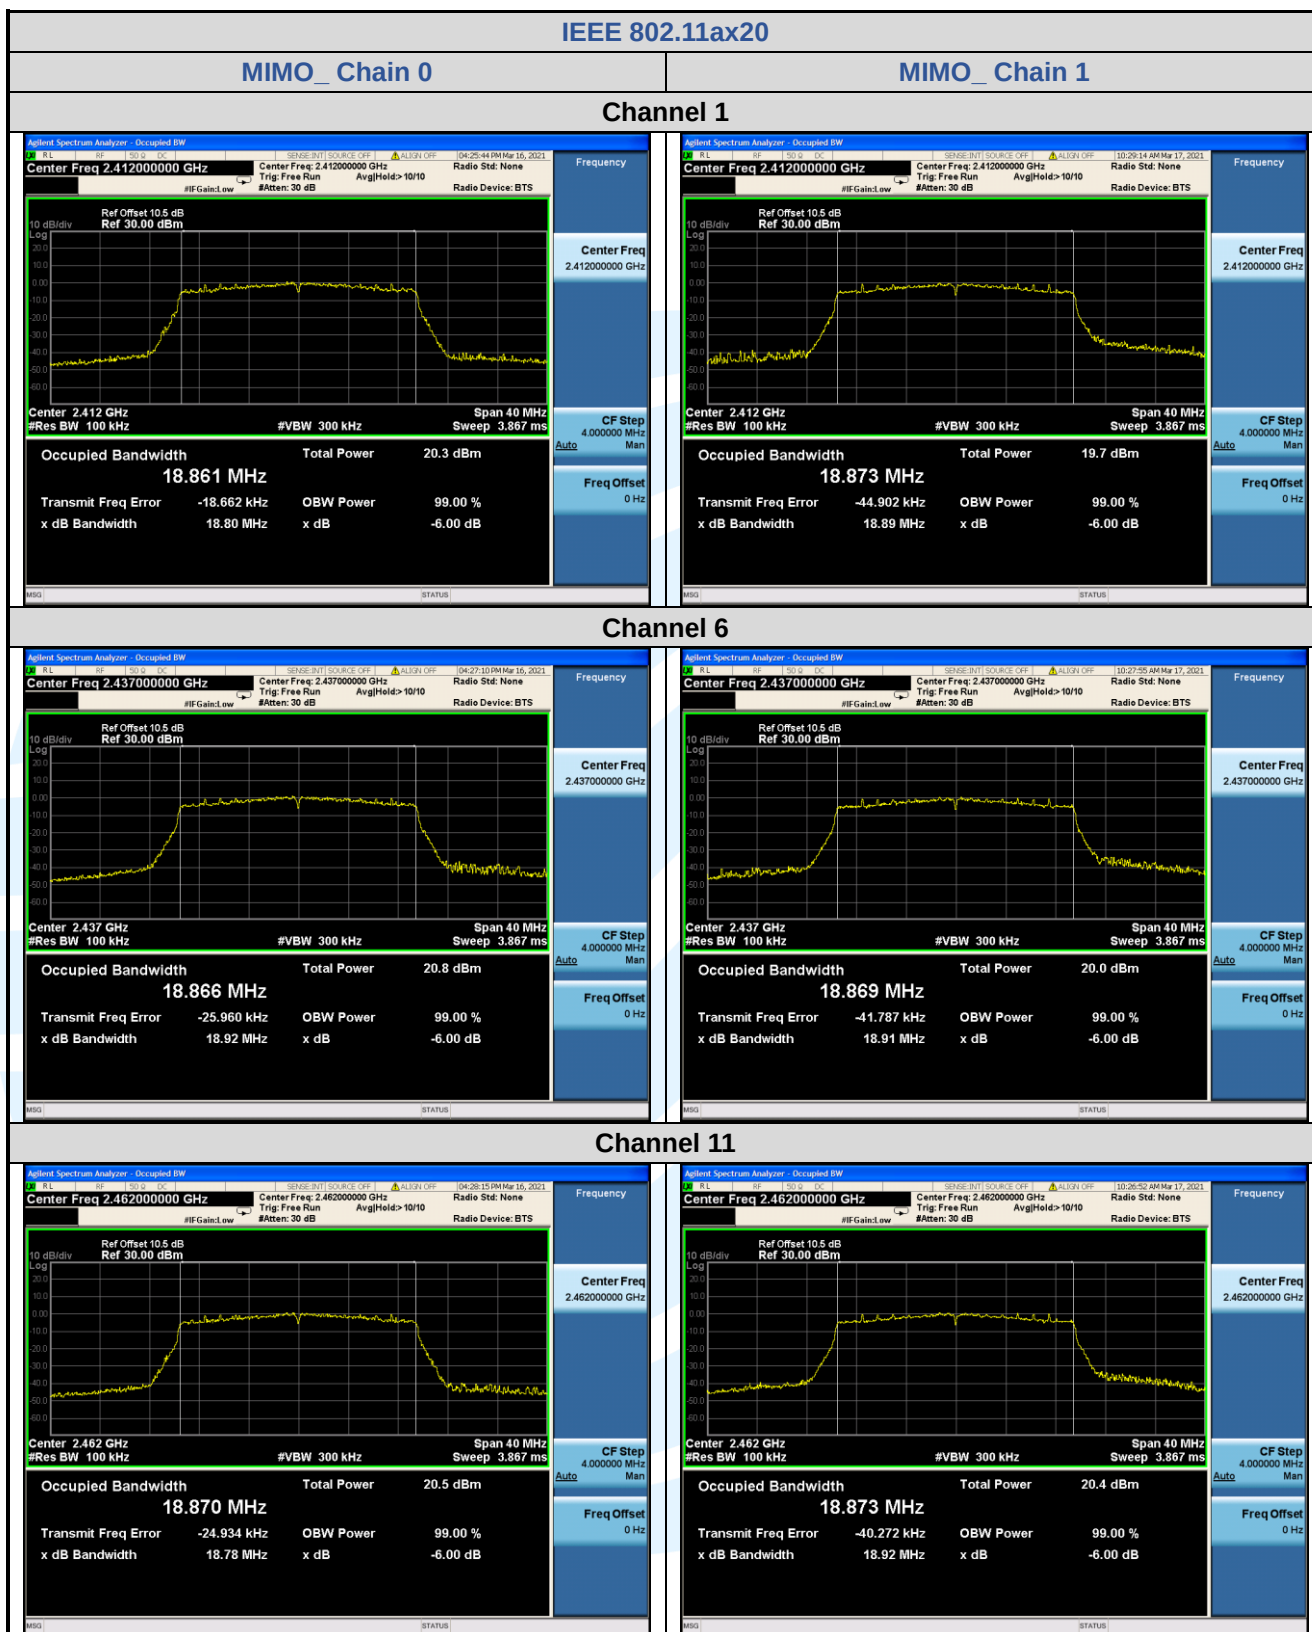



## Occupied Bandwidth

