



REPORT No.: SZ24010106W03

TEST REPORT

APPLICANT : Dongguan SmartAction Technology Co.,Ltd

PRODUCT NAME : High resolution music player

MODEL NAME : HiBy R4

BRAND NAME : HiBy

FCC ID : 2AOBQ-HIBYR4

STANDARD(S) : 47 CFR Part 15 Subpart E

RECEIPT DATE : 2024-01-16

TEST DATE : 2024-01-17 to 2024-02-07

ISSUE DATE : 2024-03-18



Edited by:

Zeng Xiaoying
Zeng Xiaoying (Rapporteur)

Approved by:

Shen Junsheng
Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555

Http://www.morlab.cn

Fax: 86-755-36698525

E-mail: service@morlab.cn





DIRECTORY

1. Summary of Test Result	4
1.1. Testing Applied Standards	5
1.2. Test Equipment List	6
1.3. Measurement Uncertainty	8
1.4. Testing Laboratory	8
2. General Description	9
2.1. Information of Applicant and Manufacturer	9
2.2. Information of EUT	9
2.3. Channel List of EUT	10
2.4. Test Configuration of EUT	11
2.5. Test Conditions	11
2.6. Test Setup Layout Diagram	12
3. Test Results	15
3.1. Antenna Requirement	15
3.2. Duty Cycle of Test Signal	16
3.3. Maximum Conducted Output Power	17
3.4. Emission Bandwidth	19
3.5. Peak Power Spectral Density	21
3.6. Frequency Stability	22
3.7. Conducted Emission	23
3.8. Restricted Frequency Bands	24
3.9. Radiated Emission	26
Annex A Test Data and Result	28



REPORT No.: SZ24010106W03

Change History		
Version	Date	Reason for change
1.0	2024-03-18	First edition



1. Summary of Test Result

No.	Section	Description	Test Date	Test Engineer	Result	Method Determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	ANSI C63.10	Duty Cycle of the Test Signal	Jan. 30, 2024	He Yuyang	PASS	No deviation
3	15.407(a)	Maximum Conducted Output Power	Jan. 30, 2024	He Yuyang	PASS	No deviation
4	15.407(a)(e)	Emission Bandwidth	Jan. 30, 2024	He Yuyang	PASS	No deviation
5	15.407(a)	Peak Power Spectral Density	Jan. 30, 2024	He Yuyang	PASS	No deviation
6	15.407(g)	Frequency Stability	Jan. 30, 2024	He Yuyang	PASS	No deviation
7	15.207	Conducted Emission	Jan. 19, 2024	Wang Deyong	PASS	No deviation
8	15.407(b)	Restricted Frequency Bands	Feb. 07, 2024	Li Hanbin	PASS	No deviation
9	15.407(b)	Radiated Emission	Feb. 07, 2024	Li Hanbin	PASS	No deviation

Note 1: The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.10 2013.

Note 2: These RF tests were performed according to the method of measurements prescribed in KDB789033 D02 v02r01.

Note 3: These RF tests were performed according to the method of measurements prescribed in KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02.

Note 4: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

Note 5: When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.



1.1. Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart E Radio Frequency Devices



1.2. Test Equipment List

1.2.1 Conducted Test Equipment

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2023.02.27	2024.02.26
USB Wideband Power Sensor	MY54180008	U2021XA	Agilent	2023.10.17	2024.10.16
Temperature Chamber	12108015	DTL-003S 101	YOMA	2023.09.19	2024.09.18
RF Cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial Cable	CB02	RF02	Morlab	N/A	N/A
SMA Connector	CN01	RF03	HUBER-SUHNER	N/A	N/A
Attenuator	MTJ6004-10	10dB	MTJ cooperation	N/A	N/A

1.2.2 Conducted Emission Test Equipment

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY56400093	N9038A	KEYSIGHT	2023.02.09	2024.02.08
				2024.01.25	2025.01.24
LISN	8127449	NSLK 8127	Schwarzbeck	2023.02.21	2024.02.20
Pulse Limiter (10dB)	VTSD 9561 F-B #206	VTSD 9561-F	Schwarzbeck	2023.06.27	2024.06.26
RF Coaxial Cable (DC-100MHz)	BNC	MRE04	Qualwave	N/A	N/A

1.2.3 List of Software Used

Description	Manufacturer	Software Version
Test System	MaiWei	2.0.0.0
Morlab EMCR	Morlab	V1.2
TS+ -[JS32-CE]	Tonscend	V2.5.0.0

**1.2.4 Radiated Test Equipment**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY54130016	N9038A	Agilent	2023.06.21	2024.06.20
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2023.07.01	2024.06.30
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2023.06.26	2024.06.25
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2023.07.01	2024.06.30
Test Antenna – Horn	BBHA9170 #773	BBHA9170	Schwarzbeck	2023.07.01	2024.06.30
Preamplifier (10MHz-6GHz)	46732	S10M100L38 02	LUCIX CORP.	2023.06.27	2024.06.26
Preamplifier (2GHz-18GHz)	61171/61172	S020180L32 03	LUCIX CORP.	2023.06.27	2024.06.26
Preamplifier (18GHz-40GHz)	DS77209	DCLNA0118-40C-S	Decentest	2023.07.04	2024.07.03
RF Coaxial Cable (DC-18GHz)	MRE001	PE330	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-18GHz)	MRE002	CLU18	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-18GHz)	MRE003	CLU18	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40-K K-0.5	Qualwave	2023.07.04	2024.07.03
RF Coaxial Cable (DC-40GHz)	22290046	QA360-40-K KF-2	Qualwave	2023.07.04	2024.07.03
RF Coaxial Cable (DC-18GHz)	22120181	QA500-18-N N-5	Qualwave	2023.07.04	2024.07.03
Notch Filter	N/A	WRCG-5150-5350	Wainwright	N/A	N/A
Notch Filter	N/A	WRCG-5725-5850	Wainwright	N/A	N/A
Anechoic Chamber	N/A	9m*6m*6m	CRT	2022.05.10	2025.05.09



1.3. Measurement Uncertainty

Test Items	Uncertainty	Remark
Peak Output Power	$\pm 2.22\text{dB}$	Confidence levels of 95%
Power Spectral Density	$\pm 2.22\text{dB}$	Confidence levels of 95%
Bandwidth	$\pm 5\%$	Confidence levels of 95%
Restricted Frequency Bands	$\pm 5\%$	Confidence levels of 95%
Radiated Emission	$\pm 2.95\text{dB}$	Confidence levels of 95%
Conducted Emission	$\pm 2.44\text{dB}$	Confidence levels of 95%

1.4. Testing Laboratory

Laboratory Name	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone	+86 755 36698555
Facsimile	+86 755 36698525
FCC Designation Number	CN1192
FCC Test Firm Registration Number	226174

2. General Description

2.1. Information of Applicant and Manufacturer

Applicant	Dongguan SmartAction Technology Co.,Ltd
Applicant Address	Room 1201, Lianjing Commercial Building, No.39, Hongwei 3rd Road, Nancheng District, Dongguan, Guangdong, China
Manufacturer	DONGGUAN RHYTHM ELECTRONIC CO., LTD
Manufacturer Address	Room 303, Room 403, Unit 1, No. 313, Guancheng Section, Dongcheng middle Road, Guancheng Street, Dongguan City, Guangdong Province, China

2.2. Information of EUT

Product Name:	High resolution music player	
Sample No.:	1#	
Hardware Version:	1.2	
Software Version:	1.0	
Modulation Technology:	OFDM	
Modulation Mode:	802.11a, 802.11n (HT20), 802.11n (HT40)	
Operating Frequency Range:	5180MHz-5240MHz; 5745MHz-5825MHz	
Antenna Type:	Monopole Antenna	
Antenna Gain:	3.57dBi	
Accessory Information:	Battery	
	Brand Name:	Hiby
	Model No.:	595490
	Serial No.:	N/A
	Capacity:	4500mAh
	Rated Voltage:	3.8V
	Charge Limit:	4.35V
	Manufacturer:	Dongguan Smartaction Technology Co.,Ltd

Note 1: We use the dedicated software to control the EUT continuous transmission.

Note 2: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



2.3.Channel List of EUT

(U-NII-1) 5180MHz-5240MHz				
Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20MHz	36	5180	40	5200
	44	5220	48	5240
40MHz	38	5190	46	5230
(U-NII-3) 5745MHz-5825MHz				
Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20MHz	149	5745	153	5765
	157	5785	161	5805
	165	5825		
40MHz	151	5775	159	5795

Note 1: The black bold channels were selected for test.



2.4. Test Configuration of EUT

2.4.1. Modulation Type and Data Rate of EUT

Mode	Bandwidth (MHz)	Modulation Technology	Modulation Type	Data Rate	RU Size
802.11a	20	OFDM	DBPSK	1/2/5.5/11Mbps	N/A
			DQPSK		
			CCK		
802.11n	20/40 (HT20/40)	OFDM	BPSK	MCS0~MCS7	N/A
			QPSK		
			16QAM		
			64QAM		

Note1: The worst-case mode (bold face) in all data rates has been determined during the pre-scan, only the test data of the worst-case were recorded in this report.


2.5. Test Conditions

Temperature (°C)	15-35
Relative Humidity (%)	30-60
Atmospheric Pressure (kPa)	86-106


2.6. Test Setup Layout Diagram

2.6.1. Conducted Measurement


For power item that BW below 80MHz system:

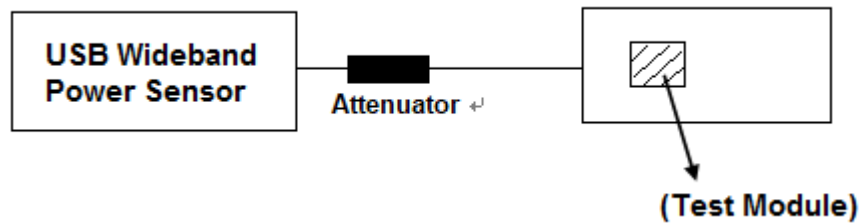

For power item that BW equal or above 80MHz and other items:

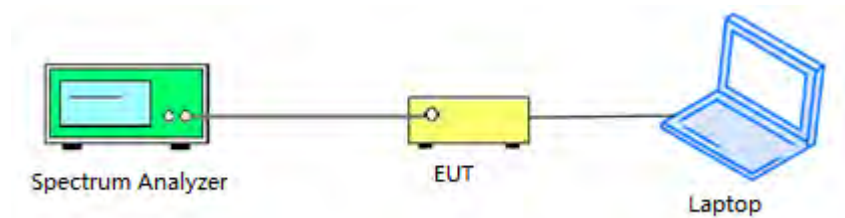


2.6.2. Conducted Emission Measurement

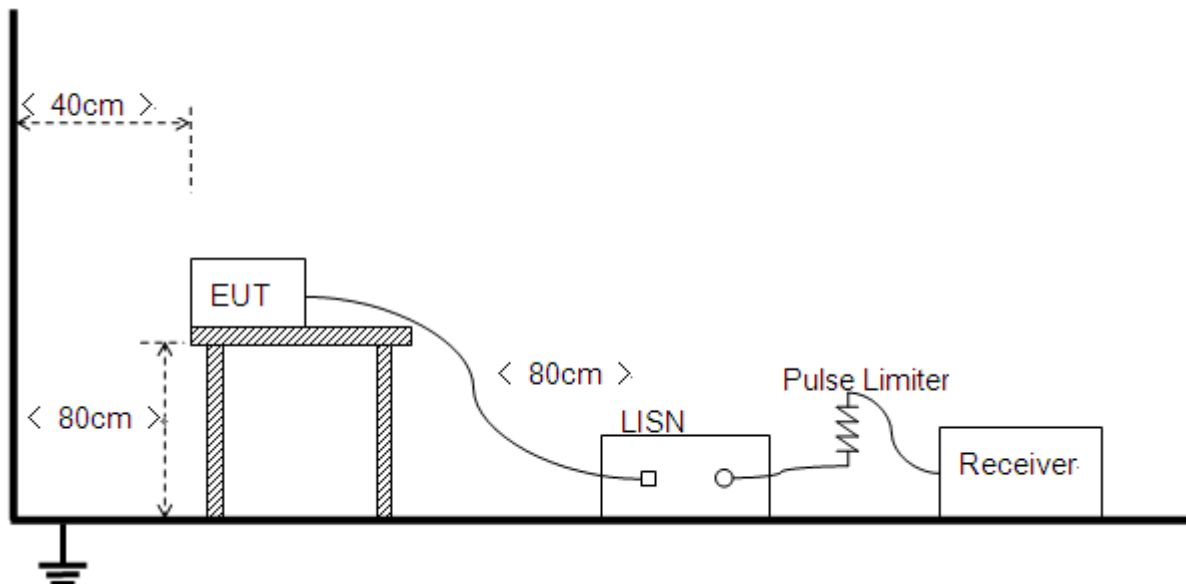


2.6.3.Radiation Measurement


1) For radiated emissions from 9kHz to 30MHz

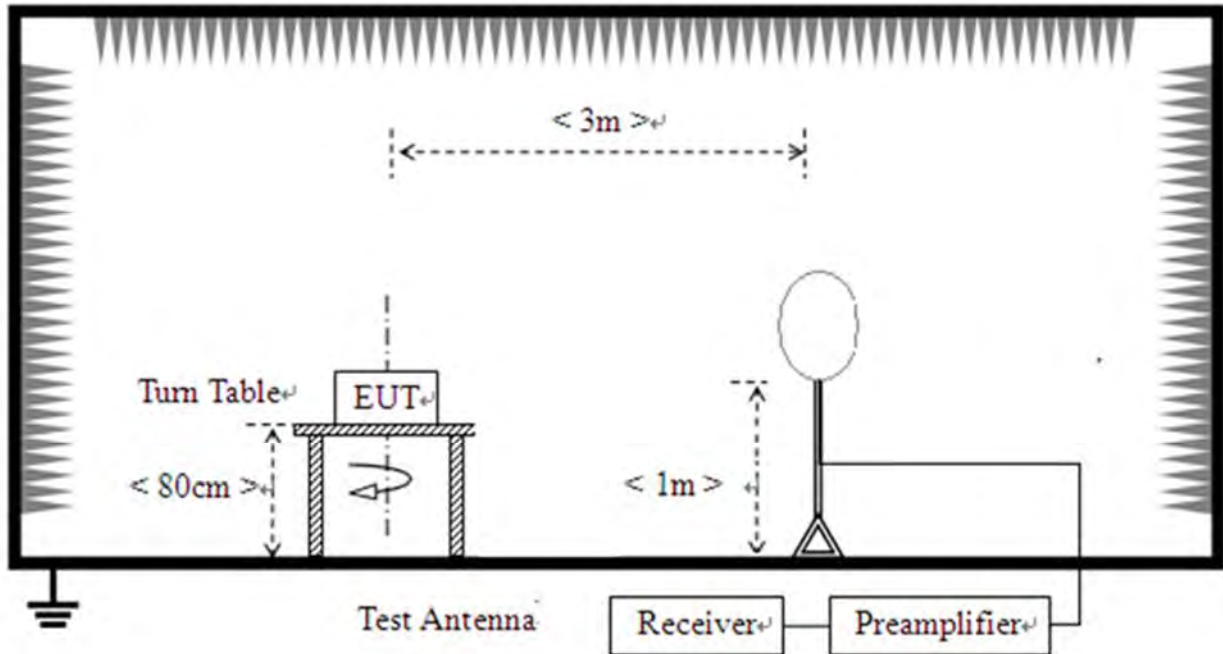

2) For radiated emissions from 30MHz to 1GHz

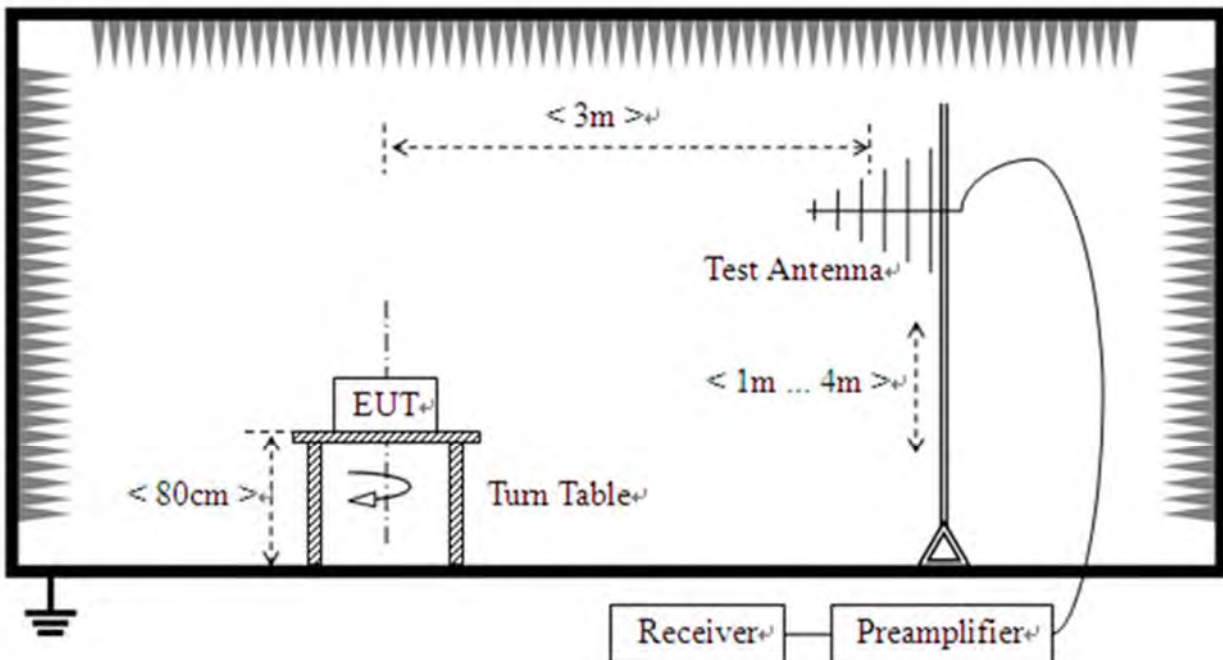

3) For radiated emissions above 1GHz

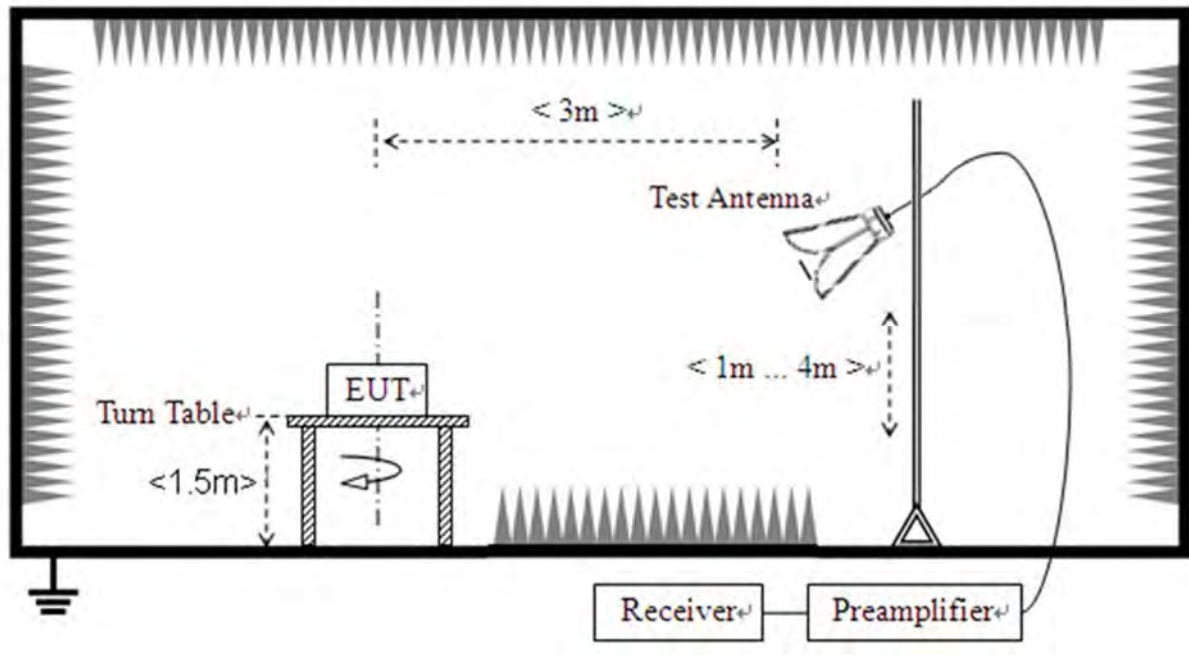



3. Test Results

3.1. Antenna Requirement

3.1.1. Requirement

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.1.2. Test Result

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.



3.2. Duty Cycle of Test Signal

3.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be non constant.

3.2.2. Test Result

Refer to Annex A.1 in this report.

3.3. Maximum Conducted Output Power

3.3.1. Requirement

(1) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(4) According to KDB662911D01 Measure-and-sum technique, the conducted emission level (e.g., transmit power or power in specified bandwidth) is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in units that are directly proportional to power.

(5) According to KDB 662911 D01, the directional gain = $G_{\text{ANT}} + 10\log(N_{\text{ANT}})\text{dBi}$, where G_{ANT} is the antenna gain in dBi, N_{ANT} is the number of outputs.

3.3.2. Test Procedures

Select of test method listed in the ANSI C63.10:

Instrument	Method	Chapter
Spectrum Analyzer	☒ Method SA-1	12.3.2.2
	☐ Method SA-1A(alternative)	12.3.2.3
	☐ Method SA-2	12.3.2.4
	☐ Method SA-2A(alternative)	12.3.2.5
	☐ Method SA-3	12.3.2.6
	☐ Method SA-3A(alternative)	12.3.2.7
Spectrum Analyzer	☐ Method PM	12.3.3.1
	☒ Method PM-G	12.3.3.2

The EUT (Equipment under the test) which is coupled to the USB Wideband Power Sensor; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in USB Wideband Power Sensor.



For ac (VHT80) mode power

The EUT (Equipment under the test) is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.

The internal ref offset of the spectrum analyzer already includes the duty factor.

3.3.3.Test Result

Refer to Annex A.2 in this report.



3.4. Emission Bandwidth

3.4.1. Requirement

For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement. Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

3.4.1. Test Procedures

1. KDB 789033 Section C) 1) Emission Bandwidth was used in order to prove compliance

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. KDB 789033 Section C) 2) minimum emission bandwidth for the band 5.725-5.85GHz was used in order to prove compliance.

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



REPORT No.: SZ24010106W03

3.4.2.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.4.3.Test Result

Refer to Annex A.3 in this report.

3.5. Peak Power Spectral Density

3.5.1. Requirement

(1) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

(3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30dBm in any 500kHz band.

If transmitting antennas of directional gain greater than 6dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(4) According to KDB662911D01 Measure-and-sum technique, the conducted emission level (e.g., transmit power or power in specified bandwidth) is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in units that are directly proportional to power.

(5) According to KDB 662911 D01, the directional gain = $G_{ANT} + 10\log(N_{ANT})$ dBi, where G_{ANT} is the antenna gain in dBi, N_{ANT} is the number of outputs.

3.5.2. Test Procedures

KDB 789033 Section F) Maximum Power Spectral Density (PSD) Method SA-3 was used in order to prove compliance

- 1) Set span to encompass the entire 26-dB emission bandwidth
- 2) Set RBW = 1MHz. Set VBW $\geq$ 3MHz
- 3) Number of points in sweep $\geq$ 2 Span / RBW. Sweep time = auto
- 4) Detector = Average
- 5) Trace mode=Max hold

Record the max value

3.5.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.5.4. Test Result

Refer to Annex A.4 in this report.



3.6. Frequency Stability

3.6.1. Requirement

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

3.6.2. Test Procedures

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between 5°C to 40°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

3.6.3. Test Result

Refer to Annex A.5 in this report.

3.7. Conducted Emission

3.7.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency Range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.7.2. Test Procedures

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

3.7.3. Test Setup Layout

Refer to chapter 2.6.2 in this report.

3.7.4. Test Result

Refer to Annex A.7 in this report.

3.8. Restricted Frequency Bands

3.8.1. Requirement

The peak emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15–5.25 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (2) For transmitters operating in the 5.25–5.35 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (3) For transmitters operating in the 5.47–5.725 GHz band: all emissions outside of the 5.47–5.725 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

The following formula is used to convert the equipment isotropic radiated power(e.i.r.p.) to field strength (dBμV/m);

$$E = 1000000 \times \sqrt{30P} / 3 \mu\text{V/m}$$

where P is the EIRP in Watts

Therefore: -27 dBm/MHz = 68.23 dBuV/m



Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).

3.8.2.Test Procedures

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

KDB 789033 Section H) 3)5)6(d)) was used in order to prove compliance

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

3.8.3.Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.8.4.Test Result

Refer to Annex A.8 in this report.

3.9. Radiated Emission

3.9.1. Requirement

The peak emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15–5.25 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (2) For transmitters operating in the 5.25–5.35 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (3) For transmitters operating in the 5.47–5.725 GHz band: all emissions outside of the 5.47–5.725 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

The following formula is used to convert the equipment isotropic radiated power(e.i.r.p.) to field strength (dBμV/m);

$$E = 1000000 \times \sqrt{30P} / 3 \mu\text{V/m}$$

where P is the EIRP in Watts

Therefore: -27 dBm/MHz = 68.23 dBuV/m

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3



For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).

3.9.2.Test Procedures

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

3.9.3.Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.9.4.Test Result

Refer to Annex A.9 in this report.




Annex A Test Data and Result

A.1. Duty Cycle of Test Signal


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5180	Ant1	98.07	0.08	0.49
NVNT	a	5220	Ant1	98.54	0.06	0.49
NVNT	a	5240	Ant1	98.07	0.08	0.49
NVNT	a	5745	Ant1	98.07	0.08	0.49
NVNT	a	5785	Ant1	98.54	0.06	0.49
NVNT	a	5825	Ant1	98.07	0.08	0.49
NVNT	n20	5180	Ant1	97.92	0.09	0.53
NVNT	n20	5220	Ant1	98.44	0.07	0.53
NVNT	n20	5240	Ant1	98.44	0.07	0.53
NVNT	n20	5745	Ant1	97.92	0.09	0.53
NVNT	n20	5785	Ant1	97.93	0.09	0.53
NVNT	n20	5825	Ant1	97.92	0.09	0.53
NVNT	n40	5190	Ant1	95.88	0.18	1.08
NVNT	n40	5230	Ant1	95.83	0.18	1.09
NVNT	n40	5755	Ant1	96.88	0.14	1.08
NVNT	n40	5795	Ant1	95.88	0.18	1.08

Test Graphs


Duty Cycle NVNT a 5180MHz Ant1

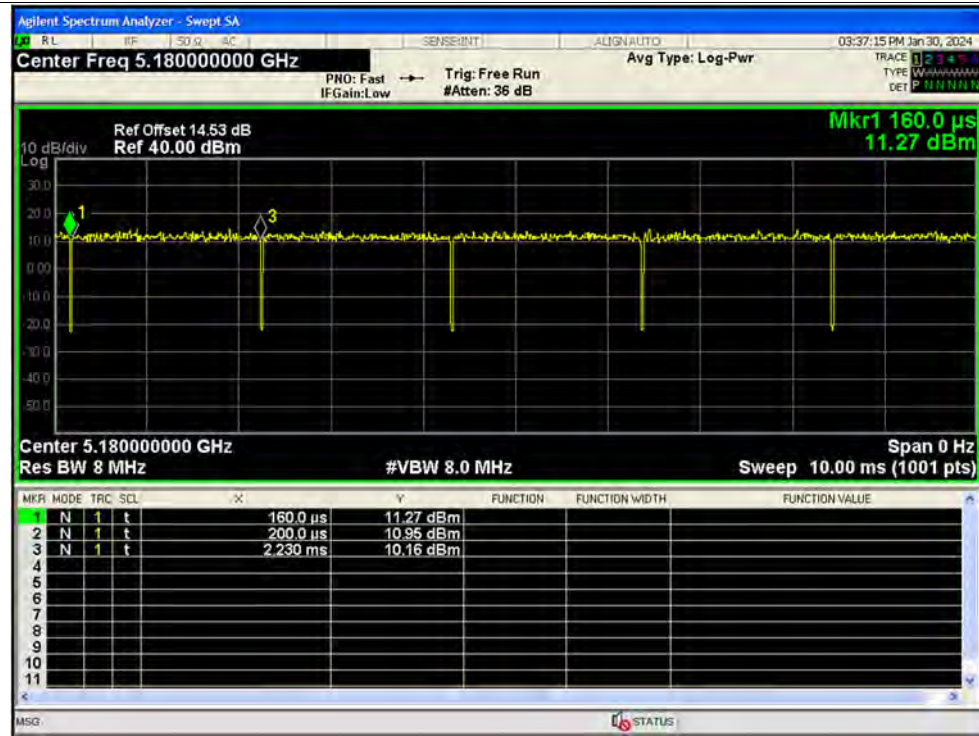


Duty Cycle NVNT a 5220MHz Ant1

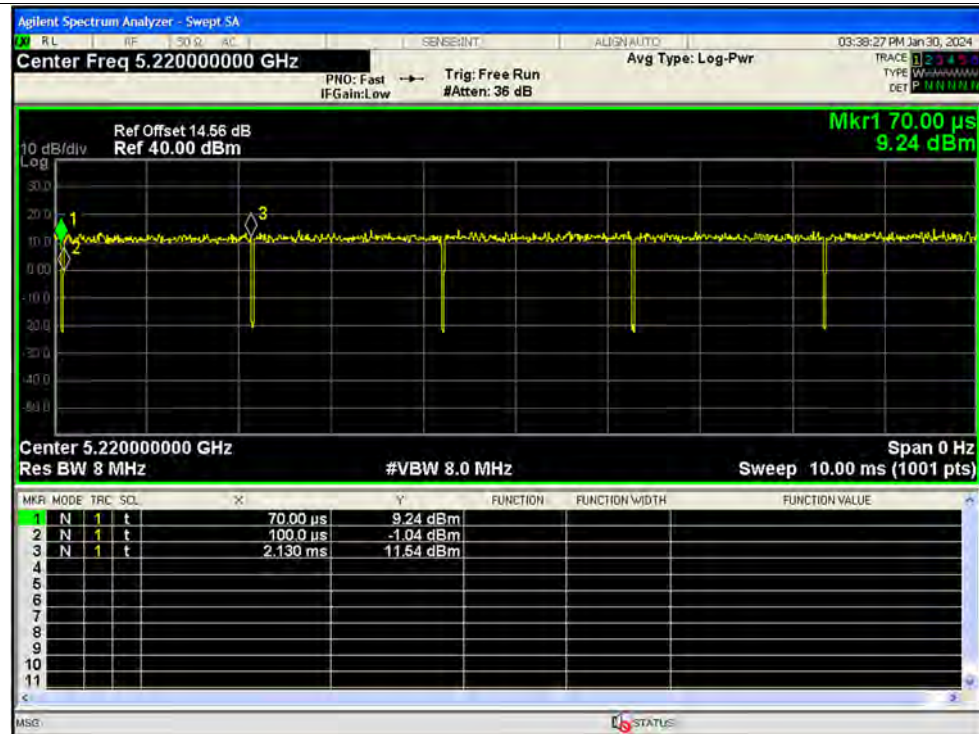

Duty Cycle NVNT a 5240MHz Ant1

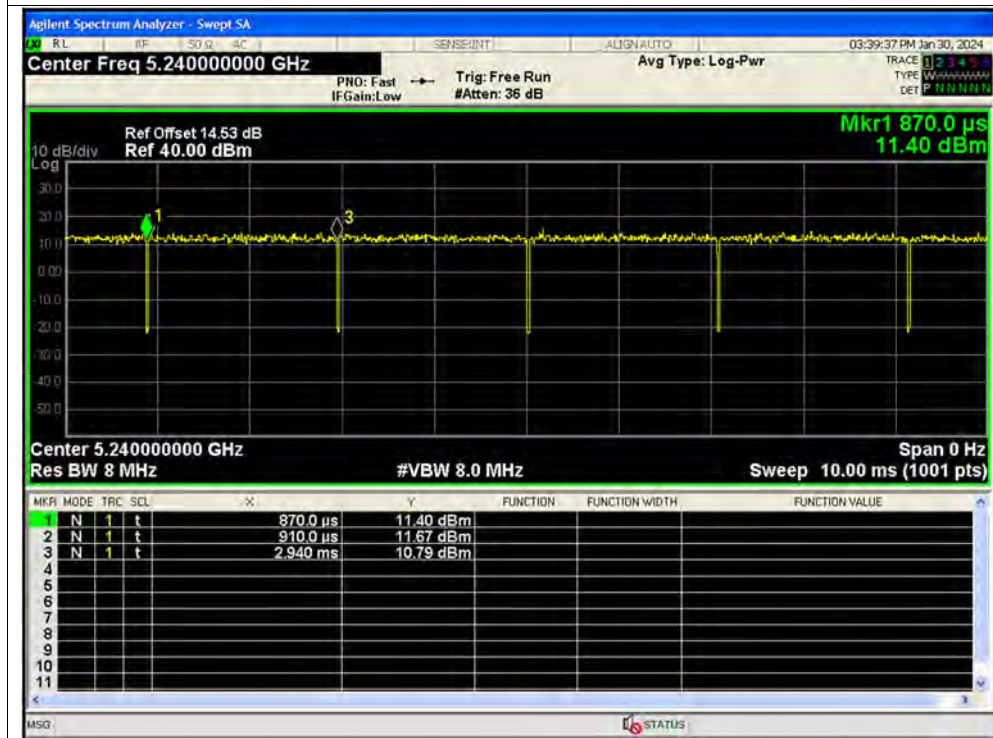


Duty Cycle NVNT a 5745MHz Ant1

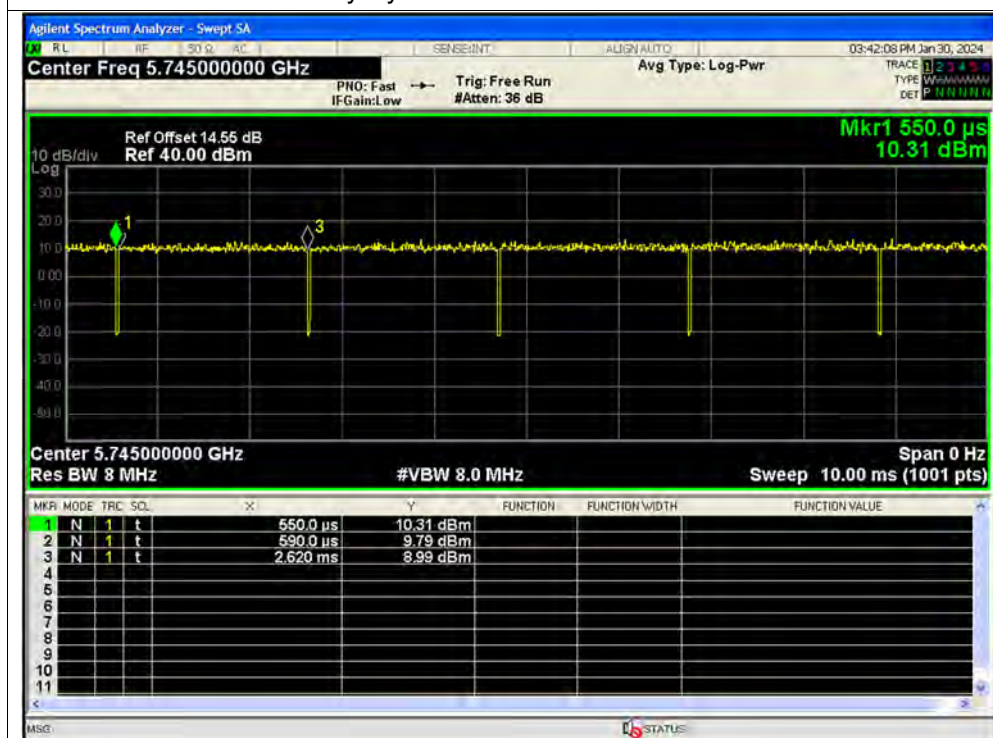




Duty Cycle NVNT a 5785MHz Ant1

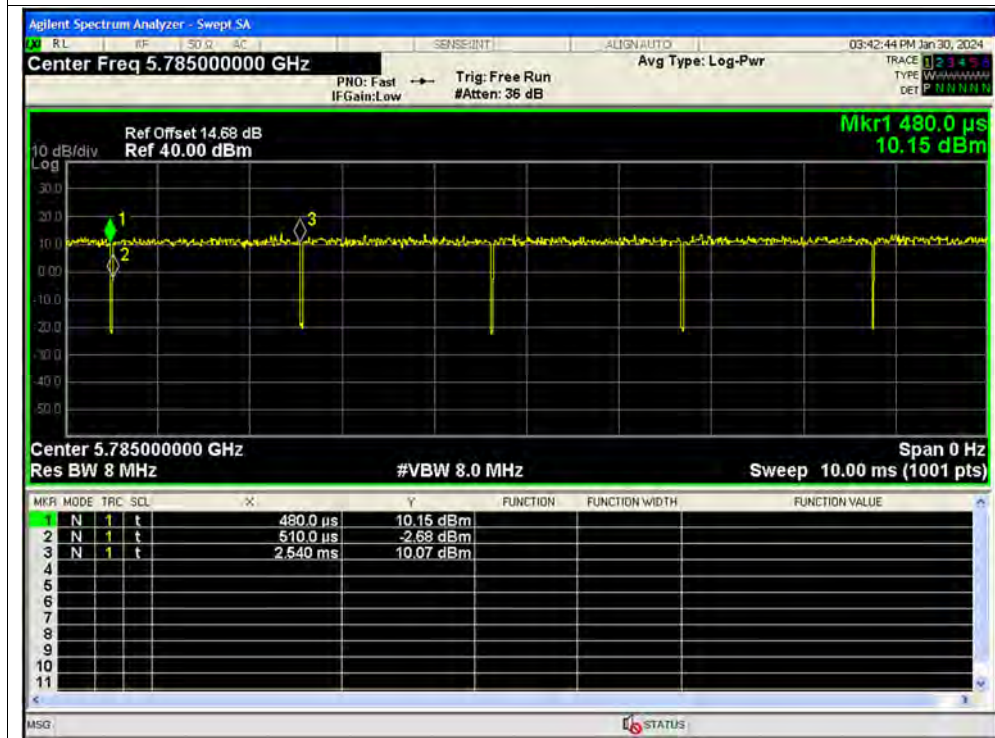


Duty Cycle NVNT a 5825MHz Ant1

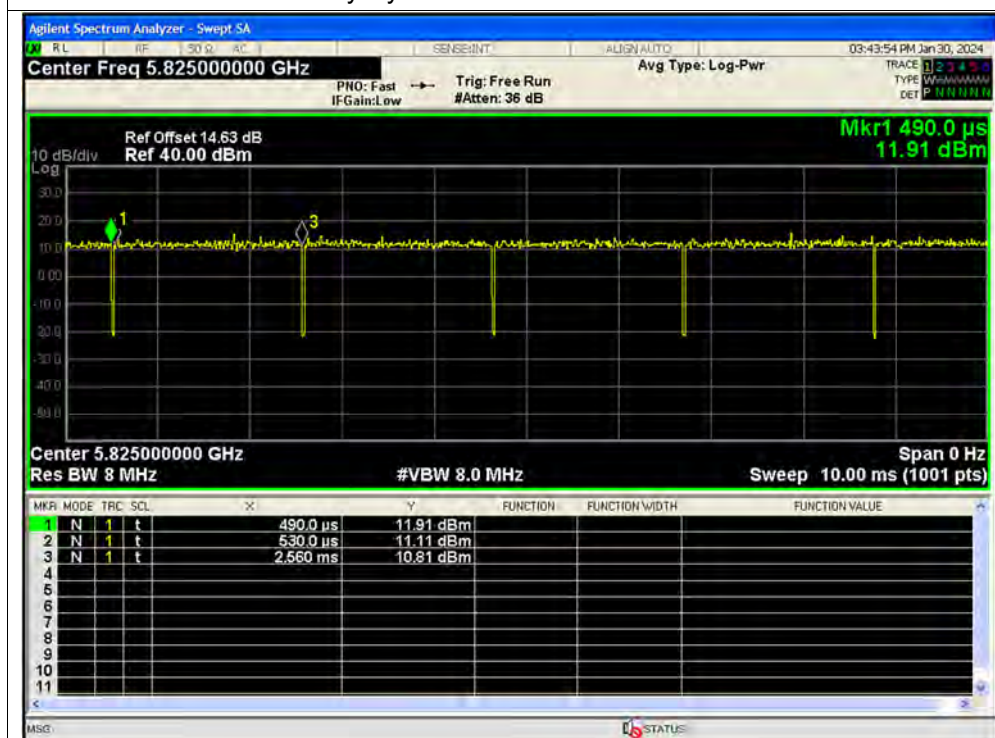




Duty Cycle NVNT n20 5180MHz Ant1

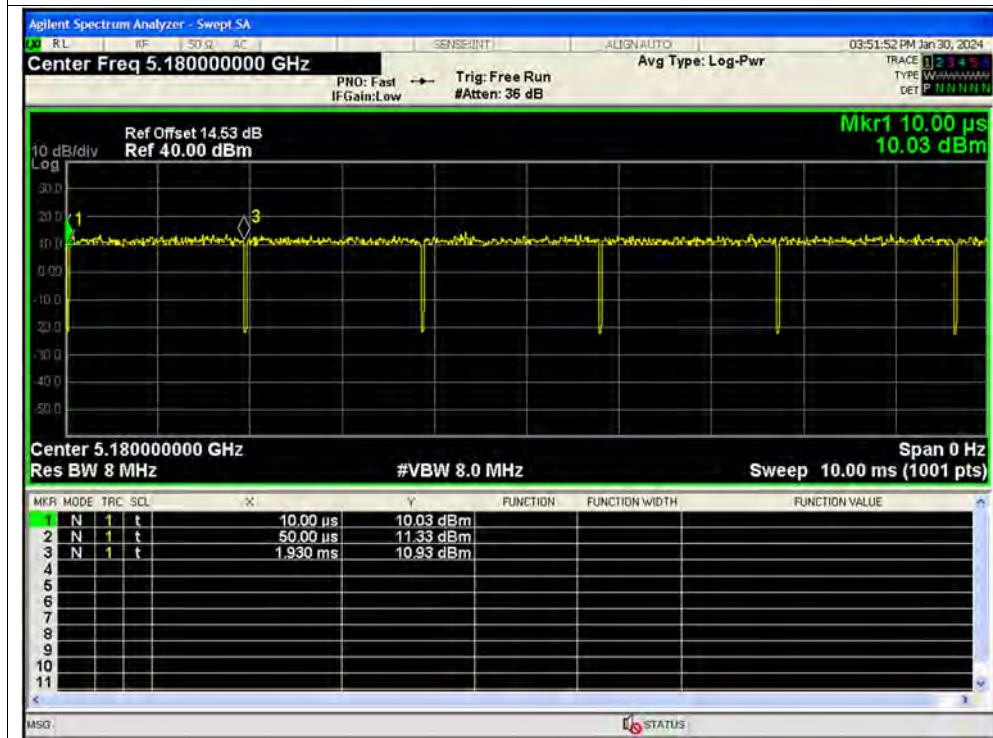


Duty Cycle NVNT n20 5220MHz Ant1

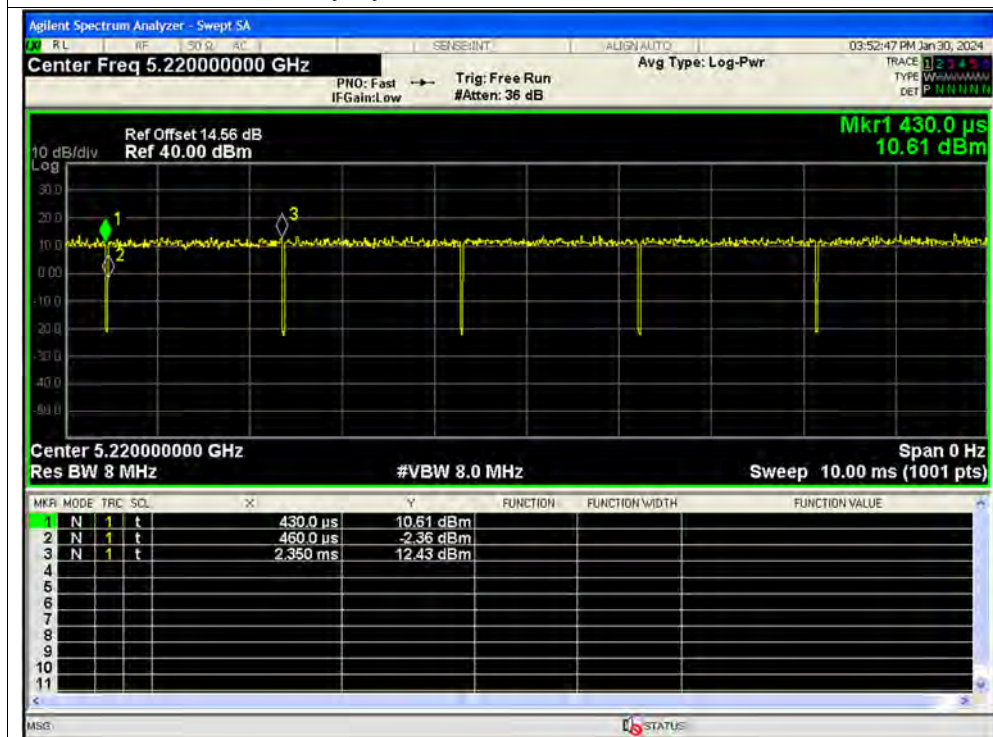





Duty Cycle NVNT n20 5240MHz Ant1

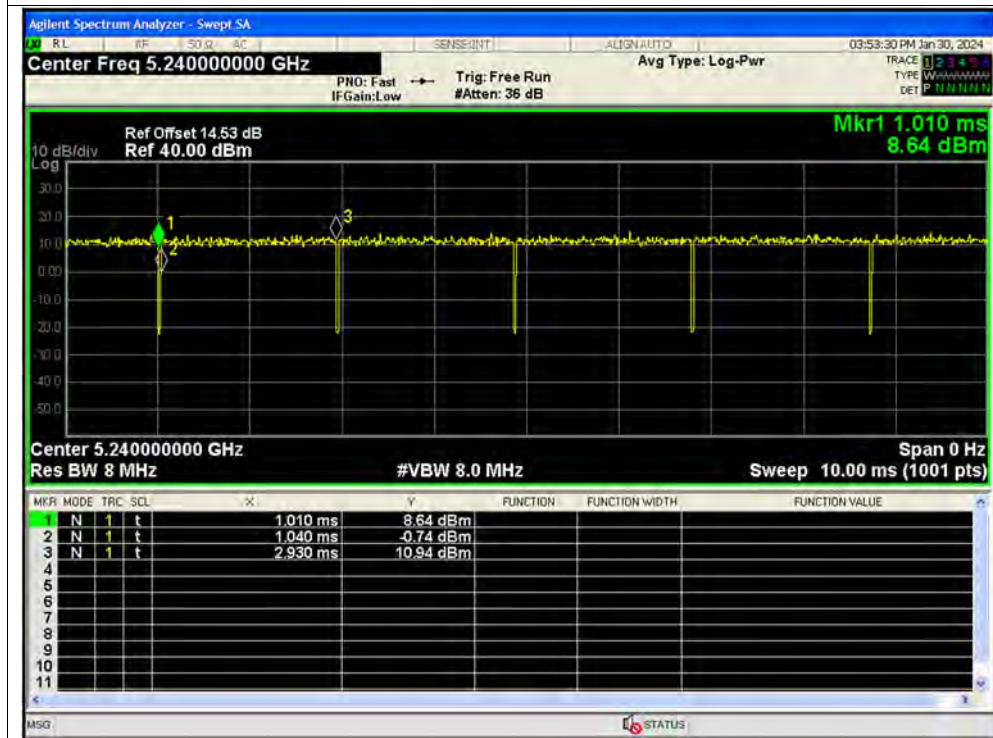


Duty Cycle NVNT n20 5745MHz Ant1

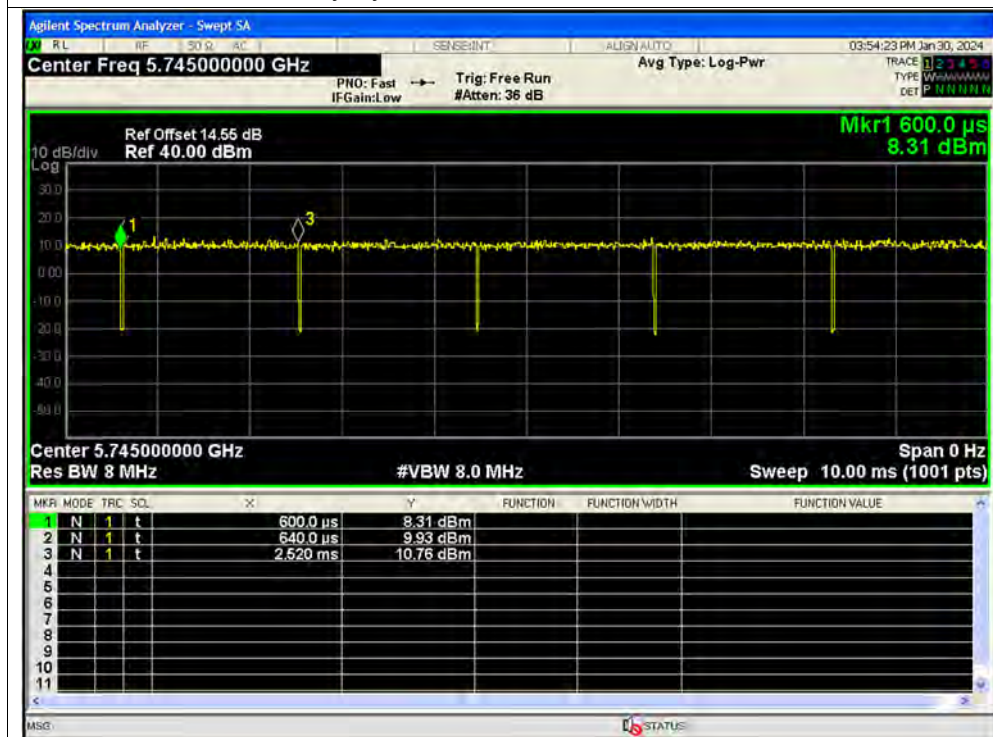


Duty Cycle NVNT n20 5785MHz Ant1

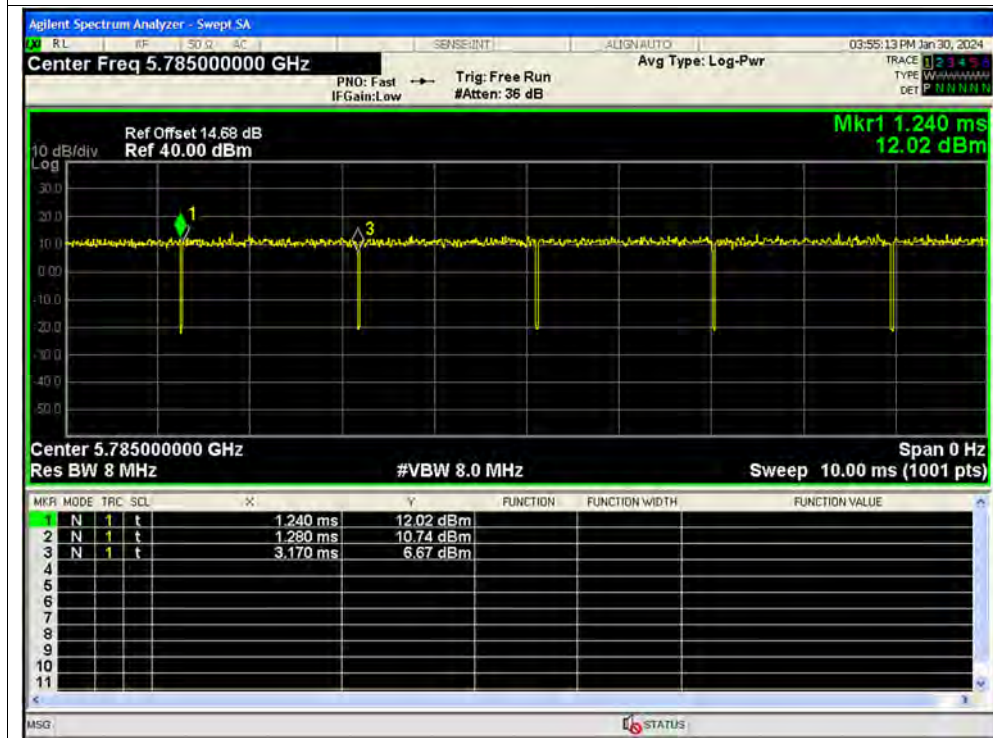


Duty Cycle NVNT n20 5825MHz Ant1

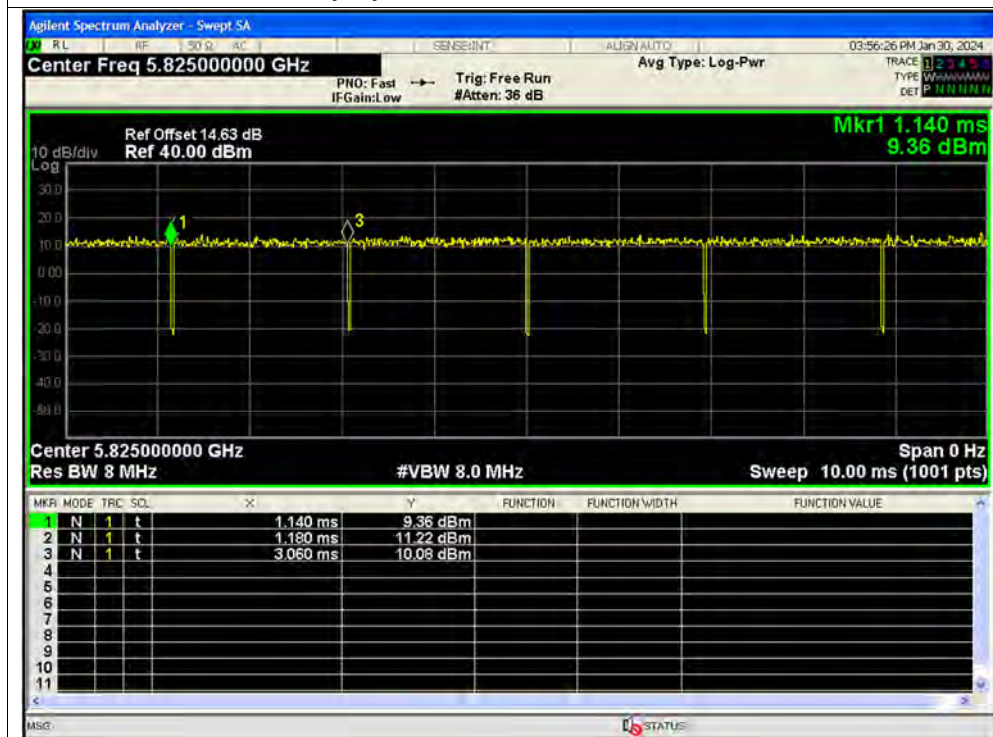

Duty Cycle NVNT n40 5190MHz Ant1

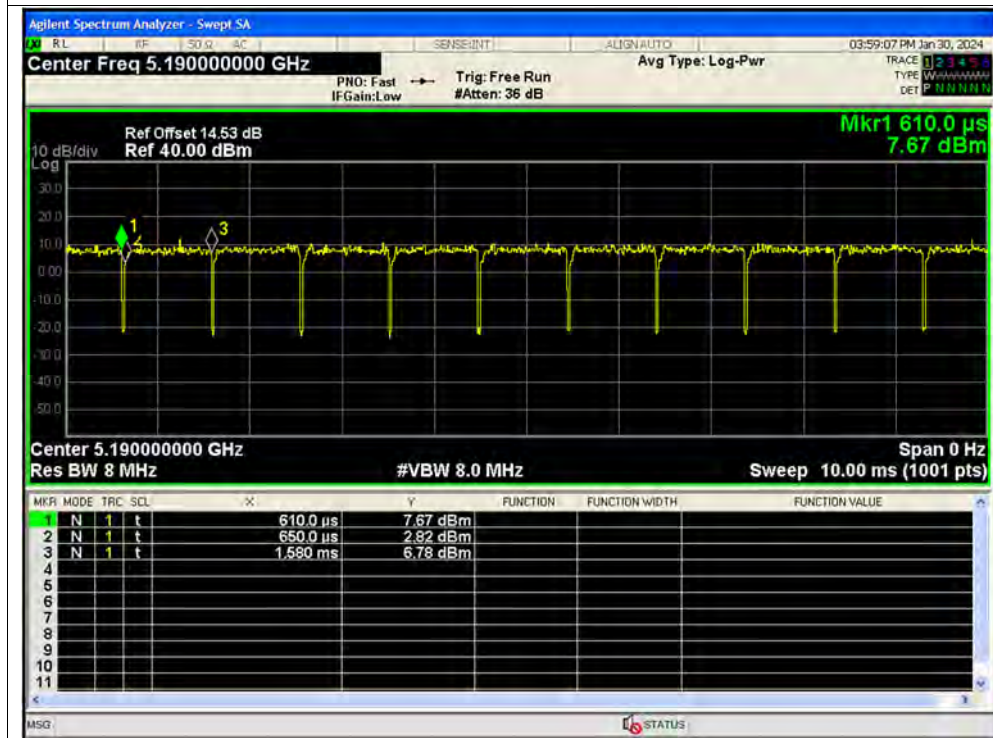


Duty Cycle NVNT n40 5230MHz Ant1

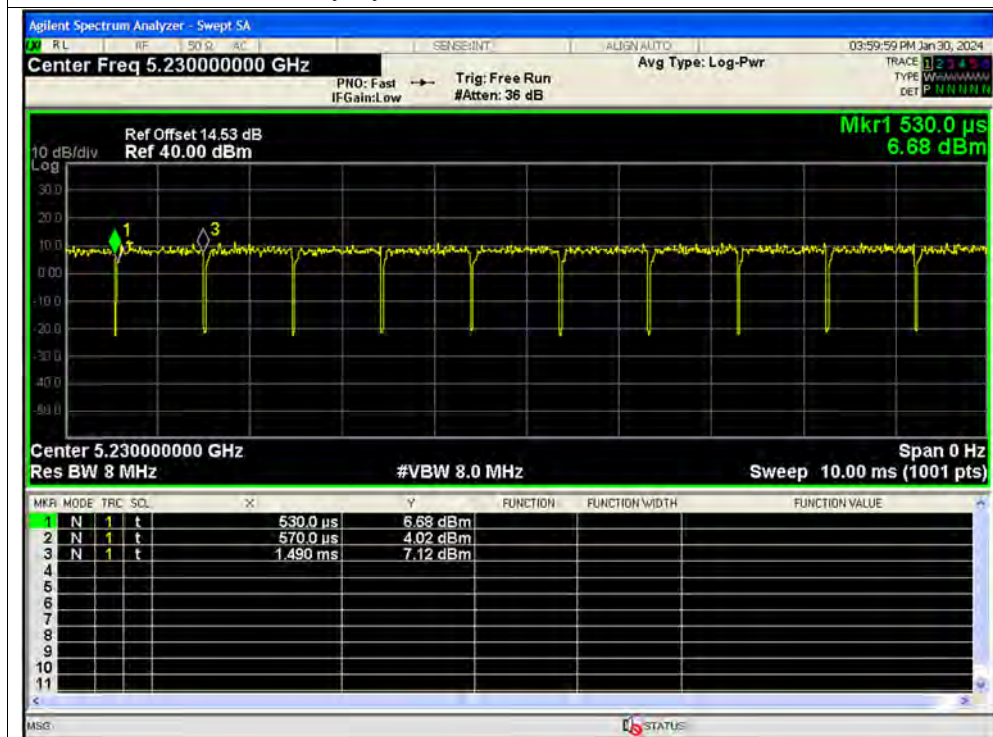




Duty Cycle NVNT n40 5755MHz Ant1

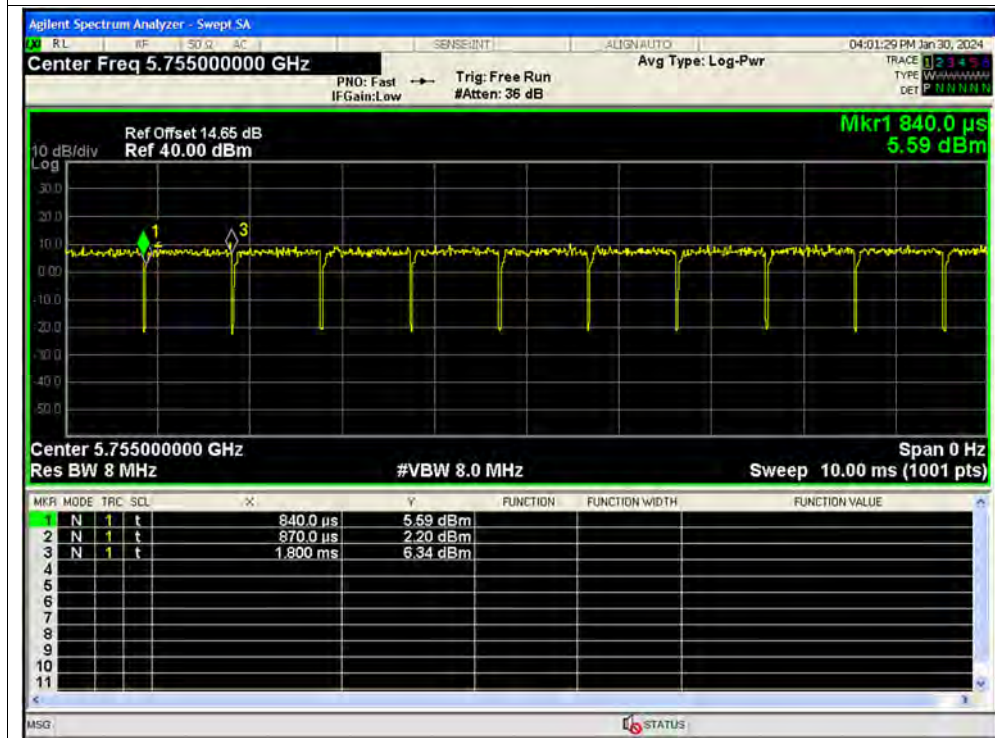

Duty Cycle NVNT n40 5795MHz Ant1

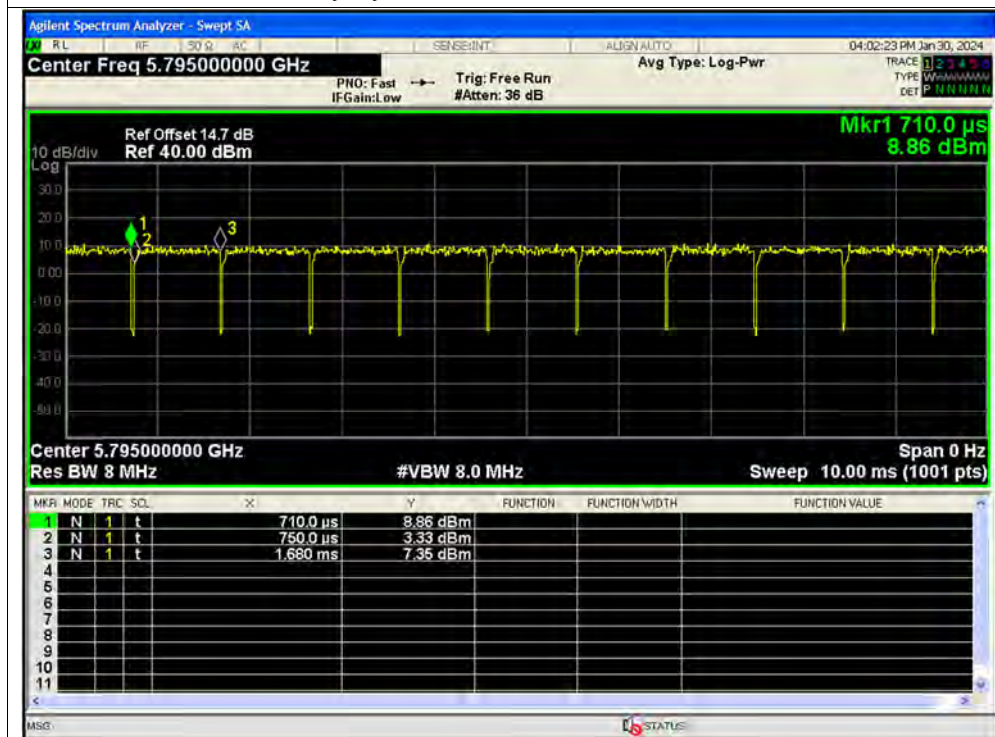

**A.2. Maximum Conducted Output Power**

Condition	Mode	Frequency (MHz)	Antenna	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted(dBm)	Verdict
NVNT	a	5180	Ant1	7.34	0.00542	24	Pass
NVNT	a	5220	Ant1	7.61	0.00577	24	Pass
NVNT	a	5240	Ant1	7.38	0.00547	24	Pass
NVNT	a	5745	Ant1	6.78	0.00476	30	Pass
NVNT	a	5785	Ant1	7.15	0.00519	30	Pass
NVNT	a	5825	Ant1	7.67	0.00585	30	Pass
NVNT	n20	5180	Ant1	7.00	0.00501	24	Pass
NVNT	n20	5220	Ant1	7.41	0.00551	24	Pass
NVNT	n20	5240	Ant1	7.14	0.00518	24	Pass
NVNT	n20	5745	Ant1	6.65	0.00462	30	Pass
NVNT	n20	5785	Ant1	6.99	0.00500	30	Pass
NVNT	n20	5825	Ant1	7.52	0.00565	30	Pass
NVNT	n40	5190	Ant1	7.09	0.00512	24	Pass
NVNT	n40	5230	Ant1	7.23	0.00528	24	Pass
NVNT	n40	5755	Ant1	6.65	0.00462	30	Pass
NVNT	n40	5795	Ant1	6.66	0.00463	30	Pass

**A.3. Emission Bandwidth**

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant1	23.095	Pass
NVNT	a	5220	Ant1	22.820	Pass
NVNT	a	5240	Ant1	22.985	Pass
NVNT	n20	5180	Ant1	24.523	Pass
NVNT	n20	5220	Ant1	23.973	Pass
NVNT	n20	5240	Ant1	24.365	Pass
NVNT	n40	5190	Ant1	41.573	Pass
NVNT	n40	5230	Ant1	41.411	Pass




REPORT No.: SZ24010106W03

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	Ant1	15.656	0.5	Pass
NVNT	a	5785	Ant1	15.919	0.5	Pass
NVNT	a	5825	Ant1	16.316	0.5	Pass
NVNT	n20	5745	Ant1	15.826	0.5	Pass
NVNT	n20	5785	Ant1	17.001	0.5	Pass
NVNT	n20	5825	Ant1	15.064	0.5	Pass
NVNT	n40	5755	Ant1	35.114	0.5	Pass
NVNT	n40	5795	Ant1	35.313	0.5	Pass

Test Graphs


-26dB Bandwidth NVNT a 5180MHz Ant1

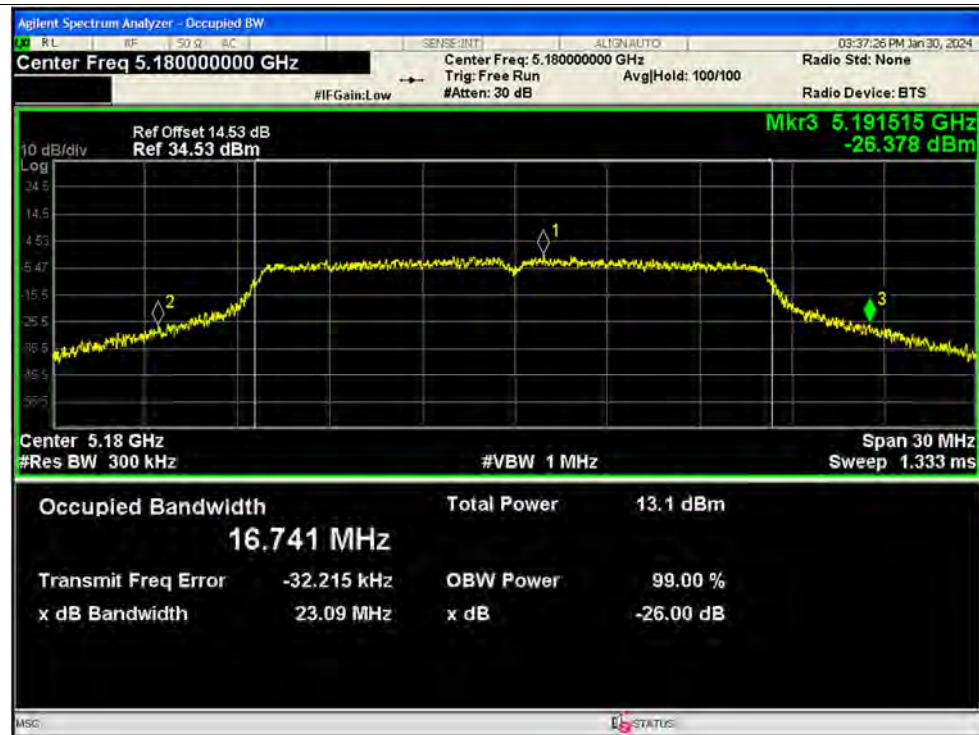

-26dB Bandwidth NVNT a 5220MHz Ant1



-26dB Bandwidth NVNT a 5240MHz Ant1

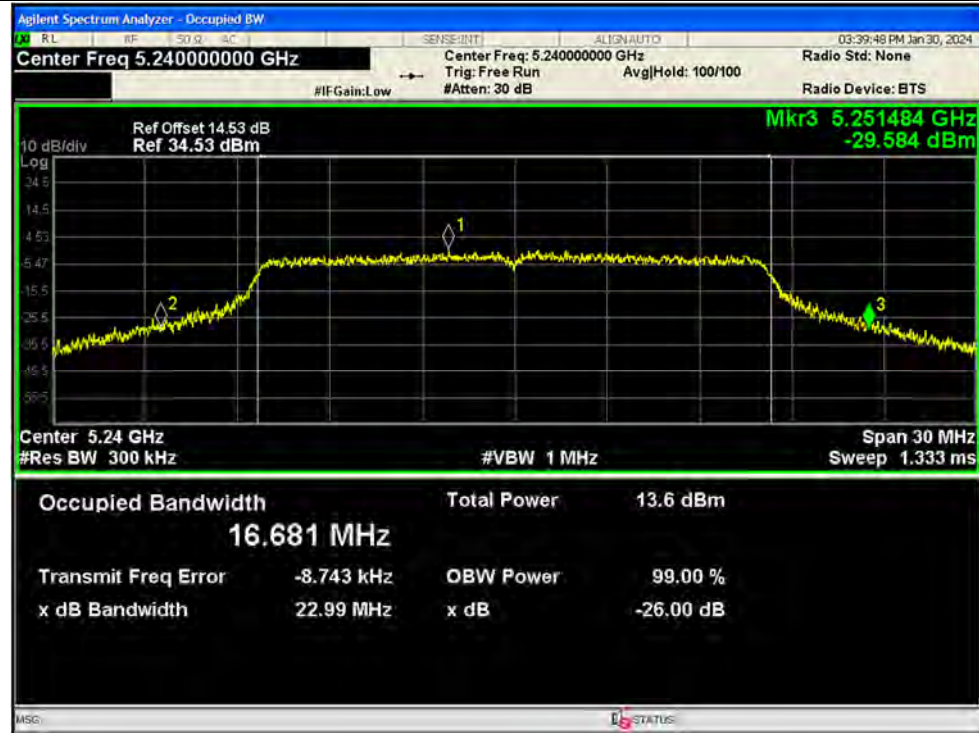

-26dB Bandwidth NVNT n20 5180MHz Ant1




-26dB Bandwidth NVNT n20 5220MHz Ant1



-26dB Bandwidth NVNT n20 5240MHz Ant1



-26dB Bandwidth NVNT n40 5190MHz Ant1

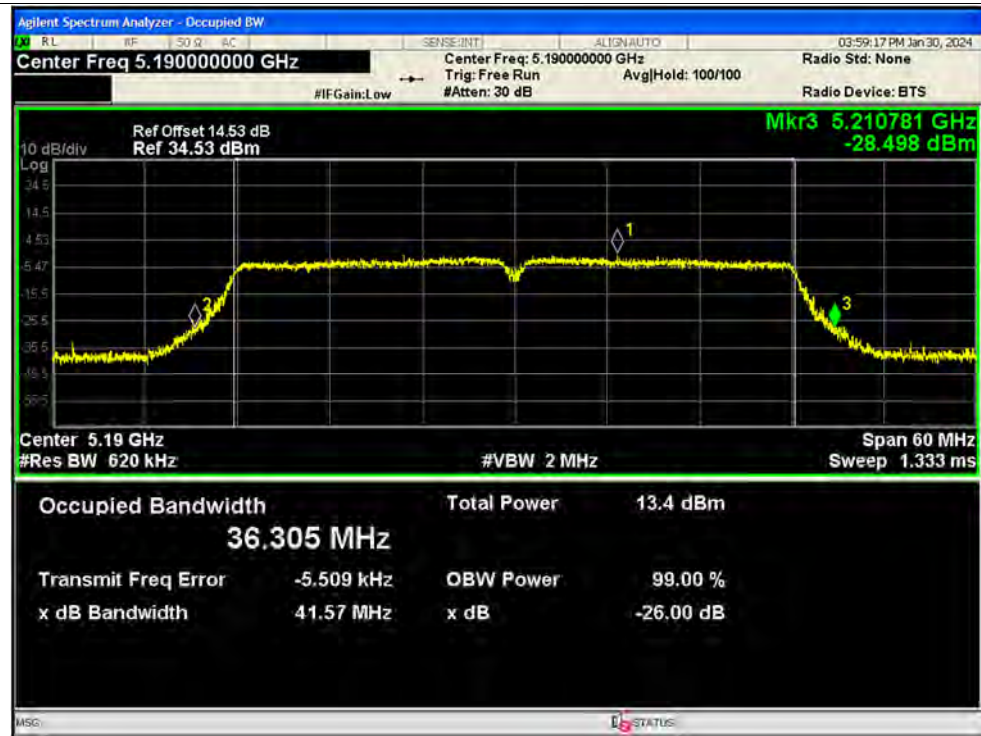


-26dB Bandwidth NVNT n40 5230MHz Ant1




Test Graphs


-6dB Bandwidth NVNT a 5745MHz Ant1

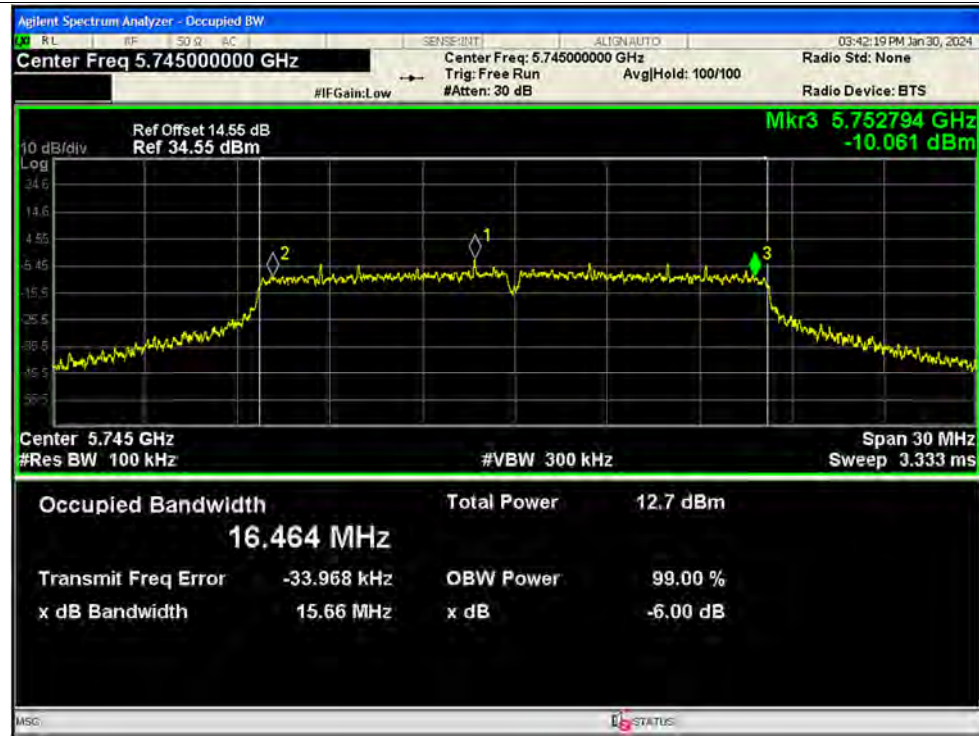


-6dB Bandwidth NVNT a 5785MHz Ant1

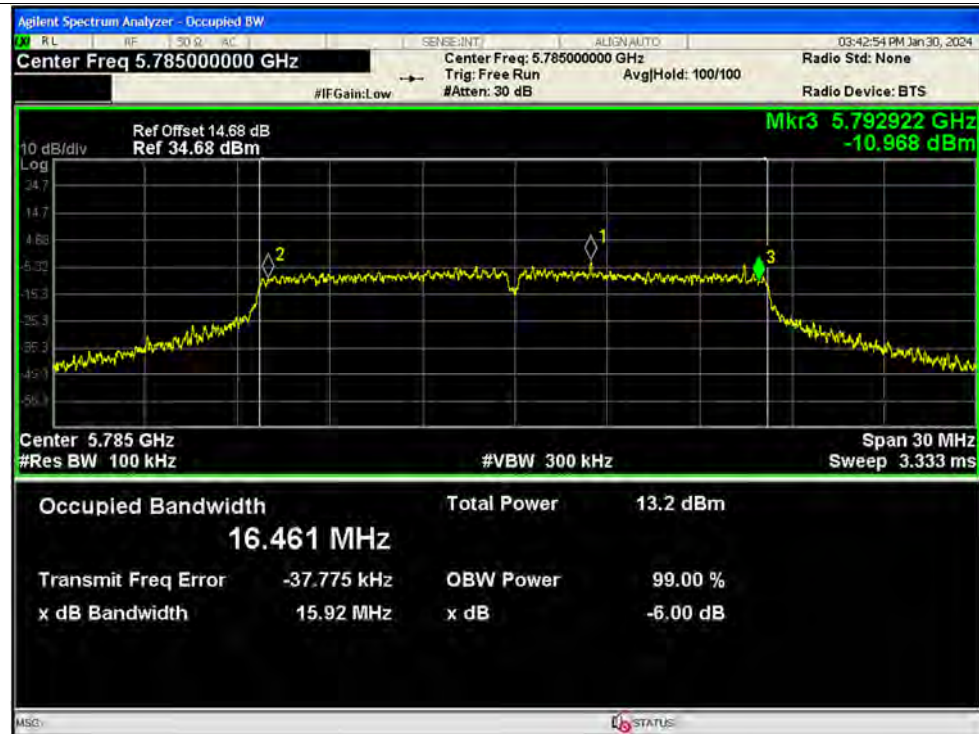

-6dB Bandwidth NVNT a 5825MHz Ant1

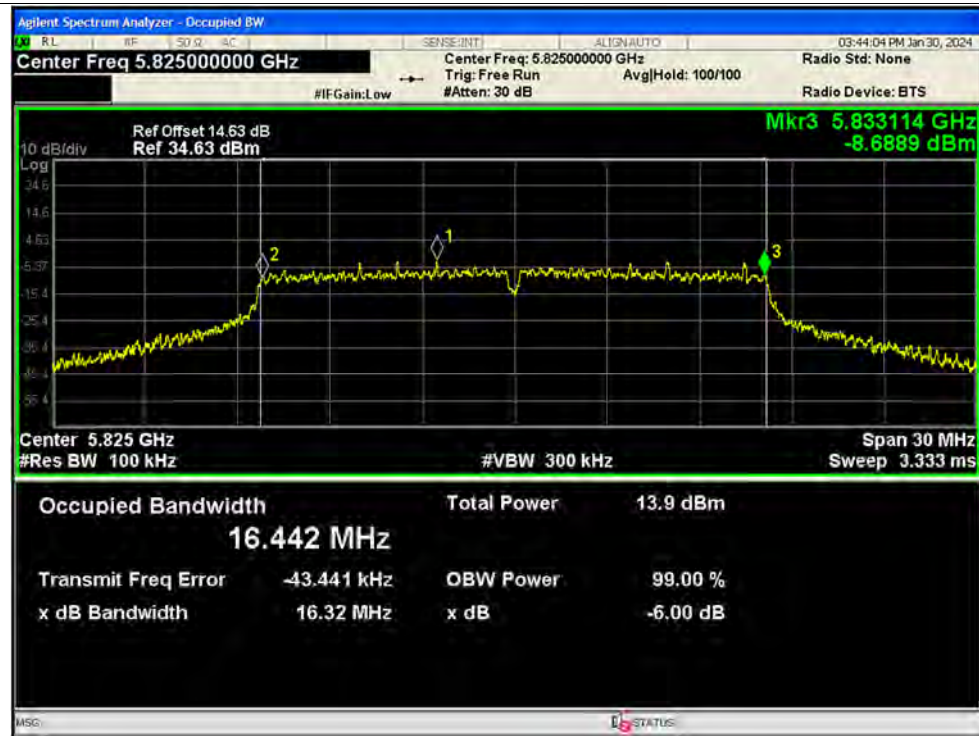


-6dB Bandwidth NVNT n20 5745MHz Ant1

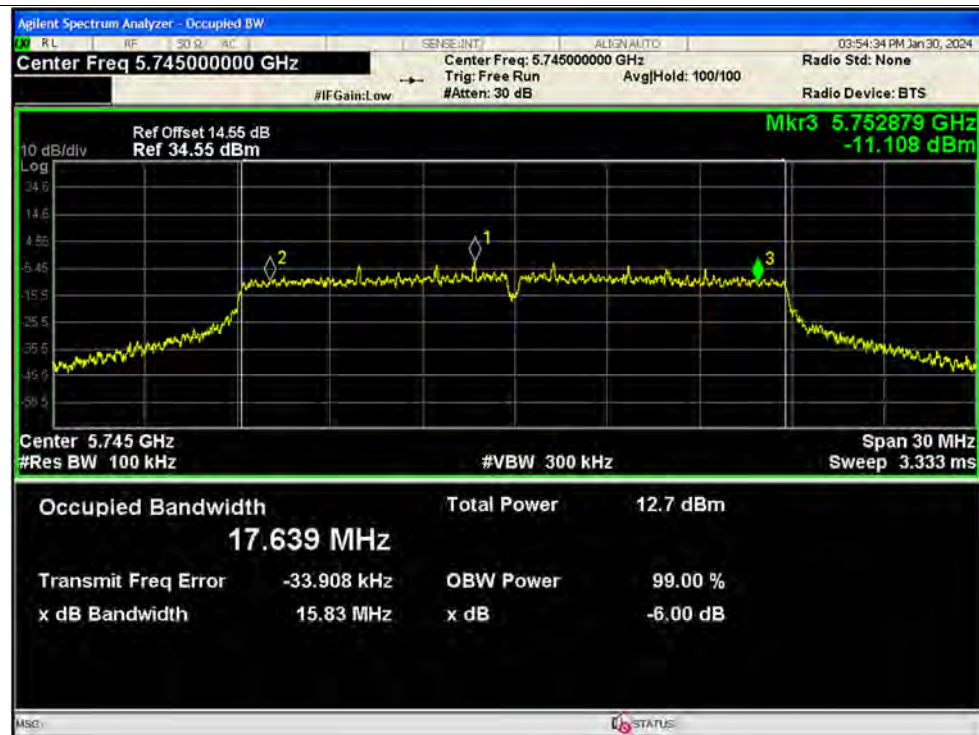





-6dB Bandwidth NVNT n20 5785MHz Ant1

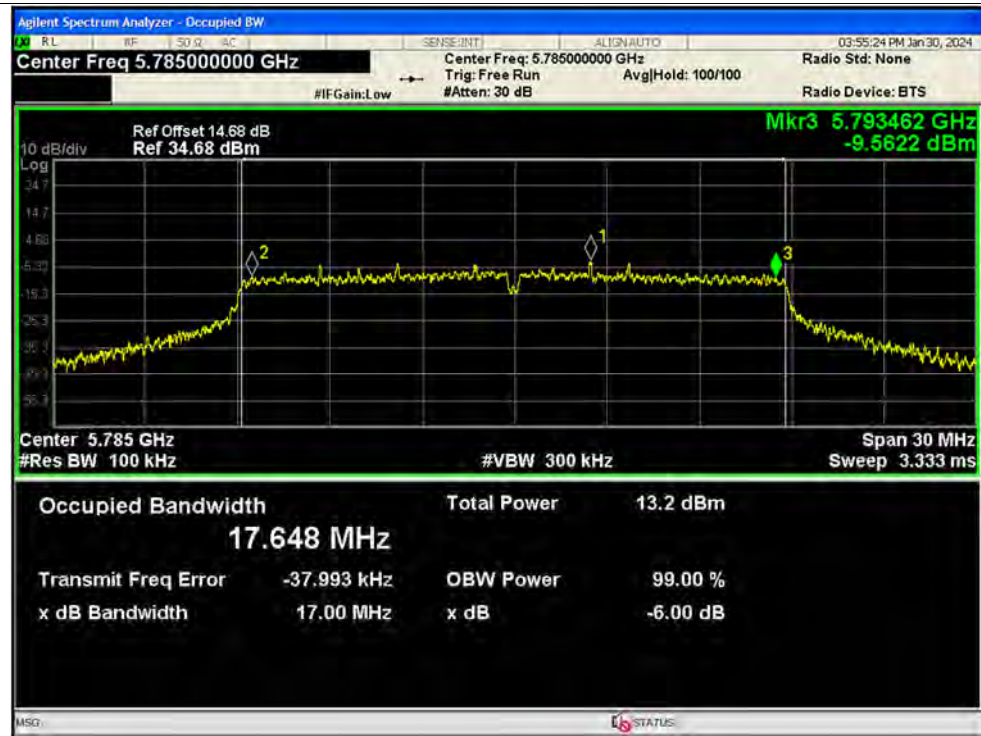


-6dB Bandwidth NVNT n20 5825MHz Ant1

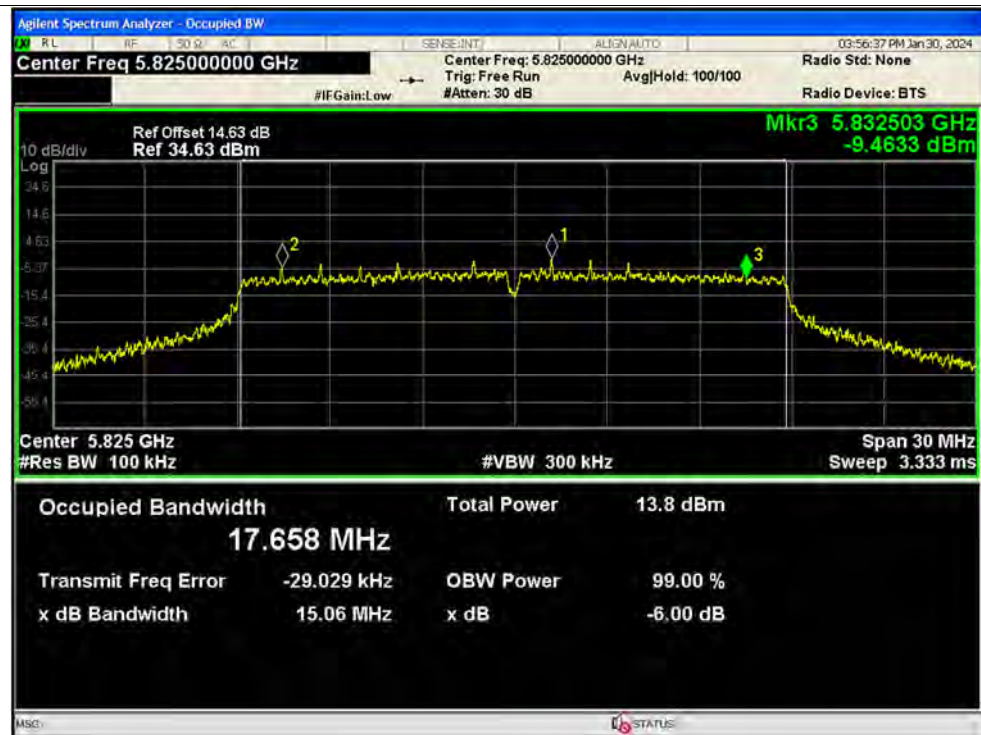

-6dB Bandwidth NVNT n40 5755MHz Ant1

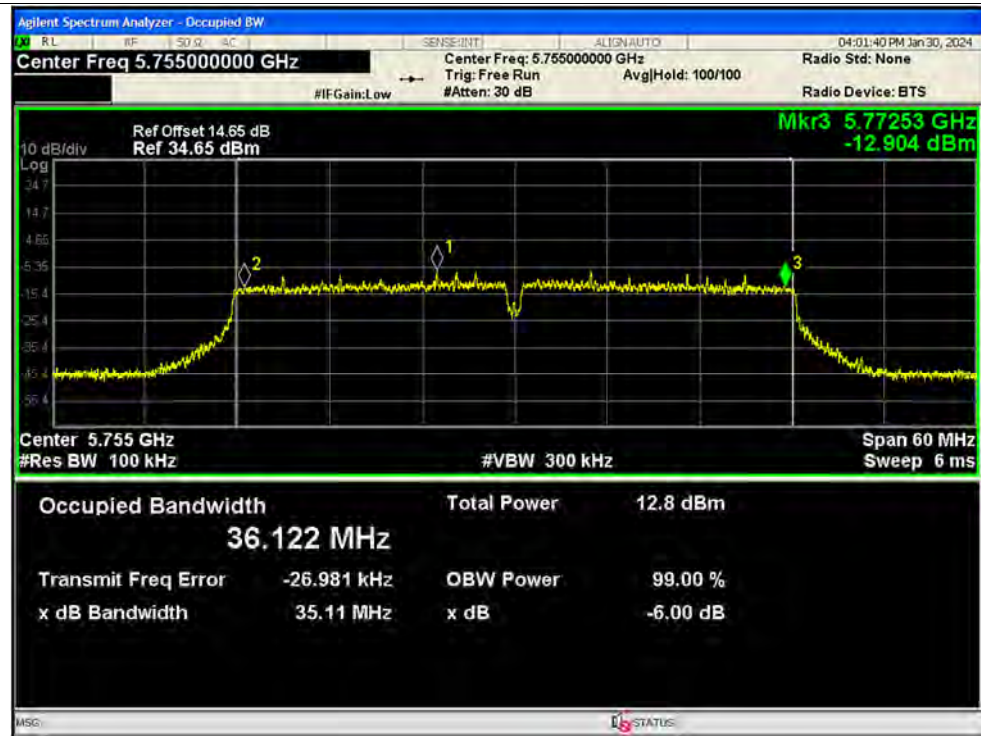

-6dB Bandwidth NVNT n40 5795MHz Ant1

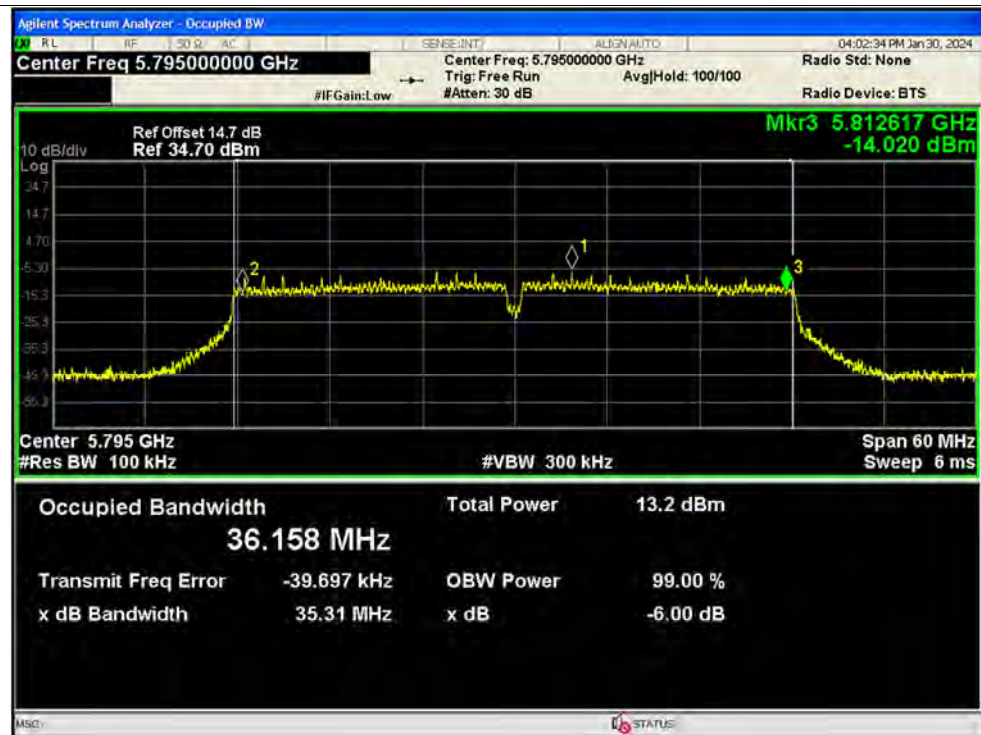

**A.4. Peak Power Spectral Density**

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	-3.38	0.08	-3.3	11	Pass
NVNT	a	5220	Ant1	-2.90	0.06	-2.84	11	Pass
NVNT	a	5240	Ant1	-2.86	0.08	-2.78	11	Pass
NVNT	a	5745	Ant1	-6.71	0.08	-6.63	30	Pass
NVNT	a	5785	Ant1	-6.18	0.06	-6.12	30	Pass
NVNT	a	5825	Ant1	-5.53	0.08	-5.45	30	Pass
NVNT	n20	5180	Ant1	-3.80	0.09	-3.71	11	Pass
NVNT	n20	5220	Ant1	-3.37	0.07	-3.30	11	Pass
NVNT	n20	5240	Ant1	-3.43	0.07	-3.36	11	Pass
NVNT	n20	5745	Ant1	-7.03	0.09	-6.94	30	Pass
NVNT	n20	5785	Ant1	-6.44	0.09	-6.35	30	Pass
NVNT	n20	5825	Ant1	-5.96	0.09	-5.87	30	Pass
NVNT	n40	5190	Ant1	-6.69	0.18	-6.51	11	Pass
NVNT	n40	5230	Ant1	-6.36	0.18	-6.18	11	Pass
NVNT	n40	5755	Ant1	-10.02	0.14	-9.88	30	Pass
NVNT	n40	5795	Ant1	-9.84	0.18	-9.66	30	Pass

Test Graphs

PSD NVNT a 5180MHz Ant1



PSD NVNT a 5220MHz Ant1



PSD NVNT a 5240MHz Ant1



PSD NVNT a 5745MHz Ant1



PSD NVNT a 5785MHz Ant1



PSD NVNT a 5825MHz Ant1



PSD NVNT n20 5180MHz Ant1



PSD NVNT n20 5220MHz Ant1



PSD NVNT n20 5240MHz Ant1



PSD NVNT n20 5745MHz Ant1



PSD NVNT n20 5785MHz Ant1



PSD NVNT n20 5825MHz Ant1



PSD NVNT n40 5190MHz Ant1



PSD NVNT n40 5230MHz Ant1



PSD NVNT n40 5755MHz Ant1



PSD NVNT n40 5795MHz Ant1



**A.5. Frequency Stability**

Condition	Mode	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
20C 3.5V	Carrier	5180	Ant1	5179.954	-46000	-8.88	25	Pass
20C 3.8V	Carrier	5180	Ant1	5179.954	-46000	-8.88	25	Pass
20C 4.35V	Carrier	5180	Ant1	5179.954	-46000	-8.88	25	Pass
-20C 3.8V	Carrier	5180	Ant1	5179.954	-46000	-8.88	25	Pass
-10C 3.8V	Carrier	5180	Ant1	5179.954	-46000	-8.88	25	Pass
0C 3.8V	Carrier	5180	Ant1	5179.954	-46000	-8.88	25	Pass
10C 3.8V	Carrier	5180	Ant1	5179.954	-46000	-8.88	25	Pass
30C 3.8V	Carrier	5180	Ant1	5179.954	-46000	-8.88	25	Pass
40C 3.8V	Carrier	5180	Ant1	5179.954	-46000	-8.88	25	Pass
20C 3.5V	Carrier	5745	Ant1	5744.949	-51000	-8.88	25	Pass
20C 3.8V	Carrier	5745	Ant1	5744.949	-51000	-8.88	25	Pass
20C 4.35V	Carrier	5745	Ant1	5744.949	-51000	-8.88	25	Pass
-20C 3.8V	Carrier	5745	Ant1	5744.949	-51000	-8.88	25	Pass
-10C 3.8V	Carrier	5745	Ant1	5744.949	-51000	-8.88	25	Pass
0C 3.8V	Carrier	5745	Ant1	5744.949	-51000	-8.88	25	Pass
10C 3.8V	Carrier	5745	Ant1	5744.949	-51000	-8.88	25	Pass
30C 3.8V	Carrier	5745	Ant1	5744.949	-51000	-8.88	25	Pass
40C 3.8V	Carrier	5745	Ant1	5744.949	-51000	-8.88	25	Pass



A.6. Conducted Emission

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Set RBW=9kHz, VBW=30kHz. Refer to recorded points and plots below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test Setup:

Test Mode: EUT+PC+PC Adapter+ WIFI TX

Test voltage: AC 120V/60Hz


The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V]} = U_R + L_{\text{Cable loss}} \text{ [dB]} + A_{\text{Factor}}$$

U_R : Receiver Reading


A_{Factor} : Voltage division factor of LISN

B. Test Plot:

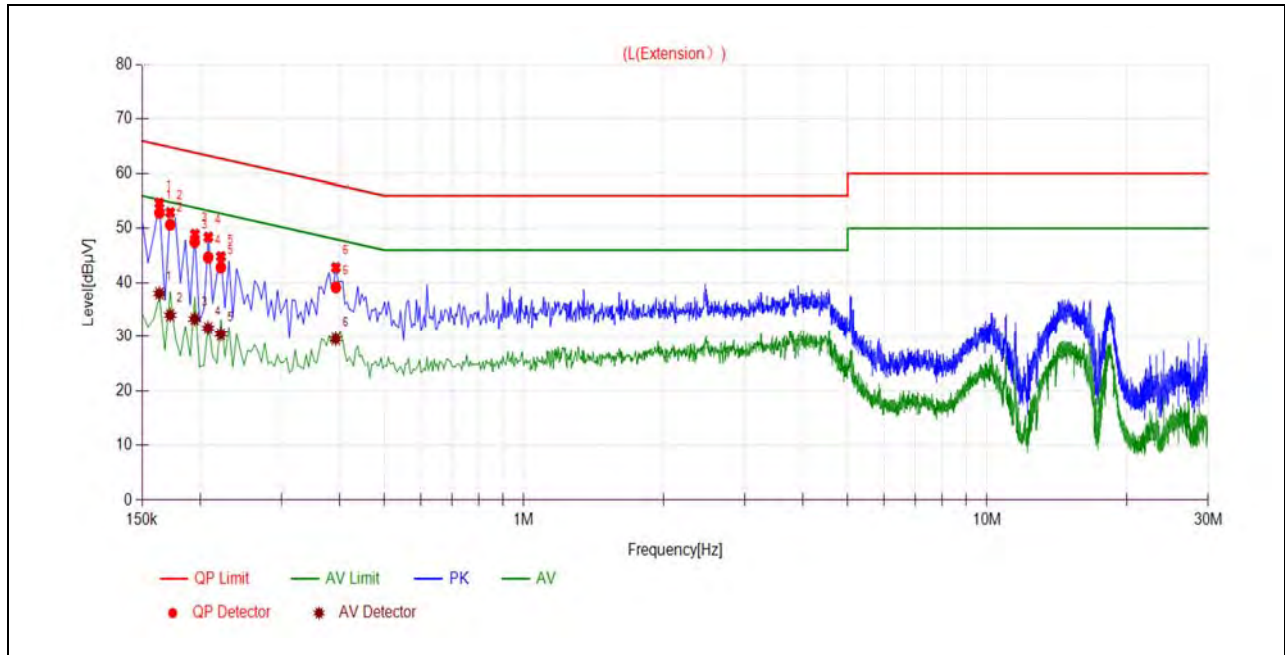

(L Phase)

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1635	52.88	27.52	65.29	38.03	Line	PASS
2	0.1725	50.70	23.51	64.84	34.03		PASS
3	0.1948	47.50	22.77	63.83	33.31		PASS
4	0.2083	44.64	21.05	63.27	31.58		PASS
5	0.2219	42.81	19.90	62.75	30.42		PASS
6	0.3929	39.16	19.03	58.00	29.53		PASS

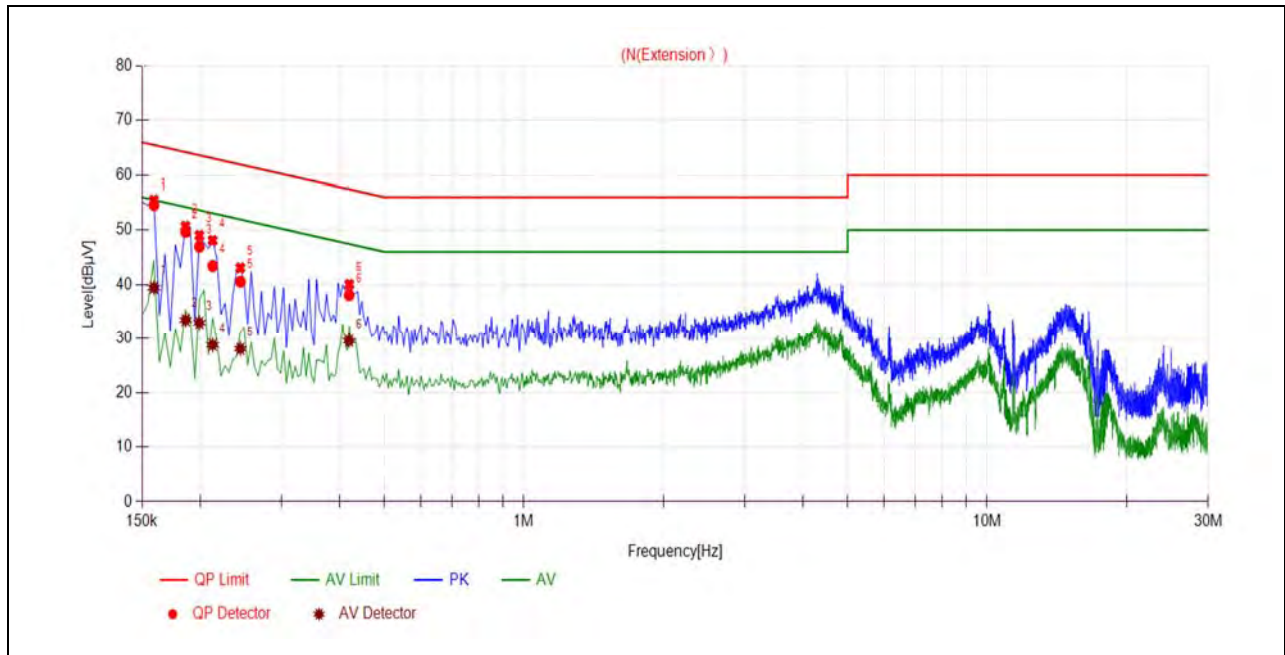

(N Phase)

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1591	54.58	39.43	65.51	55.51	Neutral	PASS
2	0.1862	49.68	33.48	64.21	54.21		PASS
3	0.1994	46.97	32.96	63.63	53.63		PASS
4	0.2130	43.40	28.79	63.09	53.09		PASS
5	0.2445	40.54	28.08	61.94	51.94		PASS
6	0.4196	38.06	29.58	57.46	47.46		PASS



A.7. Restricted Frequency Bands

The lowest and highest channels are tested to verify the Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain


A_{Factor} : Antenna Factor at 3m

Note 1: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.


Note 2 All test modes and bandwidth were considered and evaluated respectively by performing full test, only the worst data were recorded for each bandwidth.

802.11a Mode


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@ 3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/ m)	Verdict
		PK/ AV						
36	5145.00	PK	43.11	-21.29	32.20	54.02	74	PASS
36	5145.32	AV	30.84	-21.29	32.20	41.75	54	PASS
48	5356.38	PK	40.67	-21.29	32.20	51.58	74	PASS
48	5458.24	AV	28.68	-21.29	32.20	39.59	54	PASS
149	5725.00	PK	39.80	-21.11	32.20	50.89	122.23	PASS
165	5855.00	PK	39.43	-21.11	32.20	50.52	110.83	PASS

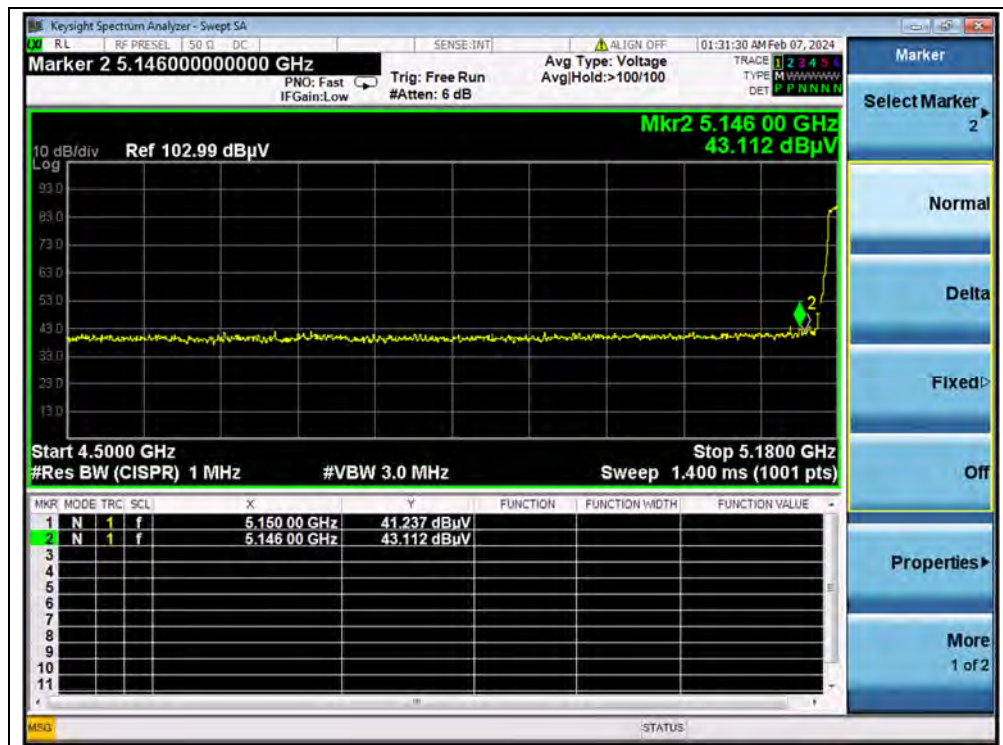


(PEAK, Channel 36, 802.11a)

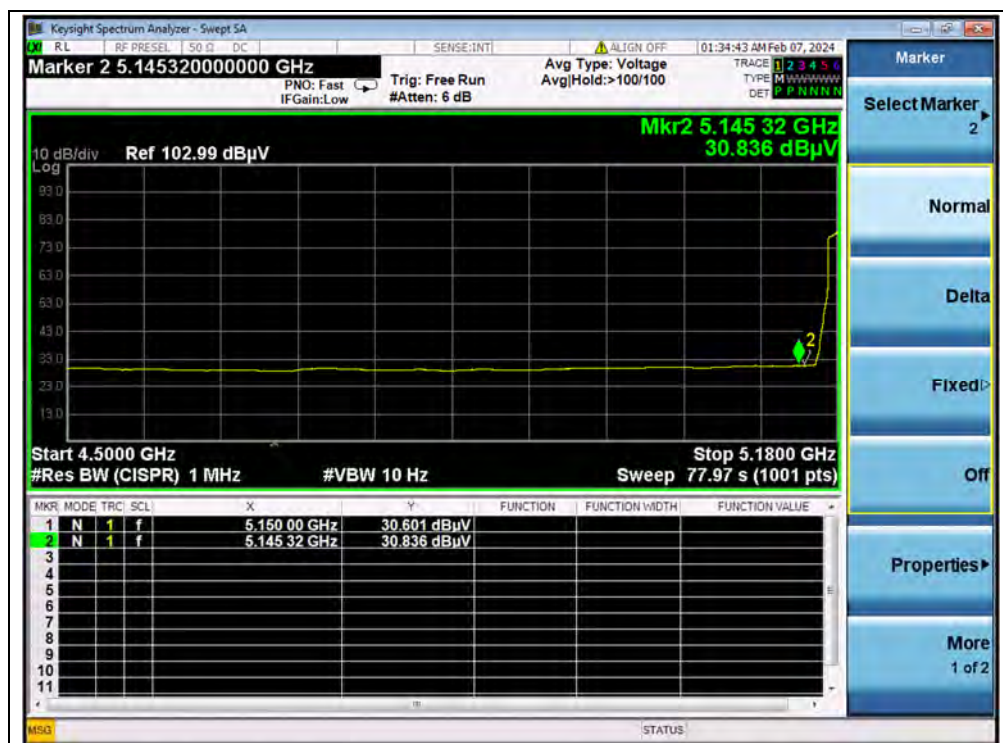


(AVERAGE, Channel 36, 802.11a)

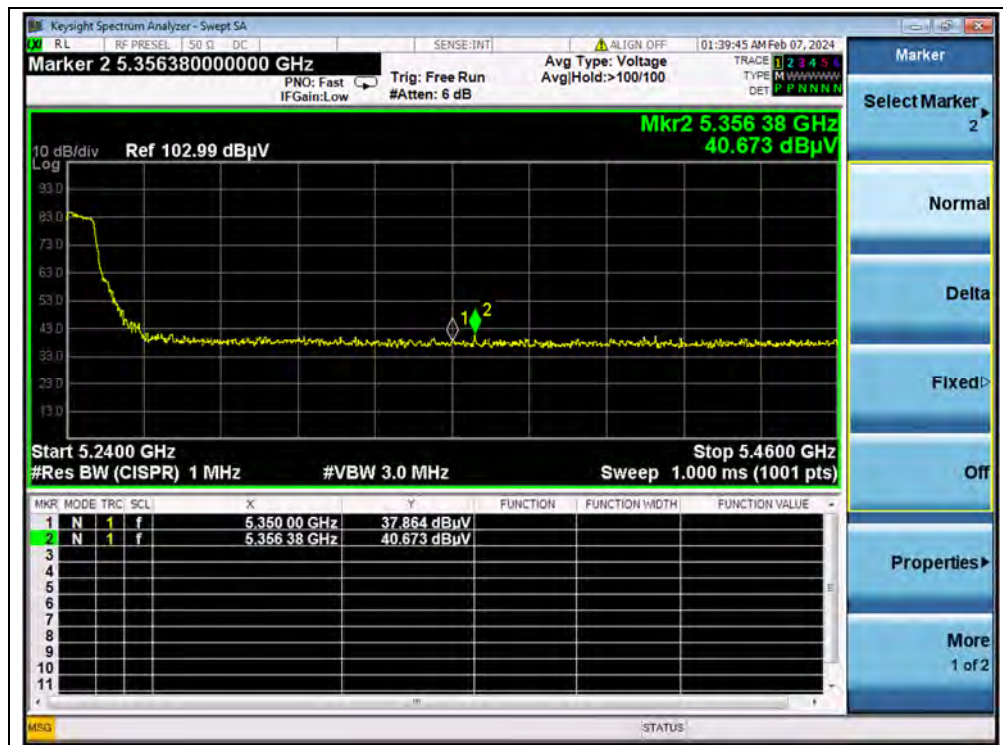


(PEAK, Channel 48, 802.11a)

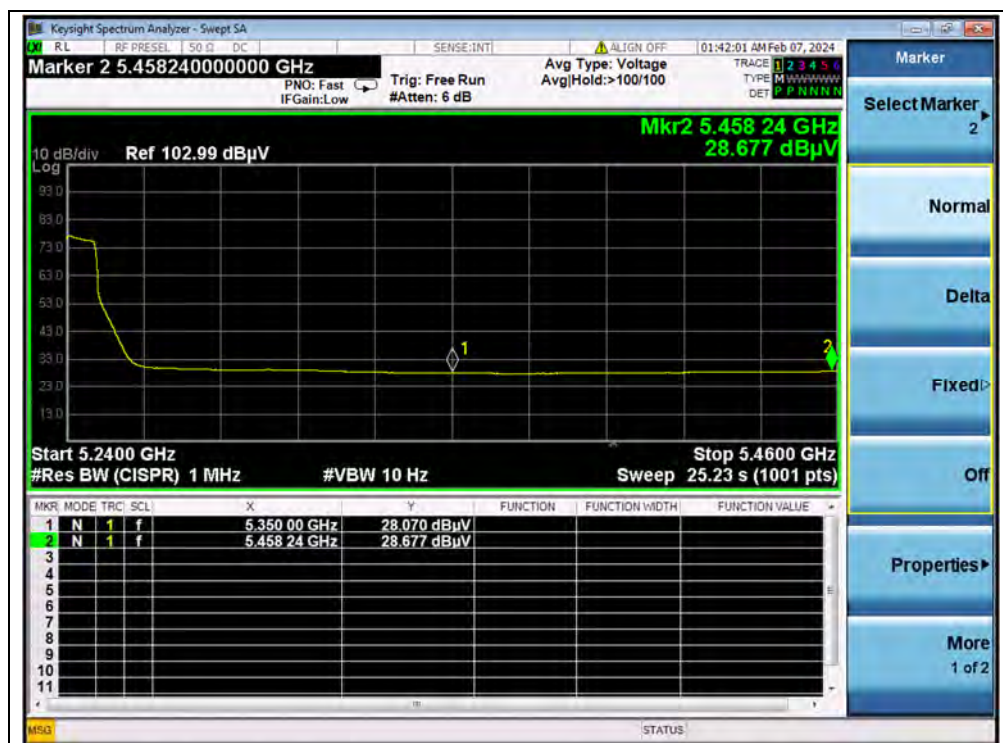

(AVERAGE, Channel 48, 802.11a)

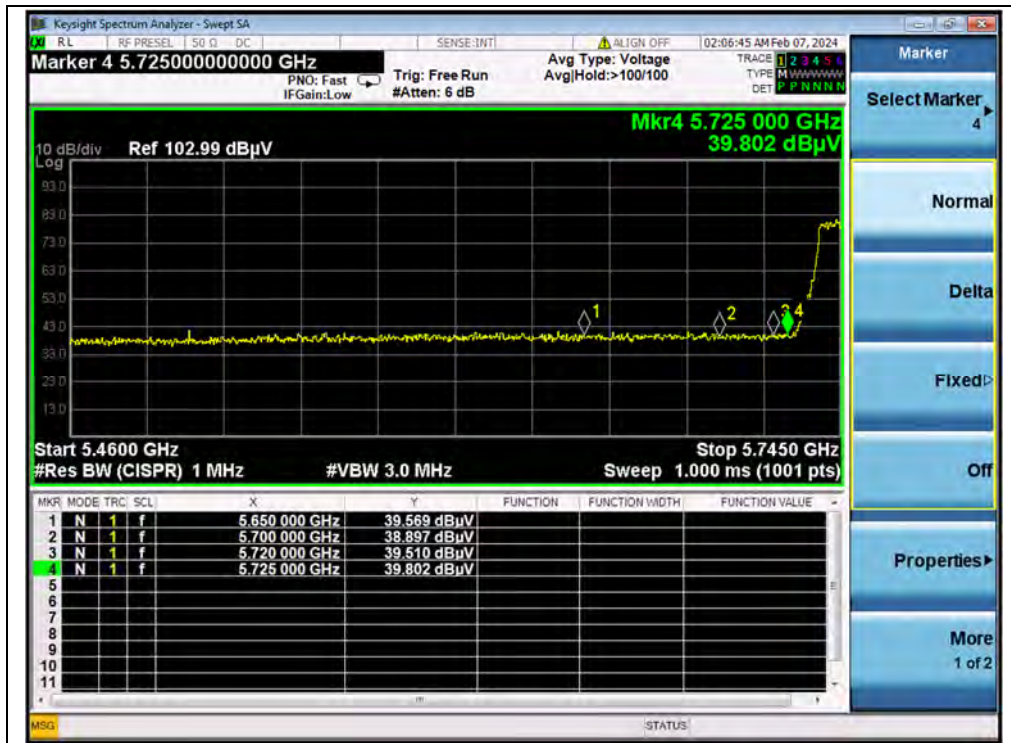


(PEAK, Channel 149, 802.11a)

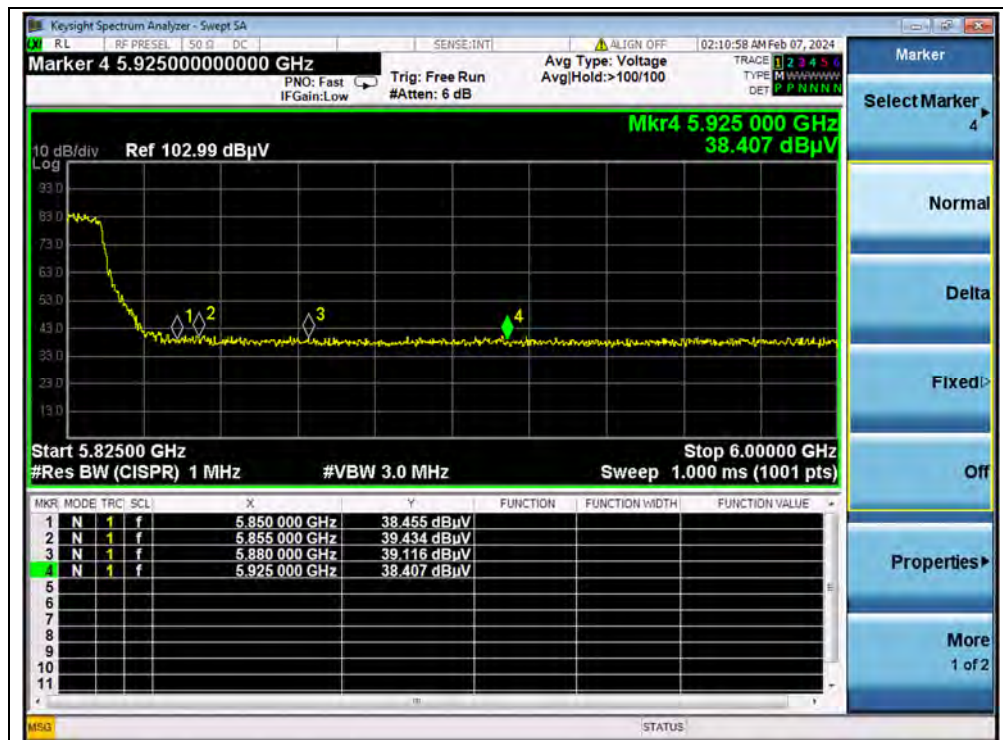


(PEAK, Channel 165, 802.11a)

**802.11n (HT40) Mode**


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
38	5089.26	PK	42.81	-21.29	32.20	53.72	74	PASS
38	5107.20	AV	31.77	-21.29	32.20	42.68	54	PASS
46	5389.16	PK	39.51	-21.29	32.20	50.42	74	PASS
46	5456.32	AV	29.81	-21.29	32.20	40.72	54	PASS
151	5720.00	PK	39.96	-21.11	32.20	51.05	110.83	PASS
159	5850.00	PK	39.15	-21.11	32.20	50.24	122.23	PASS

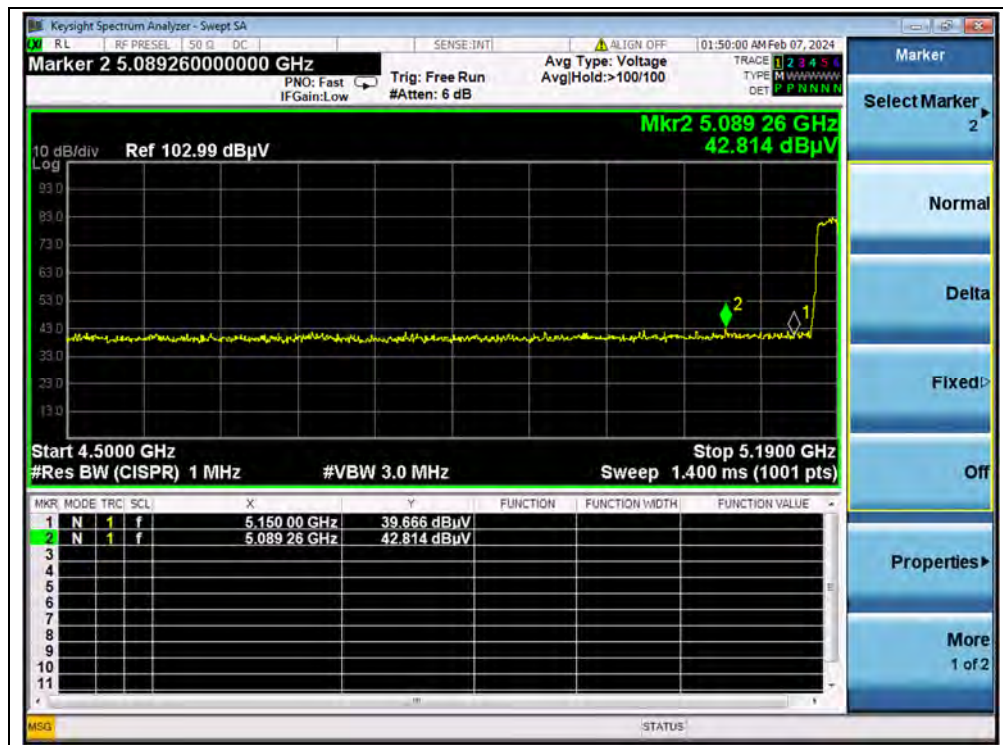


(PEAK, Channel 38, 802.11n (HT40))

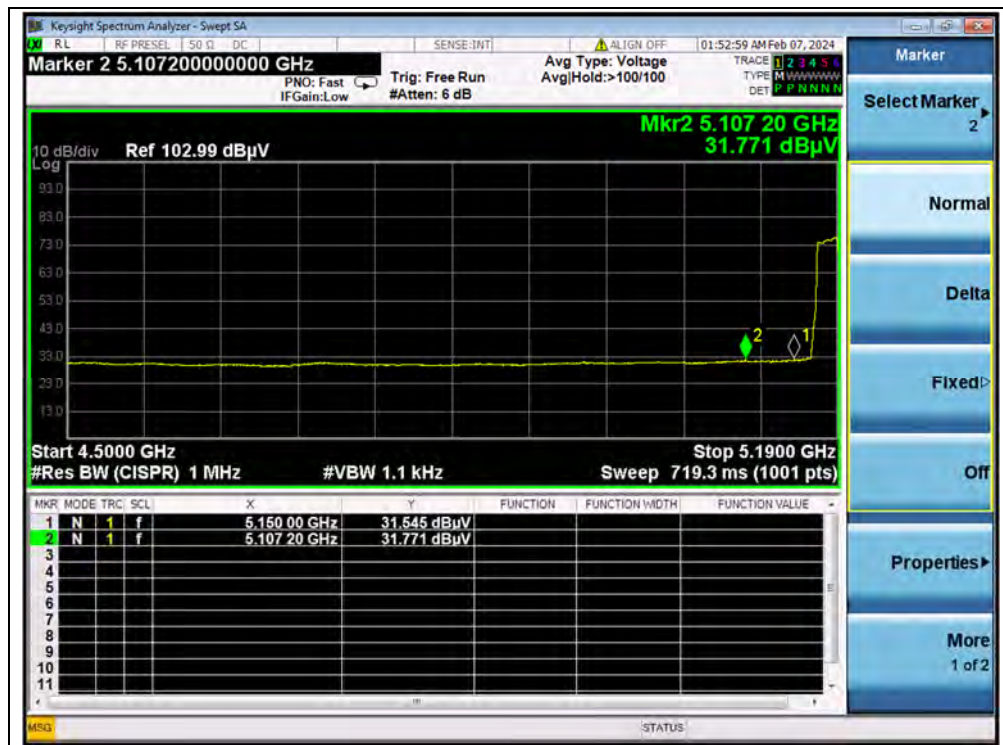


(AVERAGE, Channel 38, 802.11n (HT40))

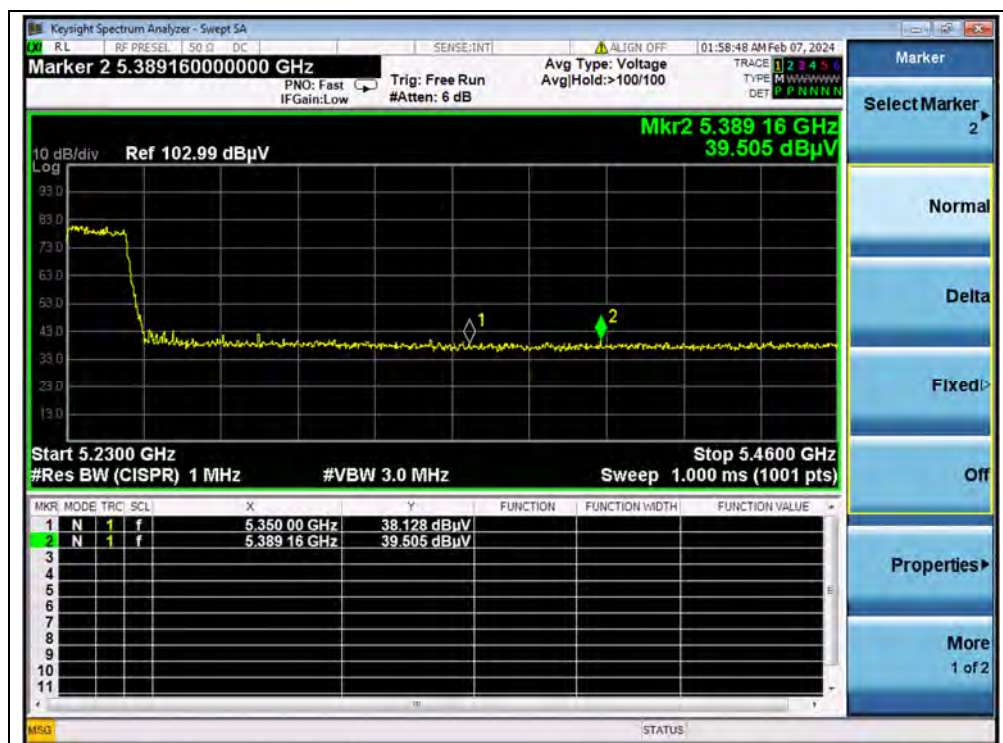


(PEAK, Channel 48, 802.11n (HT40))

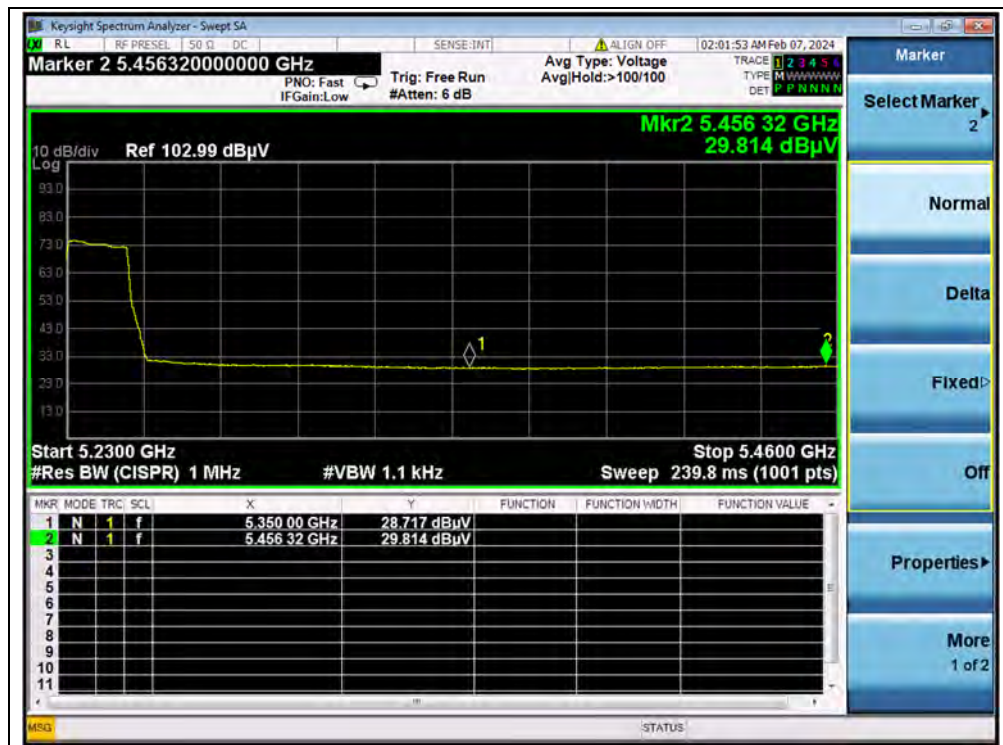

(AVERAGE, Channel 48, 802.11n (HT40))

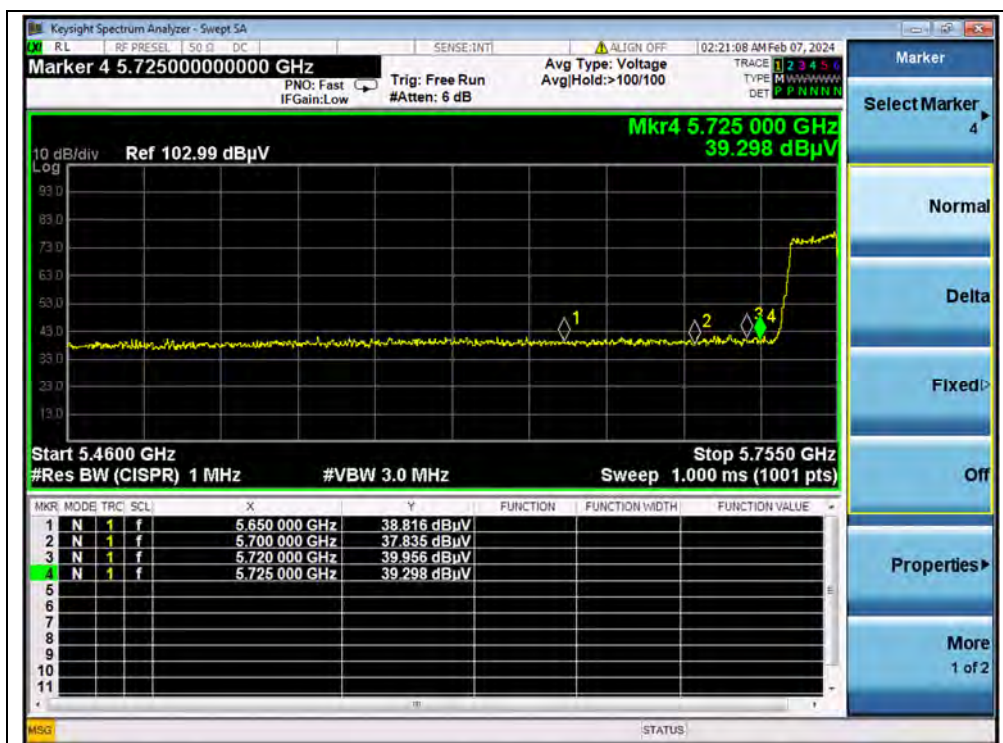

(PEAK, Channel 151, 802.11n (HT40))

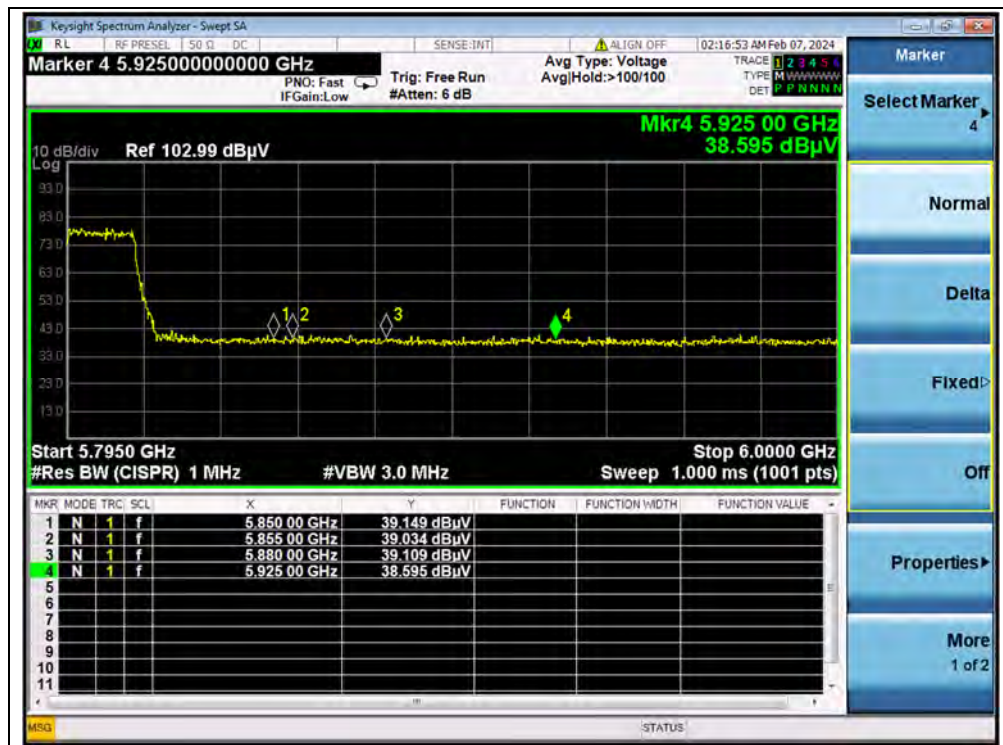

(PEAK, Channel 159, 802.11n (HT40))



A.8. Radiated Emission

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note3: For the frequency, which started from 18GHz to 40GHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note 4: All test modes and bandwidth were considered and evaluated respectively by performing full test, only the worst data were recorded for each bandwidth.


Field strength of fundamental:

Frequency (MHz)	Reading_Peak (dB μ V/m)	Antenna Factor (dB)	Path Loss (dB)	Final_Peak (dB μ V/m)	Antenna Polarity
5758.80	80.96	32.20	-21.11	92.05	Horizontal
5757.10	77.85	32.20	-21.11	88.94	Vertical

The field strength (the lowest) of fundamenta is more than 20dB higher than the unwanted emissions, in accordance with FCC part 15.215(b).


**802.11a Mode**

Plot for Channel 36

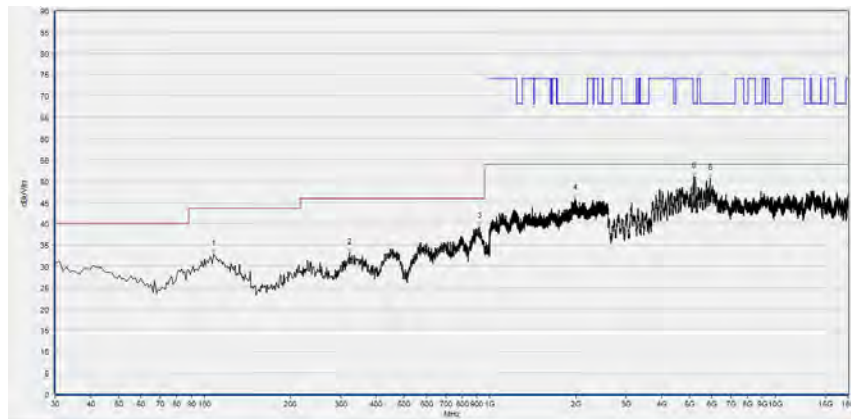

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
107.600	32.78	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
322.940	33.24	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
918.520	39.38	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1990.933	45.90	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5174.880	51.07	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5901.760	50.61	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

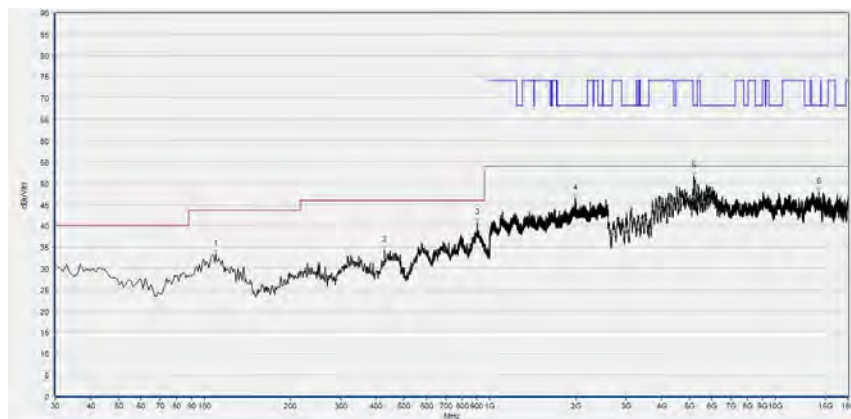

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
109.540	33.41	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
427.700	34.18	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
903.970	40.78	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1994.667	46.42	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5177.960	51.62	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
14196.200	47.92	N/A	N/A	68.23	N/A	N/A	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 44

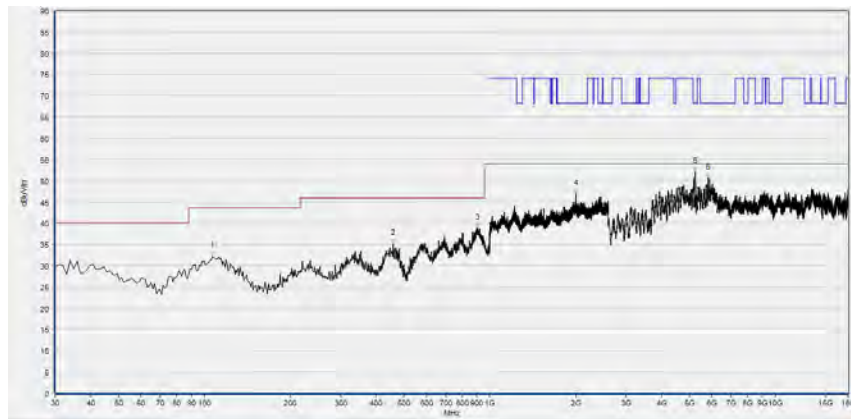

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
106.630	32.10	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
458.740	35.16	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
904.940	38.83	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1998.933	46.90	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5254.960	52.12	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5824.760	50.64	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

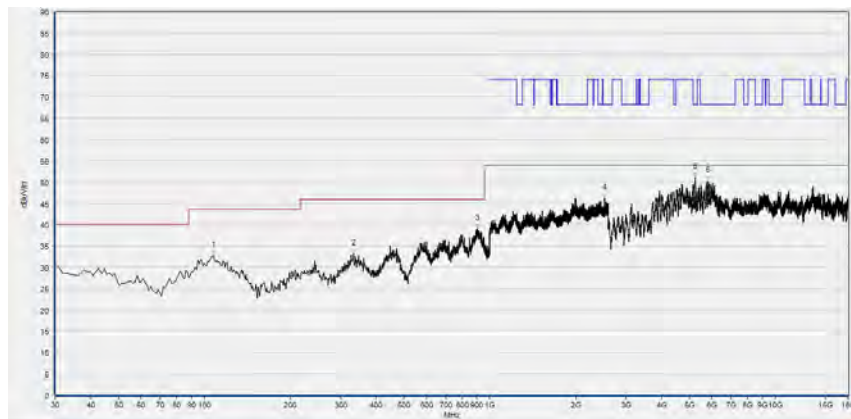


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
107.600	32.73	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
333.610	33.14	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
904.940	38.97	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2528.000	46.27	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5254.960	51.11	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5834.000	50.33	N/A	N/A	68.23	N/A	N/A	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 48

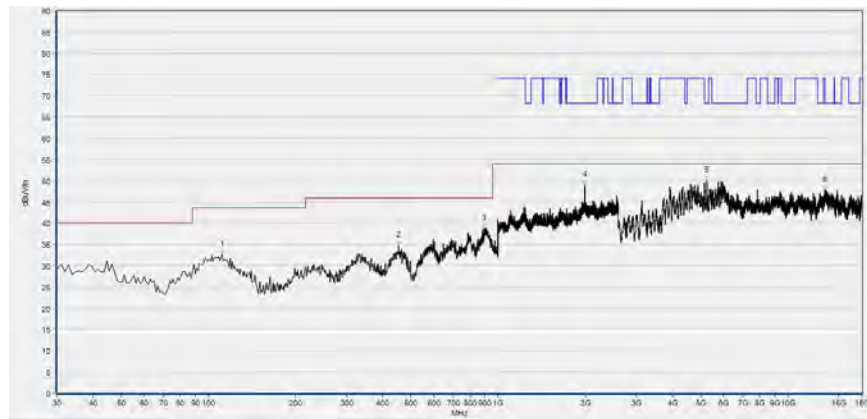

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
111.480	32.47	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
453.890	34.67	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
896.210	38.73	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1991.467	48.87	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5254.960	49.90	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
13447.760	47.78	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

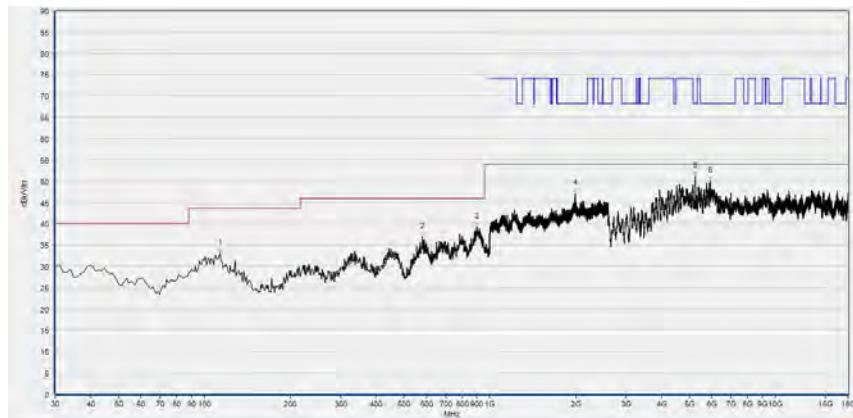

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
113.420	33.08	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
579.990	36.79	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
901.060	39.16	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1995.200	47.09	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5254.960	51.09	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5901.760	49.88	N/A	N/A	68.23	N/A	N/A	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 149

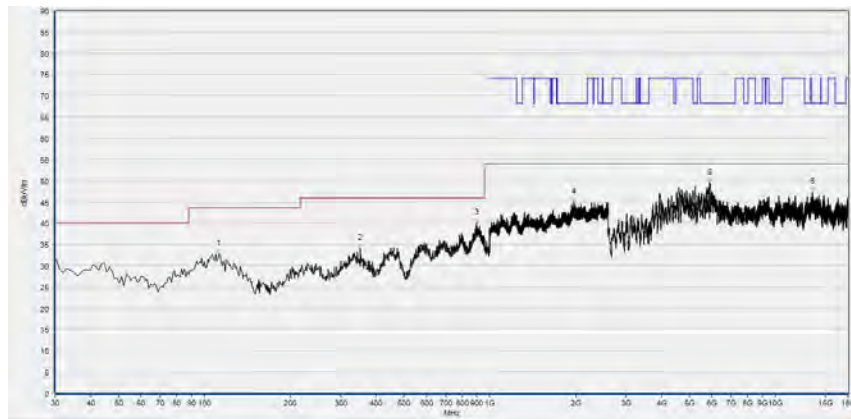

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
112.450	32.72	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
352.040	34.10	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
900.090	40.09	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1966.400	44.89	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5898.680	49.37	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
13478.560	47.32	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

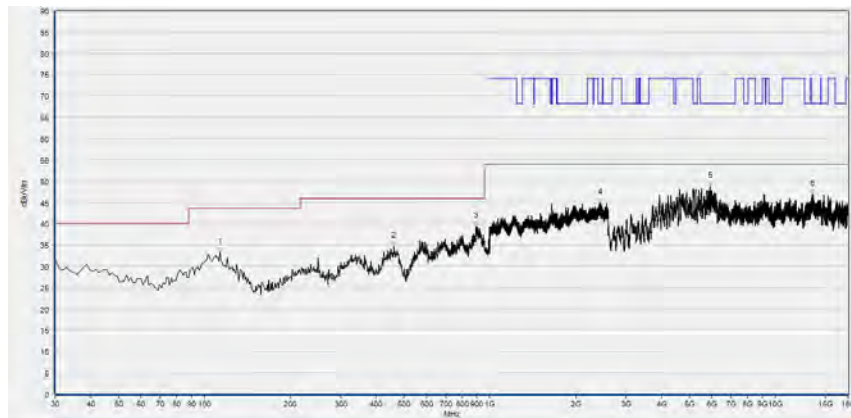

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
113.420	33.37	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
461.650	34.75	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
894.270	39.37	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2434.133	44.85	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5901.760	48.75	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
13472.400	46.87	N/A	N/A	68.23	N/A	N/A	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 157

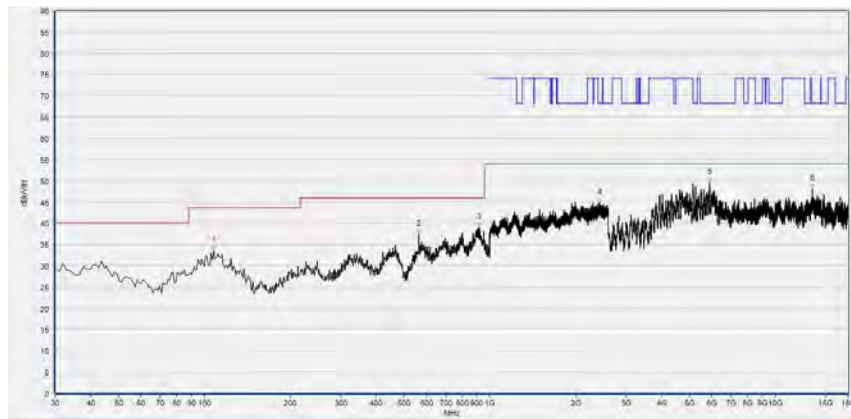

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
107.600	33.49	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
563.500	37.33	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
912.700	39.11	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2428.267	44.74	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5892.520	49.57	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
13469.320	48.09	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

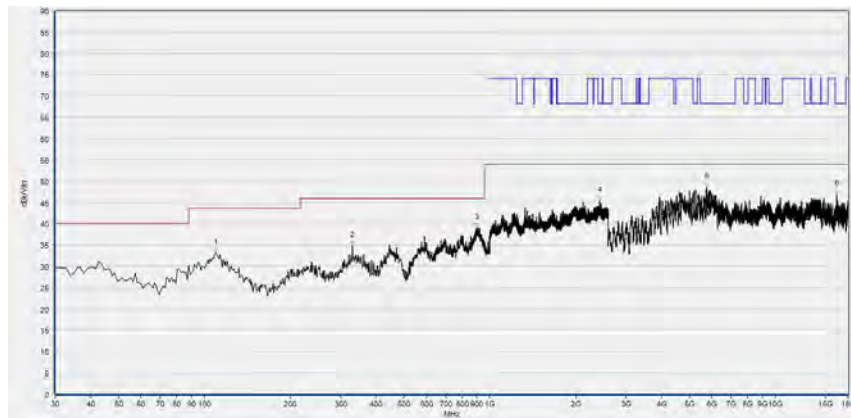


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
109.540	33.15	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
330.700	34.93	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
901.060	39.02	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2417.067	45.47	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5738.520	48.58	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
16456.920	46.99	N/A	N/A	68.23	N/A	N/A	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 165

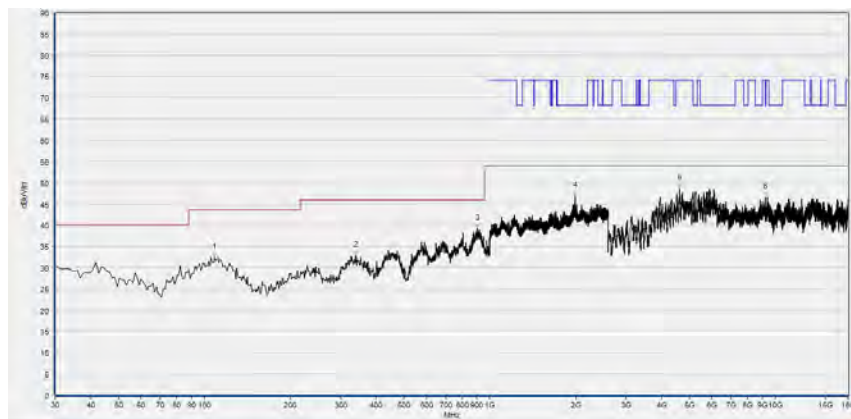

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
108.570	32.29	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
339.430	32.87	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
903.970	39.22	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1993.067	46.99	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
4626.640	48.54	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9215.840	46.58	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

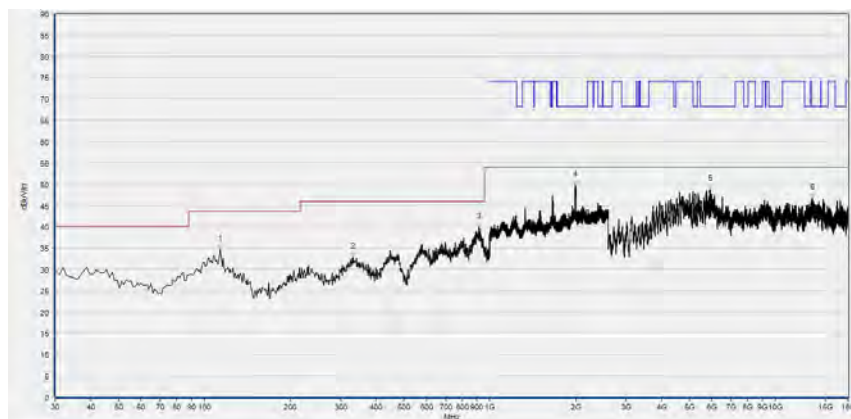


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
113.420	34.62	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
332.640	32.83	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
912.700	39.81	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1993.600	49.86	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5904.840	48.81	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
13500.120	46.71	N/A	N/A	68.23	N/A	N/A	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)


**802.11n (HT40) mode**

Plot for Channel 38

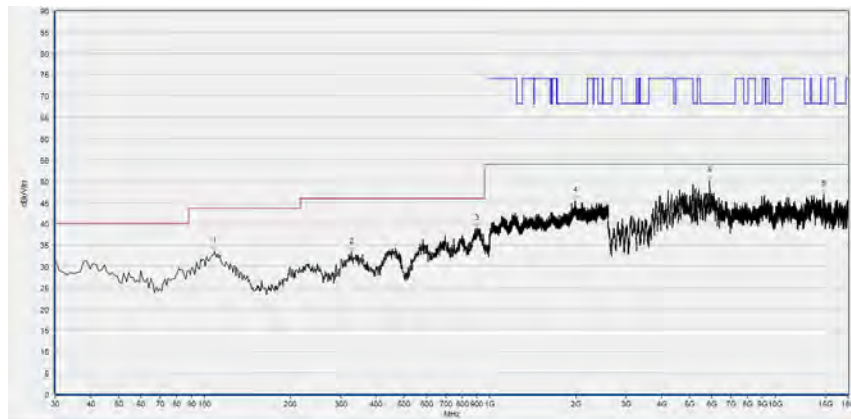

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
108.570	33.58	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
327.790	33.35	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
898.150	38.85	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1986.133	45.35	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5895.600	50.08	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
14806.040	46.87	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

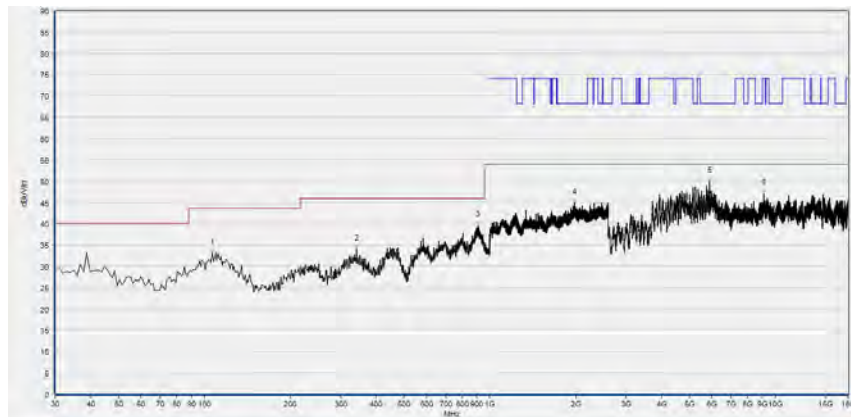


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
106.630	33.21	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
341.370	34.05	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
910.760	39.59	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1976.000	44.98	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5892.520	49.99	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
9095.720	47.10	N/A	N/A	68.23	N/A	N/A	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 46

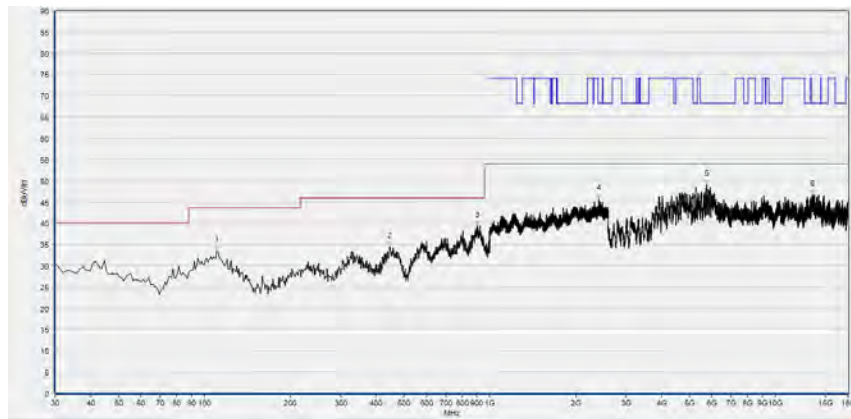

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
110.510	33.45	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
446.130	34.52	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
905.910	39.35	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2413.333	45.72	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5741.600	49.08	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
13478.560	46.70	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

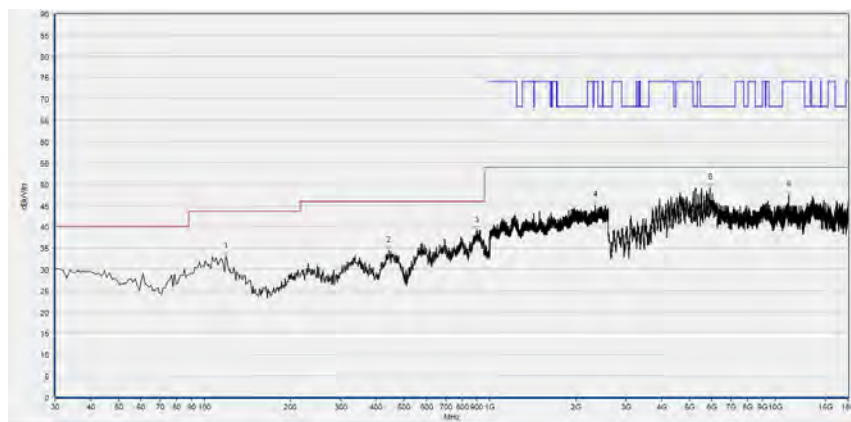


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
119.240	33.02	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
443.220	34.37	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
897.180	39.00	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2345.600	45.06	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5901.760	49.06	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
11183.960	47.47	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 151

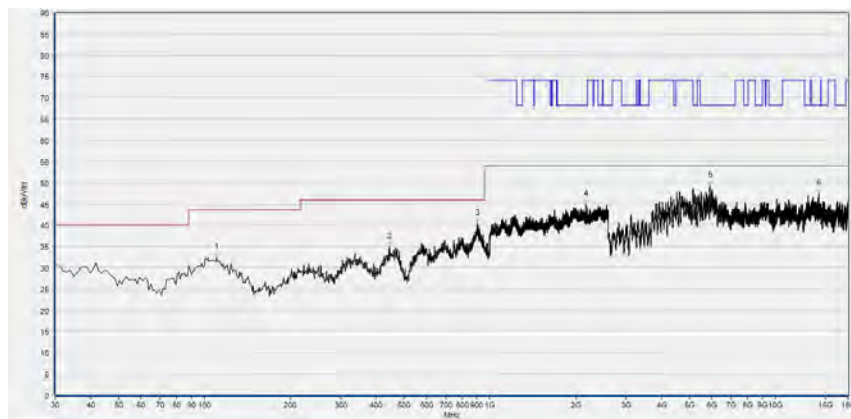

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
110.510	32.31	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
446.130	34.88	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
902.030	40.35	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2170.133	44.89	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5901.760	49.35	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
14183.880	47.49	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

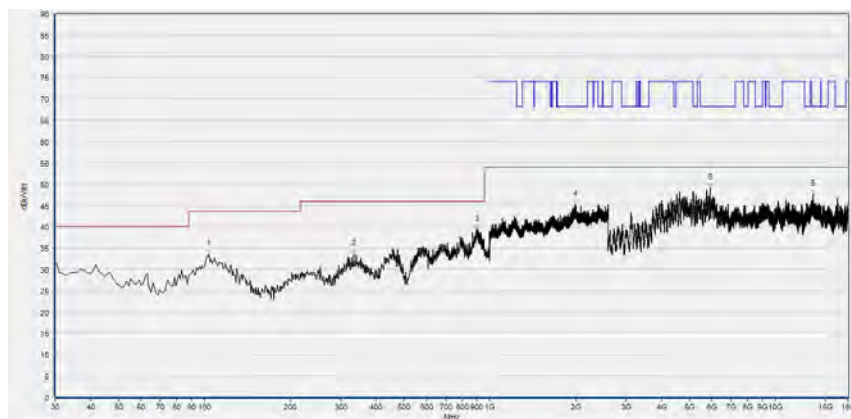


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
103.720	33.48	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
333.610	33.56	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
900.090	39.34	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1992.533	45.27	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5901.760	49.19	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
13598.680	47.60	N/A	N/A	68.23	N/A	N/A	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 159

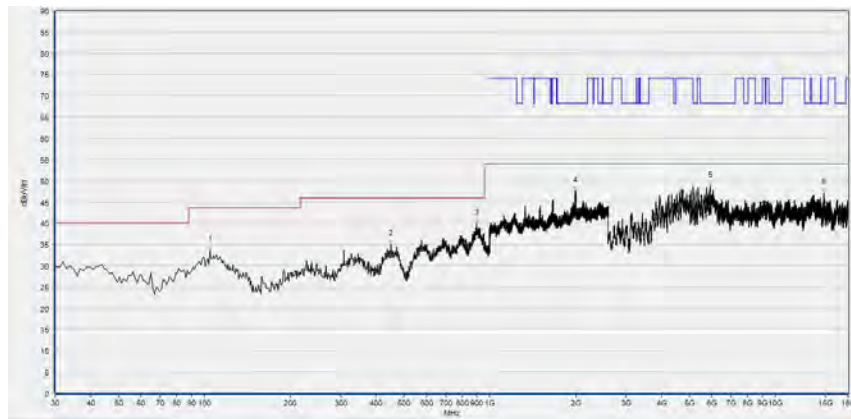

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
104.690	33.61	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
450.010	34.95	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
900.090	39.87	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1991.467	47.62	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5904.840	48.71	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
14769.080	47.02	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

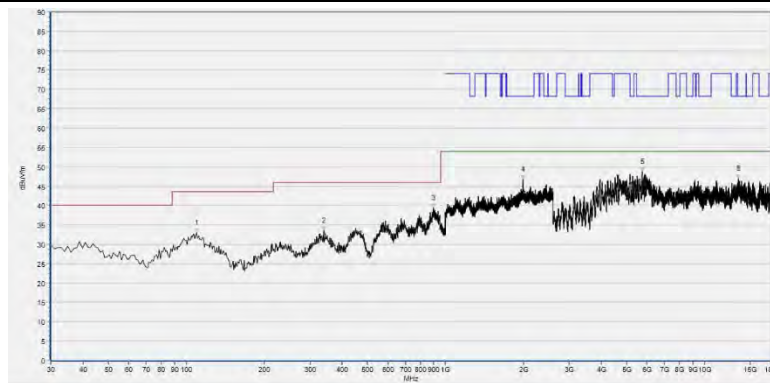

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
109.540	33.06	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
339.430	33.50	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
897.180	39.43	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1995.200	46.83	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5735.440	48.74	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
13475.480	47.00	N/A	N/A	68.23	N/A	N/A	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)

END OF REPORT