



The Photos of SAR test No. I19Z61673-SEM05

For

HMD Global Oy

Multi-band GSM/WCDMA/LTE phone with Bluetooth, WLAN

Model name: TA-1206

With

Hardware Version: 99621_1_11

Software Version: 000T_0_130

Issued Date: 2019-10-18



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.


Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT


No. 51, Xueyuan Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504


Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn

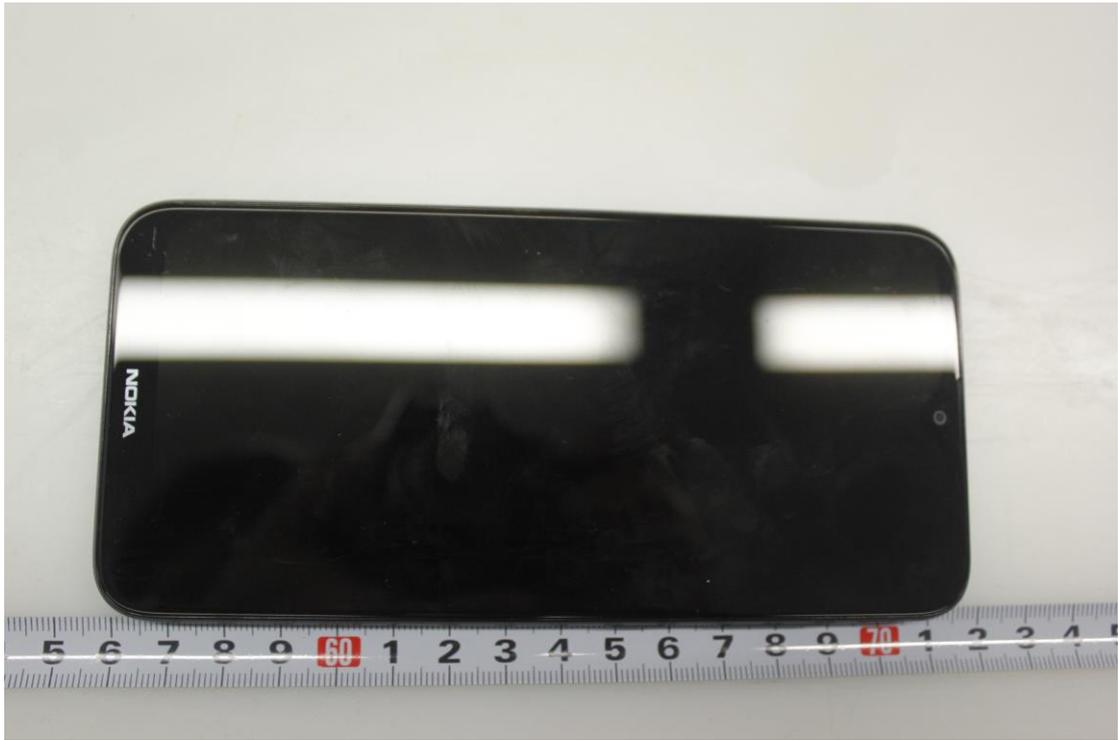


Picture 1: Constituents of the sample

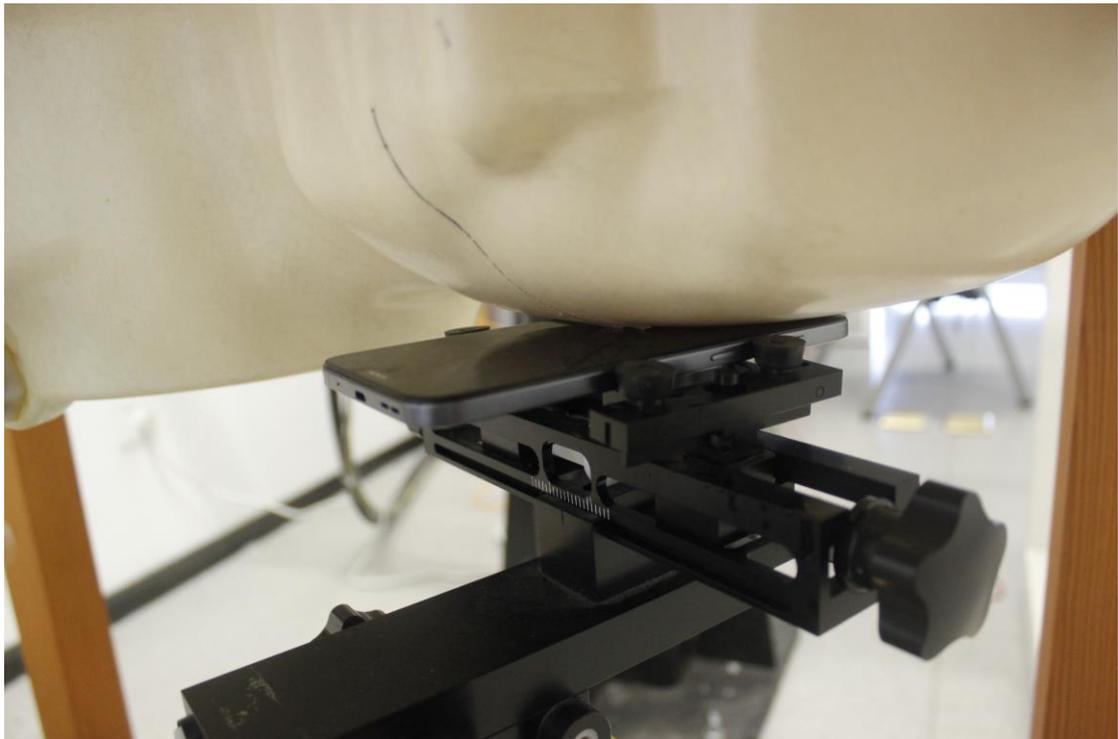


Picture 2: Left Hand Touch Cheek Position

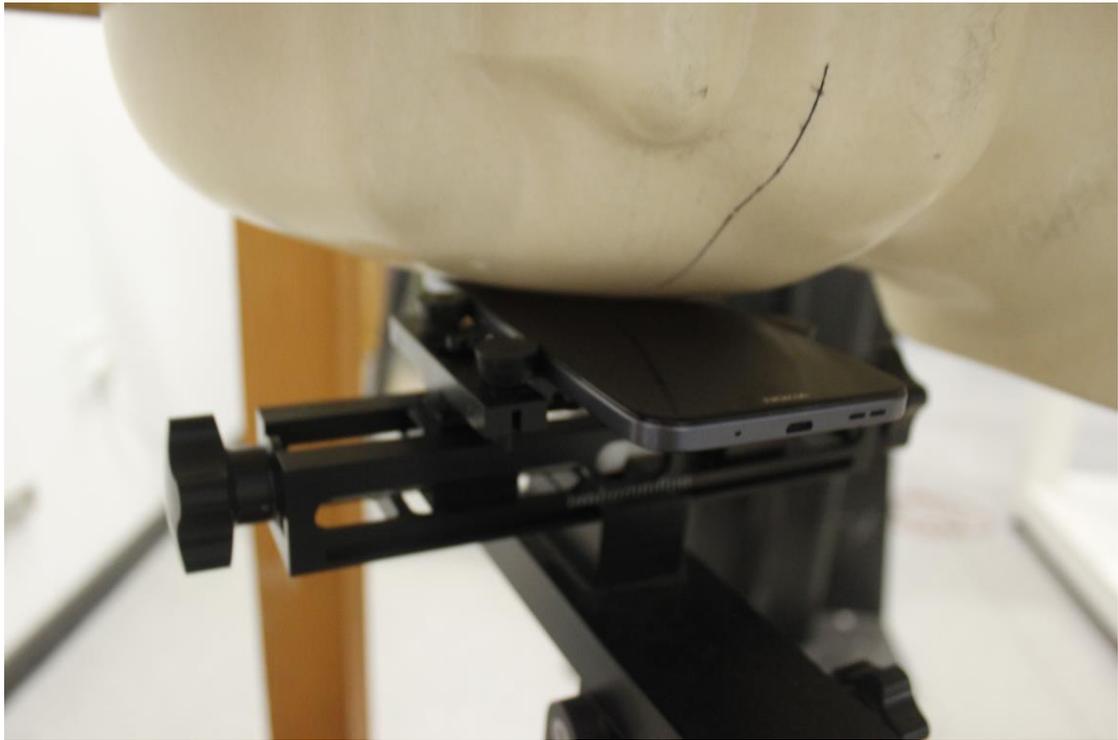

Picture 3: Left Hand Tilt 15° Position

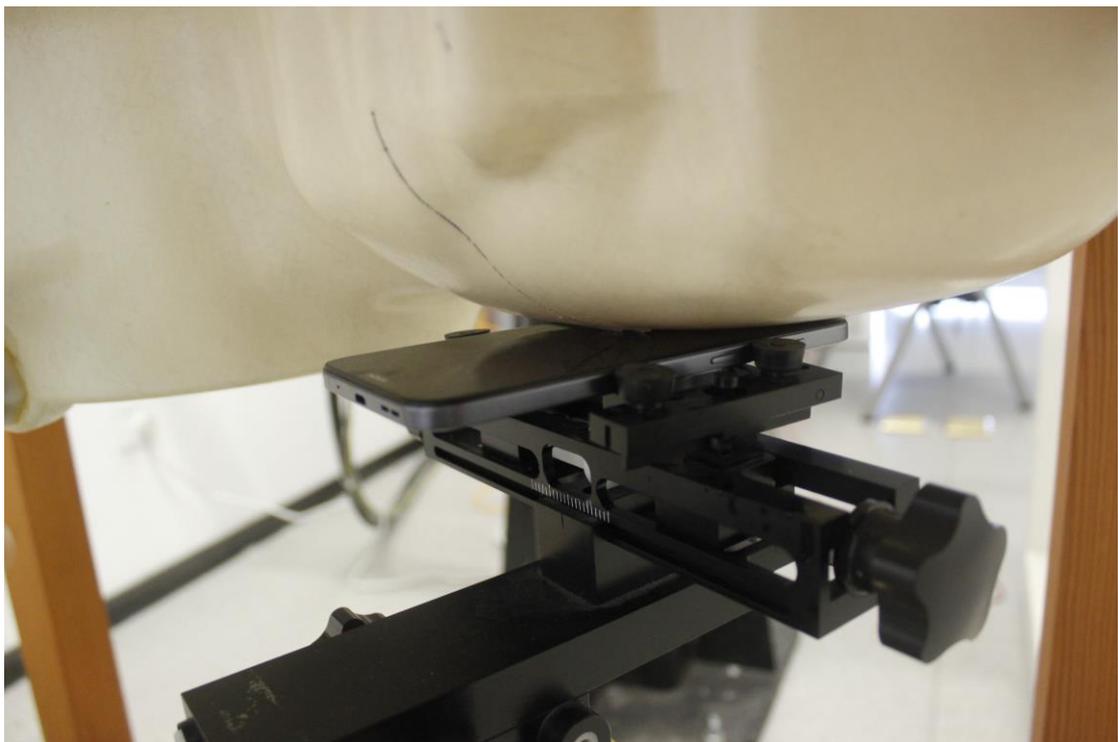


Picture 4: Right Hand Touch Cheek Position

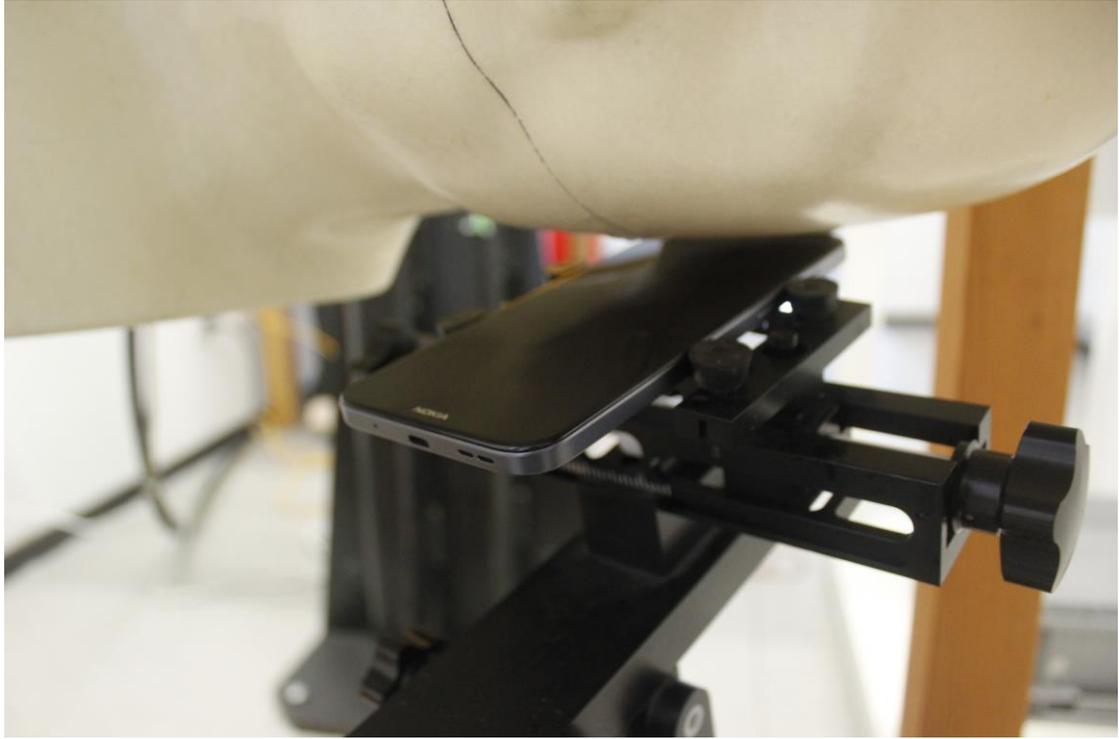

Picture 5: Right Hand Tilt 15° Position

Test positions for body:


The Body SAR is tested at the following 6 test positions all with the distance =10/11/17mm between the EUT and the phantom bottom:

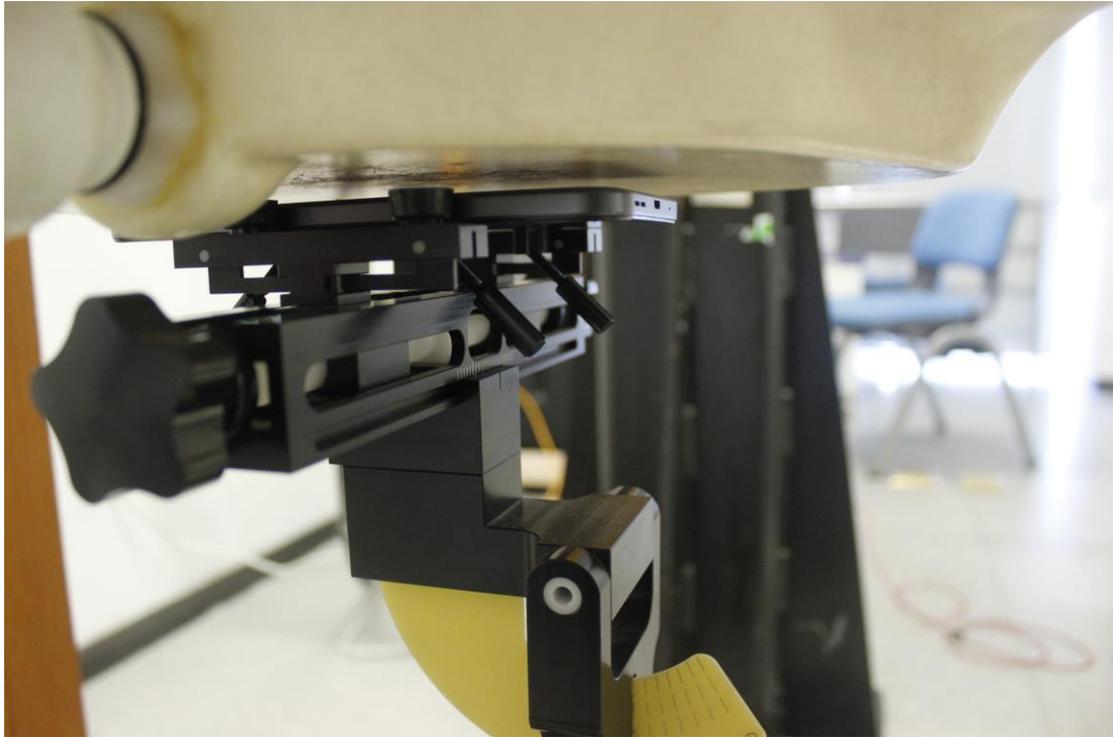


Picture 1: Rear with 10mm




Picture 2: Front with 10mm

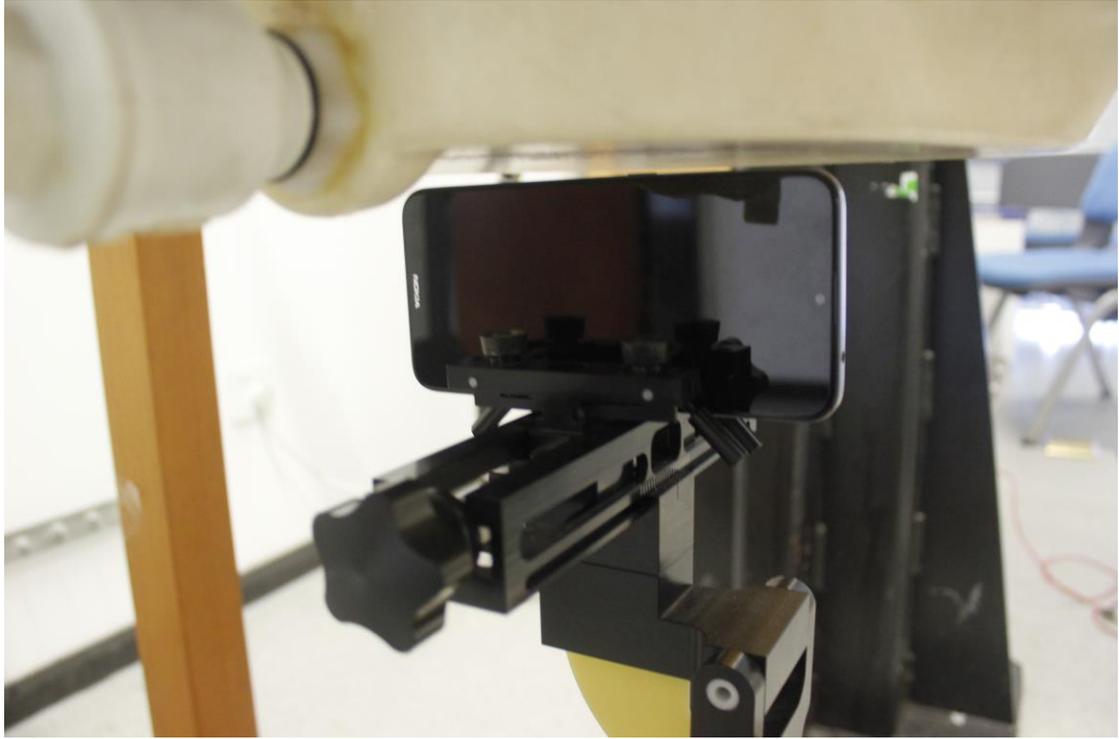


Picture 3: Left with 10mm

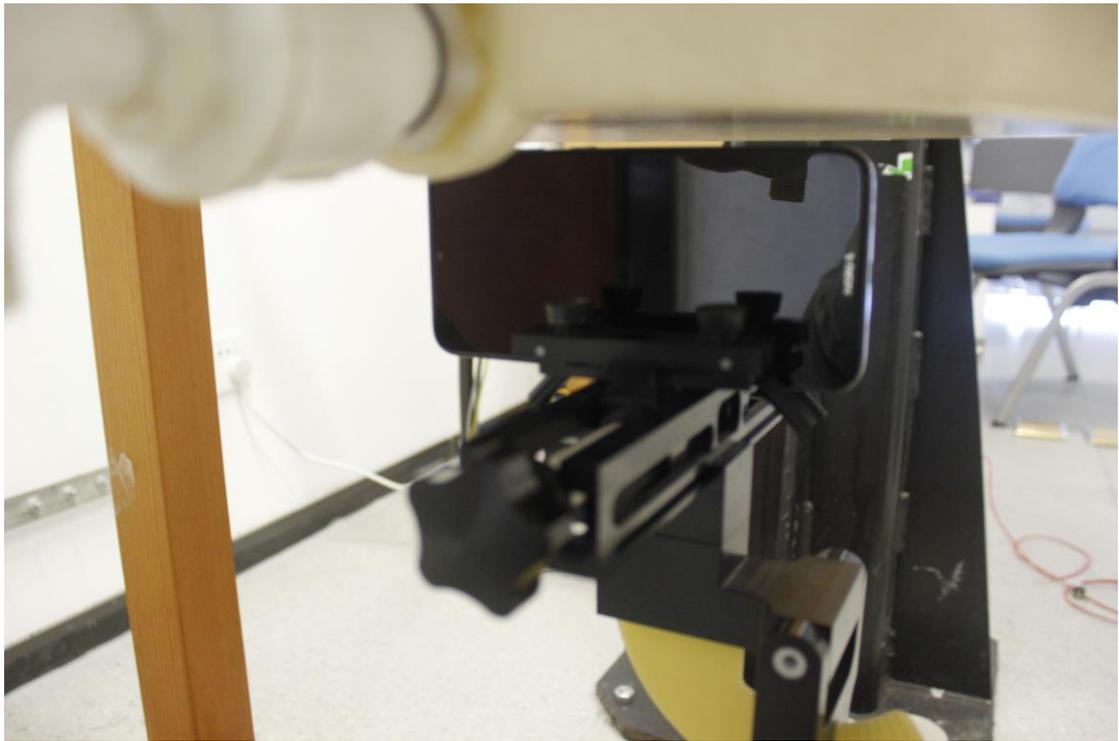


Picture 4: Right with 10mm

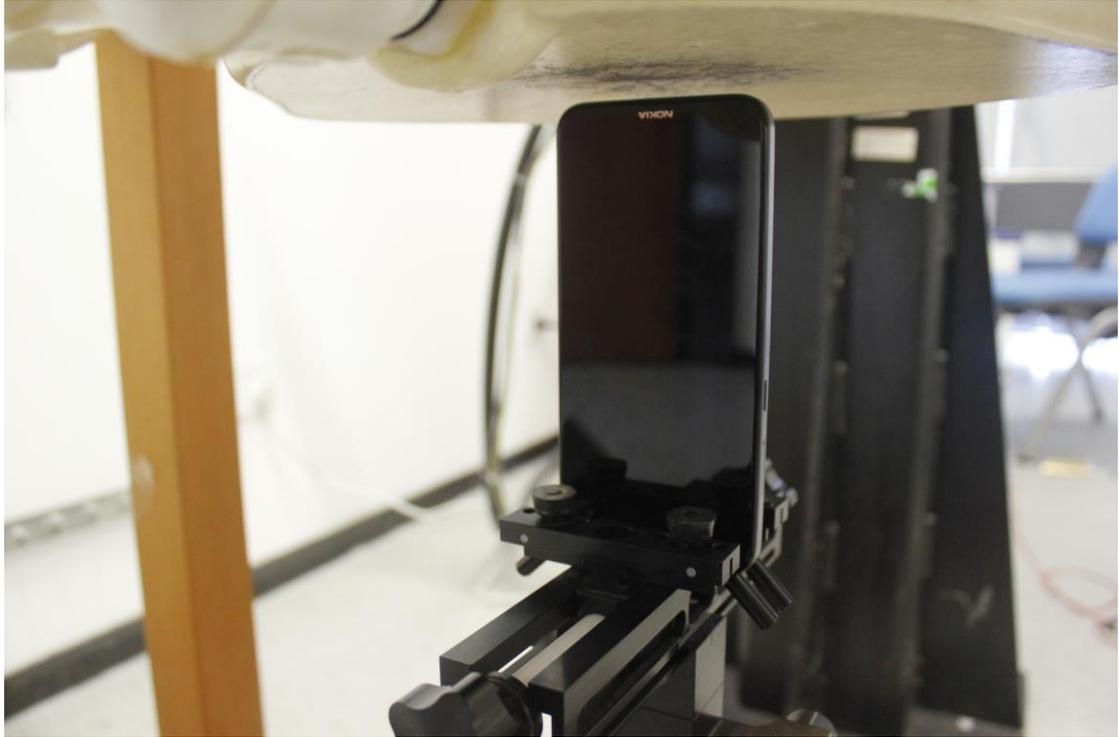


Picture 5: Bottom with 10mm

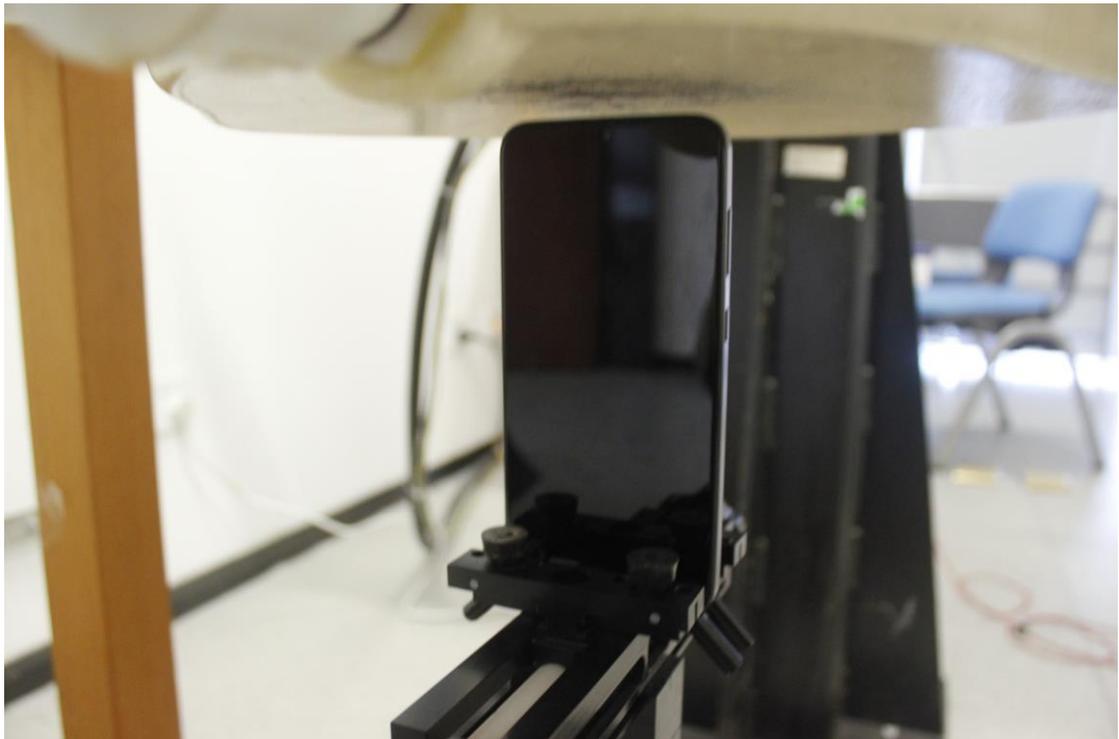


Picture 6: Top with 10mm

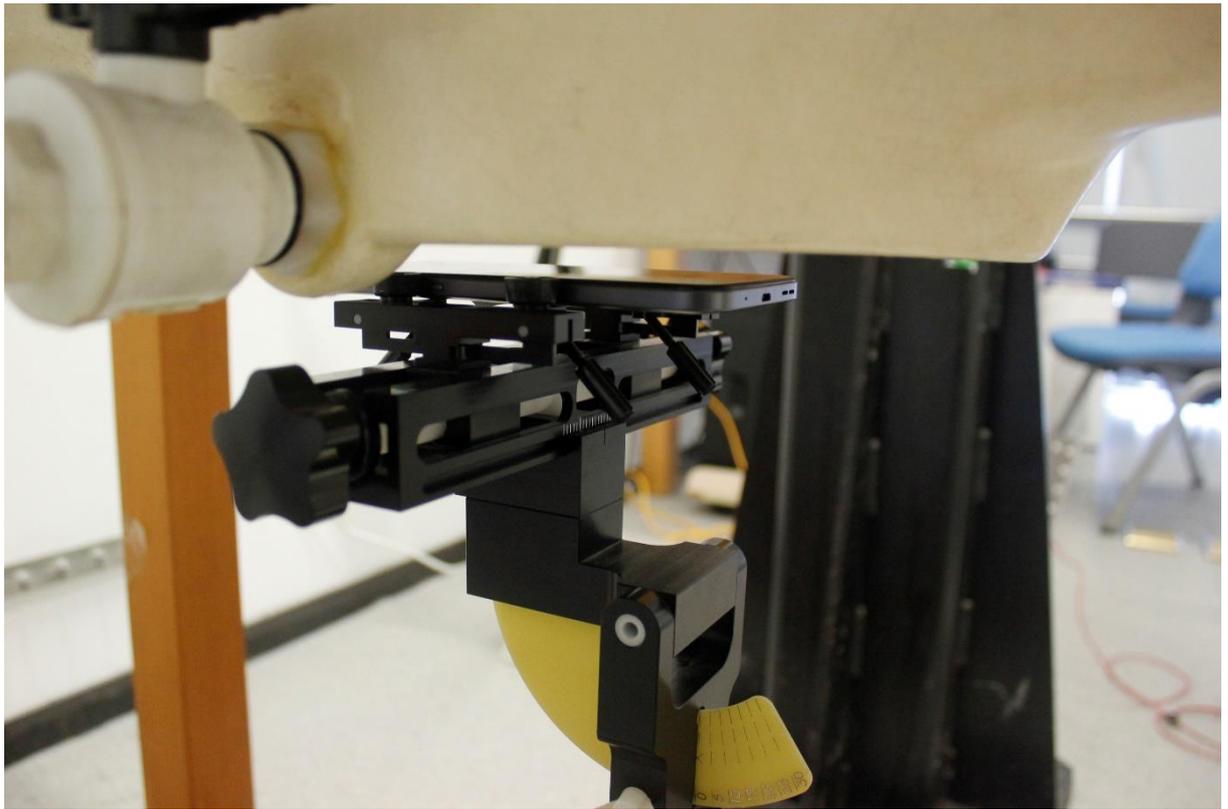


Picture 7 Front 11mm

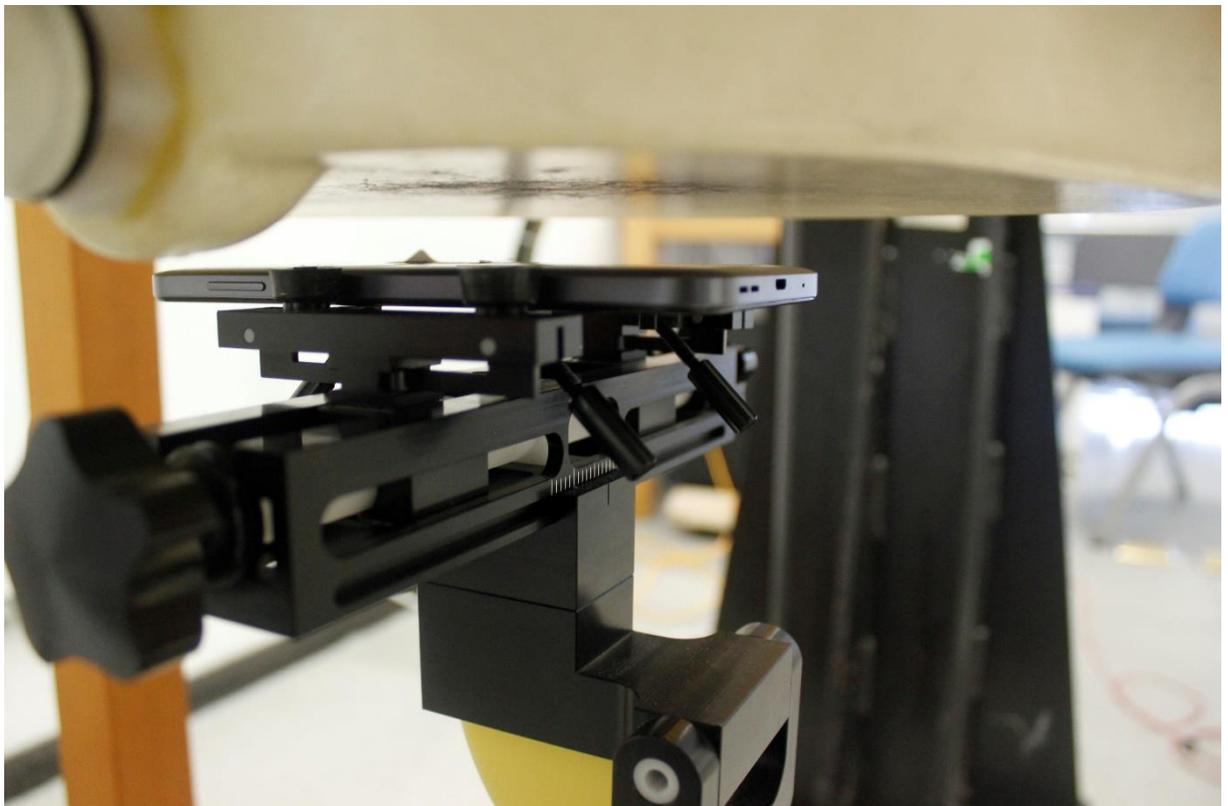

Picture 8 Rear 17mm

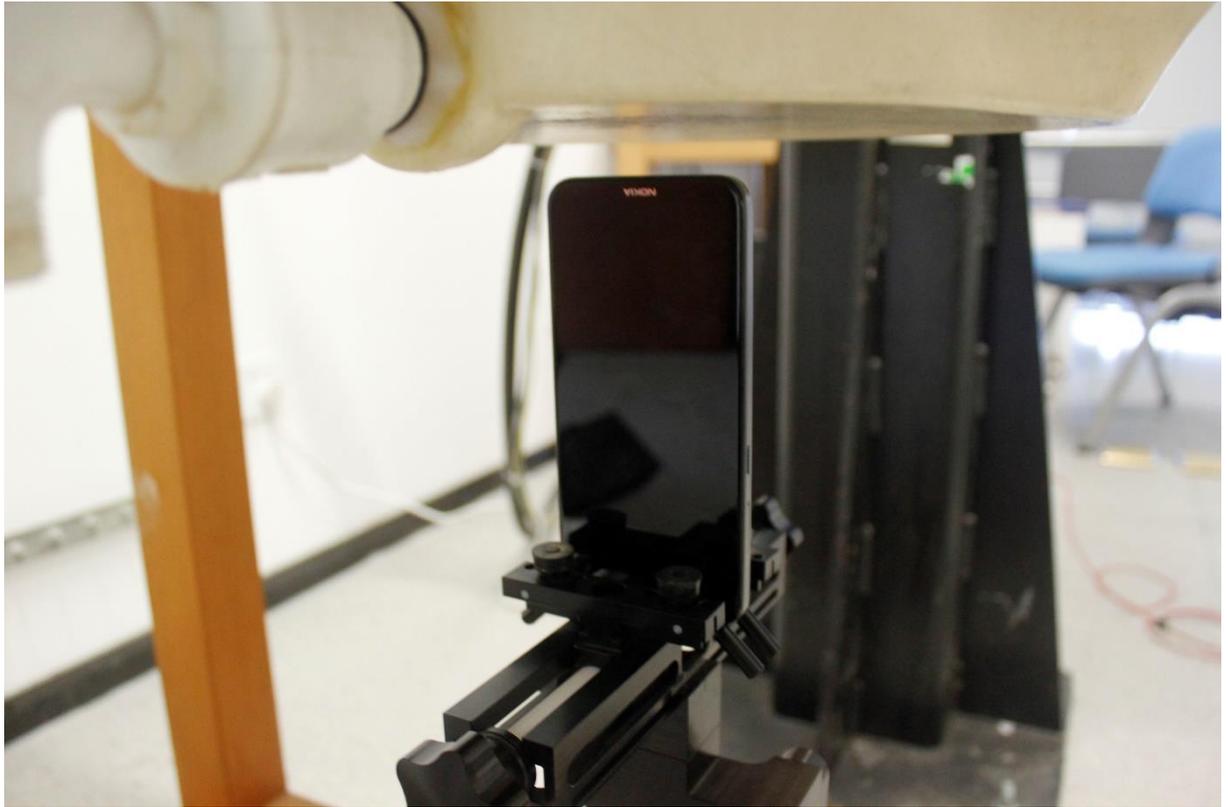

Picture 9 Bottom 17mm

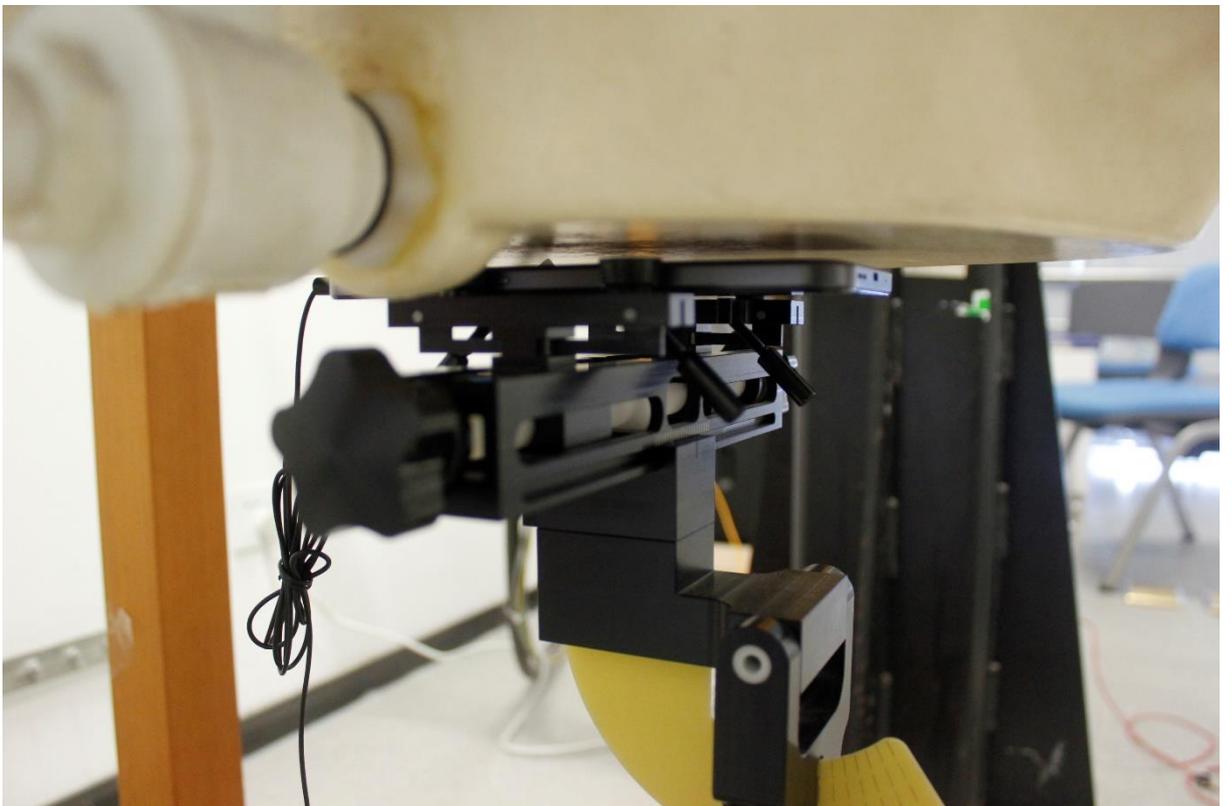

Picture 10 Rear 10mm with headset