

FCC Test Report

Report No.: RF190726C11

FCC ID: KA2BA2520PA1

Test Model: DBA-2520P

Received Date: Jun. 28, 2019

Test Date: Jul. 11 ~ Sep. 03, 2019

Issued Date: Sep. 09, 2019

Applicant: D-Link Corporation

Address: 17595 Mt. Herrmann, Fountain Valley, California, United States, 92708

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, TAIWAN

FCC Registration / 788550 / TW0003
Designation Number:



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	9
3.2.1 Test Mode Applicability and Tested Channel Detail	10
3.3 Duty Cycle of Test Signal	12
3.4 Description of Support Units	13
3.4.1 Configuration of System under Test	13
3.5 General Description of Applied Standards	14
4 Test Types and Results (For 2.4GHz Band)	15
4.1 Radiated Emission and Bandedge Measurement	15
4.1.1 Limits of Radiated Emission and Bandedge Measurement	15
4.1.2 Test Instruments	16
4.1.3 Test Procedures	17
4.1.4 Deviation from Test Standard	18
4.1.5 Test Set Up	18
4.1.6 EUT Operating Conditions	19
4.1.7 Test Results	20
4.2 Conducted Emission Measurement	38
4.2.1 Limits of Conducted Emission Measurement	38
4.2.2 Test Instruments	38
4.2.3 Test Procedures	39
4.2.4 Deviation from Test Standard	39
4.2.5 Test Setup	39
4.2.6 EUT Operating Conditions	39
4.2.7 Test Results	40
4.3 6dB Bandwidth Measurement	46
4.3.1 Limits of 6dB Bandwidth Measurement	46
4.3.2 Test Setup	46
4.3.3 Test Instruments	46
4.3.4 Test Procedure	46
4.3.5 Deviation from Test Standard	46
4.3.6 EUT Operating Conditions	46
4.3.7 Test Result	47
4.4 Conducted Output Power Measurement	49
4.4.1 Limits of Conducted Output Power Measurement	49
4.4.2 Test Setup	49
4.4.3 Test Instruments	49
4.4.4 Test Procedures	49
4.4.5 Deviation from Test Standard	49
4.4.6 EUT Operating Conditions	49
4.4.7 Test Results	50
4.5 Power Spectral Density Measurement	52
4.5.1 Limits of Power Spectral Density Measurement	52
4.5.2 Test Setup	52
4.5.3 Test Instruments	52
4.5.4 Test Procedure	52
4.5.5 Deviation from Test Standard	52
4.5.6 EUT Operating Condition	52

4.5.7 Test Results	53
4.6 Conducted Out of Band Emission Measurement.....	56
4.6.1 Limits of Conducted Out of Band Emission Measurement	56
4.6.2 Test Setup.....	56
4.6.3 Test Instruments	56
4.6.4 Test Procedure	56
4.6.5 Deviation from Test Standard	57
4.6.6 EUT Operating Condition	57
4.6.7 Test Results	57
5 Pictures of Test Arrangements.....	70
Appendix – Information of the Testing Laboratories	71

Release Control Record

Issue No.	Description	Date Issued
RF190726C11	Original release	Sep. 09, 2019

1 Certificate of Conformity

Product: Nuclias Cloud-Managed AC1900 Wave 2 Access Point

Brand: D-Link Corporation

Test Model: DBA-2520P


Sample Status: Engineering sample

Applicant: D-Link Corporation

Test Date: Jul. 11 ~ Sep. 03, 2019

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : , **Date:** Sep. 09, 2019
Polly Chien / Specialist

Approved by : , **Date:** Sep. 09, 2019
Bruce Chen / Senior Project Engineer

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -2.76dB at 24.58750MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -0.5dB at 2483.50MHz.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	Pass	Meet the requirement of limit.
15.247(b)	Conducted power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is i-pex(MHF) not a standard connector.

Note:

Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ($\pm$)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.94 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.04 dB
	30MHz ~ 200MHz	3.59 dB
	200MHz ~ 1000MHz	3.60 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Nuclias Cloud-Managed AC1900 Wave 2 Access Point
Brand	D-Link Corporation
Test Model	DBA-2520P
Status of EUT	Engineering sample
Power Supply Rating	12Vdc (From adapter) 54Vdc (From PoE)
Modulation Type	CCK, DQPSK, DBPSK for DSSS 256QAM, 64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: 11.0/ 5.5/ 2.0/ 1.0Mbps 802.11g: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to 600.0Mbps
Operating Frequency	2412 ~ 2462MHz
Number of Channel	11 for 802.11b, 802.11g, 802.11n (HT20), 802.11n (VHT20) 7 for 802.11n (HT40) 802.11n (VHT40)
Output Power	CDD Mode: 587.096mW Beamforming Mode: 193.340mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter
Data Cable Supplied	NA

Note:

1. The EUT incorporates a MIMO function. Physically, the EUT provides 3 completed transmitters and 3 receivers.

Band	Modulation Mode	Beamforming Mode	TX Function
2.4GHz	802.11b	Not Support	3TX
	802.11g	Not Support	3TX
	802.11n (HT20)	Support	3TX
	802.11n (HT40)	Support	3TX
	802.11n (VHT20)	Support	3TX
	802.11n (VHT40)	Support	3TX

* The modulation and bandwidth are similar for 802.11n mode for HT20/HT40 and VHT20/VHT40. After pre-testing, 802.11n (VHT20/VHT40) power is lower than 802.11n (HT20/HT40), therefore 802.11n (HT20/HT40) is the worst case to representative mode in test report. (Final test mode refer section 3.2.1)

* For 802.11n, CDD mode is the worst case for final radiated emission and power line conducted emission tests after pretesting CDD mode and beamforming mode.

2. The EUT uses following antennas.

Type	Connector	Ant. Gain (dBi)						
		2400 MHz	2450 MHz	2500 MHz	5150 MHz	5350 MHz	5725 MHz	5825 MHz
PIFA	I-pex(MHF)	3	3	3	4	4	4	4

3. The EUT consumes power from the following Adapters and PoE.

Adapter 1	
Brand	Channel Well Technology
Model	2ABL030F US
Input Power	100-240Vac, 50-60Hz, 1.0A
Output Power	12Vdc / 2.5A
Power Cord	1.2m non-shielded power cord without core

Adapter 2	
Brand	Asian Power Devices Inc.
Model	WA-30J12R
Input Power	100-240Vac~, 50-60Hz, 0.9A
Output Power	12Vdc / 2.5A
Power Cord	1.2m non-shielded power cord without core

PoE (Support unit)	
Brand	LEADER ELECTRONICS INC.
Model	NU90-J540167-I1
Input Power	100-240Vac~, 50-60Hz, 1.2A
Output Power	54Vdc / 1.67A

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20), 802.11n (VHT20):

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40), 802.11n (VHT40):

Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE<1G	PLC	APCM	
A	√	√	√	√	Power from adapter 1
B	-	√	√	-	Power from adapter 2
C	-	√	√	-	Power from PoE

Where **RE $\geq$ 1G**: Radiated Emission above 1GHz & Bandedge Measurement

RE<1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

Note:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Z-plane**.
2. "-": Means no effect.
3. Radiated emission (below 1GHz) and power line conducted emission test items chosen the worst maximum power.

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	7.2
A	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	15.0

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B, C	802.11g	1 to 11	6	OFDM	BPSK	6.0

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B, C	802.11g	1 to 11	6	OFDM	BPSK	6.0

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	7.2
A	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	15.0

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE $\geq$ 1G	24deg. C, 68%RH	120Vac, 60Hz	Greg Lin
RE<1G	24deg. C, 68%RH	120Vac, 60Hz 54Vdc	Greg Lin
PLC	25deg. C, 75%RH	120Vac, 60Hz 54Vdc	Greg Lin
APCM	25deg. C, 60%RH	120Vac, 60Hz	Ivan Tseng

3.3 Duty Cycle of Test Signal

Duty cycle of test signal is > 98 %, duty factor is not required.


Duty cycle of test signal is < 98%, duty factor shall be considered.

802.11b: Duty cycle = $12.387/12.500 = 0.991$

802.11g: Duty cycle = $2.042/2.145 = 0.952$, Duty factor = $10 * \log(1/0.952) = 0.21$

802.11n (HT20): Duty cycle = $4.990/5.085 = 0.981$

802.11n (HT40): Duty cycle = $2.425/2.507 = 0.967$, Duty factor = $10 * \log(1/0.967) = 0.14$

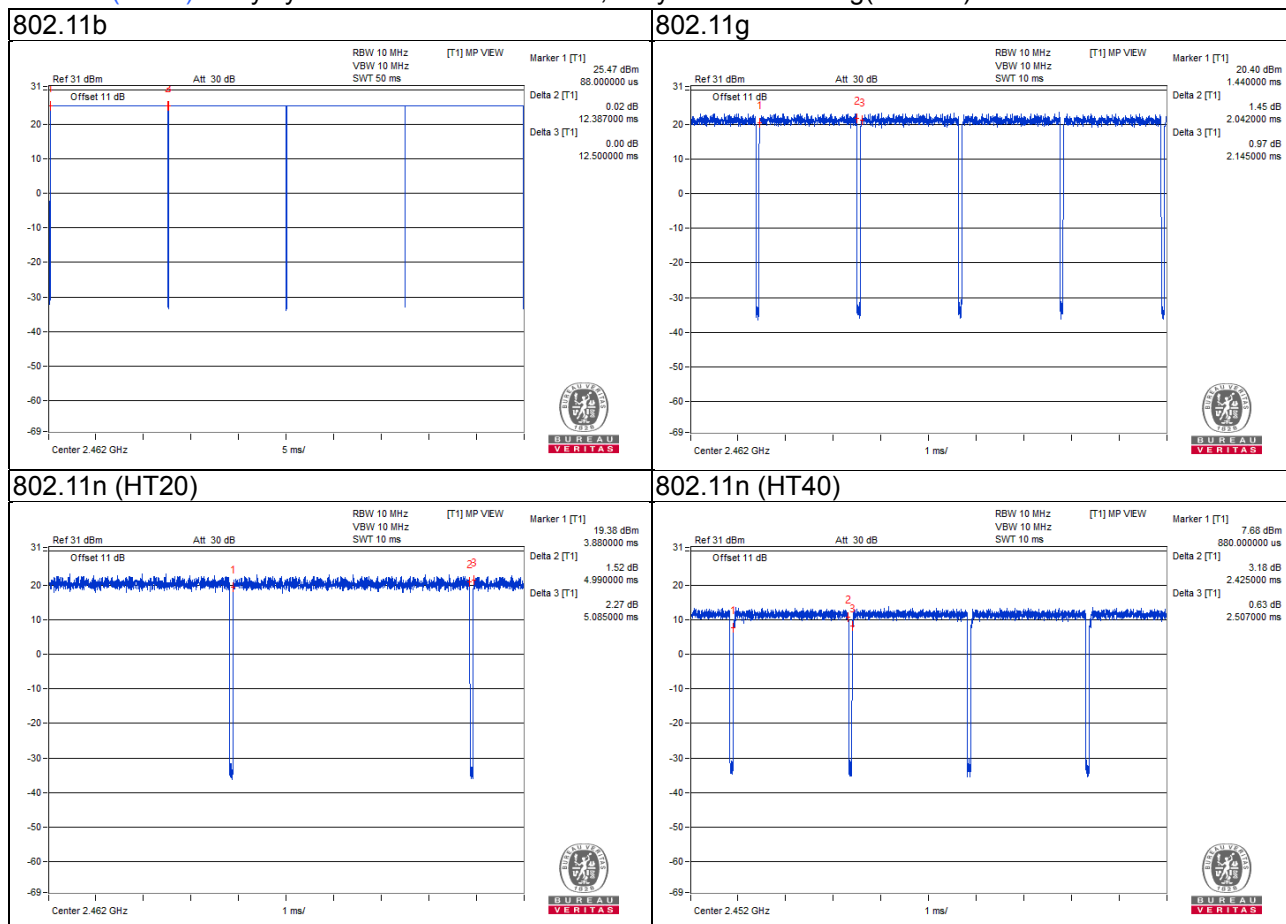

3.4 Description of Support Units


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	PoE	LEADER ELECTRONICS INC.	NU90-J540167-I1	NA	NA	Provided by client


ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ45 cable	1	10	N	0	Cat5e

3.4.1 Configuration of System under Test

Mode A, B

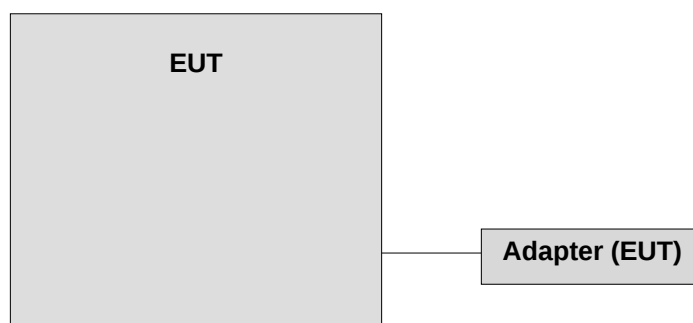

Mode C

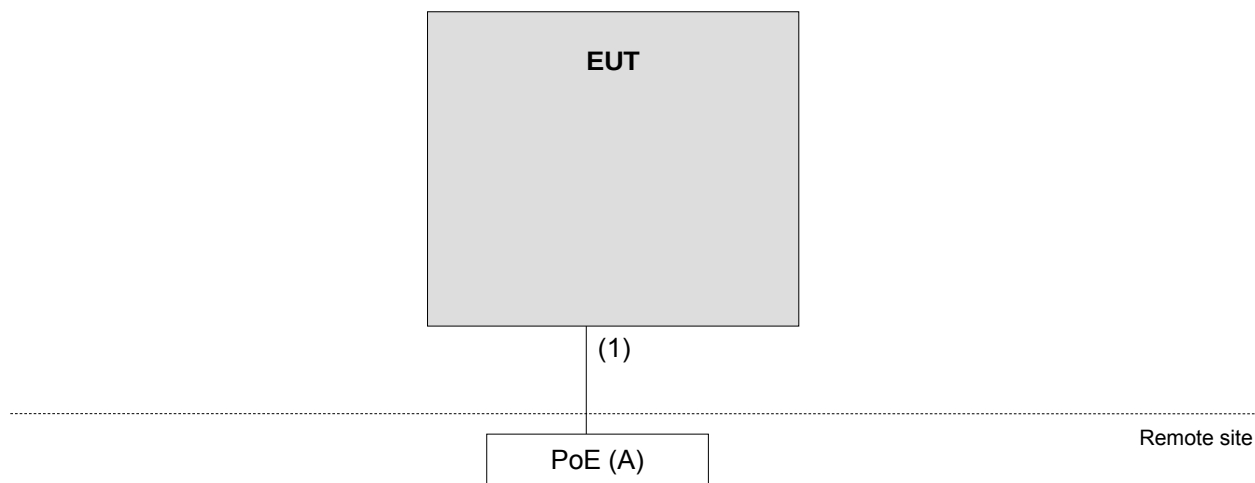

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

KDB 558074 D01 15.247 Meas Guidance v05r02

KDB 662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results (For 2.4GHz Band)

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver KEYSIGHT	N9038A	MY55420137	Apr. 15, 2019	Apr. 14, 2020
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100269	Jun. 04, 2019	Jun. 03, 2020
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Nov. 21, 2018	Nov. 20, 2019
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-1169	Nov. 25, 2018	Nov. 24, 2019
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Nov. 25, 2018	Nov. 24, 2019
Loop Antenna TESEQ	HLA 6121	45745	Jul. 01, 2019	Jun. 30, 2020
Preamplifier Agilent (Below 1GHz)	8447D	2944A10638	Aug. 08, 2018	Aug. 07, 2019
			Jul. 11, 2019	Jul. 10, 2020
Preamplifier Agilent (Above 1GHz)	8449B	3008A02367	Feb. 19, 2019	Feb. 18, 2020
RF signal cable HUBER+SUHNER&EMCI	SUCOFLEX 104 & EMC104-SM-SM80 00	CABLE-CH9-02 (248780+171006)	Jan. 19, 2019	Jan. 18, 2020
RF signal cable HUBER+SUHNER	SUCOFLEX 104	CABLE-CH9-(2507 95/4)	Aug. 08, 2018	Aug. 07, 2019
			Jul. 11, 2019	Jul. 10, 2020
RF signal cable Woken	8D-FB	Cable-CH9-01	Jul. 31, 2018	Jul. 30, 2019
			Jul. 30, 2019	Jul. 29, 2020
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA	NA
Turn Table EMCO	2087-2.03	NA	NA	NA
Antenna Tower & Turn BV ADT	AT100	AT93021705	NA	NA
Turn Table BV ADT	TT100	TT93021705	NA	NA
Turn Table Controller BV ADT	SC100	SC93021705	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
USB Wideband Power Sensor KEYSIGHT	U2021XA	MY55050005/MY5 5190004/MY55190 007/MY55210005	Jul. 17, 2018	Jul. 16, 2019
			Jul. 18, 2019	Jul. 17, 2020

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 9.

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10 Hz (Duty cycle $\geq 98\%$) for Peak detection at frequency above 1GHz.
(11b: RBW = 1 MHz, VBW = 10 Hz ; 11g: RBW = 1 MHz, VBW = 1 kHz ; 11n (HT20): RBW = 1 MHz, VBW = 10 Hz ; 11n (HT40): RBW = 1 MHz, VBW = 1 kHz)
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Set Up


For Radiated emission below 30MHz

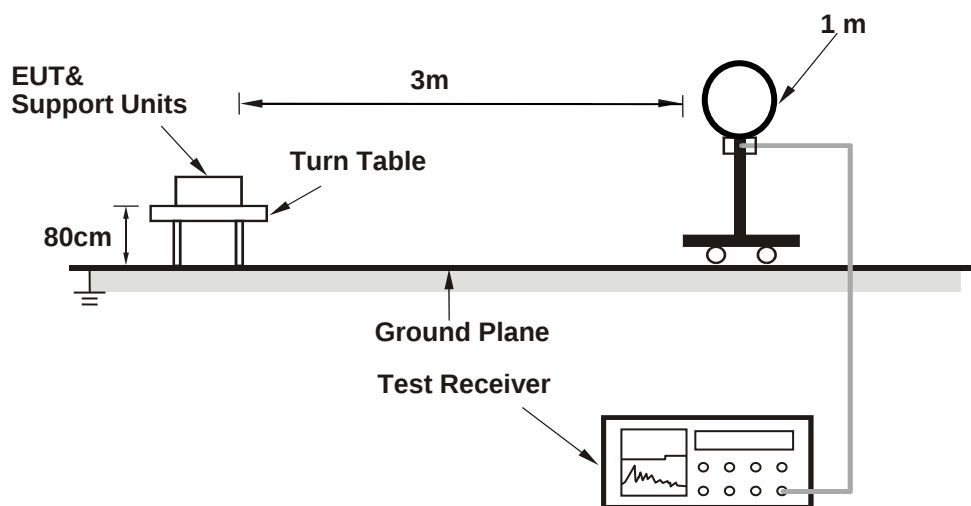

For Radiated emission 30MHz to 1GHz

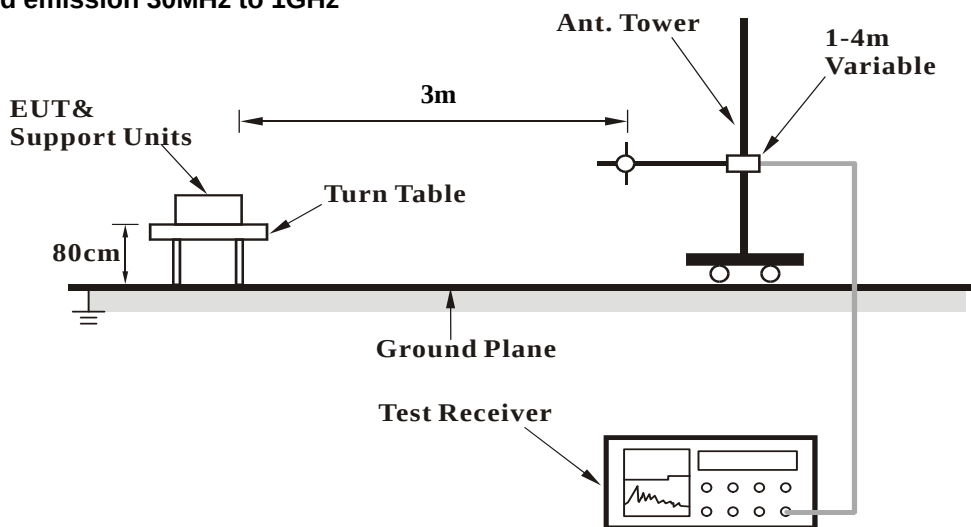

For Radiated emission above 1GHz

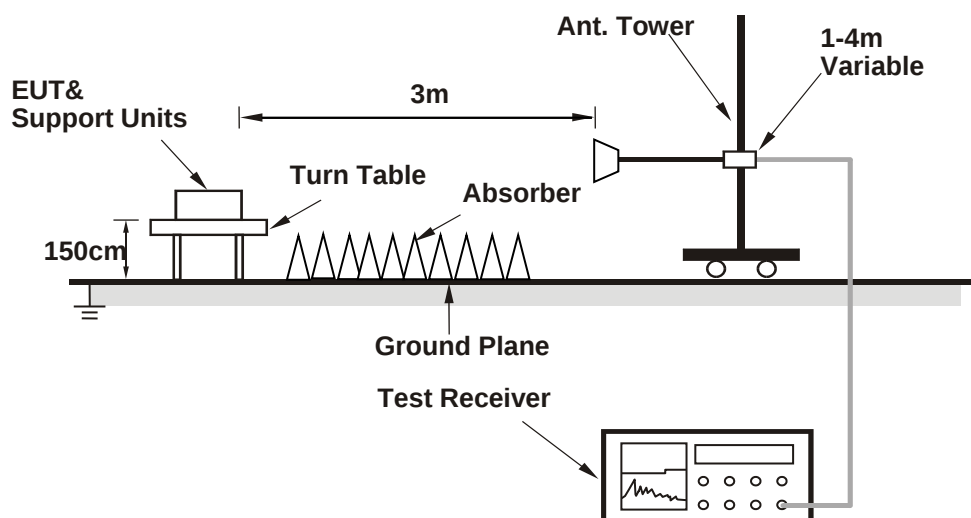

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Placed the EUT on the testing table.
- The EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the system in full functions.

4.1.7 Test Results

Above 1GHz Worst-case Data:

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.3 PK	74.0	-12.7	1.75 H	61	29.5	31.8
2	2390.00	53.3 AV	54.0	-0.7	1.75 H	61	21.5	31.8
3	*2412.00	118.2 PK			1.79 H	53	86.3	31.9
4	*2412.00	114.7 AV			1.79 H	53	82.8	31.9
5	4824.00	46.3 PK	74.0	-27.7	2.36 H	232	42.7	3.6
6	4824.00	31.9 AV	54.0	-22.1	2.36 H	232	28.3	3.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.5 PK	74.0	-13.5	3.32 V	317	28.7	31.8
2	2390.00	52.4 AV	54.0	-1.6	3.32 V	317	20.6	31.8
3	*2412.00	116.7 PK			3.38 V	326	84.8	31.9
4	*2412.00	113.2 AV			3.38 V	326	81.3	31.9
5	4824.00	45.3 PK	74.0	-28.7	2.67 V	33	41.7	3.6
6	4824.00	31.2 AV	54.0	-22.8	2.67 V	33	27.6	3.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	118.9 PK			1.13 H	48	87.1	31.8
2	*2437.00	114.9 AV			1.13 H	48	83.1	31.8
3	4874.00	46.9 PK	74.0	-27.1	2.44 H	227	43.4	3.5
4	4874.00	32.2 AV	54.0	-21.8	2.44 H	227	28.7	3.5
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	117.5 PK			3.42 V	322	85.7	31.8
2	*2437.00	113.5 AV			3.42 V	322	81.7	31.8
3	4874.00	46.1 PK	74.0	-27.9	2.71 V	24	42.6	3.5
4	4874.00	31.7 AV	54.0	-22.3	2.71 V	24	28.2	3.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	120.7 PK			1.05 H	62	88.9	31.8
2	*2462.00	117.0 AV			1.05 H	62	85.2	31.8
3	2483.50	67.0 PK	74.0	-7.0	1.14 H	57	35.2	31.8
4	2483.50	52.4 AV	54.0	-1.6	1.14 H	57	20.6	31.8
5	4924.00	47.1 PK	74.0	-26.9	2.43 H	228	43.6	3.5
6	4924.00	32.3 AV	54.0	-21.7	2.43 H	228	28.8	3.5
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	119.2 PK			3.34 V	320	87.4	31.8
2	*2462.00	115.5 AV			3.34 V	320	83.7	31.8
3	2483.50	66.2 PK	74.0	-7.8	3.43 V	314	34.4	31.8
4	2483.50	51.6 AV	54.0	-2.4	3.43 V	314	19.8	31.8
5	4924.00	45.9 PK	74.0	-28.1	2.58 V	21	42.4	3.5
6	4924.00	31.8 AV	54.0	-22.2	2.58 V	21	28.3	3.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11g

CHANNEL	TX Channel 1	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.6 PK	74.0	-8.4	2.27 H	58	33.8	31.8
2	2390.00	53.3 AV	54.0	-0.7	2.27 H	58	21.5	31.8
3	*2412.00	118.7 PK			2.53 H	56	86.8	31.9
4	*2412.00	108.7 AV			2.53 H	56	76.8	31.9
5	4824.00	44.8 PK	74.0	-29.2	3.51 H	262	41.2	3.6
6	4824.00	31.8 AV	54.0	-22.2	3.51 H	262	28.2	3.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	63.9 PK	74.0	-10.1	3.56 V	339	32.1	31.8
2	2390.00	51.5 AV	54.0	-2.5	3.56 V	339	19.7	31.8
3	*2412.00	116.3 PK			3.67 V	345	84.4	31.9
4	*2412.00	106.3 AV			3.67 V	345	74.4	31.9
5	4824.00	44.2 PK	74.0	-29.8	2.76 V	34	40.6	3.6
6	4824.00	31.1 AV	54.0	-22.9	2.76 V	34	27.5	3.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	123.5 PK			2.35 H	59	91.7	31.8
2	*2437.00	113.5 AV			2.35 H	59	81.7	31.8
3	2483.50	66.9 PK	74.0	-7.1	2.50 H	50	35.1	31.8
4	2483.50	53.5 AV	54.0	-0.5	2.50 H	50	21.7	31.8
5	4874.00	45.8 PK	74.0	-28.2	3.36 H	247	42.3	3.5
6	4874.00	32.2 AV	54.0	-21.8	3.36 H	247	28.7	3.5
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	121.2 PK			3.61 V	337	89.4	31.8
2	*2437.00	111.2 AV			3.61 V	337	79.4	31.8
3	2483.50	65.0 PK	74.0	-9.0	3.52 V	332	33.2	31.8
4	2483.50	51.6 AV	54.0	-2.4	3.52 V	332	19.8	31.8
5	4874.00	45.2 PK	74.0	-28.8	2.71 V	42	41.7	3.5
6	4874.00	31.7 AV	54.0	-22.3	2.71 V	42	28.2	3.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	118.6 PK			2.49 H	65	86.8	31.8
2	*2462.00	108.5 AV			2.49 H	65	76.7	31.8
3	2483.50	67.4 PK	74.0	-6.6	1.16 H	42	35.6	31.8
4	2483.50	53.1 AV	54.0	-0.9	1.16 H	42	21.3	31.8
5	4924.00	44.6 PK	74.0	-29.4	3.41 H	266	41.1	3.5
6	4924.00	31.5 AV	54.0	-22.5	3.41 H	266	28.0	3.5
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	116.2 PK			3.59 V	336	84.4	31.8
2	*2462.00	106.1 AV			3.59 V	336	74.3	31.8
3	2483.50	65.5 PK	74.0	-8.5	3.52 V	327	33.7	31.8
4	2483.50	51.3 AV	54.0	-2.7	3.52 V	327	19.5	31.8
5	4924.00	44.1 PK	74.0	-29.9	2.83 V	40	40.6	3.5
6	4924.00	30.8 AV	54.0	-23.2	2.83 V	40	27.3	3.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11n (HT20)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.9 PK	74.0	-9.1	1.18 H	91	33.1	31.8
2	2390.00	53.0 AV	54.0	-1.0	1.18 H	91	21.2	31.8
3	*2412.00	116.7 PK			1.88 H	51	84.8	31.9
4	*2412.00	106.5 AV			1.88 H	51	74.6	31.9
5	4824.00	44.3 PK	74.0	-29.7	3.43 H	257	40.7	3.6
6	4824.00	31.3 AV	54.0	-22.7	3.43 H	257	27.7	3.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.5 PK	74.0	-11.5	3.42 V	344	30.7	31.8
2	2390.00	51.2 AV	54.0	-2.8	3.42 V	344	19.4	31.8
3	*2412.00	114.3 PK			3.55 V	351	82.4	31.9
4	*2412.00	104.1 AV			3.55 V	351	72.2	31.9
5	4824.00	44.0 PK	74.0	-30.0	2.63 V	17	40.4	3.6
6	4824.00	30.8 AV	54.0	-23.2	2.63 V	17	27.2	3.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.7 PK	74.0	-6.3	2.34 H	59	35.9	31.8
2	2390.00	53.2 AV	54.0	-0.8	2.34 H	59	21.4	31.8
3	*2437.00	122.6 PK			2.53 H	49	90.8	31.8
4	*2437.00	112.2 AV			2.53 H	49	80.4	31.8
5	4874.00	44.9 PK	74.0	-29.1	3.52 H	261	41.4	3.5
6	4874.00	31.8 AV	54.0	-22.2	3.52 H	261	28.3	3.5
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.6 PK	74.0	-8.4	3.54 V	337	33.8	31.8
2	2390.00	51.5 AV	54.0	-2.5	3.54 V	337	19.7	31.8
3	*2437.00	120.2 PK			3.62 V	343	88.4	31.8
4	*2437.00	109.8 AV			3.62 V	343	78.0	31.8
5	4874.00	44.1 PK	74.0	-29.9	2.59 V	9	40.6	3.5
6	4874.00	31.0 AV	54.0	-23.0	2.59 V	9	27.5	3.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	116.4 PK			2.46 H	50	84.6	31.8
2	*2462.00	105.9 AV			2.46 H	50	74.1	31.8
3	2483.50	66.0 PK	74.0	-8.0	1.00 H	53	34.2	31.8
4	2483.50	52.9 AV	54.0	-1.1	1.00 H	53	21.1	31.8
5	4924.00	44.4 PK	74.0	-29.6	3.53 H	256	40.9	3.5
6	4924.00	31.3 AV	54.0	-22.7	3.53 H	256	27.8	3.5
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	114.1 PK			3.47 V	336	82.3	31.8
2	*2462.00	103.6 AV			3.47 V	336	71.8	31.8
3	2483.50	64.6 PK	74.0	-9.4	3.41 V	328	32.8	31.8
4	2483.50	51.1 AV	54.0	-2.9	3.41 V	328	19.3	31.8
5	4924.00	43.9 PK	74.0	-30.1	2.56 V	23	40.4	3.5
6	4924.00	30.8 AV	54.0	-23.2	2.56 V	23	27.3	3.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11n (HT40)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.0 PK	74.0	-10.0	2.07 H	62	32.2	31.8
2	2390.00	53.2 AV	54.0	-0.8	2.07 H	62	21.4	31.8
3	*2422.00	110.1 PK			2.44 H	50	78.3	31.8
4	*2422.00	100.1 AV			2.44 H	50	68.3	31.8
5	4844.00	44.2 PK	74.0	-29.8	3.45 H	254	40.7	3.5
6	4844.00	31.2 AV	54.0	-22.8	3.45 H	254	27.7	3.5
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.2 PK	74.0	-11.8	3.47 V	332	30.4	31.8
2	2390.00	51.4 AV	54.0	-2.6	3.47 V	332	19.6	31.8
3	*2422.00	107.9 PK			3.54 V	341	76.1	31.8
4	*2422.00	97.8 AV			3.54 V	341	66.0	31.8
5	4844.00	43.8 PK	74.0	-30.2	2.63 V	18	40.3	3.5
6	4844.00	30.6 AV	54.0	-23.4	2.63 V	18	27.1	3.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.3 PK	74.0	-7.7	1.72 H	46	34.2	32.1
2	2390.00	53.2 AV	54.0	-0.8	1.72 H	46	21.1	32.1
3	*2437.00	113.2 PK			2.08 H	57	81.1	32.1
4	*2437.00	103.2 AV			2.08 H	57	71.1	32.1
5	2483.50	63.3 PK	74.0	-10.7	2.15 H	51	31.2	32.1
6	2483.50	50.2 AV	54.0	-3.8	2.15 H	51	18.1	32.1
7	4874.00	44.3 PK	74.0	-29.7	1.88 H	215	40.3	4.0
8	4874.00	30.9 AV	54.0	-23.1	1.88 H	215	26.9	4.0
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.6 PK	74.0	-15.4	2.40 V	346	26.5	32.1
2	2390.00	47.0 AV	54.0	-7.0	2.40 V	346	14.9	32.1
3	*2437.00	110.0 PK			3.39 V	340	77.9	32.1
4	*2437.00	99.3 AV			3.39 V	340	67.2	32.1
5	2483.50	64.7 PK	74.0	-9.3	3.34 V	339	32.6	32.1
6	2483.50	50.2 AV	54.0	-3.8	3.34 V	339	18.1	32.1
7	4874.00	43.8 PK	74.0	-30.2	2.39 V	211	39.8	4.0
8	4874.00	30.5 AV	54.0	-23.5	2.39 V	211	26.5	4.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	109.3 PK			2.45 H	60	77.5	31.8
2	*2452.00	99.3 AV			2.45 H	60	67.5	31.8
3	2483.50	65.2 PK	74.0	-8.8	2.16 H	48	33.4	31.8
4	2483.50	53.2 AV	54.0	-0.8	2.16 H	48	21.4	31.8
5	4904.00	44.2 PK	74.0	-29.8	3.56 H	244	40.8	3.4
6	4904.00	31.0 AV	54.0	-23.0	3.56 H	244	27.6	3.4
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	107.0 PK			3.52 V	344	75.2	31.8
2	*2452.00	97.0 AV			3.52 V	344	65.2	31.8
3	2483.50	63.4 PK	74.0	-10.6	3.46 V	335	31.6	31.8
4	2483.50	51.5 AV	54.0	-2.5	3.46 V	335	19.7	31.8
5	4904.00	43.7 PK	74.0	-30.3	2.73 V	22	40.3	3.4
6	4904.00	30.2 AV	54.0	-23.8	2.73 V	22	26.8	3.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

Below 1GHz Worst-case Data:


802.11g

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	A

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	76.56	28.0 QP	40.0	-12.0	1.25 H	70	41.3	-13.3
2	243.40	38.7 QP	46.0	-7.3	1.00 H	39	48.6	-9.9
3	375.32	40.0 QP	46.0	-6.0	1.50 H	259	46.7	-6.7
4	482.02	38.4 QP	46.0	-7.6	1.25 H	354	43.3	-4.9
5	624.61	38.8 QP	46.0	-7.2	1.50 H	168	40.5	-1.7
6	874.87	37.6 QP	46.0	-8.4	1.25 H	354	35.0	2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
4. Margin value = Emission Level – Limit value
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20dB below the permissible value to be report.

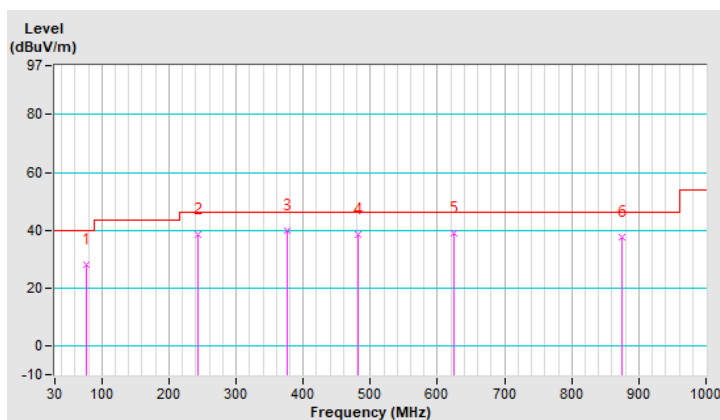


CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	A

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	47.46	32.3 QP	40.0	-7.7	1.00 V	138	42.2	-9.9
2	243.40	29.5 QP	46.0	-16.5	1.25 V	66	39.4	-9.9
3	375.32	40.4 QP	46.0	-5.6	1.25 V	159	47.1	-6.7
4	483.96	42.3 QP	46.0	-3.7	1.00 V	33	47.1	-4.8
5	624.61	38.7 QP	46.0	-7.3	1.25 V	29	40.4	-1.7
6	874.87	37.9 QP	46.0	-8.1	1.50 V	208	35.3	2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
4. Margin value = Emission Level – Limit value
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20dB below the permissible value to be report.

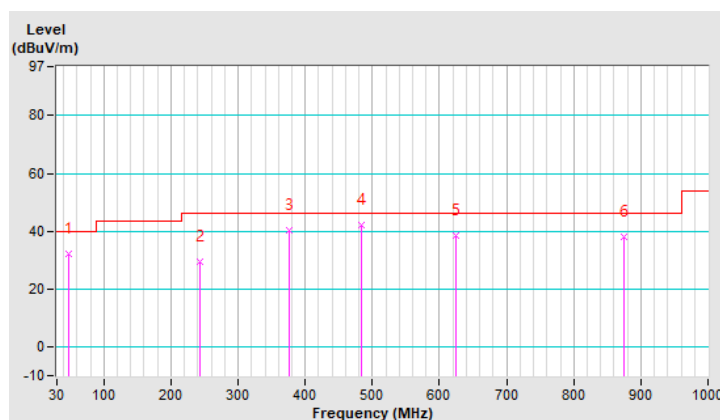


CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	B

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	70.74	33.4 QP	40.0	-6.6	1.50 H	58	45.2	-11.8
2	249.22	41.1 QP	46.0	-4.9	1.25 H	338	50.8	-9.7
3	375.32	38.6 QP	46.0	-7.4	1.25 H	321	45.3	-6.7
4	480.08	36.8 QP	46.0	-9.2	1.00 H	355	41.7	-4.9
5	624.61	37.0 QP	46.0	-9.0	1.25 H	322	38.7	-1.7
6	874.87	36.4 QP	46.0	-9.6	1.50 H	175	33.8	2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
4. Margin value = Emission Level – Limit value
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20dB below the permissible value to be report.

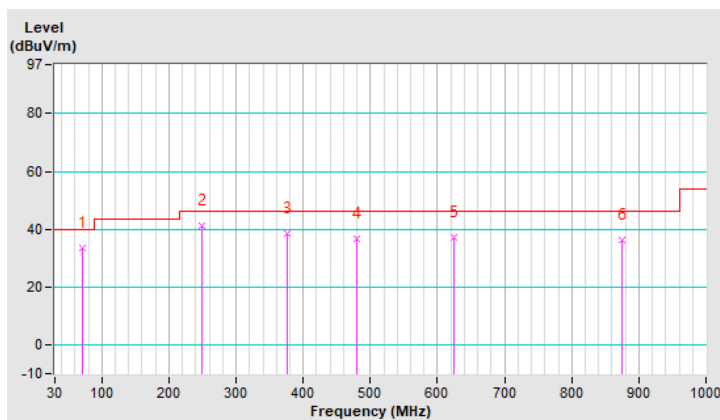


CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	B

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	137.67	30.5 QP	43.5	-13.0	1.50 V	187	40.6	-10.1
2	311.30	31.2 QP	46.0	-14.8	1.25 V	103	38.8	-7.6
3	375.32	38.8 QP	46.0	-7.2	1.00 V	158	45.5	-6.7
4	486.87	39.4 QP	46.0	-6.6	1.25 V	14	44.2	-4.8
5	624.61	35.0 QP	46.0	-11.0	1.00 V	111	36.7	-1.7
6	874.87	36.3 QP	46.0	-9.7	1.50 V	193	33.7	2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
4. Margin value = Emission Level – Limit value
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20dB below the permissible value to be report.

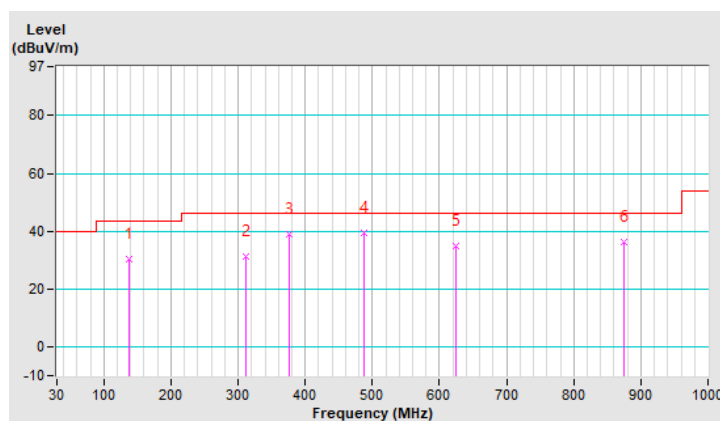


CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	C

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	42.61	31.6 QP	40.0	-8.4	1.50 H	279	41.7	-10.1
2	97.90	30.2 QP	43.5	-13.3	1.00 H	275	44.3	-14.1
3	245.34	39.4 QP	46.0	-6.6	1.50 H	273	49.2	-9.8
4	375.32	38.1 QP	46.0	-7.9	1.25 H	310	44.8	-6.7
5	481.05	36.9 QP	46.0	-9.1	1.25 H	338	41.8	-4.9
6	624.61	39.1 QP	46.0	-6.9	1.00 H	162	40.8	-1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
4. Margin value = Emission Level – Limit value
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20dB below the permissible value to be report.

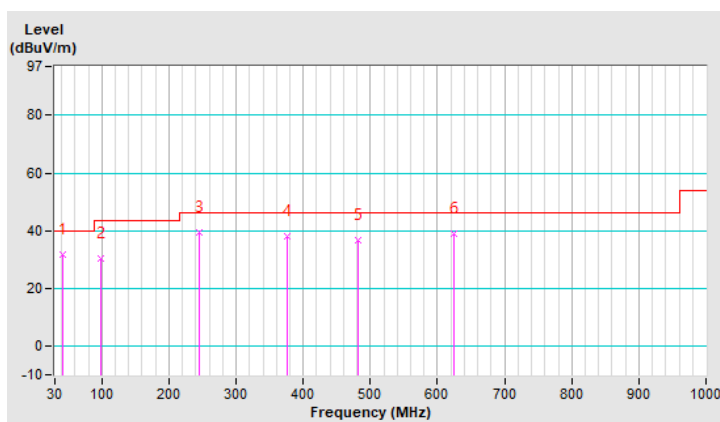


CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	C

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	132.82	31.7 QP	43.5	-11.8	1.50 V	339	42.2	-10.5
2	266.68	32.9 QP	46.0	-13.1	1.00 V	254	41.8	-8.9
3	375.32	36.6 QP	46.0	-9.4	1.25 V	142	43.3	-6.7
4	412.18	35.8 QP	46.0	-10.2	1.00 V	257	41.8	-6.0
5	481.05	41.5 QP	46.0	-4.5	1.25 V	6	46.4	-4.9
6	624.61	37.8 QP	46.0	-8.2	1.50 V	74	39.5	-1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
4. Margin value = Emission Level – Limit value
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20dB below the permissible value to be report.

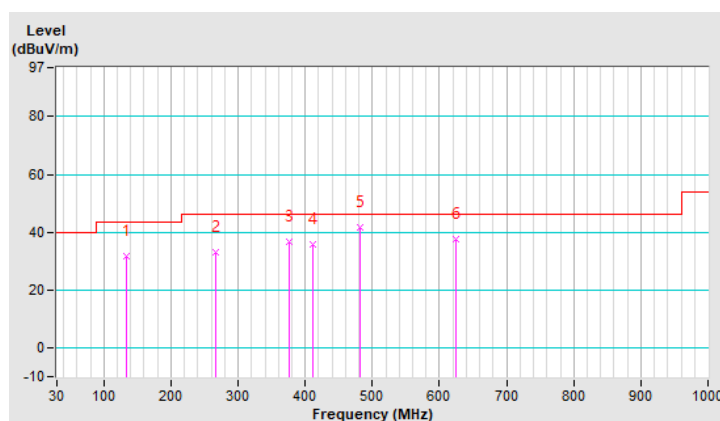

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date Of Calibration	Due Date Of Calibration
Test Receiver ROHDE & SCHWARZ	ESCI	100613	Dec. 10, 2018	Dec. 09, 2019
RF signal cable Woken	5D-FB	Cable-cond1-01	Sep. 05, 2018	Sep. 04, 2019
LISN ROHDE & SCHWARZ (EUT)	ENV216	101826	Feb. 21, 2019	Feb. 20, 2020
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Aug. 19, 2018	Aug. 18, 2019
Software ADT	BV ADT_Cond_ V7.3.7.4	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Shielded Room 1.
3. The VCCI Site Registration No. is C-12040.

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

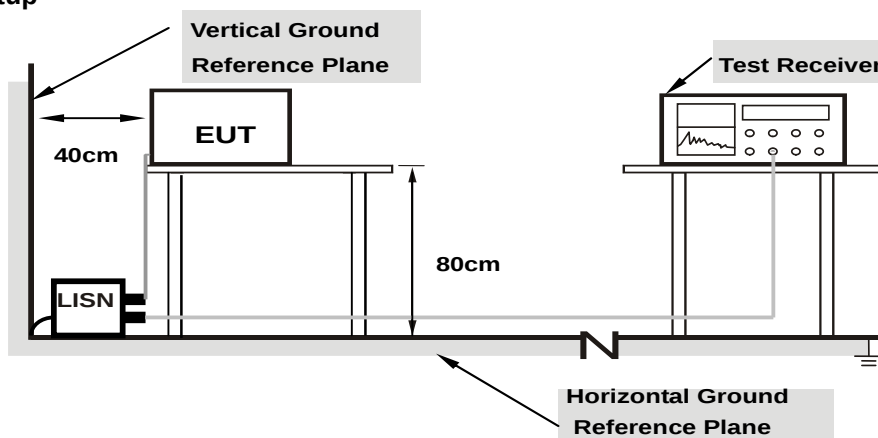

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	9.69	40.59	24.01	50.28	33.70	65.79	55.79	-15.51	-22.09
2	0.19665	9.68	32.91	17.27	42.59	26.95	63.75	53.75	-21.16	-26.80
3	0.30249	9.68	34.51	28.39	44.19	38.07	60.17	50.17	-15.98	-12.10
4	0.59943	9.68	19.18	12.03	28.86	21.71	56.00	46.00	-27.14	-24.29
5	6.26133	9.80	8.00	2.26	17.80	12.06	60.00	50.00	-42.20	-37.94
6	10.15627	9.87	5.66	1.47	15.53	11.34	60.00	50.00	-44.47	-38.66

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

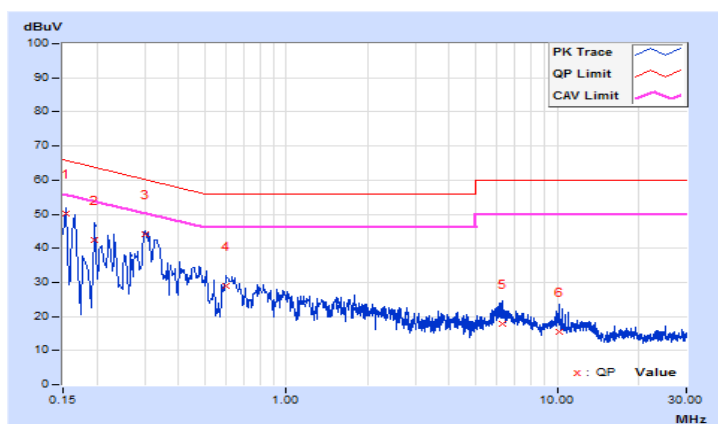


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15782	9.66	40.54	25.04	50.20	34.70	65.58	55.58	-15.38	-20.88
2	0.18903	9.66	34.72	18.89	44.38	28.55	64.08	54.08	-19.70	-25.53
3	0.27120	9.66	27.28	14.83	36.94	24.49	61.08	51.08	-24.14	-26.59
4	0.32786	9.65	31.99	24.60	41.64	34.25	59.51	49.51	-17.87	-15.26
5	0.45455	9.65	18.86	10.56	28.51	20.21	56.79	46.79	-28.28	-26.58
6	10.03448	9.85	13.10	7.93	22.95	17.78	60.00	50.00	-37.05	-32.22

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

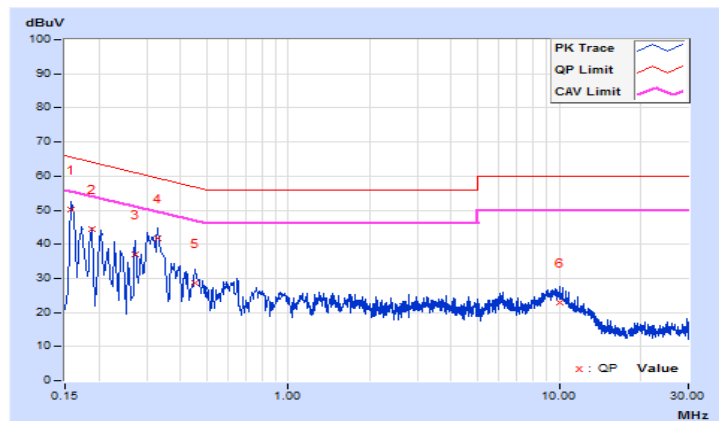


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.69	32.46	16.76	42.15	26.45	66.00	56.00	-23.85	-29.55
2	0.19305	9.68	30.27	19.24	39.95	28.92	63.90	53.90	-23.95	-24.98
3	0.34926	9.68	34.28	24.09	43.96	33.77	58.98	48.98	-15.02	-15.21
4	2.66804	9.72	17.31	11.72	27.03	21.44	56.00	46.00	-28.97	-24.56
5	4.01308	9.75	18.45	11.89	28.20	21.64	56.00	46.00	-27.80	-24.36
6	18.01870	9.92	6.59	2.66	16.51	12.58	60.00	50.00	-43.49	-37.42

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

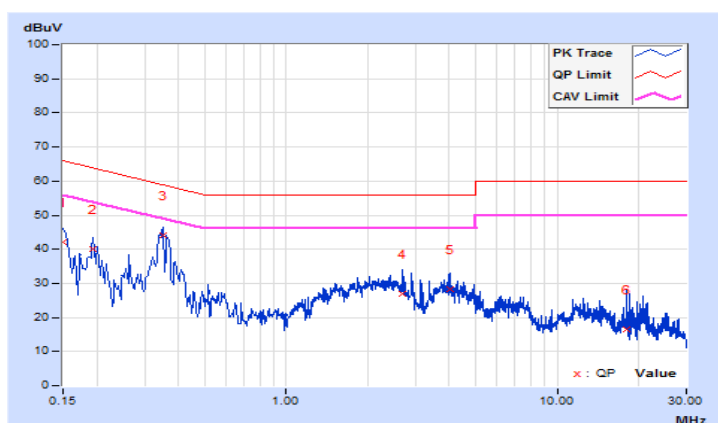


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16181	9.66	33.49	20.66	43.15	30.32	65.37	55.37	-22.22	-25.05
2	0.18903	9.66	30.14	17.96	39.80	27.62	64.08	54.08	-24.28	-26.46
3	0.34159	9.65	33.66	26.31	43.31	35.96	59.16	49.16	-15.85	-13.20
4	1.34245	9.65	15.43	10.25	25.08	19.90	56.00	46.00	-30.92	-26.10
5	4.27505	9.73	15.05	9.05	24.78	18.78	56.00	46.00	-31.22	-27.22
6	9.52227	9.84	11.78	3.70	21.62	13.54	60.00	50.00	-38.38	-36.46

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

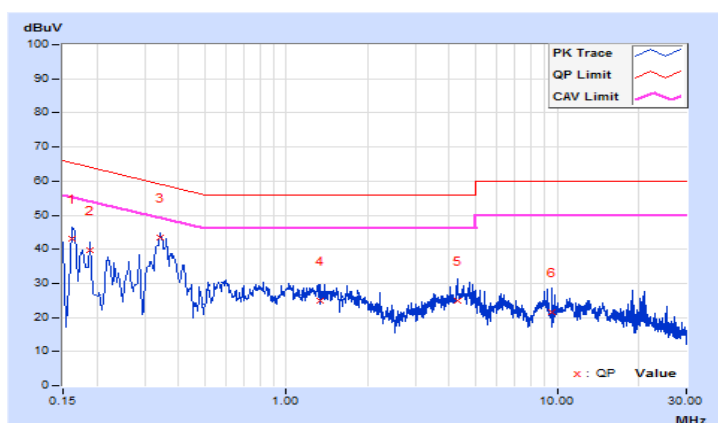


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	C		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.19769	9.66	30.47	19.98	40.13	29.64	63.71	53.71	-23.58	-24.07
2	0.29120	9.66	24.72	15.73	34.38	25.39	60.49	50.49	-26.11	-25.10
3	0.65044	9.65	24.17	18.21	33.82	27.86	56.00	46.00	-22.18	-18.14
4	1.43639	9.65	24.36	19.34	34.01	28.99	56.00	46.00	-21.99	-17.01
5	6.27306	9.76	26.25	20.08	36.01	29.84	60.00	50.00	-23.99	-20.16
6	24.05574	9.88	28.88	22.09	38.76	31.97	60.00	50.00	-21.24	-18.03

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

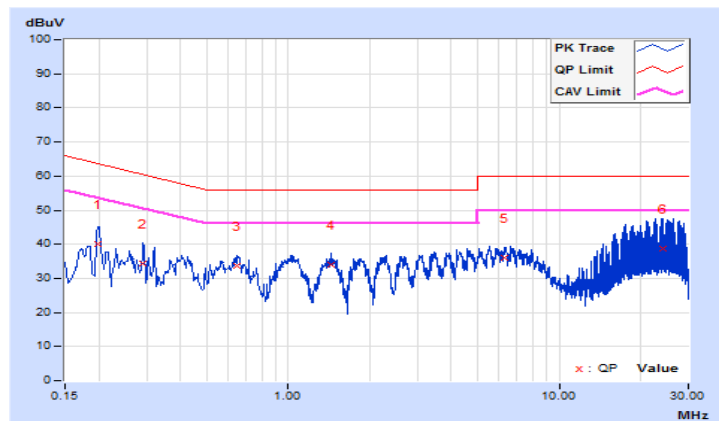


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	C		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.66	27.81	20.65	37.47	30.31	66.00	56.00	-28.53	-25.69
2	0.23993	9.66	26.76	18.69	36.42	28.35	62.10	52.10	-25.68	-23.75
3	0.40800	9.65	25.98	20.84	35.63	30.49	57.69	47.69	-22.06	-17.20
4	1.41684	9.64	24.37	19.38	34.01	29.02	56.00	46.00	-21.99	-16.98
5	6.63278	9.77	25.54	19.17	35.31	28.94	60.00	50.00	-24.69	-21.06
6	24.58750	9.97	37.96	37.27	47.93	47.24	60.00	50.00	-12.07	-2.76

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

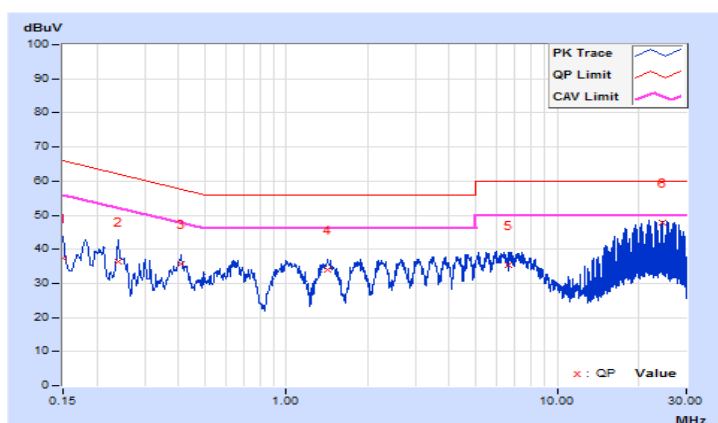


4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)			Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2		
1	2412	7.61	8.10	8.11	0.5	Pass
6	2437	8.12	8.11	8.07	0.5	Pass
11	2462	8.12	7.61	8.07	0.5	Pass

802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)			Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2		
1	2412	16.11	16.36	15.94	0.5	Pass
6	2437	16.36	16.10	15.74	0.5	Pass
11	2462	16.12	15.96	15.79	0.5	Pass

802.11n (HT20)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)			Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2		
1	2412	17.24	16.08	16.62	0.5	Pass
6	2437	16.91	16.32	17.18	0.5	Pass
11	2462	16.97	16.59	16.97	0.5	Pass

802.11n (HT40)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)			Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2		
3	2422	35.16	35.27	35.08	0.5	Pass
6	2437	35.15	35.23	35.06	0.5	Pass
9	2452	35.19	35.27	35.15	0.5	Pass

Spectrum Plot of Worst Value


802.11b

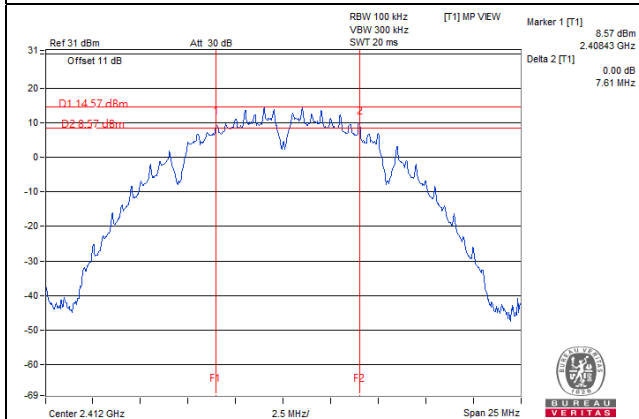


802.11g

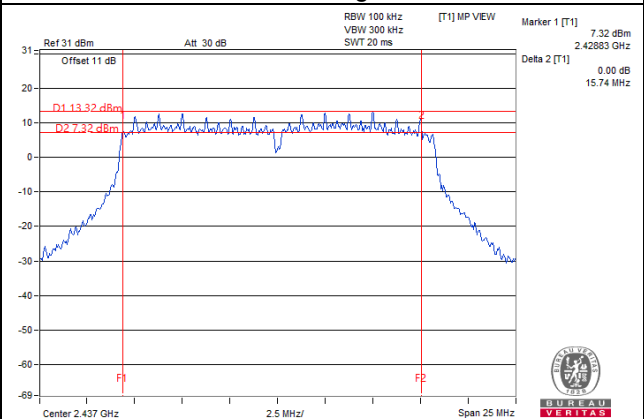

802.11n (HT20)

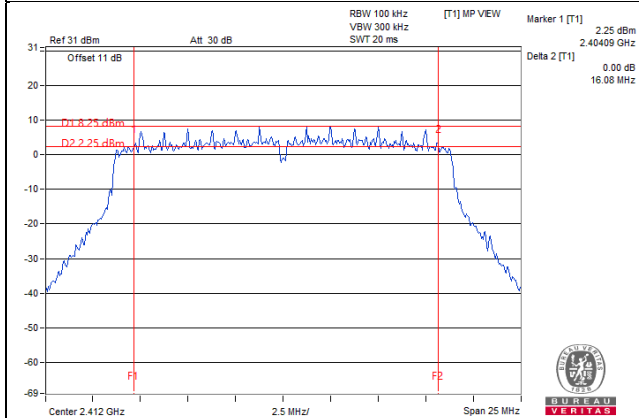

802.11n (HT40)

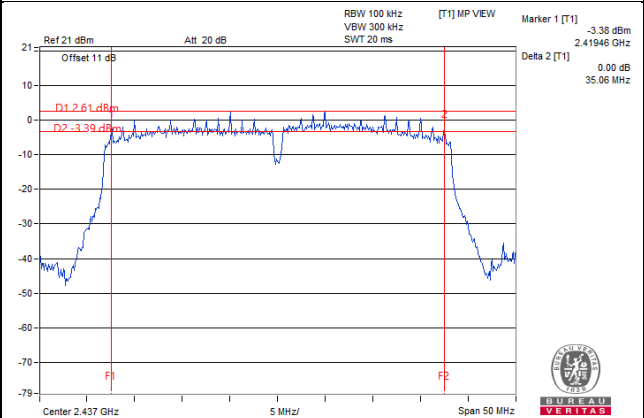

4.4 Conducted Output Power Measurement

4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

4.4.7 Test Results

CDD Mode

802.11b

Channel	Frequency (MHz)	Average Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
1	2412	22.21	22.53	22.39	518.782	27.15	30.00	Pass
6	2437	22.70	23.06	22.83	580.378	27.64	30.00	Pass
11	2462	22.74	23.10	22.84	584.415	27.67	30.00	Pass

802.11g

Channel	Frequency (MHz)	Average Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
1	2412	17.92	18.04	17.82	186.158	22.70	30.00	Pass
6	2437	22.84	23.12	22.78	587.096	27.69	30.00	Pass
11	2462	17.84	18.07	17.76	184.639	22.66	30.00	Pass

802.11n (HT20)

Channel	Frequency (MHz)	Average Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
1	2412	17.81	17.96	17.77	182.753	22.62	30.00	Pass
6	2437	22.81	23.04	22.73	579.856	27.63	30.00	Pass
11	2462	17.10	17.47	17.05	157.832	21.98	30.00	Pass

802.11n (HT40)

Channel	Frequency (MHz)	Average Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
3	2422	12.56	12.73	12.34	53.920	17.32	30.00	Pass
6	2437	16.42	16.46	16.23	130.088	21.14	30.00	Pass
9	2452	11.76	12.03	11.58	45.344	16.57	30.00	Pass

Beamforming Mode

802.11n (HT20)

Channel	Frequency (MHz)	Average Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
1	2412	13.04	13.19	13.00	60.935	17.85	28.23	Pass
6	2437	18.04	18.27	17.96	193.340	22.86	28.23	Pass
11	2462	12.33	12.70	12.28	52.625	17.21	28.23	Pass

Note: Beamforming gain = $3\text{dBi} + 10\log(3) = 7.77\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30 - (7.77 - 6) = 28.23\text{dBm}$.

802.11n (HT40)

Channel	Frequency (MHz)	Average Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
3	2422	7.79	7.96	7.57	17.979	12.55	28.23	Pass
6	2437	11.65	11.69	11.46	43.375	16.37	28.23	Pass
9	2452	6.99	7.26	6.81	15.118	11.79	28.23	Pass


Note: Beamforming gain = $3\text{dBi} + 10\log(3) = 7.77\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30 - (7.77 - 6) = 28.23\text{dBm}$.

4.5 Power Spectral Density Measurement

4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz band during any time interval of continuous transmission.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

For AVG. power (duty cycle $\geq 98\%$)

- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- Sweep time = auto couple.
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.

For AVG. power (duty cycle $< 98\%$)

- Measure the duty cycle (x).
- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- Sweep time = auto couple.
- Do not use sweep triggering. Allow sweep to "free run".
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.
- Add $10 \log (1/x)$, where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6

4.5.7 Test Results

802.11b

TX chain	Channel	Frequency (MHz)	PSD (dBm/10kHz)	10 log (N=3) dB	Total PSD (dBm/10kHz)	Limit (dBm/3kHz)	Pass / Fail
0	1	2412	-4.34	4.77	0.43	6.23	Pass
	6	2437	-3.70	4.77	1.07	6.23	Pass
	11	2462	-4.36	4.77	0.41	6.23	Pass
1	1	2412	-3.84	4.77	0.93	6.23	Pass
	6	2437	-4.28	4.77	0.49	6.23	Pass
	11	2462	-3.19	4.77	1.58	6.23	Pass
2	1	2412	-3.96	4.77	0.81	6.23	Pass
	6	2437	-3.55	4.77	1.22	6.23	Pass
	11	2462	-3.58	4.77	1.19	6.23	Pass

Note:

1. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density.
2. Directional gain = $3\text{dBi} + 10\log(3) = 7.77\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8 - (7.77 - 6) = 6.23\text{dBm}$.

802.11g

TX chain	Channel	Frequency (MHz)	PSD w/o Duty Factor (dBm/10kHz)	10 log (N=3) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/10kHz)	Limit (dBm/3kHz)	Pass / Fail
0	1	2412	-11.72	4.77	0.21	-6.74	6.23	Pass
	6	2437	-6.90	4.77	0.21	-1.92	6.23	Pass
	11	2462	-11.85	4.77	0.21	-6.87	6.23	Pass
1	1	2412	-10.83	4.77	0.21	-5.85	6.23	Pass
	6	2437	-5.71	4.77	0.21	-0.73	6.23	Pass
	11	2462	-10.98	4.77	0.21	-6.00	6.23	Pass
2	1	2412	-11.30	4.77	0.21	-6.32	6.23	Pass
	6	2437	-5.91	4.77	0.21	-0.93	6.23	Pass
	11	2462	-11.17	4.77	0.21	-6.19	6.23	Pass

Note:

1. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density.
2. Directional gain = $3\text{dBi} + 10\log(3) = 7.77\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8 - (7.77 - 6) = 6.23\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT20)

TX chain	Channel	Frequency (MHz)	PSD (dBm/10kHz)	10 log (N=3) dB	Total PSD (dBm/10kHz)	Limit (dBm/3kHz)	Pass / Fail
0	1	2412	-11.81	4.77	-7.04	6.23	Pass
	6	2437	-7.02	4.77	-2.25	6.23	Pass
	11	2462	-12.05	4.77	-7.28	6.23	Pass
1	1	2412	-10.38	4.77	-5.61	6.23	Pass
	6	2437	-5.55	4.77	-0.78	6.23	Pass
	11	2462	-11.35	4.77	-6.58	6.23	Pass
2	1	2412	-11.52	4.77	-6.75	6.23	Pass
	6	2437	-6.67	4.77	-1.90	6.23	Pass
	11	2462	-11.96	4.77	-7.19	6.23	Pass

Note:

1. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density.
2. Directional gain = $3\text{dBi} + 10\log(3) = 7.77\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8 - (7.77 - 6) = 6.23\text{dBm}$.

802.11n (HT40)


TX chain	Channel	Frequency (MHz)	PSD w/o Duty Factor (dBm/10kHz)	10 log (N=3) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/10kHz)	Limit (dBm/3kHz)	Pass / Fail
0	3	2422	-20.62	4.77	0.14	-15.71	6.23	Pass
	6	2437	-17.50	4.77	0.14	-12.59	6.23	Pass
	9	2452	-21.38	4.77	0.14	-16.47	6.23	Pass
1	3	2422	-19.59	4.77	0.14	-14.68	6.23	Pass
	6	2437	-16.71	4.77	0.14	-11.80	6.23	Pass
	9	2452	-20.43	4.77	0.14	-15.52	6.23	Pass
2	3	2422	-19.47	4.77	0.14	-14.56	6.23	Pass
	6	2437	-17.13	4.77	0.14	-12.22	6.23	Pass
	9	2452	-19.97	4.77	0.14	-15.06	6.23	Pass

Note:


1. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density.
2. Directional gain = $3\text{dBi} + 10\log(3) = 7.77\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8 - (7.77 - 6) = 6.23\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.

Spectrum Plot of Worst Value


802.11b

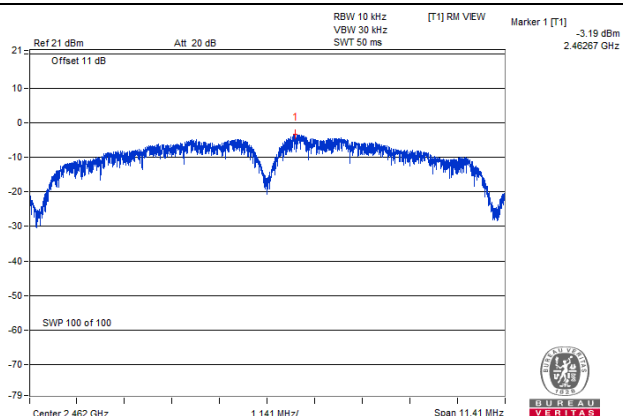


802.11g

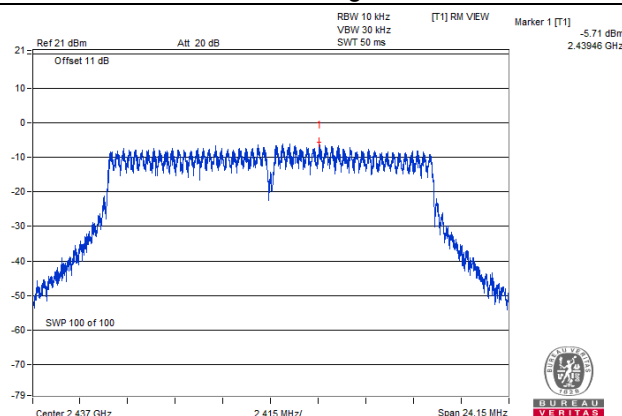

802.11n (HT20)

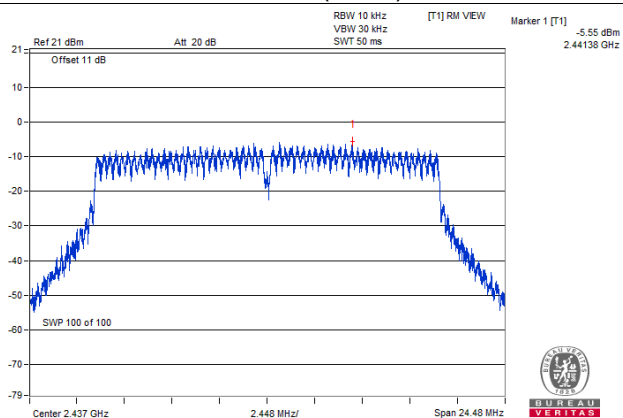

802.11n (HT40)

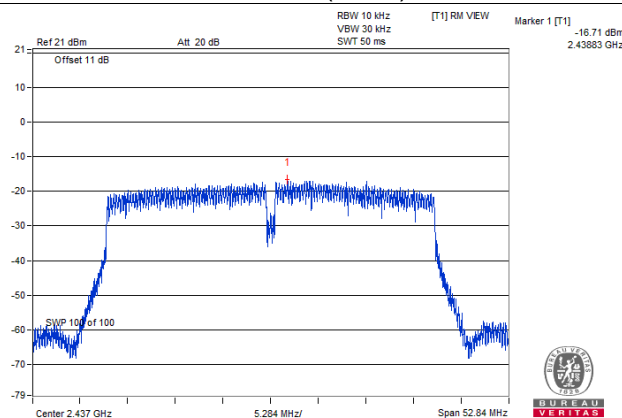


4.6 Conducted Out of Band Emission Measurement

4.6.1 Limits of Conducted Out of Band Emission Measurement

Below -30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

- Set the RBW = 100 kHz.
- Set the VBW $\geq$ 300 kHz.
- Detector = average.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

- Set RBW = 100 kHz.
- Set VBW $\geq$ 300 kHz.
- Detector = peak.
- Sweep = auto couple.
- Trace Mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition

Same as Item 4.3.6


4.6.7 Test Results

The conducted emission test is performed on each TX port of operating mode without summing or adding $10\log(N)$ since the limit is relative emission limit.


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.

802.11b
CHAIN 0


CH 1

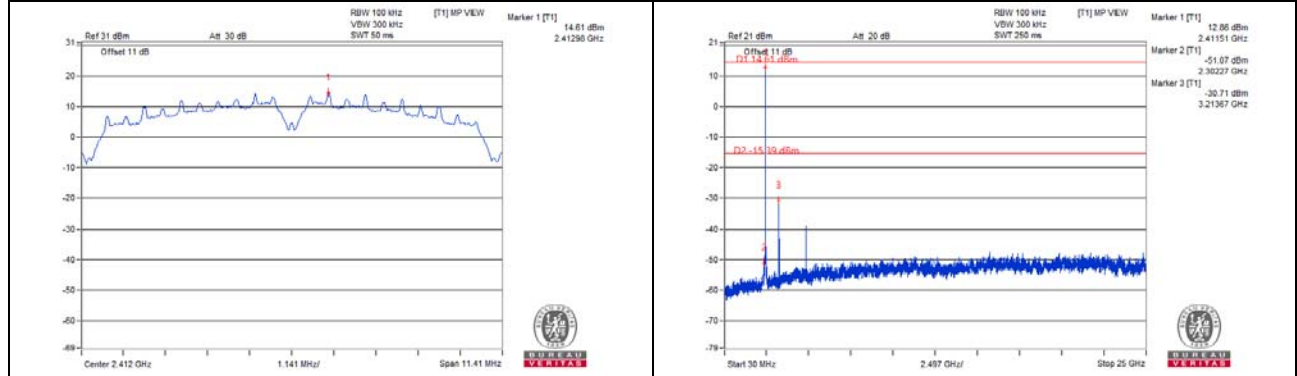

CH 6

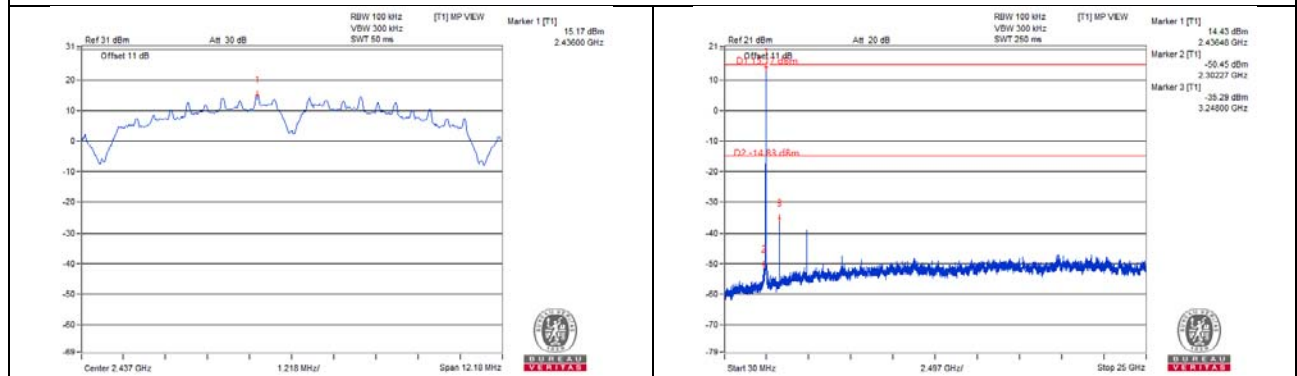


CH 11

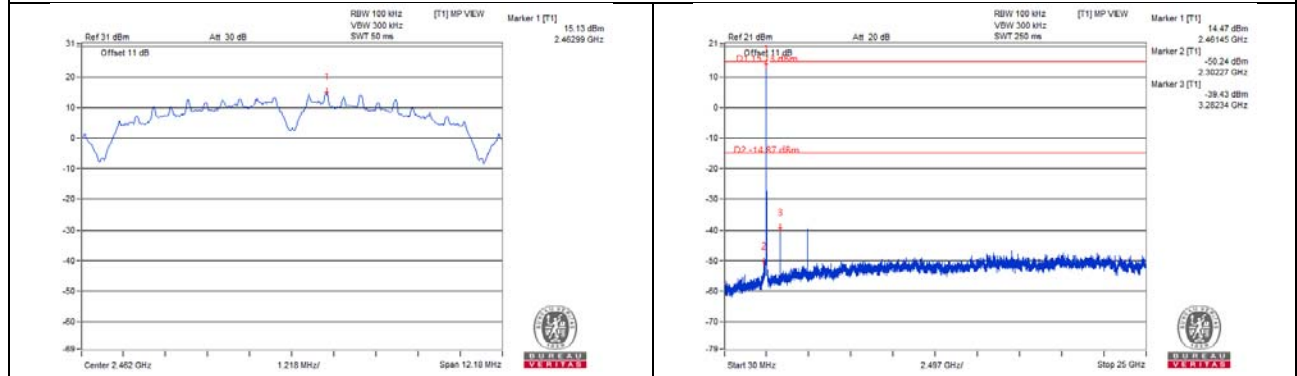



CH 1 Band edge

CH 11 Band edge


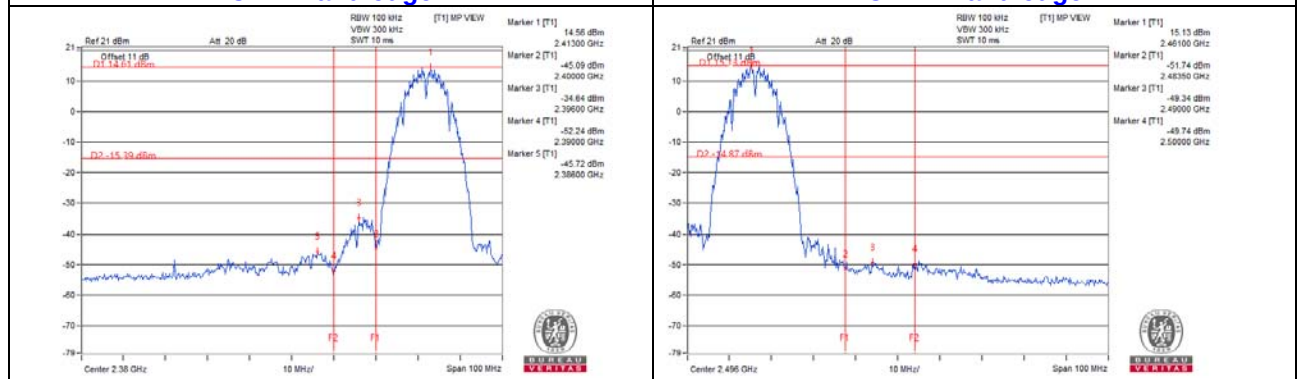


CHAIN 1



CH 1

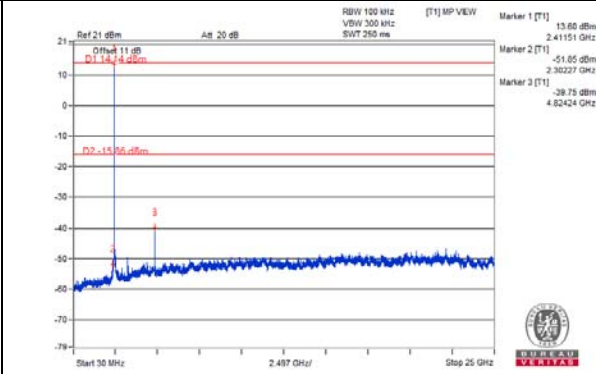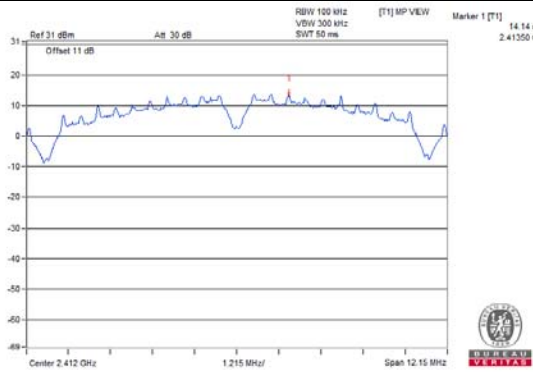


CH 6

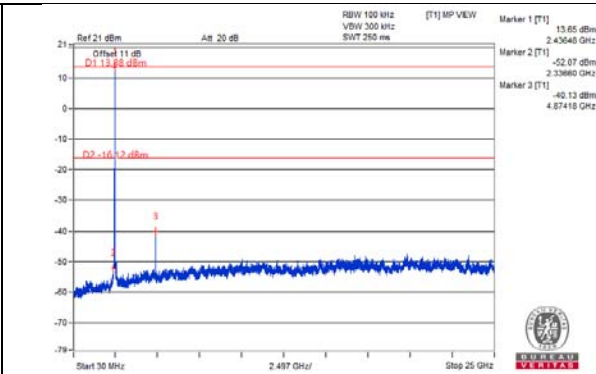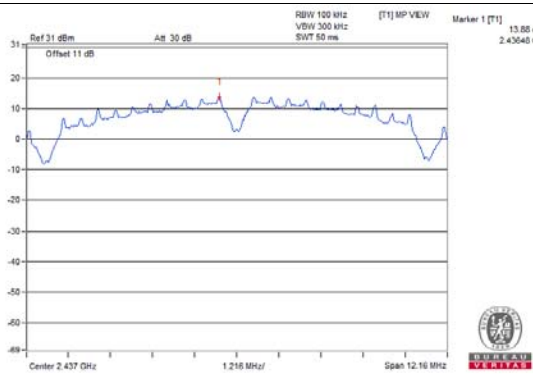


CH 11

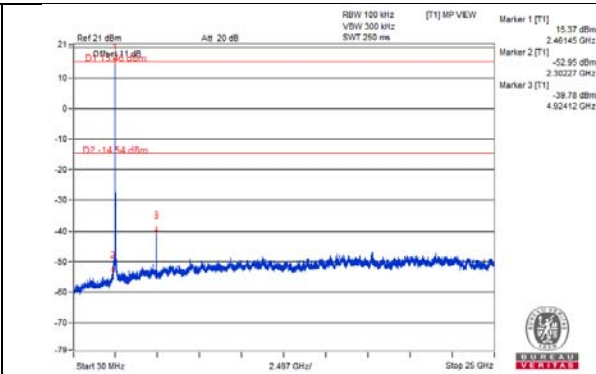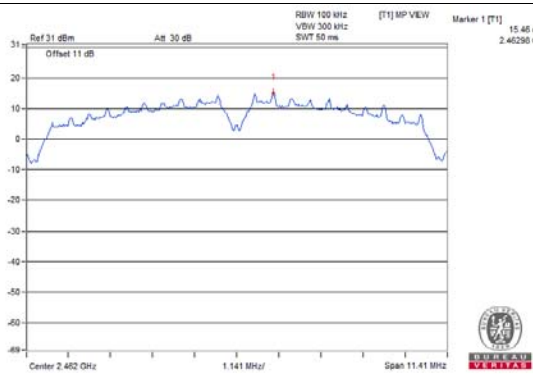

CH 1 Band edge


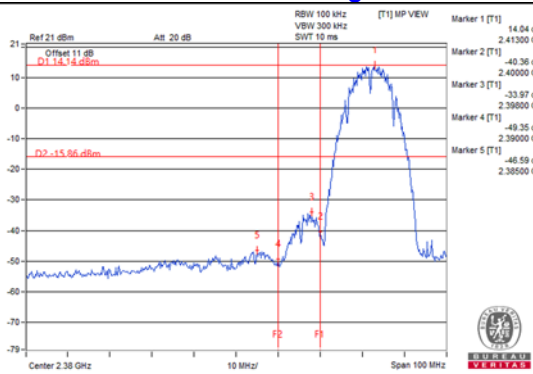


CH 11 Band edge


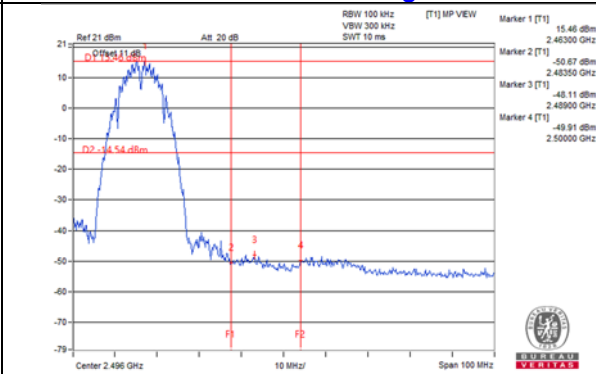


CHAIN 2



CH 1

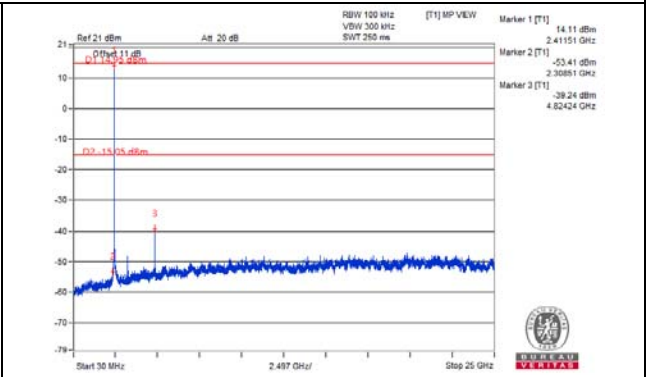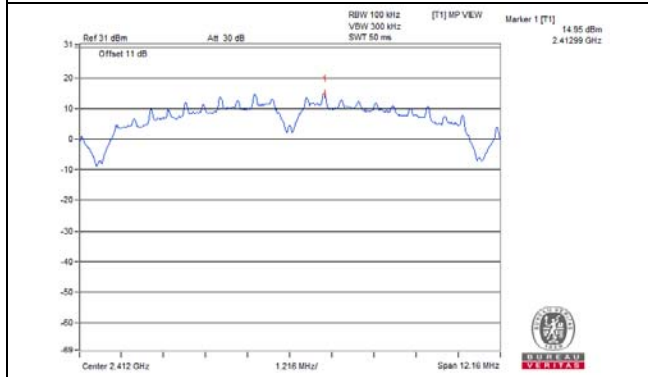


CH 6

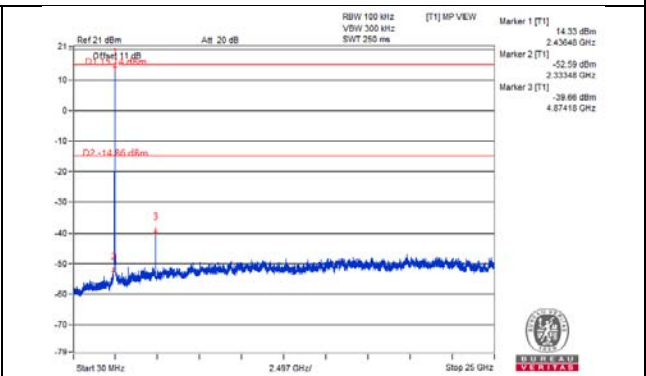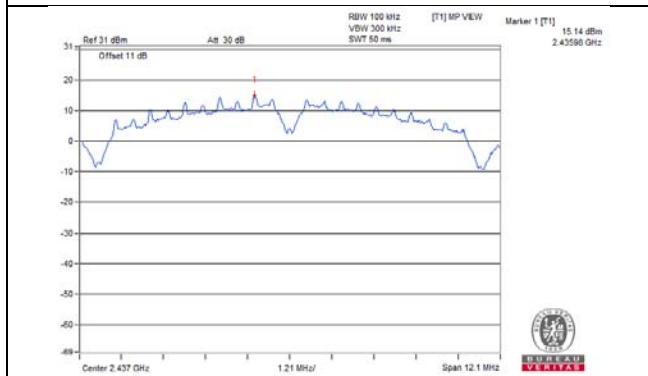


CH 11

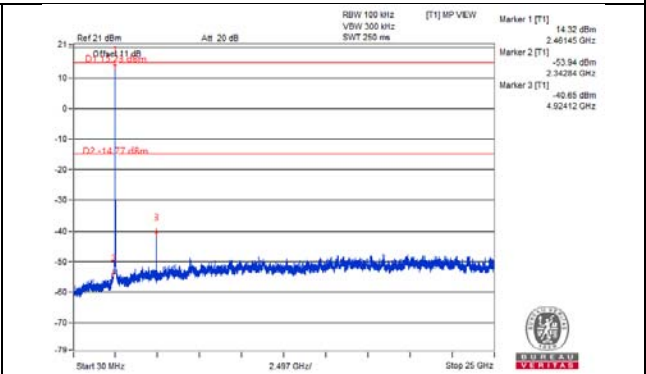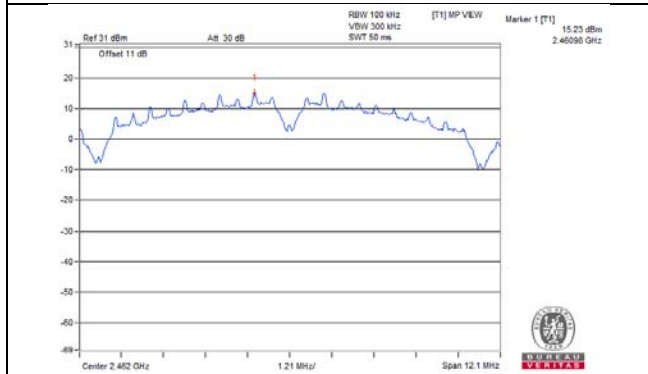

CH 1 Band edge


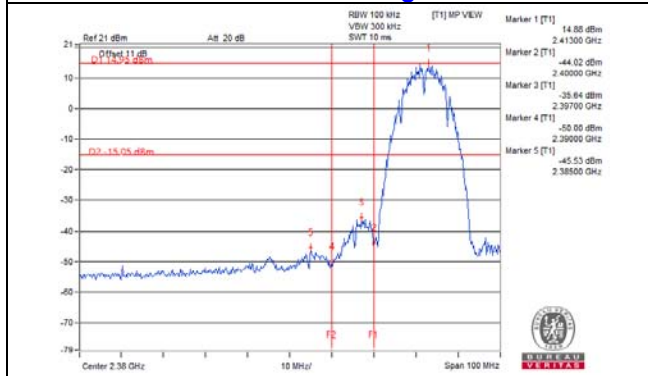


CH 11 Band edge


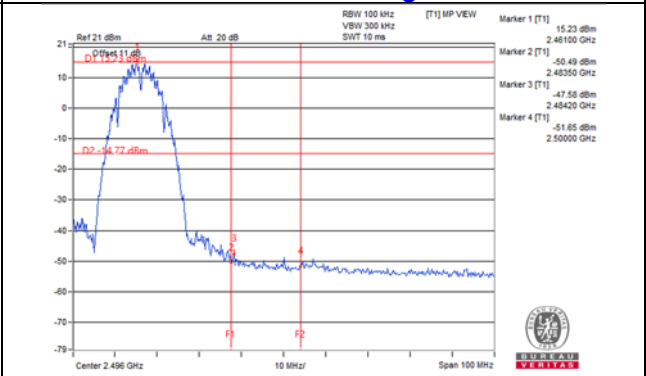


802.11g CHAIN 0



CH 1

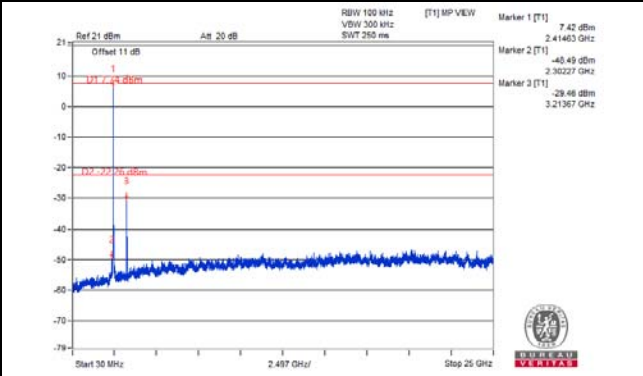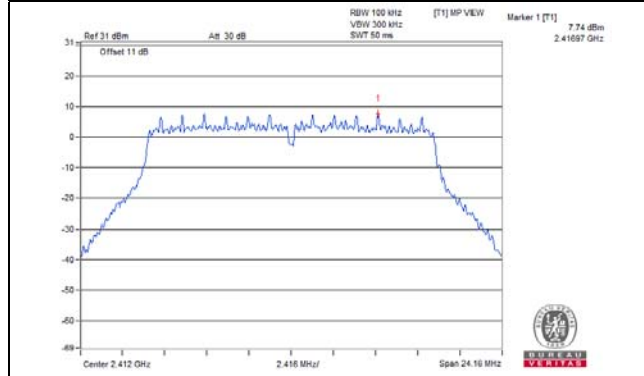


CH 6

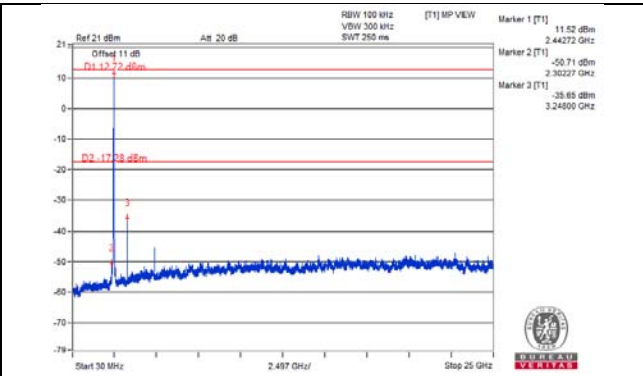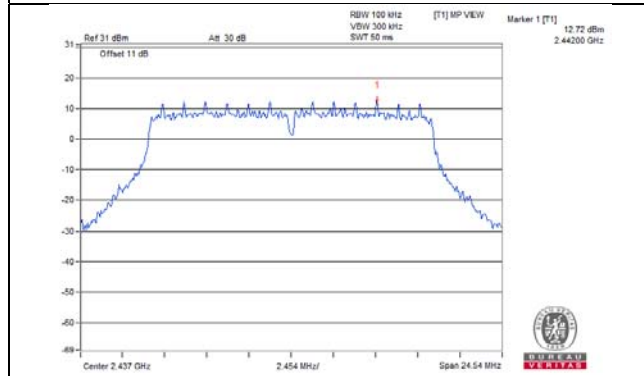


CH 11

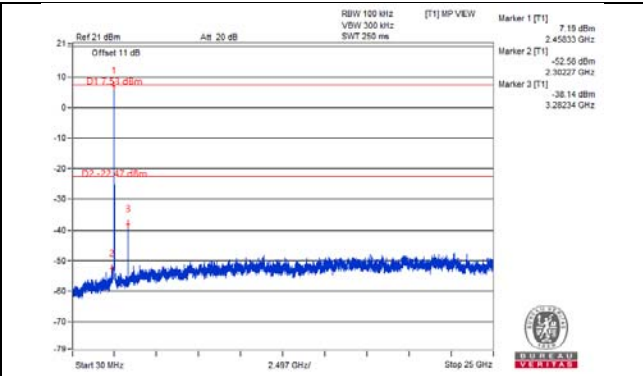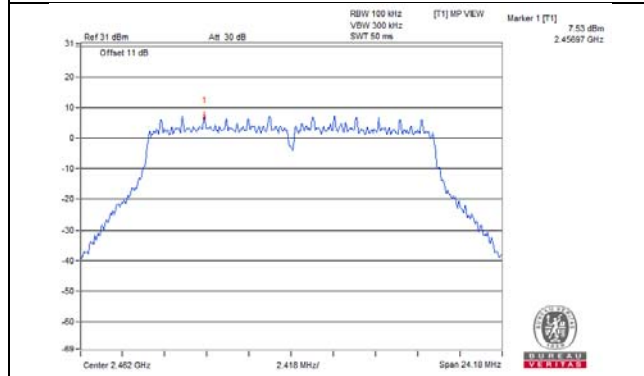

CH 1 Band edge


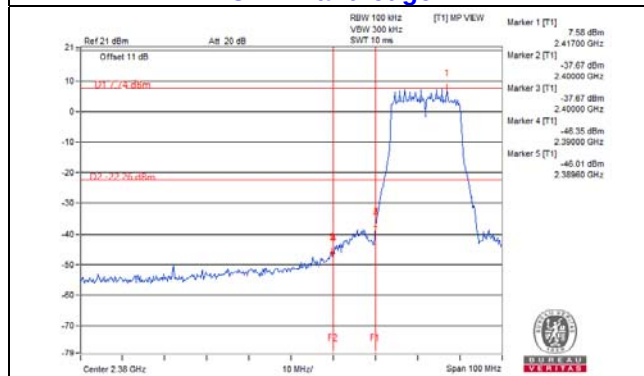


CH 11 Band edge


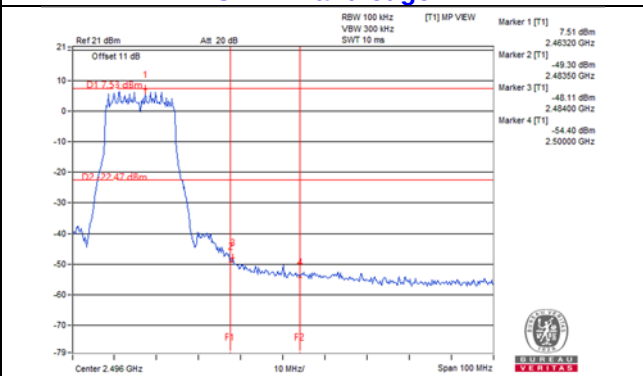


CHAIN 1



CH 1

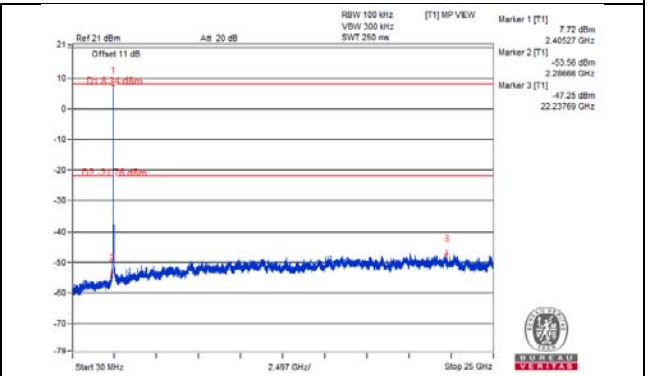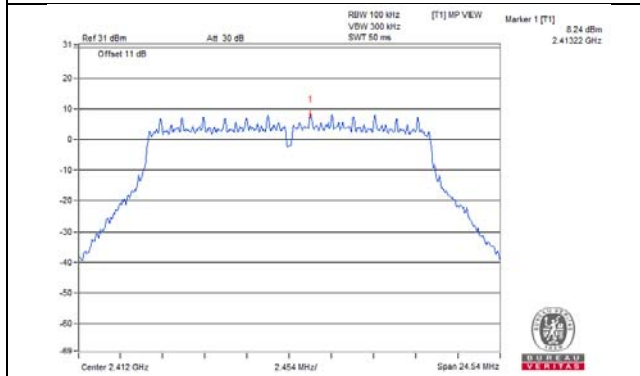


CH 6

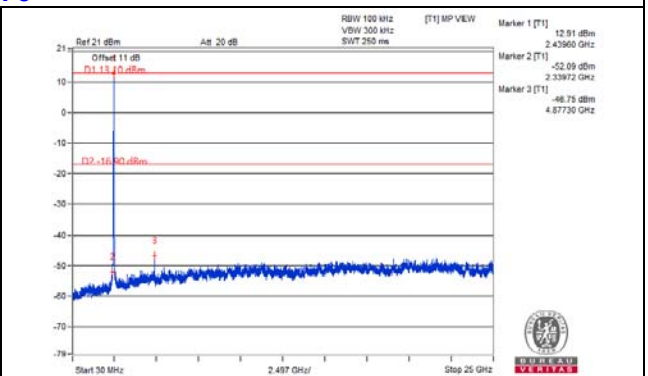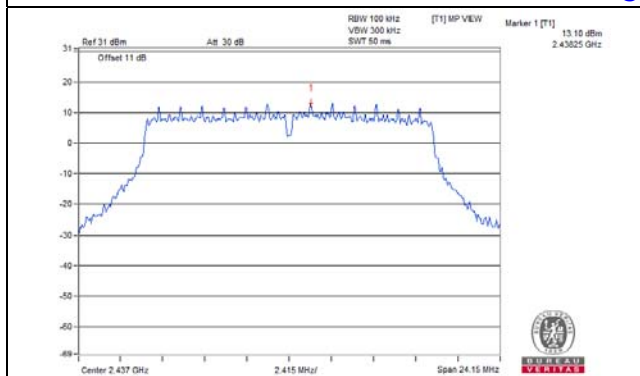


CH 11

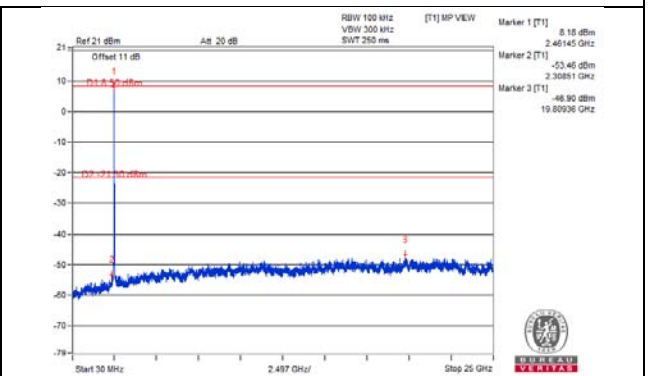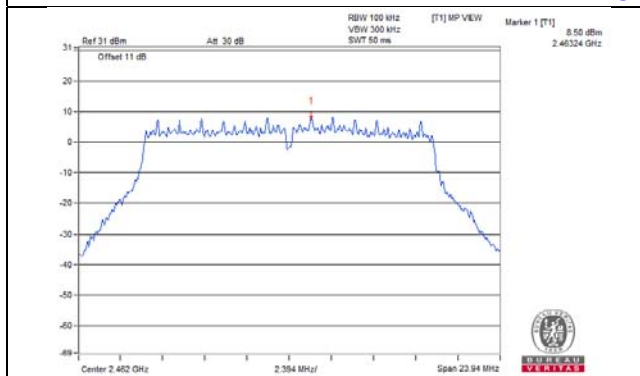

CH 1 Band edge


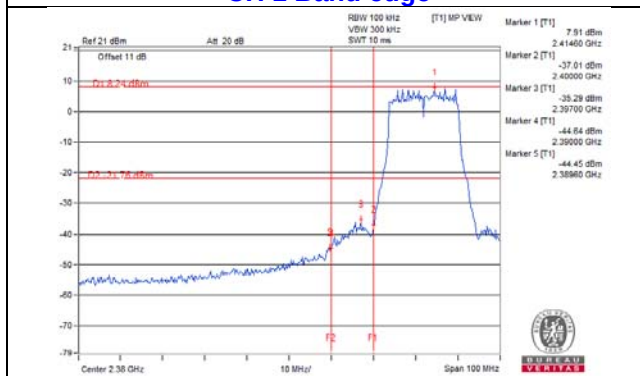


CH 11 Band edge


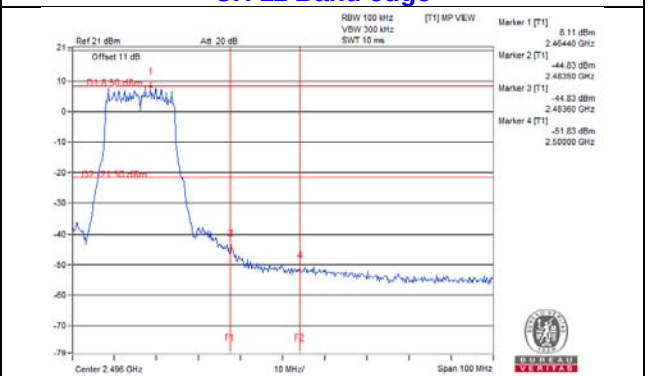


CHAIN 2



CH 1

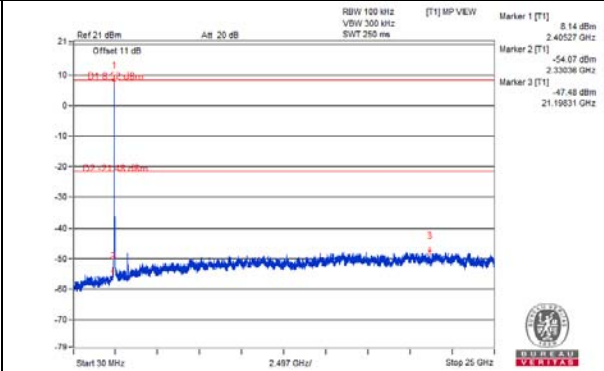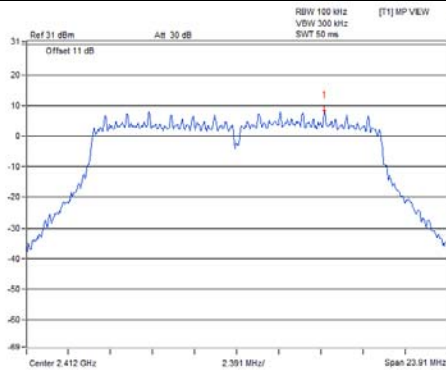


CH 6

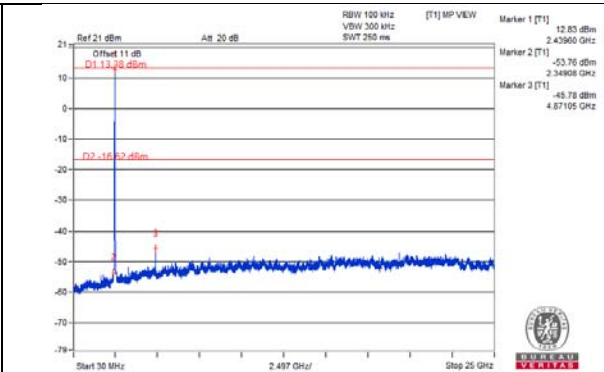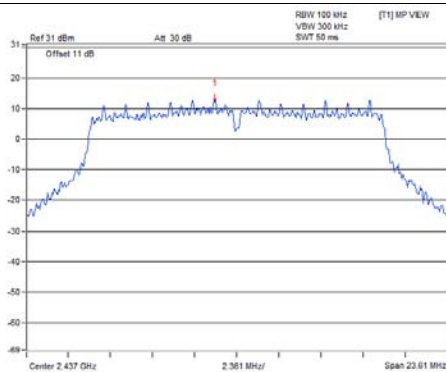


CH 11

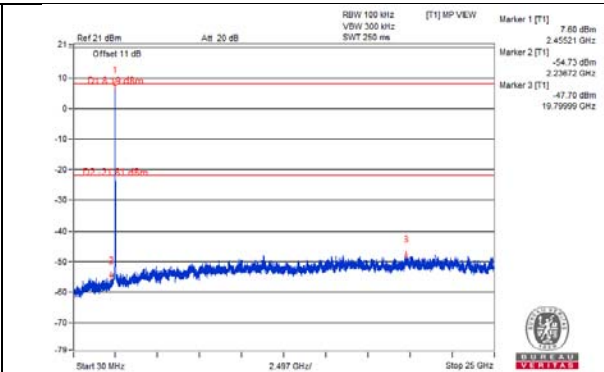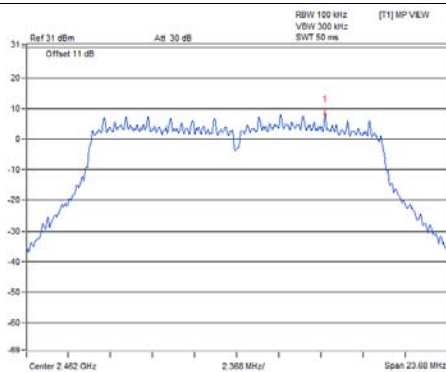

CH 1 Band edge

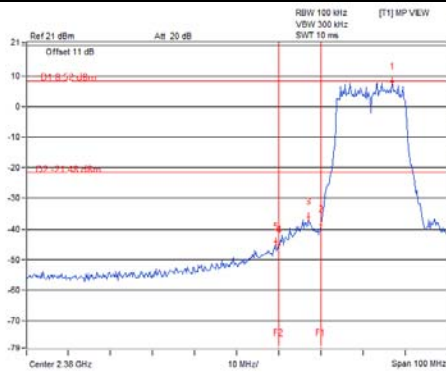


CH 11 Band edge

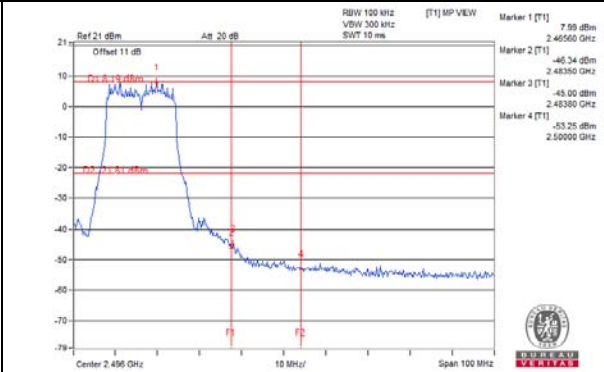


802.11n (HT20) CHAIN 0


CH 1

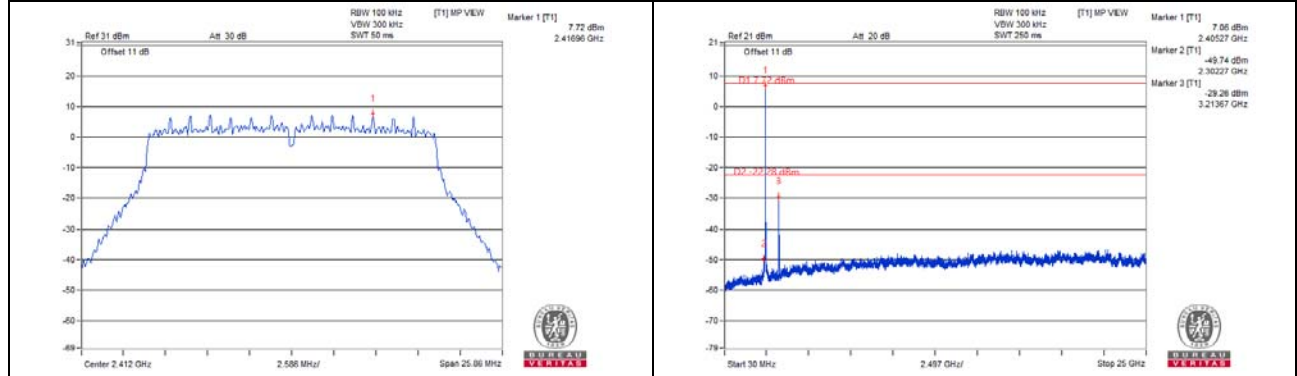


CH 6

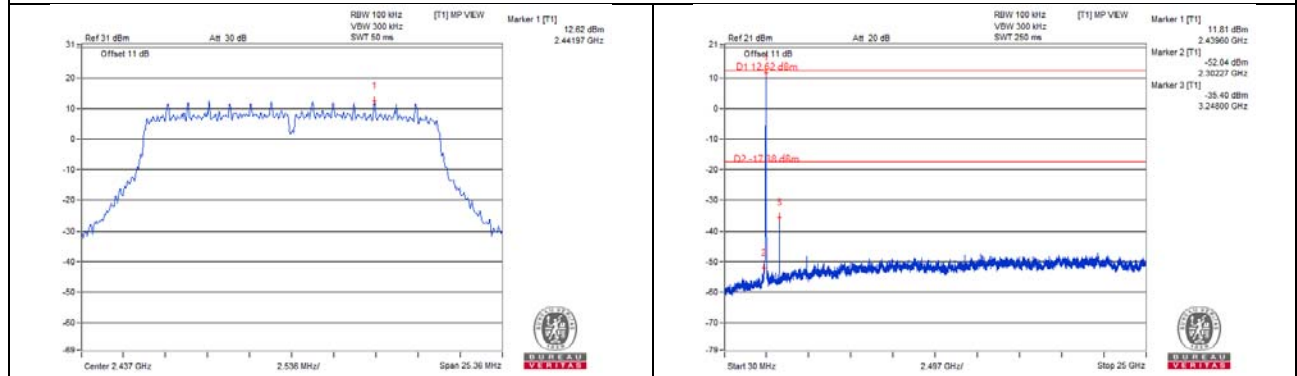


CH 11

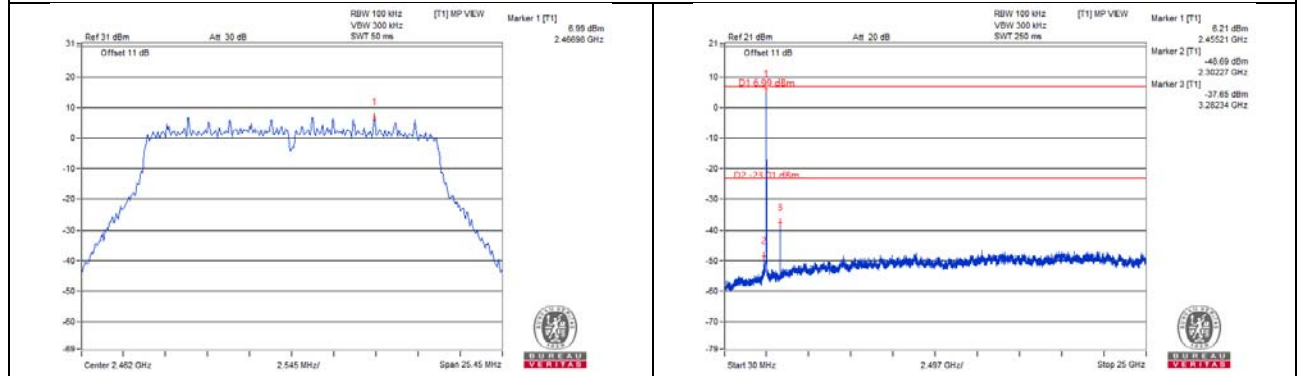

CH 1 Band edge


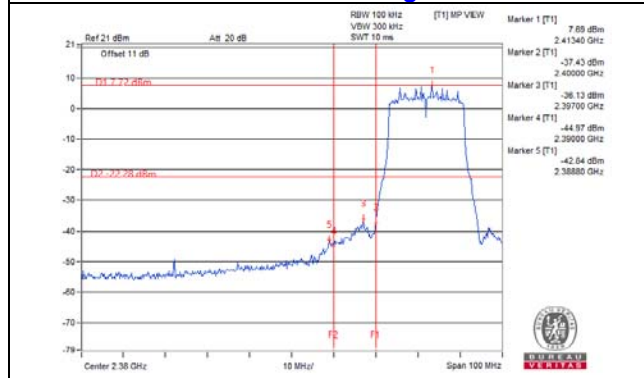


CH 11 Band edge


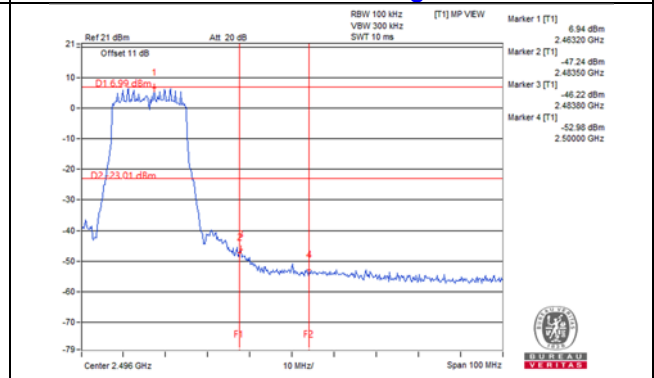


CHAIN 1



CH 1

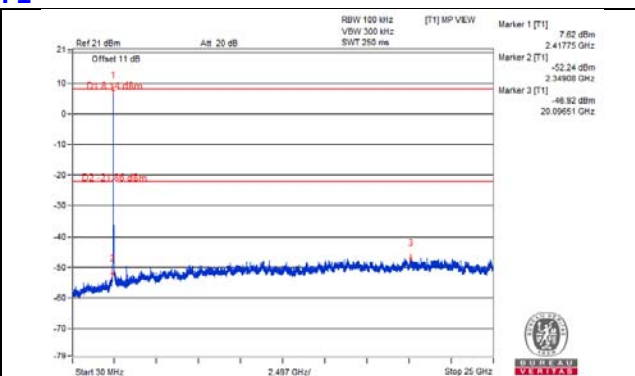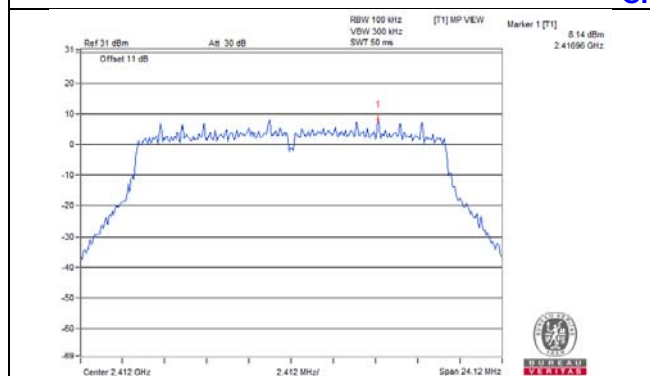


CH 6

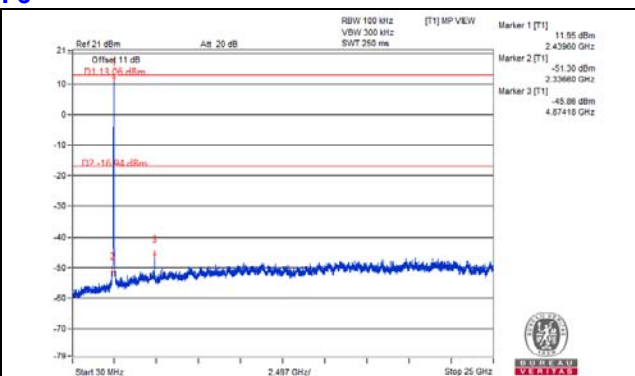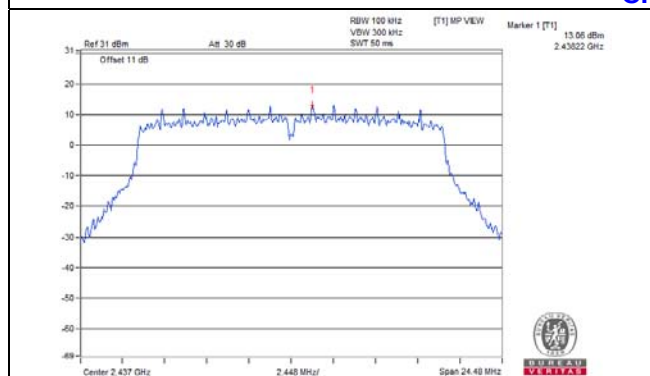


CH 11

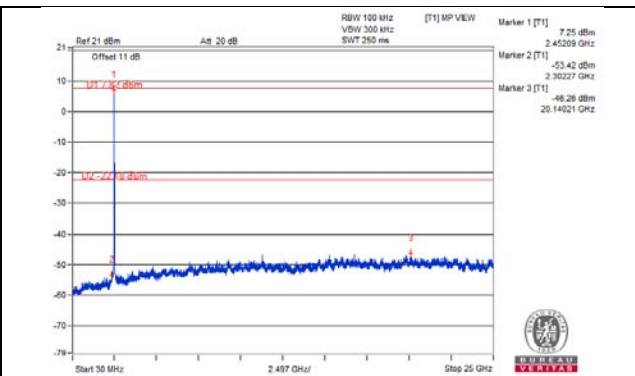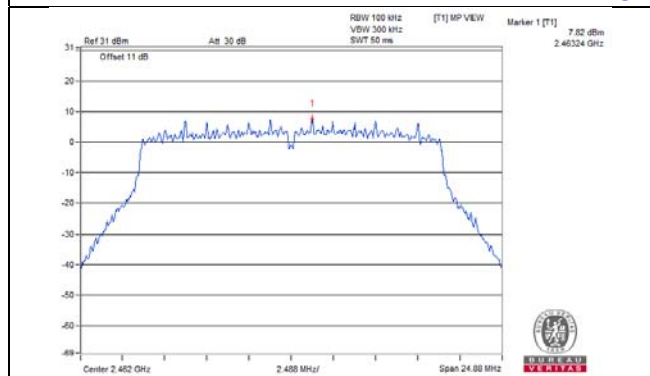

CH 1 Band edge


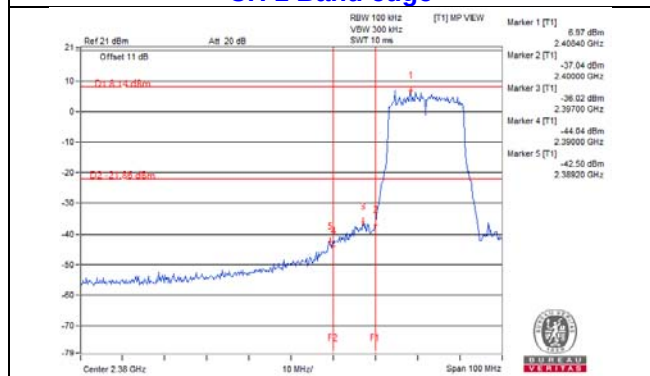


CH 11 Band edge


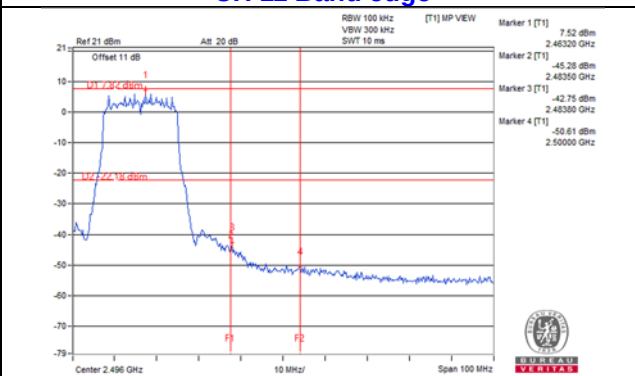


CHAIN 2



CH 1

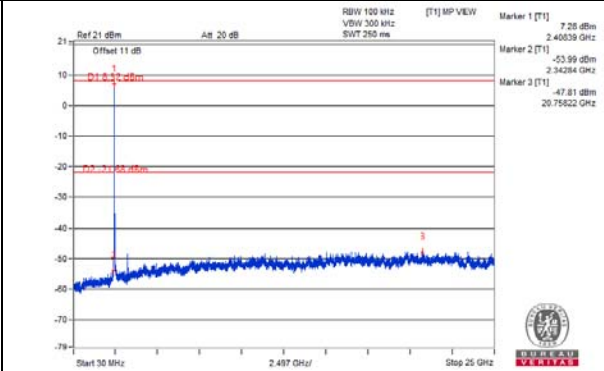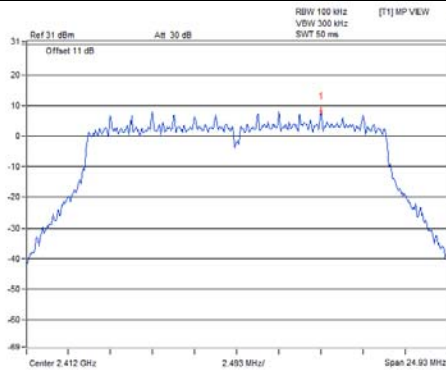


CH 6

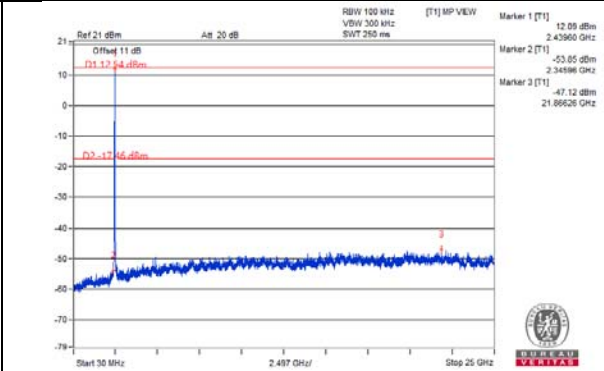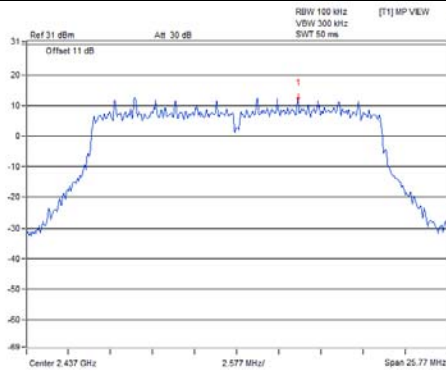


CH 11

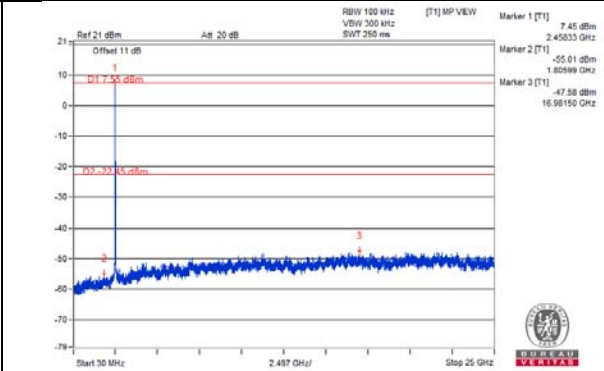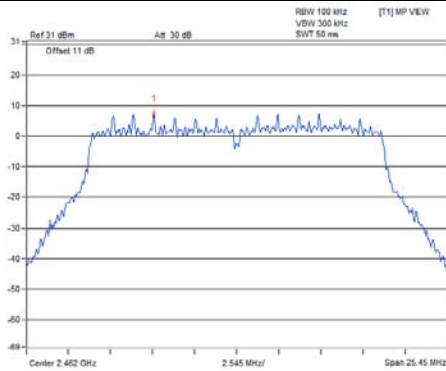

CH 1 Band edge


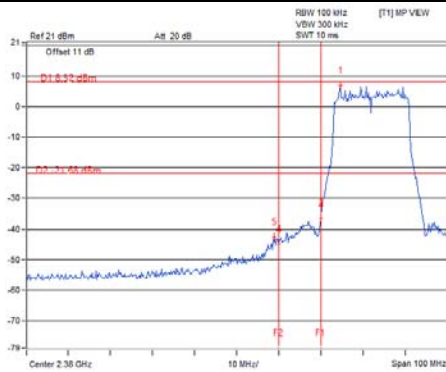


CH 11 Band edge


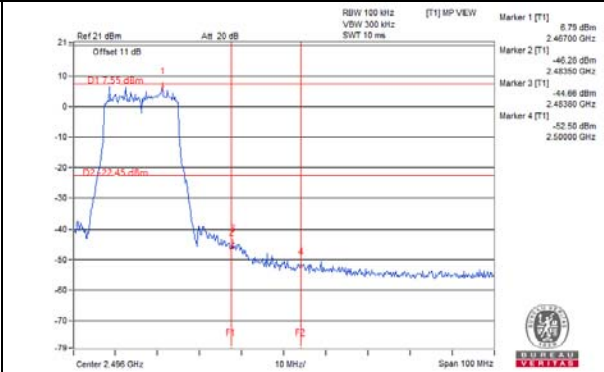


802.11n (HT40)
CHAIN 0



CH 3

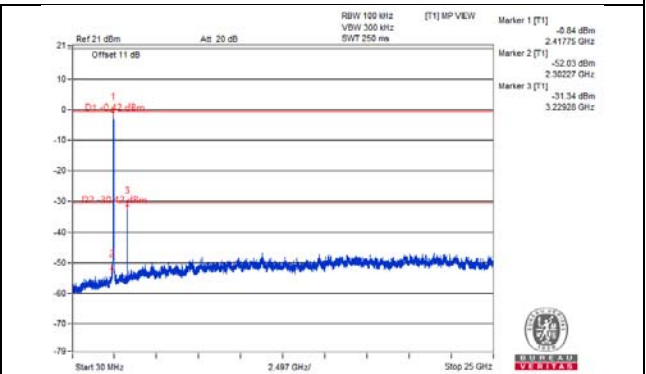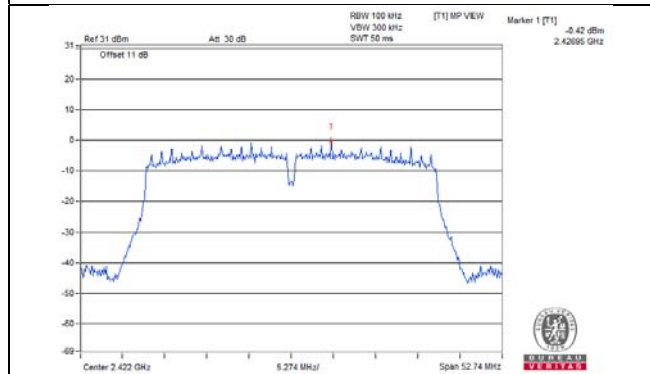


CH 6

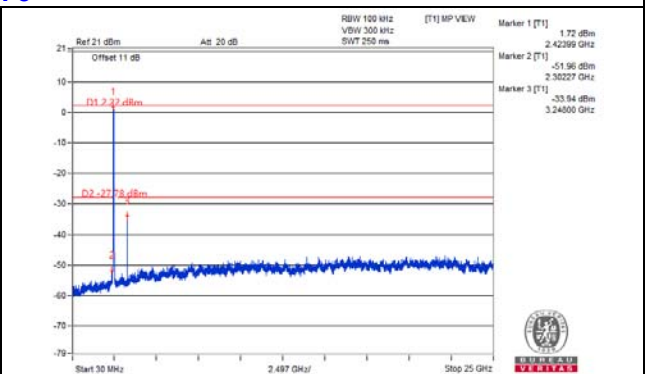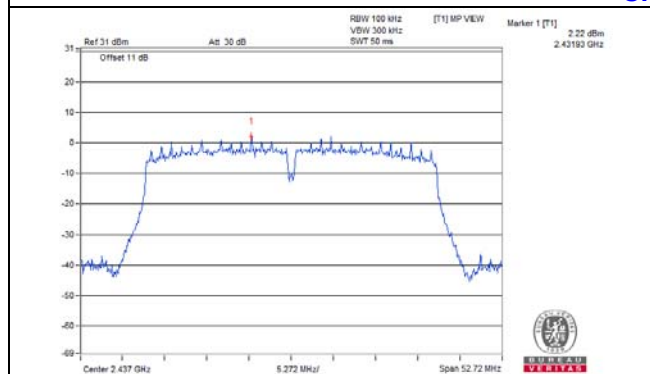


CH 9

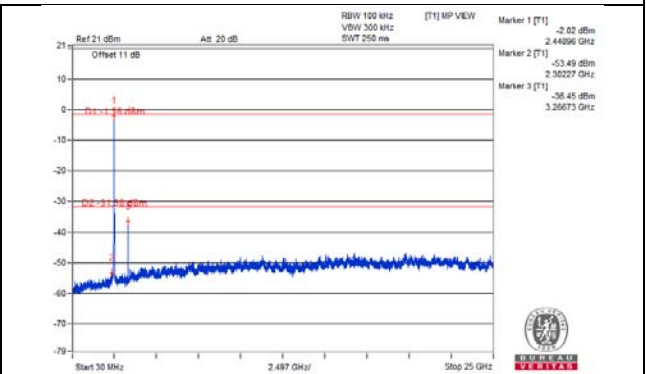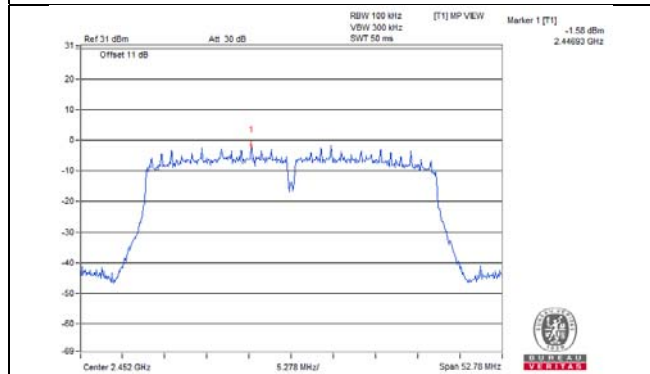

CH 3 Band edge


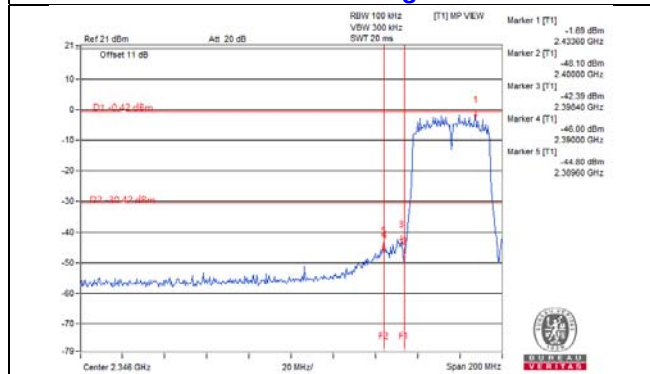


CH 9 Band edge


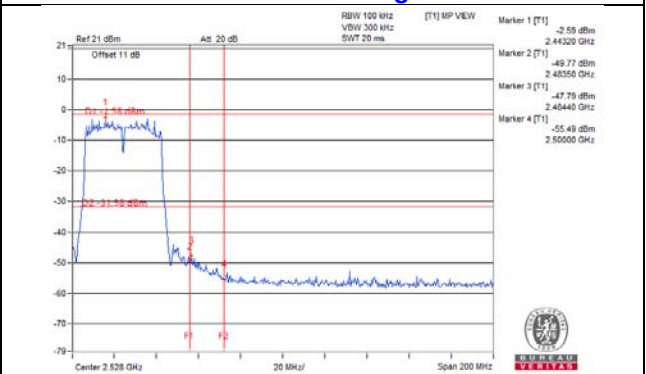


CHAIN 1



CH 3

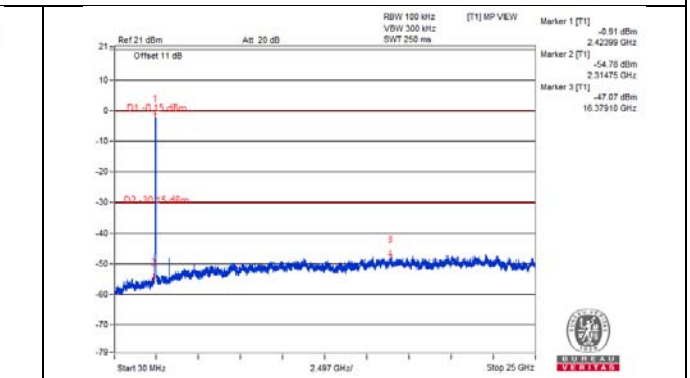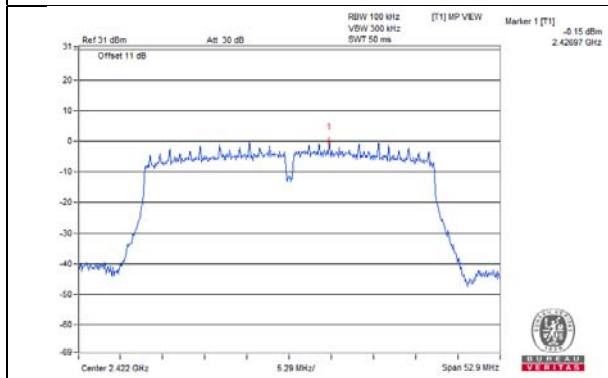


CH 6

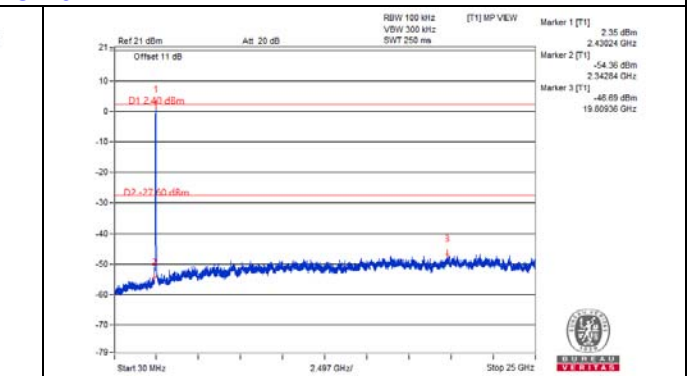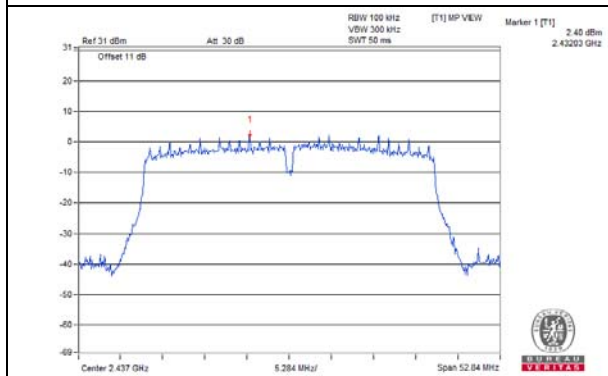


CH 9

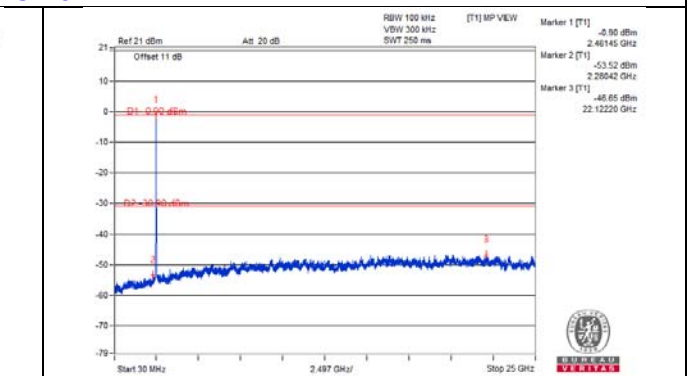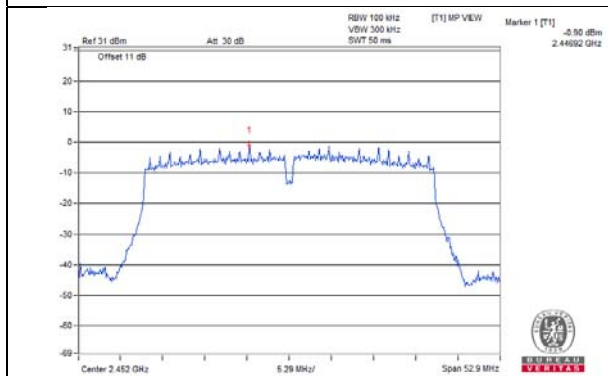

CH 3 Band edge


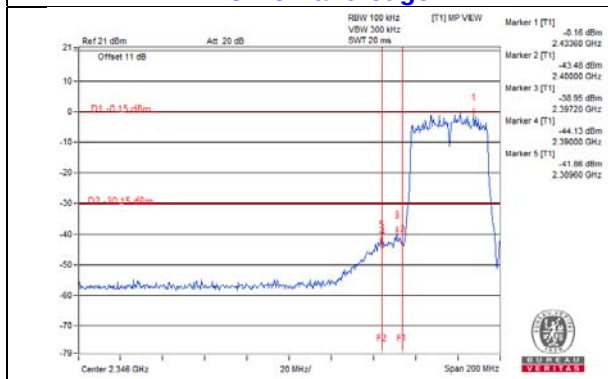


CH 9 Band edge


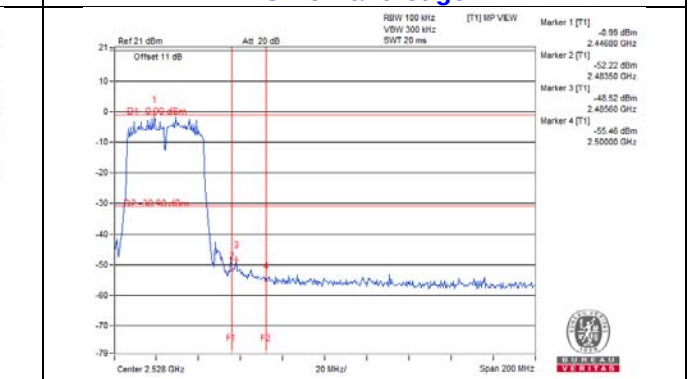


CHAIN 2



CH 3

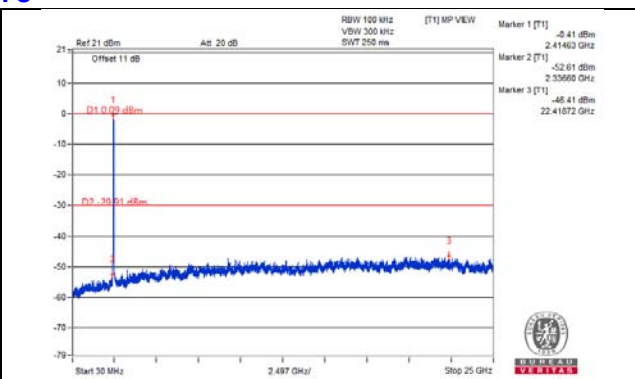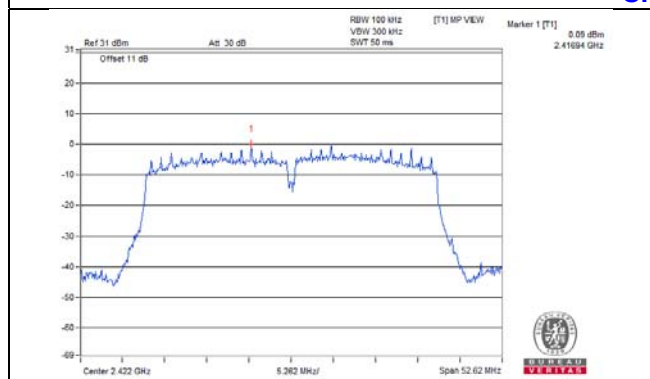


CH 6

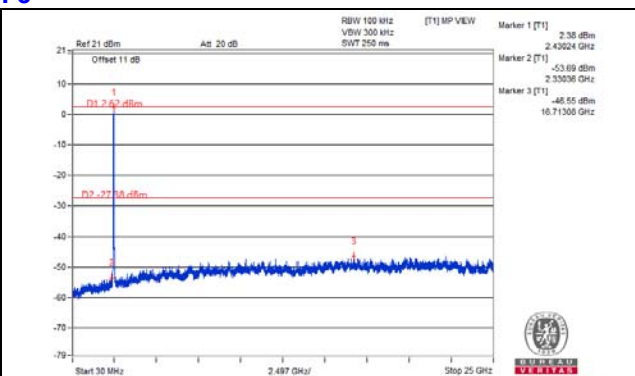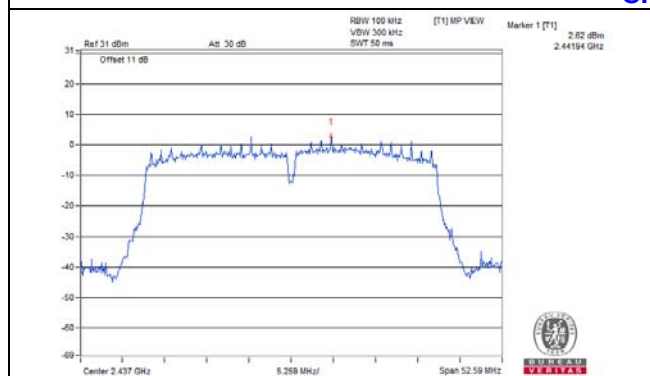


CH 9

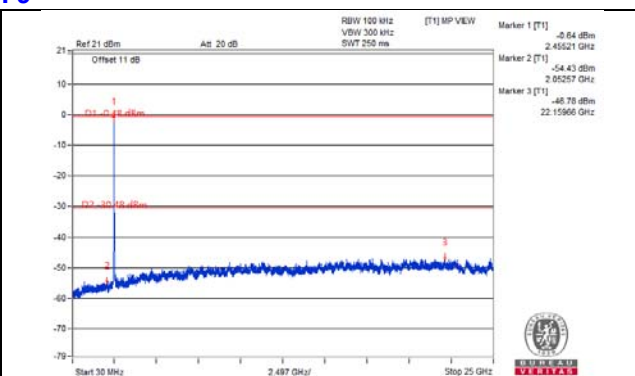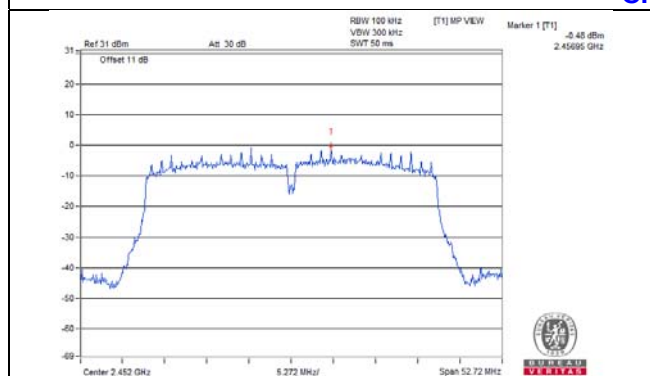

CH 3 Band edge

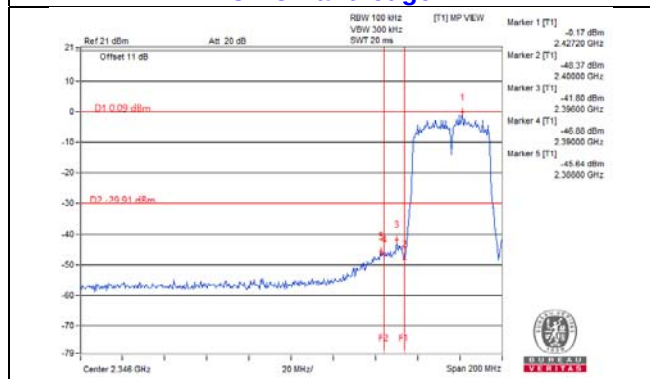

CH 9 Band edge

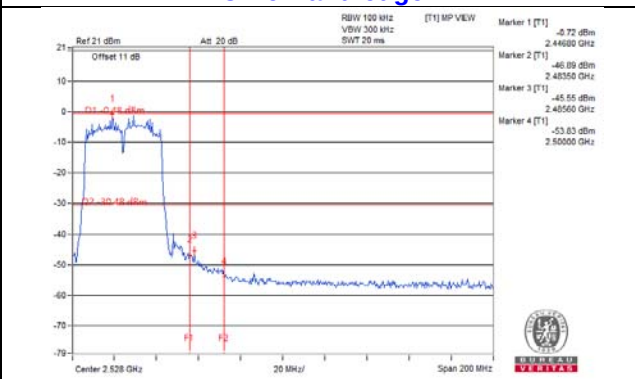

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---