# **MODEL TLL-5903**


International size reference: AA, ER14505

### **PRELIMINARY**

### **TECHNICAL DATA**


(Typical values @+25°C for batteries stored for one year or less)

Nominal capacity (@2 mA to 2V)	2.4 Ah
Rated voltage	3.6 V
Nominal voltage (@2 mA)	3.45 V
Maximum continuous current	100 mA
Maximum pulse current	200 mA
Weight	17.6 g (0.62 oz)
Operating temperature range	-55°C to +85°C

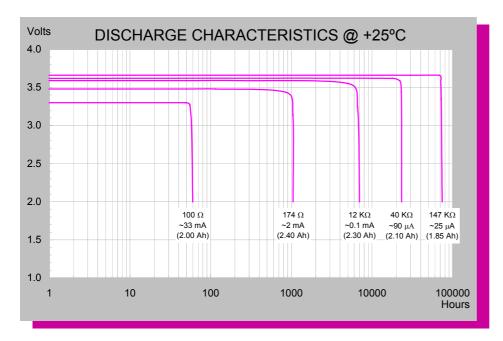


# TADIRAN LITHIUM BATTERIES


## **BOBBIN TYPE**



### **AVAILABLE TERMINATIONS**

SUFFIX- /S STANDARD
SUFFIX- /P AXIAL LEADS
SUFFIX- /T SOLDER TABS
SUFFIX- /PT2 RADIAL PINS
SUFFIX- /PT/TP POLARIZED TABS

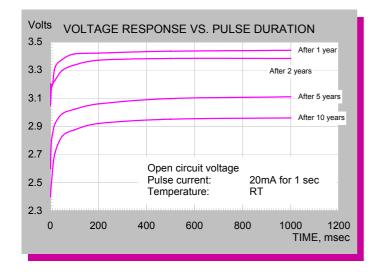

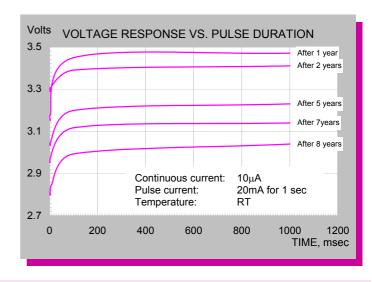

# HIGH PERFORMANCE

Note: Any representation in this brochure concerning performance, are for informational purposes only and are not construed as warranties either expressed or implied, of future performance.

JANUARY 2004