



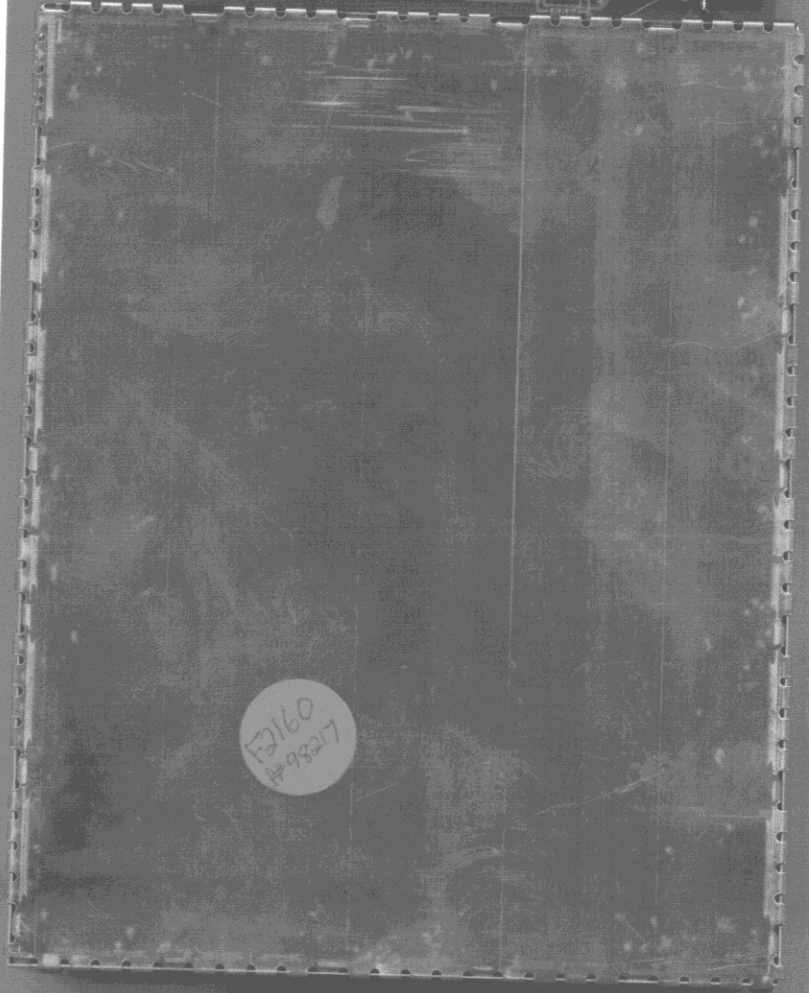


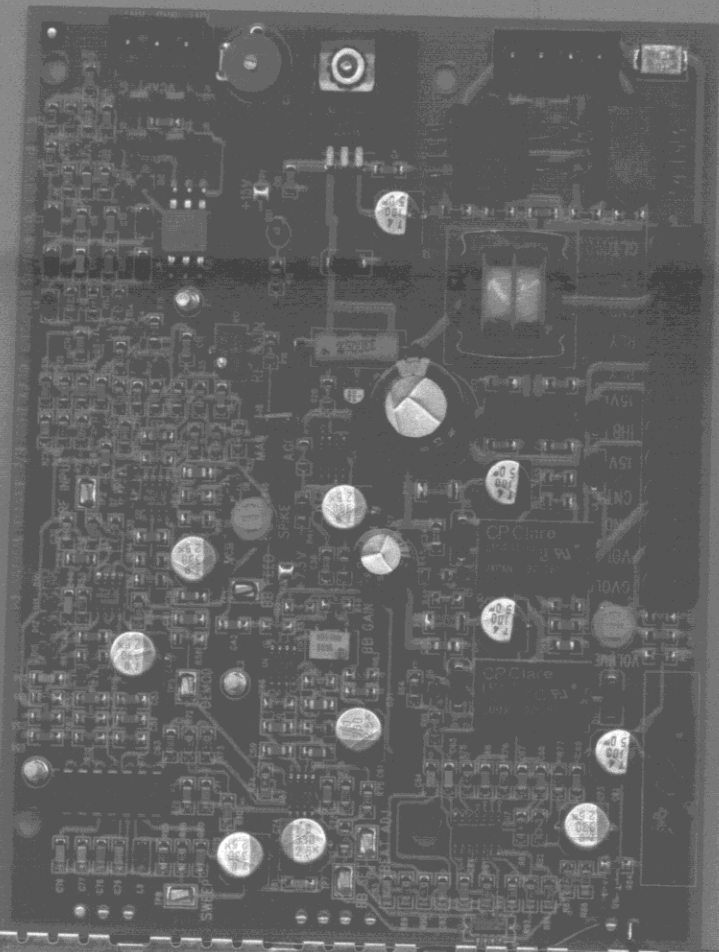


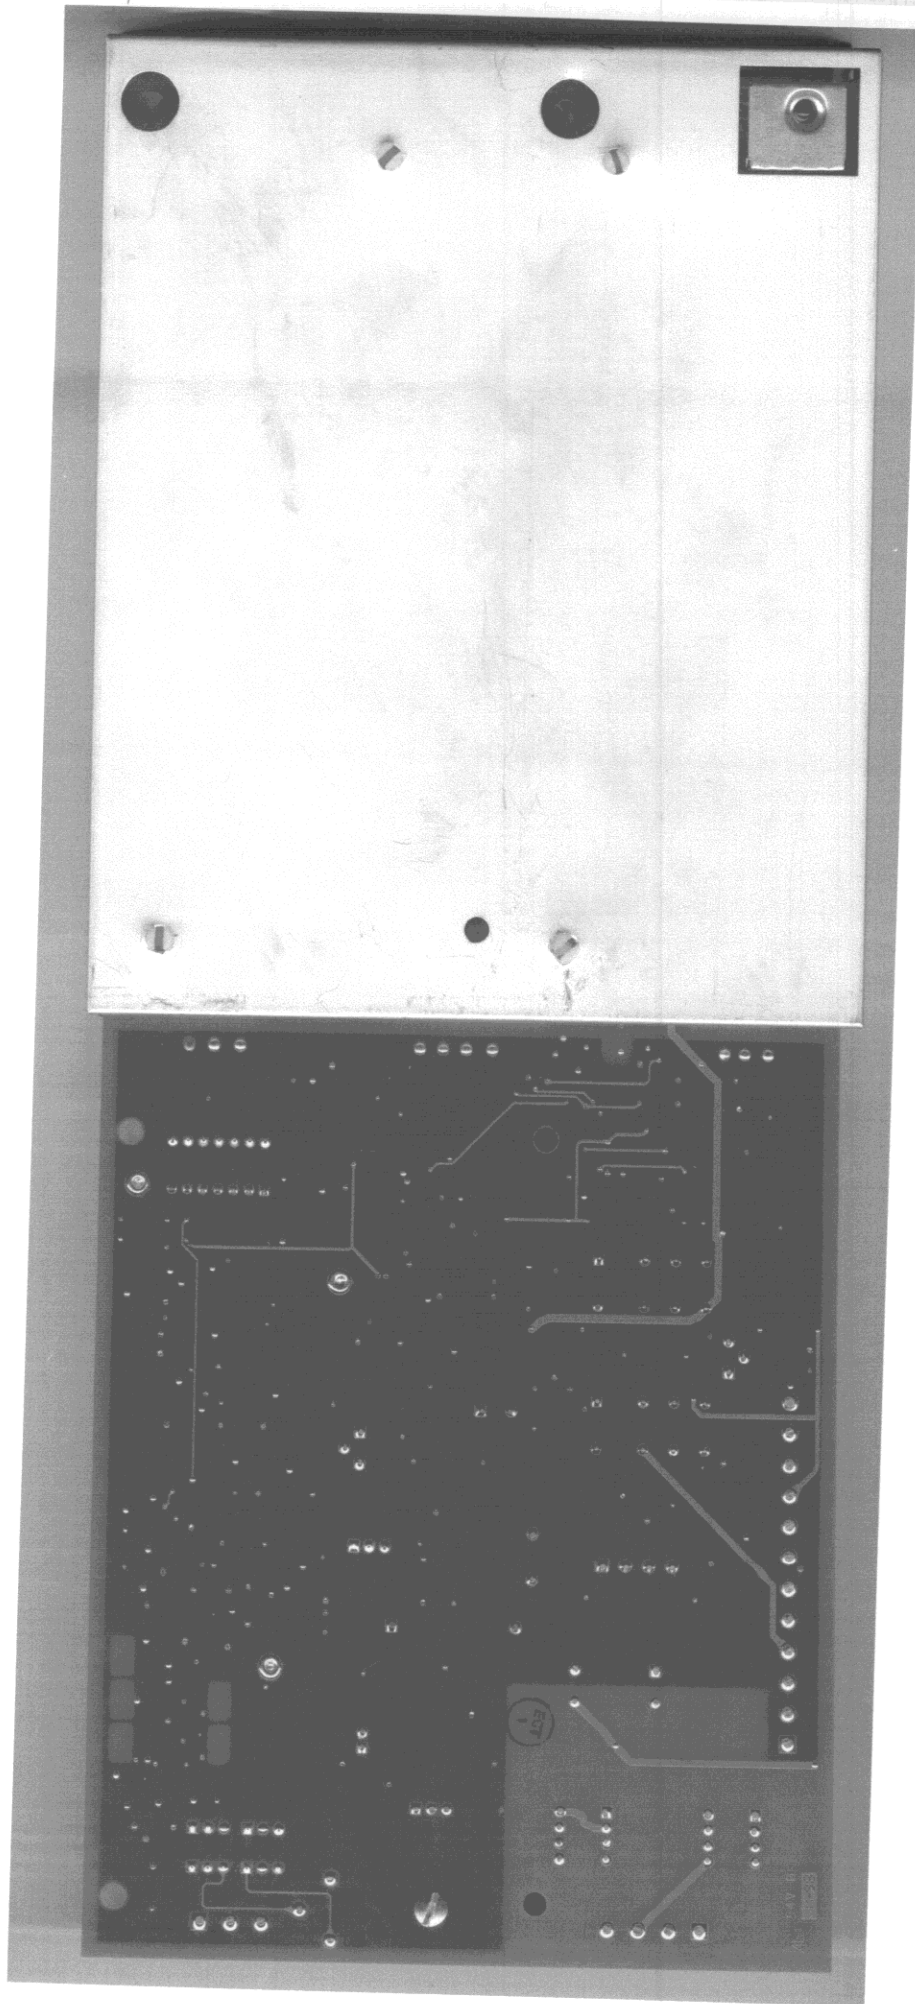

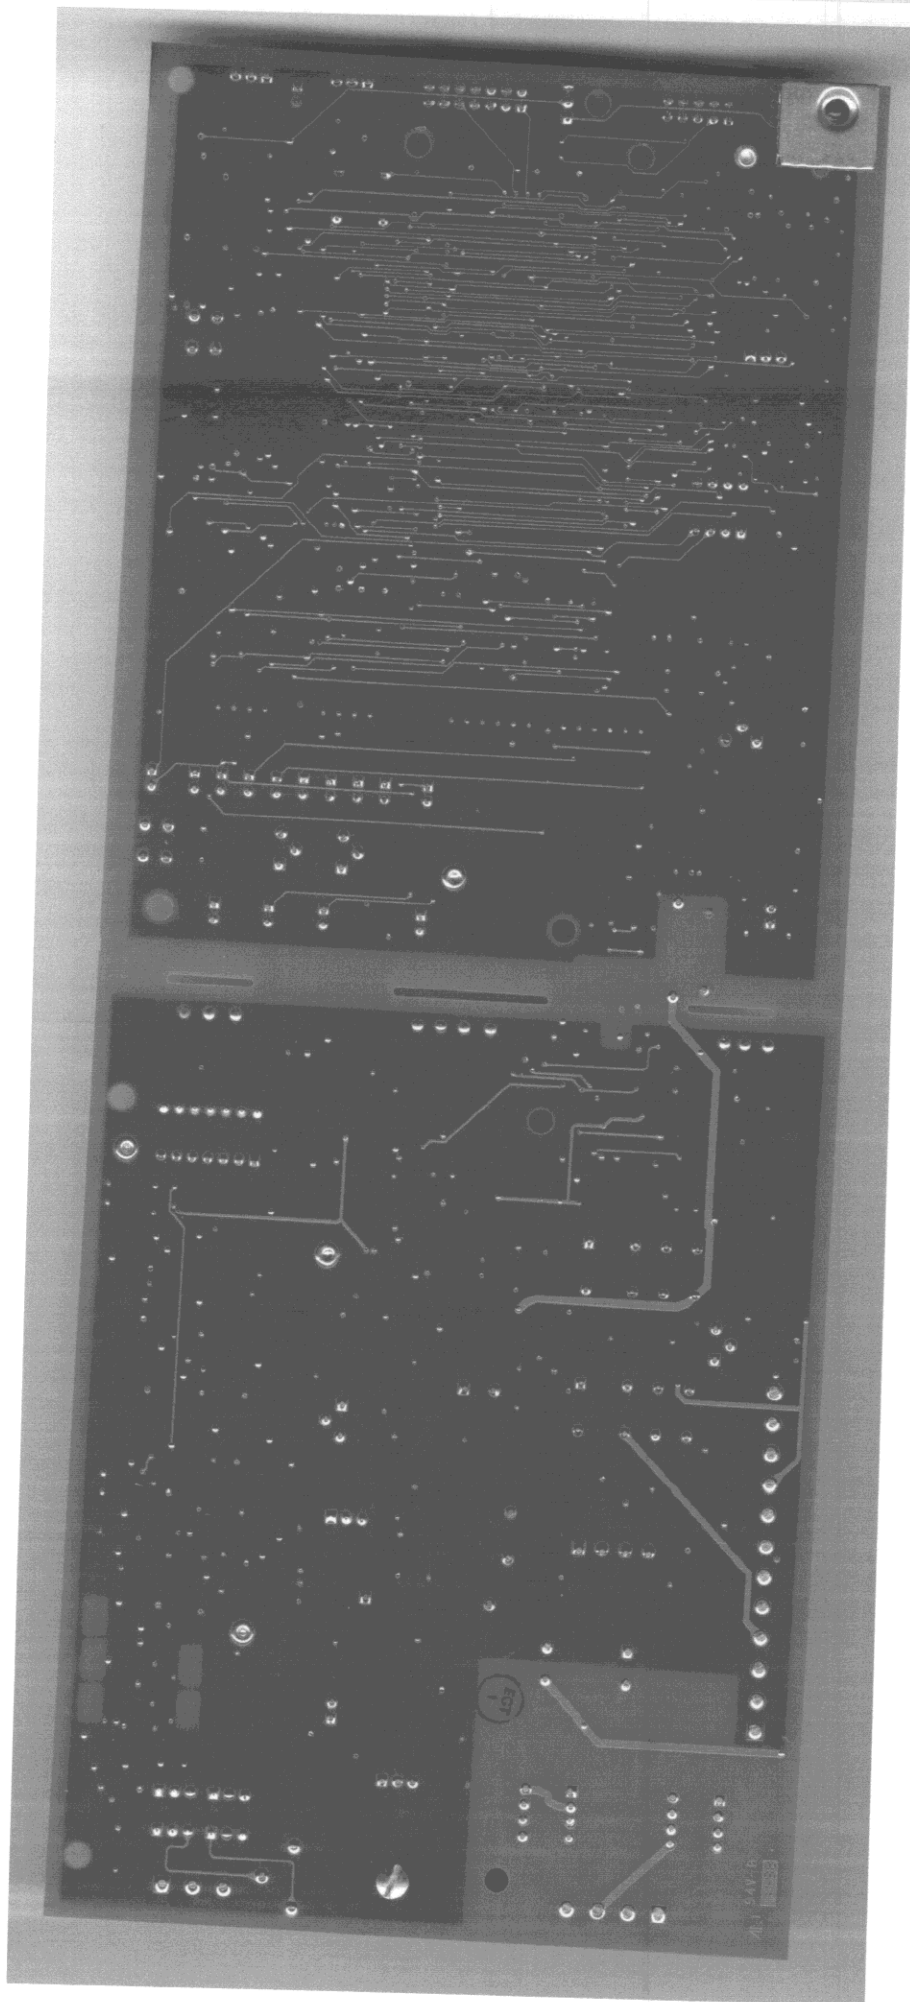

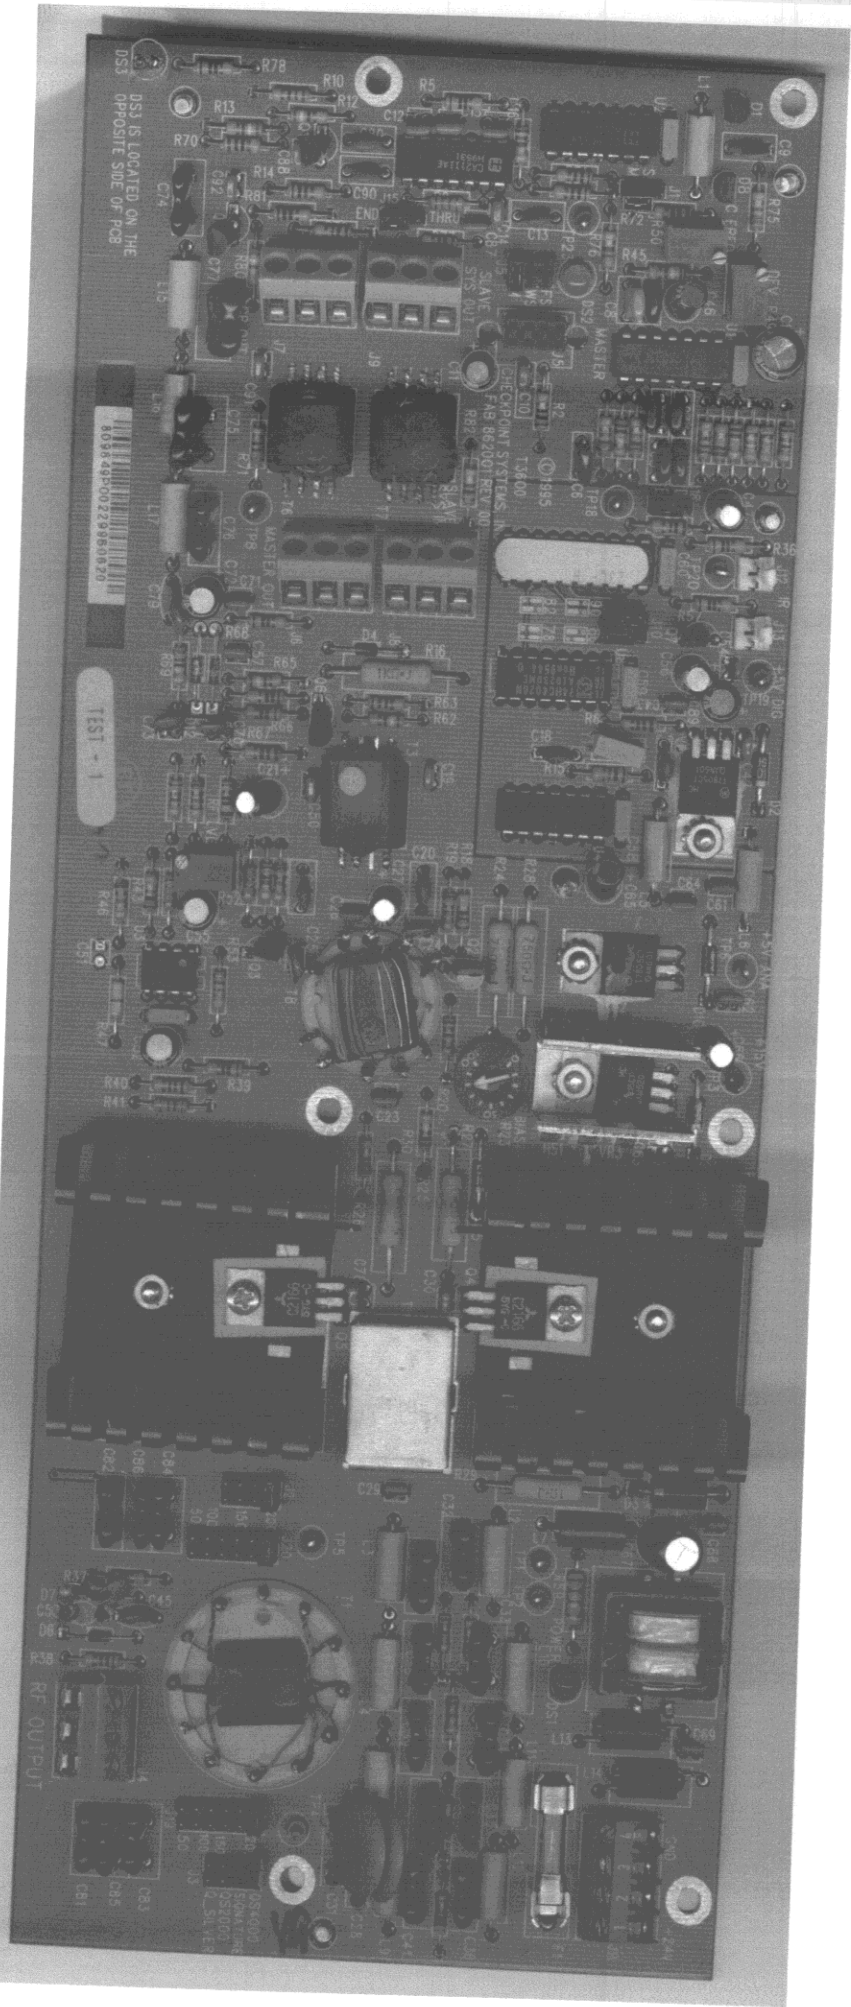


DS3 IS LOCATED ON THE
OPPOSITE SIDE OF PCB




1 - LS31

RF OUTPUT

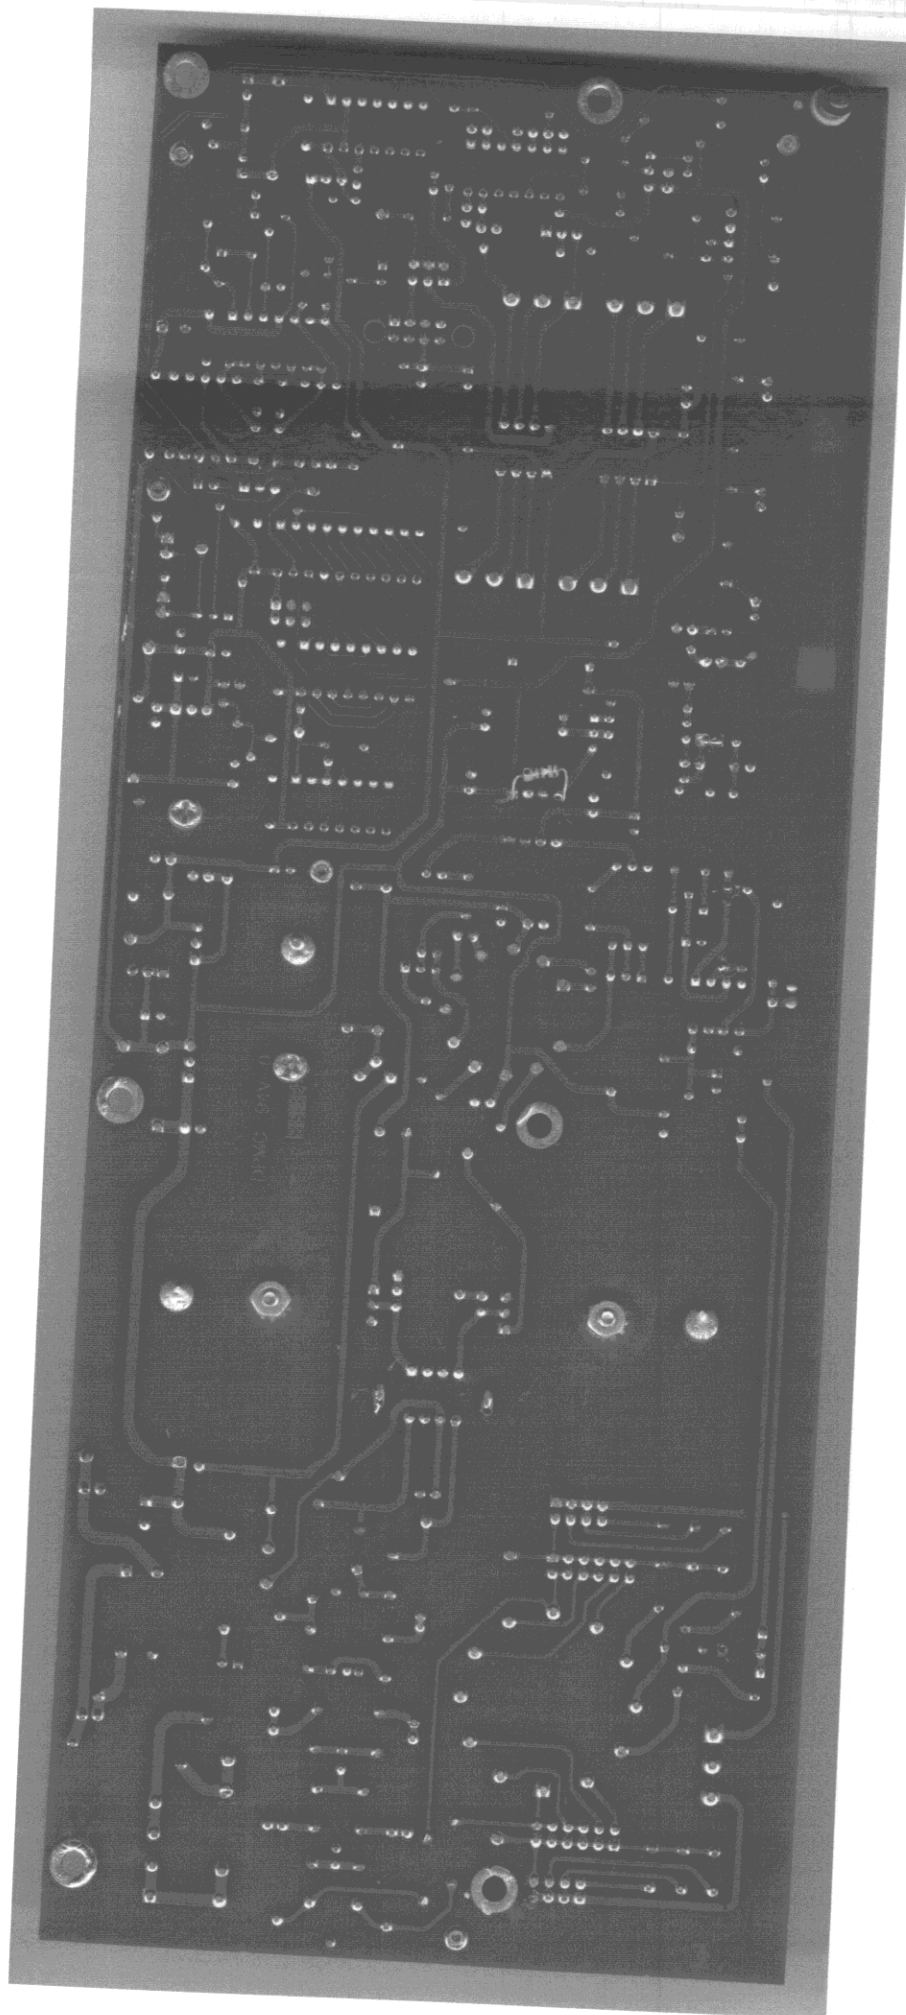

The image shows a detailed view of a custom electronic assembly on a printed circuit board (PCB). Key components include:

- Power Section:** Two large electrolytic capacitors (C1, C2) are connected to a transformer (X1) and a rectifier bridge (D1-D4). The output is regulated by an IC1 (likely a 7805 voltage regulator) to provide a stable +24V OUT.
- Control/Signal Section:** A central transistor (T1) is part of a signal path, possibly an oscillator or amplifier stage. It is surrounded by resistors (R1-R6) and other passive components.
- Interface:** Multiple terminal blocks are used for connections, including one labeled "ANTENNA" and others for power inputs (+24V).
- Layout:** The components are densely packed, with visible solder joints and component markings such as "1505K" on resistors and "7805" on the voltage regulator.

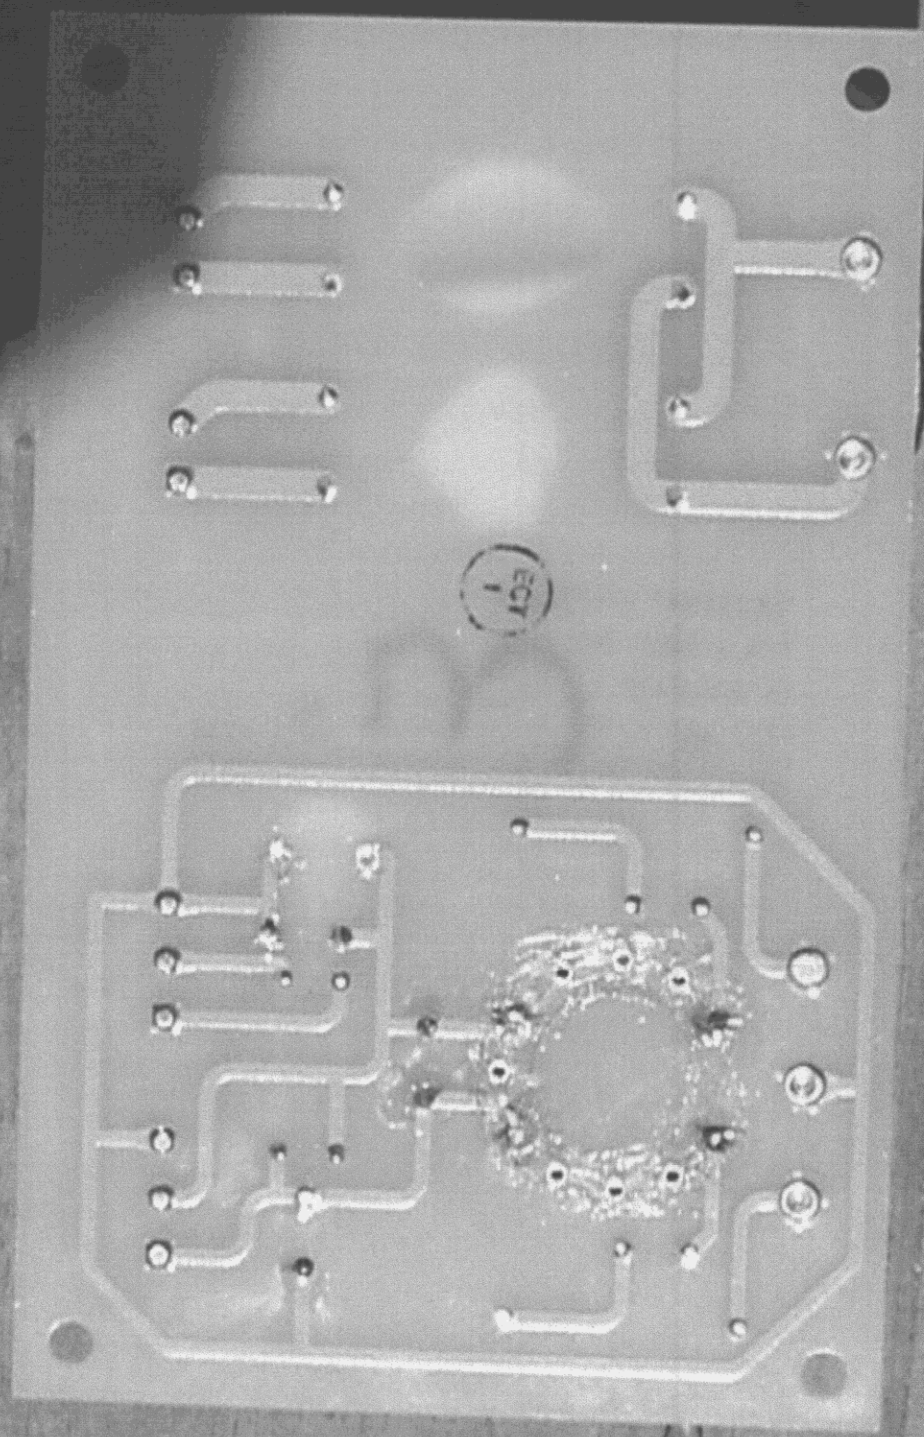

287