

SAR TEST REPORT

Equipment Under Test :	GSM 850&PCS1900 MOBILE PHONE
Model No. :	R600
Market name:	GF210
FCC ID :	OY6-GF210
Applicant :	UTStarcom
Address of Applicant :	No.368 LiuHe Road, BinJiang Zone, HangZhou, 310053,PRC
Date of Receipt :	2006.08.20
Date of Test :	2006.08.25 – 2006.09.06
Date of Issue :	2006.12.06

Standards:

**FCC OET Bulletin 65 supplement C,
ANSI/IEEE C95.1, C95.3, IEEE 1528-2003**

In the configuration tested, the EUT complied with the standards specified above.

Remarks:

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS-CSTC Shanghai GSM Lab or testing done by SGS-CSTC Shanghai GSM Lab must approve SGS Shanghai GSM Lab in connection with distribution or use of the product described in this report in writing.


Tested by :



Date :

2006.12.06

Approved by :



Date :

2006.12.06

Contents

1. General Information	6
1.1 Test Laboratory	6
1.2 Details of Applicant.....	6
1.3 Description of EUT(s)	6
1.4 Test Environment.....	7
1.5 Operation Configuration.....	7
1.6 Test Procedure	7
1.7 SAM Twin Phantom.....	8
1.8 Device Holder for Transmitters	9
1.9 Description of Test Position.....	10
2.0 Recipes for Tissue Simulating Liquid	13
2.1 Measurement procedure	14
2.2 The SAR Measurement System	15
2.3 SAR System Verification	17
2.4 Tissue Simulant Fluid for the Frequency Band 850MHz &1900MHZ&2450MHz.	18
2.5 Test Standards and Limits.....	19
2. Summary of Results.....	20
3. Instruments List	23
4. Measurements	24
4.1LeftHandSide-Cheek-GSM850-Low	24
GSM850-LeftHandSide-Cheek-Low	24
4.2LeftHandSide-Cheek-GSM850-Middle	25
GSM850-LeftHandSide-Cheek-Middle.....	25
4.3LeftHandSide-Cheek-GSM850-High.....	27
GSM850-LeftHandSide-Cheek-High	27
4.4LeftHandSide-Tilt-GSM850-Low	29
GSM850-LeftHandSide-Tilt-Low	29
4.5LeftHandSide-Tilt-GSM850-Middle.....	31
GSM850-LeftHandSide-Tilt-Middle	31
4.6LeftHandSide-Tilt-GSM850-High	33
GSM850-LeftHandSide-Tilt-High.....	33
4.7RightHandSide-Cheek-GSM850-Low	35
GSM850-RightHandSide-Cheek-Low.....	35

4.8RightHandSide-Cheek-GSM850-Middle	37
GSM850-RightHandSide-Cheek-Middle	37
4.9RightHandSide-Cheek-GSM850-High	39
GSM850-RightHandSide-Cheek-High	39
4.10RightHandSide-Tilt-GSM850-Low	41
GSM850-RightHandSide-Tilt-Low	41
4.11RightHandSide-Tilt-GSM850-Middle	43
GSM850-RightHandSide-Tilt-Middle	43
4.12RightHandSide-Tilt-GSM850-High	45
GSM850-RightHandSide-Tilt-High.....	45
4.13Maximum Value With Battery2	47
GSM850-LeftHandSide-Cheek-High-Bat2	47
4.14GSM850 Head Worst Case+WiFi802.11b	49
GSM850-LeftHandSide-Cheek-High+WiFi.....	49
4.15GSM850 Head Worst Case+ WiFi802.11b-Bat2	51
GSM850-LeftHandSide-Cheek-High+WiFi-Bat2	51
4.16LeftHandSide-Cheek-PCS1900-Low	53
PCS1900-LeftHandSide-Cheek-Low	53
4.17LeftHandSide-Cheek-PCS1900-Middle	55
PCS1900-LeftHandSide-Cheek-Middle	55
4.18LeftHandSide-Cheek-PCS1900-High	57
PCS1900-LeftHandSide-Cheek-High.....	57
4.19LeftHandSide-Tilt-PCS1900-Low	59
PCS1900-LeftHandSide-Tilt-Low	59
4.20LeftHandSide-Tilt-PCS1900-Middle	61
PCS1900-LeftHandSide-Tilt-Middle	61
4.21LeftHandSide-Tilt-PCS1900-High	63
PCS1900-LeftHandSide-Tilt-High	63
4.22RightHandSide-Cheek-PCS1900-Low	65
PCS1900-RightHandSide-Cheek-Low	65
4.23RightHandSide-Cheek-PCS1900-Middle	67
PCS1900-RightHandSide-Cheek-Middle	67
4.24RightHandSide-Cheek-PCS1900-High	69
PCS1900-RightHandSide-Cheek-High.....	69
4.25RightHandSide-Tilt-PCS1900-Low	71

PCS1900-RightHandSide-Tilt-Low	71
4.26RightHandSide-Tilt-PCS1900-Middle	73
PCS1900-RightHandSide-Tilt-Middle.....	73
4.27RightHandSide-Tilt-PCS1900-High	75
PCS1900-RightHandSide-Tilt-High	75
4.28Maximum Value With Battery2	77
PCS1900-LeftHandSide-Tilt-High-Bat2	77
4.29PCS1900 Head Worst Case+ WiFi802.11b	79
PCS1900-LeftHandSide-Tilt-High+WiFi	79
4.30PCS1900 Head Worst Case+ WiFi802.11b-Bat2	81
PCS1900-LeftHandSide-Tilt-High+WiFi-Bat2	81
4.31LeftHandSide-Cheek-WiFi802.11b-Low	83
WiFi2450-LeftHandSide-Cheek-Low	83
4.32LeftHandSide-Cheek- WiFi802.11b –Middle	85
WiFi2450-LeftHandSide-Cheek-Middle	85
4.33LeftHandSide-Cheek- WiFi802.11b -High	87
WiFi2450-LeftHandSide-Cheek-High.....	87
4.34LeftHandSide-Tilt- WiFi802.11b -Low.....	89
WiFi2450-LeftHandSide-Tilt-Low	89
4.35LeftHandSide-Tilt- WiFi802.11b -Middle	91
WiFi2450-LeftHandSide-Tilt-Middle	91
4.36LeftHandSide-Tilt- WiFi802.11b -High.....	93
WiFi2450-LeftHandSide-Tilt-High	93
4.37RightHandSide-Cheek-WiFi802.11b-Low.....	95
WiFi2450-RightHandSide-Cheek-Low	95
4.38RightHandSide-Cheek- WiFi802.11b –Middle.....	97
WiFi2450-RightHandSide-Cheek-Middle	97
4.39RightHandSide-Cheek- WiFi802.11b -High.....	99
WiFi2450-RightHandSide-Cheek-High.....	99
4.40RightHandSide-Tilt- WiFi802.11b -Low	101
WiFi2450-RightHandSide-Tilt-Low	101
4.41RightHandSide-Tilt- WiFi802.11b -Middle.....	103
WiFi2450-RightHandSide-Tilt-Middle.....	103
4.42RightHandSide-Tilt- WiFi802.11b -High	105
WiFi2450-RightHandSide-Tilt-High	105

4.43 Maximum Value With Battery2	107
WiFi2450-RightHandSide-Cheek-Low-Bat2	107
4.44Body-Worn-GSM850-GPRS-Low	109
GSM850-Body-Worn-Low-GPRS-2cm.....	109
4.45Body-Worn-GSM850-GPRS-Middle.....	111
GSM850-Body-Worn-Middle-GPRS-2cm	111
4.46Body-Worn-GSM850-GPRS-High	113
GSM850-Body-Worn-High-GPRS-2cm.....	113
4.47Maximum Value With Battery2	115
GSM850-Body-Worn-Middle-GPRS-2cm-Bat2	115
4.48Body-Worn-PCS1900-GPRS-Low	117
PCS1900-Body-Worn-Low-GPRS-2cm	117
4.49Body-Worn-PCS1900-GPRS-Middle	119
PCS1900-Body-Worn-Middle-GPRS-2cm.....	119
4.50Body-Worn-PCS1900-GPRS-High	121
PCS1900-Body-Worn-High-GPRS-2cm	121
4.51 Maximum Value With Battery2	123
PCS1900-Body-Worn-High-GPRS-2cm-Bat2.....	123
4.52 Body-Worn-WiFi802.11b-Low	125
WiFi2450-Body-Worn-Back-Low-2cm	125
4.53 Body-Worn-WiFi802.11b-Middle.....	127
WiFi2450-Body-Worn-Back-Middle-2cm.....	127
4.54Body-Worn-WiFi802.11b-High	129
WiFi2450-Body-Worn-Back-High-2cm	129
4.55Maximum Value With Battery2	131
WiFi2450-Body-Worn-Back-Middle-2cm-Bat2	131
Appendix	134
1. Photographs of Test Setup	134
2. Photographs of the EUT	137
3. Antenna Location.....	138
4. Photographs of the battery	138
5. Photograph of the charger.....	139
6. Probe Calibration certificate	140
6. Uncertainty analysis.....	149
7. Phantom description.....	150

1. General Information

1.1 Test Laboratory

GSM Lab
 SGS-CSTC Standards Technical Services Co.Ltd Shanghai Branch
 9F,the 3rd Building, No.889, Yishan Rd, Xuhui District, Shanghai, China
 Zip code: 200233
 Telephone: +86 (0) 21 6495 1616
 Fax: +86 (0) 21 5450 0149
 Internet: <http://www.cn.sgs.com>

1.2 Details of Applicant

Name: UTStarcom
 Address: No.368 LiuHe Road, BinJiang Zone, HangZhou,
 310053,PRC

1.3 Description of EUT(s)

Brand name	UTStarcom	
Model No.	R600	
Market Name	GF210	
Serial No.	IMEI: 35287400000002-8	
State of sample	Production	
Battery Type	Lithium-Ion	
Antenna Type	Inner Antenna	
Operation Mode	GSM850/PCS1900	
Modulation Mode	GMSK	
Frequency range	GSM850	Tx: 824~849 MHz
		Rx: 869~894 MHz
	PCS1900	Tx: 1850~1910 MHz
		Rx: 1930~1990 MHz
Maximum RF Conducted Power	GSM850: 33dBm, PCS1900: 30dBm	
GPRS	MultiSlot class 10 Uplink 2TS	
GPRS Operation Mode	Class B&C	
802.11b Max Conducted Power	17.21dBm	
802.11b Modulation Type	(CCK11M/5.5M)/(DQPSK2M)/(DBPSK1M)	

1.4 Test Environment

Ambient temperature: 22.0° C

Tissue Simulating Liquid: 22° C

Relative Humidity: 39%~45%

1.5 Operation Configuration

Configuration 1: GSM 850, LeftHandSide Cheek & 15 ° Tilt Position

Configuration 2: GSM 850, RightHandSide Cheek & 15 ° Tilt Position

Configuration 3: PCS 1900, LeftHandSide Cheek & 15 ° Tilt Position

Configuration 4: PCS 1900, RightHandSide Cheek & 15 ° Tilt Position

Configuration 5: WiFi802.11b, LeftHandSide Cheek & 15 ° Tilt Position

Configuration 6: WiFi802.11b, RightHandSide Cheek & 15 ° Tilt Position

Configuration 7: GPRS 850, BodyWorn (2.0 cm between EUT and phantom)

Configuration 8: GPRS 1900, BodyWorn (2.0 cm between EUT and phantom)


Configuration 9: WiFi802.11b, BodyWorn (2.0 cm between EUT and phantom)

1.6 Test Procedure

- a). Select device positions (cheek and tilt, for both left and right sides of the SAM phantom); select operation modes for each device position in each frequency band.
- b). Test the above configuration one by one. For each configuration, test highest channel, middle channel and lowest channel.
- c). Compare all the above test results; then select the configuration where the SAR value is worst.
- d). Select the Tissue Simulating Liquid for frequency band 850MHz or 1900MHz respectively and establish a call in each GSM mode, open the WiFi and keep uninterrupted transmitting. Evaluate GSM and WiFi co-transmitting SAR at the worst configuration.

- e). Select the Tissue Simulating Liquid for frequency band 2450MHz and open the WiFi and keep uninterrupted transmitting, then establish a call in each GSM mode. Evaluate GSM and WiFi co-transmitting SAR at the worst configuration.

1.7 SAM Twin Phantom

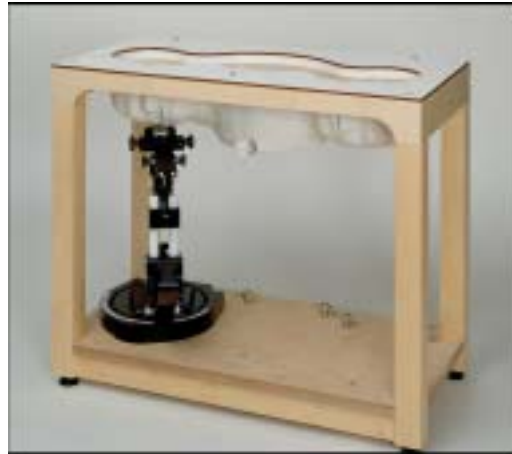

The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region where shell thickness increases to 6mm). It has three measurement areas:

- Left hand
- Right hand
- Flat phantom

A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on the cover are possible.

On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

Phantom specification:

Construction: The shell corresponds to the specifications of Specific Anthropomorphic Mannequin(SAM) Phantom defined in IEEE 1528-2003, EN 50361:2001 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid.

Shell Thickness $2 \pm 0.2 \text{ mm}$

Filling Volume Approx. 25 liters

Dimensions

Height: 850mm Length: 1000mm Width: 500mm

1.8 Device Holder for Transmitters



The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source in 5mm distance, a positioning uncertainty of $\pm 0.5\text{mm}$ would produce a SAR uncertainty of $\pm 20\%$. An accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions, in which the devices must be measured, are defined by the standards.

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation centers for both scales are the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon_r=3$ and loss tangent $\tan \delta=0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

1.9 Description of Test Position

1.9.1 SAM Phantom Shape

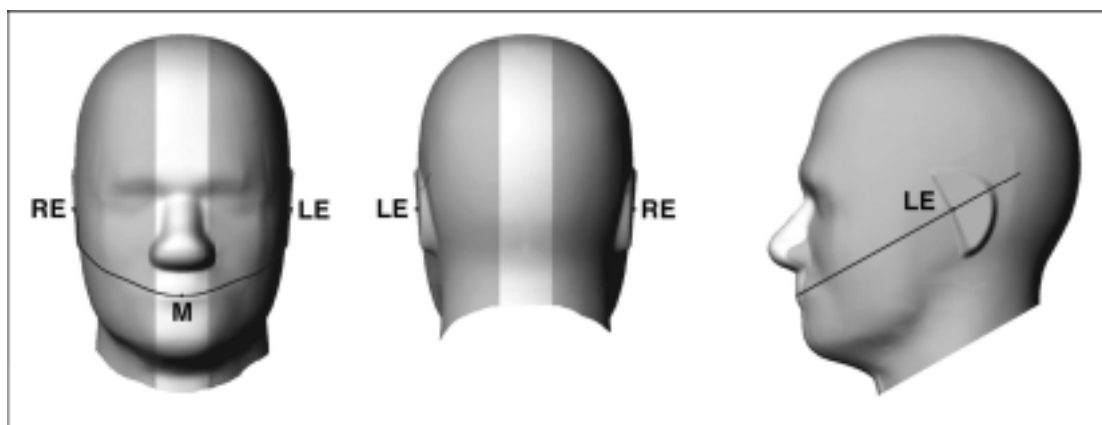


Figure 1—front, back, and side views of SAM (model for the phantom shell). Full-head model is for illustration purposes only—procedures in this recommended practice are intended primarily for the phantom setup of Figure 2. Note: The center strip including the nose region has a different thickness tolerance.

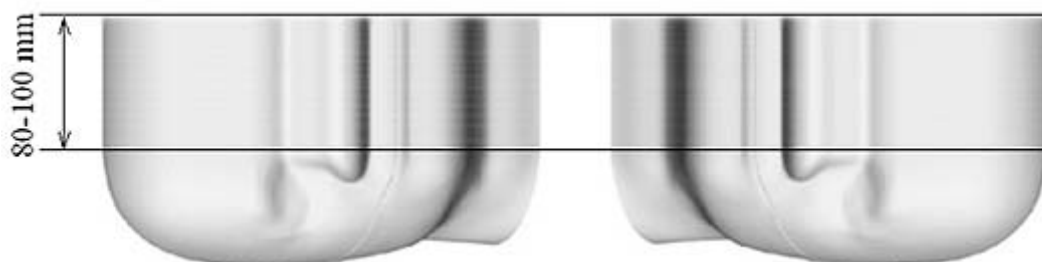


Figure 2—Sagittally bisected phantom with extended perimeter (shown placed on its side as used for SAR measurements)

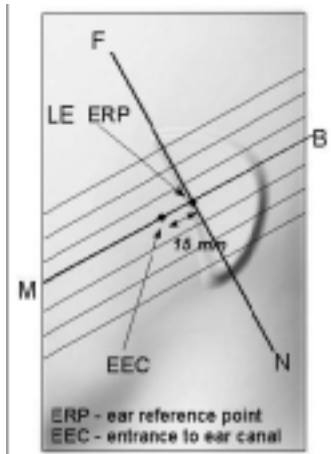


Figure 3—Close-up side view of phantom showing the ear region, N-F and B-M lines, and seven cross-sectional plane locations

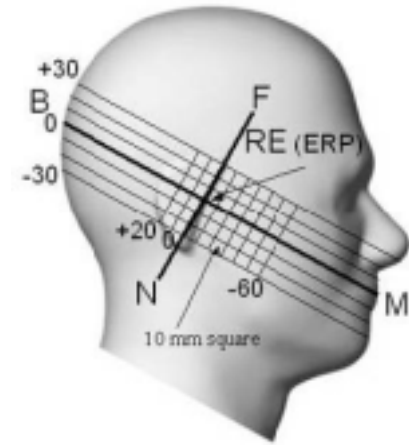


Figure 4—Side view of the phantom showing relevant markings and seven cross-sectional plane locations

1.9.2 The following pictures present the different DUT constructions.

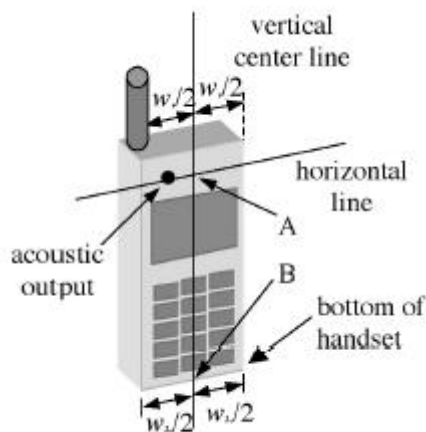


Figure 5a—Handset vertical and horizontal reference lines—"fixed case"

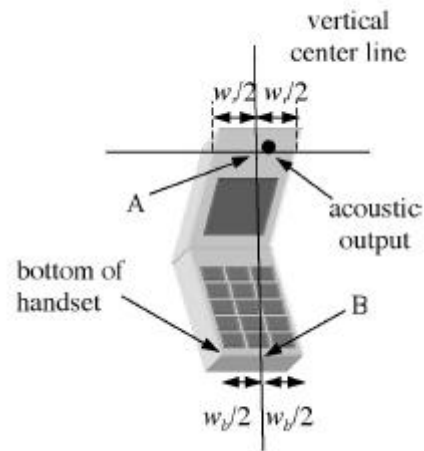


Figure 5b—Handset vertical and horizontal reference lines—"clam-shell case"

1.9.3 Definition of the "cheek" position:

- a) Position the device with the vertical centre line of the body of the device and the horizontal line crossing the centre of the ear piece in a plane parallel to the sagittal plane of the phantom ("initial position" see Figure 6). While maintaining the device in this plane, align the vertical centre line with the reference plane containing the three

ear and mouth reference points (M, RE and LE) and align the centre of the ear piece with the line RE-LE;

- b) Translate the mobile phone box towards the phantom with the ear piece aligned with the line LE-RE until the phone touches the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the box until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost.

1.9.4 Definition of the “tilted” position:

- a) Position the device in the “cheek” position described above;
- b) While maintaining the device in the reference plane described above and pivoting against the ear, move it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost.

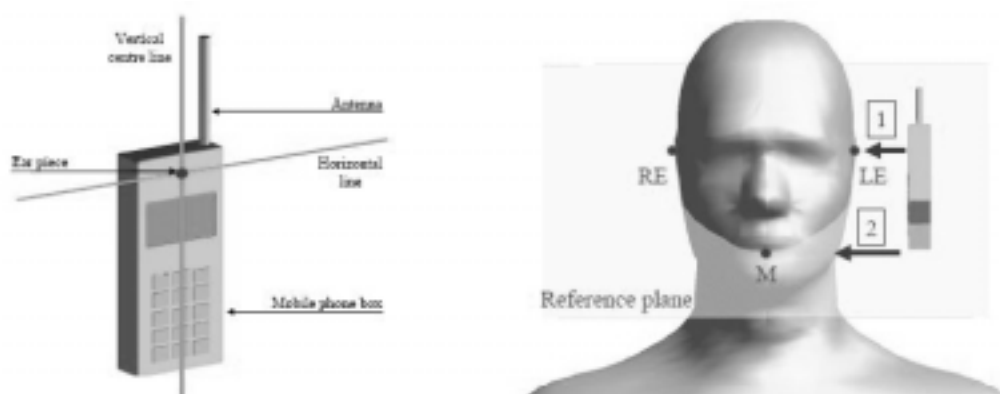


Figure 6 - Definition of the reference lines and points, on the phone and on the phantom and initial position

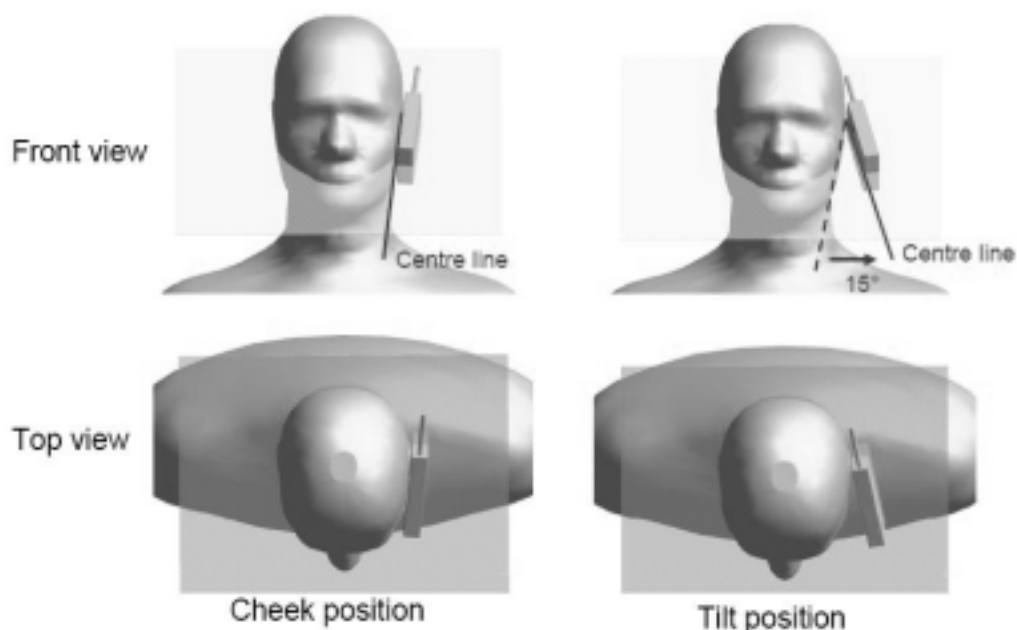


Figure 7 -“Cheek” and “tilt” positions of the mobile phone on the left side

2.0 Recipes for Tissue Simulating Liquid

The following tables give the recipes for tissue simulating liquids to be used in different frequency bands.

Ingredient	835MHz	1900MHz
Water	40.29%	55.24%
Sugar	57.90%	-
Salt (NaCl)	1.38%	0.31%
DGBE	-	44.45%
Preventol	0.18%	-
HEC	0.24%	-
Relative Permittivity	41.5	40.0
Conductivity (S/m)	0.90	1.40

Table 1: Composition of the Head Tissue Equivalent Matter

Ingredient	835MHz	1900MHz
Water	50.75%	70.17%
Sugar	48.21%	-

Salt (NaCl)	0.94%	0.39%
DGBE	-	29.44%
Preventol	0.10%	-
Relative Permittivity	55.2	53.3
Conductivity (S/m)	0.97	1.52

Table 2: Composition of the Body Tissue Equivalent Matter

Ingredient	WiFi802.11b(Head)	WiFi802.11b(Body)
Water	45.0%	69.83%
DGBE	55.0%	30.17%
Relative Permittivity	39.2	52.7
Conductivity (S/m)	1.80	1.95

Table 3: Composition of the Head and Body Tissue Equivalent Matter

2.1 Measurement procedure

Step 1: Power reference measurement

The SAR measurement was taken at a selected spatial reference point to monitor power variations during testing. This fixed location point was measured and used as a reference value.

Step 2: Area scan

The SAR distribution at the exposed side of the head was measured at a distance of 3.9mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 20mm*20mm. Based on the area scan data, the area of the maximum absorption was determined by spline interpolation.

Step 3: Zoom scan

Around this point, a volume of 30mm*30mm*34mm (fine resolution volume scan, zoom scan) was assessed by measuring 7*7*7 points. On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

The data at the surface was extrapolated, since the center of the dipoles is 2.1mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2mm. (This can be variable. Refer to the probe specification) The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip. The maximum

interpolated value was searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The volume was integrated with the trapezoidal algorithm. One thousand points (10*10*10) were interpolated to calculate the average. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Power reference measurement (drift)

The SAR value at the same location as in step 1 was again measured. (If the value changed by more than 5%, the evaluation is repeated.)

2.2 The SAR Measurement System

A photograph of the SAR measurement System is given in Fig.8.

This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (Speag Dasy 4 professional system). A Model ES3DV3 3088 E-field probe is used to determine the internal electric fields. The SAR can be obtained from the equation $SAR = \sigma (|E_i|^2) / \rho$ where σ and ρ are the conductivity and mass density of the tissue-simulant.

The DASY4 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stabile RX family) with controller, teach pendant and software. An arm extension for accommodation the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.

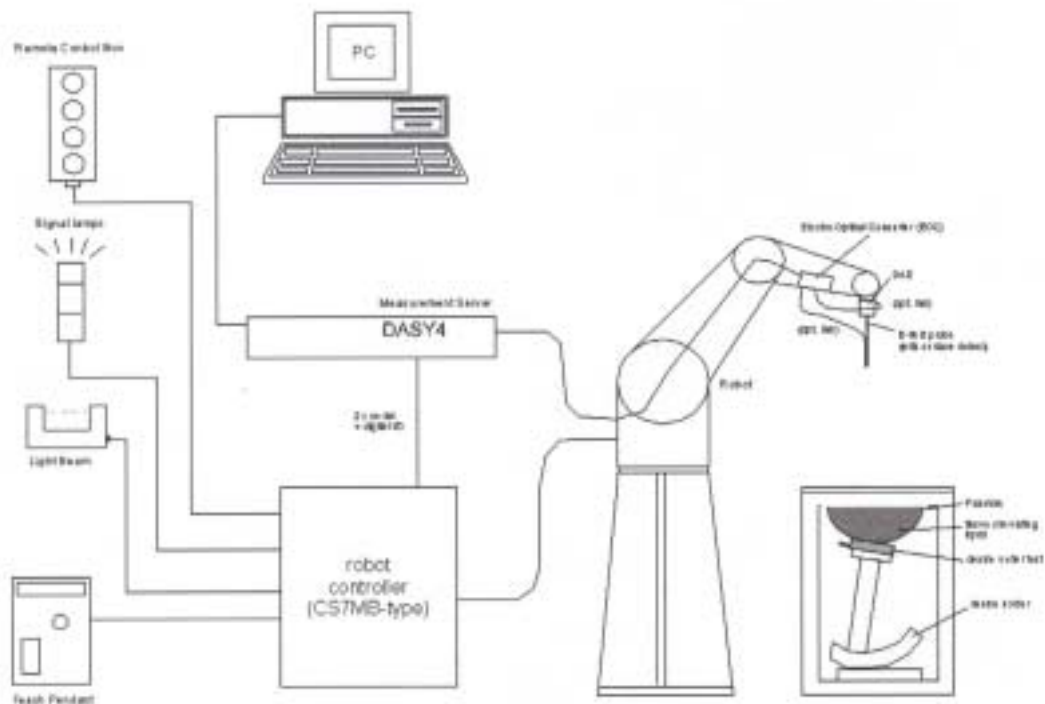


Fig. 8 SAR System Configuration

- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 2000.
- DASY4 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand, right-hand and body-worn usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing to validate the proper functioning of the system.

2.3 SAR System Verification

The microwave circuit arrangement for system verification is sketched in Fig. 9. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within $\pm 10\%$ from the target SAR values. These tests were done at 900MHz & 1900MHz & 2450 MHz. The tests were conducted on the same days as the measurement of the DUT. The obtained results from the system accuracy verification are displayed in the table 1 (SAR values are normalized to 1W forward power delivered to the dipole). During the tests, the ambient temperature of the laboratory was in the range 22°C, the relative humidity was in the range 60% and the liquid depth above the ear reference points was above 15 cm in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

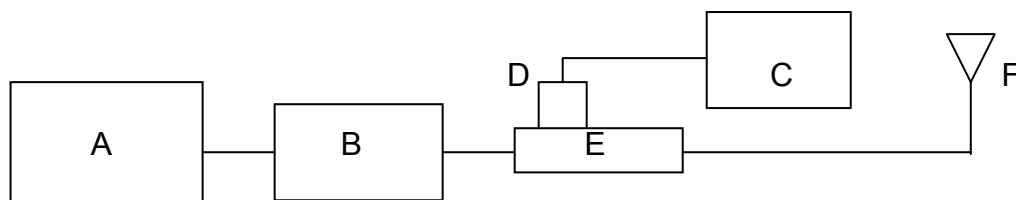


Fig. 9 the microwave circuit arrangement used for SAR system verification

- A. Agilent Model E4438C Signal Generator
- B. Mini-Circuit Model ZHL-42 Preamplifier
- C. Agilent Model E4416A Power Meter
- D. Agilent Model 8481H Power Sensor
- E. HT CP6100 20N Dual directional coupler
- F. Reference dipole antenna

Validation Kit	Frequency MHz	Target SAR 1g (250mW)	Target SAR 10g (250mW)	Measured SAR 1g	Measured SAR 10g	Measured Date
ES3DV3 SN3088	900 Head	2.6	1.67	2.69	1.65	2006-08-28

ES3DV3 SN3088	900 Head	2.6	1.67	2.65	1.63	2006-09-06
ES3DV3 SN3088	900 Body	2.69	1.74	2.75	1.77	2006-08-29
ES3DV3 SN3088	1900 Head	9.89	5.16	9.73	5.08	2006-08-25
ES3DV3 SN3088	1900 Head	9.89	5.16	9.76	5.12	2006-09-05
ES3DV3 SN3088	1900 Body	9.81	5.22	9.68	5.17	2006-08-30
ES3DV3 SN3088	2450 Head	13.1	6.03	12.95	5.89	2006-08-31
ES3DV3 SN3088	2450 Body	14.0	6.46	13.78	6.28	2006-09-01

Table 3. Result System Validation

2.4 Tissue Simulant Fluid for the Frequency Band 850MHz &1900MHZ&2450MHz

The dielectric properties for this body-simulant fluid were measured by using the HP Model 85070D Dielectric Probe (rates frequency band 200 MHz to 20 GHz) in conjunction with Agilent E5071B Network Analyzer (300 KHz-8500 MHz). The Conductivity (σ) and Permittivity (ρ) are listed in Table 2. For the SAR measurement given in this report. The temperature variation of the Tissue Simulant Fluid was 22°C.

Frequency (MHz)	Tissue Type	Limit/Measured	Permittivity (ρ)	Conductivity (σ)	Simulated Tissue Temp (°C)
850	Head	Measured, 2006-08-28	41.64	0.887	22.2
		Measured, 2006-09-06	41.41	0.92	22.3
		Recommended Limit	41.5±5%	0.97±5%	20-24
	Body	Measured, 2006-08-29	53.57	0.995	21.8
		Recommended Limit	55.0±5%	1.05±5%	20-24
1900	Head	Measured, 2006-08-25	39.43	1.423	22.3

		Measured, 2006-09-05	39.45	1.413	21.3
		Recommended Limit	40.0±5%	1.40±5%	20-24
	Body	Measured, 2006-08-30	52.05	1.534	22.4
		Recommended Limit	53.3±5%	1.52±5%	20-24
2450	Head	Measured, 2006-08-31	52.63	1.86	22.1
		Recommended Limit	52.7±5%	1.95±5%	20-24
	Body	Measured, 2006-09-01	51.62	1.943	22.6
		Recommended Limit	52.5±5%	2.00±5%	20-24

Table 4. Dielectric parameters for the Frequency Band 850MHz&1900MHZ&2450MHz

2.5 Test Standards and Limits

According to FCC 47 CFR §2.1093(d) the limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in Section 4.2 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3KHz to 300GHz," ANSI/IEEE C95.1-1992, Copyright 1992 by the Institute of Electrical & Electronics Engineers, Inc., New York, New York 10071.

Human Exposure	Uncontrolled Environment General Population
Spatial Peak SAR (Brain)	1.60 mW/g (averaged over a mass of 1g)

Table 5. RF Exposure Limits

Notes:

1. Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.

2. Summary of Results

Head SAR Results

Mode	Test Configuration		SAR, Averaged over 1g(W/kg)			Temperature ()	Verdict
	Channel/Power(dBm)		Low/31.5	Middle/31.6	High/31.7		
GSM850	Left	Cheek	0.567	0.688	0.810	22	Pass
		Tilt	0.355	0.440	0.515	22	Pass
	Right	Cheek	0.516	0.646	0.757	22	Pass
		Tilt	0.307	0.400	0.317	22	Pass
	Worst case Left/ Cheek	Using battery2	-	-	0.820	22	Pass
		WiFi active Using battery1	-	-	0.848	22	Pass
		WiFi active Using battery2	-	-	0.902	22	Pass

Mode	Test Configuration		SAR, Averaged over 1g(W/kg)			Temperature ()	Verdict
	Channel/Power(dBm)		Low/28.3	Middle/28.3	High/28.5		
PCS1900	Left	Cheek	0.305	0.323	0.347	22	Pass
		Tilt	0.301	0.351	0.366	22	Pass
	Right	Cheek	0.217	0.290	0.267	22	Pass
		Tilt	0.212	0.266	0.229	22	Pass
	Worst case Left/Tilt	Using battery2	-	-	0.354	22	Pass
		WiFi active Using battery1	-	-	0.517	22	Pass
		WiFi active Using battery2	-	-	0.512	22	Pass

Mode	Test Configuration		SAR, Averaged over 1g(W/kg)			Temperature ()	Verdict
	Channel/Power(dBm)		Low/17.2	Middle/16.8	High/16.3		
802.11b	Left	Cheek	0.253	0.230	0.200	22	Pass
		Tilt	0.229	0.191	0.156	22	Pass
	Right	Cheek	0.396	0.321	0.308	22	Pass
		Tilt	0.280	0.255	0.229	22	Pass
	Worst case	Using battery2	0.387	-	-	22	Pass

Body SAR Results

Mode	Test Configuration		SAR, Averaged over 1g(W/kg)			Temperature ()	Verdict
	Channel/Power(dBm)		Low/31.5	Middle/31.6	High/31.7		
GSM850	2 slot GPRS	Using battery1	0.961	1.03	0.999	22	Pass
	Worst case	Using battery2	-	1.03	-	22	Pass

Mode	Test Configuration		SAR, Averaged over 1g(W/kg)			Temperature ()	Verdict
	Channel/Power(dBm)		Low/28.3	Middle/28.3	High/28.5		
PCS1900	2 slot GPRS	Using battery1	0.380	0.575	0.701	22	Pass
	Worst case	Using battery2	-	-	0.682	22	Pass

Mode	Test Configuration		SAR, Averaged over 1g(W/kg)			Temperature ()	Verdict
	Channel/Power(dBm)		Low/17.2	Middle/16.8	High/16.3		
802.11b	CCK	5.5M bps	0.072	0.074	0.070	22	Pass
	Worst case	Using battery2	-	0.074	-	22	Pass

Maximum Results

Head

Mode	Conducted Power	Configuration	SAR Limit (1g averaged)	Measured Value	Power Drift	Verdict
GSM850+WiFi	31.7dBm	Left/Cheek/Battery2	1.6W/Kg	0.902W/Kg	-0.037dB	Pass
PCS1900+WiFi	28.5dBm	Left/Tilt/Battery1	1.6W/Kg	0.517W/Kg	-0.207dB	Pass

Body

Mode	Conducted Power	Configuration	SAR Limit (1g averaged)	Measured Value	Power Drift	Verdict
2 slots GPRS850	31.6dBm	Middle Channel	1.6W/Kg	1.03W/Kg	-0.109dB	Pass
2 slots GPRS1900	28.5dBm	High Channel	1.6W/Kg	0.701W/Kg	-0.077dB	Pass

Note:

1. In GSM 850 band, the low, middle and high channels are CH128/824.2MHz, CH189/836.4MHz and CH251/848.8MHz separately.
2. In PCS 1900 band, the low, middle and high channels are CH512/1805.2MHz, CH661/1880.0MHz and CH810/1909.8MHz separately.
3. In WiFi802.11b, the low, middle and high channels are CH01/2412MHz, CH06/2437MHz and CH11/2462MHz separately.
4. For the GSM Bodyworn measurements the sample was only placed with the antenna toward the phantom since this position delivers the highest SAR values, and the distance is 2.0 cm.
5. The Mobile Station (MS) supports Voice over WLAN, but can not have the GPRS and 802.11b working simultaneously.
6. There are two kinds of batteries applied: Battery1 and Battery2, which have the same shape but from different providers. They provide the MS with the same output power.

3. Instruments List

Instrument	Model	Serial number	NO.	Date of last Calibration
Desktop PC	COMPAQ EVO	N/A	GSM-SAR-025	N/A
Dasy 4 software	V 4.6 build 23	N/A	GSM-SAR-001	N/A
Probe	ES3DV3	3088	GSM-SAR-034	2005.09.13
DAE	DAE3	569	GSM-SAR-023	2005.11.17
Phantom	SAM 12	TP-1283	GSM-SAR-005	N/A
Robot	RX90L	F03/5V32A1/A01	GSM-SAR-008	N/A
900MHz system validation dipole	D900V2	184	GSM-SAR-013	2005.9.22
1900MHz system validation dipole	D1900V2	5d028	GSM-SAR-020	2005.9.25
2450MHz system validation dipole	D2450V2	733	GSM-SAR-019	2005.9.27
Dielectric probe kit	85070D	US01440168	GSM-SAR-016	2005.12.19
Agilent network analyzer	E5071B	MY42100549	GSM-SAR-007	2005.12.19
Agilent signal generator	E4438	14438CATO-19719	GSM-SAR-008	2005.12.19
Mini-Circuits preamplifier	ZHL-42	D041905	GSM-SAR-033	2006.04.19
Agilent power meter	E4416A	GB41292095	GSM-SAR-010	2005.12.19
Agilent power sensor	8481H	MY41091234	GSM-SAR-011	2005.12.19
HT CP6100 20N Coupling	6100	SCP301480120	GSM-SAR-012	2005.12.19
R&S Universal radio communication tester	CMU200	103633	GSM-AUD-002	2005.12.20

4. Measurements

4.1 LeftHandSide-Cheek-GSM850-Low

Date/Time: 2006-8-28 12:47:47

Test Laboratory: SGS-GSM

GSM850-LeftHandSide-Cheek-Low

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: GSM850-GSM Mode; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.875$ mho/m; $\epsilon_r = 42.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.91, 5.91, 5.91); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Cheek position - Low/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.595 mW/g


Cheek position - Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.5 V/m; Power Drift = 0.046 dB

Peak SAR (extrapolated) = 0.794 W/kg

SAR(1 g) = 0.567 mW/g; SAR(10 g) = 0.389 mW/g

Maximum value of SAR (measured) = 0.604 mW/g

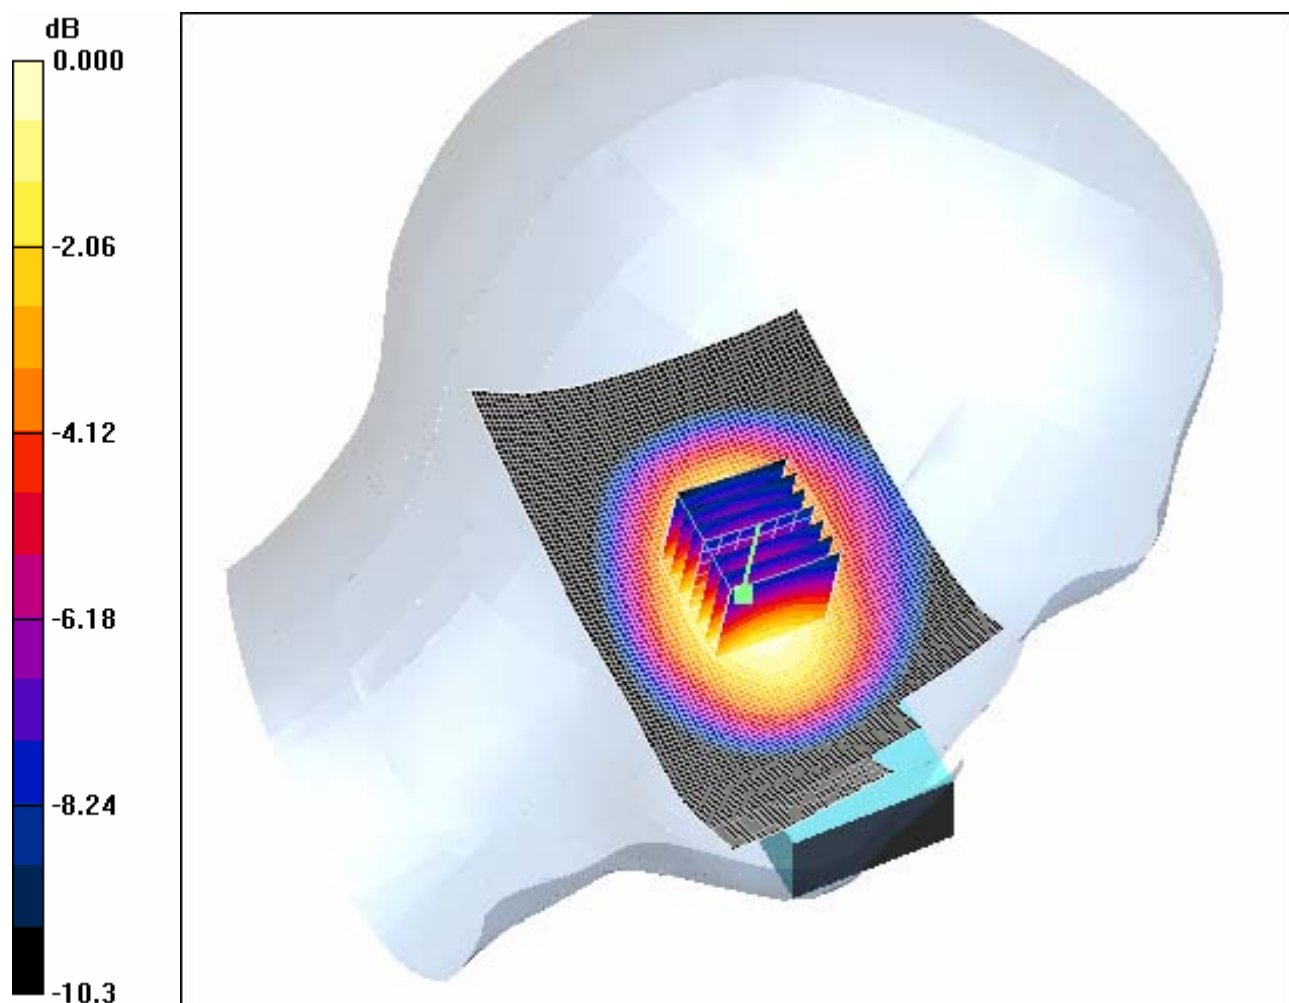

0 dB = 0.604mW/g

4.2LeftHandSide-Cheek-GSM850-Middle

Date/Time: 2006-8-28 11:50:53

Test Laboratory: SGS-GSM

GSM850-LeftHandSide-Cheek-Middle

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: GSM850-GSM Mode; Frequency: 836.4 MHz;Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.886$ mho/m; $\epsilon_r = 42.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.91, 5.91, 5.91); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Cheek position - Mid/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.730 mW/g


Cheek position - Mid/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.1 V/m; Power Drift = 0.060 dB

Peak SAR (extrapolated) = 0.969 W/kg

SAR(1 g) = 0.688 mW/g; SAR(10 g) = 0.476 mW/g

Maximum value of SAR (measured) = 0.732 mW/g

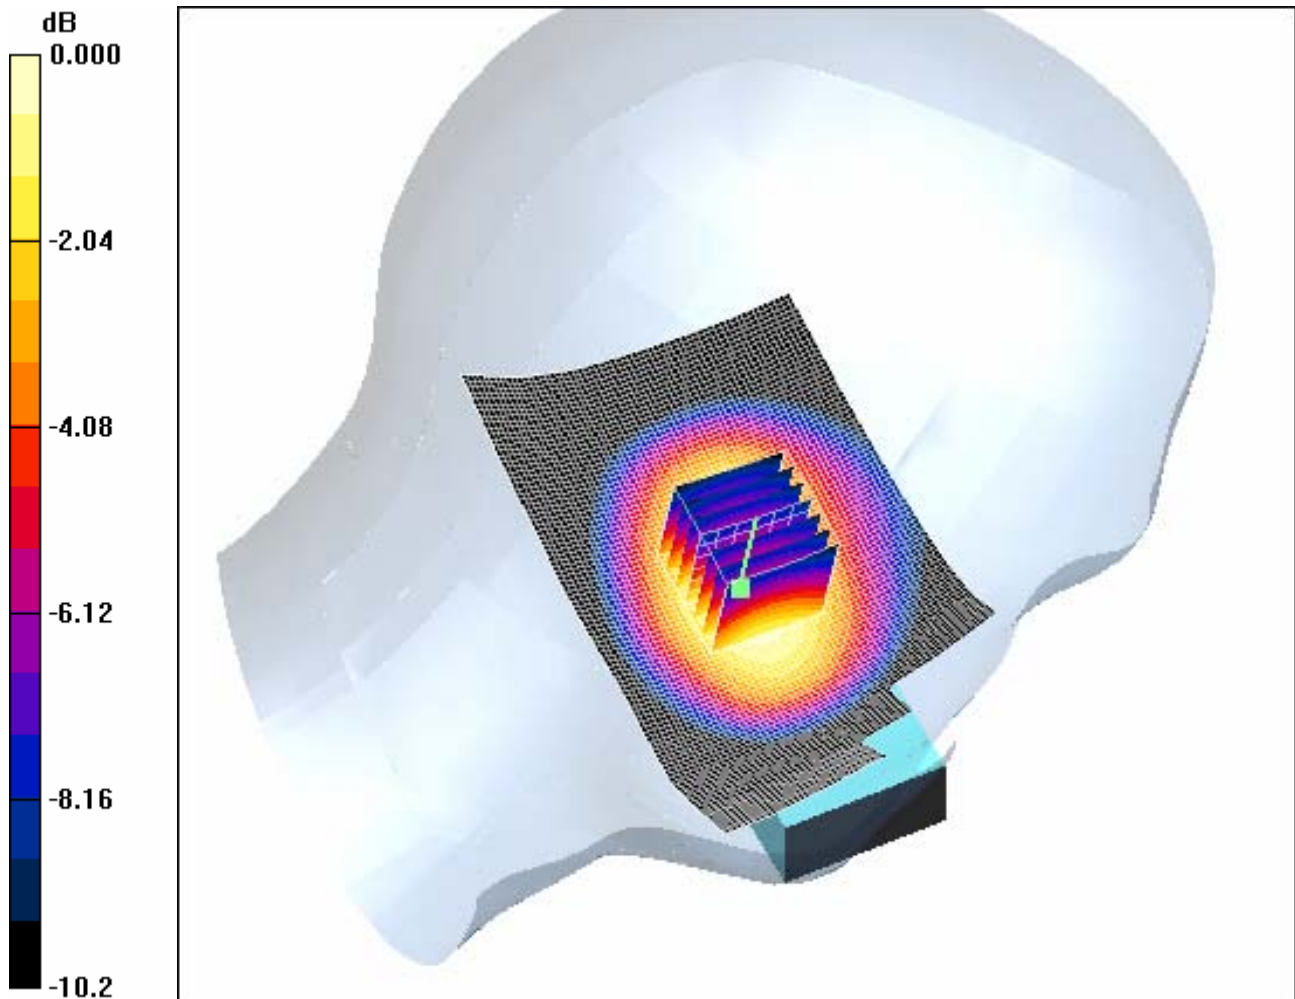

0 dB = 0.732mW/g

4.3LeftHandSide-Cheek-GSM850-High

Date/Time: 2006-8-28 13:12:36

Test Laboratory: SGS-GSM

GSM850-LeftHandSide-Cheek-High

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: GSM850-GSM Mode; Frequency: 848.8 MHz;Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used: $f = 848.8$ MHz; $\sigma = 0.896$ mho/m; $\epsilon_r = 42.3$; $\rho =$

1000 kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.91, 5.91, 5.91); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Cheek position - High/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.854 mW/g


Cheek position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.3 V/m; Power Drift = -0.009 dB

Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.810 mW/g; SAR(10 g) = 0.557 mW/g

Maximum value of SAR (measured) = 0.861 mW/g

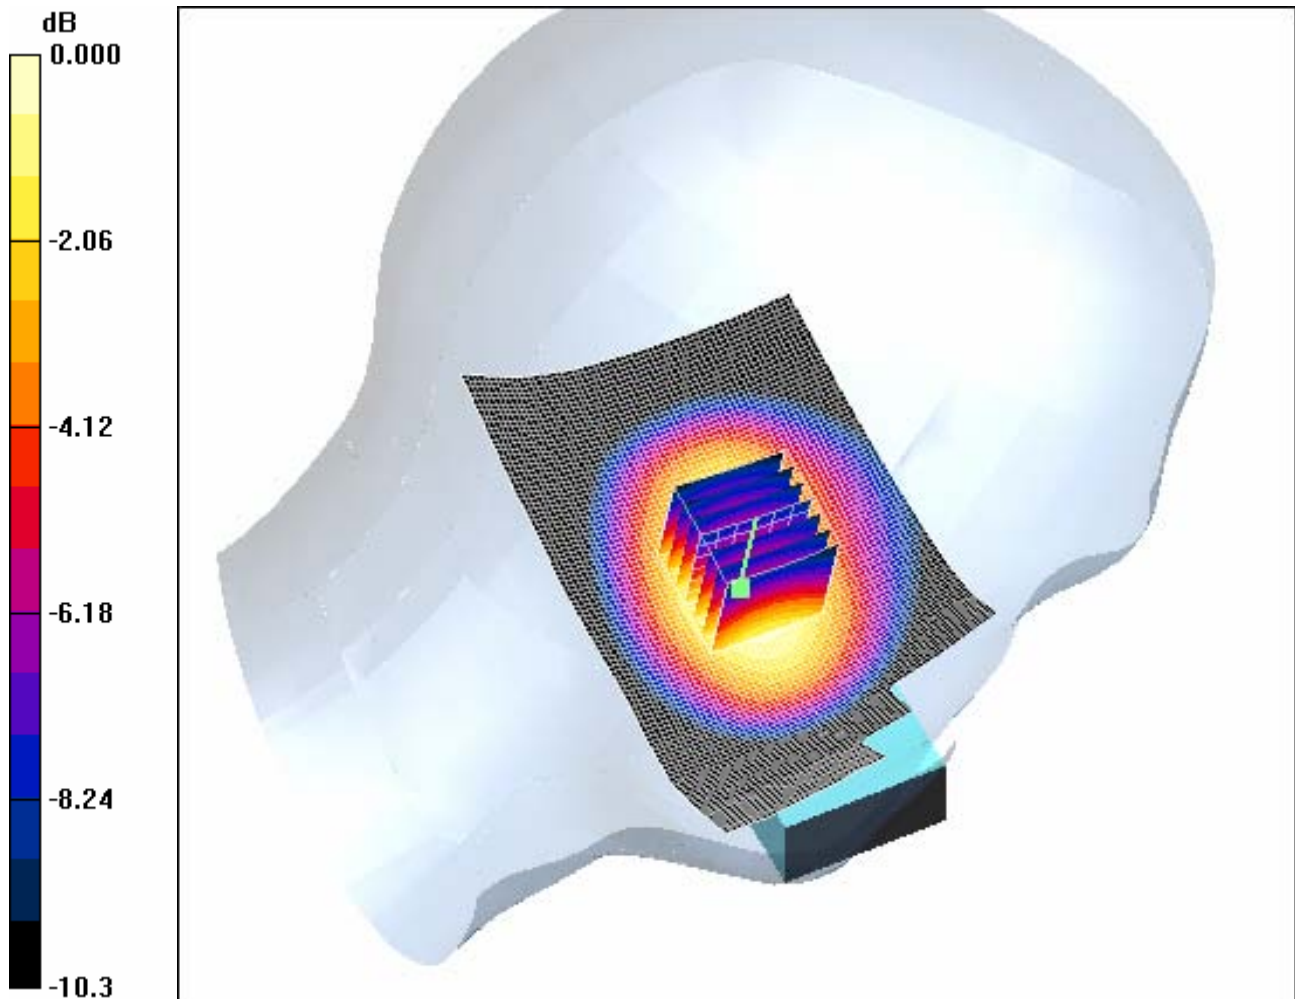

0 dB = 0.861mW/g

4.4LeftHandSide-Tilt-GSM850-Low

Date/Time: 2006-9-6 12:50:53

Test Laboratory: SGS-GSM

GSM850-LeftHandSide-Tilt-Low

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: GSM850-GSM Mode; Frequency: 824.2 MHz;Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.875$ mho/m; $\epsilon_r = 42.4$; $\rho =$

1000 kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.91, 5.91, 5.91); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Tilt position - Low/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.393 mW/g


Tilt position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.9 V/m; Power Drift = 0.020 dB

Peak SAR (extrapolated) = 0.555 W/kg

SAR(1 g) = 0.355 mW/g; SAR(10 g) = 0.242 mW/g

Maximum value of SAR (measured) = 0.381 mW/g

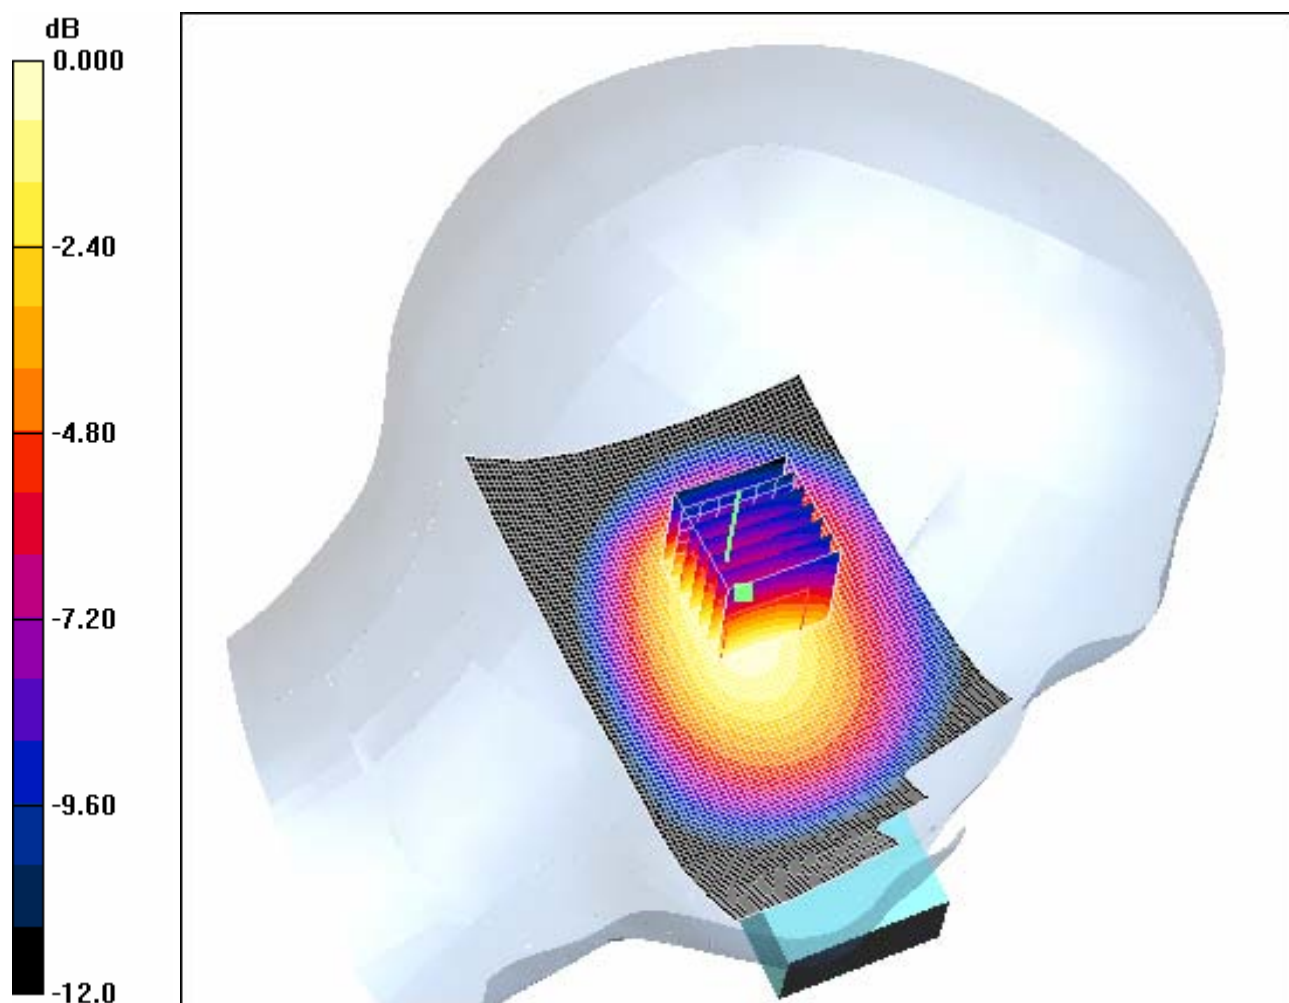

0 dB = 0.381mW/g

4.5LeftHandSide-Tilt-GSM850-Middle

Date/Time: 2006-8-28 12:21:25

Test Laboratory: SGS-GSM

GSM850-LeftHandSide-Tilt-Middle

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: GSM850-GSM Mode; Frequency: 836.4 MHz;Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.886$ mho/m; $\epsilon_r = 42.3$; $\rho =$

1000 kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.91, 5.91, 5.91); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Tilt position - Middle/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.480 mW/g


Tilt position - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.4 V/m; Power Drift = 0.016 dB

Peak SAR (extrapolated) = 0.691 W/kg

SAR(1 g) = 0.440 mW/g; SAR(10 g) = 0.300 mW/g

Maximum value of SAR (measured) = 0.468 mW/g

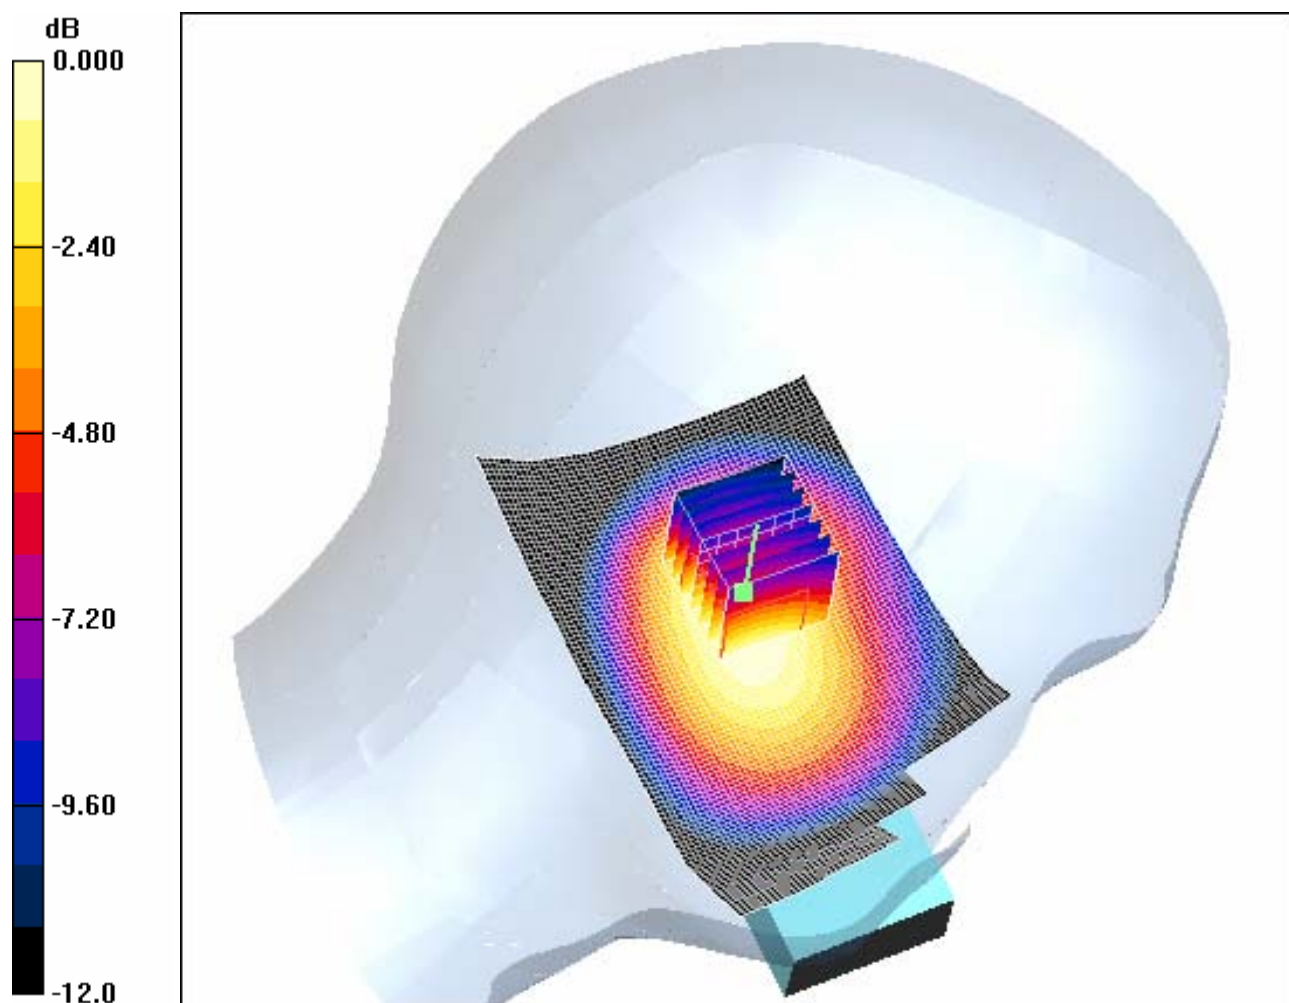

0 dB = 0.468mW/g

4.6LeftHandSide-Tilt-GSM850-High

Date/Time: 2006-9-6 13:23:01

Test Laboratory: SGS-GSM

GSM850-LeftHandSide-Tilt-High

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: GSM850-GSM Mode; Frequency: 848.8 MHz;Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used: $f = 848.8$ MHz; $\sigma = 0.896$ mho/m; $\epsilon_r = 42.3$; $\rho =$

1000 kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.91, 5.91, 5.91); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Tilt position - High/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.568 mW/g


Tilt position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.9 V/m; Power Drift = 0.005 dB

Peak SAR (extrapolated) = 0.829 W/kg

SAR(1 g) = 0.515 mW/g; SAR(10 g) = 0.344 mW/g

Maximum value of SAR (measured) = 0.553 mW/g

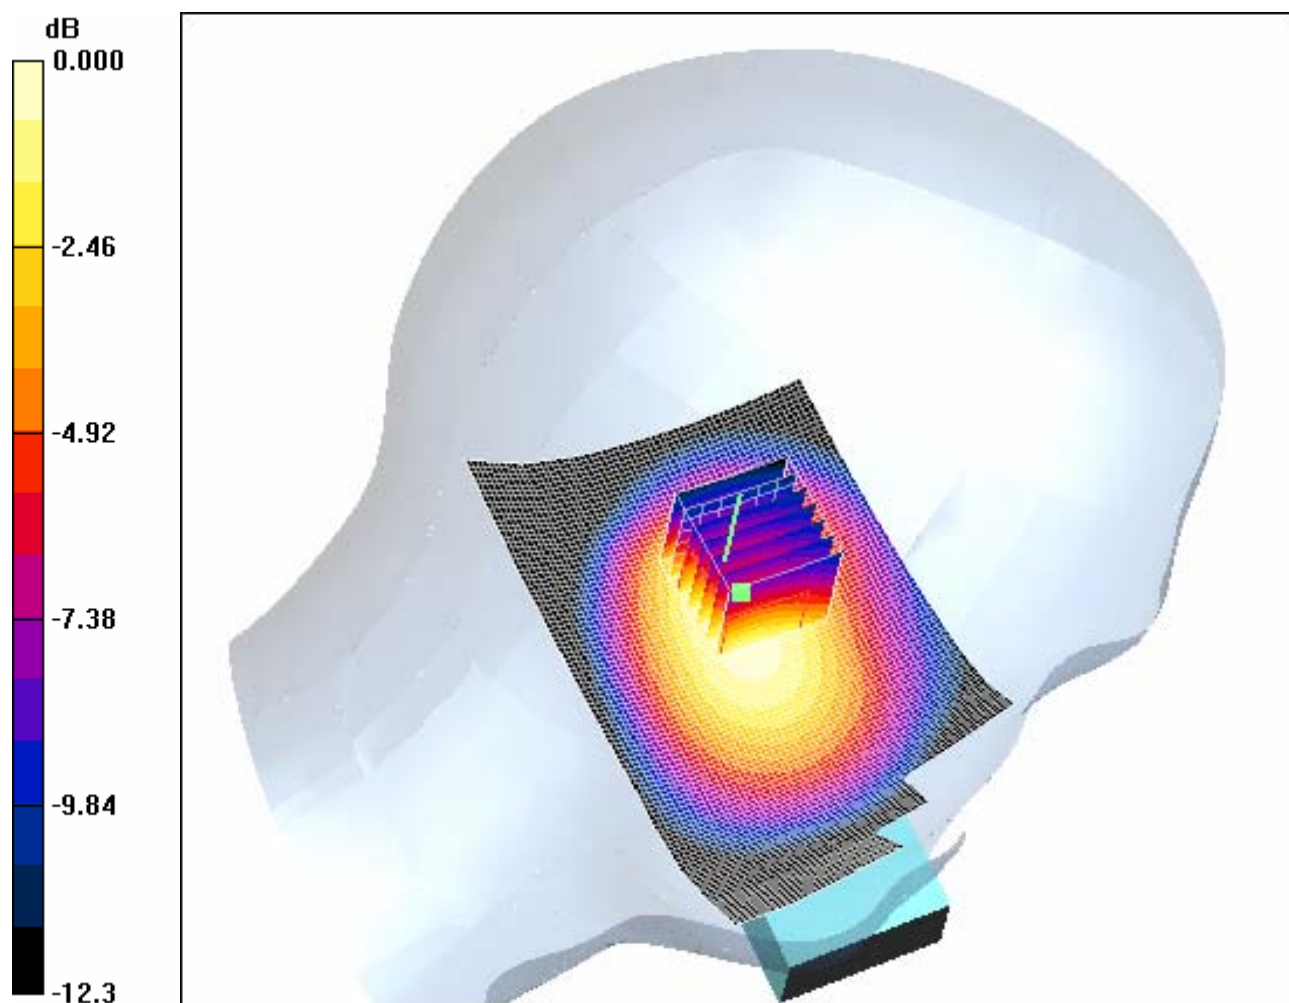

0 dB = 0.553mW/g

4.7RightHandSide-Cheek-GSM850-Low

Date/Time: 2006-8-28 17:01:57

Test Laboratory: SGS-GSM

GSM850-RightHandSide-Cheek-Low

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: GSM850-GSM Mode; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.875$ mho/m; $\epsilon_r = 42.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.91, 5.91, 5.91); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Cheek position - Low/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.565 mW/g


Cheek position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.1 V/m; Power Drift = 0.050 dB

Peak SAR (extrapolated) = 0.687 W/kg

SAR(1 g) = 0.516 mW/g; SAR(10 g) = 0.361 mW/g

Maximum value of SAR (measured) = 0.549 mW/g

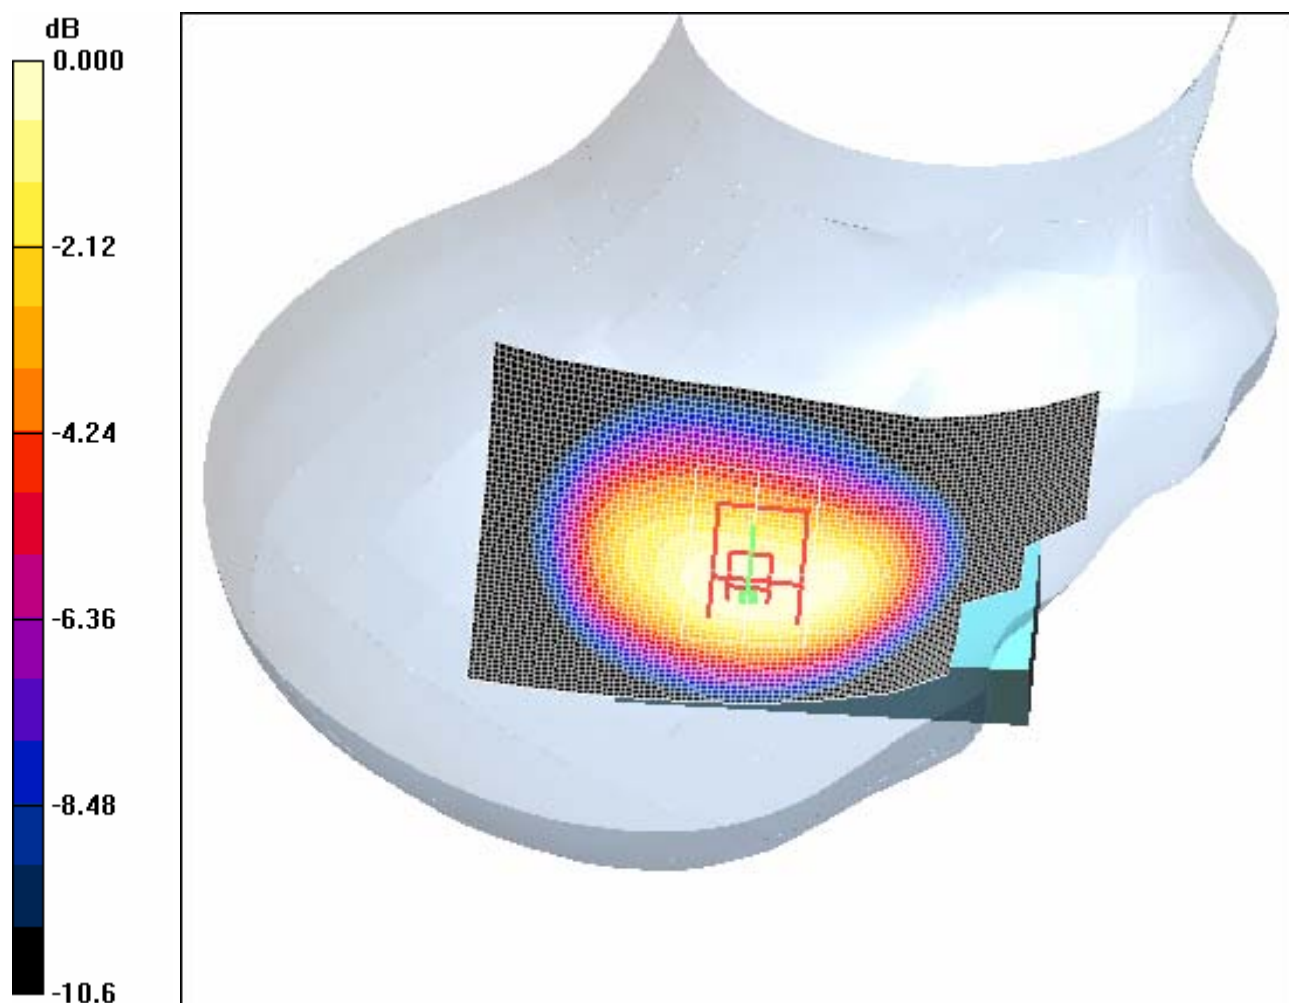

0 dB = 0.549mW/g

4.8RightHandSide-Cheek-GSM850-Middle

Date/Time: 2006-8-28 16:10:08

Test Laboratory: SGS-GSM

GSM850-RightHandSide-Cheek-Middle

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: GSM850-GSM Mode; Frequency: 836.4 MHz;Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.886$ mho/m; $\epsilon_r = 42.3$; $\rho =$

1000 kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.91, 5.91, 5.91); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Cheek position - Middle/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.706 mW/g


Cheek position - Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.3 V/m; Power Drift = 0.032 dB

Peak SAR (extrapolated) = 0.857 W/kg

SAR(1 g) = 0.646 mW/g; SAR(10 g) = 0.452 mW/g

Maximum value of SAR (measured) = 0.686 mW/g

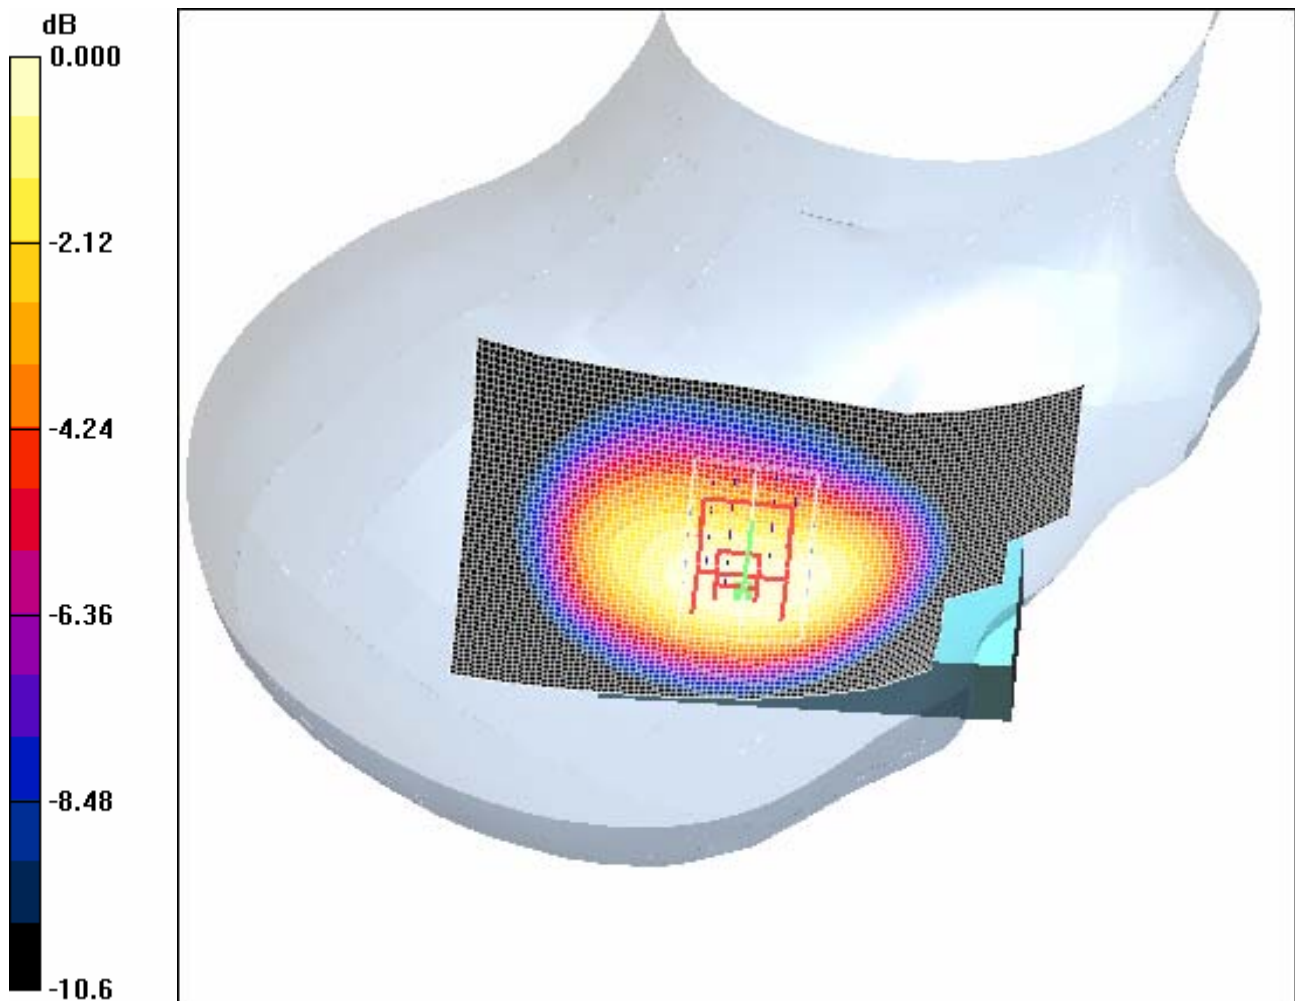

0 dB = 0.686mW/g

4.9RightHandSide-Cheek-GSM850-High

Date/Time: 2006-8-28 17:30:15

Test Laboratory: SGS-GSM

GSM850-RightHandSide-Cheek-High

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: GSM850-GSM Mode; Frequency: 848.8 MHz;Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used: $f = 848.8$ MHz; $\sigma = 0.896$ mho/m; $\epsilon_r = 42.3$; $\rho =$

1000 kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.91, 5.91, 5.91); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Cheek position - High/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.836 mW/g


Cheek position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.1 V/m; Power Drift = -0.032 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.757 mW/g; SAR(10 g) = 0.529 mW/g

Maximum value of SAR (measured) = 0.803 mW/g

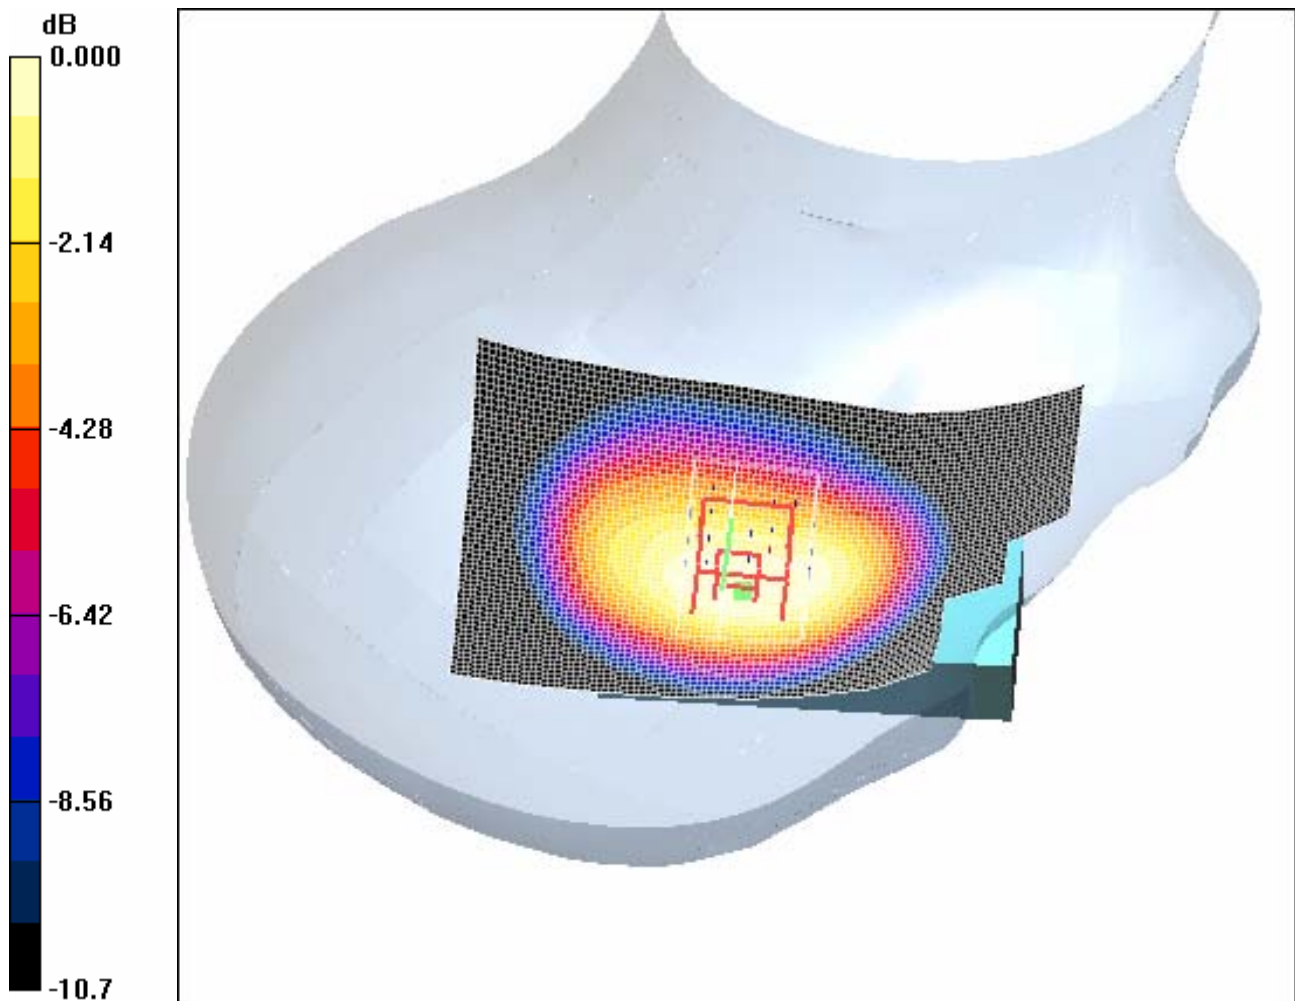

0 dB = 0.803mW/g

4.10RightHandSide-Tilt-GSM850-Low

Date/Time: 2006-9-6 10:57:06

Test Laboratory: SGS-GSM

GSM850-RightHandSide-Tilt-Low

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: GSM850-GSM Mode; Frequency: 824.2 MHz;Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.875$ mho/m; $\epsilon_r = 42.4$; $\rho =$

1000 kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.91, 5.91, 5.91); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Tilt position - Low/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.329 mW/g


Tilt position - Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.0 V/m; Power Drift = -0.030 dB

Peak SAR (extrapolated) = 0.417 W/kg

SAR(1 g) = 0.307 mW/g; SAR(10 g) = 0.215 mW/g

Maximum value of SAR (measured) = 0.327 mW/g

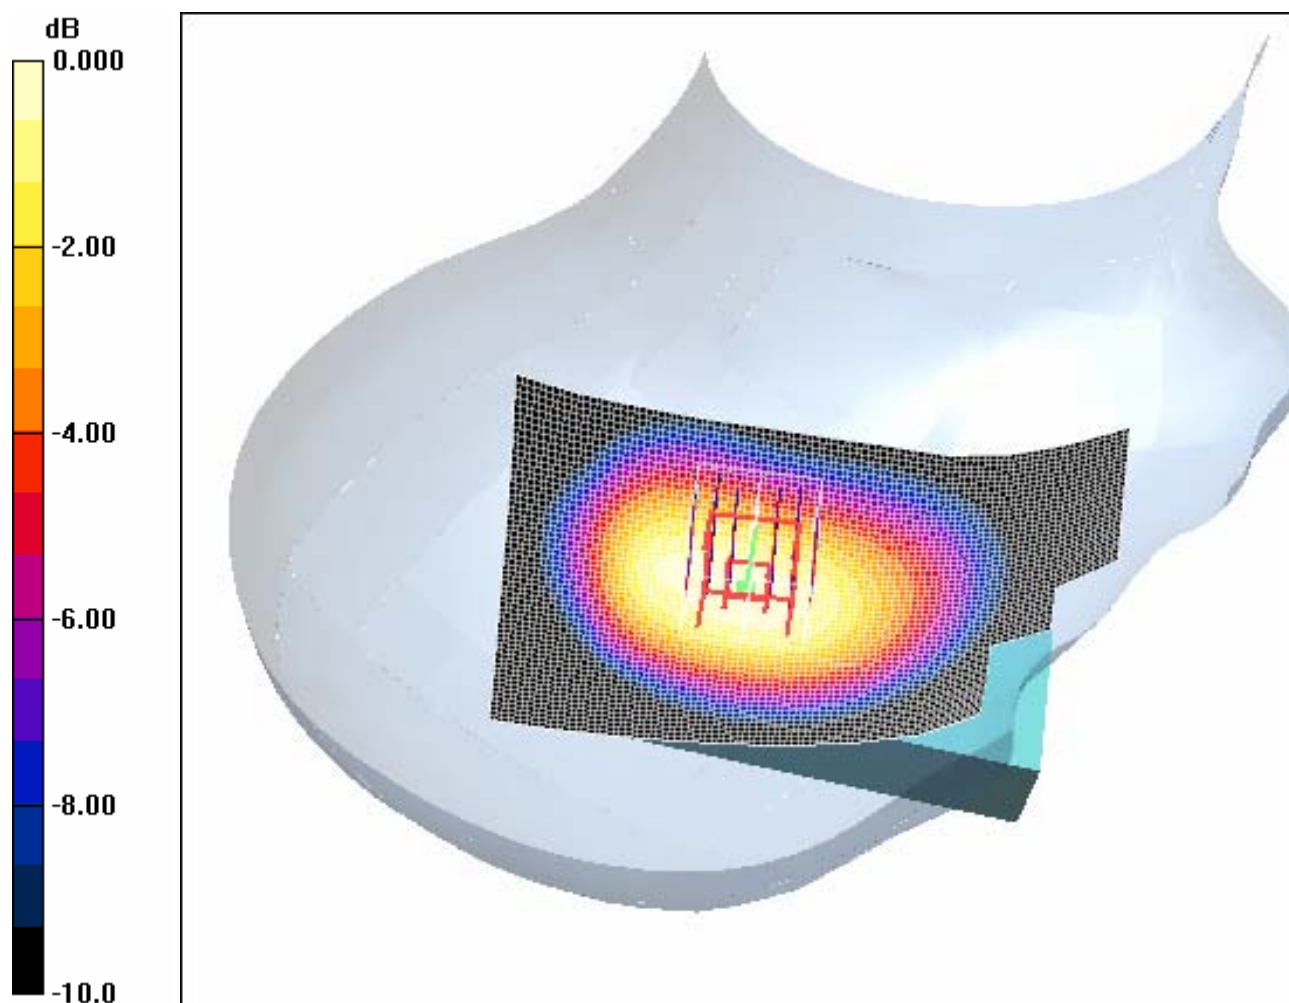

0 dB = 0.327mW/g

4.11RightHandSide-Tilt-GSM850-Middle

Date/Time: 2006-8-28 16:36:58

Test Laboratory: SGS-GSM

GSM850-RightHandSide-Tilt-Middle

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: GSM850-GSM Mode; Frequency: 836.4 MHz;Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.886$ mho/m; $\epsilon_r = 42.3$; $\rho =$

1000 kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.91, 5.91, 5.91); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Tilt position - Middle/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.427 mW/g


Tilt position - Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.5 V/m; Power Drift = 0.003 dB

Peak SAR (extrapolated) = 0.533 W/kg

SAR(1 g) = 0.400 mW/g; SAR(10 g) = 0.280 mW/g

Maximum value of SAR (measured) = 0.425 mW/g

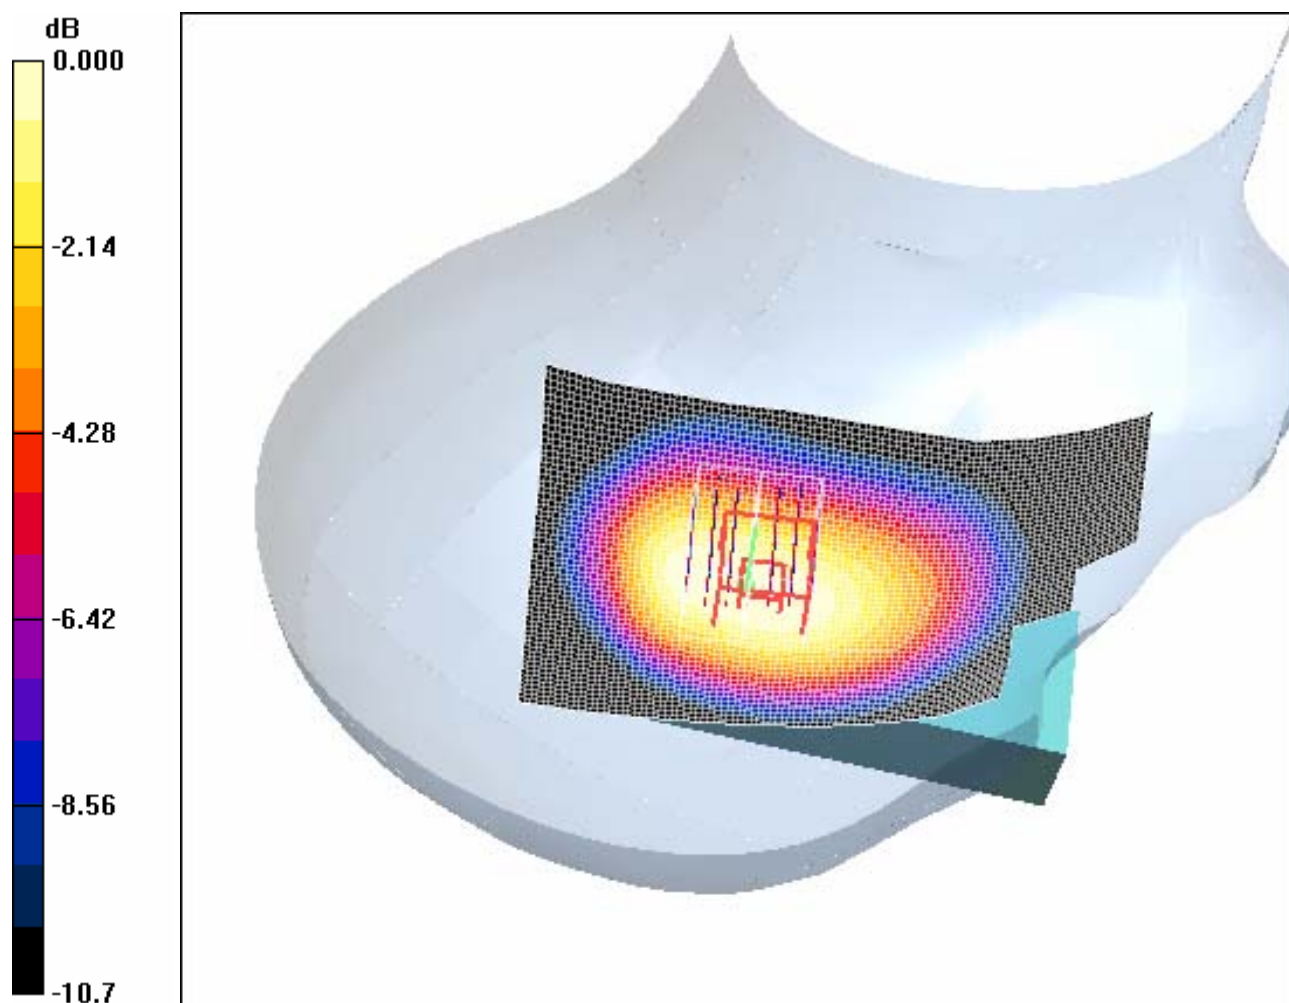

0 dB = 0.425mW/g

4.12RightHandSide-Tilt-GSM850-High

Date/Time: 2006-9-6 11:21:43

Test Laboratory: SGS-GSM

GSM850-RightHandSide-Tilt-High

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: GSM850-GSM Mode; Frequency: 848.8 MHz;Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used: $f = 848.8$ MHz; $\sigma = 0.896$ mho/m; $\epsilon_r = 42.3$; $\rho =$

1000 kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.91, 5.91, 5.91); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Tilt position - High/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.337 mW/g


Tilt position - High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.0 V/m; Power Drift = -0.041 dB

Peak SAR (extrapolated) = 0.424 W/kg

SAR(1 g) = 0.317 mW/g; SAR(10 g) = 0.221 mW/g

Maximum value of SAR (measured) = 0.339 mW/g

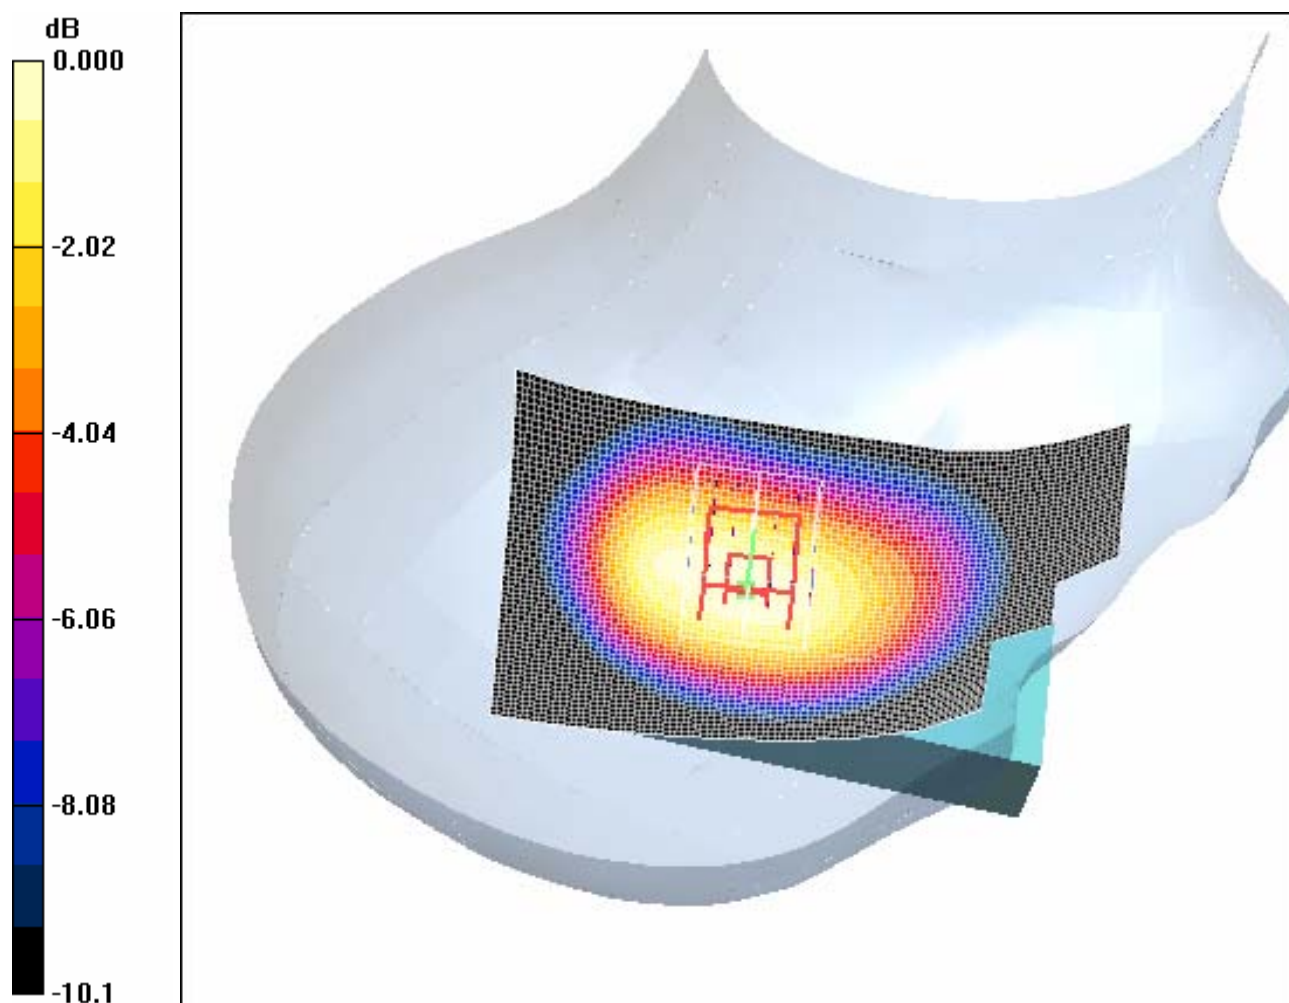

0 dB = 0.339mW/g

4.13 Maximum Value With Battery2

Date/Time: 2006-8-28 14:28:24

Test Laboratory: SGS-GSM

GSM850-LeftHandSide-Cheek-High-Bat2

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: GSM850-GSM Mode; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used: $f = 848.8$ MHz; $\sigma = 0.896$ mho/m; $\epsilon_r = 42.3$; $\rho =$

1000 kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.91, 5.91, 5.91); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Cheek position - High(Bat2)/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.868 mW/g


Cheek position - High(Bat2)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.7 V/m; Power Drift = 0.018 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.820 mW/g; SAR(10 g) = 0.567 mW/g

Maximum value of SAR (measured) = 0.880 mW/g

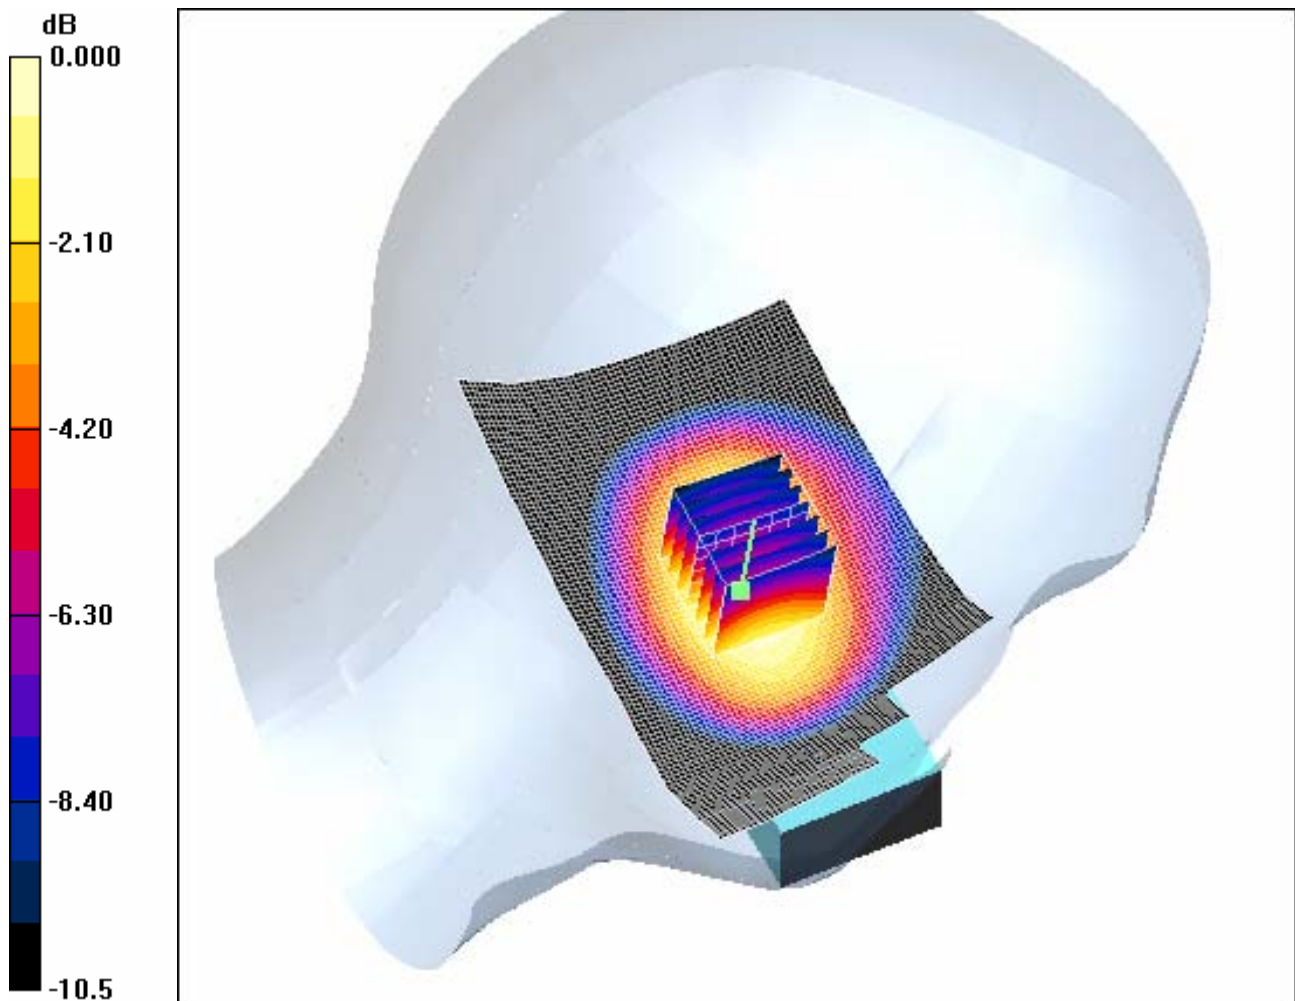

0 dB = 0.880mW/g

4.14GSM850 Head Worst Case+WiFi802.11b

Date/Time: 2006-8-28 13:42:49

Test Laboratory: SGS-GSM

GSM850-LeftHandSide-Cheek-High+WiFi

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: GSM850-GSM Mode; Frequency: 848.8 MHz;Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.896 \text{ mho/m}$; $\epsilon_r = 42.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.91, 5.91, 5.91); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Cheek position - High+WiFi/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.915 mW/g


Cheek position - High+WiFi/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.2 V/m; Power Drift = -0.067 dB

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.848 mW/g; SAR(10 g) = 0.569 mW/g

Maximum value of SAR (measured) = 0.901 mW/g

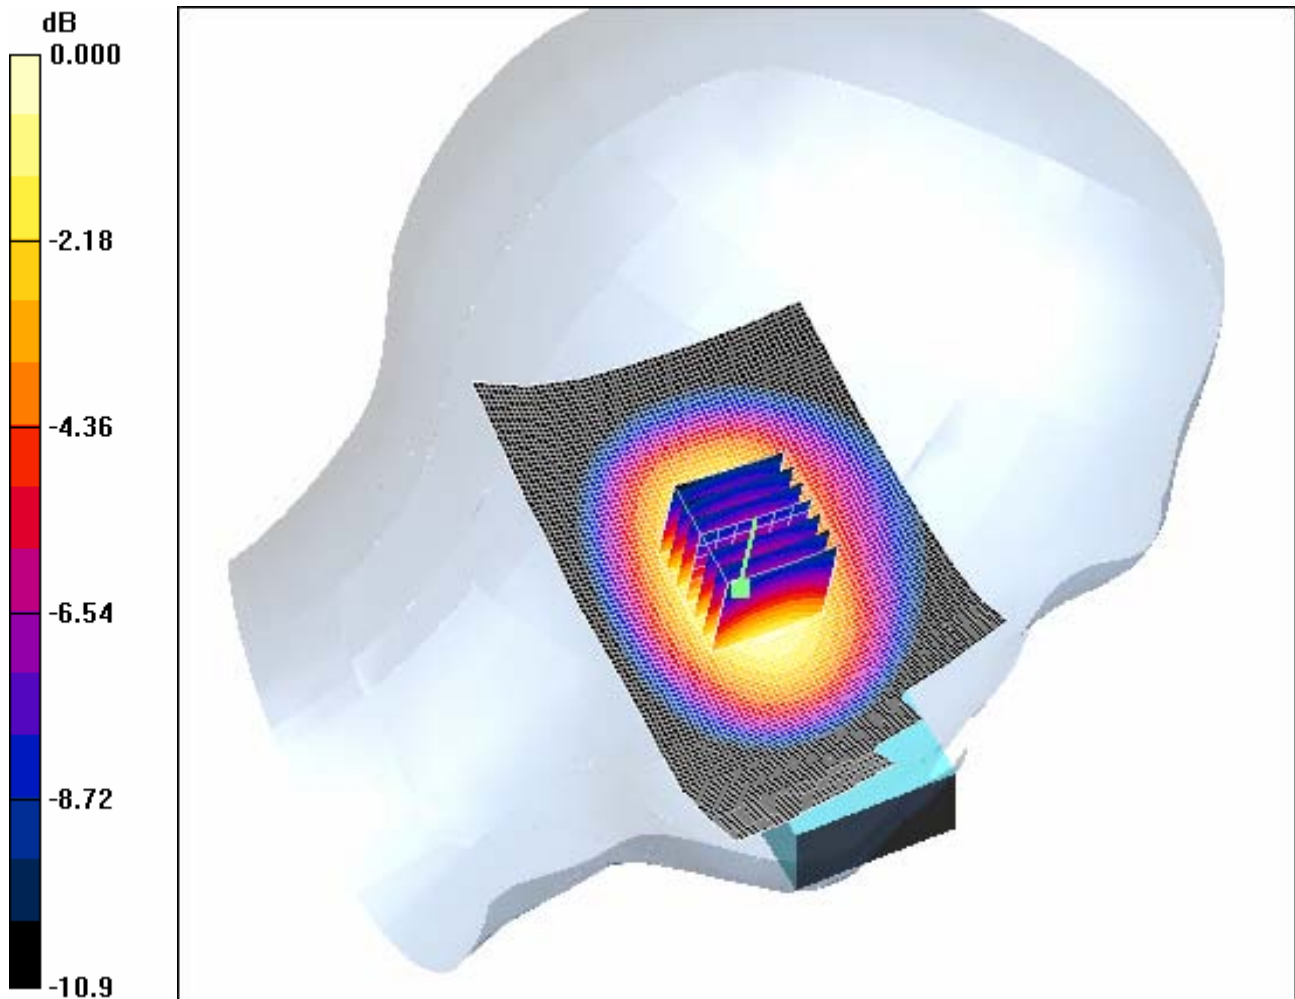

0 dB = 0.901mW/g

4.15GSM850 Head Worst Case+ WiFi802.11b-Bat2

Date/Time: 2006-8-28 14:56:56

Test Laboratory: SGS-GSM

GSM850-LeftHandSide-Cheek-High+WiFi-Bat2

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: GSM850-GSM Mode; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used: $f = 848.8$ MHz; $\sigma = 0.896$ mho/m; $\epsilon_r = 42.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.91, 5.91, 5.91); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Cheek position - High+WiFi (Bat2)/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.958 mW/g


Cheek position - High+WiFi (Bat2)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.1 V/m; Power Drift = -0.037 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.902 mW/g; SAR(10 g) = 0.604 mW/g

Maximum value of SAR (measured) = 0.964 mW/g

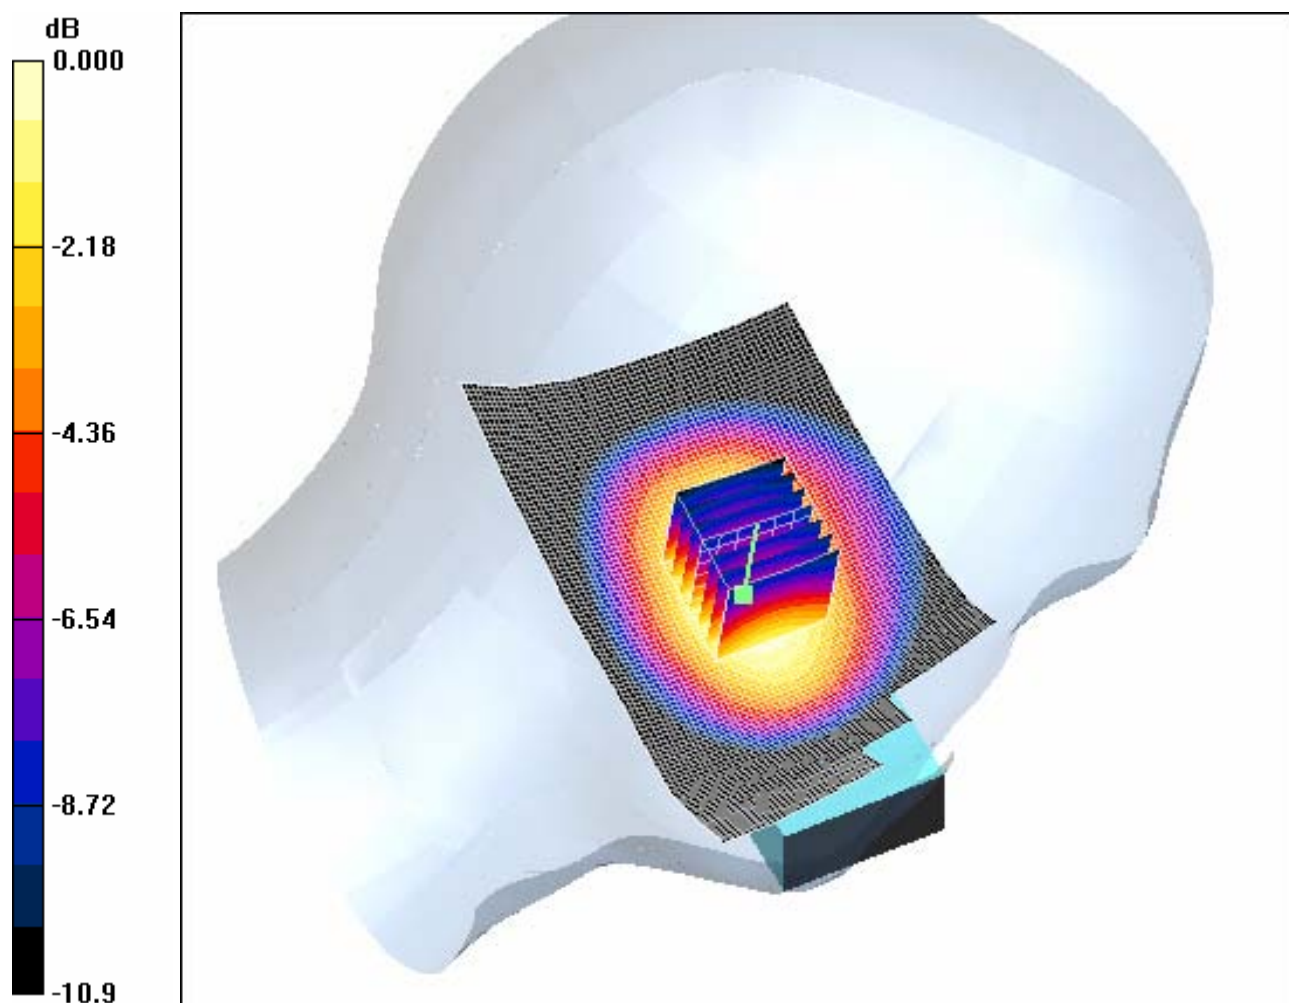

0 dB = 0.964mW/g

4.16LeftHandSide-Cheek-PCS1900-Low

Date/Time: 2006-9-5 16:14:29

Test Laboratory: SGS-GSM

PCS1900-LeftHandSide-Cheek-Low

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: PCS1900-GSM Mode; Frequency: 1850.2 MHz;Duty Cycle: 1:8.3

Medium: HSL1900-Head Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 38.7$; $\rho =$

1000 kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.93, 4.93, 4.93); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Cheek position - Low/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.369 mW/g


Cheek position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.0 V/m; Power Drift = 0.018 dB

Peak SAR (extrapolated) = 0.564 W/kg

SAR(1 g) = 0.305 mW/g; SAR(10 g) = 0.162 mW/g

Maximum value of SAR (measured) = 0.341 mW/g

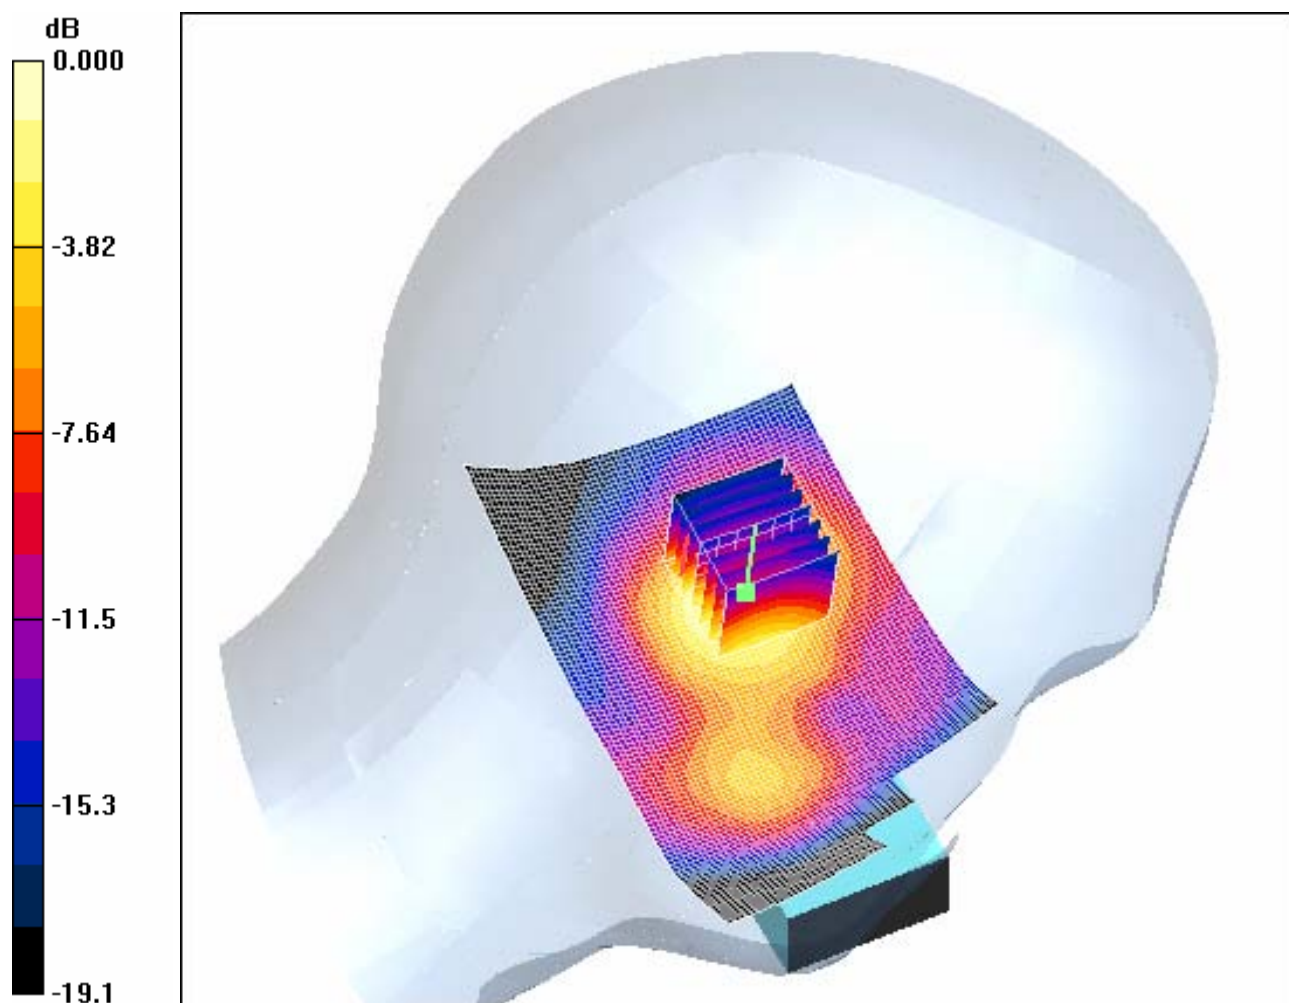

0 dB = 0.341mW/g

4.17LeftHandSide-Cheek-PCS1900-Middle

Date/Time: 2006-8-25 20:06:34

Test Laboratory: SGS-GSM

PCS1900-LeftHandSide-Cheek-Middle

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: PCS1900-GSM Mode; Frequency: 1880 MHz;Duty Cycle: 1:8.3

Medium: HSL1900-Head Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 38.5$; $\rho =$

1000 kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.93, 4.93, 4.93); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Cheek position - Middle/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.394 mW/g


Cheek position - Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.5 V/m; Power Drift = -0.021 dB

Peak SAR (extrapolated) = 0.602 W/kg

SAR(1 g) = 0.323 mW/g; SAR(10 g) = 0.176 mW/g

Maximum value of SAR (measured) = 0.358 mW/g

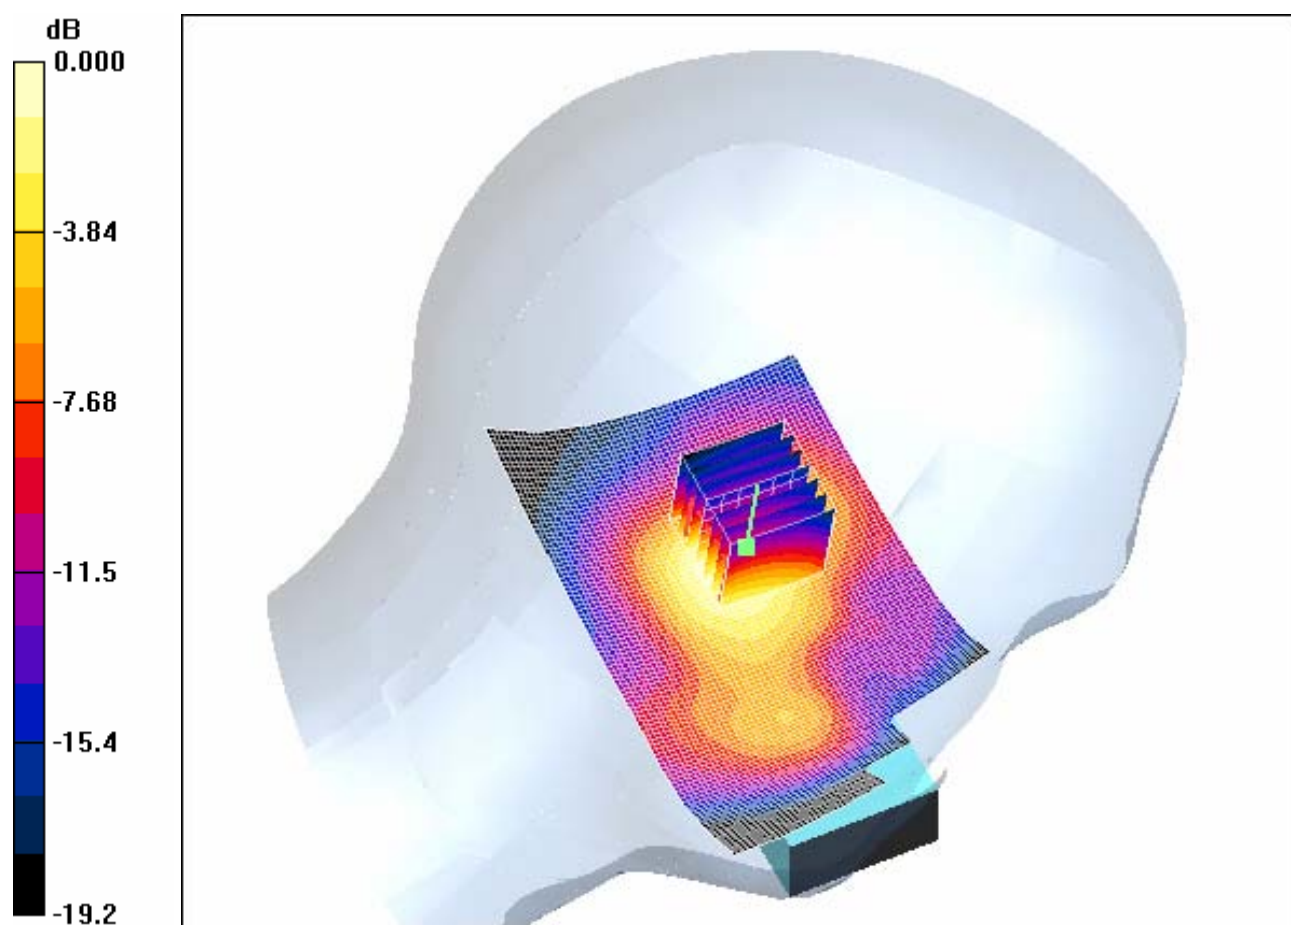

0 dB = 0.358mW/g

4.18LeftHandSide-Cheek-PCS1900-High

Date/Time: 2006-9-5 16:46:56

Test Laboratory: SGS-GSM

PCS1900-LeftHandSide-Cheek-High

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: PCS1900-GSM Mode; Frequency: 1909.8 MHz;Duty Cycle: 1:8.3

Medium: HSL1900-Head Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.93, 4.93, 4.93); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Cheek position - High/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.422 mW/g


Cheek position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.6 V/m; Power Drift = -0.003 dB

Peak SAR (extrapolated) = 0.651 W/kg

SAR(1 g) = 0.347 mW/g; SAR(10 g) = 0.181 mW/g

Maximum value of SAR (measured) = 0.391 mW/g

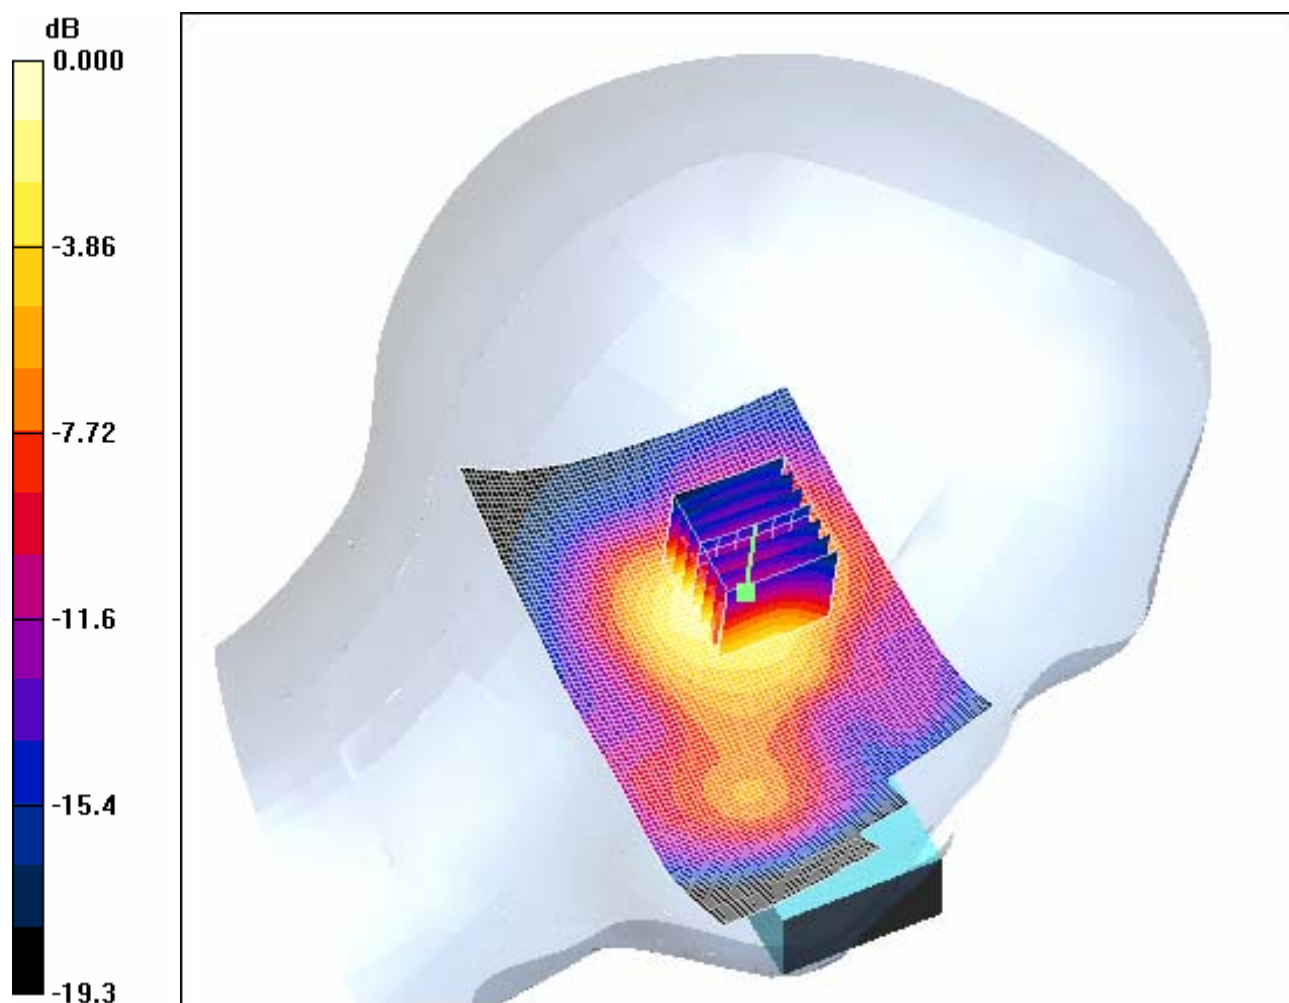

0 dB = 0.391mW/g

4.19LeftHandSide-Tilt-PCS1900-Low

Date/Time: 2006-8-25 21:09:10

Test Laboratory: SGS-GSM

PCS1900-LeftHandSide-Tilt-Low

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: PCS1900-GSM Mode; Frequency: 1850.2 MHz;Duty Cycle: 1:8.3

Medium: HSL1900-Head Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 38.7$; $\rho =$

1000 kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.93, 4.93, 4.93); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Tilt position - Low/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.357 mW/g


Tilt position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.0 V/m; Power Drift = -0.008 dB

Peak SAR (extrapolated) = 0.565 W/kg

SAR(1 g) = 0.301 mW/g; SAR(10 g) = 0.155 mW/g

Maximum value of SAR (measured) = 0.333 mW/g

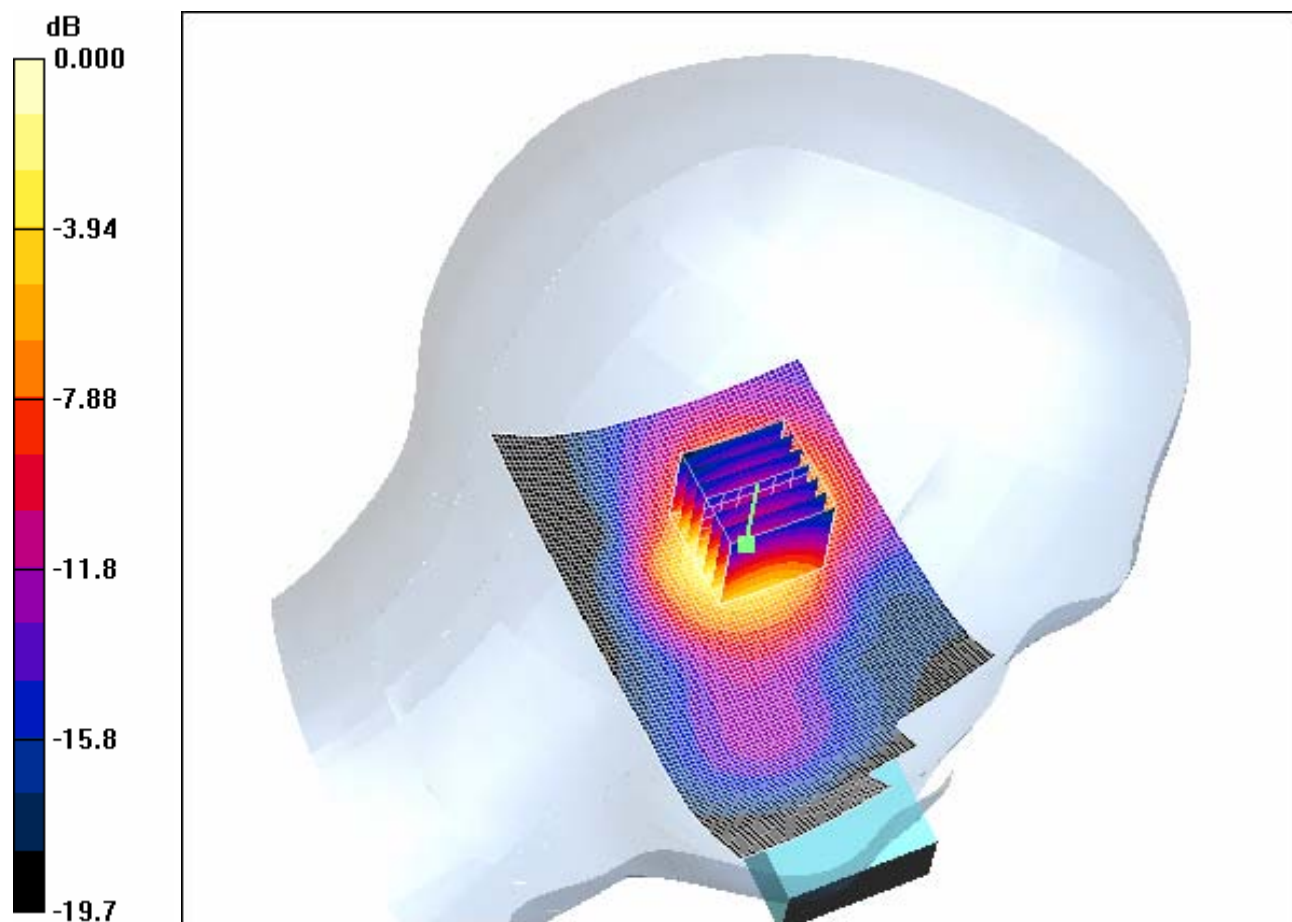

0 dB = 0.333mW/g

4.20LeftHandSide-Tilt-PCS1900-Middle

Date/Time: 2006-8-25 20:42:07

Test Laboratory: SGS-GSM

PCS1900-LeftHandSide-Tilt-Middle

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: PCS1900-GSM Mode; Frequency: 1880 MHz;Duty Cycle: 1:8.3

Medium: HSL1900-Head Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 38.5$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.93, 4.93, 4.93); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Tilt position - Middle/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.422 mW/g


Tilt position - Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.3 V/m; Power Drift = -0.061 dB

Peak SAR (extrapolated) = 0.651 W/kg

SAR(1 g) = 0.351 mW/g; SAR(10 g) = 0.184 mW/g

Maximum value of SAR (measured) = 0.391 mW/g

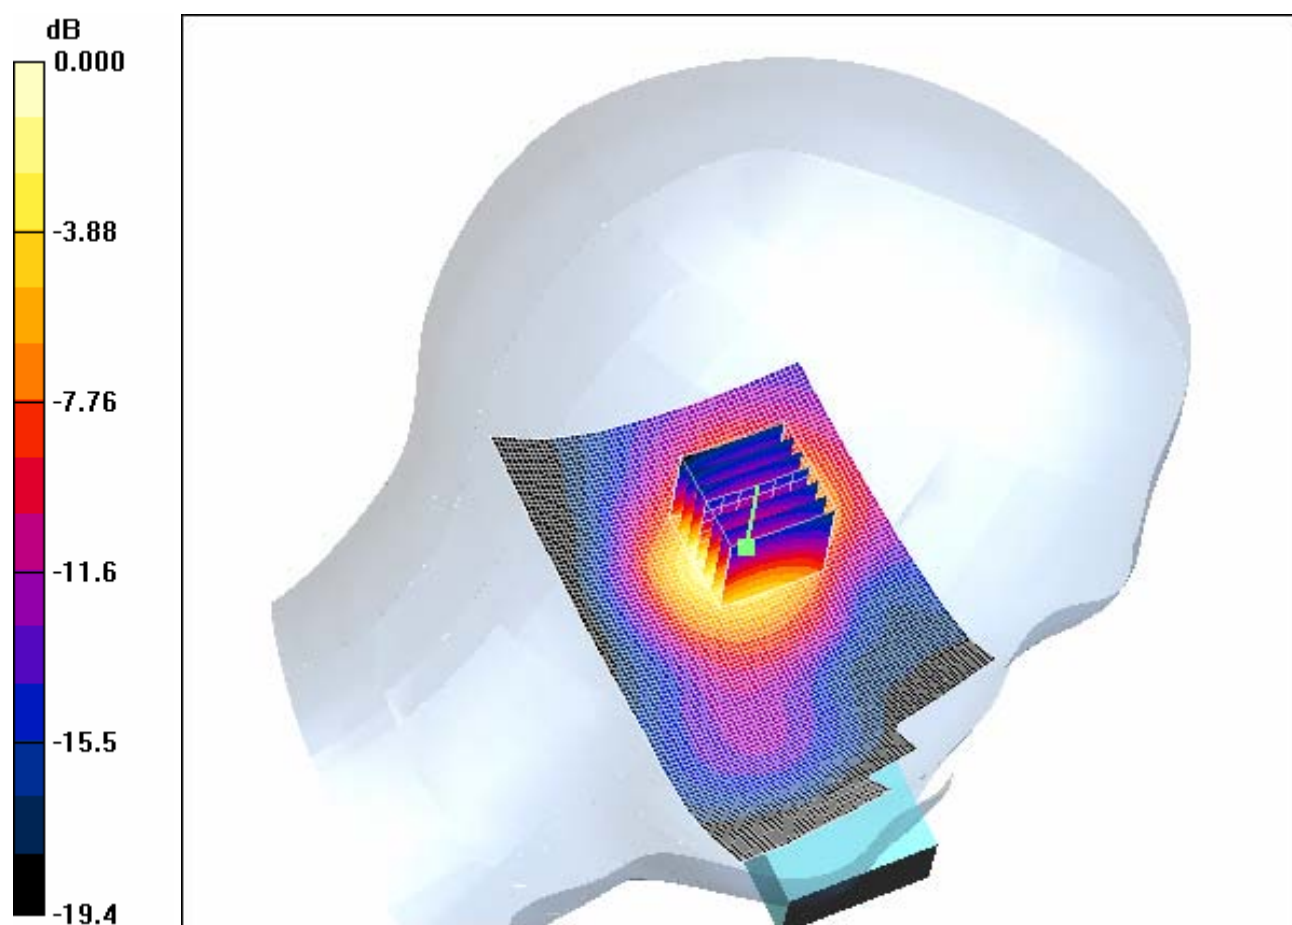

0 dB = 0.391mW/g

4.21LeftHandSide-Tilt-PCS1900-High

Date/Time: 2006-8-25 21:33:53

Test Laboratory: SGS-GSM

PCS1900-LeftHandSide-Tilt-High

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: PCS1900-GSM Mode; Frequency: 1909.8 MHz;Duty Cycle: 1:8.3

Medium: HSL1900-Head Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.47 \text{ mho/m}$; $\epsilon_r = 38.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.93, 4.93, 4.93); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Tilt position - High/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.435 mW/g


Tilt position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.6 V/m; Power Drift = 0.012 dB

Peak SAR (extrapolated) = 0.678 W/kg

SAR(1 g) = 0.366 mW/g; SAR(10 g) = 0.192 mW/g

Maximum value of SAR (measured) = 0.406 mW/g

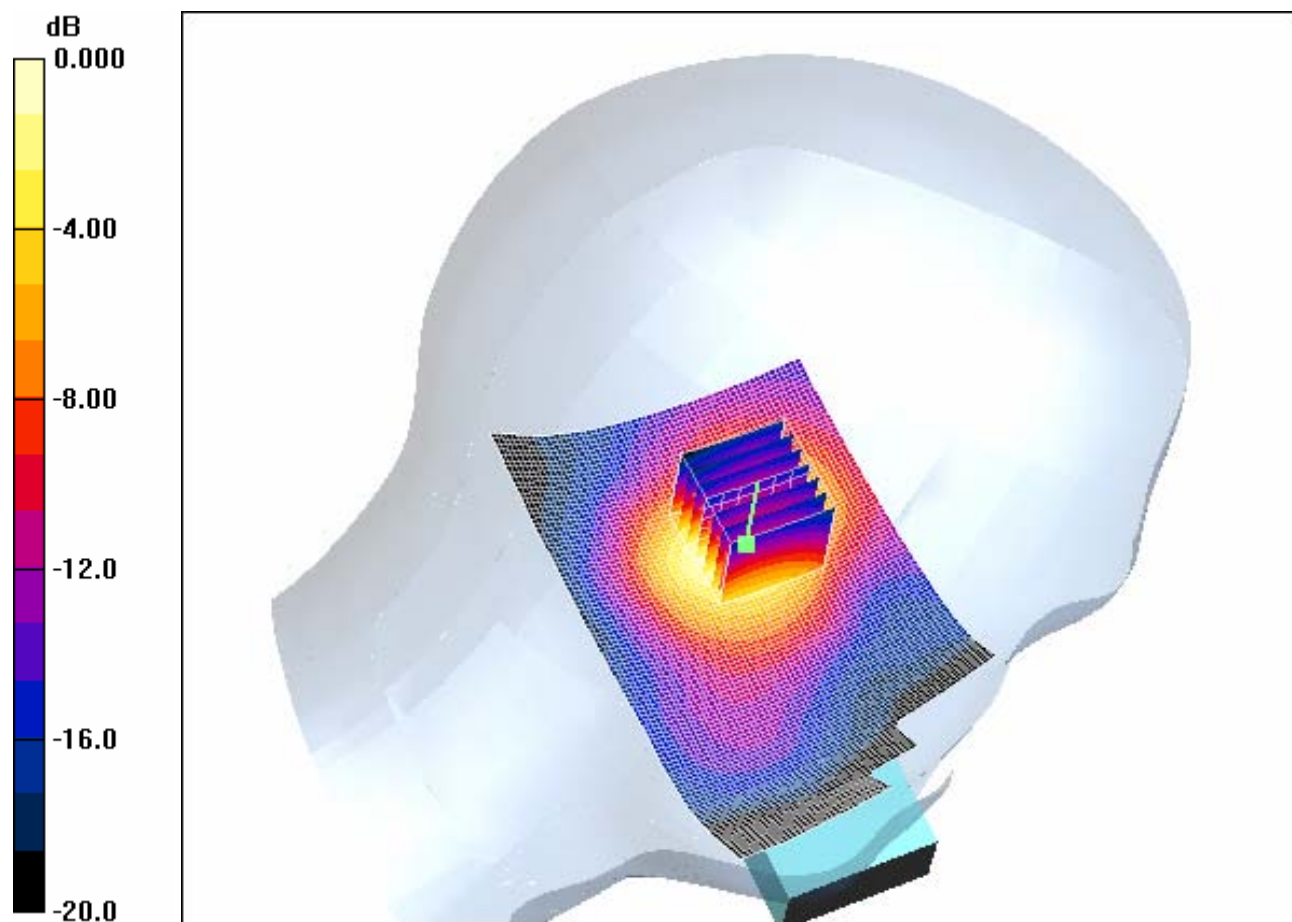

0 dB = 0.406mW/g

4.22RightHandSide-Cheek-PCS1900-Low

Date/Time: 2006-8-26 10:56:53

Test Laboratory: SGS-GSM

PCS1900-RightHandSide-Cheek-Low

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: PCS1900-GSM Mode; Frequency: 1850.2 MHz;Duty Cycle: 1:8.3

Medium: HSL1900-Head Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 38.7$; $\rho =$

1000 kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.93, 4.93, 4.93); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Cheek position - Low/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.243 mW/g


Cheek position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.0 V/m; Power Drift = -0.007 dB

Peak SAR (extrapolated) = 0.341 W/kg

SAR(1 g) = 0.217 mW/g; SAR(10 g) = 0.127 mW/g

Maximum value of SAR (measured) = 0.241 mW/g

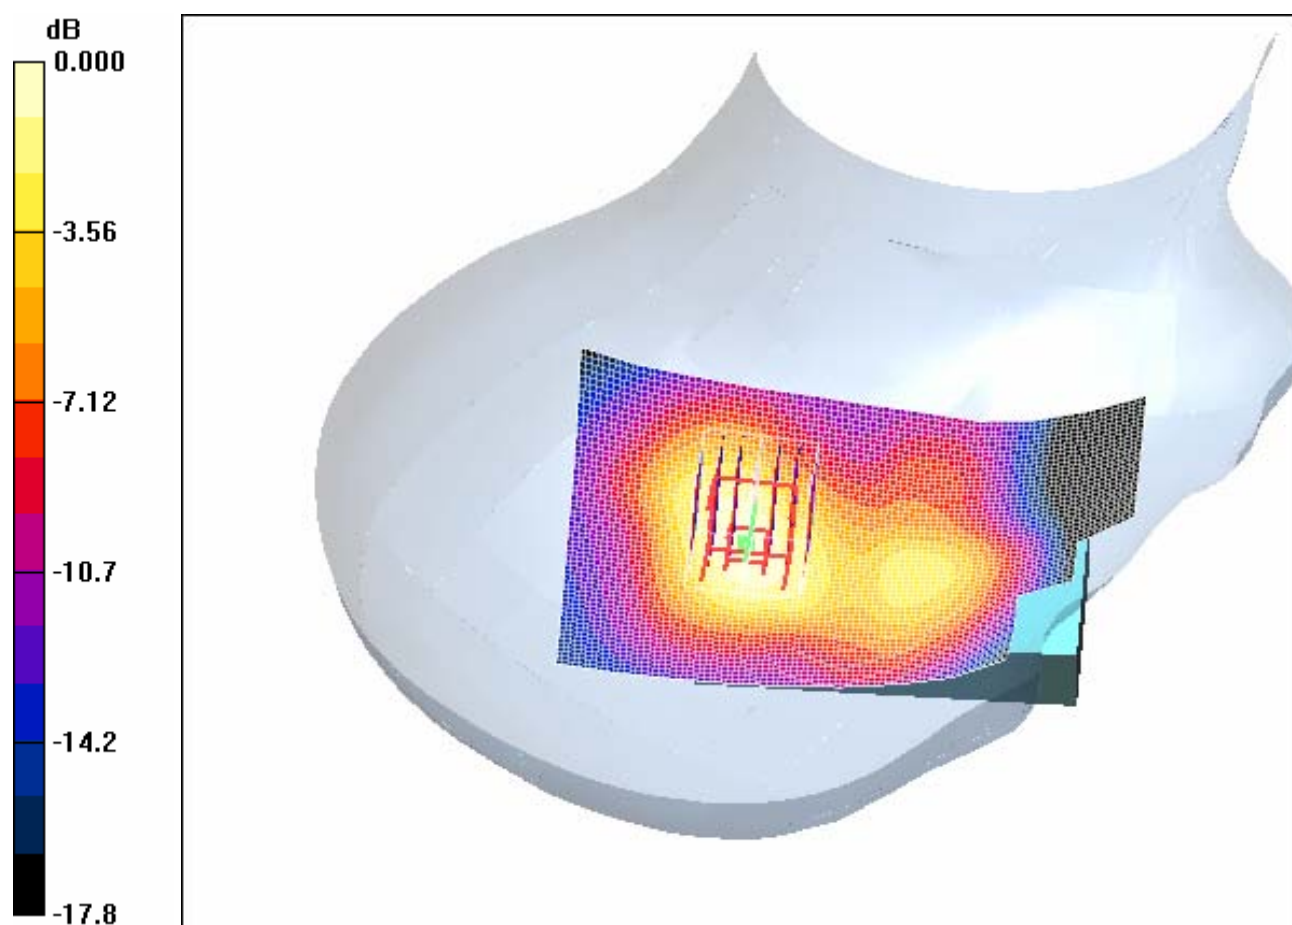

0 dB = 0.241mW/g

4.23RightHandSide-Cheek-PCS1900-Middle

Date/Time: 2006-8-26 9:03:15

Test Laboratory: SGS-GSM

PCS1900-RightHandSide-Cheek-Middle

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: PCS1900-GSM Mode; Frequency: 1880 MHz;Duty Cycle: 1:8.3

Medium: HSL1900-Head Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 38.5$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.93, 4.93, 4.93); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Cheek position - Middle/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.325 mW/g


Cheek position - Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.6 V/m; Power Drift = 0.027 dB

Peak SAR (extrapolated) = 0.462 W/kg

SAR(1 g) = 0.290 mW/g; SAR(10 g) = 0.163 mW/g

Maximum value of SAR (measured) = 0.325 mW/g

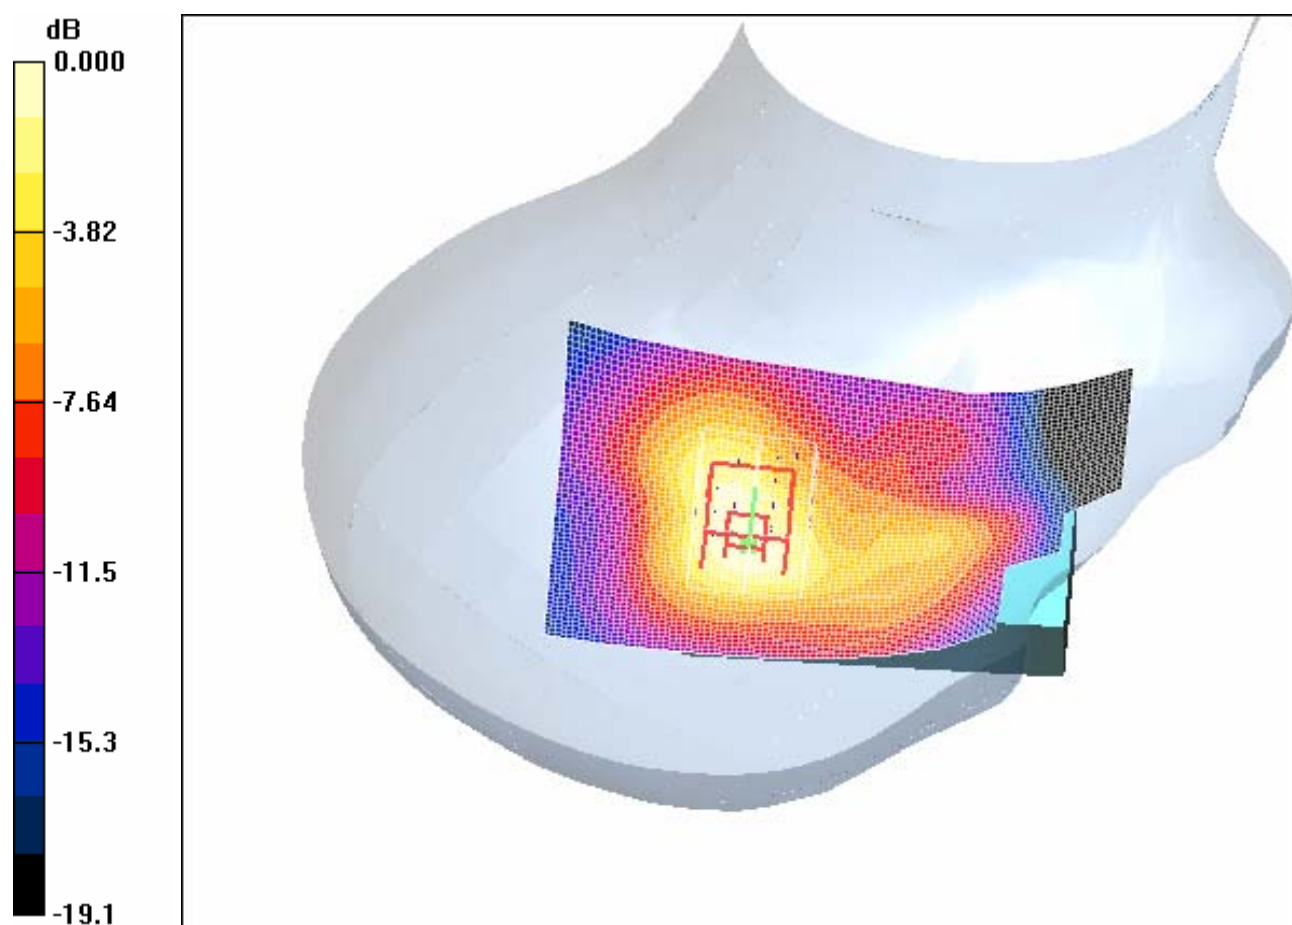

0 dB = 0.325mW/g

4.24RightHandSide-Cheek-PCS1900-High

Date/Time: 2006-8-26 11:23:32

Test Laboratory: SGS-GSM

PCS1900-RightHandSide-Cheek-High

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: PCS1900-GSM Mode; Frequency: 1909.8 MHz;Duty Cycle: 1:8.3

Medium: HSL1900-Head Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.93, 4.93, 4.93); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Cheek position -High/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.285 mW/g


Cheek position -High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.9 V/m; Power Drift = -0.015 dB

Peak SAR (extrapolated) = 0.449 W/kg

SAR(1 g) = 0.267 mW/g; SAR(10 g) = 0.149 mW/g

Maximum value of SAR (measured) = 0.290 mW/g

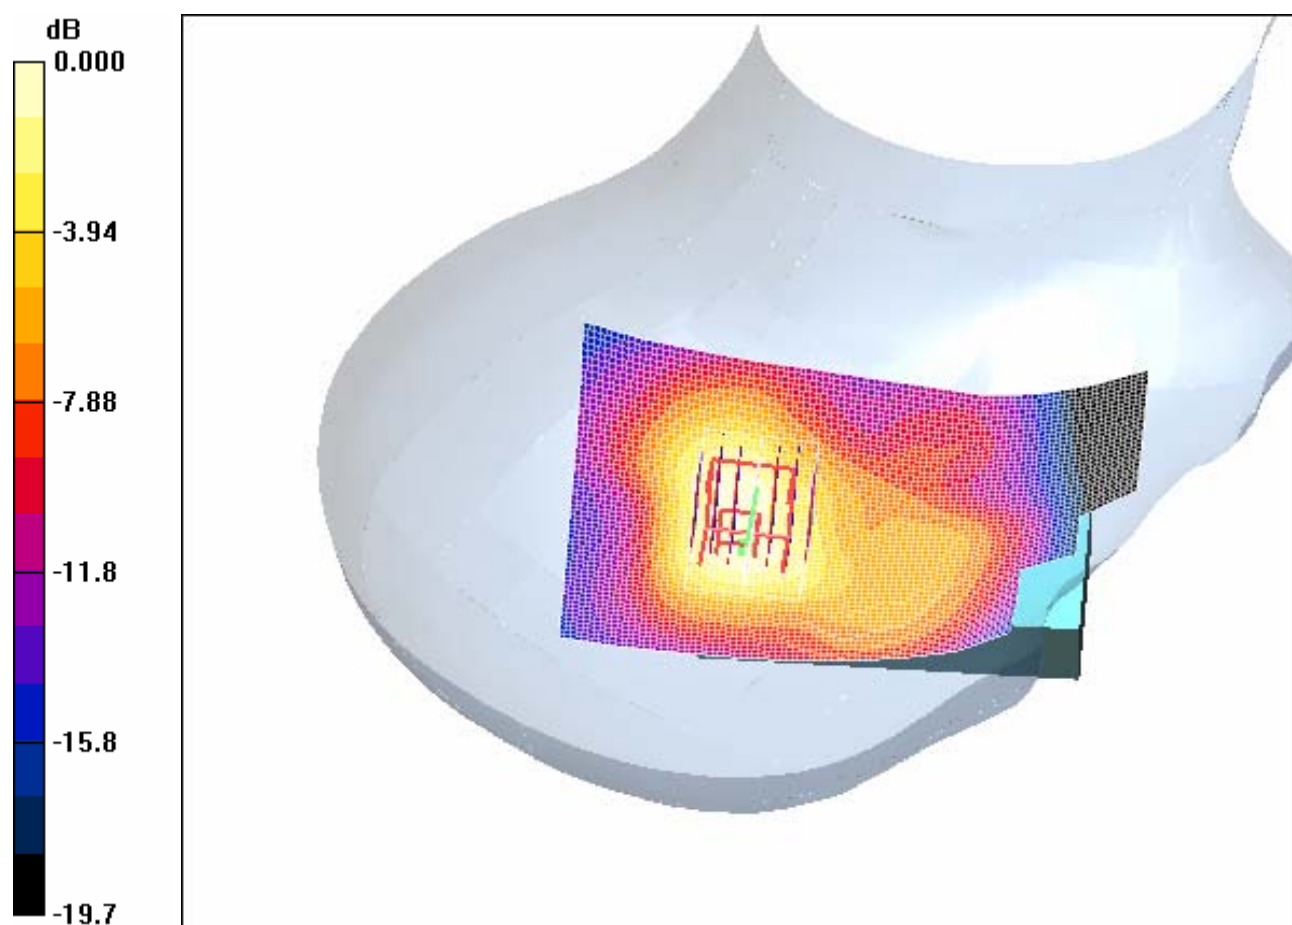

0 dB = 0.290mW/g

4.25RightHandSide-Tilt-PCS1900-Low

Date/Time: 2006-9-6 8:22:55

Test Laboratory: SGS-GSM

PCS1900-RightHandSide-Tilt-Low

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: PCS1900-GSM Mode; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: HSL1900-Head Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 38.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.93, 4.93, 4.93); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Tilt position - Low/Area Scan (61x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.246 mW/g


Tilt position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.6 V/m; Power Drift = -0.049 dB

Peak SAR (extrapolated) = 0.373 W/kg

SAR(1 g) = 0.212 mW/g; SAR(10 g) = 0.118 mW/g

Maximum value of SAR (measured) = 0.234 mW/g

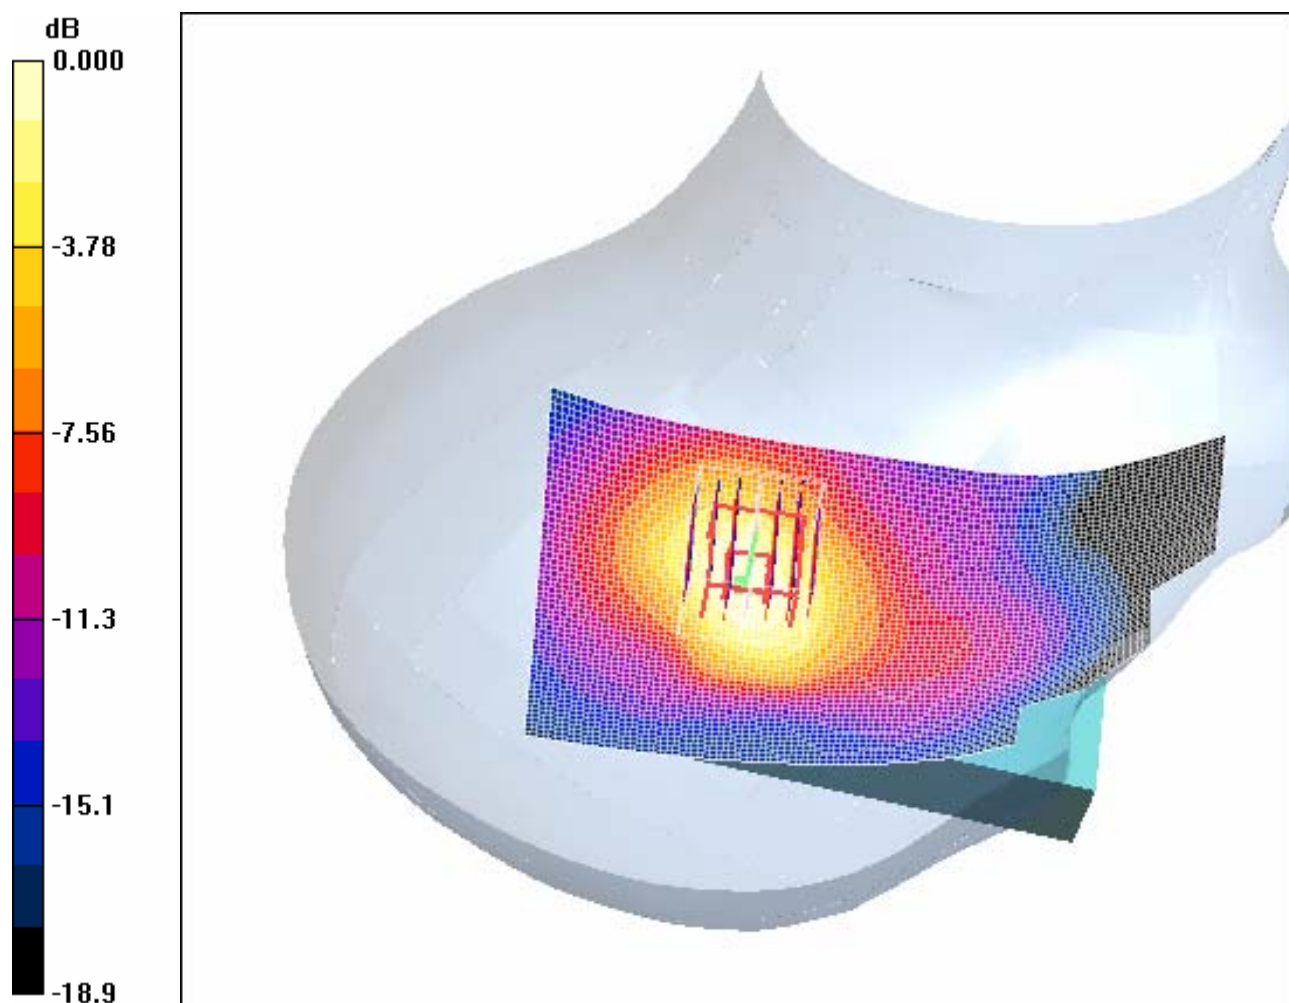

0 dB = 0.234mW/g

4.26RightHandSide-Tilt-PCS1900-Middle

Date/Time: 2006-8-26 10:31:46

Test Laboratory: SGS-GSM

PCS1900-RightHandSide-Tilt-Middle

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: PCS1900-GSM Mode; Frequency: 1880 MHz;Duty Cycle: 1:8.3

Medium: HSL1900-Head Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 38.5$; $\rho =$

1000 kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.93, 4.93, 4.93); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Tilt position - Middle 2/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.305 mW/g


Tilt position - Middle 2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.5 V/m; Power Drift = -0.014 dB

Peak SAR (extrapolated) = 0.461 W/kg

SAR(1 g) = 0.266 mW/g; SAR(10 g) = 0.146 mW/g

Maximum value of SAR (measured) = 0.292 mW/g

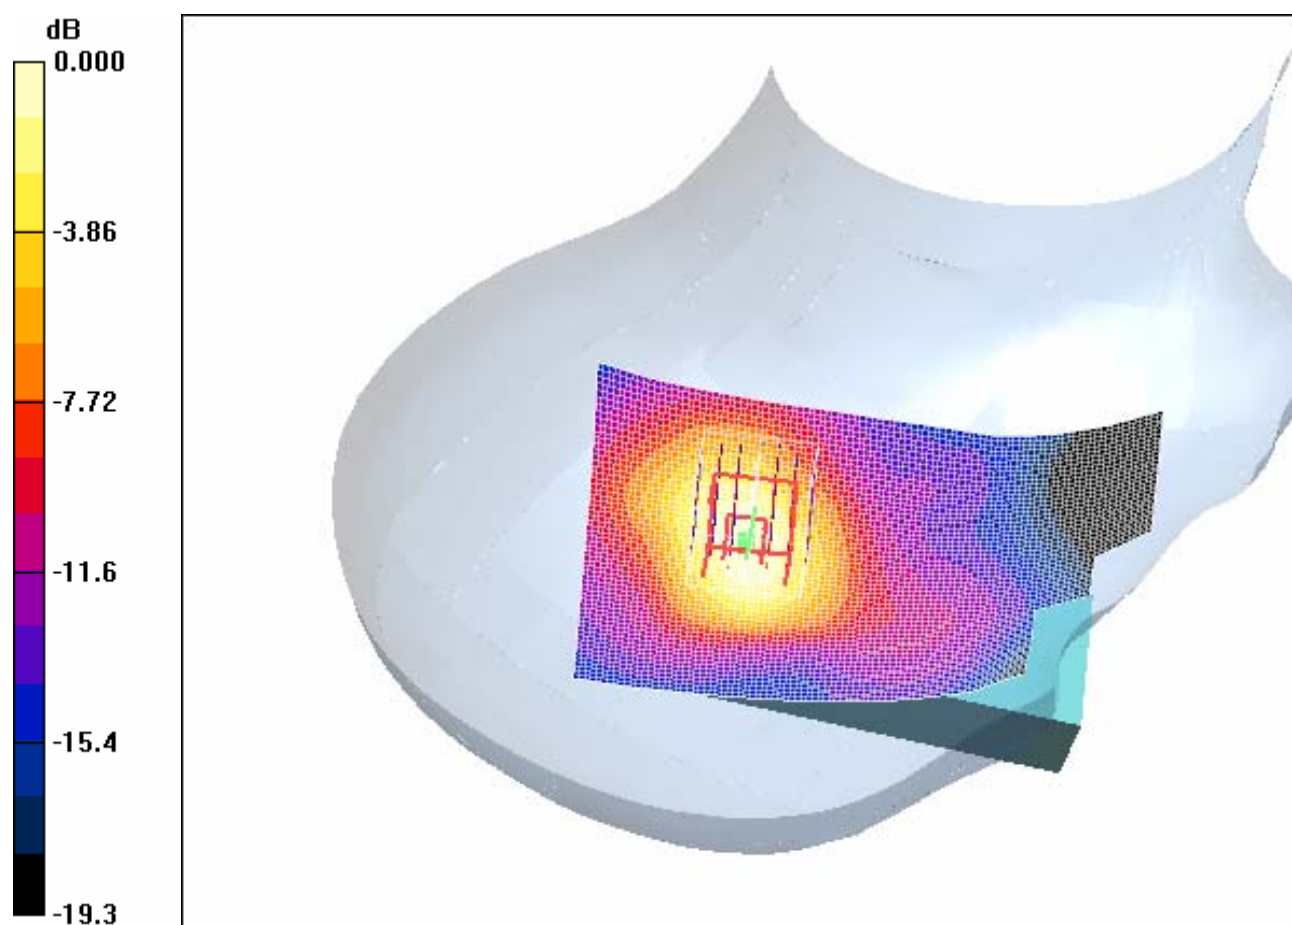

0 dB = 0.292mW/g

4.27RightHandSide-Tilt-PCS1900-High

Date/Time: 2006-9-6 8:56:49

Test Laboratory: SGS-GSM

PCS1900-RightHandSide-Tilt-High

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: PCS1900-GSM Mode; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL1900-Head Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.93, 4.93, 4.93); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Tilt position - High/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.270 mW/g


Tilt position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.3 V/m; Power Drift = 0.126 dB

Peak SAR (extrapolated) = 0.400 W/kg

SAR(1 g) = 0.229 mW/g; SAR(10 g) = 0.127 mW/g

Maximum value of SAR (measured) = 0.250 mW/g

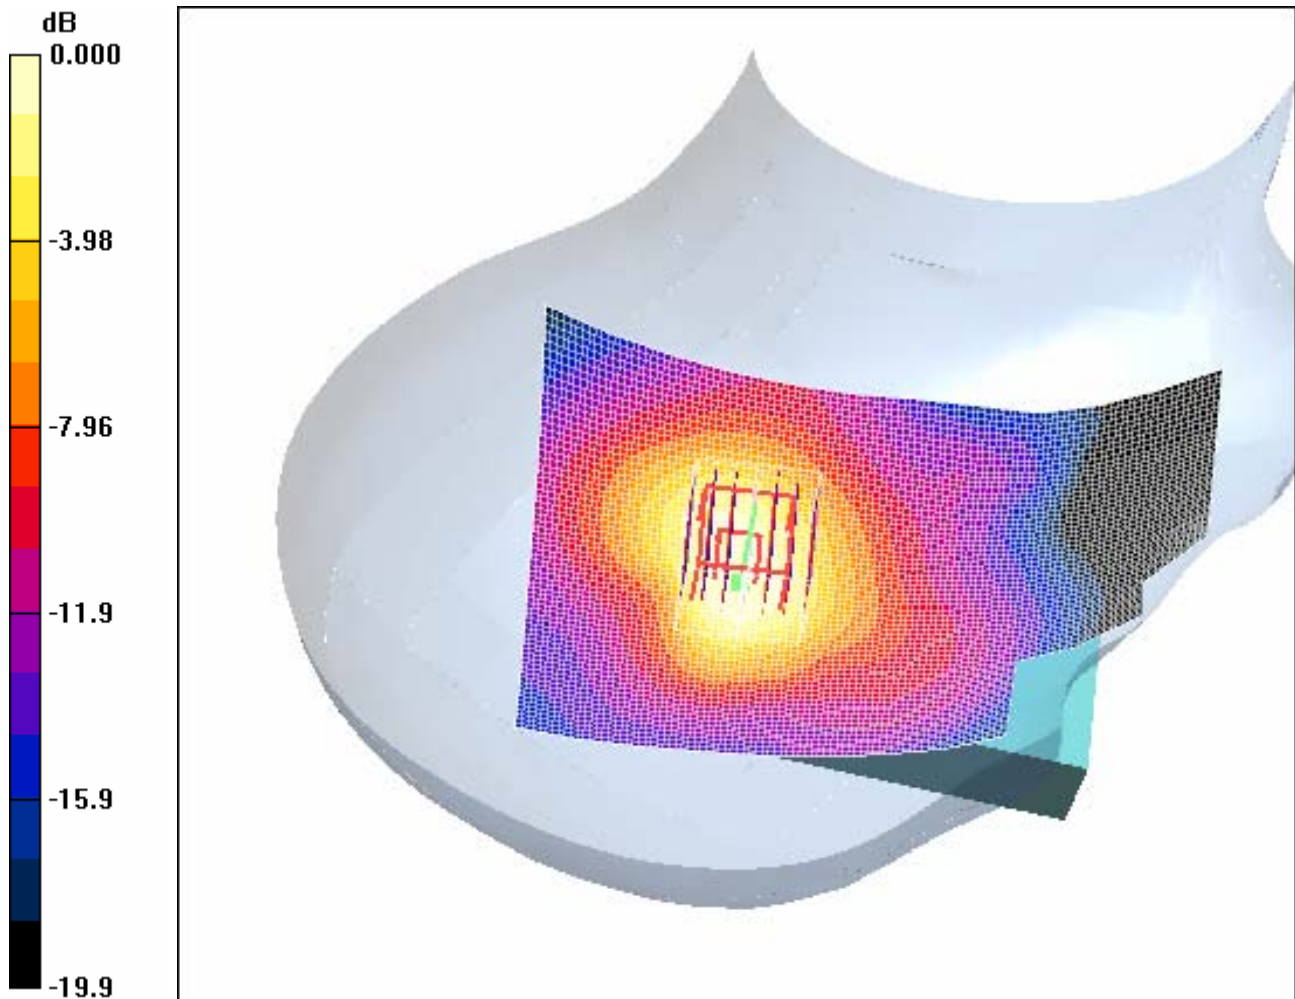

0 dB = 0.250mW/g

4.28 Maximum Value With Battery2

Date/Time: 2006-8-25 22:13:16

Test Laboratory: SGS-GSM

PCS1900-LeftHandSide-Tilt-High-Bat2

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: PCS1900-GSM Mode; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL1900-Head Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 38.4$; $\rho =$

1000 kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.93, 4.93, 4.93); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Tilt position - High(Bat2)/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.417 mW/g


Tilt position - High(Bat2)/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.8 V/m; Power Drift = -0.036 dB

Peak SAR (extrapolated) = 0.648 W/kg

SAR(1 g) = 0.354 mW/g; SAR(10 g) = 0.186 mW/g

Maximum value of SAR (measured) = 0.392 mW/g

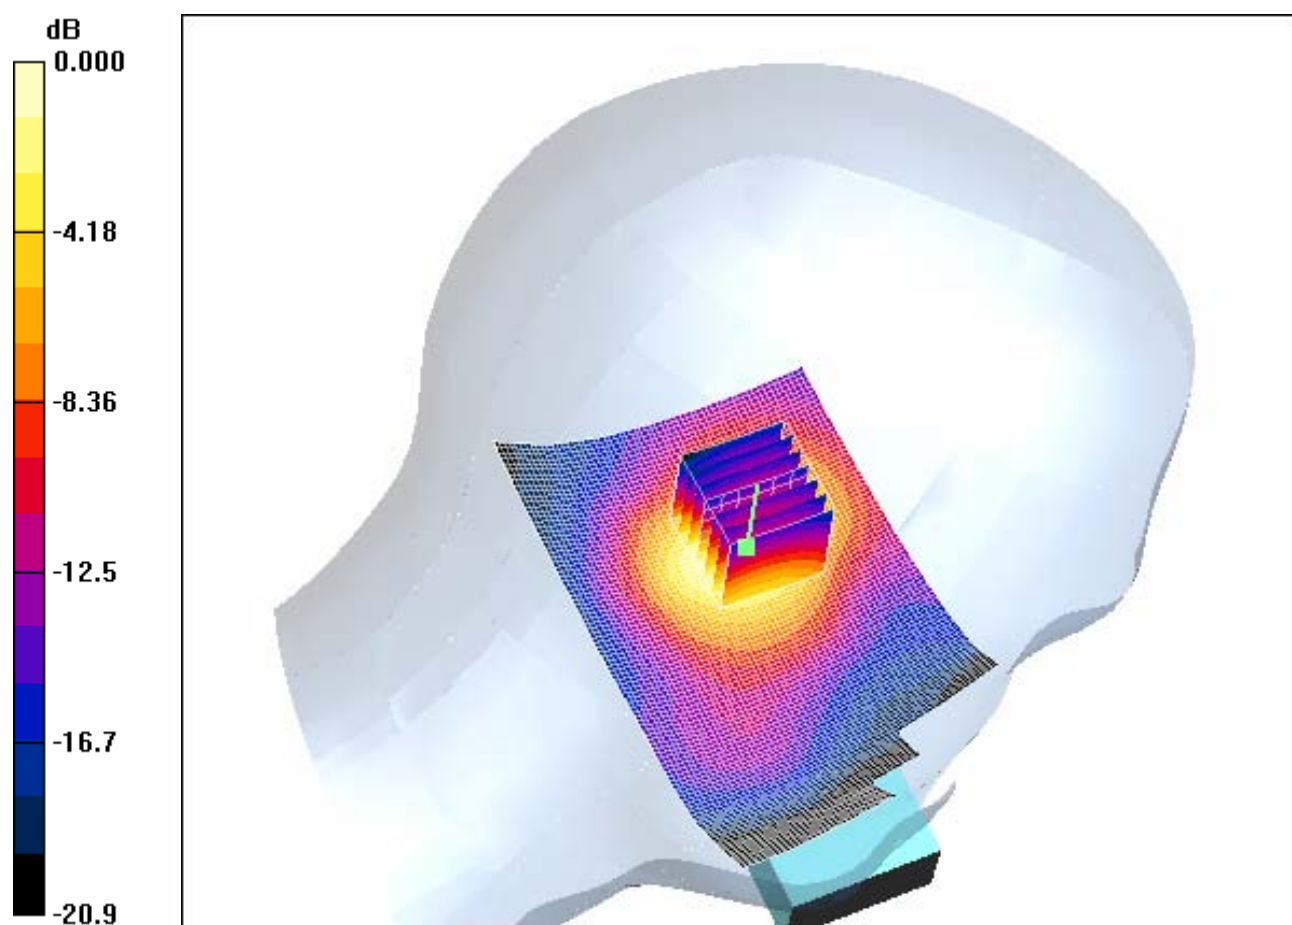

0 dB = 0.392mW/g

4.29PCS1900 Head Worst Case+ WiFi802.11b

Date/Time: 2006-8-25 23:18:53

Test Laboratory: SGS-GSM

PCS1900-LeftHandSide-Tilt-High+WiFi

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: PCS1900-GSM Mode; Frequency: 1909.8 MHz;Duty Cycle: 1:8.3

Medium: HSL1900-Head Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.93, 4.93, 4.93); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Tilt position-High-WiFi/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.583 mW/g


Tilt position-High-WiFi/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.6 V/m; Power Drift = -0.207 dB

Peak SAR (extrapolated) = 0.970 W/kg

SAR(1 g) = 0.517 mW/g; SAR(10 g) = 0.270 mW/g

Maximum value of SAR (measured) = 0.571 mW/g

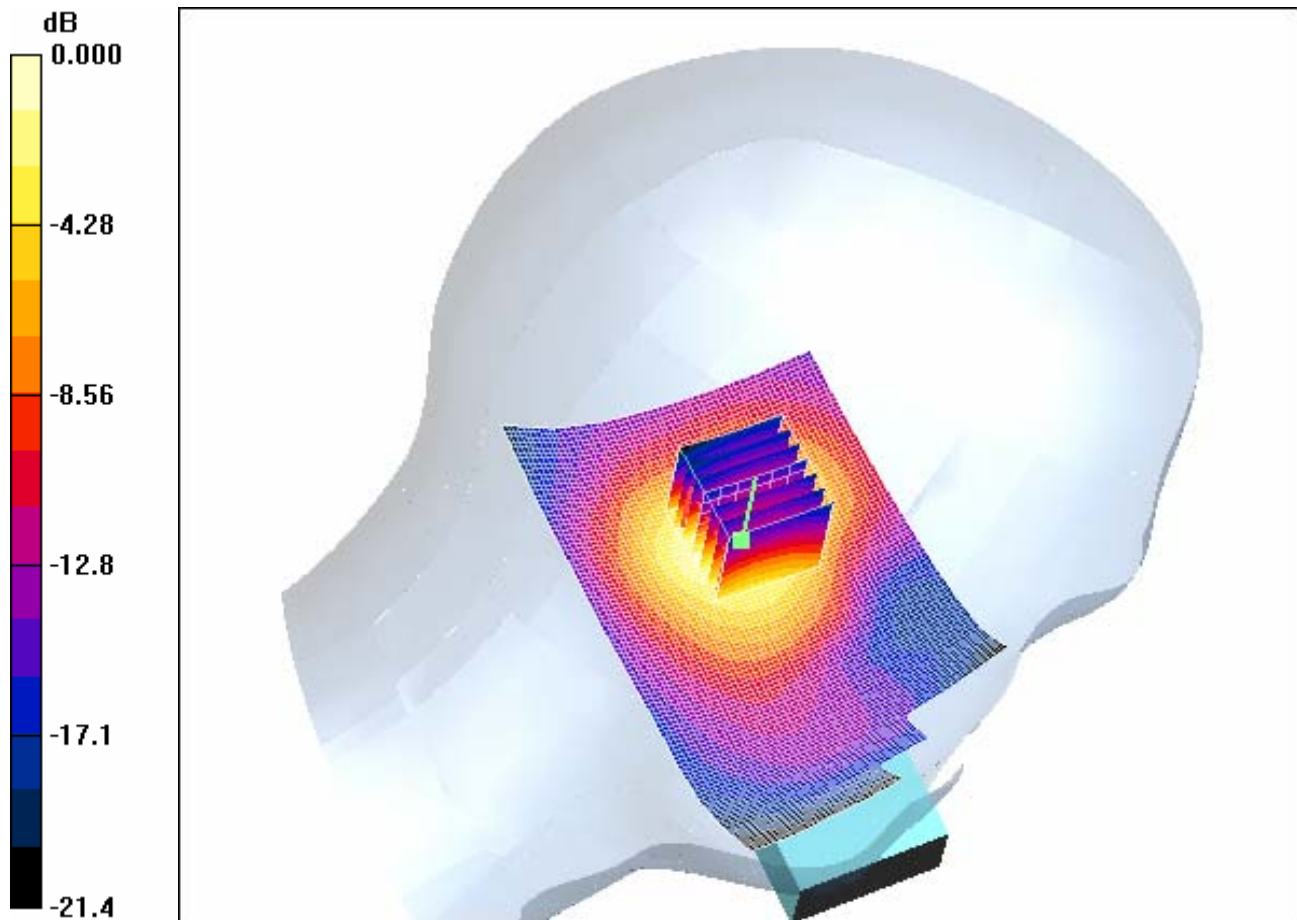

0 dB = 0.571mW/g

4.30PCS1900 Head Worst Case+ WiFi802.11b-Bat2

Date/Time: 2006-8-25 22:47:22

Test Laboratory: SGS-GSM

PCS1900-LeftHandSide-Tilt-High+WiFi-Bat2

DUT: GSM10035468AH; Type: Head; Serial: 004433060010000

Communication System: PCS1900-GSM Mode; Frequency: 1909.8 MHz;Duty Cycle: 1:8.3

Medium: HSL1900-Head Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.47 \text{ mho/m}$; $\epsilon_r = 38.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.93, 4.93, 4.93); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Tilt position-High-WiFi(Bat2)/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.558 mW/g


Tilt position-High-WiFi(Bat2)/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.5 V/m; Power Drift = 0.268 dB

Peak SAR (extrapolated) = 0.946 W/kg

SAR(1 g) = 0.512 mW/g; SAR(10 g) = 0.271 mW/g

Maximum value of SAR (measured) = 0.563 mW/g

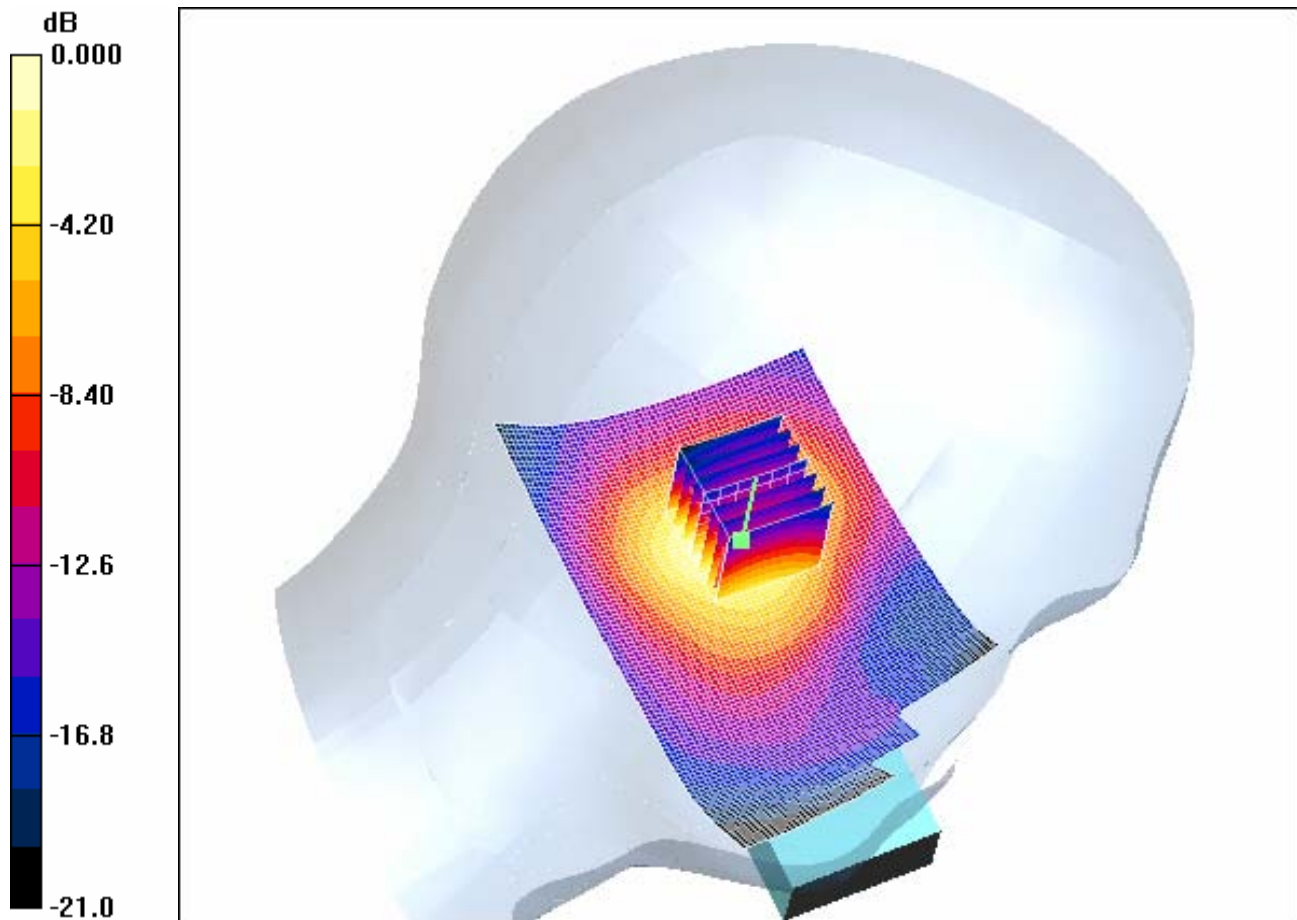

0 dB = 0.563mW/g

4.31LeftHandSide-Cheek-WiFi802.11b-Low

Date/Time: 2006-8-31 17:52:38

Test Laboratory: SGS-GSM

WiFi2450-LeftHandSide-Cheek-Low

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: WiFi(2450); Frequency: 2412 MHz;Duty Cycle: 1:1

Medium: HSL2450-Head Medium parameters used: $f = 2412$ MHz; $\sigma = 1.73$ mho/m; $\epsilon_r = 38.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.53, 4.53, 4.53); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Cheek Position - Low(5.5M)/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.257 mW/g


Cheek Position - Low(5.5M)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.87 V/m; Power Drift = -0.146 dB

Peak SAR (extrapolated) = 0.484 W/kg

SAR(1 g) = 0.253 mW/g; SAR(10 g) = 0.134 mW/g

Maximum value of SAR (measured) = 0.284 mW/g

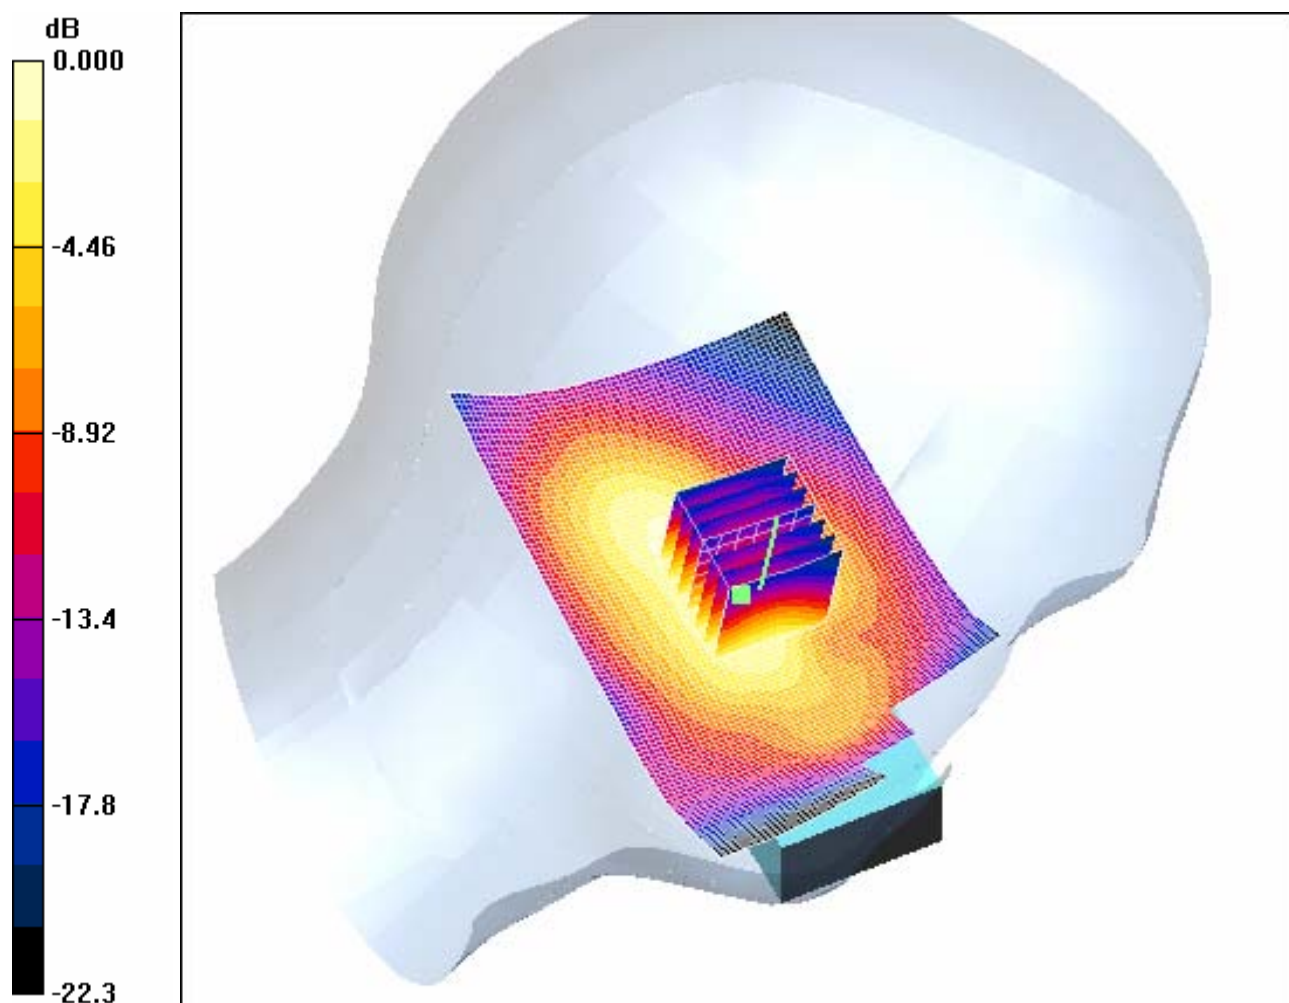

0 dB = 0.284mW/g

4.32LeftHandSide-Cheek- WiFi802.11b –Middle

Date/Time: 2006-8-31 16:24:02

Test Laboratory: SGS-GSM

WiFi2450-LeftHandSide-Cheek-Middle

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: WiFi(2450); Frequency: 2437 MHz;Duty Cycle: 1:1

Medium: HSL2450-Head Medium parameters used: $f = 2437$ MHz; $\sigma = 1.76$ mho/m; $\epsilon_r = 38.1$; $\rho =$

1000 kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.53, 4.53, 4.53); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Cheek position - Middle(5.5M)/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.268 mW/g


Cheek position - Middle(5.5M)/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.2 V/m; Power Drift = -0.131 dB

Peak SAR (extrapolated) = 0.451 W/kg

SAR(1 g) = 0.230 mW/g; SAR(10 g) = 0.129 mW/g

Maximum value of SAR (measured) = 0.262 mW/g

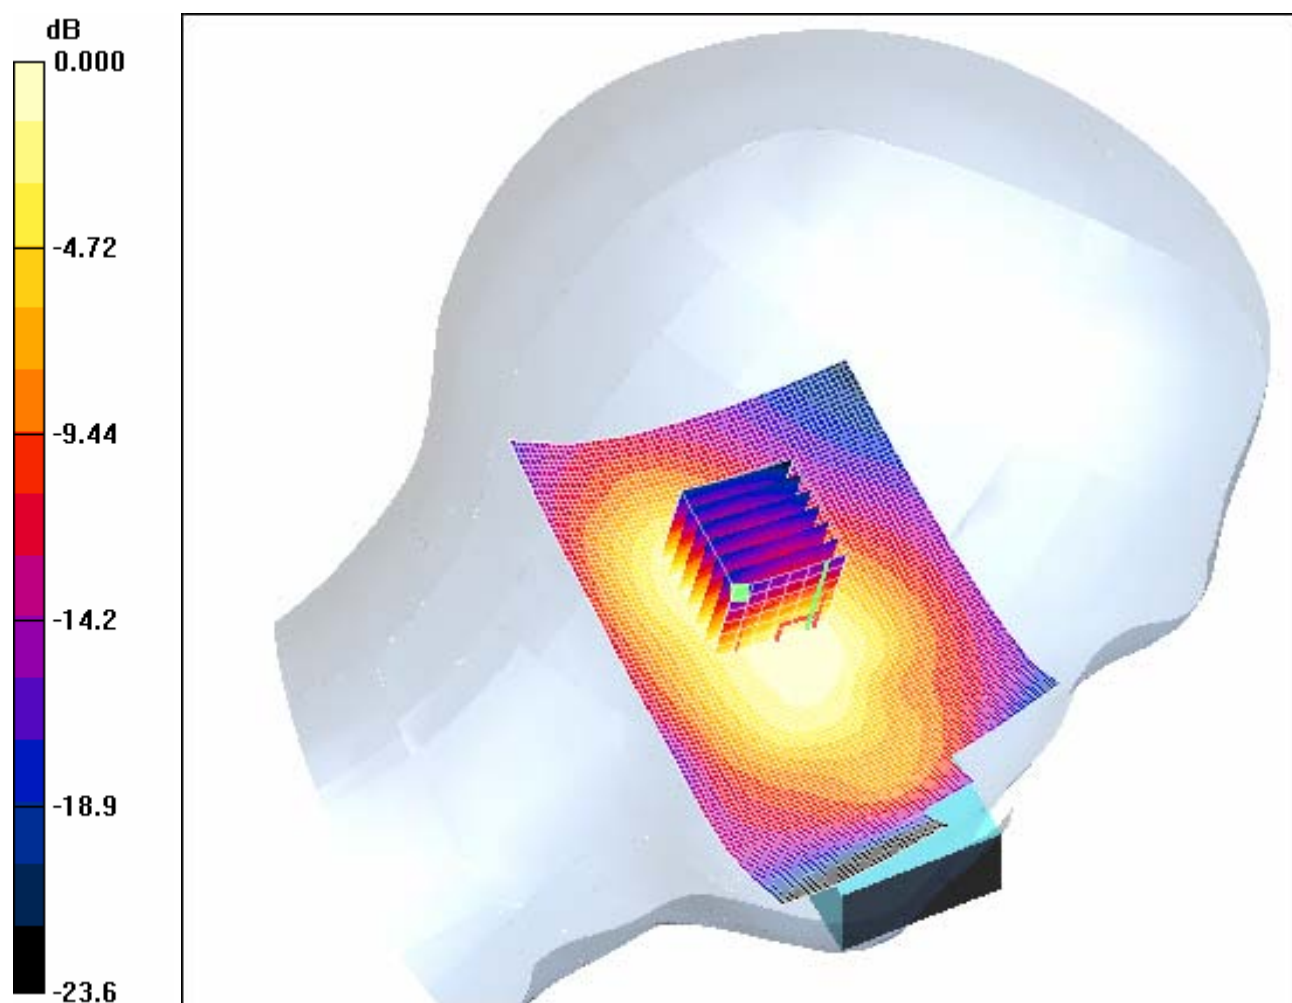

0 dB = 0.262mW/g

4.33LeftHandSide-Cheek- WiFi802.11b -High

Date/Time: 2006-8-31 18:21:12

Test Laboratory: SGS-GSM

WiFi2450-LeftHandSide-Cheek-High

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: WiFi(2450); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL2450-Head Medium parameters used: $f = 2462$ MHz; $\sigma = 1.79$ mho/m; $\epsilon_r = 38$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.53, 4.53, 4.53); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Cheek Position - High (5.5m)/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.198 mW/g


Cheek Position - High (5.5m)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.83 V/m; Power Drift = 0.017 dB

Peak SAR (extrapolated) = 0.398 W/kg

SAR(1 g) = 0.200 mW/g; SAR(10 g) = 0.105 mW/g

Maximum value of SAR (measured) = 0.228 mW/g

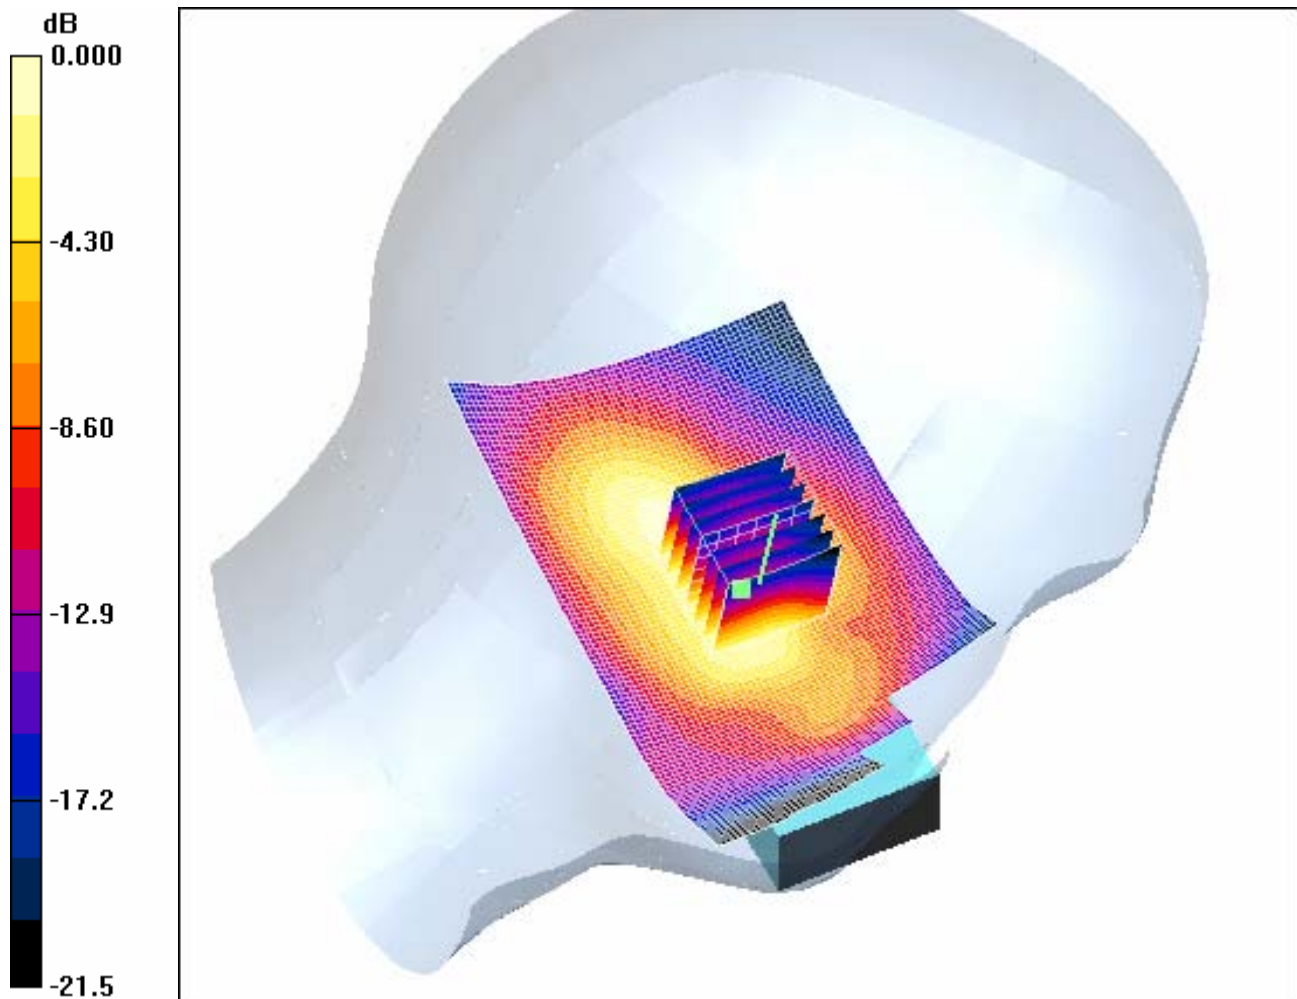

0 dB = 0.228mW/g

4.34LeftHandSide-Tilt- WiFi802.11b -Low

Date/Time: 2006-9-1 9:23:31

Test Laboratory: SGS-GSM

WiFi2450-LeftHandSide-Tilt-Low

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: WiFi(2450); Frequency: 2412 MHz;Duty Cycle: 1:1

Medium: HSL2450-Head Medium parameters used: $f = 2412$ MHz; $\sigma = 1.73$ mho/m; $\epsilon_r = 38.1$; $\rho =$

1000 kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.53, 4.53, 4.53); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Tilt position - Low(5.5m)/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.270 mW/g


Tilt position - Low(5.5m)/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.7 V/m; Power Drift = -0.173 dB

Peak SAR (extrapolated) = 0.438 W/kg

SAR(1 g) = 0.229 mW/g; SAR(10 g) = 0.122 mW/g

Maximum value of SAR (measured) = 0.249 mW/g

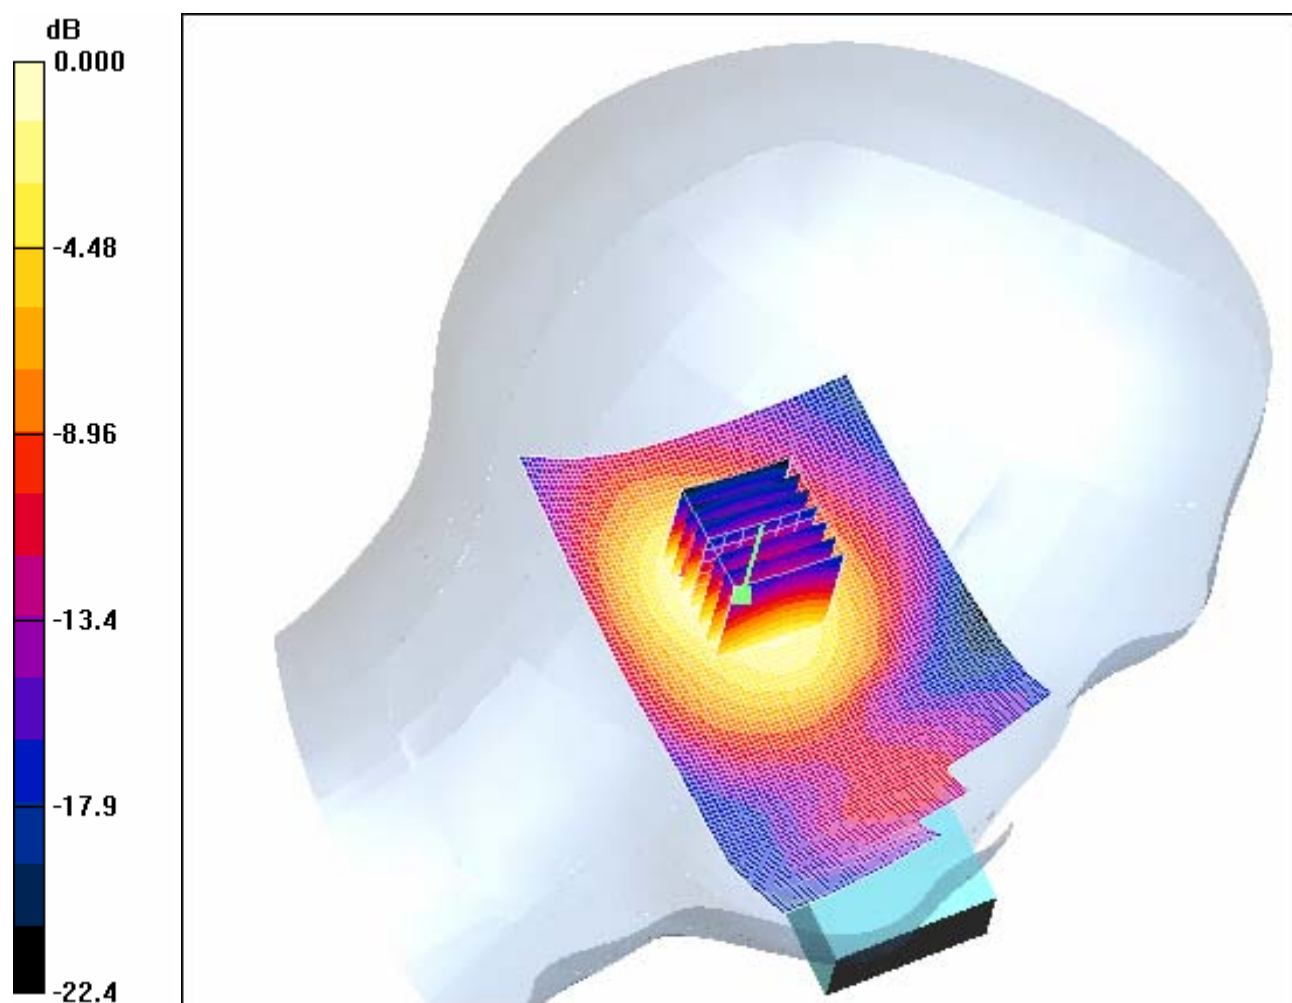

0 dB = 0.249mW/g

4.35LeftHandSide-Tilt- WiFi802.11b -Middle

Date/Time: 2006-8-31 19:16:57

Test Laboratory: SGS-GSM

WiFi2450-LeftHandSide-Tilt-Middle

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: WiFi(2450); Frequency: 2437 MHz;Duty Cycle: 1:1

Medium: HSL2450-Head Medium parameters used: $f = 2437$ MHz; $\sigma = 1.76$ mho/m; $\epsilon_r = 38.1$; $\rho =$

1000 kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.53, 4.53, 4.53); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Tilt position - Middle(5.5m)/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.215 mW/g


Tilt position - Middle(5.5m)/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.1 V/m; Power Drift = -0.031 dB

Peak SAR (extrapolated) = 0.362 W/kg

SAR(1 g) = 0.191 mW/g; SAR(10 g) = 0.103 mW/g

Maximum value of SAR (measured) = 0.206 mW/g

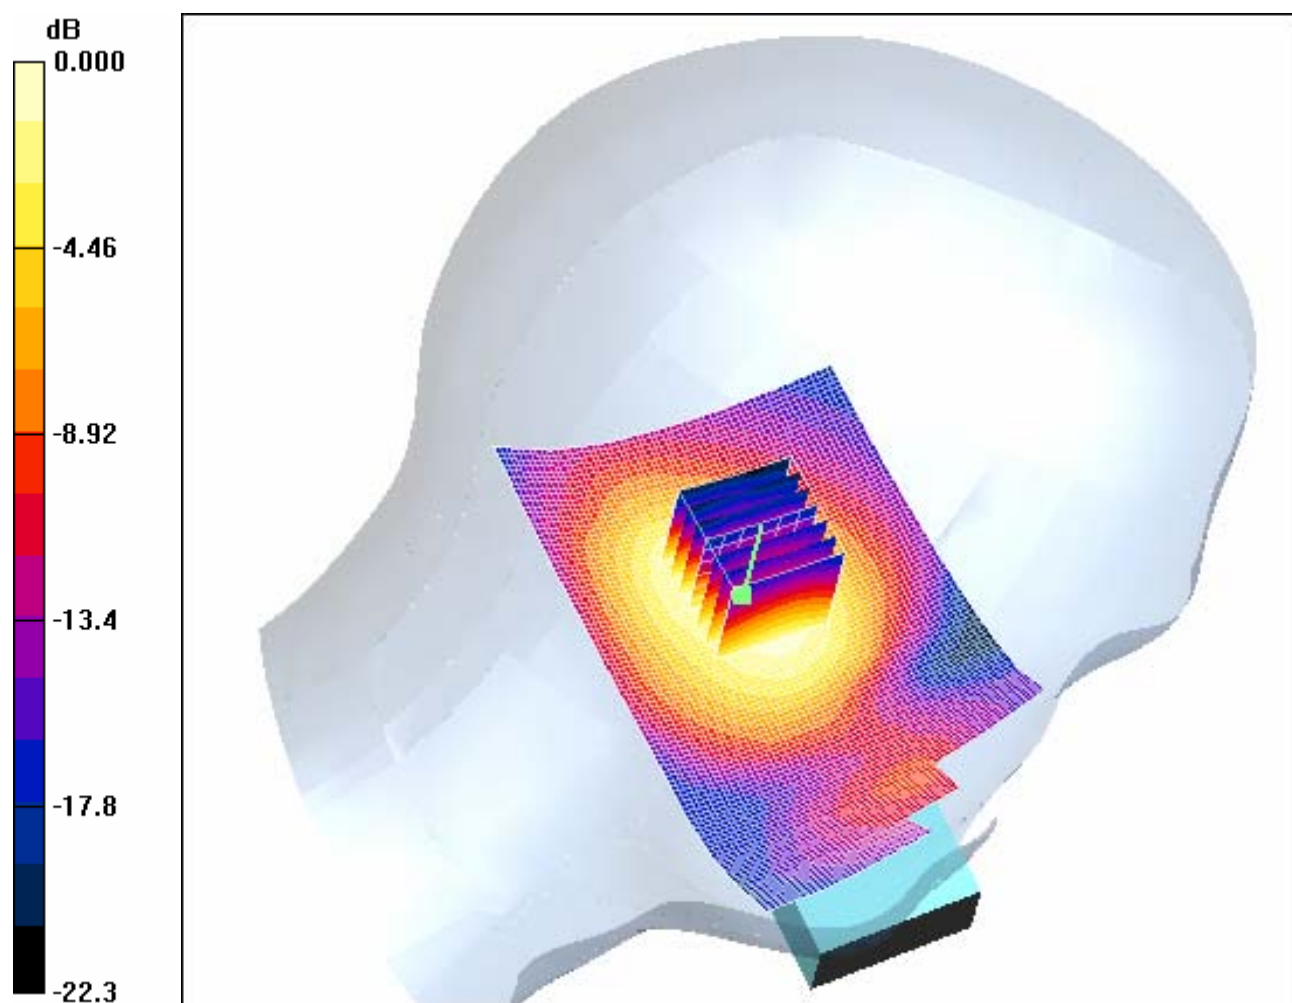

0 dB = 0.206mW/g

4.36LeftHandSide-Tilt- WiFi802.11b -High

Date/Time: 2006-8-31 18:51:21

Test Laboratory: SGS-GSM

WiFi2450-LeftHandSide-Tilt-High

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: WiFi(2450); Frequency: 2462 MHz;Duty Cycle: 1:1

Medium: HSL2450-Head Medium parameters used: $f = 2462$ MHz; $\sigma = 1.79$ mho/m; $\epsilon_r = 38$; $\rho = 1000$

kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.53, 4.53, 4.53); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Tilt position - High(5.5m)/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.176 mW/g


Tilt position - High(5.5m)/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.10 V/m; Power Drift = -0.037 dB

Peak SAR (extrapolated) = 0.302 W/kg

SAR(1 g) = 0.156 mW/g; SAR(10 g) = 0.084 mW/g

Maximum value of SAR (measured) = 0.168 mW/g

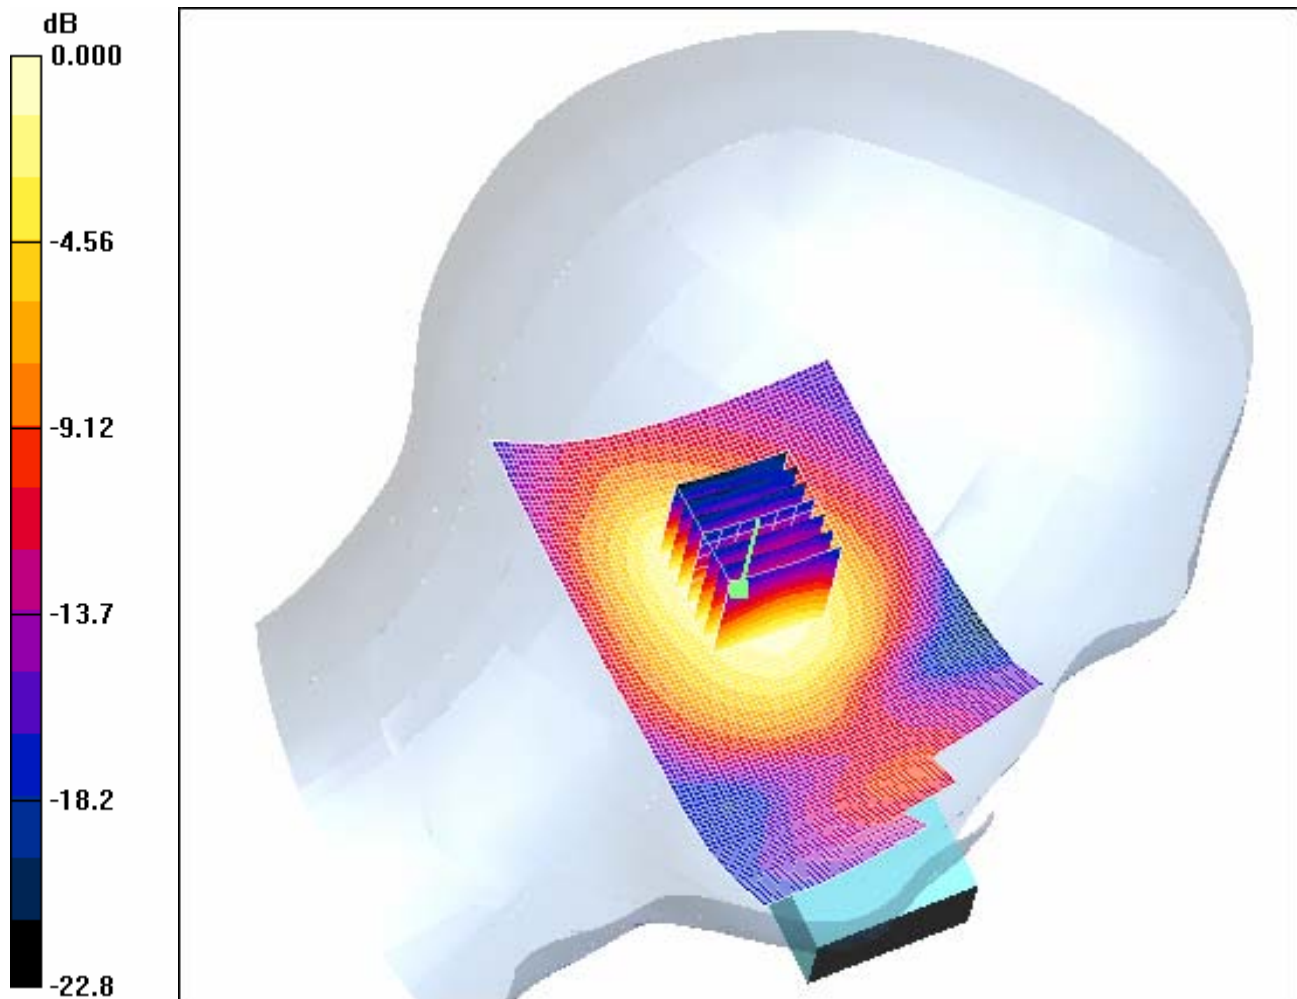

0 dB = 0.168mW/g

4.37RightHandSide-Cheek-WiFi802.11b-Low

Date/Time: 2006-8-31 11:13:27

Test Laboratory: SGS-GSM

WiFi2450-RightHandSide-Cheek-Low

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: WiFi(2450); Frequency: 2412 MHz;Duty Cycle: 1:1

Medium: HSL2450-Head Medium parameters used: $f = 2412$ MHz; $\sigma = 1.73$ mho/m; $\epsilon_r = 38.1$; $\rho =$

1000 kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.53, 4.53, 4.53); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Cheek Position- Low-5.5M/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.439 mW/g


Cheek Position- Low-5.5M/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.5 V/m; Power Drift = -0.010 dB

Peak SAR (extrapolated) = 0.825 W/kg

SAR(1 g) = 0.396 mW/g; SAR(10 g) = 0.194 mW/g

Maximum value of SAR (measured) = 0.447 mW/g

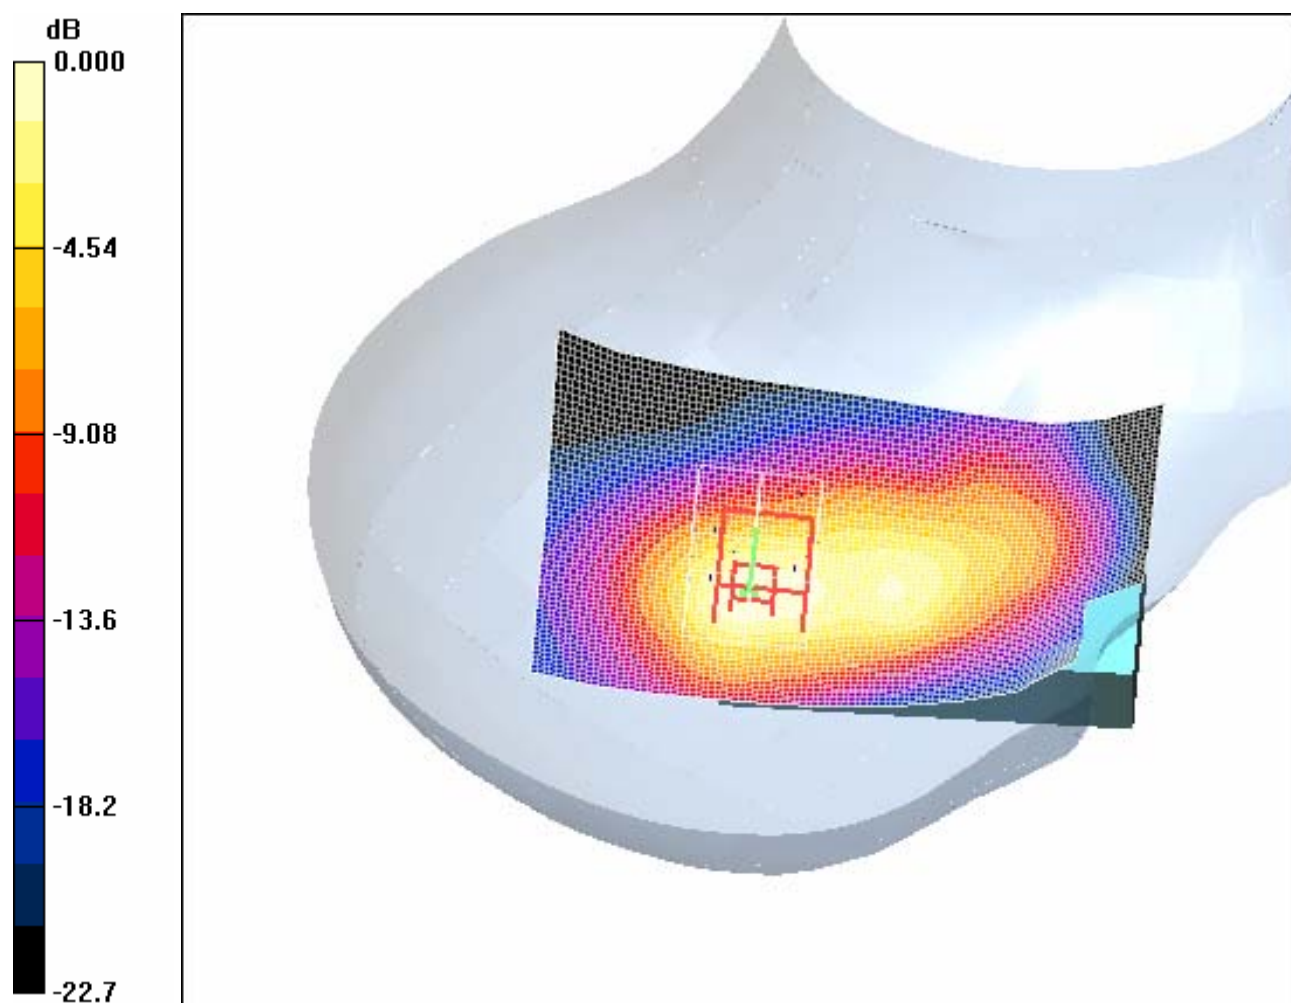

0 dB = 0.447mW/g

4.38RightHandSide-Cheek- WiFi802.11b –Middle

Date/Time: 2006-8-31 9:26:15

Test Laboratory: SGS-GSM

WiFi2450-RightHandSide-Cheek-Middle

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: WiFi(2450); Frequency: 2437 MHz;Duty Cycle: 1:1

Medium: HSL2450-Head Medium parameters used: $f = 2437$ MHz; $\sigma = 1.76$ mho/m; $\epsilon_r = 38.1$; $\rho =$

1000 kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.53, 4.53, 4.53); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Cheek position - Middle-5.5M/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.416 mW/g


Cheek position - Middle-5.5M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.6 V/m; Power Drift = -0.002 dB

Peak SAR (extrapolated) = 0.559 W/kg

SAR(1 g) = 0.321 mW/g; SAR(10 g) = 0.182 mW/g

Maximum value of SAR (measured) = 0.348 mW/g

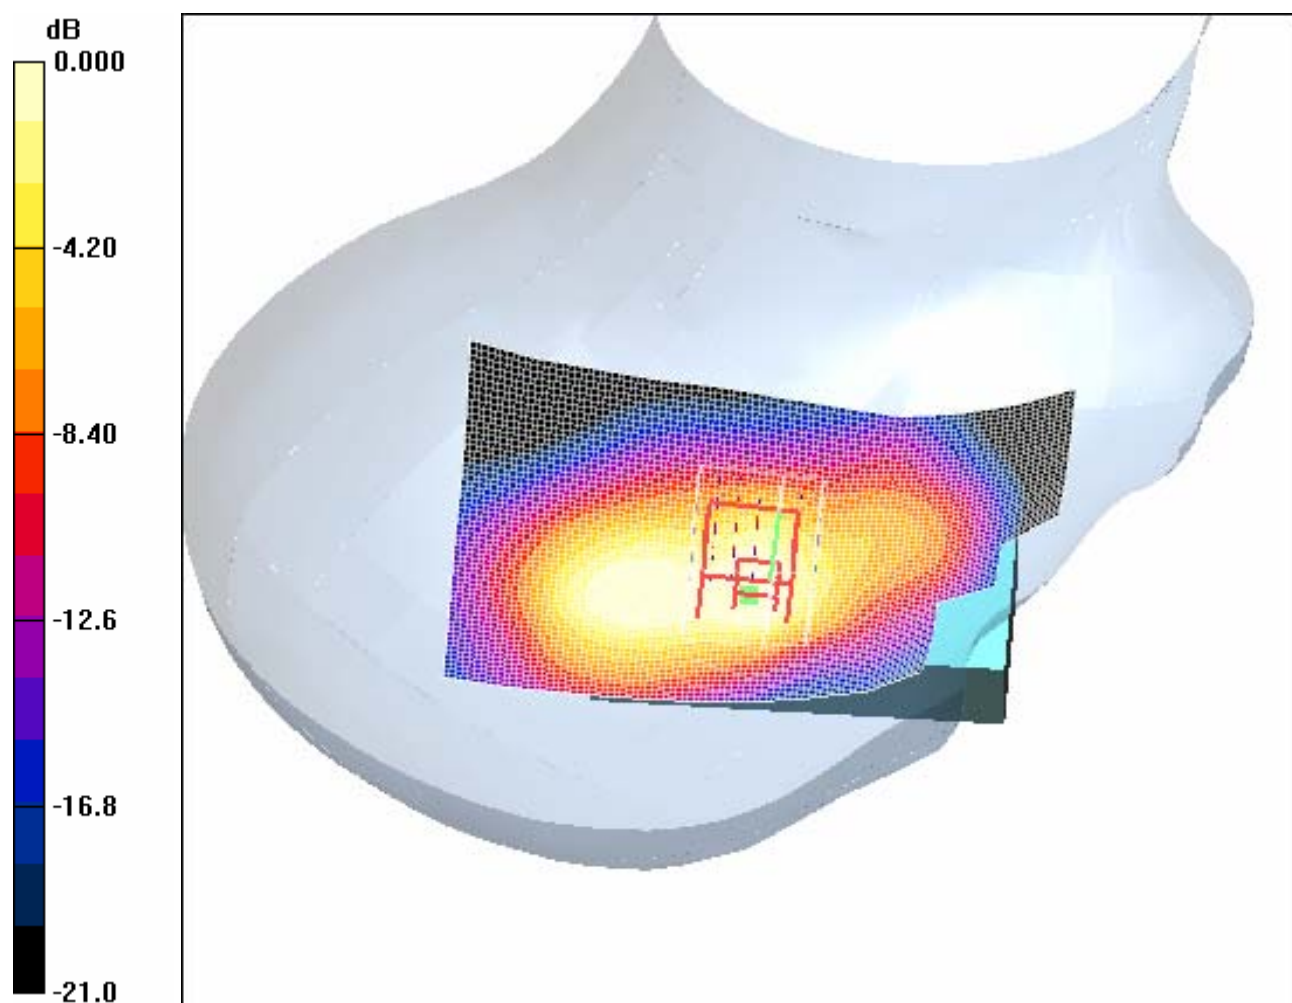

0 dB = 0.348mW/g

4.39RightHandSide-Cheek- WiFi802.11b -High

Date/Time: 2006-8-31 12:30:03

Test Laboratory: SGS-GSM

WiFi2450-RightHandSide-Cheek-High

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: WiFi(2450); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL2450-Head Medium parameters used: $f = 2462$ MHz; $\sigma = 1.79$ mho/m; $\epsilon_r = 38$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.53, 4.53, 4.53); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Cheek position - High-5.5M/Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.354 mW/g


Cheek position - High-5.5M/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.0 V/m; Power Drift = 0.044 dB

Peak SAR (extrapolated) = 0.680 W/kg

SAR(1 g) = 0.308 mW/g; SAR(10 g) = 0.147 mW/g

Maximum value of SAR (measured) = 0.344 mW/g

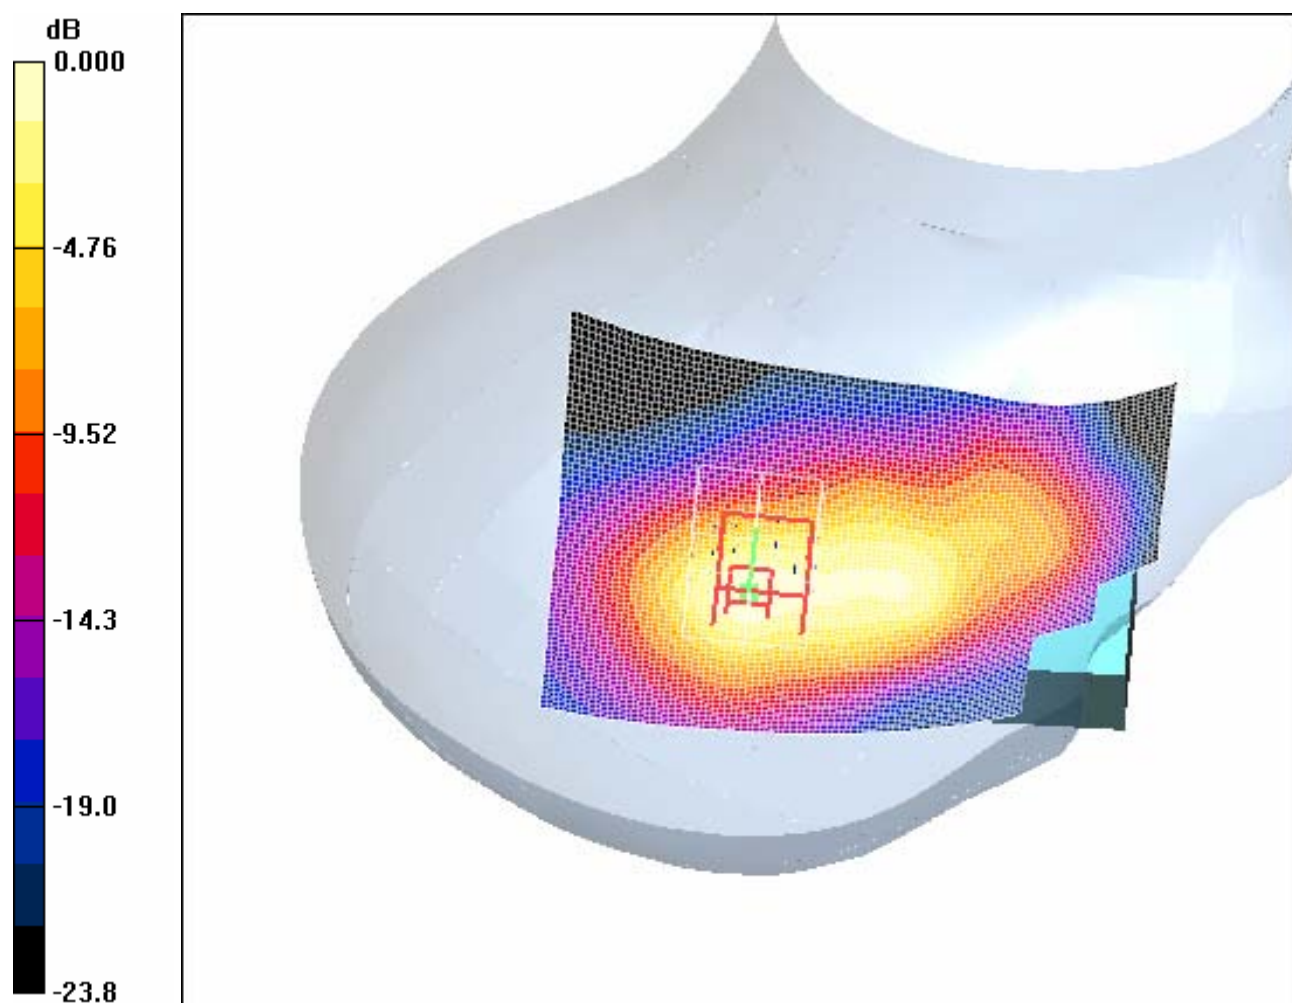

0 dB = 0.344mW/g

4.40RightHandSide-Tilt- WiFi802.11b -Low

Date/Time: 2006-8-31 15:13:18

Test Laboratory: SGS-GSM

WiFi2450-RightHandSide-Tilt-Low

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: WiFi(2450); Frequency: 2412 MHz;Duty Cycle: 1:1

Medium: HSL2450-Head Medium parameters used: $f = 2412$ MHz; $\sigma = 1.73$ mho/m; $\epsilon_r = 38.1$; $\rho =$

1000 kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.53, 4.53, 4.53); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Tilt position - Low-5.5M/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.316 mW/g


Tilt position - Low-5.5M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.7 V/m; Power Drift = -0.038 dB

Peak SAR (extrapolated) = 0.587 W/kg

SAR(1 g) = 0.280 mW/g; SAR(10 g) = 0.145 mW/g

Maximum value of SAR (measured) = 0.307 mW/g

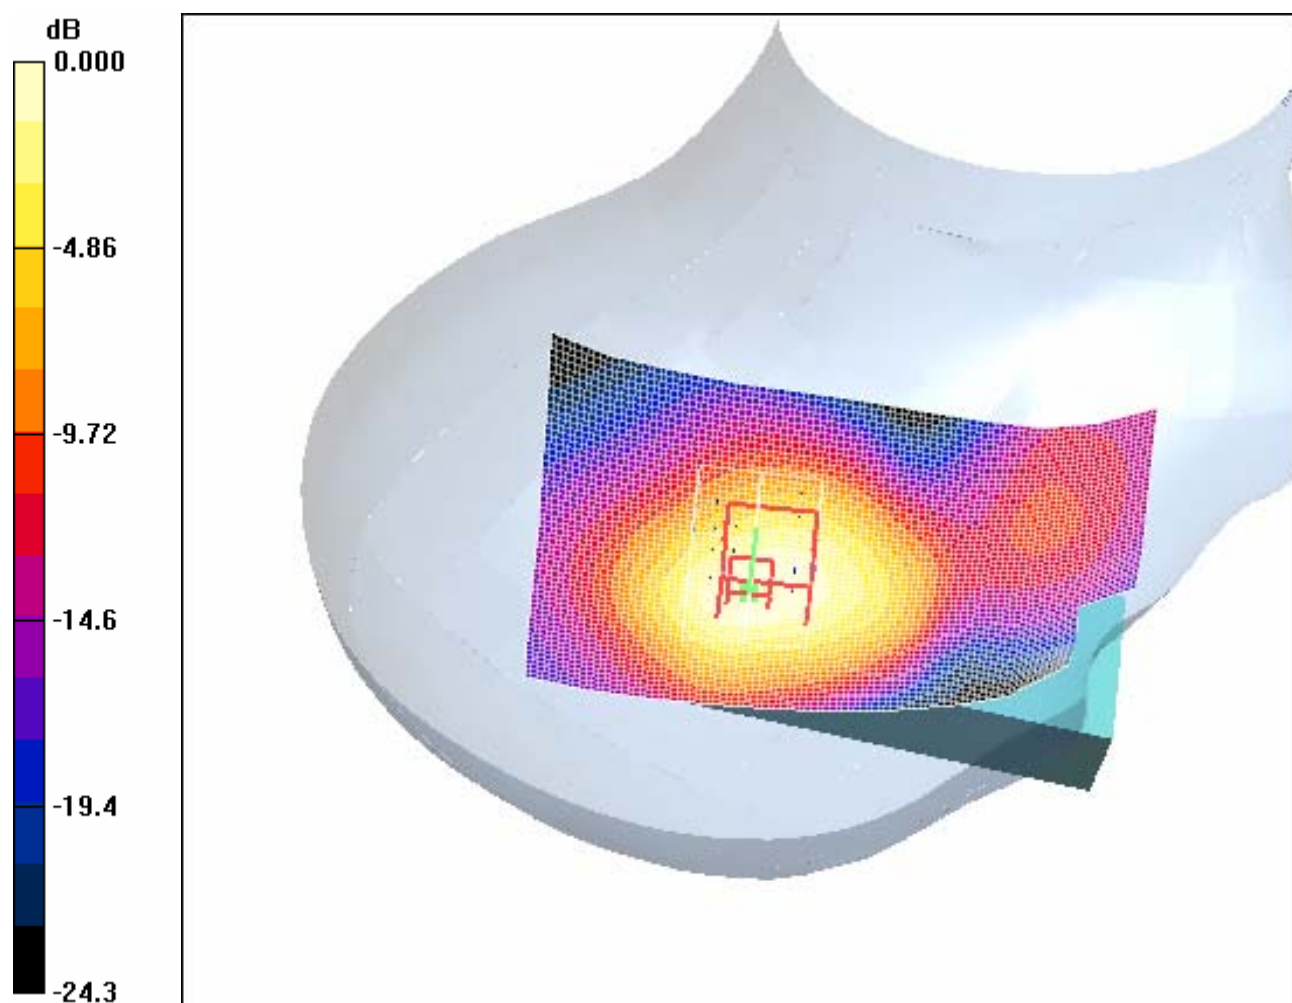

0 dB = 0.307mW/g

4.41RightHandSide-Tilt- WiFi802.11b -Middle

Date/Time: 2006-8-31 13:16:42

Test Laboratory: SGS-GSM

WiFi2450-RightHandSide-Tilt-Middle

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: WiFi(2450); Frequency: 2437 MHz;Duty Cycle: 1:1

Medium: HSL2450-Head Medium parameters used: $f = 2437$ MHz; $\sigma = 1.76$ mho/m; $\epsilon_r = 38.1$; $\rho =$

1000 kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.53, 4.53, 4.53); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Tilt position - Middle-5.5M/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.286 mW/g


Tilt position - Middle-5.5M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.3 V/m; Power Drift = -0.055 dB

Peak SAR (extrapolated) = 0.541 W/kg

SAR(1 g) = 0.255 mW/g; SAR(10 g) = 0.134 mW/g

Maximum value of SAR (measured) = 0.273 mW/g

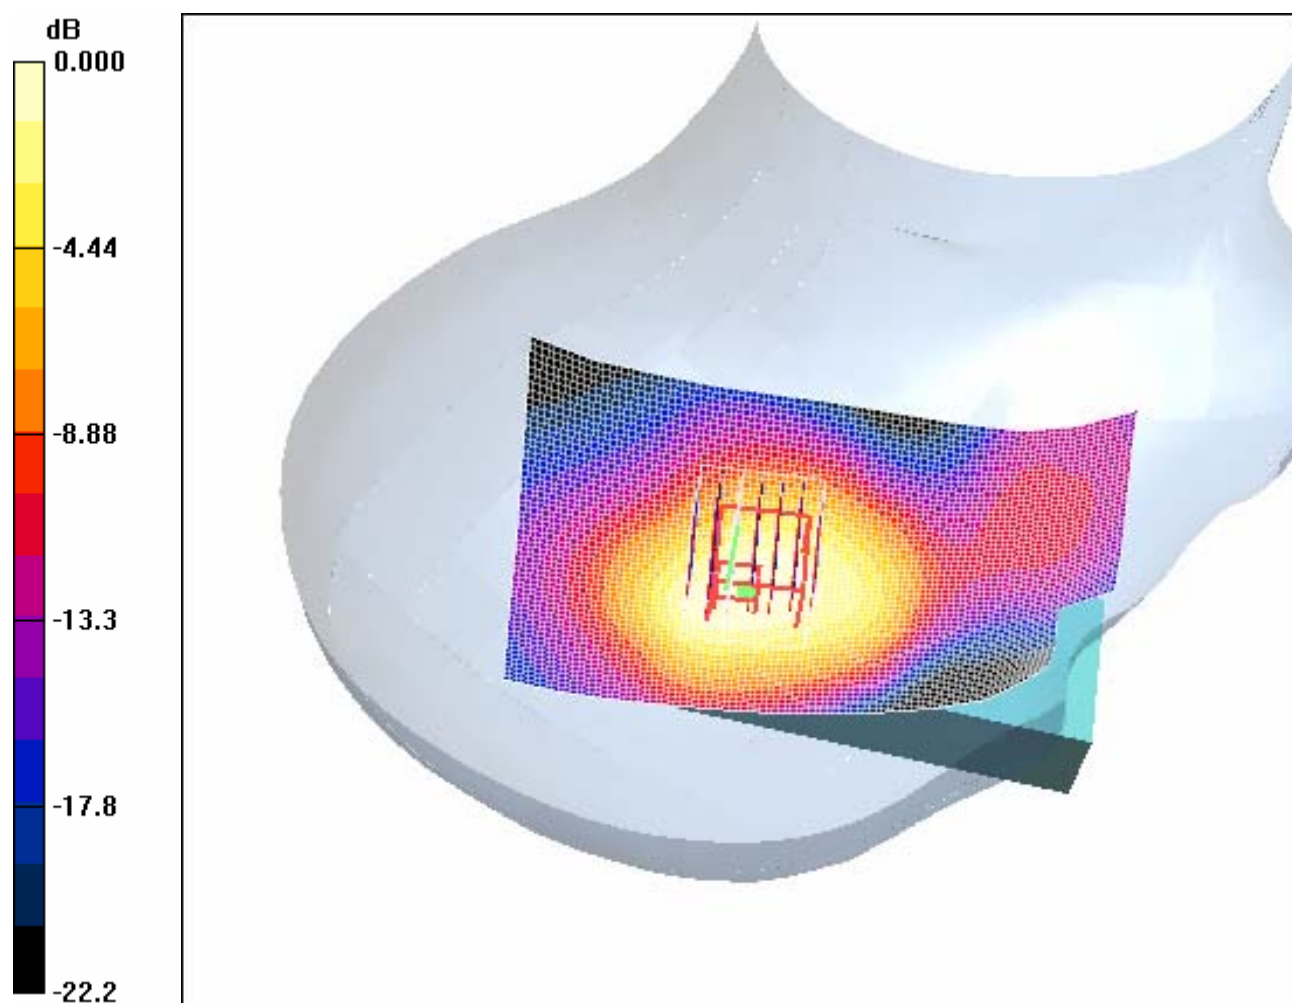

0 dB = 0.273mW/g

4.42RightHandSide-Tilt- WiFi802.11b -High

Date/Time: 2006-8-31 15:38:39

Test Laboratory: SGS-GSM

WiFi2450-RightHandSide-Tilt-High

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: WiFi(2450); Frequency: 2462 MHz;Duty Cycle: 1:1

Medium: HSL2450-Head Medium parameters used: $f = 2462$ MHz; $\sigma = 1.79$ mho/m; $\epsilon_r = 38$; $\rho = 1000$

kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.53, 4.53, 4.53); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Tilt position - High-5.5M/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.262 mW/g


Tilt position - High-5.5M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.0 V/m; Power Drift = 0.041 dB

Peak SAR (extrapolated) = 0.500 W/kg

SAR(1 g) = 0.229 mW/g; SAR(10 g) = 0.116 mW/g

Maximum value of SAR (measured) = 0.253 mW/g

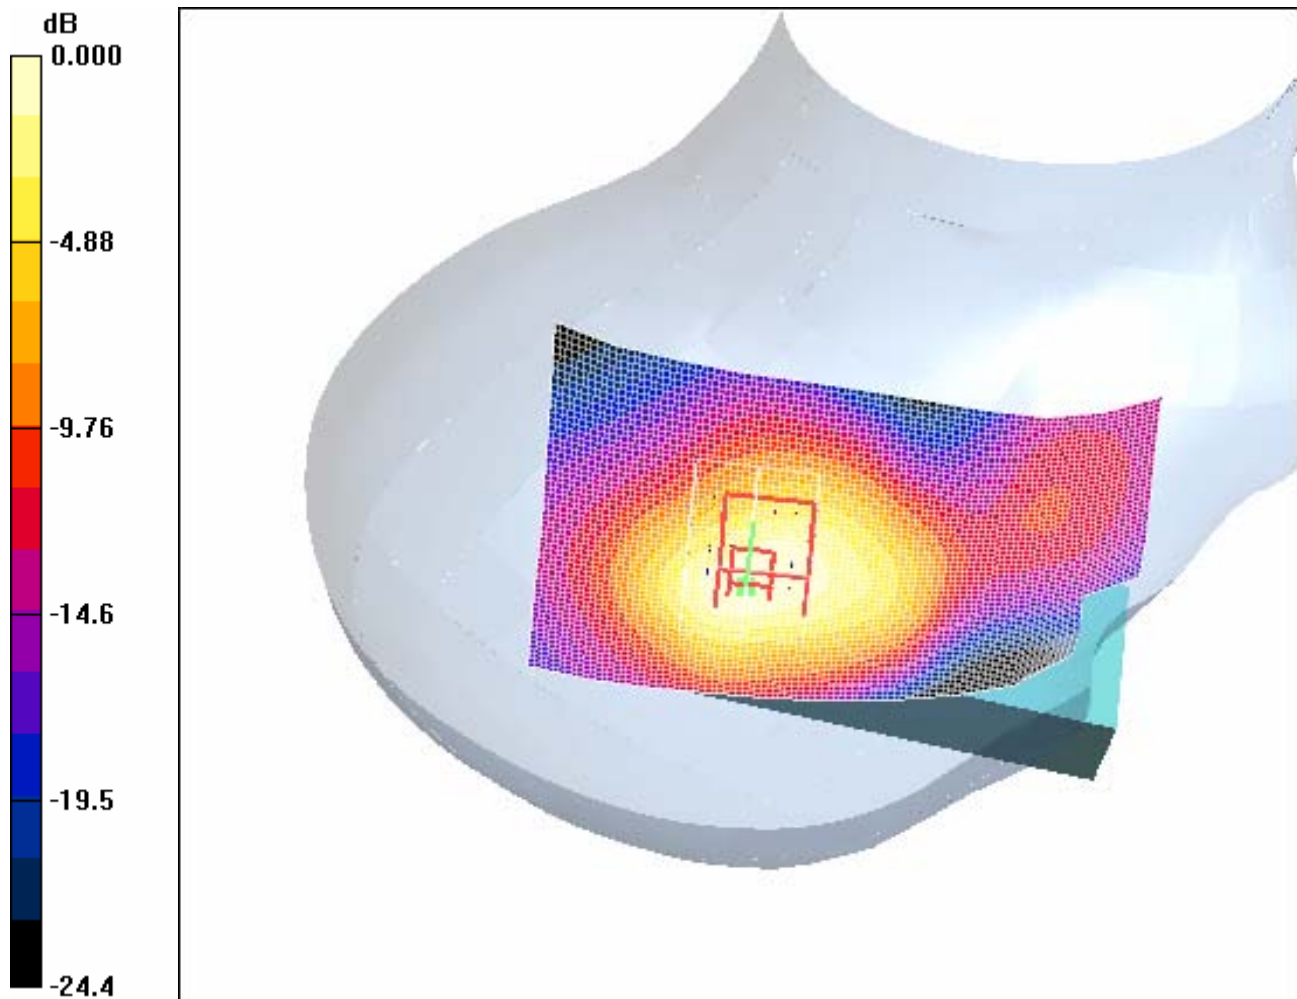

0 dB = 0.253mW/g

4.43 Maximum Value With Battery2

Date/Time: 2006-9-1 10:54:55

Test Laboratory: SGS-GSM

WiFi2450-RightHandSide-Cheek-Low-Bat2

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: WiFi(2450); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: HSL2450-Head Medium parameters used: $f = 2412$ MHz; $\sigma = 1.73$ mho/m; $\epsilon_r = 38.1$; $\rho =$

1000 kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.53, 4.53, 4.53); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Cheek Position- Low-5.5M(Bat2)/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.425 mW/g

Cheek Position- Low-5.5M(Bat2)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.7 V/m; Power Drift = -0.307 dB

Peak SAR (extrapolated) = 0.852 W/kg

SAR(1 g) = 0.387 mW/g; SAR(10 g) = 0.185 mW/g

Maximum value of SAR (measured) = 0.432 mW/g

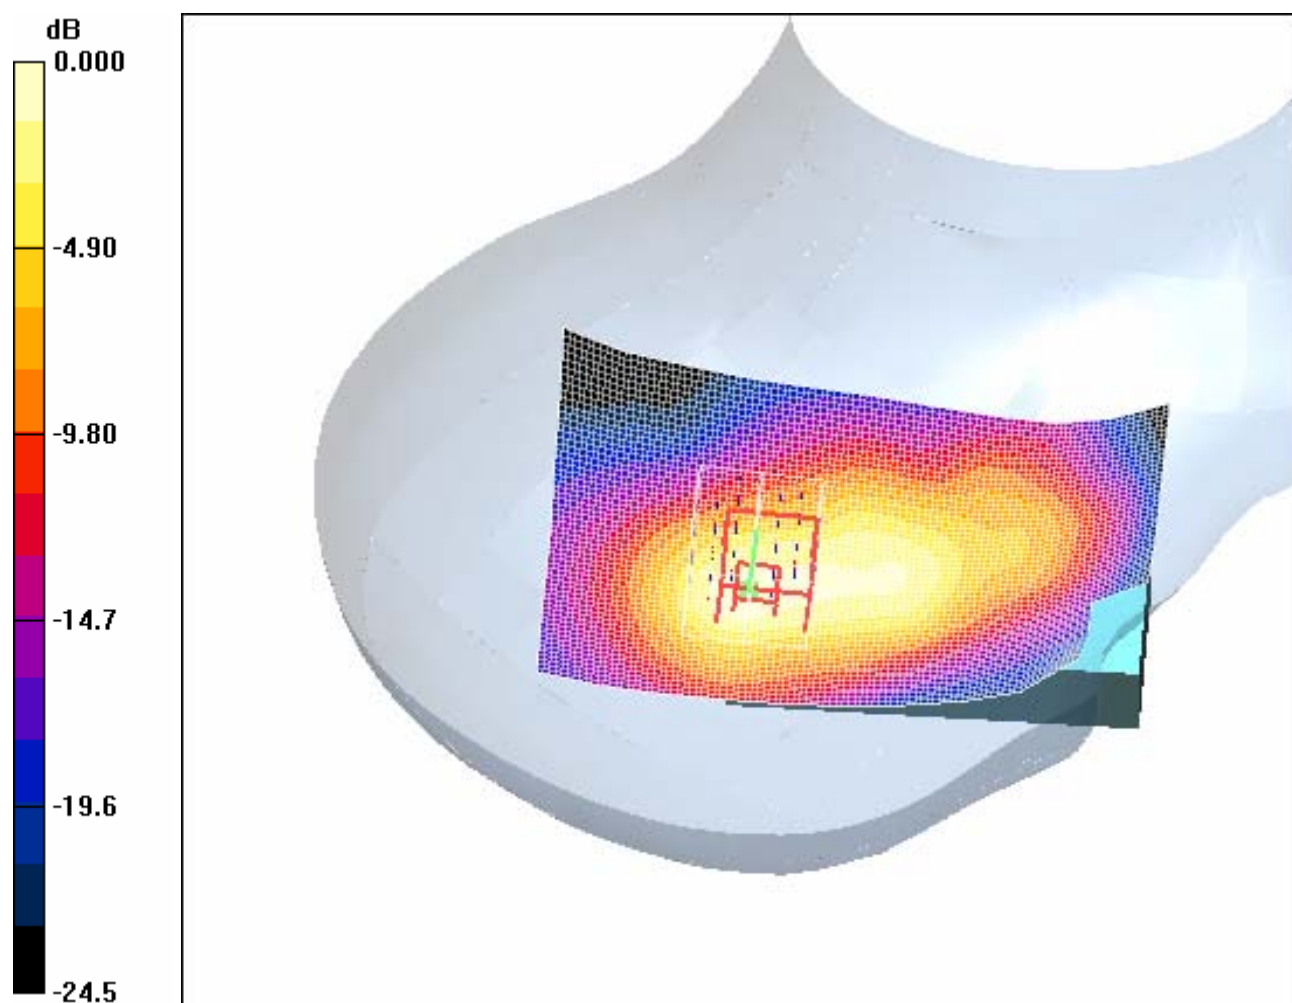

0 dB = 0.432mW/g

4.44Body-Worn-GSM850-GPRS-Low

Date/Time: 2006-8-29 18:49:11

Test Laboratory: SGS-GSM

GSM850-Body-Worn-Low-GPRS-2cm

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: GSM850-GPRS Mode; Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium: HSL850-Body Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.933$ mho/m; $\epsilon_r = 55.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.83, 5.83, 5.83); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body Worn - Low/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.02 mW/g


Body Worn - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.8 V/m; Power Drift = -0.011 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.961 mW/g; SAR(10 g) = 0.694 mW/g

Maximum value of SAR (measured) = 1.02 mW/g

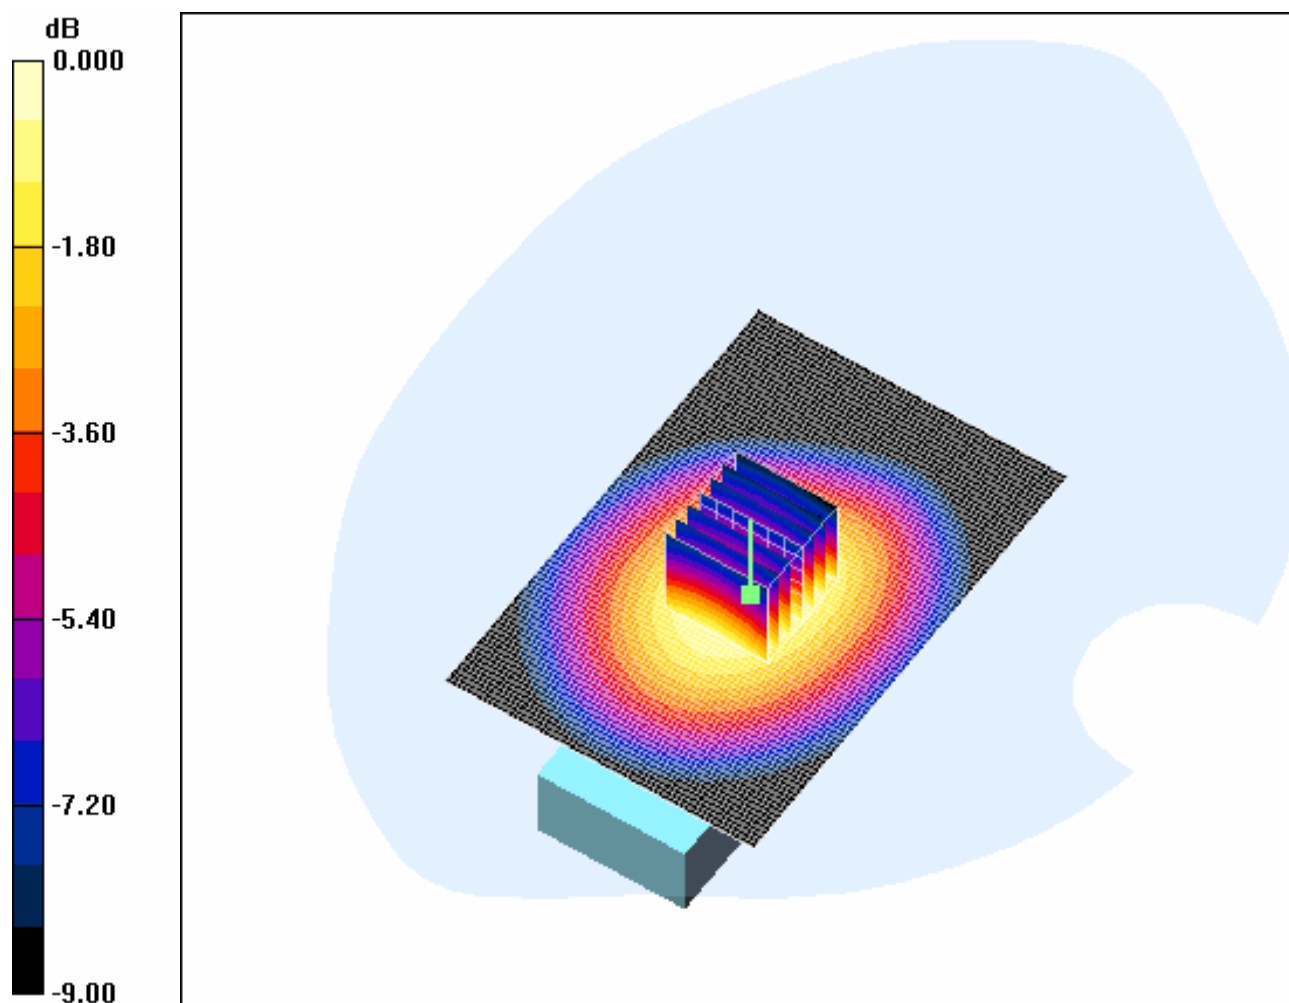

0 dB = 1.02mW/g

4.45Body-Worn-GSM850-GPRS-Middle

Date/Time: 2006-8-29 18:22:56

Test Laboratory: SGS-GSM

GSM850-Body-Worn-Middle-GPRS-2cm

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: GSM850-GPRS Mode; Frequency: 836.4 MHz; Duty Cycle: 1:4

Medium: HSL850-Body Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.945$ mho/m; $\epsilon_r = 55.1$; $\rho =$

1000 kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.83, 5.83, 5.83); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body Worn - Middle 2cm/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.11 mW/g


Body Worn - Middle 2cm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.3 V/m; Power Drift = -0.109 dB

Peak SAR (extrapolated) = 1.37 W/kg

SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.749 mW/g

Maximum value of SAR (measured) = 1.10 mW/g

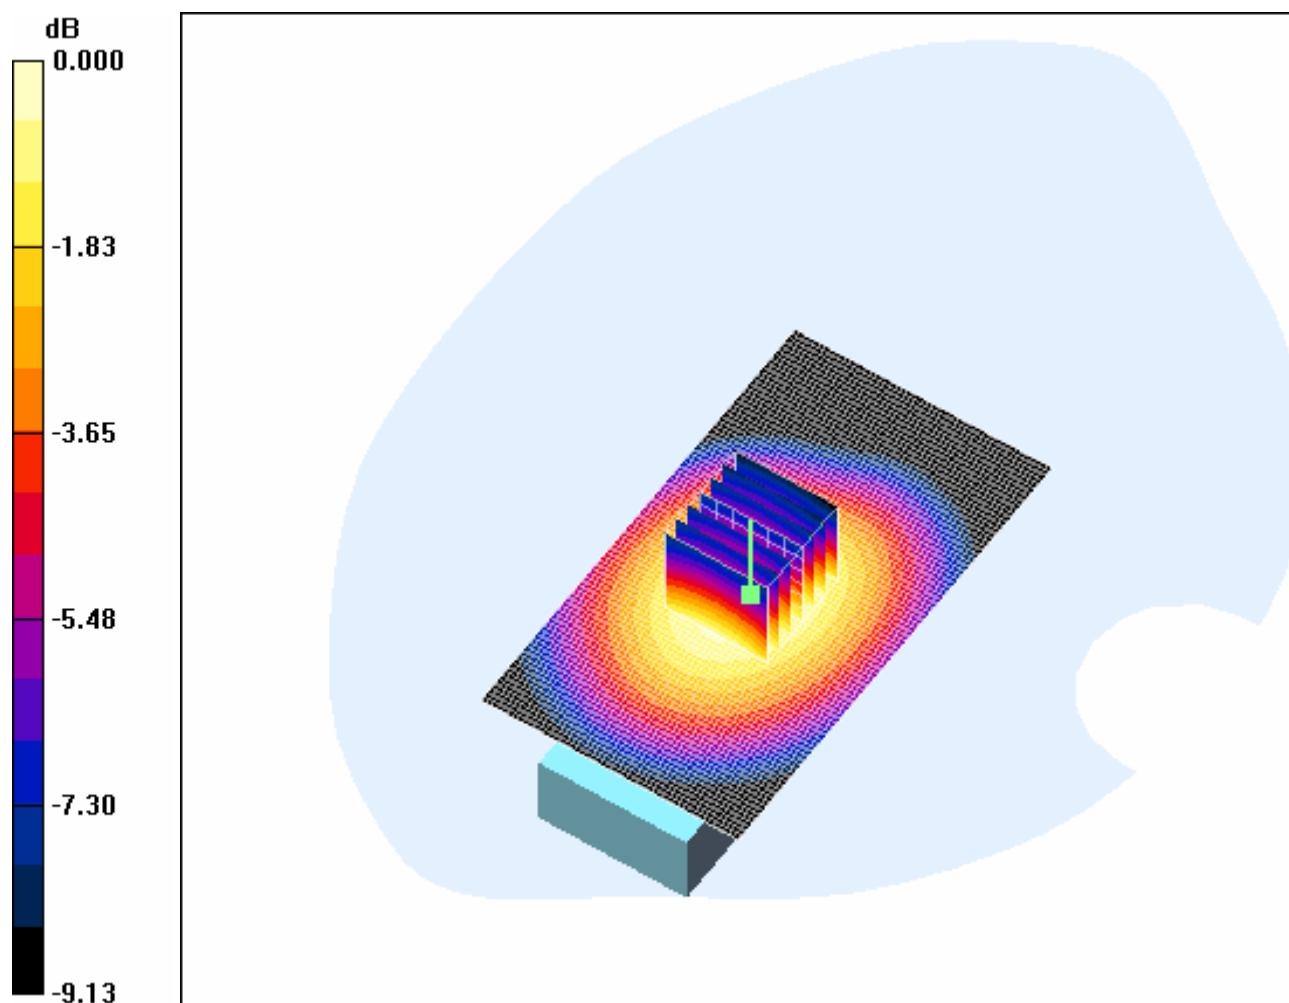

0 dB = 1.10mW/g

4.46Body-Worn-GSM850-GPRS-High

Date/Time: 2006-8-29 21:11:51

Test Laboratory: SGS-GSM

GSM850-Body-Worn-High-GPRS-2cm

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: GSM850-GPRS Mode; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium: HSL850-Body Medium parameters used: $f = 848.8$ MHz; $\sigma = 0.957$ mho/m; $\epsilon_r = 54.9$; $\rho =$

1000 kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.83, 5.83, 5.83); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body Worn - High/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.07 mW/g


Body Worn - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.1 V/m; Power Drift = -0.182 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.999 mW/g; SAR(10 g) = 0.722 mW/g

Maximum value of SAR (measured) = 1.06 mW/g

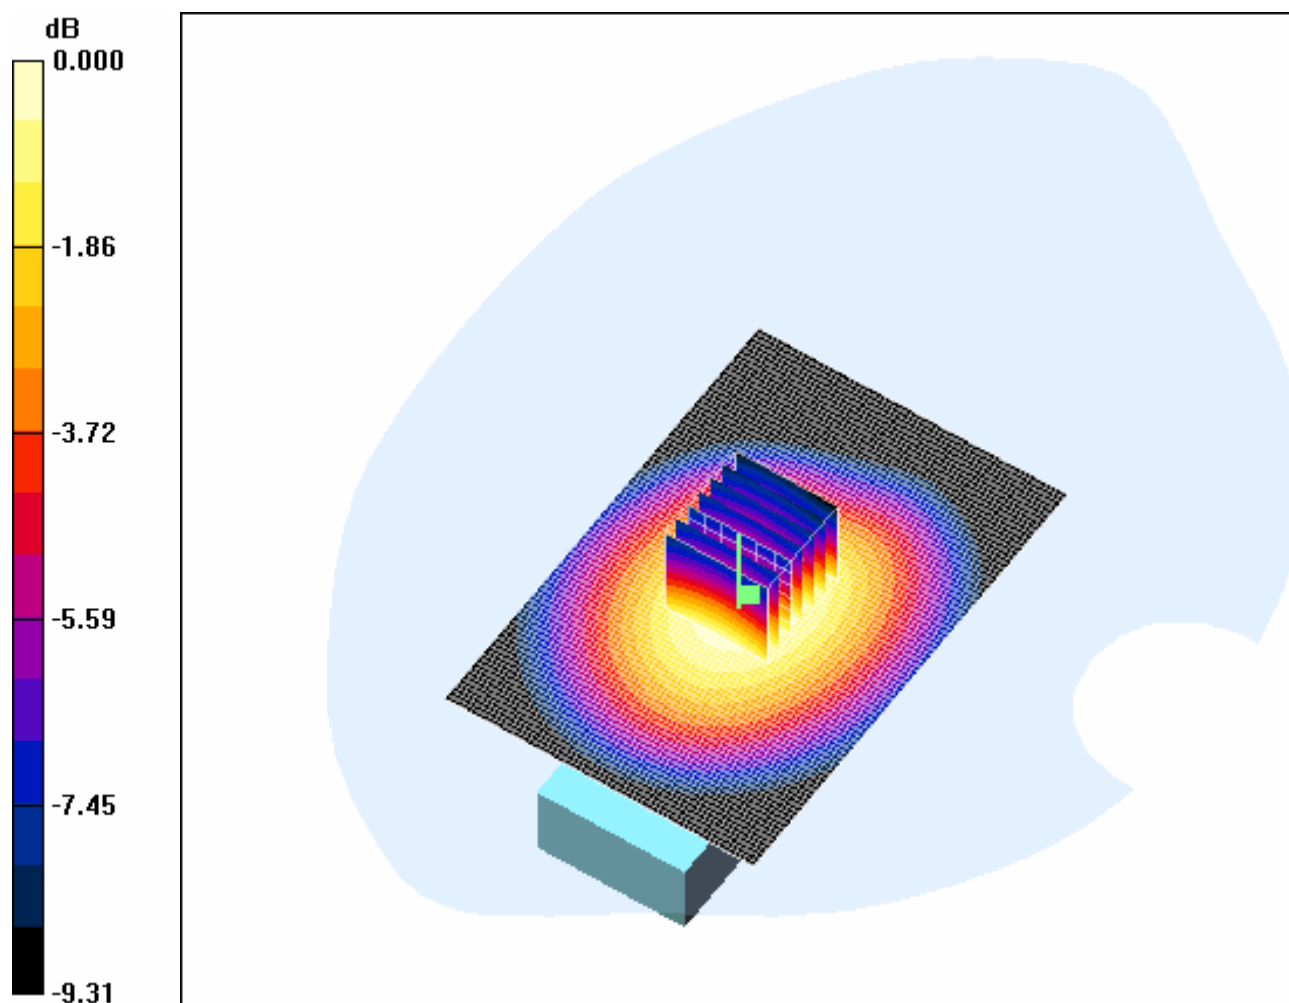

0 dB = 1.06mW/g

4.47 Maximum Value With Battery2

Date/Time: 2006-8-29 22:24:11

Test Laboratory: SGS-GSM

GSM850-Body-Worn-Middle-GPRS-2cm-Bat2

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: GSM850-GPRS Mode; Frequency: 836.4 MHz; Duty Cycle: 1:4

Medium: HSL850-Body Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.945 \text{ mho/m}$; $\epsilon_r = 55.1$; $\rho =$

1000 kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.83, 5.83, 5.83); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body Worn - Middle 2cm Bat2/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.09 mW/g


Body Worn - Middle 2cm Bat2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.5 V/m; Power Drift = -0.081 dB

Peak SAR (extrapolated) = 1.35 W/kg

SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.744 mW/g

Maximum value of SAR (measured) = 1.09 mW/g

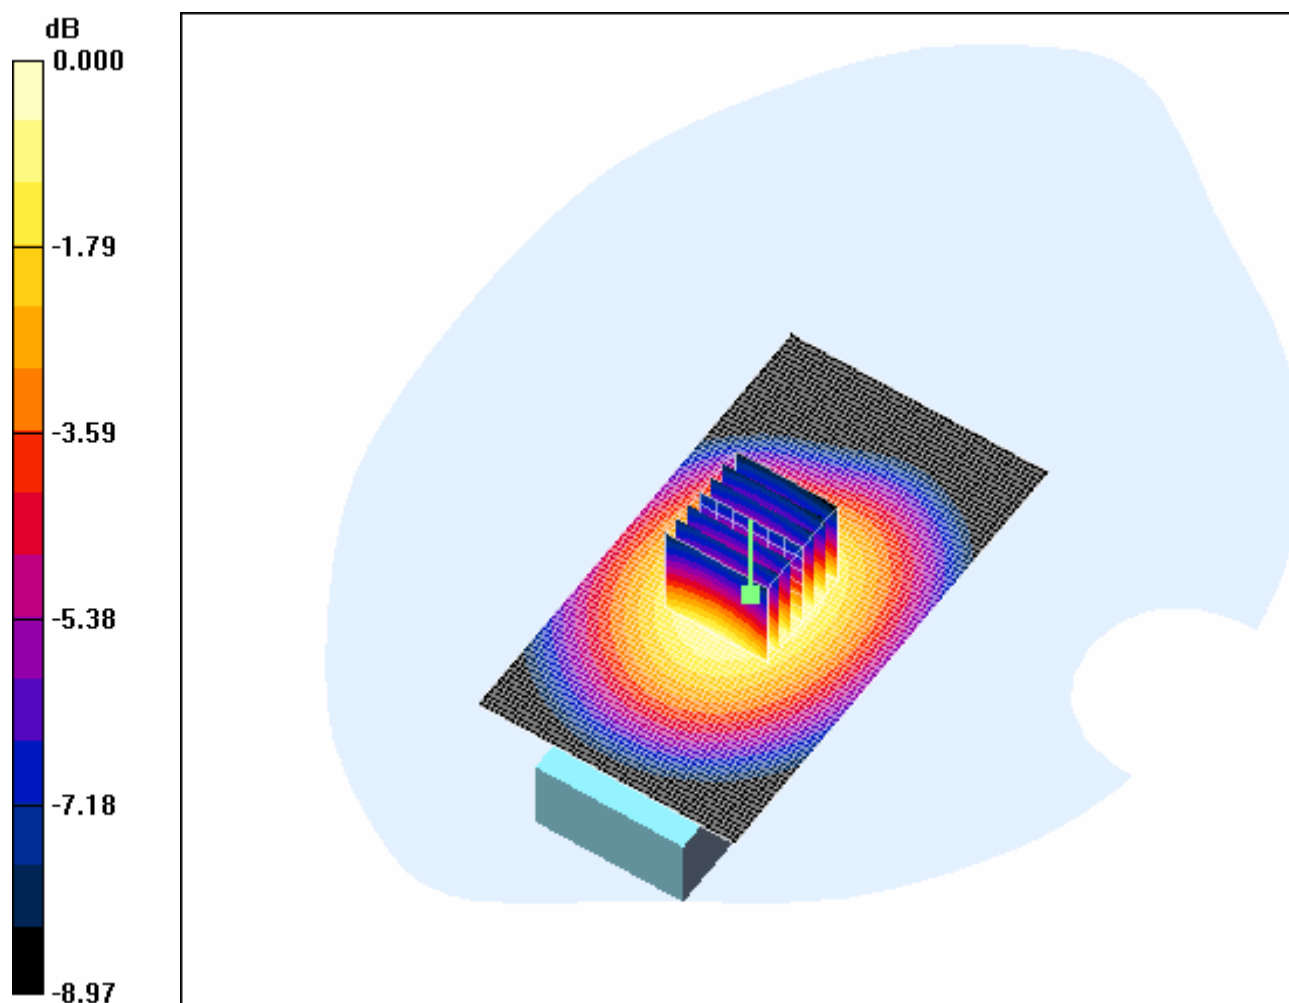

0 dB = 1.09mW/g

4.48Body-Worn-PCS1900-GPRS-Low

Date/Time: 2006-8-30 18:45:12

Test Laboratory: SGS-GSM

PCS1900-Body-Worn-Low-GPRS-2cm

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: PCS1900-GPRS Mode; Frequency: 1850.2 MHz; Duty Cycle: 1:4

Medium: 1900-Body Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.53, 4.53, 4.53); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body Worn - Low/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.420 mW/g


Body Worn - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.8 V/m; Power Drift = -0.049 dB

Peak SAR (extrapolated) = 0.587 W/kg

SAR(1 g) = 0.380 mW/g; SAR(10 g) = 0.226 mW/g

Maximum value of SAR (measured) = 0.418 mW/g

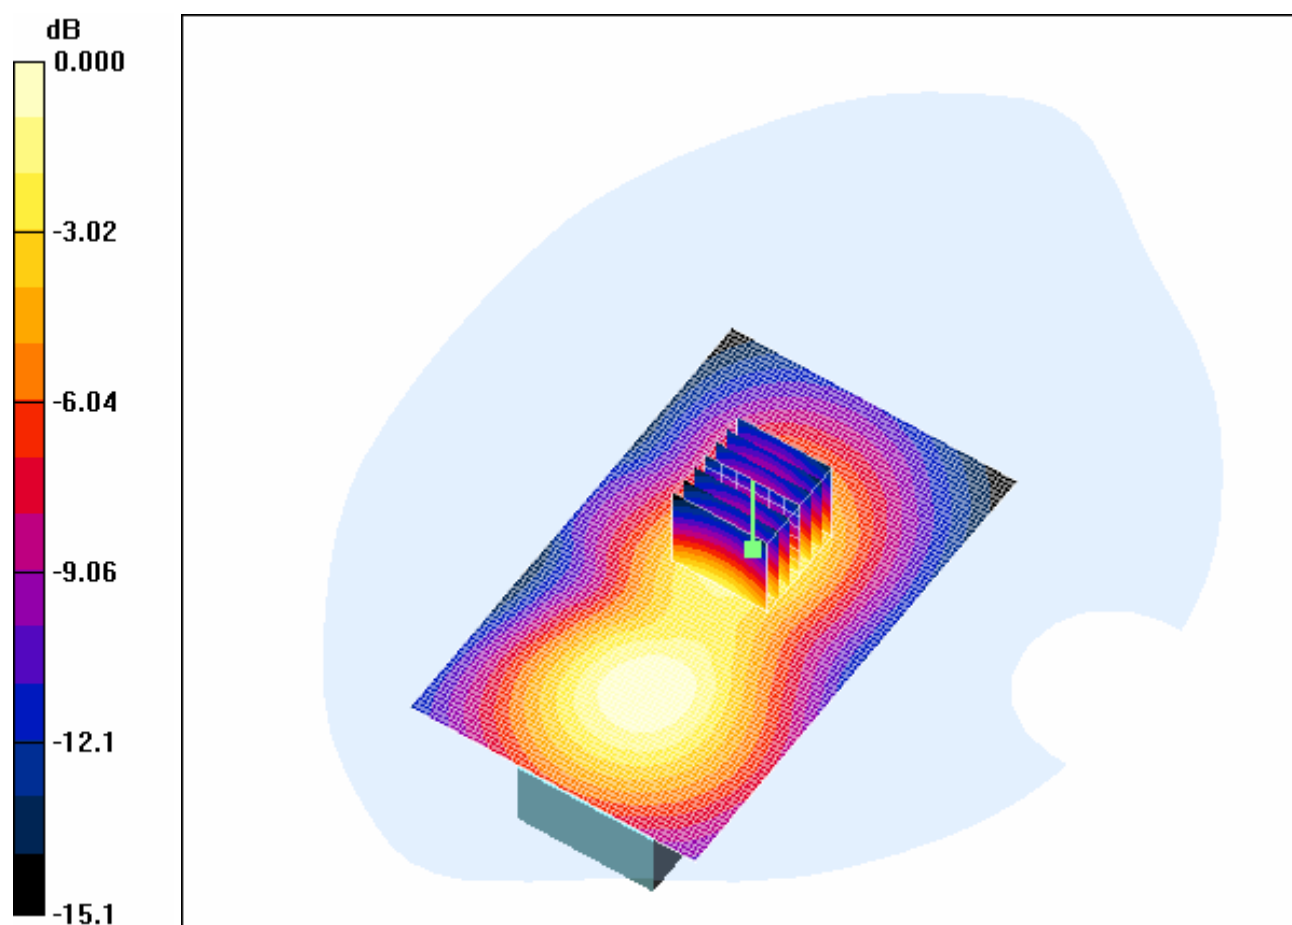

0 dB = 0.418mW/g

4.49Body-Worn-PCS1900-GPRS-Middle

Date/Time: 2006-8-30 18:21:09

Test Laboratory: SGS-GSM

PCS1900-Body-Worn-Middle-GPRS-2cm

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: PCS1900-GPRS Mode; Frequency: 1880 MHz;Duty Cycle: 1:4

Medium: 1900-Body Medium parameters used: $f = 1880$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 53.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.53, 4.53, 4.53); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body Worn - Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.641 mW/g


Body Worn - Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.6 V/m; Power Drift = -0.044 dB

Peak SAR (extrapolated) = 0.899 W/kg

SAR(1 g) = 0.575 mW/g; SAR(10 g) = 0.340 mW/g

Maximum value of SAR (measured) = 0.625 mW/g

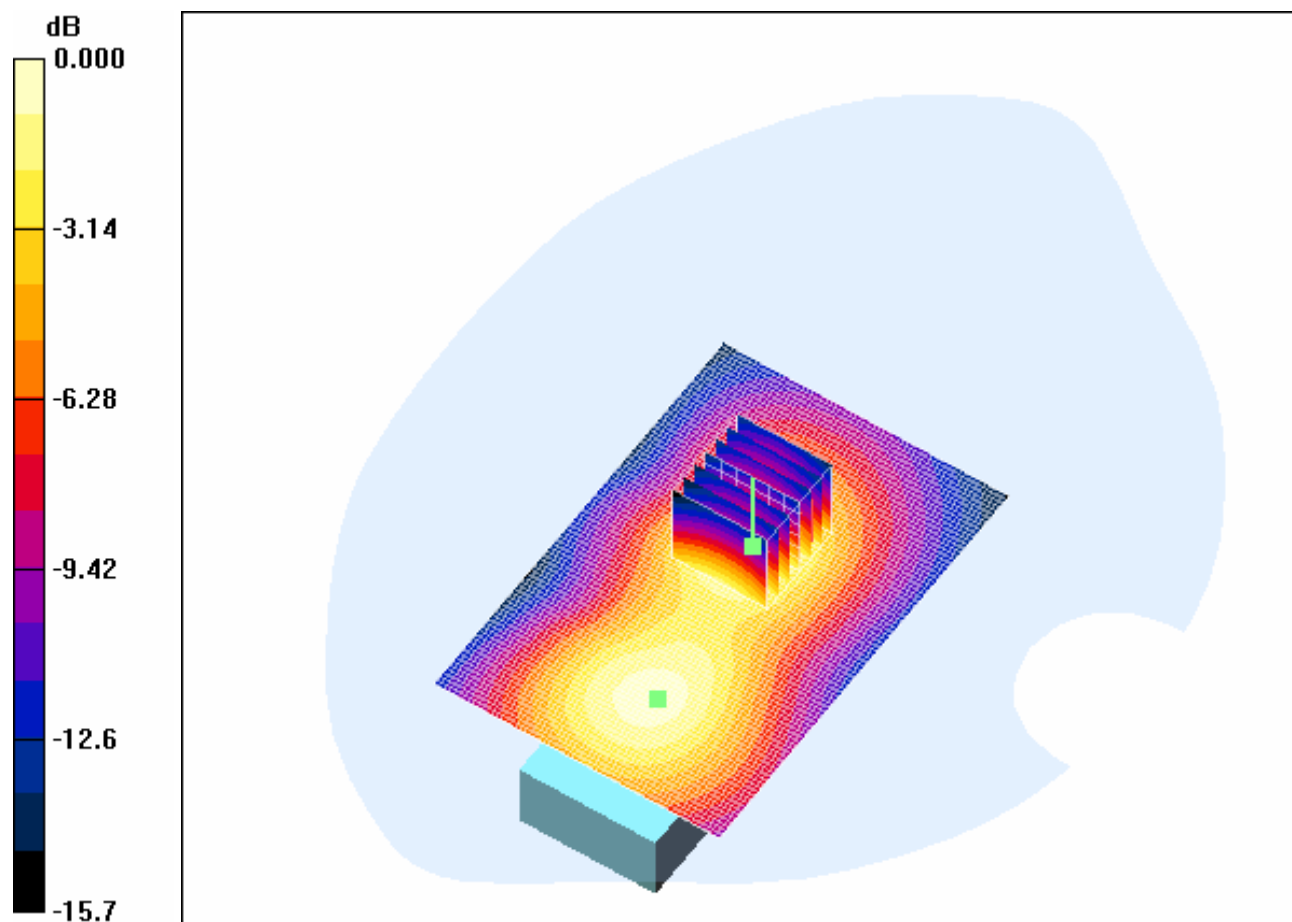

0 dB = 0.625mW/g

4.50Body-Worn-PCS1900-GPRS-High

Date/Time: 2006-8-30 19:12:22

Test Laboratory: SGS-GSM

PCS1900-Body-Worn-High-GPRS-2cm

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: PCS1900-GPRS Mode; Frequency: 1909.8 MHz; Duty Cycle: 1:4

Medium: 1900-Body Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.59$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.53, 4.53, 4.53); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body Worn - High/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.768 mW/g


Body Worn - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.8 V/m; Power Drift = -0.077 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.701 mW/g; SAR(10 g) = 0.407 mW/g

Maximum value of SAR (measured) = 0.767 mW/g

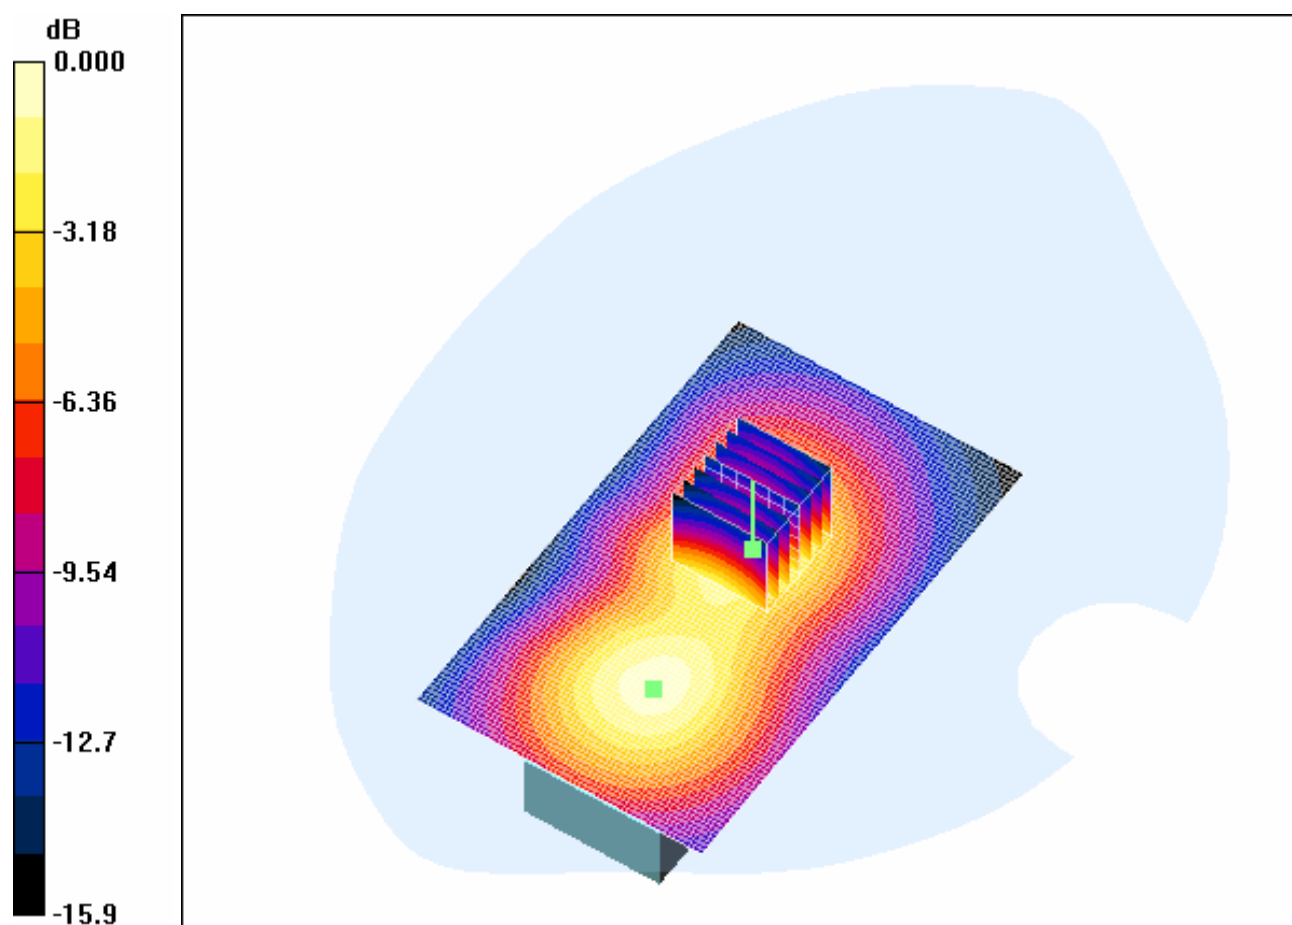

0 dB = 0.767mW/g

4.51 Maximum Value With Battery2

Date/Time: 2006-8-30 20:04:49

Test Laboratory: SGS-GSM

PCS1900-Body-Worn-High-GPRS-2cm-Bat2

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: PCS1900-GPRS Mode; Frequency: 1909.8 MHz; Duty Cycle: 1:4

Medium: 1900-Body Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.59$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.53, 4.53, 4.53); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body Worn - High Bat2/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.752 mW/g


Body Worn - High Bat2/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.2 V/m; Power Drift = 0.009 dB

Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.682 mW/g; SAR(10 g) = 0.399 mW/g

Maximum value of SAR (measured) = 0.753 mW/g

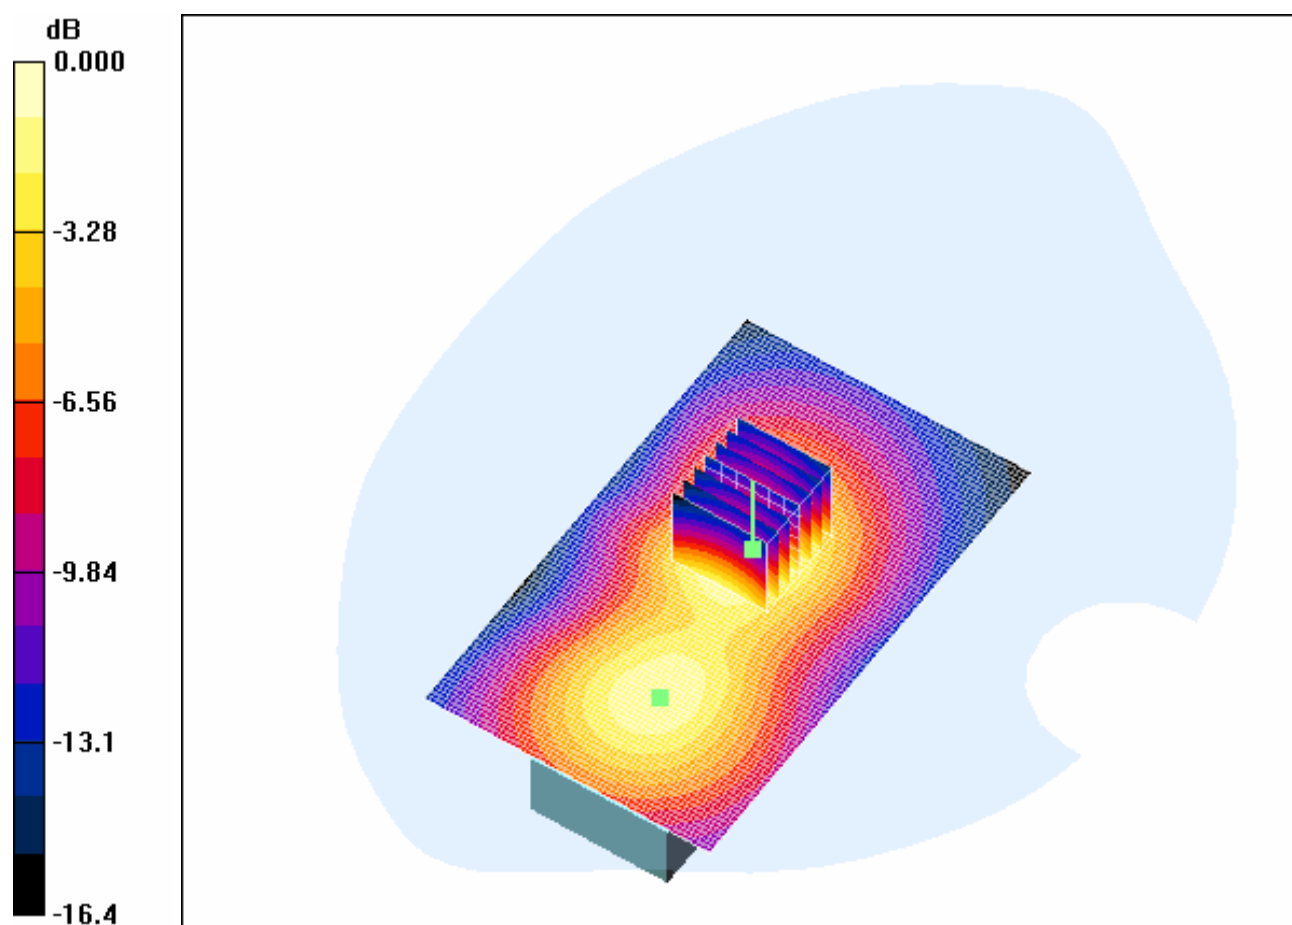

0 dB = 0.753mW/g

4.52 Body-Worn-WiFi802.11b-Low

Date/Time: 2006-9-1 14:33:27

Test Laboratory: SGS-GSM

WiFi2450-Body-Worn-Back-Low-2cm

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: WiFi(2450); Frequency: 2412 MHz;Duty Cycle: 1:1

Medium: MSL2450-Body Medium parameters used: $f = 2412$ MHz; $\sigma = 1.92$ mho/m; $\epsilon_r = 52$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.53, 4.53, 4.53); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body Worn - Low(Back,5.5M)/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.077 mW/g


Body Worn - Low(Back,5.5M)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.57 V/m; Power Drift = -0.052 dB

Peak SAR (extrapolated) = 0.138 W/kg

SAR(1 g) = 0.072 mW/g; SAR(10 g) = 0.042 mW/g

Maximum value of SAR (measured) = 0.076 mW/g

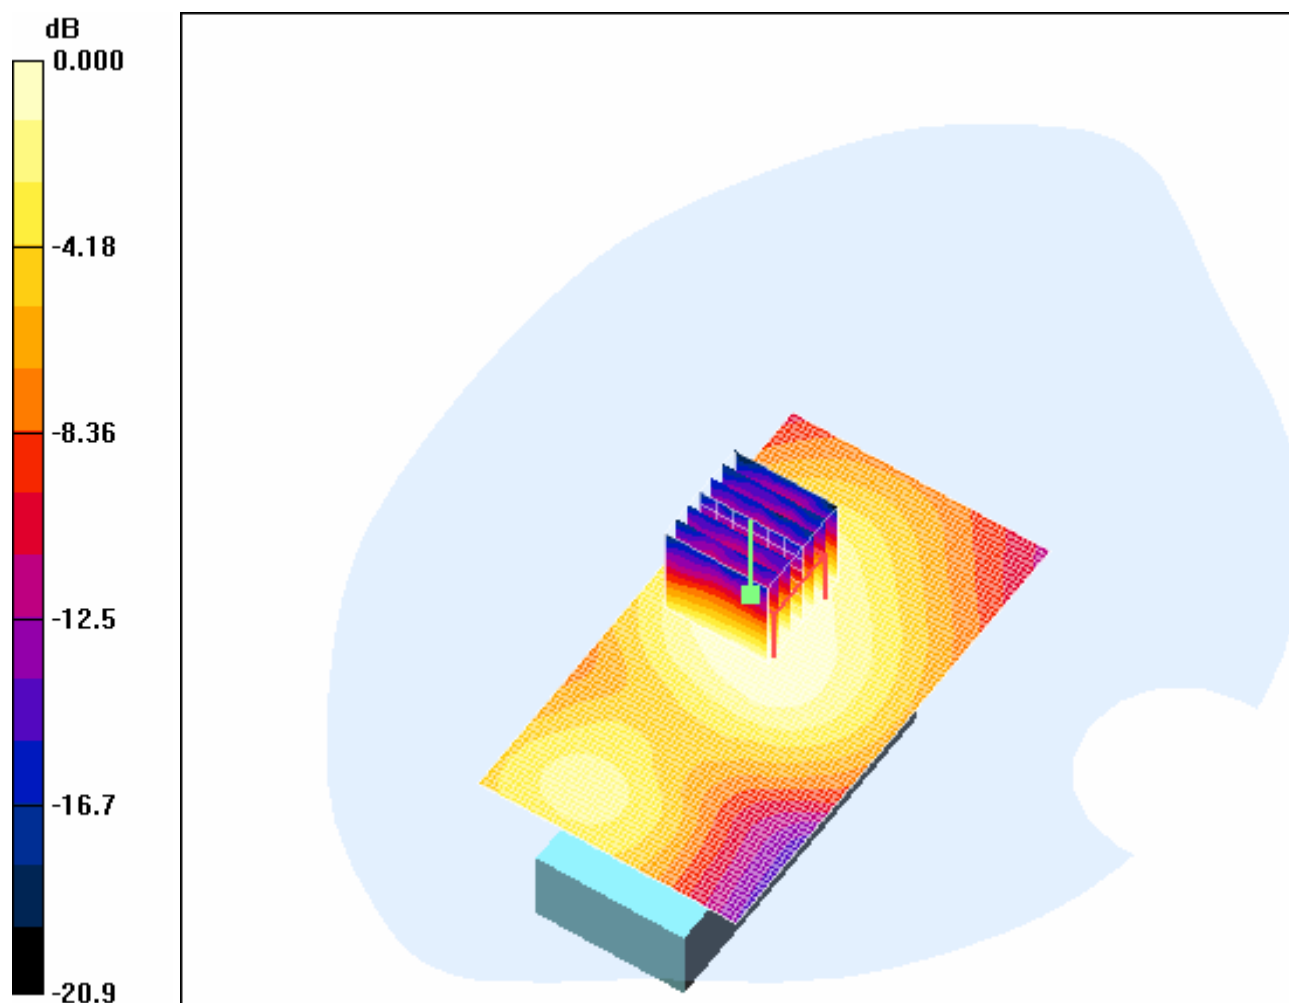

0 dB = 0.076mW/g

4.53 Body-Worn-WiFi802.11b-Middle

Date/Time: 2006-9-1 12:42:31

Test Laboratory: SGS-GSM

WiFi2450-Body-Worn-Back-Middle-2cm

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: WiFi(2450); Frequency: 2437 MHz;Duty Cycle: 1:1

Medium: MSL2450-Body Medium parameters used: $f = 2437$ MHz; $\sigma = 1.95$ mho/m; $\epsilon_r = 51.9$; $\rho =$

1000 kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.53, 4.53, 4.53); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body Worn - Middle(Back,5.5M)/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.079 mW/g


Body Worn - Middle(Back,5.5M)/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.71 V/m; Power Drift = -0.154 dB

Peak SAR (extrapolated) = 0.143 W/kg

SAR(1 g) = 0.074 mW/g; SAR(10 g) = 0.043 mW/g

Maximum value of SAR (measured) = 0.078 mW/g

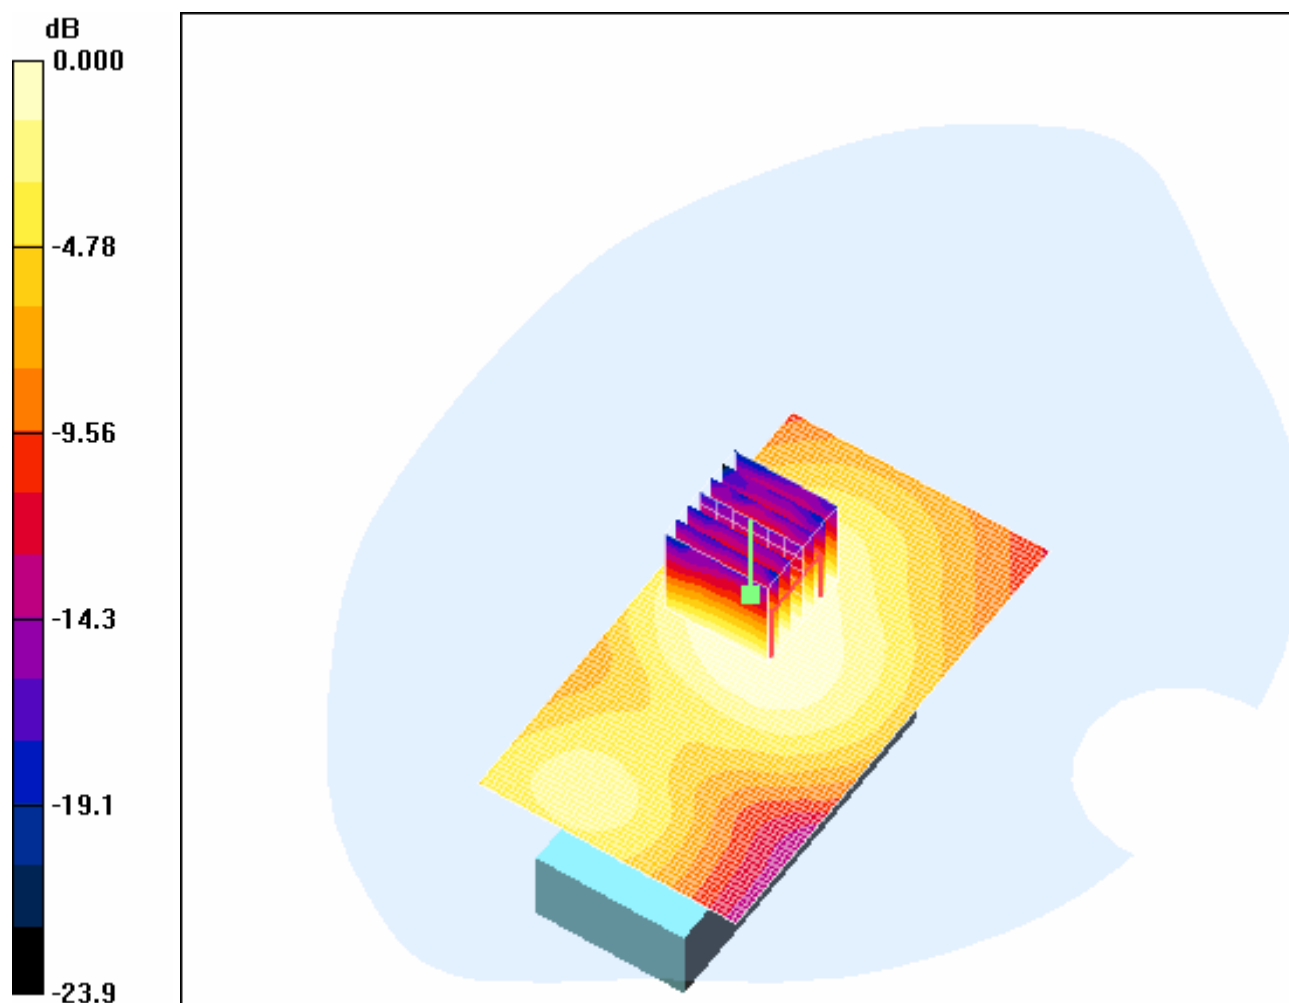

0 dB = 0.078mW/g

4.54Body-Worn-WiFi802.11b-High

Date/Time: 2006-9-1 15:10:08

Test Laboratory: SGS-GSM

WiFi2450-Body-Worn-Back-High-2cm

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: WiFi(2450); Frequency: 2462 MHz;Duty Cycle: 1:1

Medium: MSL2450-Body Medium parameters used: $f = 2462$ MHz; $\sigma = 1.99$ mho/m; $\epsilon_r = 51.9$; $\rho =$

1000 kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.53, 4.53, 4.53); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body Worn - High/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.077 mW/g


Body Worn - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.55 V/m; Power Drift = 0.101 dB

Peak SAR (extrapolated) = 0.126 W/kg

SAR(1 g) = 0.070 mW/g; SAR(10 g) = 0.040 mW/g

Maximum value of SAR (measured) = 0.075 mW/g

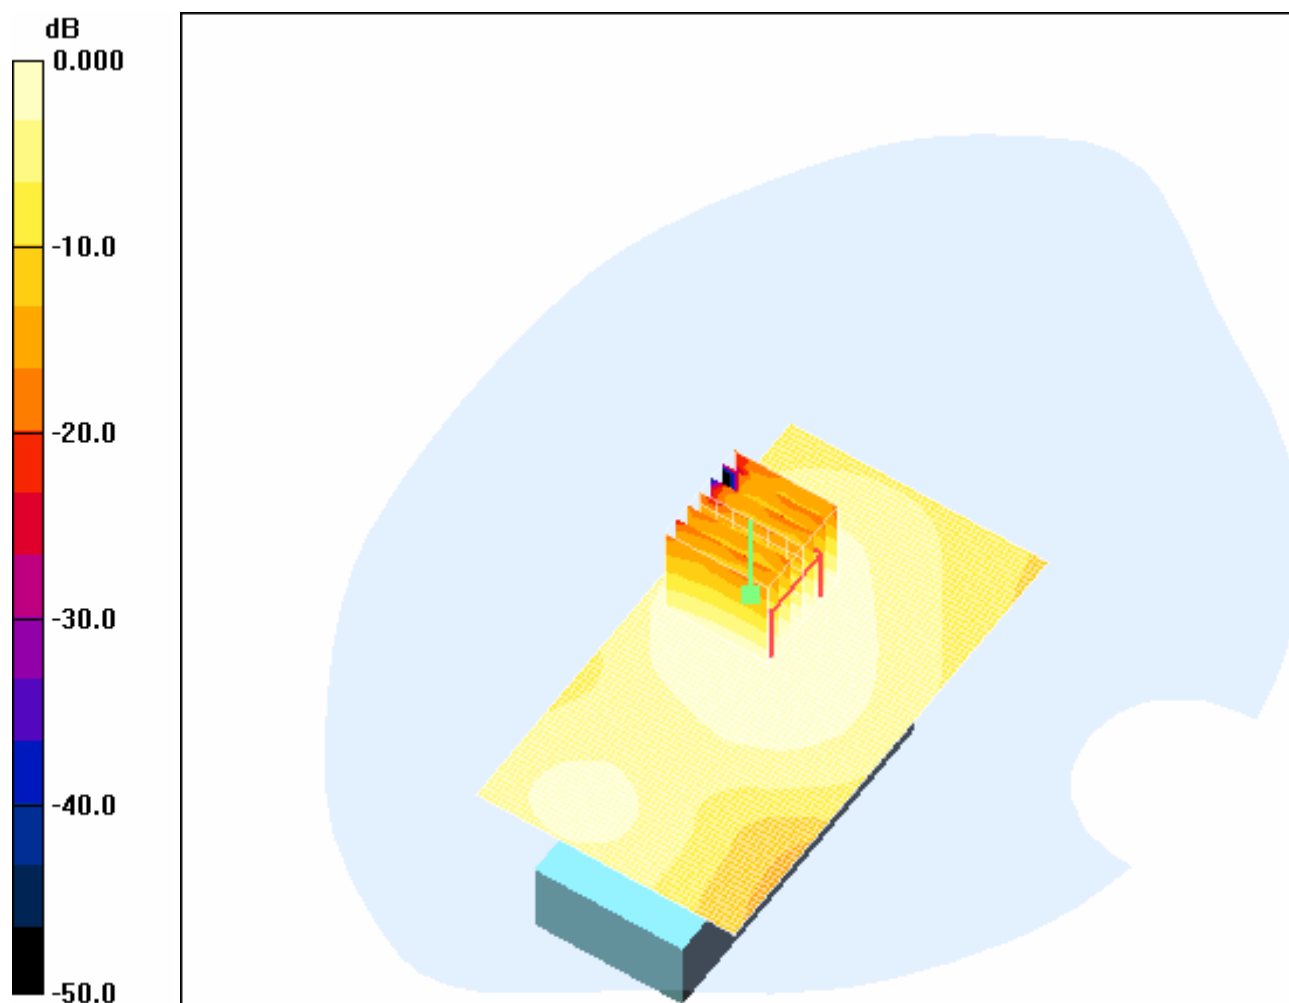

0 dB = 0.075mW/g

4.55 Maximum Value With Battery2

Date/Time: 2006-9-1 16:43:55

Test Laboratory: SGS-GSM

WiFi2450-Body-Worn-Back-Middle-2cm-Bat2

DUT: GSM10035468AH; Type: Head; Serial: 35287400000002-8

Communication System: WiFi(2450); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: MSL2450-Body Medium parameters used: $f = 2437$ MHz; $\sigma = 1.95$ mho/m; $\epsilon_r = 51.9$; $\rho =$

1000 kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.53, 4.53, 4.53); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2005-11-17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body Worn - Middle(Back,5.5M,Bat 2) 2/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.079 mW/g


Body Worn - Middle(Back,5.5M,Bat 2) 2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.66 V/m; Power Drift = 0.029 dB

Peak SAR (extrapolated) = 0.142 W/kg

SAR(1 g) = 0.074 mW/g; SAR(10 g) = 0.043 mW/g

Maximum value of SAR (measured) = 0.078 mW/g

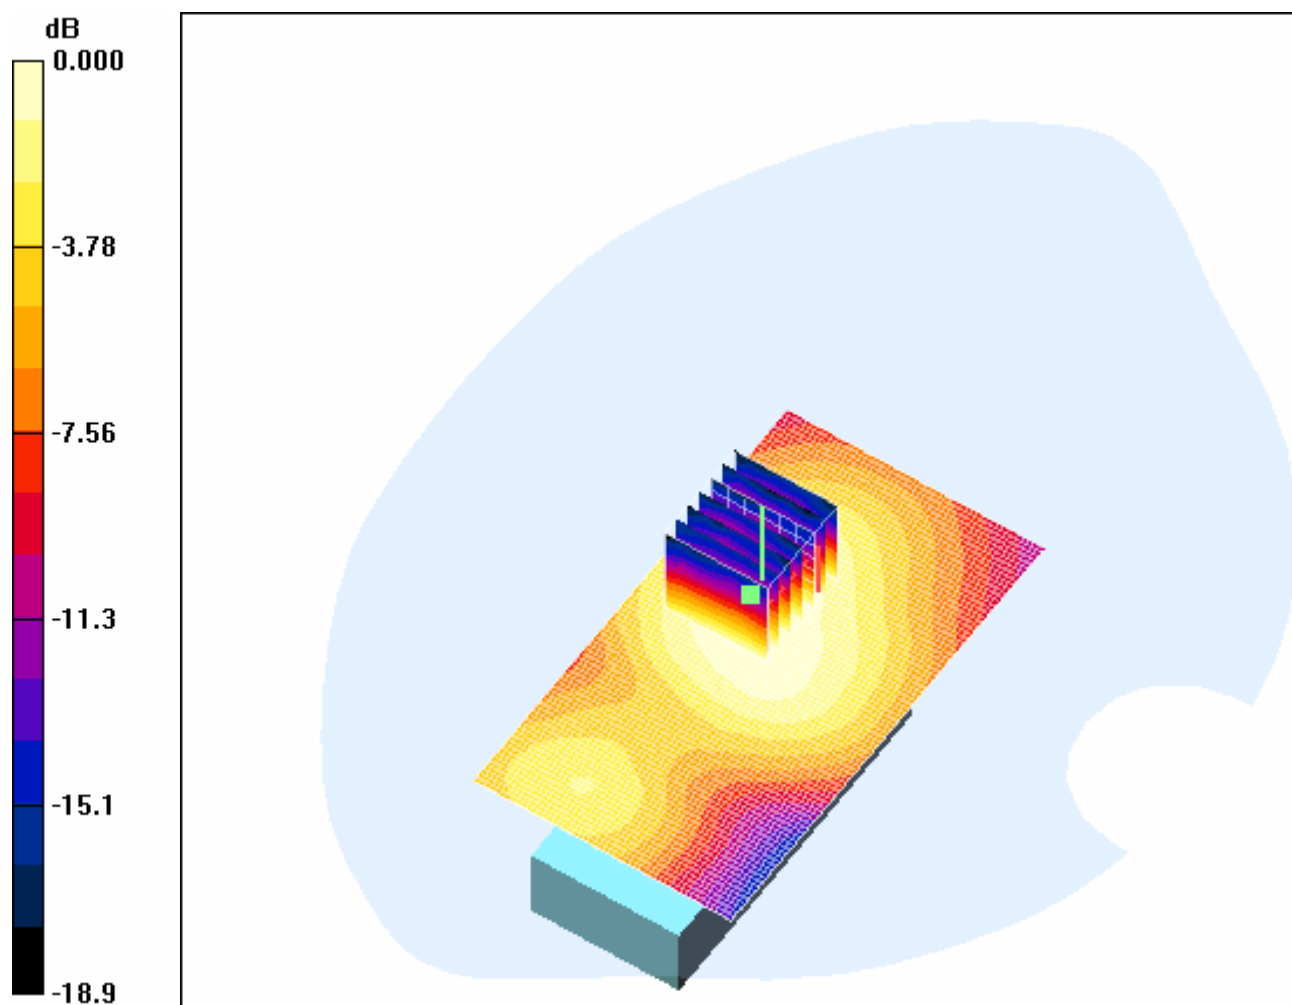

0 dB = 0.078mW/g

Appendix

1. Photographs of Test Setup

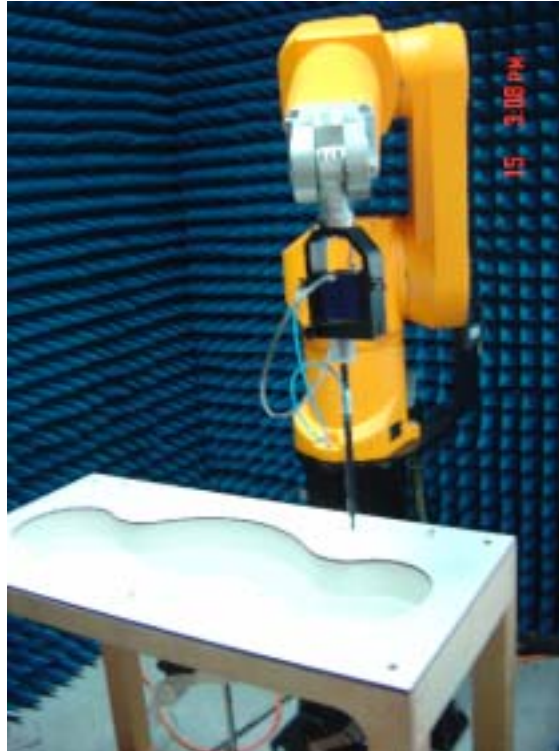


Fig.1 Photograph of the SAR measurement System

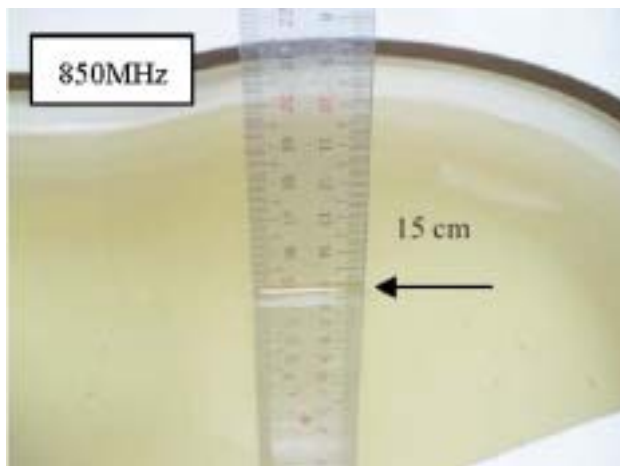


Fig.2 Photograph of the Tissue Simulant
Fluid Liquid depth 15cm
for Left-Head Side



Fig.3 Photograph of the Tissue Simulant
Liquid depth 15cm for Body-Worn

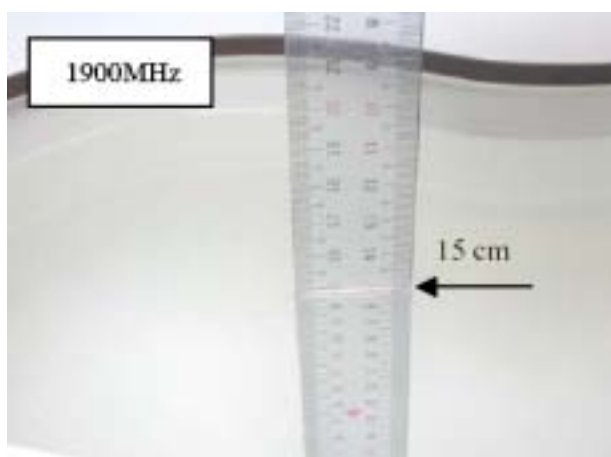


Fig.4 Photograph of the Tissue Simulant Fluid Liquid depth 15cm for Right-Head Side

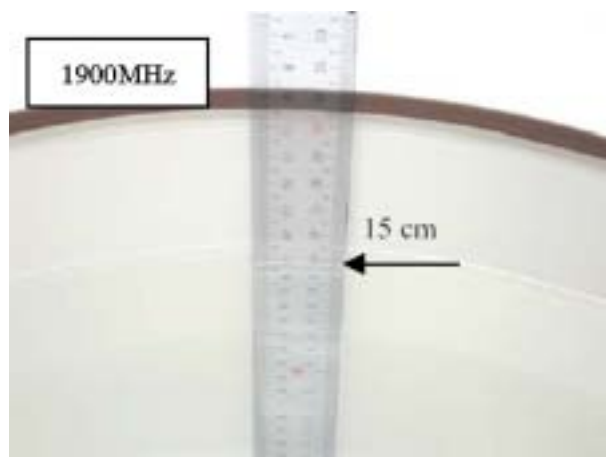


Fig.5 Photograph of the Tissue Simulant Liquid depth 15cm for Body-Worn

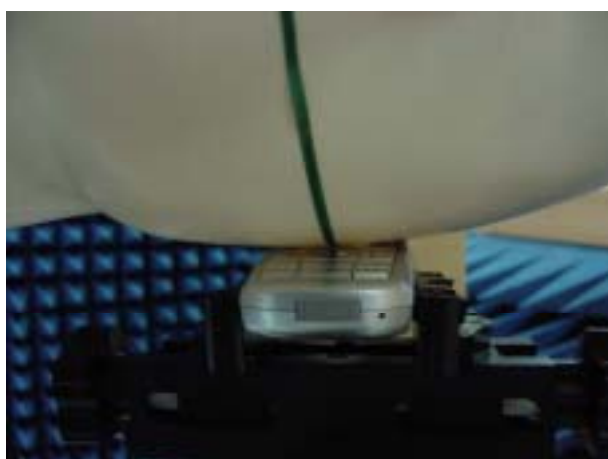


Fig.6 Photograph of the Left Hand Side Cheek status



Fig.7 Photograph of the Left Hand Side Tilt status

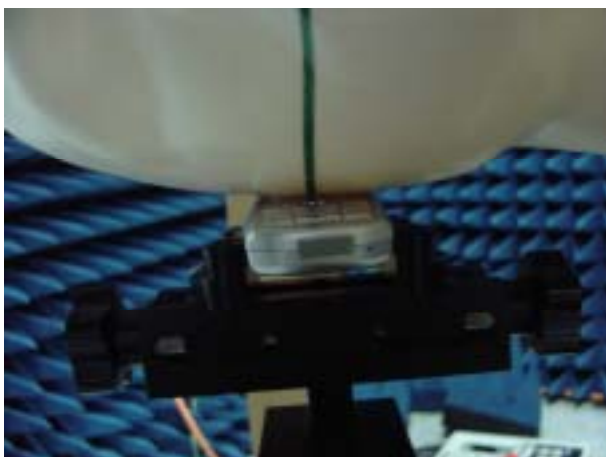


Fig.8 Photograph of the Right Hand Side Cheek status



Fig.9 Photograph of the Right Hand Side Tilt status

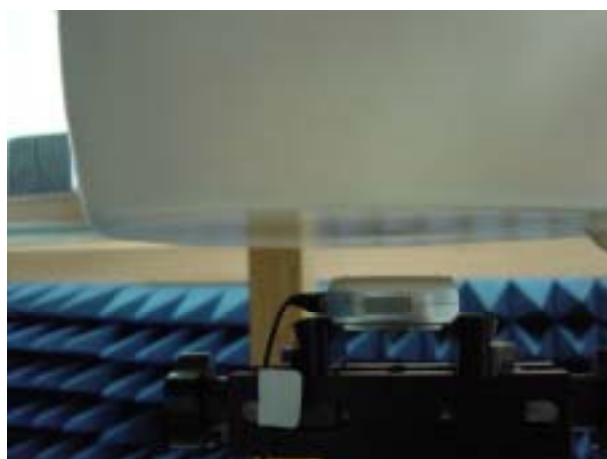


Fig.10 Photograph of the BodyWorn status

2. Photographs of the EUT



Fig.11 Front View



Fig.12 Back View

3. *Antenna Location*

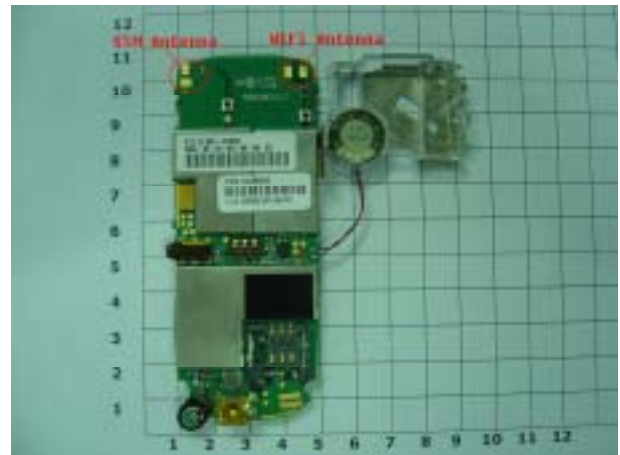
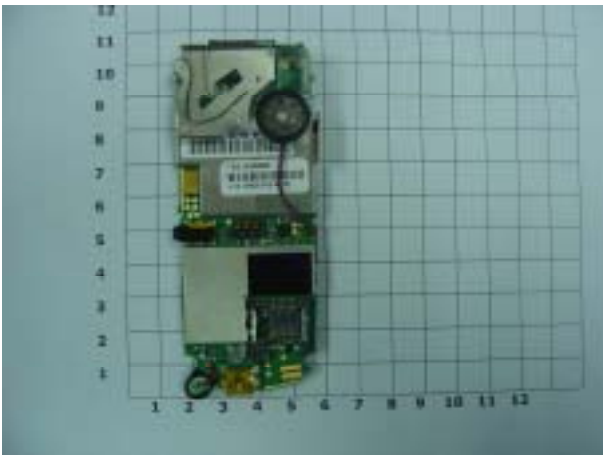


Fig.13 Antenna locations relative to chassis/housing

4. *Photographs of the battery*



Fig.14 Front and Back view of battery1



Fig.15 Front and Back view of battery2

5. *Photograph of the charger*



Fig.16 Charger

6. Probe Calibration certificate

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client: **SGS-CSTS (MTT)**

Certificate No: **ES3-3088_Sep05**

CALIBRATION CERTIFICATE

Object: **ES3DV3 - SN:3088**

Calibration procedure(s): **QA CAL-01.v5**
Calibration procedure for dosimetric E-field probes

Calibration date: **September 13, 2005**

Condition of the calibrated item: **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 75\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	0B41293874	3-May-05 (METAS, No. 251-00486)	May-06
Power sensor E4412A	MY41485277	3-May-05 (METAS, No. 251-00486)	May-06
Power sensor E4412A	MY41485087	3-May-05 (METAS, No. 251-00486)	May-06
Reference 3 dB Attenuator	SN: S5054 (30)	11-Aug-05 (METAS, No. 251-00486)	Aug-06
Reference 20 dB Attenuator	SN: S5066 (20b)	3-May-05 (METAS, No. 251-00487)	May-06
Reference 30 dB Attenuator	SN: S5129 (30b)	11-Aug-05 (METAS, No. 251-00500)	Aug-06
Reference Probe ES3DV2	SN: 3013	7-Jan-05 (SPEAG, No. ES3-3013_Jan05)	Jan-06
DAE4	SN: 654	29-Nov-04 (SPEAG, No. DAE4-654_Nov04)	Nov-05

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642UD1700	4-Aug-09 (SPEAG, in house check Dec-03)	In house check: Dec-05
Network Analyzer HP 8753C	US37300585	18-Oct-01 (SPEAG, in house check Nov-04)	In house check: Nov-05

	Name	Function	Signature
Calibrated by:	Nico Vellari	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: September 15, 2005

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 106**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
Polarization ϕ	ϕ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz), July 2001

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\theta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCPx,y,z**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical Isotropy (3D deviation from isotropy)**: In a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

ES3DV3 SN:3088

September 13, 2005

Probe ES3DV3

SN:3088

Manufactured:	July 20, 2005
Calibrated:	September 13, 2005

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

ES3DV3 SN:3088

September 13, 2005

DASY - Parameters of Probe: ES3DV3 SN:3088**Sensitivity in Free Space^A****Diode Compression^B**

NormX	1.32 ± 10.1%	$\mu V/(V/m)^2$	DCP X	95 mV
NormY	1.24 ± 10.1%	$\mu V/(V/m)^2$	DCP Y	95 mV
NormZ	1.23 ± 10.1%	$\mu V/(V/m)^2$	DCP Z	95 mV

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

Boundary Effect

TSL 900 MHz Typical SAR gradient: 5 % per mm

Sensor Center to Phantom Surface Distance		3.0 mm	4.0 mm
SAR _{iso} [%]	Without Correction Algorithm	5.8	2.7
SAR _{iso} [%]	With Correction Algorithm	0.0	0.1

TSL 1750 MHz Typical SAR gradient: 10 % per mm

Sensor Center to Phantom Surface Distance		3.0 mm	4.0 mm
SAR _{iso} [%]	Without Correction Algorithm	7.6	4.5
SAR _{iso} [%]	With Correction Algorithm	0.1	0.2

Sensor Offset

Probe Tip to Sensor Center 2.0 mm

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.


^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Page 8).^B Numerical linearization parameter: uncertainty not required.

ES3DV3 SN:3088

September 13, 2005

Frequency Response of E-Field

(TEM-Cell: 01110 EXX, Waveguide: R22)

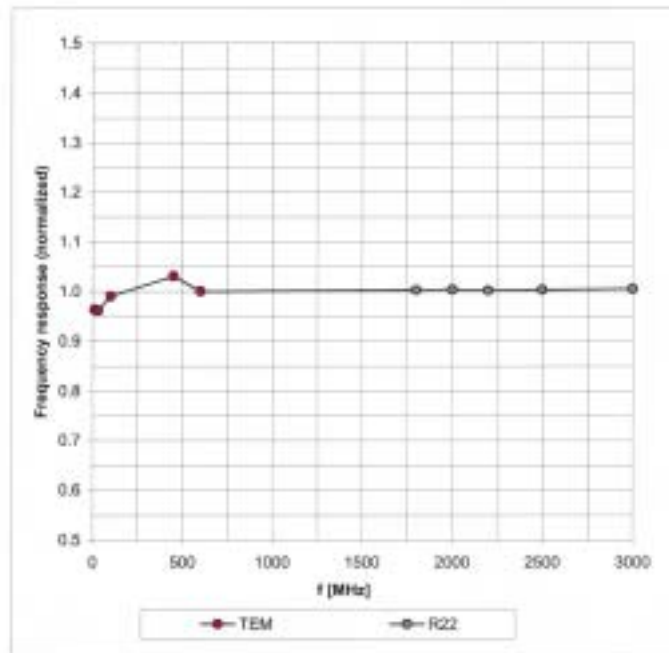


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

ES3DV3 SN:3088

September 13, 2005

Receiving Pattern (ϕ), $\theta = 0^\circ$

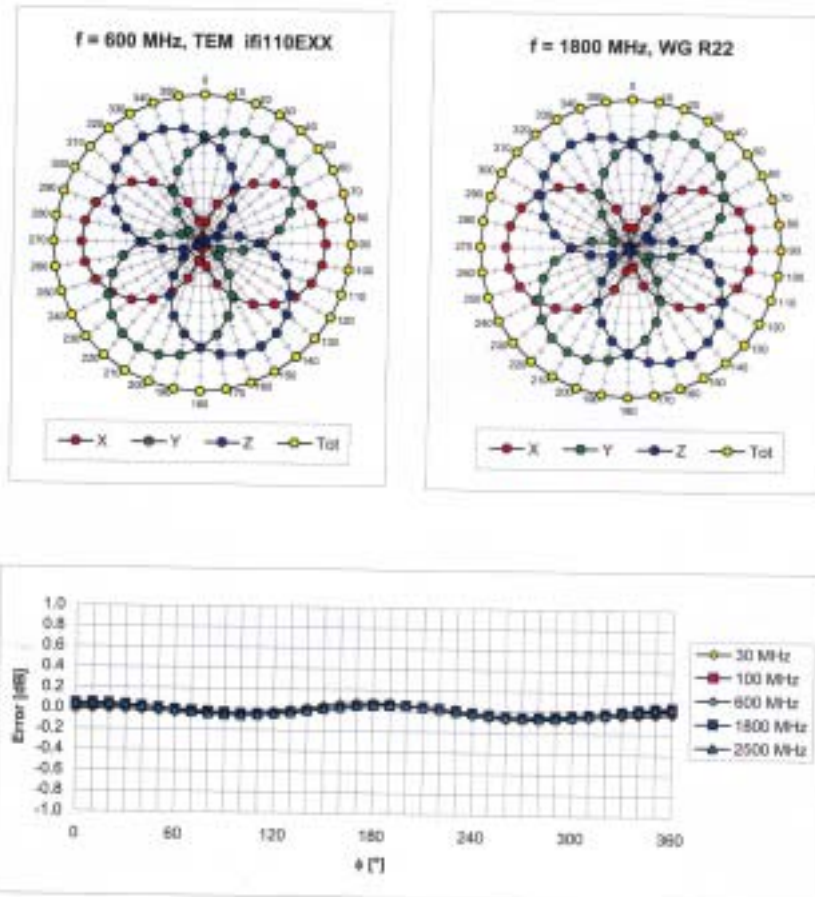


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

ES3DV3 SN:3088

September 13, 2005

Dynamic Range $f(\text{SAR}_{\text{head}})$
(Waveguide R22, $f = 1800 \text{ MHz}$)

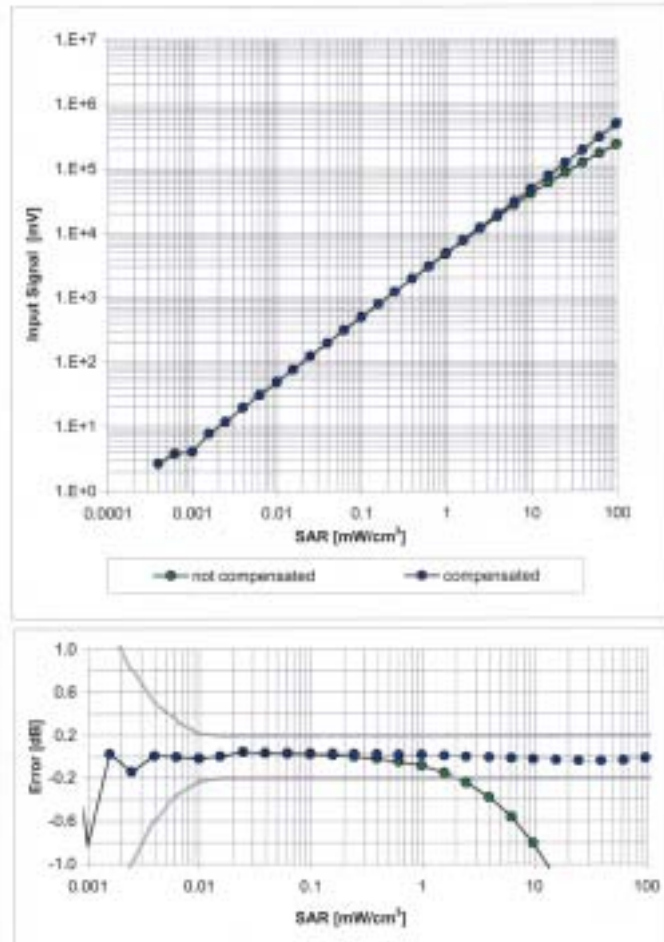


Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

ES3DV3 SN:3088

September 13, 2005

Conversion Factor Assessment

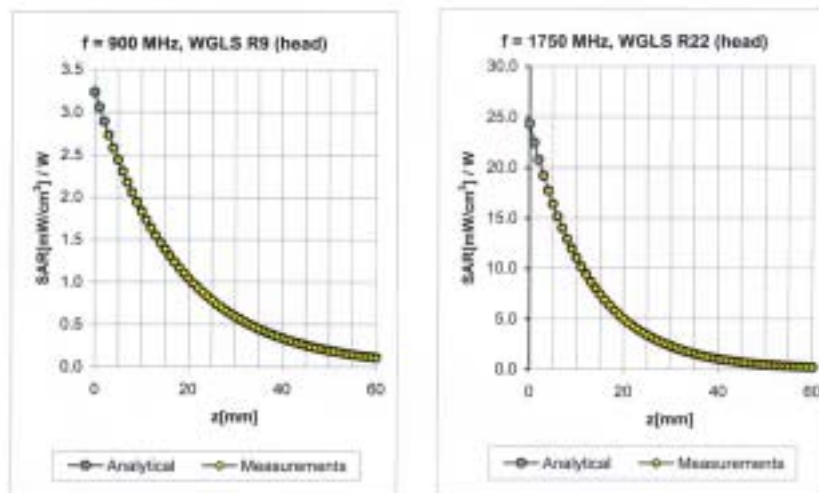

f [MHz]	Validity [MHz] ²	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	0.47	1.40	5.91 ± 11.0% (k=2)
1750	± 50 / ± 100	Head	40.1 ± 5%	1.37 ± 5%	0.24	2.39	4.97 ± 11.0% (k=2)
1900	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.27	2.28	4.93 ± 11.0% (k=2)
2000	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.25	2.34	4.87 ± 11.0% (k=2)
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	0.61	1.25	5.83 ± 11.0% (k=2)
1750	± 50 / ± 100	Body	53.4 ± 5%	1.49 ± 5%	0.28	2.53	4.61 ± 11.0% (k=2)
1900	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.28	2.57	4.53 ± 11.0% (k=2)
2000	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.32	2.11	4.47 ± 11.0% (k=2)


² The validity of a 100 MHz only applies for DASV v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

ES3DV3 SN:3088

September 13, 2005

Deviation from Isotropy in HSL

Error (ϕ , θ), $f = 900$ MHz

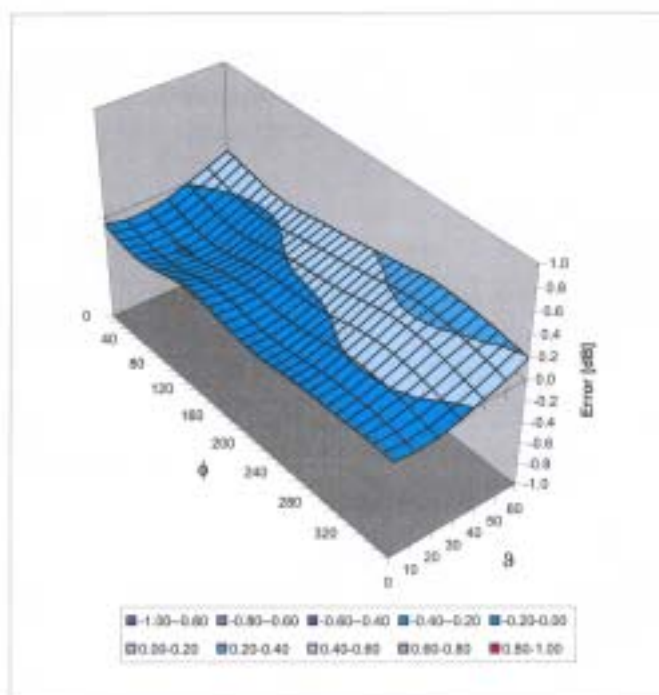

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)

6. Uncertainty analysis

Error Description	Tol. (± %)	Prob. dist.	Div.	(c _i) (1g)	(c _i) (10g)	Std. unc. (± %)		(v _i)
Measurement System								
Probe Calibration	4.8	N	1	1	1	4.8	4.8	∞
Axial Isotropy	4.7	R	√3	1	1	2.7	2.7	∞
Hemispherical Isotropy	0	R	√3	1	1	0	0	∞
Boundary Effects	1.0	R	√3	1	1	0.6	0.6	∞
Linearity	4.7	R	√3	1	1	2.7	2.7	∞
System Detection Limit	1.0	R	√3	1	1	0.6	0.6	∞
Readout Electronics	1.0	N	1	1	1	1.0	1.0	∞
Response Time	0	R	√3	1	1	0	0	∞
Integration Time	0	R	√3	1	1	0	0	∞
RF Ambient Conditions	3.0	R	√3	1	1	1.7	1.7	∞
Probe Positioner	0.4	R	√3	1	1	0.2	0.2	∞
Probe Positioning	2.9	R	√3	1	1	1.7	1.7	∞
Algorithms for Max. SAR Eval.	1.0	R	√3	1	1	0.6	0.6	∞
Dipole								
Dipole Axis to Liquid Distance	2.0	R	√3	1	1	1.2	1.2	∞
Input power and SAR drift meas.	4.7	R	√3	1	1	2.7	2.7	∞
Phantom and Tissue Param.								
Phantom Uncertainty	4.0	R	√3	1	1	2.3	2.3	∞
Liquid Conductivity (target)	5.0	R.	√3	0.64	0.43	1.8	1.2	∞
Liquid Conductivity (meas.)	2.5	N	1	0.64	0.43	1.6	1.1	∞
Liquid Permittivity (target)	5.0	R	√3	0.6	0.49	1.7	1.4	∞
Liquid Permittivity (meas.)	2.5	N	1	0.6	0.49	1.5	1.2	∞
Combined Standard Uncertainty						8.4	8.1	∞
Coverage Factor for 95%		kp=2						
Expanded Uncertainty						16.8	16.2	

Dasy4 Uncertainty Budget

7. Phantom description

**Schmid & Partner
Engineering AG**

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

Certificate of conformity / First Article Inspection

Item	SAM Twin Phantom V4.0
Type No	QD 000 P40 CA
Series No	TP-1150 and higher
Manufacturer / Origin	Untersee Composites Hauptstr. 69 CH-8559 Frutzwilen Switzerland

Tests

The series production process used allows the limitation to test of first articles. Complete tests were made on the pre-series Type No. QD 000 P40 AA, Serial No. TP-1001 and on the series first article Type No. QD 000 P40 BA, Serial No. TP-1006. Certain parameters have been retested using further series units (called samples).

Test	Requirement	Details	Units tested
Shape	Compliance with the geometry according to the CAD model.	ITIS CAD File (*)	First article, Samples
Material thickness	Compliant with the requirements according to the standards	2mm +/- 0.2mm in specific areas	First article, Samples
Material parameters	Dielectric parameters for required frequencies	200 MHz - 3 GHz Relative permittivity < 5 Loss tangent < 0.05	Material sample TP 104-5
Material resistivity	The material has been tested to be compatible with the liquids defined in the standards	Liquid type HSL 1800 and others according to the standard.	Pre-series, First article

Standards

- [1] CENELEC EN 50361
- [2] IEEE P1528-200x draft 6.5
- [3] IEC PT 62209 draft 0.9
- (*) The ITIS CAD file is derived from [2] and is also within the tolerance requirements of the shapes of [1] and [3].

Conformity

Based on the sample tests above, we certify that this item is in compliance with the uncertainty requirements of SAR measurements specified in standard [1] and draft standards [2] and [3].

Date

28.02.2002

Signature / Stamp

*F. Bommelt***Schmid & Partner
Engineering AG**Zeughausstrasse 43, CH-8004 Zurich
Tel. +41 1 245 97 00, Fax +41 1 245 97 79*Volker Kappeler***The end**