



2DH1_Ant1_Hop

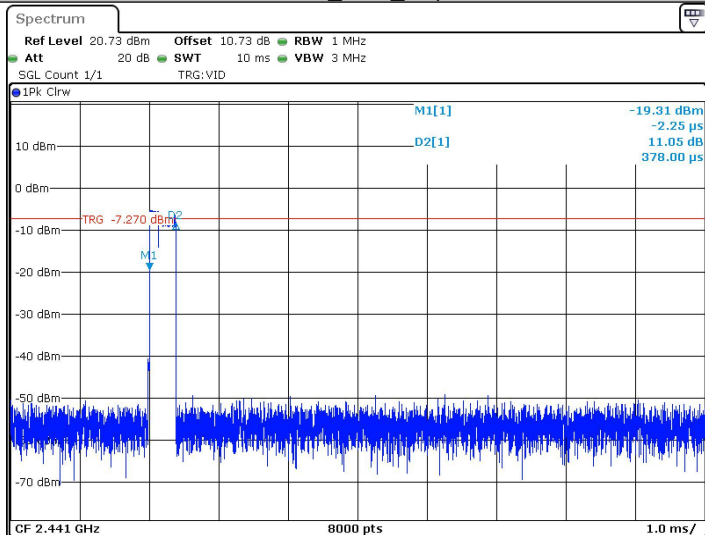


Date: 12 DEC 2023 10:20:59

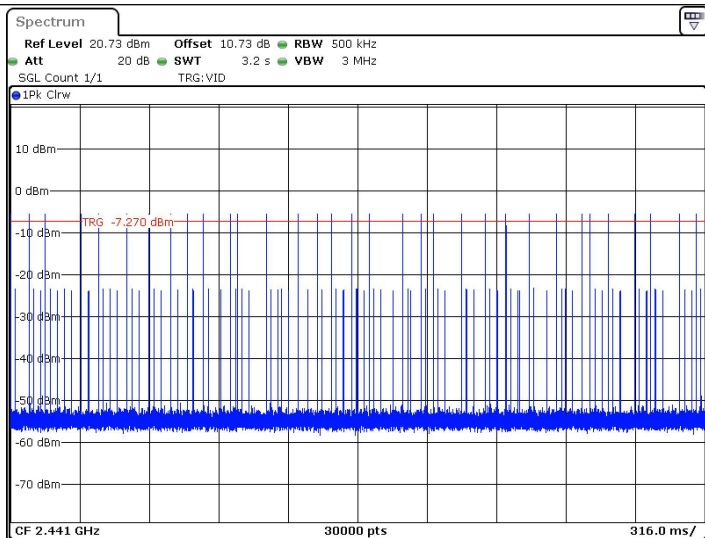


Date: 12 DEC 2023 10:21:05

2DH3_Ant1_Hop

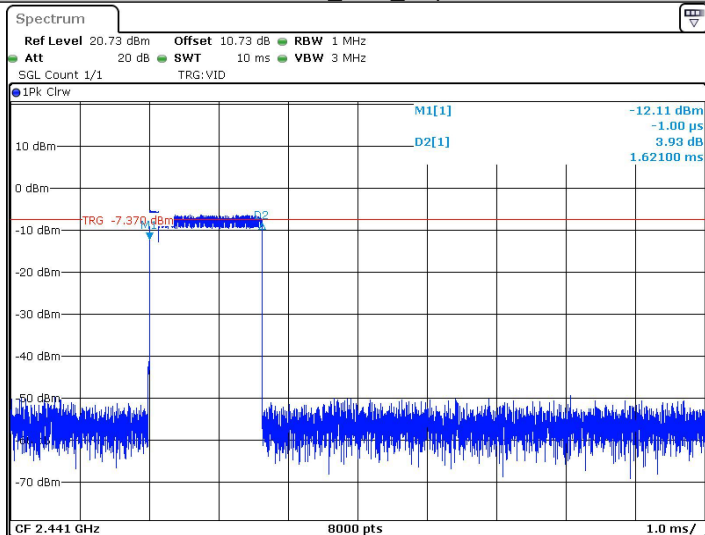


Date: 12 DEC 2023 10:22:41

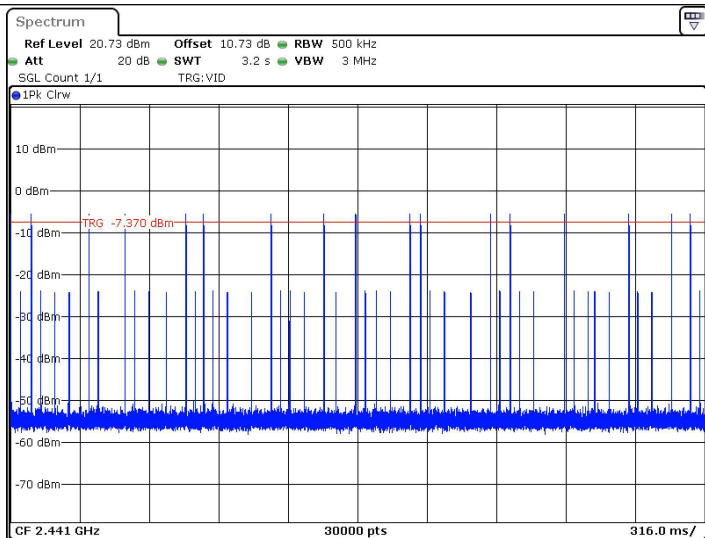


Date: 12 DEC 2023 10:22:47

2DH5_Ant1_Hop

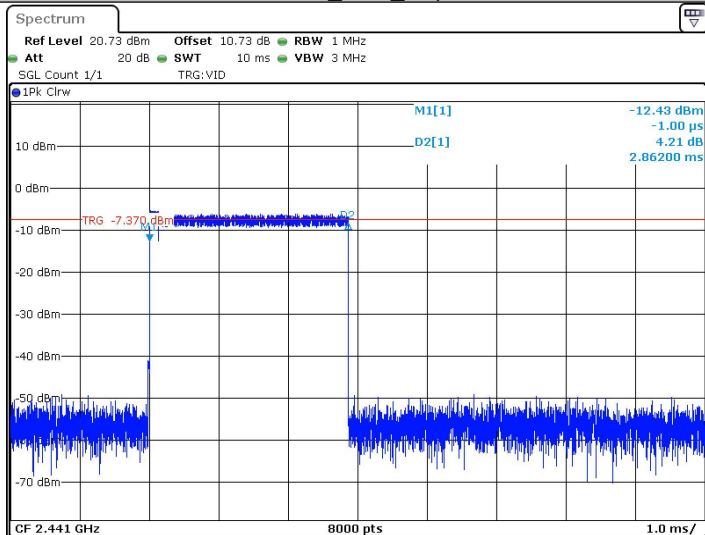


Date: 12 DEC 2023 10:18:50

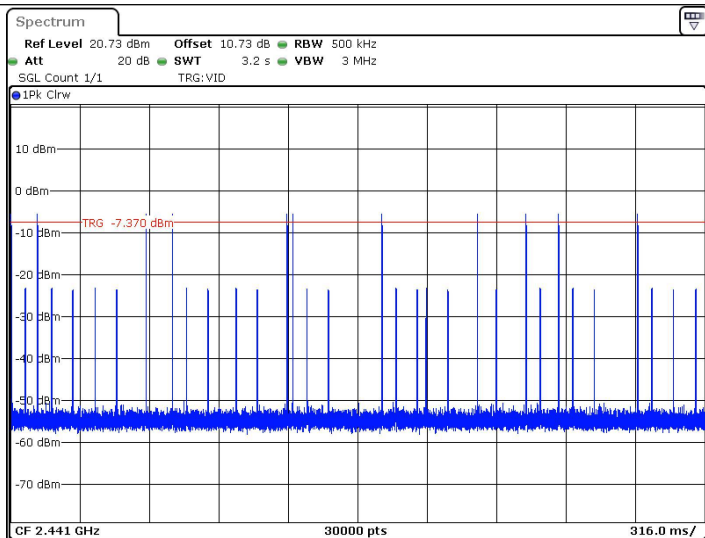

Date: 12 DEC 2023 10:18:56


4.8 Band-edge for RF Conducted Emissions

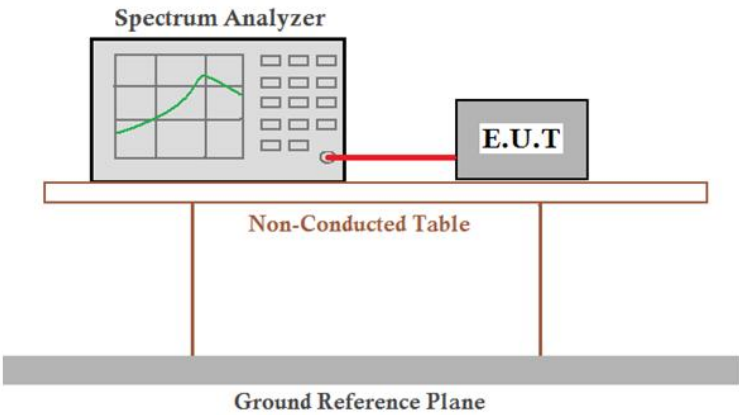Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Test Setup:	 <p><i>Remark: Offset=cable loss+ attenuation factor.</i></p>
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Exploratory Test Mode:	Hopping and Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Only the worst case is recorded in the report.
Test Results:	Pass


Measurement Data

TestMode	ChName	Freq(MHz)	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Low	2402	0.46	-53.46	≤-19.54	PASS
	High	2480	0.96	-56.76	≤-19.04	PASS
	Low	Hop_2402	-0.16	-57.89	≤-20.16	PASS
	High	Hop_2480	-5.02	-56.45	≤-25.02	PASS
2DH5	Low	2402	0.22	-54.88	≤-19.78	PASS
	High	2480	0.82	-56.2	≤-19.18	PASS
	Low	Hop_2402	-10.76	-57	≤-30.76	PASS
	High	Hop_2480	-5.19	-57.08	≤-25.19	PASS

Test plot as follows:

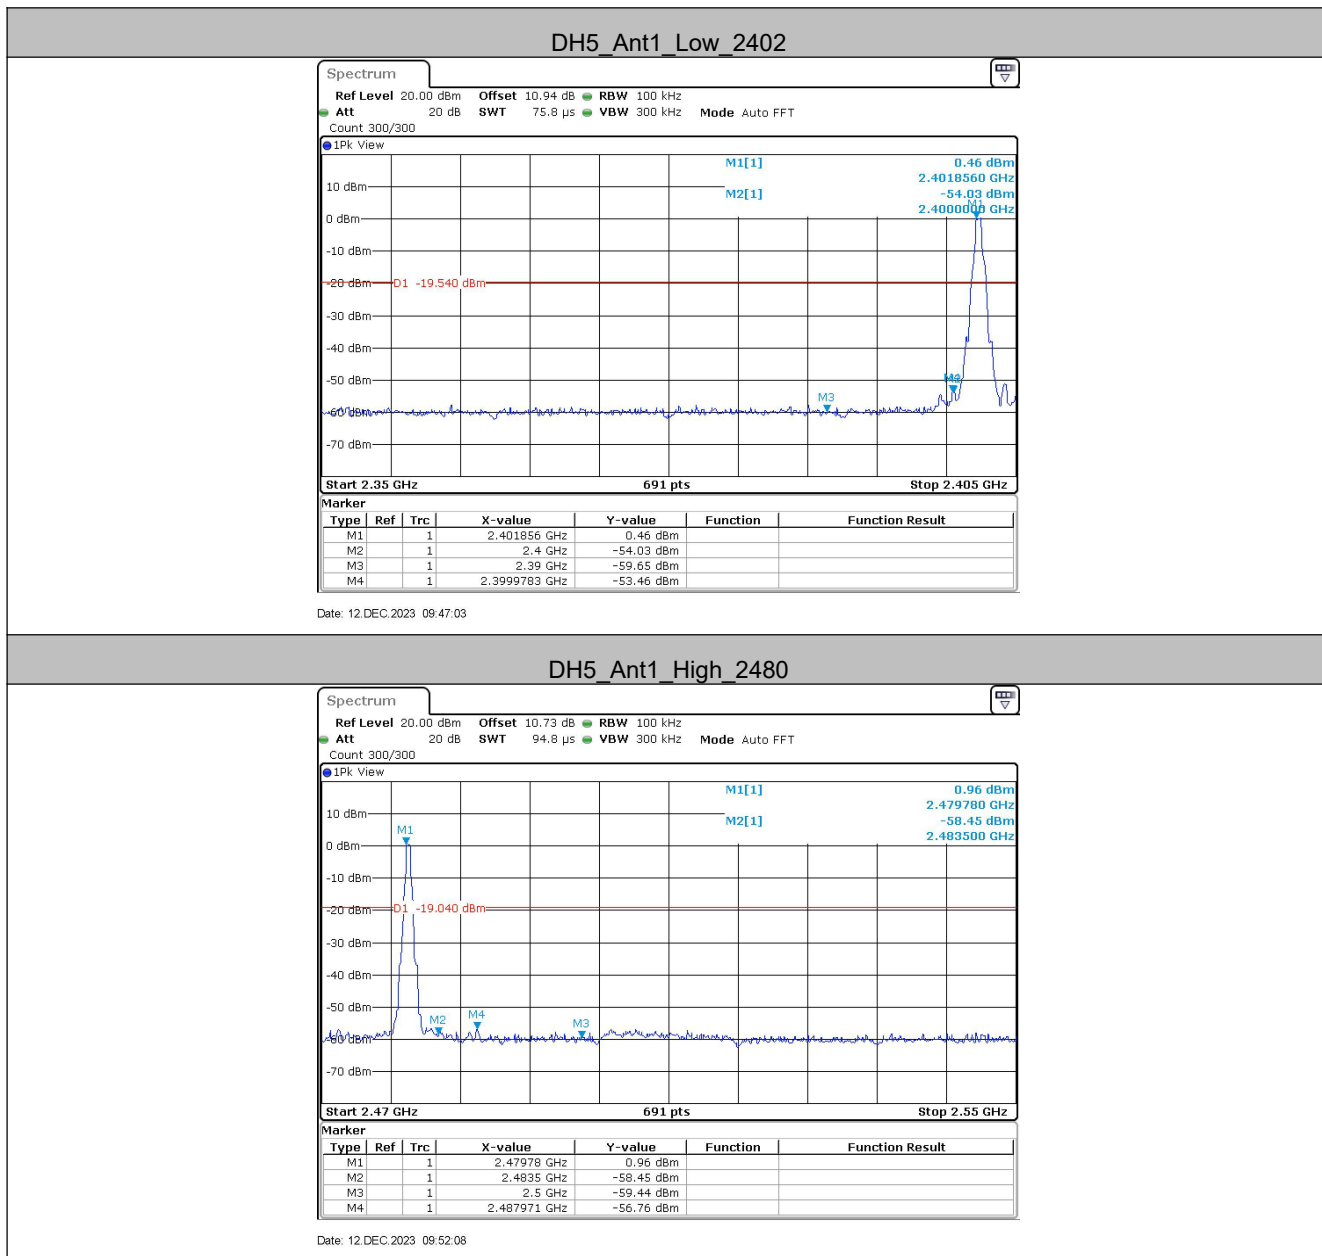


DH5_Ant1_Low_Hop_2402

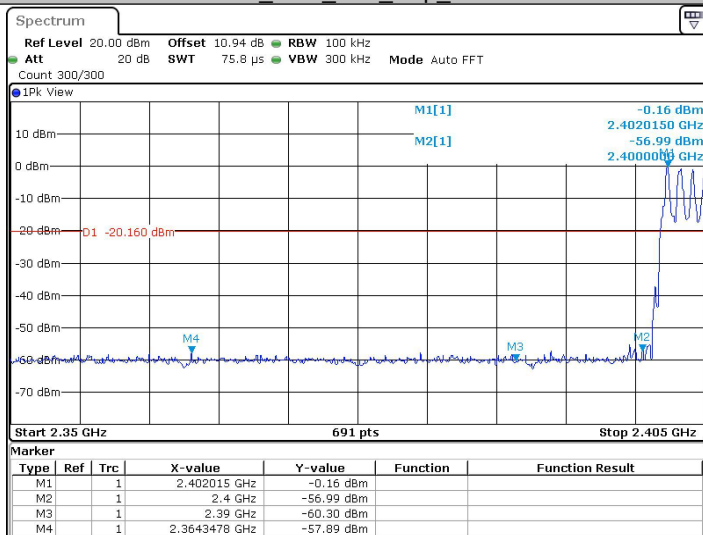


Date: 12 DEC 2023 10:05:57

DH5_Ant1_High_Hop_2480

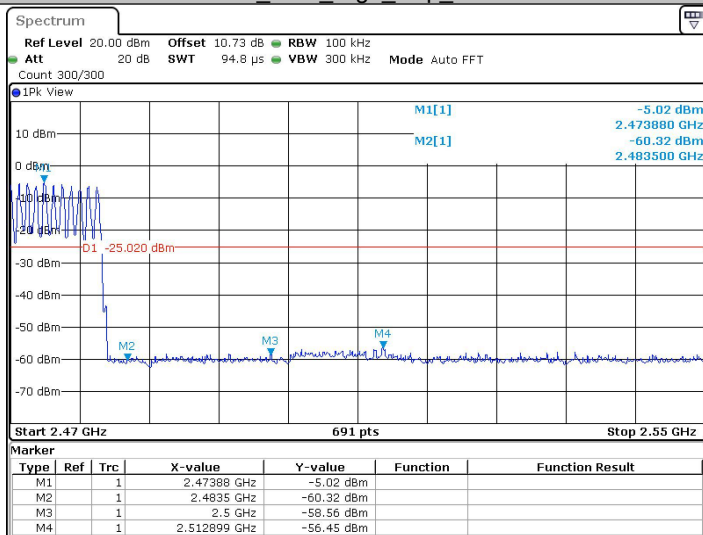


Date: 12 DEC 2023 10:13:51

2DH5_Ant1_Low_2402

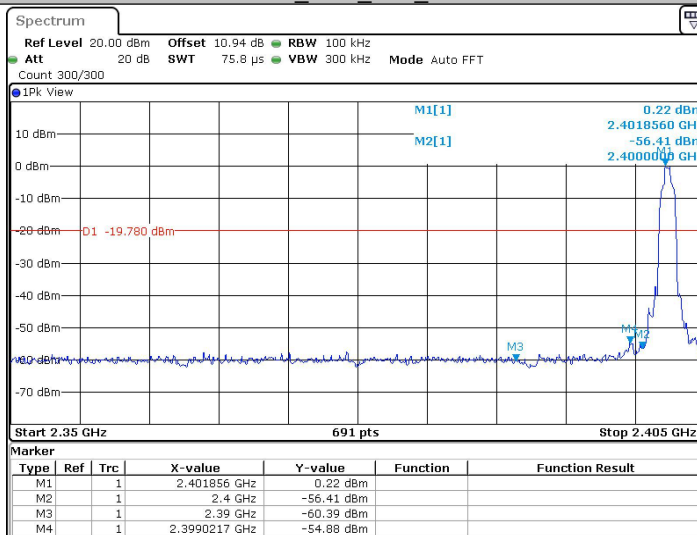


Date: 12 DEC 2023 09:55:37

2DH5_Ant1_High_2480

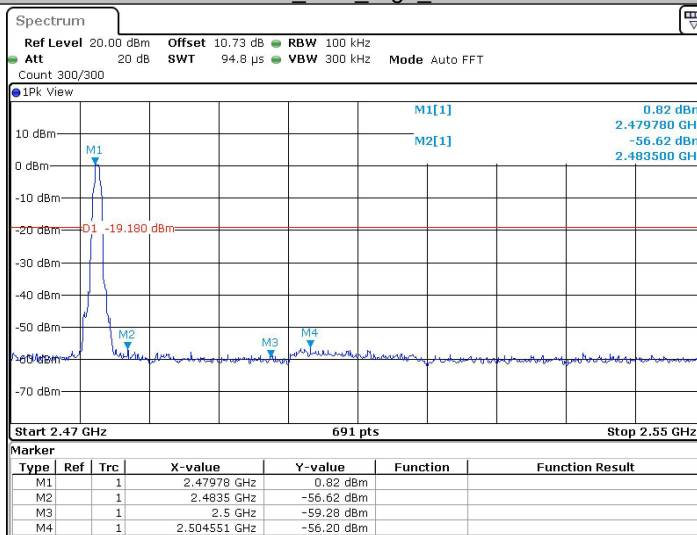


Date: 12 DEC 2023 10:00:35

2DH5_Ant1_Low_Hop_2402

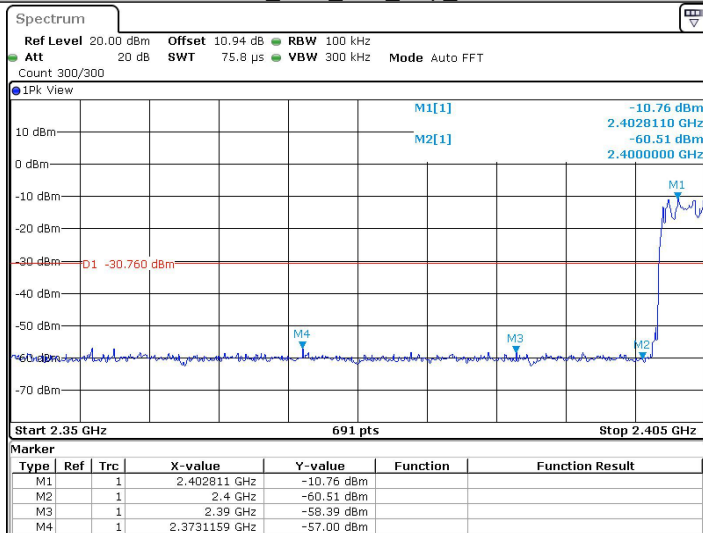


Date: 12 DEC 2023 10:15:30


2DH5_Ant1_High_Hop_2480

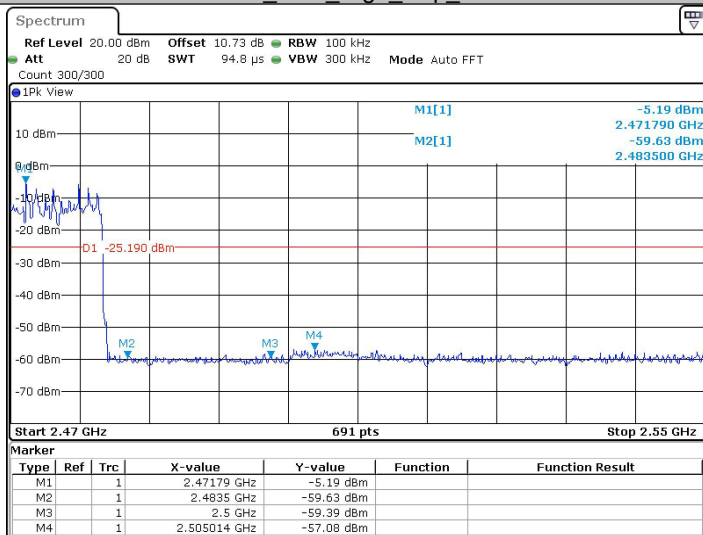


Date: 12 DEC 2023 10:23:51

4.9 Spurious RF Conducted Emissions

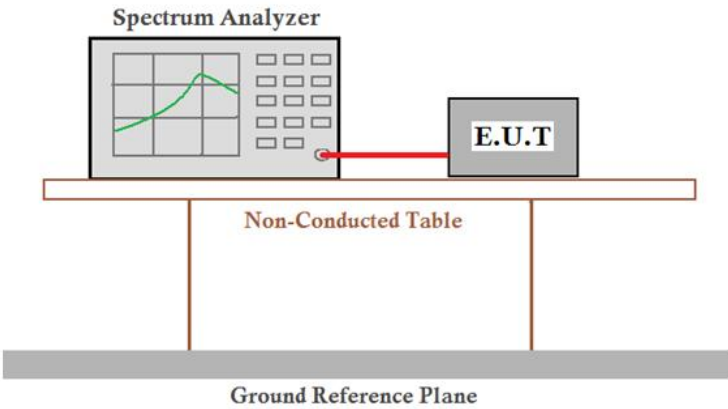Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Test Setup:	 <p>Remark: $Offset = \text{cable loss} + \text{attenuation factor}$.</p>
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type.
Test Results:	Pass

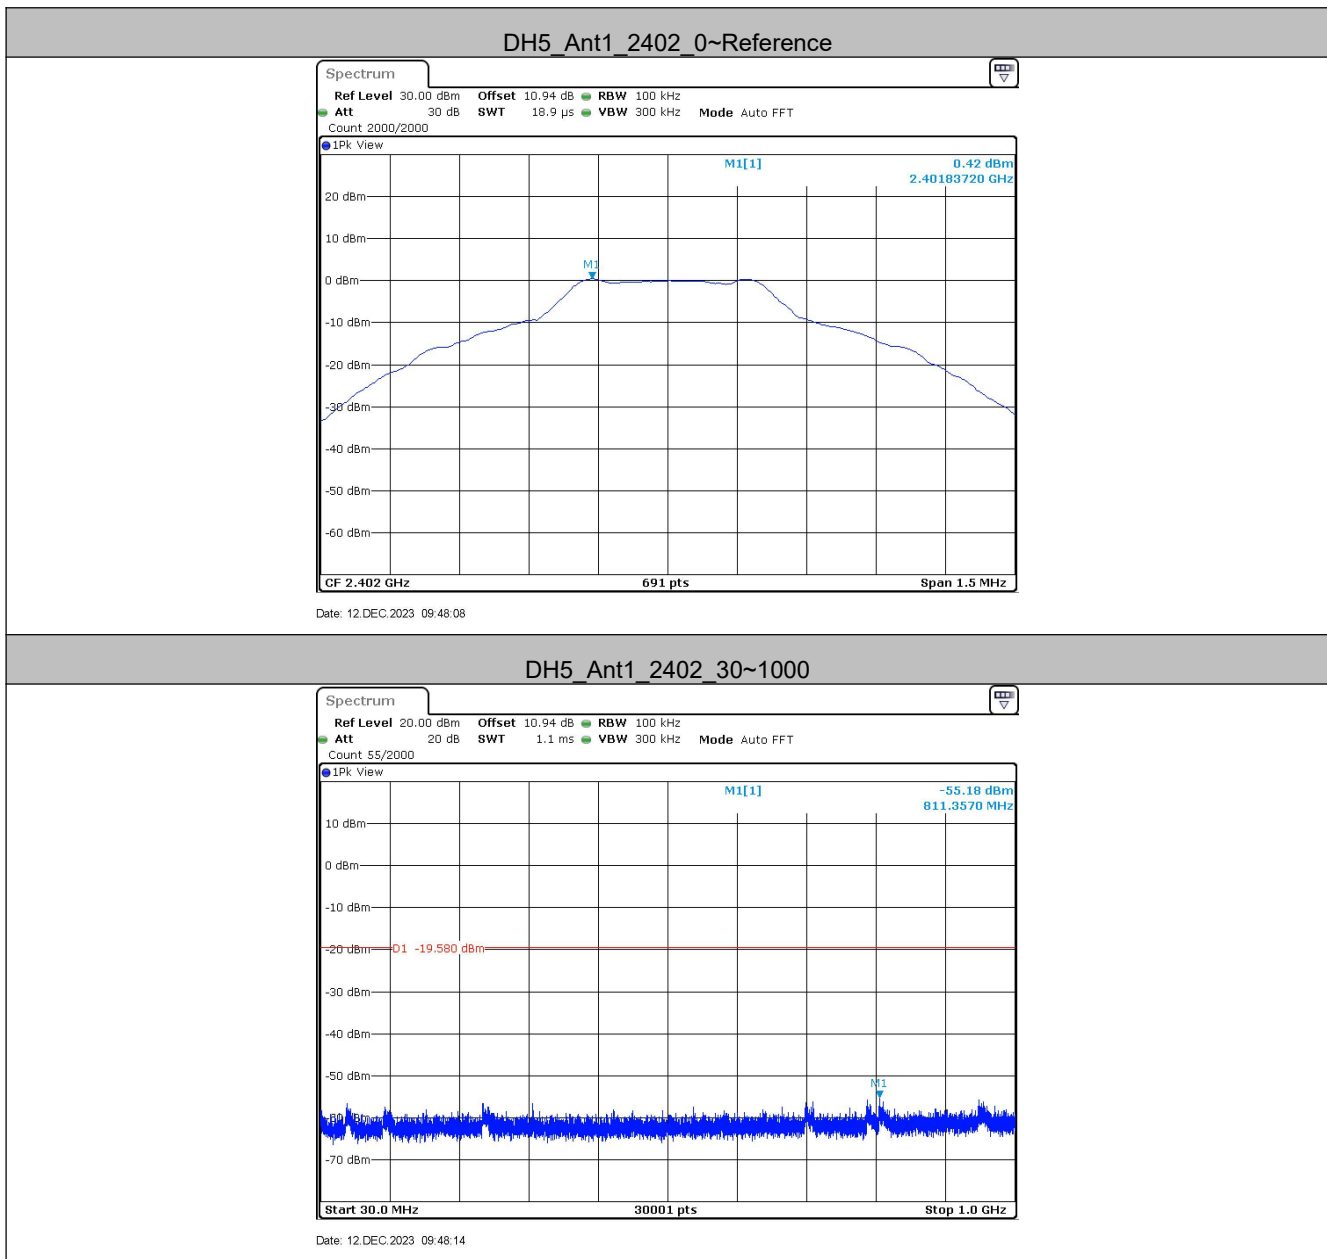


DH5_Ant1_2402_1000~26500

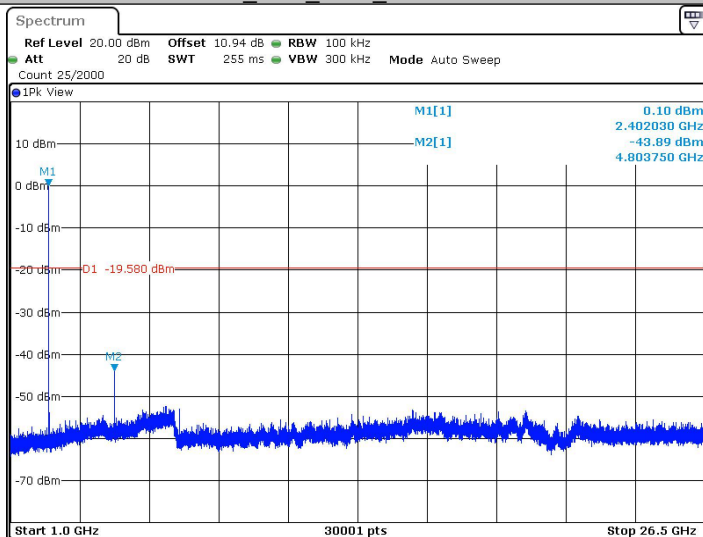


Date: 12 DEC. 2023 09:48:37

DH5_Ant1_2441_0~Reference

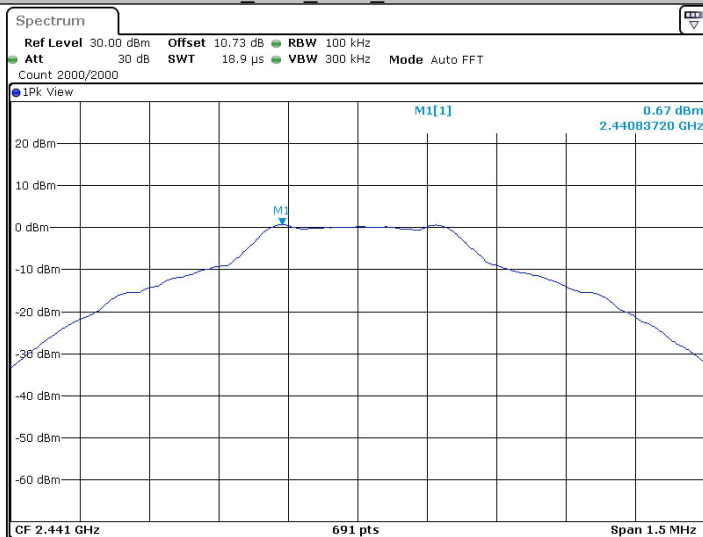


Date: 12 DEC. 2023 09:50:36

DH5_Ant1_2441_30~1000

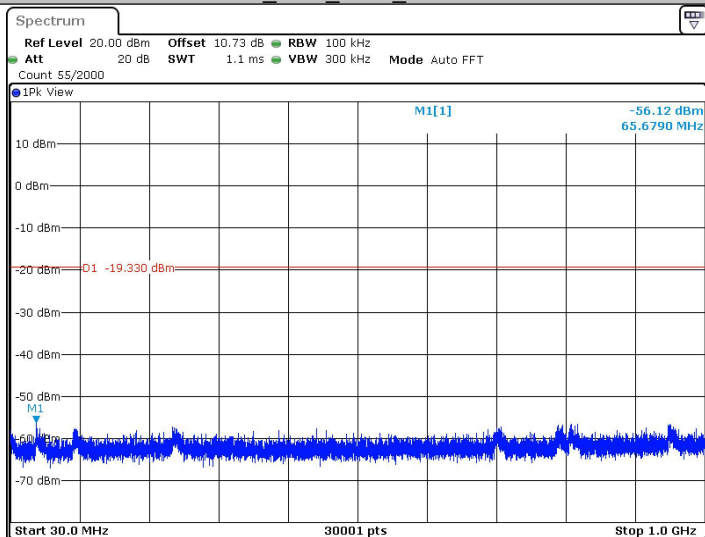


Date: 12 DEC 2023 09:50:42

DH5_Ant1_2441_1000~26500

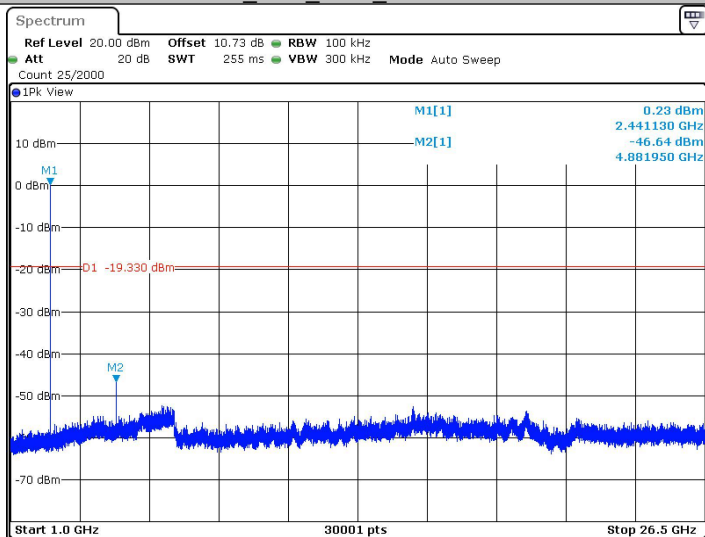


Date: 12 DEC 2023 09:51:04

DH5_Ant1_2480_0~Reference

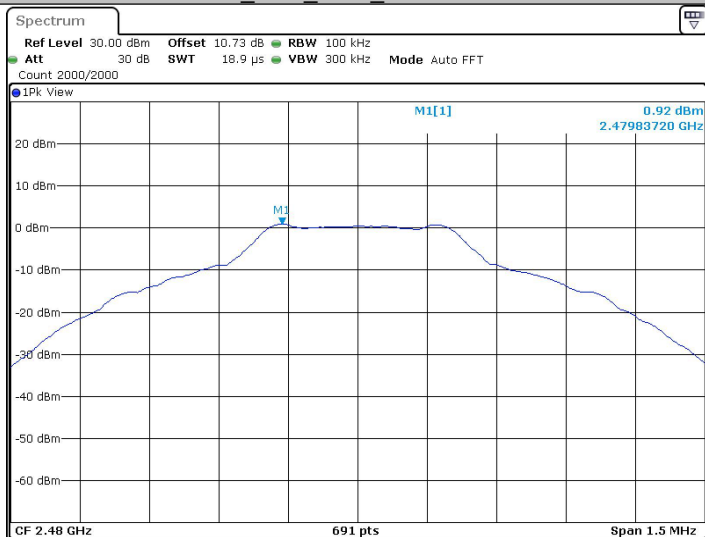


Date: 12 DEC. 2023 09:53:13

DH5_Ant1_2480_30~1000

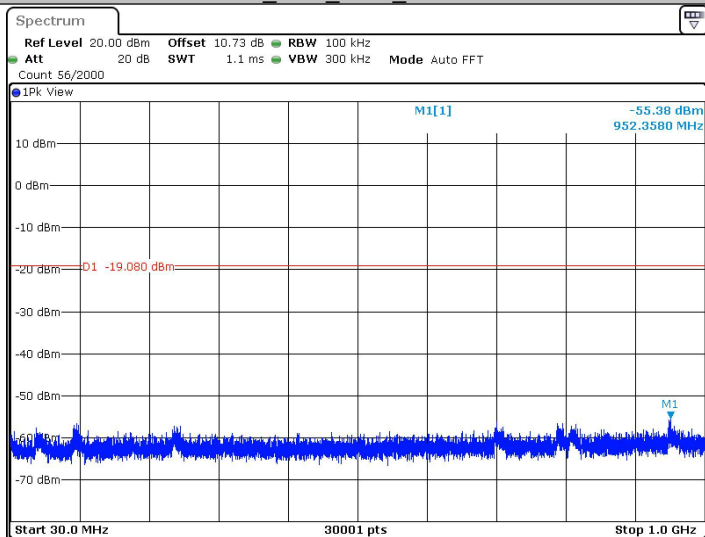


Date: 12 DEC. 2023 09:53:19

DH5_Ant1_2480_1000~26500

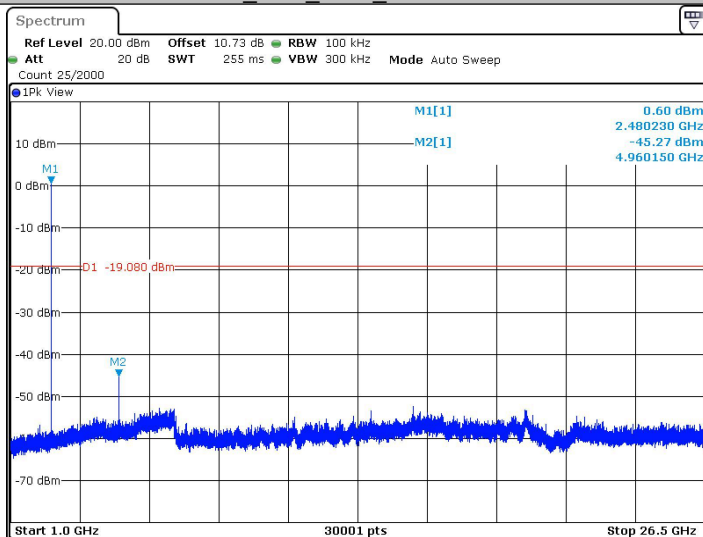


Date: 12 DEC 2023 09:53:41

2DH5_Ant1_2402_0~Reference

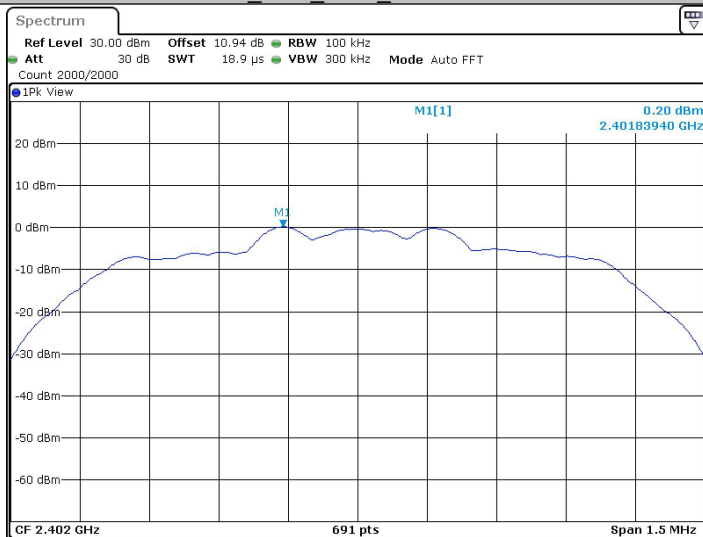

Date: 12 DEC 2023 09:56:42

2DH5_Ant1_2402_30~1000

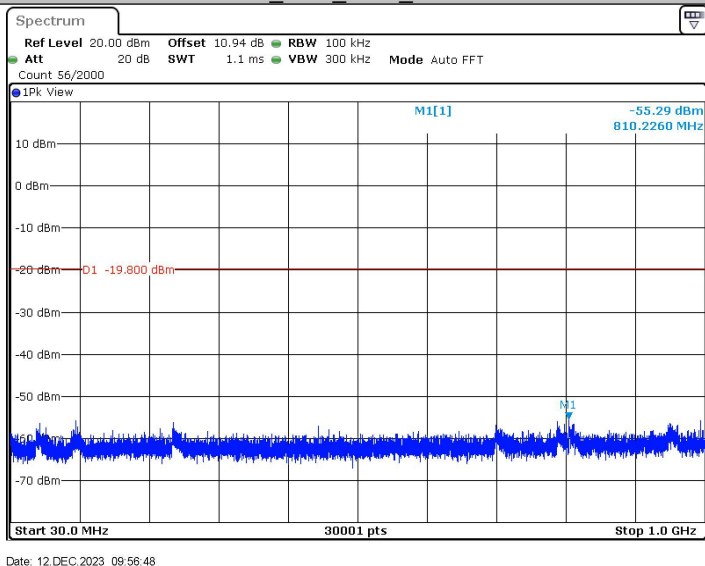

2DH5_Ant1_2402_1000~26500

