

TEST REPORT

Applicant Name : Shenzhen Youmi Intelligent Technology Co., Ltd.
Address : 406-407 Jinqi Zhigu Building, 4/F, 1 Tangling Road, Nanshan
District, Shenzhen City, China
Report Number : RA230607-32261E-20A
FCC ID: 2AZT4-A15TAB

Test Standard (s)

FCC Part 2.1093

Sample Description

Product Type: Smart Tablet Computer
Model No.: A15 Tab
Multiple Models: N/A
Trade Mark: UMIDIGI
Date Received: 2023/06/07
Date of Test: 2023/06/08-2023/06/10
Report Date: 2023/06/21

Test Result:	Pass*
--------------	-------

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:



Lance Li
EMC Engineer

Approved By:



Candy Li
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "*".
Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "*". Customer model name, addresses, names, trademarks etc. are not considered data.
This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China
Tel: +86 755-26503290 Fax: +86 755-26503290 Web: www.atc-lab.com

Attestation of Test Results			
MODE		Max. SAR Level(s) Reported(W/kg)	Limit (W/kg)
GSM 850	1g Body SAR	0.74	1.6
PCS 1900	1g Body SAR	1.03	
WCDMA Band 2	1g Body SAR	1.00	
WCDMA Band 5	1g Body SAR	0.78	
LTE Band 2	1g Body SAR	1.12	
LTE Band 5	1g Body SAR	0.87	
LTE Band 7	1g Body SAR	1.12	
LTE Band 12	1g Body SAR	0.85	
LTE Band 41	1g Body SAR	1.18	
2.4G Wi-Fi	1g Body SAR	0.30	
5.2G Wi-Fi	1g Body SAR	0.20	
5.8G Wi-Fi	1g Body SAR	0.37	
Simultaneous	1g Body SAR	1.55	
Applicable Standards	FCC 47 CFR part 2.1093 Radiofrequency radiation exposure evaluation: portable devices		
	RF Exposure Procedures: TCB Workshop October 2016(Bluetooth Duty Factor)		
	IEEE1528:2013 IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques		
	KDB procedures KDB 447498 D01 General RF Exposure Guidance v06 KDB 616217 D04 SAR for laptop and tablets v01r02 KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04 KDB 865664 D02 RF Exposure Reporting v01r02 KDB 941225 D01 3G SAR Procedures v03r01 KDB 941225 D05 SAR for LTE Devices v02r05 KDB 248227 D01 802.11 Wi-Fi SAR v02r02		
Note: This wireless device has been shown to be capable of compliance for localized specific absorption rate (SAR) for General Population/Uncontrolled Exposure limits specified in FCC 47 CFR part 2.1093 and has been tested in Accordance with the measurement procedures specified in IEEE 1528-2013 and RF exposure KDB procedures. The results and statements contained in this report pertain only to the device(s) evaluated.			

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY.....	4
EUT DESCRIPTION	5
TECHNICAL SPECIFICATION	5
REFERENCE, STANDARDS, AND GUIDELINES.....	6
SAR LIMITS.....	7
FACILITIES	8
DESCRIPTION OF TEST SYSTEM.....	9
EQUIPMENT LIST AND CALIBRATION.....	15
EQUIPMENTS LIST & CALIBRATION INFORMATION.....	15
SAR MEASUREMENT SYSTEM VERIFICATION	16
LIQUID VERIFICATION	16
SYSTEM ACCURACY VERIFICATION.....	19
SAR SYSTEM VALIDATION DATA.....	20
EUT TEST STRATEGY AND METHODOLOGY.....	27
TEST POSITIONS FOR BODY-WORN AND OTHER CONFIGURATIONS.....	27
TEST DISTANCE FOR SAR EVALUATION.....	27
SAR EVALUATION PROCEDURE	28
CONDUCTED OUTPUT POWER MEASUREMENT	29
TEST PROCEDURE	29
RADIO CONFIGURATION	29
MAXIMUM TARGET OUTPUT POWER	35
STANDALONE SAR TEST EXCLUSION CONSIDERATIONS.....	48
ANTENNA DISTANCE TO EDGE:	48
STANDALONE SAR TEST EXCLUSION CONSIDERATIONS:	49
STANDALONE SAR ESTIMATION:.....	49
STANDALONE SAR TEST EXCLUSION CONSIDERATIONS:	49
SAR MEASUREMENT RESULTS	50
SAR TEST DATA	50
SAR MEASUREMENT VARIABILITY.....	58
SAR SIMULTANEOUS TRANSMISSION DESCRIPTION.....	59
SAR PLOTS	60
APPENDIX A MEASUREMENT UNCERTAINTY	61
APPENDIX B EUT TEST POSITION PHOTOS.....	62
APPENDIX C PROBE CALIBRATION CERTIFICATES	63
APPENDIX D DIPOLE CALIBRATION CERTIFICATES	64

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	RA230607-32261E-20A	Original Report	2023/06/21

EUT DESCRIPTION

This report has been prepared on behalf of **Shenzhen Youmi Intelligent Technology Co., Ltd.** and their product **Smart Tablet Computer**, Model: **A15 Tab**, SN: **26UP-1**, FCC: **2AZT4-A15TAB** or the EUT (Equipment under Test) as referred to in the rest of this report.

Technical Specification

Device Type:	Portable
Device Size:	255mm x 163mm x 7mm
Exposure Category:	Population / Uncontrolled
Antenna Type(s):	Internal Antenna
Power Sensor	None
DTM Type:	Class B
Multi-slot Class:	GPRS/EGPRS(Class 12)
Power Class	LTE Band 41 for power class 3
Body-Worn Accessories:	Headset
Face-Head Accessories:	None
Proximity Sensor:	None Proximity Sensor for power reduction
Operation Mode :	GSM Voice, GPRS/EGPRS Data WCDMA(R99 (Voice+Data), HSDPA/HSUPA/ HSPA+) FDD-LTE, TDD-LTE, Wi-Fi, Bluetooth
Frequency Band:	GSM 850: 824-849 MHz(TX); 869-894 MHz(RX) PCS 1900: 1850-1910 MHz(TX); 1930-1990 MHz(RX) WCDMA Band 2: 1850-1910 MHz(TX); 1930-1990 MHz(RX) WCDMA Band 5: 824-849 MHz(TX); 869-894 MHz(RX) LTE Band 2: 1850-1910 MHz(TX); 1930-1990 MHz(RX) LTE Band 5: 824-849 MHz(TX) ; 869-894 MHz (RX) LTE Band 7: 2500-2570MHz(TX); 2620-2690MHz(RX) LTE Band 12: 699-716 MHz(TX) ; 729-746 MHz(RX) LTE Band 41: 2535-2655 MHz(TX&RX) Wi-Fi 2.4G: 2412 -2462 MHz(TX&RX) Wi-Fi 5.2G:5150-5250MHz(TX&RX) Wi-Fi 5.8G:5725-5850MHz(TX&RX) Bluetooth: 2402 -2480 MHz(TX&RX) BLE: 2402 -2480 MHz(TX&RX)
Power Source:	Rechargeable Battery
Normal Operation:	Body-worn

REFERENCE, STANDARDS, AND GUIDELINES

FCC:

The Report and Order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g as recommended by the ANSI/IEEE standard C95.1-1992 [6] for an uncontrolled environment (Paragraph 65). According to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in North America is 1.6 mW/g average over 1 gram of tissue mass.

IC:

The Report and Order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g as recommended by the ISS-102 for an uncontrolled environment. According to the Safety Code 6 Health Canada's Radiofrequency Exposure Guidelines, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in North America is 1.6 mW/g average over 1 gram of tissue mass.

SAR Limits**FCC Limit(1g Tissue)**

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 1 g of tissue)	1.60	8.0
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0

IC Limit(1g Tissue)

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 1 g of tissue)	1.60	8.0
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0

Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

General Population/Uncontrolled environments Spatial Peak limit 1.6W/kg (FCC&IC) applied to the EUT.

FACILITIES

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.


The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189.

Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 4297.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 30241.


DESCRIPTION OF TEST SYSTEM

These measurements were performed with the automated near-field scanning system DASY5 from Schmid & Partner Engineering AG (SPEAG) which is the Fifth generation of the system shown in the figure hereinafter:

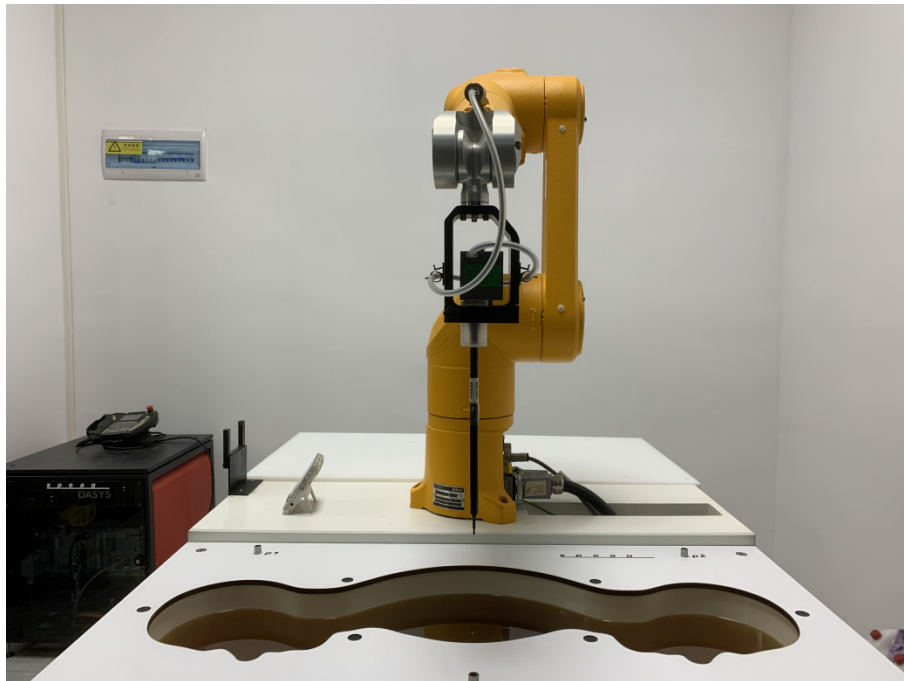

DASY5 System Description

The DASY5 system for performing compliance tests consists of the following items:

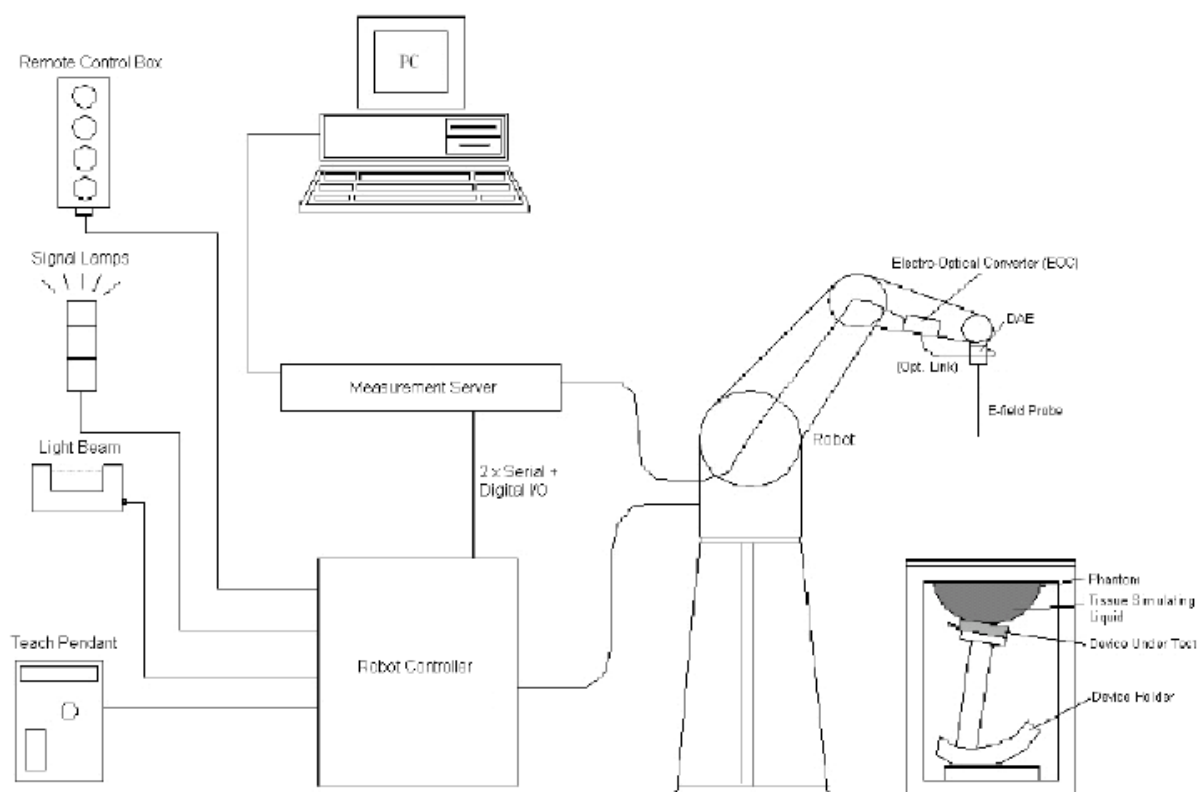

- A standard high precision 6-axis robot (Staubli TX=RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal application, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7 professional operating system and the DASY52 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

DASY5 Measurement Server

The DASY5 measurement server is based on a PC/104 CPU board with a 400 MHz Intel ULV Celeron, 128 MB chip-disk and 128 MB RAM. The necessary circuits for communication with the DAE4 (or DAE3) electronics box, as well as the 16-bit AD converter system for optical detection and digital I/O interface are contained on the DASY6 I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all real-time data evaluations of field measurements and surface detection, controls robot movements, and handles safety operations. The PC operating system cannot interfere with these time-critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program- controlled robot movements. Furthermore, the measurement server is equipped with an expansion port, which is reserved for future applications. Please note that this expansion port does not have a standardized pinout, and therefore only devices provided by SPEAG can be connected. Connection of devices from any other supplier could seriously damage the measurement server.

Data Acquisition Electronics

The data acquisition electronics (DAE4) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

The input impedance of both the DAE4 as well as of the DAE3 box is 200M Ω ; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

EX3DV4 E-Field Probes

Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.
Compatibility	DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI

SAM Twin Phantom

The SAM Twin Phantom (shown in front of DASY5) is a fiberglass shell phantom with shell thickness 2 mm, except in the ear region where the thickness is increased to 6 mm..

When the phantom is mounted inside allocated slot of the DASY5 platform, phantom reference points can be taught directly in the DASY5 V5.2 software. When the DASY5 platform is used to mount the

Phantom, some of the phantom teaching points cannot be reached by the robot in DASY5 V5.2. A special tool called P1a-P2aX-Former is provided to transform two of the three points, P1 and P2, to reachable locations. To use these new teaching points, a revised phantom configuration file is required.

In addition to our standard broadband liquids, the phantom can be used with the following tissue simulating liquids:

Sugar-water-based liquids can be left permanently in the phantom. Always cover the liquid when the system is not in use to prevent changes in liquid parameters due to water evaporation.

DGBE-based liquids should be used with care. As DGBE is a softener for most plastics, the liquid should be taken out of the phantom, and the phantom should be dried when the system is not in use (desirable at least once a week).

Do not use other organic solvents without previously testing the solvent resistivity of the phantom. Approximately 25 liters of liquid is required to fill the SAM Twin phantom.

Calibration Frequency Points for EX3DV4 E-Field Probes SN: 3701 Calibrated: 2023/03/15

Calibration Frequency Point(MHz)	Frequency Range(MHz)		Conversion Factor		
	From	To	X	Y	Z
750 Head	650	850	9.71	9.71	9.71
900 Head	850	1000	9.25	9.25	9.25
1750 Head	1650	1850	7.97	7.97	7.97
1900 Head	1850	2000	7.65	7.65	7.65
2300 Head	2200	2400	7.50	7.50	7.50
2450 Head	2400	2550	7.25	7.25	7.25
2600 Head	2550	2700	7.03	7.03	7.03
5250 Head	5140	5360	5.30	5.30	5.30
5600 Head	5390	5700	4.80	4.80	4.80
5750 Head	5640	5860	4.82	4.82	4.82

Area scan parameters

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	$5 \text{ mm} \pm 1 \text{ mm}$	$\frac{1}{2} \cdot \delta \cdot \ln(2) \text{ mm} \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	$\leq 2 \text{ GHz}: \leq 15 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 12 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 12 \text{ mm}$ $4 - 6 \text{ GHz}: \leq 10 \text{ mm}$
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Zoom scan parameters

Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		$\leq 5 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 4 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 3 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	$\leq 4 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 3 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 2.5 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1) \text{ mm}$	
Minimum zoom scan volume	x, y, z		$\geq 30 \text{ mm}$	$3 - 4 \text{ GHz}: \geq 28 \text{ mm}$ $4 - 5 \text{ GHz}: \geq 25 \text{ mm}$ $5 - 6 \text{ GHz}: \geq 22 \text{ mm}$

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.

* When zoom scan is required and the *reported* SAR from the *area scan based 1-g SAR estimation* procedures of KDB Publication 447498 is $\leq 1.4 \text{ W/kg}$, $\leq 8 \text{ mm}$, $\leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

Tissue Dielectric Parameters for Head

The head tissue dielectric parameters recommended by the IEC 62209-1:2016

Recommended Tissue Dielectric Parameters for Head

Table A.3 – Dielectric properties of the head tissue-equivalent liquid

Frequency MHz	Relative permittivity ϵ_r	Conductivity (σ) S/m
300	45,3	0,87
450	43,5	0,87
<i>750</i>	<i>41,9</i>	<i>0,89</i>
835	41,5	0,90
900	41,5	0,97
1 450	40,5	1,20
<i>1 500</i>	<i>40,4</i>	<i>1,23</i>
<i>1 640</i>	<i>40,2</i>	<i>1,31</i>
<i>1 750</i>	<i>40,1</i>	<i>1,37</i>
1 800	40,0	1,40
1 900	40,0	1,40
2 000	40,0	1,40
<i>2 100</i>	<i>39,8</i>	<i>1,49</i>
<i>2 300</i>	<i>39,5</i>	<i>1,67</i>
2 450	39,2	1,80
<i>2 600</i>	<i>39,0</i>	<i>1,96</i>
3 000	38,5	2,40
<i>3 500</i>	<i>37,9</i>	<i>2,91</i>
<i>4 000</i>	<i>37,4</i>	<i>3,43</i>
<i>4 500</i>	<i>36,8</i>	<i>3,94</i>
<i>5 000</i>	<i>36,2</i>	<i>4,45</i>
<i>5 200</i>	<i>36,0</i>	<i>4,66</i>
<i>5 400</i>	<i>35,8</i>	<i>4,86</i>
<i>5 600</i>	<i>35,5</i>	<i>5,07</i>
<i>5 800</i>	<i>35,3</i>	<i>5,27</i>
<i>6 000</i>	<i>35,1</i>	<i>5,48</i>

NOTE For convenience, permittivity and conductivity values at those frequencies which are not part of the original data provided by Drossos et al. [33] or the extension to 5 800 MHz are provided (i.e. the values shown *in italics*). These values were linearly interpolated between the values in this table that are immediately above and below these values, except the values at 6 000 MHz that were linearly extrapolated from the values at 3 000 MHz and 5 800 MHz.


EQUIPMENT LIST AND CALIBRATION

Equipments List & Calibration Information

Equipment	Model	S/N	Calibration Date	Calibration Due Date
DASY5 Test Software	DASY52 52.10.4	N/A	NCR	NCR
DASY5 Measurement Server	DASY5 6.0.31	N/A	NCR	NCR
Data Acquisition Electronics	DAE4	1325	2022/08/29	2023/08/28
E-Field Probe	EX3DV4	3701	2023/03/15	2024/03/14
Mounting Device	MD4HHTV5	SD 000 H01 KA	NCR	NCR
SAM Twin Phantom	SAM-Twin V5.0	1744	NCR	NCR
Dipole,750MHz	D750V3	1194	2023/02/17	2026/02/16
Dipole,835MHz	D835V2	4d103	2021/10/27	2024/10/26
Dipole,1900MHz	D1900V2	5d128	2021/10/27	2024/10/26
Dipole,2450MHz	D2450V2	751	2020/10/13	2023/10/12
Dipole,2600MHz	D2600V2	1073	2023/02/17	2026/02/16
Dipole,5GHz	D5GHZV2	1301	2023/02/16	2026/02/15
Simulated Tissue Liquid Head	HBBL600-10000V6	SL AAH U16 BC	Each Time	
Network Analyzer	E5071B	MY42403851	2022/12/13	2023/12/12
Dielectric Assessment Kit	DAK-3.5	1320	NCR	NCR
Signal Generator	SMB100A	108362	2022/12/13	2023/12/12
USB wideband power sensor	U2021XA	MY52350001	2022/12/13	2023/12/12
Power Amplifier	CBA 1G-070	T44328	2022/12/13	2023/12/12
Linear Power Amplifier	AS0860-40/45	1060913	2022/12/13	2023/12/12
Directional Coupler	4223-20	3.113.277	2022/12/13	2023/12/12
6dB Attenuator	8493B 6dB Attenuator	2708A 04769	2022/12/13	2023/12/12
Spectrum Analyzer	FSV40	101949	2022/11/25	2023/11/24
Wideband Radio Communication Tester	CMW500	143458	2022/12/13	2023/12/12

SAR MEASUREMENT SYSTEM VERIFICATION

Liquid Verification

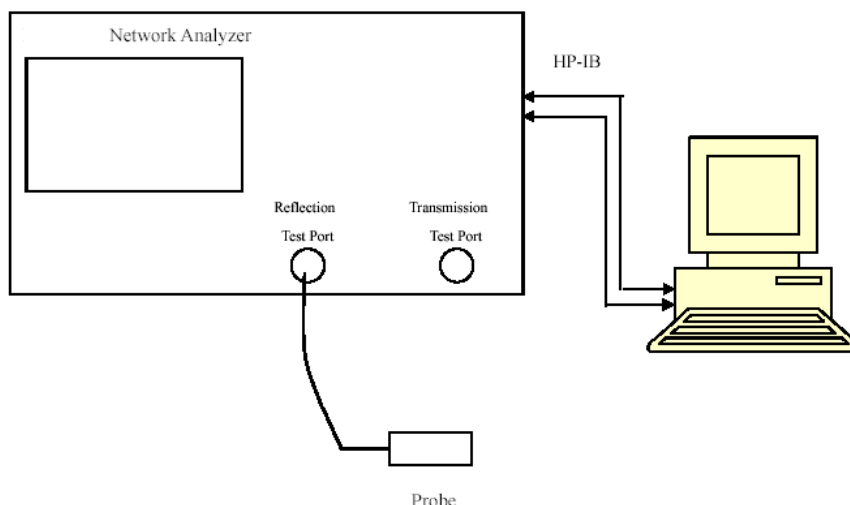

Liquid Verification Setup Block Diagram

Liquid Verification Results

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
704	Simulated Tissue Liquid Head	43.59	0.865	42.18	0.89	3.34	-2.81	± 5
707.5	Simulated Tissue Liquid Head	43.495	0.866	42.13	0.89	3.24	-2.7	± 5
711	Simulated Tissue Liquid Head	43.422	0.868	42.11	0.89	3.12	-2.47	± 5
750	Simulated Tissue Liquid Head	43.403	0.871	41.90	0.89	3.59	-2.13	± 5

*Liquid Verification above was performed on 2023/06/08.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
824.2	Simulated Tissue Liquid Head	42.73	0.922	41.55	0.90	2.84	2.44	± 5
826.4	Simulated Tissue Liquid Head	42.733	0.922	41.54	0.90	2.87	2.44	± 5
829	Simulated Tissue Liquid Head	42.736	0.921	41.53	0.90	2.9	2.33	± 5
835	Simulated Tissue Liquid Head	42.741	0.921	41.50	0.90	2.99	2.33	± 5
836.5	Simulated Tissue Liquid Head	42.746	0.921	41.50	0.90	3	2.33	± 5
836.6	Simulated Tissue Liquid Head	42.746	0.921	41.50	0.90	3	2.33	± 5
844	Simulated Tissue Liquid Head	42.755	0.92	41.50	0.91	3.02	1.1	± 5
846.6	Simulated Tissue Liquid Head	42.759	0.92	41.50	0.91	3.03	1.1	± 5
848.8	Simulated Tissue Liquid Head	42.762	0.919	41.50	0.91	3.04	0.99	± 5

*Liquid Verification above was performed on 2023/06/09.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
1850.2	Simulated Tissue Liquid Head	41.333	1.453	40.00	1.40	3.33	3.79	± 5
1852.4	Simulated Tissue Liquid Head	41.342	1.454	40.00	1.40	3.36	3.86	± 5
1860	Simulated Tissue Liquid Head	41.374	1.455	40.00	1.40	3.44	3.93	± 5
1880	Simulated Tissue Liquid Head	41.458	1.459	40.00	1.40	3.65	4.21	± 5
1900	Simulated Tissue Liquid Head	41.542	1.463	40.00	1.40	3.86	4.5	± 5
1907.6	Simulated Tissue Liquid Head	41.31	1.45	40.00	1.40	3.28	3.57	± 5
1909.8	Simulated Tissue Liquid Head	41.243	1.446	40.00	1.40	3.11	3.29	± 5

*Liquid Verification above was performed on 2023/06/09.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$	
2412	Simulated Tissue Liquid Head	40.756	1.802	39.26	1.78	3.81	1.24	± 5
2437	Simulated Tissue Liquid Head	40.404	1.833	39.22	1.79	3.02	2.4	± 5
2450	Simulated Tissue Liquid Head	40.102	1.834	39.20	1.80	2.3	1.89	± 5
2462	Simulated Tissue Liquid Head	39.811	1.837	39.18	1.81	1.61	1.49	± 5

*Liquid Verification above was performed on 2023/06/08.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
2510	Simulated Tissue Liquid Head	39.424	1.846	39.12	1.87	0.78	-1.28	± 5
2535	Simulated Tissue Liquid Head	40.044	1.886	39.09	1.89	2.44	-0.21	± 5
2545	Simulated Tissue Liquid Head	40.292	1.902	39.07	1.90	3.13	0.11	± 5
2560	Simulated Tissue Liquid Head	40.471	1.927	39.06	1.92	3.61	0.36	± 5
2570	Simulated Tissue Liquid Head	40.526	1.945	39.03	1.94	3.83	0.26	± 5
2595	Simulated Tissue Liquid Head	40.663	1.99	39.01	1.95	4.24	2.05	± 5
2600	Simulated Tissue Liquid Head	40.515	1.997	39.00	1.96	3.88	1.89	± 5
2620	Simulated Tissue Liquid Head	40.404	2.003	38.99	1.97	3.63	1.68	± 5
2645	Simulated Tissue Liquid Head	40.047	2.007	38.94	2.01	2.84	-0.15	± 5

*Liquid Verification above was performed on 2023/06/10.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$	
5180	Simulated Tissue Liquid Head	37.398	4.789	36.02	4.65	3.83	2.99	± 5
5200	Simulated Tissue Liquid Head	37.389	4.798	36.00	4.66	3.86	2.96	± 5
5240	Simulated Tissue Liquid Head	37.377	4.812	35.96	4.70	3.94	2.38	± 5
5250	Simulated Tissue Liquid Head	36.024	4.875	35.95	4.71	0.21	3.5	± 5
5745	Simulated Tissue Liquid Head	35.672	5.187	35.36	5.21	0.88	-0.44	± 5
5750	Simulated Tissue Liquid Head	36.465	5.271	35.36	5.22	3.13	0.98	± 5
5785	Simulated Tissue Liquid Head	36.2	5.266	35.32	5.26	2.49	0.11	± 5
5825	Simulated Tissue Liquid Head	36.187	5.26	35.28	5.29	2.57	-0.57	± 5

*Liquid Verification above was performed on 2023/06/08.


System Accuracy Verification

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of $\pm 10\%$. The validation results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

The spacing distances in the **System Verification Setup Block Diagram** is given by the following:

- $s = 15 \text{ mm} \pm 0,2 \text{ mm}$ for $300 \text{ MHz} \leq f \leq 1\,000 \text{ MHz}$;
- $s = 10 \text{ mm} \pm 0,2 \text{ mm}$ for $1\,000 \text{ MHz} < f \leq 6\,000 \text{ MHz}$;

System Verification Setup Block Diagram

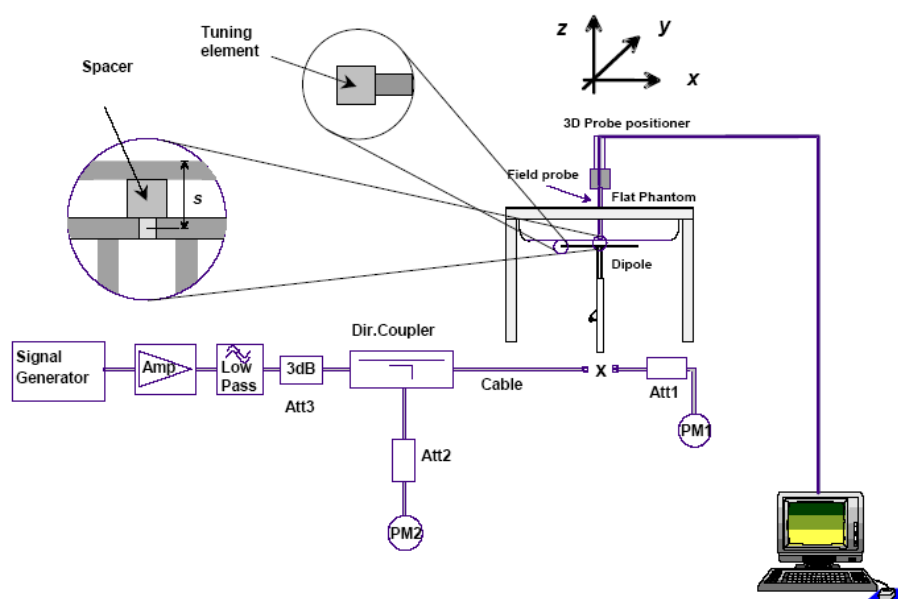

System Accuracy Check Results

Date	Frequency Band	Liquid Type	Input Power (mW)	Measured SAR (W/kg)		Normalized to 1W (W/kg)	Target Value (W/kg)	Delta (%)	Tolerance (%)
2023/06/08	750 MHz	Head	100	1g	0.879	8.79	8.57	2.567	± 10
2023/06/09	835 MHz	Head	100	1g	0.941	9.41	9.65	-2.487	± 10
2023/06/09	1900 MHz	Head	100	1g	4.19	41.9	40.0	4.750	± 10
2023/06/08	2450 MHz	Head	100	1g	5.47	54.7	53.0	3.208	± 10
2023/06/10	2600 MHz	Head	100	1g	5.77	57.7	56.8	1.585	± 10
2023/06/08	5250 MHz	Head	100	1g	7.81	78.1	77.7	0.515	± 10
2023/06/08	5750 MHz	Head	100	1g	7.68	76.8	78.0	-1.538	± 10

*The SAR values above are normalized to 1 Watt forward power.

SAR SYSTEM VALIDATION DATA

System Performance 750 MHz

DUT: Dipole 750MHz; Type: D750V3; Serial: 1194

Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.871 \text{ S/m}$; $\epsilon_r = 43.403$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @750 MHz; Calibrated: 2023/03/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

System Performance Check at 750MHz/d=15mm, Pin=100mw/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.884 W/kg


System Performance Check at 750MHz/d=15mm, Pin=100mw/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 36.77 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.879 W/kg; SAR(10 g) = 0.525 W/kg

Maximum value of SAR (measured) = 0.867 W/kg

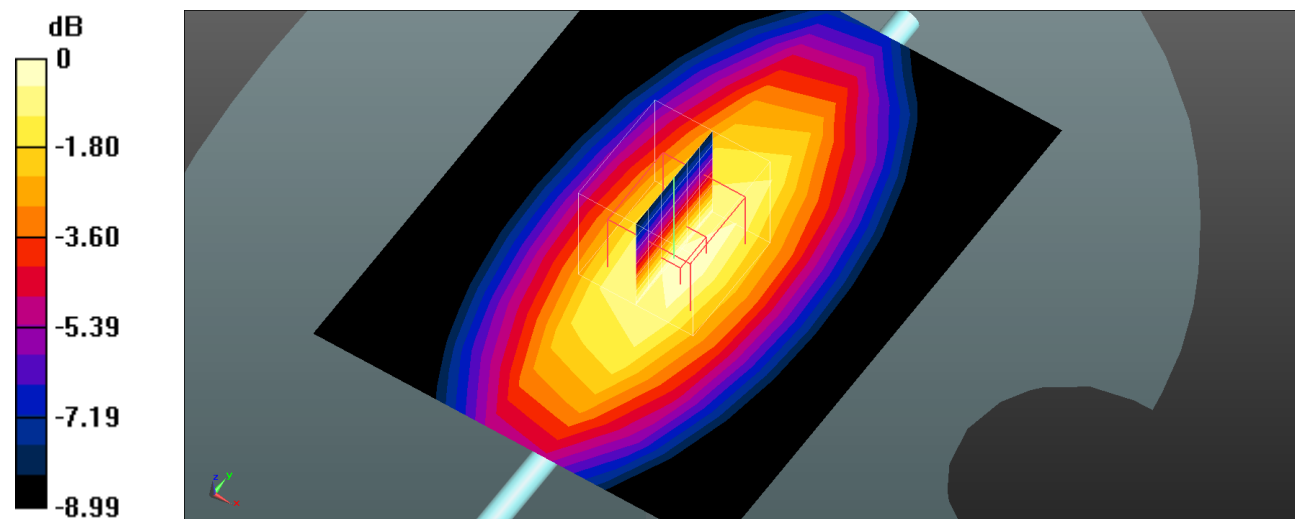

0 dB = 0.867 W/kg = -0.62 dBW/kg

System Performance 835 MHz**DUT: D835V3; Type: 835 MHz; Serial: 4d103**

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 42.741$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @835 MHz; Calibrated: 2023/03/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

System Performance Check at 835MHz/d=15mm, Pin=100mw/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.995 W/kg


System Performance Check at 835MHz/d=15mm, Pin=100mw/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 35.67 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.941 W/kg; SAR(10 g) = 0.606 W/kg

Maximum value of SAR (measured) = 1.11 W/kg

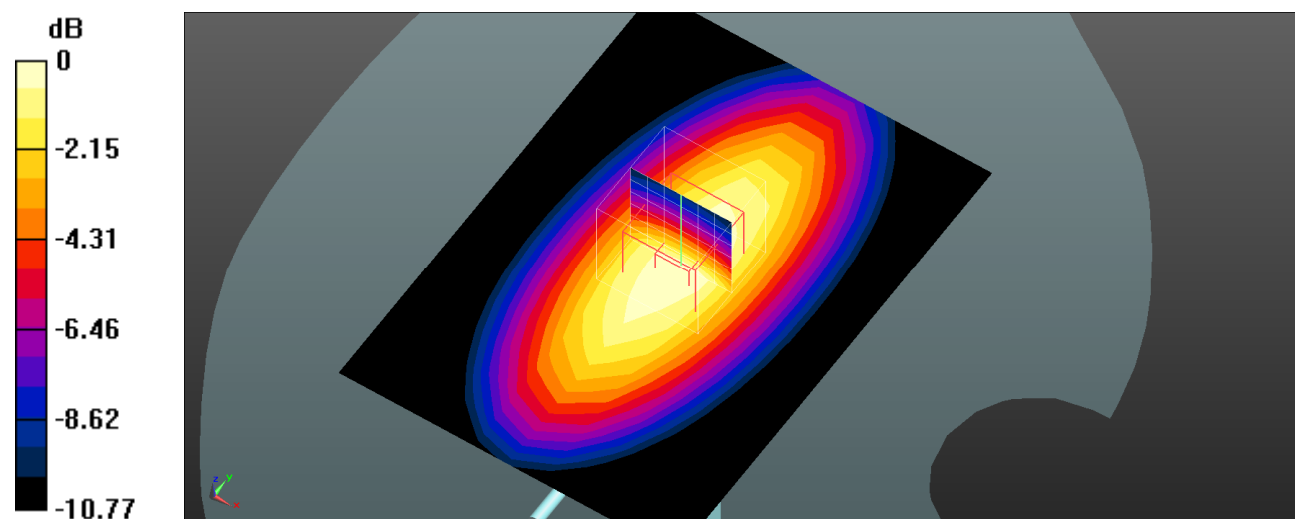

0 dB = 1.11 W/kg = 0.45 dBW/kg

System Performance 1900MHz

DUT: D1900V2; Type: 1900 MHz; Serial: 5d128

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.463$ S/m; $\epsilon_r = 41.542$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.65, 7.65, 7.65) @1900 MHz; Calibrated: 2023/03/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

System Performance Check at 1900MHz/d=10mm, Pin=100mw/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 4.71 W/kg


System Performance Check at 1900MHz/d=10mm, Pin=100mw/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.12 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 6.33 W/kg

SAR(1 g) = 4.19 W/kg; SAR(10 g) = 2.14 W/kg

Maximum value of SAR (measured) = 4.69 W/kg

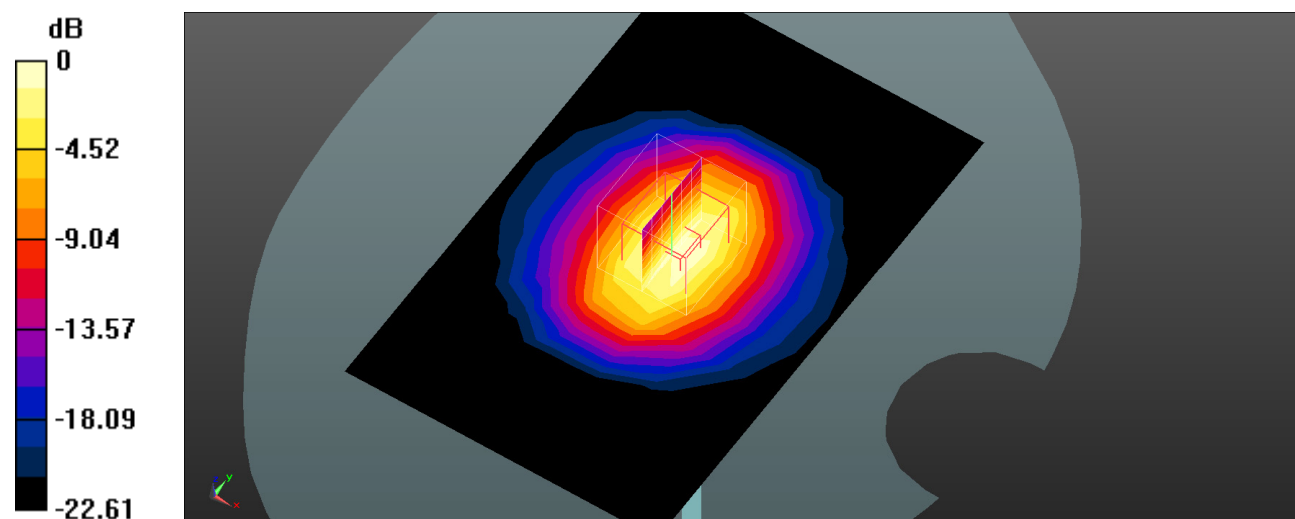

0 dB = 4.69 W/kg = 6.71 dBW/kg

System Performance 2450MHz**DUT: D2450V2; Type: 2450 MHz; Serial: 751**

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.834$ S/m; $\epsilon_r = 40.102$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.25, 7.25, 7.25) @2450 MHz; Calibrated: 2023/03/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

System Performance Check at 2450MHz/d=10mm, Pin=100mw/Area Scan (11x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 6.69 W/kg


System Performance Check at 2450MHz/d=10mm, Pin=100mw/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 59.59 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 10.8 W/kg

SAR(1 g) = 5.47 W/kg; SAR(10 g) = 2.55 W/kg

Maximum value of SAR (measured) = 6.71 W/kg

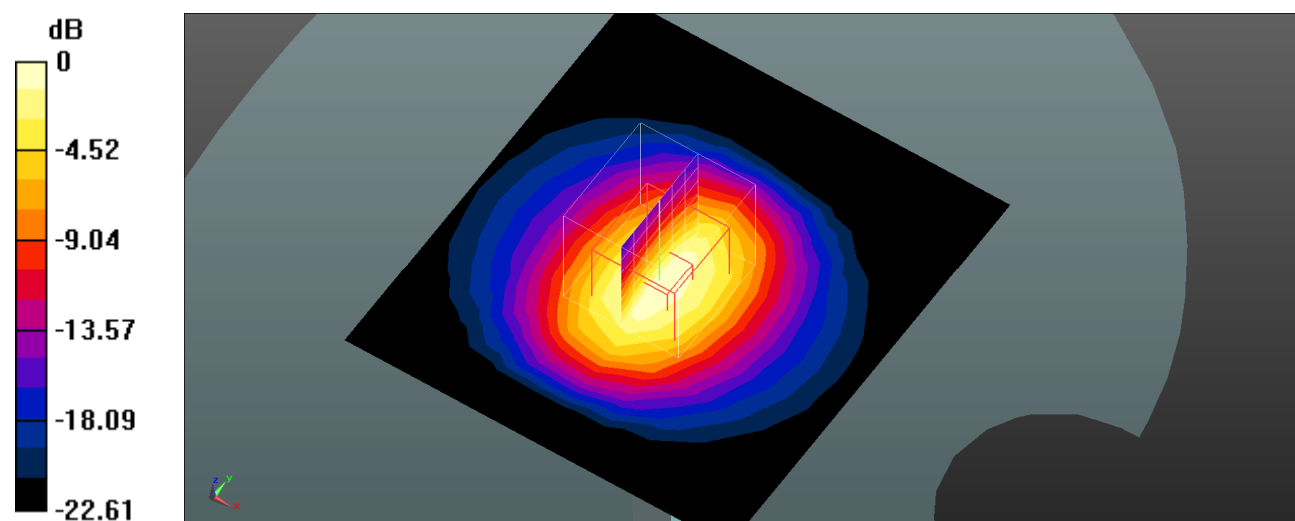

0 dB = 6.71 W/kg = 8.27 dBW/kg

System Performance 2600MHz

DUT: D2600V2; Type: 2600 MHz; Serial: 1073

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 1.997$ S/m; $\epsilon_r = 40.515$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.03, 7.03, 7.03) @2600 MHz; Calibrated: 2023/03/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

System Performance Check at 2600MHz/d=10mm, Pin=100mw/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 6.94 W/kg


System Performance Check at 2600MHz/d=10mm, Pin=100mw/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.42 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 11.7 W/kg

SAR(1 g) = 5.77 W/kg; SAR(10 g) = 2.56 W/kg

Maximum value of SAR (measured) = 6.88 W/kg

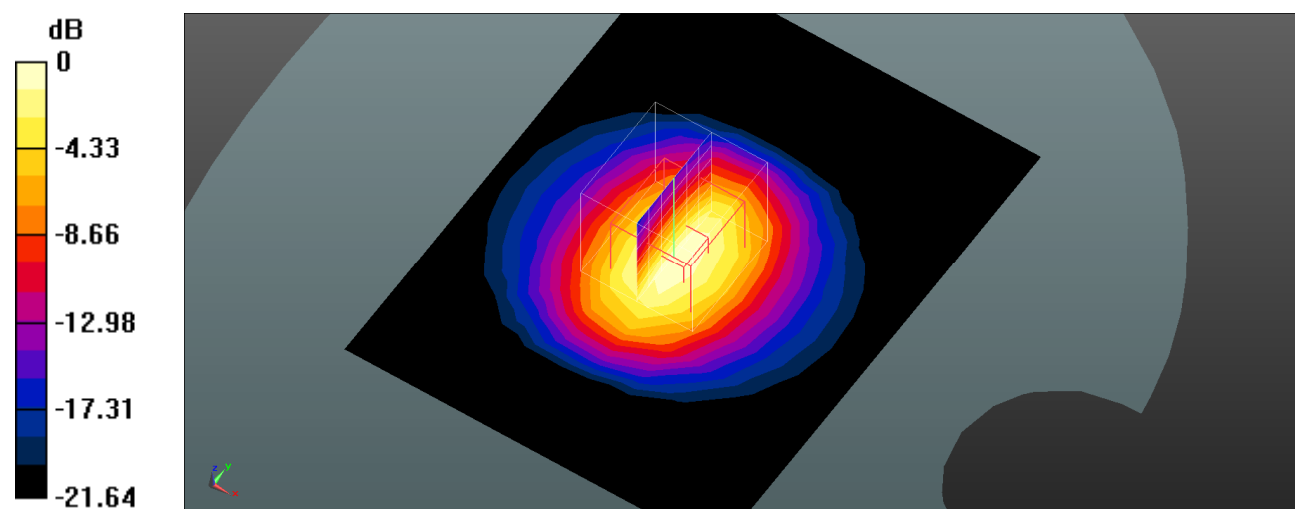

0 dB = 6.88 W/kg = 8.38 dBW/kg

System Performance 5250 MHz**DUT: Dipole 5GHz Type: D5GHZV2; Serial: 1301**

Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5250$ MHz; $\sigma = 4.875$ S/m; $\epsilon_r = 36.024$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(5.3, 5.3, 5.3) @5250 MHz; Calibrated: 2023/03/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

System Performance Check at 5250MHz/d=10mm, Pin=100mw/Area Scan (7x9x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 19.6 W/kg


System Performance Check at 5250MHz/d=10mm, Pin=100mw/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 62.42 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 38.7 W/kg

SAR(1 g) = 7.81 W/kg; SAR(10 g) = 2.32 W/kg

Maximum value of SAR (measured) = 19.1 W/kg

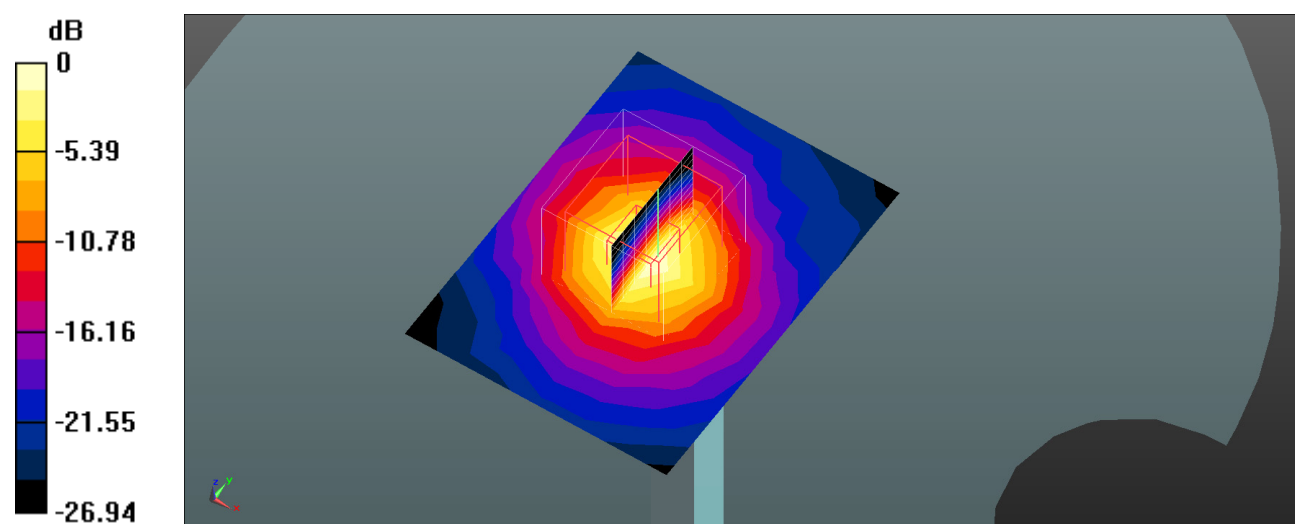

0 dB = 19.1 W/kg = 12.81 dBW/kg

System Performance 5750 MHz**DUT: Dipole 5GHz Type: D5GHZV2; Serial: 1301**

Communication System: UID 0, CW (0); Frequency: 5750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5750 \text{ MHz}$; $\sigma = 5.271 \text{ S/m}$; $\epsilon_r = 36.465$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(4.82, 4.82, 4.82) @5750 MHz; Calibrated: 2023/03/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

System Performance Check at 5750MHz/d=10mm, Pin=100mw/Area Scan (7x9x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 18.7 W/kg


System Performance Check at 5750MHz/d=10mm, Pin=100mw/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 59.18 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 35.2 W/kg

SAR(1 g) = 7.68 W/kg; SAR(10 g) = 2.22 W/kg

Maximum value of SAR (measured) = 18.5 W/kg

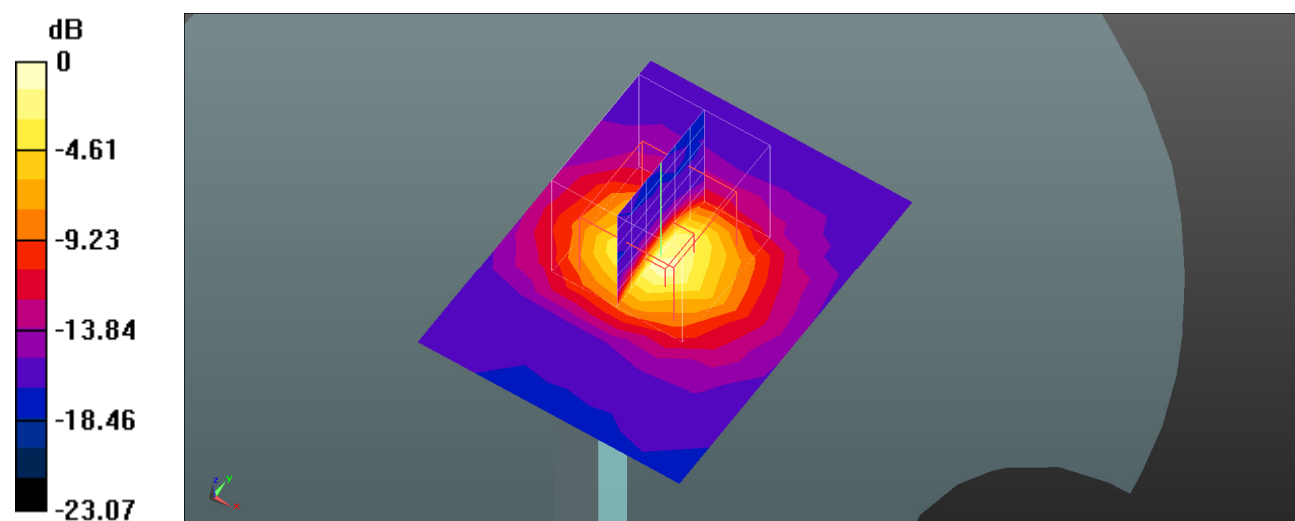

0 dB = 18.5 W/kg = 12.67 dBW/kg

EUT TEST STRATEGY AND METHODOLOGY

Test positions for body-worn and other configurations

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a headset output should be tested with a headset connected to the device. When multiple accessories that do not contain metallic components are supplied with the device, the device may be tested with only the accessory that dictates the closest spacing to the body. When multiple accessories that contain metallic components are supplied with the device, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (e.g., the same metallic belt-clip used with different holsters with no other metallic components), only the accessory that dictates the closest spacing to the body must be tested.

Body-worn accessories may not always be supplied or available as options for some devices that are intended to be authorized for body-worn use. A separation distance of 1.5 cm between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances. Other separation distances may be used, but they should not exceed 2.5 cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

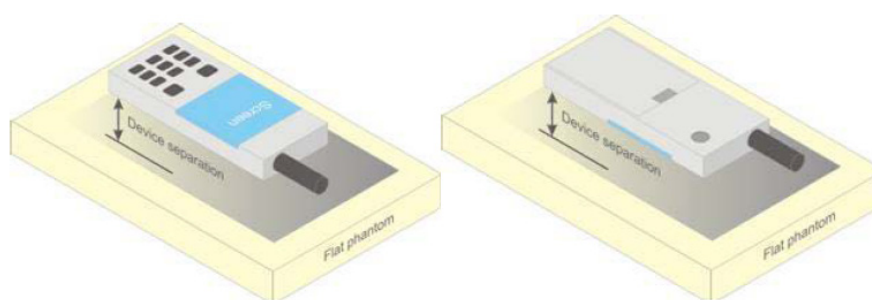


Figure 5 – Test positions for body-worn devices

Test Distance for SAR Evaluation

For this case the EUT(Equipment Under Test) is set 0mm away from the phantom, the test distance is 0mm.

SAR Evaluation Procedure

The evaluation was performed with the following procedure:

Step 1: Measurement of the SAR value at a fixed location above the ear point or central position was used as a reference value for assessing the power drop. The SAR at this point is measured at the start of the test and then again at the end of the testing.

Step 2: The SAR distribution at the exposed side of the head was measured at a distance of 4 mm from the inner surface of the shell. The area covered the entire dimension of the head or radiating structures of the EUT, the horizontal grid spacing was 15 mm x 15 mm, and the SAR distribution was determined by integrated grid of 1.5mm x 1.5mm. Based on these data, the area of the maximum absorption was determined by spline interpolation. The first Area Scan covers the entire dimension of the EUT to ensure that the hotspot was correctly identified.

Step 3: Around this point, a volume of 30 mm x 30 mm x 30 mm was assessed by measuring 7x 7 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:


- 1) The data at the surface were extrapolated, since the center of the dipoles is 1.2 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
- 2) The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one dimensional splines with the "Not a knot"-condition (in x, y and z-directions). The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the averages.

All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.


Step 4: Re-measurement of the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation was repeated.

CONDUCTED OUTPUT POWER MEASUREMENT

Test Procedure

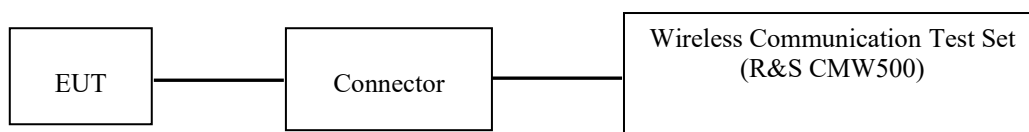

GSM/WCDMA/LTE

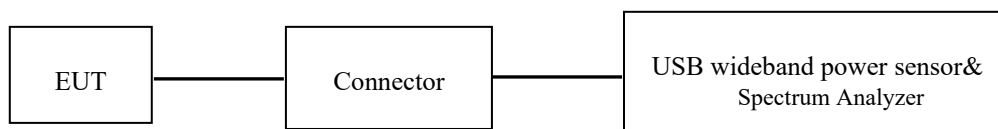

WLAN/ Bluetooth

Radio Configuration

The power measurement was configured by the Wireless Communication Test Set.

GSM/GPRS

Function: Menu select > GSM Mobile Station > GSM 850/1900

Press Connection control to choose the different menus

Press RESET > choose all the reset all settings

Connection Press Signal Off to turn off the signal and change settings

Network Support > GSM + GPRS

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off

MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting

> Slot configuration > Uplink/Gamma

> 33 dBm for GPRS 850

> 30 dBm for GPRS 1900

BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset > + 0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stable)

BCCH Channel > choose desired test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0 > 4 dB

Slot Config > Unchanged (if already set under MS signal)

TCH > choose desired test channel

Hopping > Off

Main Timeslot > 3

Network Coding Scheme > CS4 (GPRS)

Bit Stream > 2E9-1 PSR Bit Stream

AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

Connection Press Signal on to turn on the signal and change settings

WCDMA Release 99

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification. The EUT has a nominal maximum output power of 24dBm (+1.7/-3.7).

WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

HSDPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subset	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	β_d (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR(dB)	0	0	0.5	0.5
HSDPA Specifi c Setting s	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	$A_{hs}=\beta_{hs}/\beta_c$	30/15			

HSUPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSUPA	HSUPA	HSUPA	HSUPA	HSUPA
	Subset	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c / β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	CM(dB)	1.0	3.0	2.0	3.0	1.0
	MPR(dB)	0	2	1	2	0
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback	4ms				
	CQI Repetition Factor	2				
	$A_{hs} = \beta_{hs} / \beta_c$	30/15				
HSUPA Specific Settings	DE-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_FCI	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27		E-TFCI 11 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18		E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27

HSPA+

Sub-test	β_c (Note3)	β_d	β_{HS} (Note1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).

Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default.

Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.

The following tests were conducted according to the test requirements in Table C.11.1.4 of 3GPP TS 34.121-1

FDD-LTE

For UE Power Class 1 and 3, the allowed Maximum Power Reduction (MPR) for the maximum output power in Table 6.2.2-1 due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1 and 3

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

For UE Power Class 1 and 3 the specific requirements and identified sub clauses are specified in Table 6.2.4-1 along with the allowed A-MPR values that may be used to meet these requirements. The allowed A-MPR values specified below in Table 6.2.4.-1 to 6.2.4-15 are in addition to the allowed MPR requirements specified in sub clause 6.2.3.

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (subclause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	N/A
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	N/A
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	
NS_08	6.6.3.3.2			Table 6.2.4-2	
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	
NS_11	6.6.2.2.1	23	1.4, 3, 5, 10, 15, 20	Table 6.2.4-5	
NS_12	6.6.3.3.5	26	1.4, 3, 5	Table 6.2.4-6	
NS_13	6.6.3.3.6	26	5	Table 6.2.4-7	
NS_14	6.6.3.3.7	26	10, 15	Table 6.2.4-8	
NS_15	6.6.3.3.8	26	1.4, 3, 5, 10, 15	Table 6.2.4-9 Table 6.2.4-10	
NS_16	6.6.3.3.9	27	3, 5, 10	Table 6.2.4-11, Table 6.2.4-12, Table 6.2.4-13	
NS_17	6.6.3.3.10	28	5, 10	Table 5.6-1	N/A
NS_18	6.6.3.3.11	28	5	≥ 2	≤ 1
			10, 15, 20	≥ 1	≤ 4
NS_19	6.6.3.3.12	44	10, 15, 20	Table 6.2.4-14	
NS_20	6.2.2 6.6.2.2.1 6.6.3.2	23	5, 10, 15, 20	Table 6.2.4-15	
...					
NS_32	-	-	-	-	-

TDD-LTE

LTE TDD Band 41 supports 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$		
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Calculated Duty Cycle

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

Note: This device supports uplink-downlink configurations 0-6. The configuration with highest duty cycle was used for SAR Testing: configuration 0 at 63.33% duty cycle.

Maximum Target Output Power

Max Target Power(dBm)			
Mode/Band	Channel		
	Low	Middle	High
GSM 850	33.0	33.0	33.0
GPRS 1 TX Slot	33.0	33.0	33.0
GPRS 2 TX Slot	31.0	31.0	31.0
GPRS 3 TX Slot	29.0	29.0	29.0
GPRS 4 TX Slot	27.0	27.0	27.0
EDGE 1 TX Slot	26.0	26.0	26.0
EDGE 2 TX Slot	24.0	24.0	24.0
EDGE 3 TX Slot	22.0	22.0	22.0
EDGE 4 TX Slot	20.0	20.0	20.0
PCS 1900	25.0	25.0	25.0
GPRS 1 TX Slot	25.0	25.0	25.0
GPRS 2 TX Slot	23.0	23.0	23.0
GPRS 3 TX Slot	21.0	21.0	21.0
GPRS 4 TX Slot	20.0	20.0	20.0
EDGE 1 TX Slot	23.0	23.0	23.0
EDGE 2 TX Slot	21.0	21.0	21.0
EDGE 3 TX Slot	19.0	19.0	19.0
EDGE 4 TX Slot	17.0	17.0	17.0
WCDMA Band 2	17.0	17.0	17.0
WCDMA Band 5	24.0	24.0	24.0
LTE Band 2	17.0	17.0	17.0
LTE Band 5	24.0	24.0	24.0
LTE Band 7	16.5	16.5	16.5
LTE Band 12	24.0	24.0	24.0
LTE Band 41	17.5	17.5	17.5
WLAN 2.4G	11.0	11.0	11.0
WLAN 5.2G	10.0	10.0	10.0
WLAN 5.8G	9.0	9.0	9.0
Bluetooth	3.0	3.0	3.0
BLE	0.5	0.5	0.5

Test Results:**GSM:**

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)
GSM 850	128	824.2	32.40
	190	836.6	32.60
	251	848.8	32.70
PCS 1900	512	1850.2	24.70
	661	1880	24.60
	810	1909.8	24.10

GPRS:

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)			
			1 slot	2 slots	3 slots	4 slots
GSM 850	128	824.2	32.61	30.38	28.59	26.78
	190	836.6	32.51	30.46	28.60	26.81
	251	848.8	32.37	30.56	28.51	26.83
PCS 1900	512	1850.2	24.20	21.94	20.17	18.51
	661	1880	24.66	22.25	20.48	18.82
	810	1909.8	24.80	22.66	20.86	19.02

EDGE:

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)			
			1 slot	2 slots	3 slots	4 slots
GSM 850	128	824.2	25.13	23.94	21.56	19.48
	190	836.6	25.05	23.80	21.44	19.37
	251	848.8	25.02	23.80	21.40	19.36
PCS 1900	512	1850.2	21.23	19.23	17.18	15.80
	661	1880	21.89	20.01	17.92	16.51
	810	1909.8	22.23	20.34	18.19	16.82

For SAR, the time based average power is relevant, the difference in between depends on the duty cycle of the TDMA signal.

Number of Time slot	1	2	3	4
Duty Cycle	1:8	1:4	1:2.66	1:2
Time based Ave. power compared to slotted Ave. power	-9 dB	-6 dB	-4.25 dB	-3 dB
Crest Factor	8	4	2.66	2

The time based average power for GPRS

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)			
			1 slot	2 slots	3 slots	4 slots
GSM 850	128	824.2	23.61	24.38	24.34	23.78
	190	836.6	23.51	24.46	24.35	23.81
	251	848.8	23.37	24.56	24.26	23.83
PCS 1900	512	1850.2	15.20	15.94	15.92	15.51
	661	1880	15.66	16.25	16.23	15.82
	810	1909.8	15.80	16.66	16.61	16.02

The time based average power for EDGE

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)			
			1 slot	2 slots	3 slots	4 slots
GSM 850	128	824.2	16.13	17.94	17.31	16.48
	190	836.6	16.05	17.80	17.19	16.37
	251	848.8	16.02	17.80	17.15	16.36
PCS 1900	512	1850.2	12.23	13.23	12.93	12.80
	661	1880	12.89	14.01	13.67	13.51
	810	1909.8	13.23	14.34	13.94	13.82

Note:

1. Rohde & Schwarz Radio Communication Tester (CMU500) was used for the measurement of GSM peak and average output power for active timeslots.
2. For GSM voice, 1 timeslot has been activated with power level 5 (850 MHz band) and 0 (1900 MHz band).
3. For GPRS, 1, 2, 3 and 4 timeslots has been activated separately with power level 2 (850 MHz band) and 3 (1900 MHz band).

WCDMA Band 2:

Test Condition	Test Mode	3GPP Sub Test	Averaged Mean Power (dBm)		
			Low Frequency	Mid Frequency	High Frequency
Normal	RMC12.2k		16.57	16.41	16.43
	HSDPA	1	16.62	16.49	16.24
		2	16.67	16.48	16.39
		3	16.61	16.49	16.49
		4	16.64	16.58	16.38
	HSUPA	1	16.65	16.64	16.41
		2	16.62	16.66	16.55
		3	15.95	16.44	16.44
		4	16.70	16.58	16.55
		5	16.60	16.61	16.59
	HSPA+	1	16.62	16.58	16.53

WCDMA Band 5:

Test Condition	Test Mode	3GPP Sub Test	Averaged Mean Power (dBm)		
			Low Frequency	Mid Frequency	High Frequency
Normal	RMC12.2k		23.52	23.4	23.49
	HSDPA	1	22.37	21.86	21.74
		2	22.44	22.19	21.85
		3	22.62	22.1	22.03
		4	22.53	22.3	22.12
	HSUPA	1	22.32	21.86	21.77
		2	22.4	22.04	21.72
		3	22.54	21.99	21.81
		4	22.68	22.15	21.86
		5	22.81	22.11	22.07
	HSPA+	1	21.86	21.84	21.83

Note:

1. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in Test Loop Model 1.
2. KDB 941225 D01-Body SAR is not required for HSDPA/HSUPA/ HSPA+ when the maximum average output of each RF channel is less than ¼ dB higher than measured 12.2kbps RMC or the maximum SAR for 12.2kbps RMC is < 75% of SAR limit.

LTE Band 2:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	RB1#0	0	0	15.87	16.15	16.03
		RB1#3	0	0	15.83	15.98	16.03
		RB1#5	0	0	15.72	15.97	16.03
		RB3#0	1	1	15.86	16.14	16.02
		RB3#3	1	1	15.82	15.97	16.02
		RB6#0	1	1	15.71	15.96	16.02
	16-QAM	RB1#0	1	1	15.64	15.87	15.64
		RB1#3	1	1	15.53	15.79	15.70
		RB1#5	1	1	15.56	15.81	15.66
		RB3#0	2	2	15.62	15.85	15.62
		RB3#3	2	2	15.51	15.77	15.68
		RB6#0	2	2	15.54	15.79	15.64
3M	QPSK	RB1#0	0	0	15.90	16.18	16.06
		RB1#8	0	0	15.86	16.01	16.06
		RB1#14	0	0	15.75	16.00	16.06
		RB6#0	1	1	15.82	16.03	15.97
		RB6#9	1	1	15.76	15.99	15.92
		RB15#0	1	1	15.74	15.79	15.72
	16-QAM	RB1#0	1	1	15.67	15.90	15.67
		RB1#8	1	1	15.56	15.82	15.73
		RB1#14	1	1	15.59	15.84	15.69
		RB6#0	2	2	15.45	15.78	15.53
		RB6#9	2	2	15.45	15.67	15.57
		RB15#0	2	2	15.41	15.72	15.48
5M	QPSK	RB1#0	0	0	15.93	16.21	16.09
		RB1#13	0	0	15.89	16.04	16.09
		RB1#24	0	0	15.78	16.03	16.09
		RB15#0	1	1	15.85	16.06	16.00
		RB15#10	1	1	15.79	16.02	15.95
		RB25#0	1	1	15.77	15.82	15.75
	16-QAM	RB1#0	1	1	15.70	15.93	15.70
		RB1#13	1	1	15.59	15.85	15.76
		RB1#24	1	1	15.62	15.87	15.72
		RB15#0	2	2	15.48	15.81	15.56
		RB15#10	2	2	15.48	15.70	15.60
		RB25#0	2	2	15.44	15.75	15.51
10M	QPSK	RB1#0	0	0	15.95	16.23	16.11
		RB1#25	0	0	15.91	16.06	16.11
		RB1#49	0	0	15.80	16.05	16.11
		RB25#0	1	1	15.87	16.08	16.02
		RB25#25	1	1	15.81	16.04	15.97
		RB50#0	1	1	15.79	15.84	15.77
	16-QAM	RB1#0	1	1	15.72	15.95	15.72
		RB1#25	1	1	15.61	15.87	15.78

		RB1#49	1	1	15.64	15.89	15.74
		RB25#0	2	2	15.50	15.83	15.58
		RB25#25	2	2	15.50	15.72	15.62
		RB50#0	2	2	15.46	15.77	15.53
15M	QPSK	RB1#0	0	0	15.98	16.26	16.14
		RB1#38	0	0	15.94	16.09	16.14
		RB1#74	0	0	15.83	16.08	16.14
		RB36#0	1	1	15.90	16.11	16.05
		RB36#39	1	1	15.84	16.07	16.00
		RB75#0	1	1	15.82	15.87	15.80
	16-QAM	RB1#0	1	1	15.75	15.98	15.75
		RB1#38	1	1	15.64	15.90	15.81
		RB1#74	1	1	15.67	15.92	15.77
		RB36#0	2	2	15.53	15.86	15.61
		RB36#39	2	2	15.53	15.75	15.65
		RB75#0	2	2	15.49	15.80	15.56
20M	QPSK	RB1#0	0	0	16.15	16.34	16.27
		RB1#50	0	0	16.10	16.29	16.24
		RB1#99	0	0	16.04	16.23	16.18
		RB50#0	1	1	15.96	16.20	16.11
		RB50#50	1	1	15.92	16.15	16.03
		RB100#0	1	1	15.86	16.08	15.94
	16-QAM	RB1#0	1	1	15.80	16.02	15.88
		RB1#50	1	1	15.77	15.99	15.85
		RB1#99	1	1	15.76	15.98	15.84
		RB50#0	2	2	15.68	15.90	15.76
		RB50#50	2	2	15.67	15.89	15.75
		RB100#0	2	2	15.62	15.84	15.70

LTE Band 5:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	RB1#0	0	0	23.00	23.07	22.93
		RB1#3	0	0	22.99	23.06	22.86
		RB1#5	0	0	22.96	22.95	22.87
		RB3#0	1	1	22.98	23.05	22.91
		RB3#3	1	1	22.97	23.04	22.84
		RB6#0	1	1	22.94	22.93	22.85
	16-QAM	RB1#0	1	1	22.72	22.73	22.66
		RB1#3	1	1	22.71	22.73	22.59
		RB1#5	1	1	22.75	22.71	22.57
		RB3#0	2	2	22.71	22.72	22.65
		RB3#3	2	2	22.70	22.72	22.58
		RB6#0	2	2	22.74	22.70	22.56
3M	QPSK	RB1#0	0	0	23.04	23.11	22.97
		RB1#8	0	0	23.03	23.10	22.90
		RB1#14	0	0	23.00	22.99	22.91
		RB6#0	1	1	22.85	22.91	22.81
		RB6#9	1	1	22.88	22.83	22.74
		RB15#0	1	1	22.79	22.78	22.68
	16-QAM	RB1#0	1	1	22.76	22.77	22.70
		RB1#8	1	1	22.75	22.77	22.63
		RB1#14	1	1	22.79	22.75	22.61
		RB6#0	2	2	22.42	22.46	22.32
		RB6#9	2	2	22.48	22.43	22.34
		RB15#0	2	2	22.35	22.42	22.28
5M	QPSK	RB1#0	0	0	23.10	23.17	23.03
		RB1#13	0	0	23.09	23.16	22.96
		RB1#24	0	0	23.06	23.05	22.97
		RB15#0	1	1	22.91	22.97	22.87
		RB15#10	1	1	22.94	22.89	22.80
		RB25#0	1	1	22.85	22.84	22.74
	16-QAM	RB1#0	1	1	22.82	22.83	22.76
		RB1#13	1	1	22.81	22.83	22.69
		RB1#24	1	1	22.85	22.81	22.67
		RB15#0	2	2	22.48	22.52	22.38
		RB15#10	2	2	22.54	22.49	22.40
		RB25#0	2	2	22.41	22.48	22.34
10M	QPSK	RB1#0	0	0	23.25	23.31	23.17
		RB1#25	0	0	23.19	23.28	23.10
		RB1#49	0	0	23.13	23.21	23.04
		RB25#0	1	1	23.06	23.13	22.99
		RB25#25	1	1	23.03	23.04	22.93
		RB50#0	1	1	22.98	22.99	22.90
	16-QAM	RB1#0	1	1	22.93	22.94	22.85
		RB1#25	1	1	22.90	22.91	22.82

		RB1#49	1	1	22.89	22.90	22.81
		RB25#0	2	2	22.60	22.61	22.52
		RB25#25	2	2	22.59	22.60	22.51
		RB50#0	2	2	22.54	22.55	22.46

LTE Band 7:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	RB1#0	0	0	16.22	16.17	16.08
		RB1#13	0	0	16.23	16.19	16.04
		RB1#24	0	0	16.16	16.12	16.00
		RB15#0	1	1	16.09	16.06	16.01
		RB15#10	1	1	16.04	16.03	16.01
		RB25#0	1	1	16.05	15.96	15.92
	16-QAM	RB1#0	1	1	16.01	15.99	15.89
		RB1#13	1	1	15.97	15.94	15.87
		RB1#24	1	1	16.00	15.90	15.87
		RB15#0	2	2	15.90	15.84	15.77
		RB15#10	2	2	15.89	15.86	15.75
		RB25#0	2	2	15.87	15.81	15.72
10M	QPSK	RB1#0	0	0	16.26	16.21	16.12
		RB1#25	0	0	16.27	16.23	16.08
		RB1#49	0	0	16.20	16.16	16.04
		RB25#0	1	1	16.13	16.10	16.05
		RB25#25	1	1	16.08	16.07	16.05
		RB50#0	1	1	16.09	16.00	15.96
	16-QAM	RB1#0	1	1	16.05	16.03	15.93
		RB1#25	1	1	16.01	15.98	15.91
		RB1#49	1	1	16.04	15.94	15.91
		RB25#0	2	2	15.94	15.88	15.81
		RB25#25	2	2	15.93	15.90	15.79
		RB50#0	2	2	15.91	15.85	15.76
15M	QPSK	RB1#0	0	0	16.32	16.27	16.18
		RB1#38	0	0	16.33	16.29	16.14
		RB1#74	0	0	16.26	16.22	16.10
		RB36#0	1	1	16.19	16.16	16.11
		RB36#39	1	1	16.14	16.13	16.11
		RB75#0	1	1	16.15	16.06	16.02
	16-QAM	RB1#0	1	1	16.11	16.09	15.99
		RB1#38	1	1	16.07	16.04	15.97
		RB1#74	1	1	16.10	16.00	15.97
		RB36#0	2	2	16.00	15.94	15.87
		RB36#39	2	2	15.99	15.96	15.85
		RB75#0	2	2	15.97	15.91	15.82
20M	QPSK	RB1#0	0	0	16.43	16.37	16.29
		RB1#50	0	0	16.41	16.34	16.25
		RB1#99	0	0	16.35	16.32	16.21

		RB50#0	1	1	16.30	16.30	16.18
		RB50#50	1	1	16.28	16.24	16.16
		RB100#0	1	1	16.23	16.17	16.11
	16-QAM	RB1#0	1	1	16.18	16.12	16.06
		RB1#50	1	1	16.15	16.09	16.03
		RB1#99	1	1	16.14	16.08	16.02
		RB50#0	2	2	16.06	16.00	15.94
		RB50#50	2	2	16.05	15.99	15.93
		RB100#0	2	2	16.00	15.94	15.88

LTE Band 12:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	RB1#0	0	0	23.10	22.97	22.97
		RB1#3	0	0	23.08	22.81	22.91
		RB1#5	0	0	22.96	22.84	22.90
		RB3#0	1	1	23.08	22.95	22.95
		RB3#3	1	1	23.06	22.79	22.89
		RB6#0	1	1	22.94	22.82	22.88
	16-QAM	RB1#0	1	1	22.74	22.61	22.61
		RB1#3	1	1	22.74	22.59	22.59
		RB1#5	1	1	22.74	22.55	22.61
		RB3#0	2	2	22.73	22.60	22.60
		RB3#3	2	2	22.73	22.58	22.58
		RB6#0	2	2	22.73	22.54	22.60
3M	QPSK	RB1#0	0	0	23.14	23.01	23.01
		RB1#8	0	0	23.12	22.85	22.95
		RB1#14	0	0	23.00	22.88	22.94
		RB6#0	1	1	22.94	22.74	22.83
		RB6#9	1	1	22.94	22.79	22.83
		RB15#0	1	1	22.84	22.69	22.64
	16-QAM	RB1#0	1	1	22.78	22.65	22.65
		RB1#8	1	1	22.78	22.63	22.63
		RB1#14	1	1	22.78	22.59	22.65
		RB6#0	2	2	22.70	22.54	22.53
		RB6#9	2	2	22.60	22.50	22.50
		RB15#0	2	2	22.55	22.41	22.38
5M	QPSK	RB1#0	0	0	23.20	23.07	23.07
		RB1#13	0	0	23.18	22.91	23.01
		RB1#24	0	0	23.06	22.94	23.00
		RB15#0	1	1	23.00	22.80	22.89
		RB15#10	1	1	23.00	22.85	22.89
		RB25#0	1	1	22.90	22.75	22.70
	16-QAM	RB1#0	1	1	22.84	22.71	22.71
		RB1#13	1	1	22.84	22.69	22.69
		RB1#24	1	1	22.84	22.65	22.71
		RB15#0	2	2	22.76	22.60	22.59

10M		RB15#10	2	2	22.66	22.56	22.56
		RB25#0	2	2	22.61	22.47	22.44
	QPSK	RB1#0	0	0	23.33	23.15	23.21
		RB1#25	0	0	23.26	23.07	23.15
		RB1#49	0	0	23.22	23.01	23.08
		RB25#0	1	1	23.12	22.96	23.01
		RB25#25	1	1	23.08	22.92	22.95
		RB50#0	1	1	23.02	22.86	22.85
	16-QAM	RB1#0	1	1	22.97	22.81	22.80
		RB1#25	1	1	22.94	22.78	22.77
		RB1#49	1	1	22.93	22.77	22.76
		RB25#0	2	2	22.80	22.64	22.63
		RB25#25	2	2	22.79	22.63	22.62
		RB50#0	2	2	22.74	22.58	22.57

LTE Band 41:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MP R	Meas M PR	Low Channel (dBm)	Low-Mid Channel (dBm)	Mid Channel (dBm)	Mid-High Channel (dBm)	High Channel (dBm)
5M	QPSK	RB1#0	0	0	17.27	17.31	17.31	17.14	17.20
		RB1#13	0	0	17.25	17.12	17.24	16.98	17.07
		RB1#24	0	0	17.10	17.07	17.16	16.87	17.00
		RB15#0	1	1	17.08	17.02	17.06	16.86	16.91
		RB15#10	1	1	17.05	16.96	17.05	16.78	16.87
		RB25#0	1	1	17.01	16.92	17.04	16.70	16.81
	16-QAM	RB1#0	1	1	16.96	16.88	16.99	16.65	16.77
		RB1#13	1	1	16.95	16.86	16.94	16.61	16.75
		RB1#24	1	1	16.94	16.70	16.76	16.52	16.64
		RB15#0	2	2	16.92	16.67	16.75	16.49	16.61
		RB15#10	2	2	16.90	16.53	16.73	16.43	16.44
		RB25#0	2	2	16.84	16.48	16.68	16.39	16.38
10M	QPSK	RB1#0	0	0	17.30	17.34	17.34	17.17	17.23
		RB1#25	0	0	17.28	17.15	17.27	17.01	17.10
		RB1#49	0	0	17.13	17.10	17.19	16.90	17.03
		RB25#0	1	1	17.11	17.05	17.09	16.89	16.94
		RB25#25	1	1	17.08	16.99	17.08	16.81	16.90
		RB50#0	1	1	17.04	16.95	17.07	16.73	16.84
	16-QAM	RB1#0	1	1	16.99	16.91	17.02	16.68	16.80
		RB1#25	1	1	16.98	16.89	16.97	16.64	16.78
		RB1#49	1	1	16.97	16.73	16.79	16.55	16.67
		RB25#0	2	2	16.95	16.70	16.78	16.52	16.64
		RB25#25	2	2	16.93	16.56	16.76	16.46	16.47
		RB50#0	2	2	16.87	16.51	16.71	16.42	16.41
15M	QPSK	RB1#0	0	0	17.34	17.38	17.38	17.21	17.27
		RB1#38	0	0	17.32	17.19	17.31	17.05	17.14
		RB1#74	0	0	17.17	17.14	17.23	16.94	17.07
		RB36#0	1	1	17.15	17.09	17.13	16.93	16.98

		RB36#39	1	1	17.12	17.03	17.12	16.85	16.94
		RB75#0	1	1	17.08	16.99	17.11	16.77	16.88
	16-QAM	RB1#0	1	1	17.03	16.95	17.06	16.72	16.84
		RB1#38	1	1	17.02	16.93	17.01	16.68	16.82
		RB1#74	1	1	17.01	16.77	16.83	16.59	16.71
		RB36#0	2	2	16.99	16.74	16.82	16.56	16.68
		RB36#39	2	2	16.97	16.60	16.80	16.50	16.51
		RB75#0	2	2	16.91	16.55	16.75	16.46	16.45
20M	QPSK	RB1#0	0	0	17.39	17.44	17.42	17.26	17.33
		RB1#50	0	0	17.38	17.25	17.37	17.11	17.20
		RB1#99	0	0	17.23	17.20	17.29	17.00	17.13
		RB50#0	1	1	17.21	17.15	17.19	16.99	17.04
		RB50#50	1	1	17.18	17.09	17.18	16.91	17.00
		RB100#0	1	1	17.14	17.05	17.17	16.83	16.94
	16-QAM	RB1#0	1	1	17.09	17.01	17.12	16.78	16.90
		RB1#50	1	1	17.08	16.99	17.07	16.74	16.88
		RB1#99	1	1	17.07	16.83	16.89	16.65	16.77
		RB50#0	2	2	17.05	16.80	16.88	16.62	16.74
		RB50#50	2	2	17.03	16.66	16.86	16.56	16.57
		RB100#0	2	2	17.02	16.65	16.84	16.54	16.55

The frequency range of LTE Band 41 is 2535 ~ 2655MHz. Per KDB 447498 D01, according to the following formula Calculate N_c is 4, We chose to test 5 frequency points.

KDB procedures, the following should be applied to determine the number of required test channels. The test channels should be evenly spread across the transmission frequency band of each wireless mode.¹⁴

$$N_c = \text{Round} \left\{ \left[100(f_{\text{high}} - f_{\text{low}}) / f_c \right]^{0.5} \times (f_c / 100)^{0.2} \right\},$$

where

- N_c is the number of test channels, rounded to the nearest integer,
- f_{high} and f_{low} are the highest and lowest channel frequencies within the transmission band,
- f_c is the mid-band channel frequency,
- all frequencies are in MHz.

Bluetooth:

Mode	Channel frequency (MHz)	RF Output Power (dBm)
BDR(GFSK)	2402	1.58
	2441	2.38
	2480	0.84
EDR($\pi/4$ -DQPSK)	2402	1.09
	2441	2.11
	2480	0.95
EDR(8DPSK)	2402	1.40
	2441	2.57
	2480	1.32
BLE(1M)	2402	-0.06
	2440	0.32
	2480	-1.19
BLE(2M)	2402	-0.26
	2440	0.38
	2480	-1.25

Wi-Fi 2.4G:

Mode	Channel frequency (MHz)	Data Rate	Conducted Average Output Power(dBm)
802.11b	2412	1Mbps	10.04
	2437		9.91
	2462		10.01
802.11g	2412	6Mbps	10.07
	2437		9.12
	2462		9.66
802.11n HT20	2412	MCS0	10.15
	2437		9.13
	2462		9.73
802.11n HT40	2422	MCS0	9.27
	2437		8.93
	2452		10.06

WLAN 5G:

Mode	Channel frequency	Data Rate	RF Output Power(dBm)
802.11a	5180	6Mbps	9.57
	5200		9.27
	5240		9.35
802.11AC20	5180	MCS0	9.43
	5200		9.22
	5240		9.24
802.11AC40	5190	MCS0	9.61
	5230		8.99
802.11AC80	5210	MCS0	9.81

Mode	Channel frequency	Data Rate	RF Output Power(dBm)
802.11a	5745	6Mbps	8.19
	5785		8.17
	5825		8.81
802.11AC20	5745	MCS0	8.14
	5785		8.83
	5825		8.84
802.11AC40	5755	MCS0	7.70
	5795		8.04
802.11AC80	5775	MCS0	8.26


Duty Cycle:

Test Mode	Duty Cycle [%]
802.11b	98.24
802.11g	89.03
802.11n-HT20	88.44
802.11n-HT40	78.75
BLE 1M	87.70
BLE 2M	65.60
802.11A	89.10
802.11AC-VHT20	89.73
802.11AC-VHT40	81.25
802.11AC-VHT80	65.31

Note: Duty cycle data is derived from radio reports.

Standalone SAR test exclusion considerations

Antennas Location:

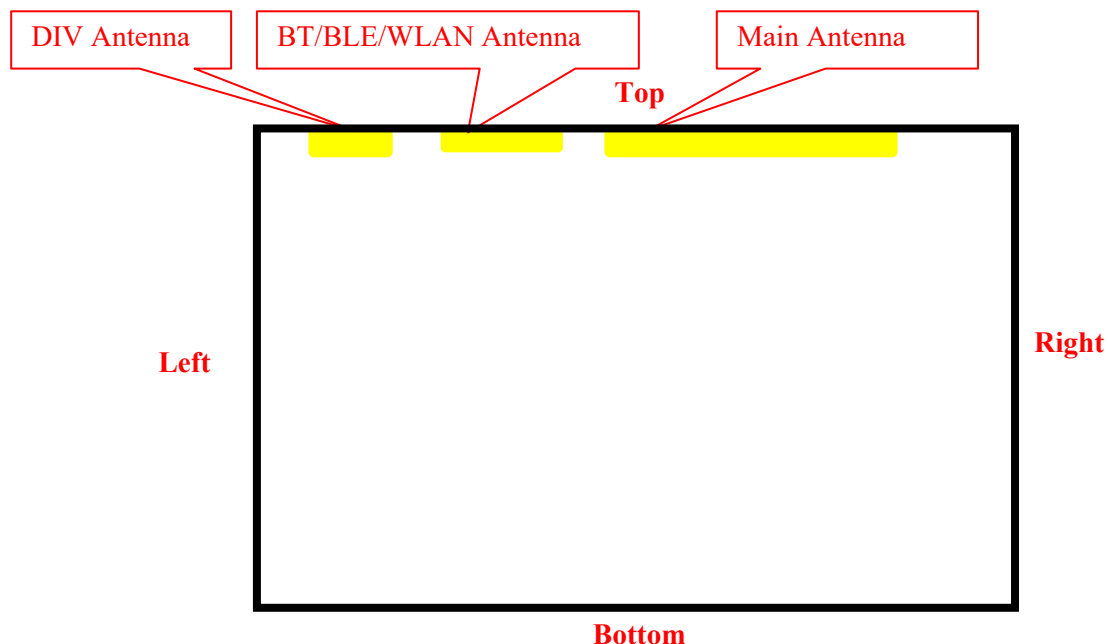

EUT Front View

Note: The DIV antenna can only receive.

Antenna Distance To Edge:

Antenna Distance To Edge(mm)						
Antenna	Front	Back	Left	Right	Top	Bottom
Main Antenna	< 5	< 5	52	118	< 5	150
BT/BLE/WLAN Antenna	< 5	< 5	164	65	< 5	152

Standalone SAR test exclusion considerations:

Mode	Frequency (MHz)	Output Power (dBm)	Output Power (mW)	Distance (mm)	Calculated value	Threshold (1-g)	SAR Test Exclusion
2.4G WLAN	2462	11.0	12.59	0	4.0	3	No
5.2G WLAN	5240	10.0	10.00	0	4.6	3	No
5.8G WLAN	5825	9.0	7.94	0	3.8	3	No
Bluetooth	2480	3.0	2.00	0	0.6	3	Yes

NOTE:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot$

$[\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz.

2. Power and distance are rounded to the nearest mW and mm before calculation.

3. The result is rounded to one decimal place for comparison.

4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

Standalone SAR estimation:

Mode	Frequency (MHz)	Output Power (dBm)	Output Power (mW)	Distance (mm)	Estimated 1-g (W/kg)
BT Body	2480	3.0	2.0	0	0.08

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot$

$[\sqrt{f(\text{GHz})/x}]$

W/kg for test separation distances ≤ 50 mm;

where $x = 7.5$ for 1-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion

Standalone SAR test exclusion considerations:

According to KDB 616217 Section 4.3, SAR evaluation for the front surface of tablet display screens are generally not necessary.

Mode	Back	Left	Right	Top	Bottom
2.4G Wi-Fi	Required	Exclusion	Exclusion	Required	Exclusion
5G Wi-Fi	Required	Exclusion	Exclusion	Required	Exclusion
WWAN	Required	Exclusion	Exclusion	Required	Exclusion
Bluetooth	Exclusion*	Exclusion*	Exclusion*	Exclusion*	Exclusion*

Note:

Required: The distance to Edge is less than 25mm, testing is required.

Exclusion: The distance to Edge is more than 25 mm, testing is not required.

Exclusion*: SAR test exclusion evaluation has been done above.

SAR MEASUREMENT RESULTS

This page summarizes the results of the performed dosimetric evaluation.

SAR Test Data

Environmental Conditions

Temperature:	22.8-23.6 °C	23.1-23.9 °C	23.1-23.9 °C
Relative Humidity:	52-62 %	46-57 %	45-59 %
ATM Pressure:	101 kPa	101 kPa	101 kPa
Test Date:	2023/06/08	2023/06/09	2023/06/10

Testing was performed by Jacky Yang, Ryse Chai.

GSM 850 :

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Worn Back (0mm)	824.2	GSM	/	/	/	/	/	/
	836.6	GSM	32.60	33.0	1.096	0.589	0.65	1#
	848.8	GSM	/	/	/	/	/	/
Body Back (0mm)	824.2	GPRS	30.38	31.0	1.153	0.605	0.70	2#
	836.6	GPRS	30.46	31.0	1.132	0.651	0.74	3#
	848.8	GPRS	30.56	31.0	1.107	0.585	0.65	4#
Body Top (0mm)	824.2	GPRS	/	/	/	/	/	/
	836.6	GPRS	30.46	31.0	1.132	0.618	0.70	5#
	848.8	GPRS	/	/	/	/	/	/

Note:

1. The EUT transmit and receive through the same GSM antenna while testing SAR.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
3. When the maximum output power variation across the required test channels is > 0.5 dB, instead of the middle channel, the highest output power channel must be used.
4. The Multi-slot Classes of EUT is Class 12 which has maximum 4 Downlink slots and 4 Uplink slots, the maximum active slots is 5, when perform the multiple slots scan, 3DL+2UL is the worst case.

PCS 1900 :

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Worn Back (0mm)	1850.2	GSM	/	/	/	/	/	/
	1880	GSM	24.60	25.0	1.096	0.703	0.77	6#
	1909.8	GSM	/	/	/	/	/	/
Body Back (0mm)	1850.2	GPRS	21.94	23.0	1.276	0.69	0.88	7#
	1880	GPRS	22.25	23.0	1.189	0.794	0.94	8#
	1909.8	GPRS	22.66	23.0	1.081	0.796	0.86	9#
Body Top (0mm)	1850.2	GPRS	21.94	23.0	1.276	0.77	0.98	10#
	1880	GPRS	22.25	23.0	1.189	0.864	1.03	11#
	1909.8	GPRS	22.66	23.0	1.081	0.797	0.86	12#

Note:

1. The EUT transmit and receive through the same GSM antenna while testing SAR.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
3. When the maximum output power variation across the required test channels is > 0.5 dB, instead of the middle channel, the highest output power channel must be used.
4. The Multi-slot Classes of EUT is Class 12 which has maximum 4 Downlink slots and 4 Uplink slots, the maximum active slots is 5, when perform the multiple slots scan, 3DL+2UL is the worst case.

WCDMA Band 2 :

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Back (0mm)	1852.4	RMC	/	/	/	/	/	/
	1880	RMC	16.41	17.0	1.146	0.684	0.78	13#
	1907.6	RMC	/	/	/	/	/	/
Body Top (0mm)	1852.4	RMC	16.57	17.0	1.104	0.856	0.95	14#
	1880	RMC	16.41	17.0	1.146	0.869	1.00	15#
	1907.6	RMC	16.43	17.0	1.140	0.797	0.91	16#

WCDMA Band 5 :

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Back (0mm)	826.4	RMC	23.52	24.0	1.117	0.648	0.72	17#
	836.6	RMC	23.40	24.0	1.148	0.626	0.72	18#
	846.6	RMC	23.49	24.0	1.125	0.695	0.78	19#
Body Top (0mm)	826.4	RMC	/	/	/	/	/	/
	836.6	RMC	23.40	24.0	1.148	0.623	0.72	20#
	846.6	RMC	/	/	/	/	/	/

Note:

1. The EUT transmit and receive through the same antenna while testing SAR.
2. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in Test Loop Model.
3. KDB 941225 D01-Body SAR is not required for HSDPA/HSUPA/ HSPA+ when the maximum average output of each RF channel is less than ¼ dB higher than measured 12.2kbps RMC or the maximum SAR for 12.2kbps RMC is < 75% of SAR limit.
4. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.

LTE Band 2 :

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Back (0mm)	1860	20	1RB	16.15	17.0	1.216	0.763	0.93	21#
	1880	20	1RB	16.34	17.0	1.164	0.727	0.85	22#
	1900	20	1RB	16.27	17.0	1.183	0.612	0.72	23#
	1880	20	50%RB	16.29	17.0	1.178	0.614	0.72	24#
	1880	20	100%RB	16.23	17.0	1.194	0.536	0.64	25#
Body Top (0mm)	1860	20	1RB	16.15	17.0	1.216	0.872	1.06	26#
	1880	20	1RB	16.34	17.0	1.164	0.96	1.12	27#
	1900	20	1RB	16.27	17.0	1.183	0.702	0.83	28#
	1880	20	50%RB	16.29	17.0	1.178	0.588	0.69	29#
	1880	20	100%RB	16.23	17.0	1.194	0.686	0.82	30#

LTE Band 5 :

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Back (0mm)	829	10	1RB	/	/	/	/	/	/
	836.5	10	1RB	23.31	24.0	1.172	0.669	0.78	31#
	844	10	1RB	/	/	/	/	/	/
	836.5	10	50%RB	23.28	24.0	1.180	0.507	0.60	32#
Body Top (0mm)	829	10	1RB	23.25	24.0	1.189	0.703	0.84	33#
	836.5	10	1RB	23.31	24.0	1.172	0.745	0.87	34#
	844	10	1RB	23.17	24.0	1.211	0.713	0.86	35#
	836.5	10	50%RB	23.28	24.0	1.180	0.58	0.68	36#
	836.5	10	100%RB	23.21	24.0	1.199	0.568	0.68	37#

LTE Band 7 :

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Back (0mm)	2510	20	1RB	16.43	16.5	1.016	0.993	1.01	38#
	2535	20	1RB	16.37	16.5	1.030	1.07	1.10	39#
	2560	20	1RB	16.29	16.5	1.050	1.07	1.12	40#
	2510	20	50%RB	16.41	16.5	1.021	0.87	0.89	41#
	2535	20	50%RB	16.34	16.5	1.038	0.903	0.94	42#
	2560	20	50%RB	16.25	16.5	1.059	0.999	1.06	43#
	2535	20	100%RB	16.32	16.5	1.042	0.859	0.90	44#
Body Top (0mm)	2510	20	1RB	/	/	/	/	/	/
	2535	20	1RB	16.37	16.5	1.030	0.668	0.69	45#
	2560	20	1RB	/	/	/	/	/	/
	2535	20	50%RB	16.34	16.5	1.038	0.68	0.71	46#

LTE Band 12 :

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Back (0mm)	704	10	1RB	23.33	24.0	1.167	0.706	0.82	47#
	707.5	10	1RB	23.15	24.0	1.216	0.703	0.85	48#
	711	10	1RB	23.21	24.0	1.199	0.692	0.83	49#
	707.5	10	50%RB	23.07	24.0	1.239	0.648	0.80	50#
Body Top (0mm)	704	10	1RB	/	/	/	/	/	/
	707.5	10	1RB	23.15	24.0	1.216	0.649	0.79	51#
	711	10	1RB	/	/	/	/	/	/
	707.5	10	50%RB	23.07	24.0	1.239	0.567	0.70	52#

LTE Band 41 (Power Class 3):

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Back (0mm)	2545	20	1RB	17.39	17.5	1.026	1.15	1.18	53#
	2570	20	1RB	17.44	17.5	1.014	0.994	1.01	54#
	2595	20	1RB	17.42	17.5	1.019	1.1	1.12	55#
	2620	20	1RB	17.26	17.5	1.057	1.08	1.14	56#
	2645	20	1RB	17.33	17.5	1.040	1.02	1.06	57#
	2545	20	50%RB	17.38	17.5	1.028	1.06	1.09	58#
	2570	20	50%RB	17.25	17.5	1.059	0.938	0.99	59#
	2595	20	50%RB	17.37	17.5	1.030	1.04	1.07	60#
	2620	20	50%RB	17.11	17.5	1.094	1.07	1.17	61#
	2645	20	50%RB	17.20	17.5	1.072	0.937	1.00	62#
	2595	20	100%RB	17.29	17.5	1.050	1.05	1.10	63#
Body Top (0mm)	2545	20	1RB	/	/	/	/	/	/
	2570	20	1RB	/	/	/	/	/	/
	2595	20	1RB	17.42	17.5	1.019	0.648	0.66	64#
	2620	20	1RB	/	/	/	/	/	/
	2645	20	1RB	/	/	/	/	/	/
	2595	20	50%RB	17.37	17.5	1.030	0.683	0.70	65#

Note:

1. SAR for LTE band exposure configurations is measured according to the procedures of KDB 941225 D05 SAR for LTE Devices v02.
2. KDB941225D05-SAR for higher order modulation is required only when the highest maximum output power for the configuration in the higher order modulation is > 0.5 dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg
3. KDB941225D05-For QPSK with 100% RB allocation, when the reported SAR measured for the Highest output power channel is <1.45 W/kg, tests for the remaining required test channels are optional.
4. KDB941225D05- For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg.
5. KDB941225D05- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offset the upper edge, middle and lower edge of each required test channel.
6. KDB941225D05- other channel bandwidths SAR test is required when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is > 0.5 dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.
7. Worst case SAR for 50% RB allocation is selected to be tested.
8. From May 2017 TCB Workshop, SAR tested were performed using Power Class 3 and maximum output power (Tune-up Limit) PC3 is higher from PC2.

WLAN:

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	Scaled Factor	1g SAR (W/kg)			
						Duty Cycle (%)	Meas. SAR	Scaled SAR	Plot
Body Back (0mm)	2412	802.11b	10.04	11.0	1.247	98.24	0.206	0.26	66#
	2437	802.11b	9.91	11.0	1.285	98.24	0.149	0.19	67#
	2462	802.11b	10.01	11.0	1.256	98.24	0.231	0.30	68#
Body Top (0mm)	2412	802.11b	/	/	/	/	/	/	/
	2437	802.11b	9.91	11.0	1.285	98.24	0.083	0.11	69#
	2462	802.11b	/	/	/	/	/	/	/

Note:

1. For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure. When OFDM tune up power is greater than DSSS, the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, OFDM SAR is not required.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
3. When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11b/g/n mode is use for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.
4. According 2016 Oct. TCB, for SAR testing of 2.4G WIFI 802.11b signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)".

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	Scaled Factor	1g SAR (W/kg)			
						Duty Cycle (%)	Meas. SAR	Scaled SAR	Plot
Body Back (0mm)	5180	802.11a	9.57	10.0	1.104	89.10	0.144	0.18	70#
	5200	802.11a	9.27	10.0	1.183	89.10	0.151	0.20	71#
	5240	802.11a	9.35	10.0	1.161	89.10	0.137	0.18	72#
Body Top (0mm)	5180	802.11a	/	/	/	/	/	/	/
	5200	802.11a	9.27	10.0	1.183	89.10	0.150	0.20	73#
	5240	802.11a	/	/	/	/	/	/	/

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	Scaled Factor	1g SAR (W/kg)			
						Duty Cycle (%)	Meas. SAR	Scaled SAR	Plot
Body Back (0mm)	5745	802.11a	8.19	9.0	1.205	89.10	0.274	0.37	74#
	5785	802.11a	8.17	9.0	1.211	89.10	0.225	0.31	75#
	5825	802.11a	8.81	9.0	1.045	89.10	0.221	0.26	76#
Body Top (0mm)	5745	802.11a	/	/	/	/	/	/	/
	5785	802.11a	8.17	9.0	1.211	89.10	0.116	0.16	77#
	5825	802.11a	/	/	/	/	/	/	/

Note:

1. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance
2. When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/n20/n40/ac20/ac40/ac80 mode is use for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band, 802.11a is the initial position for the SAR test.
2. According 2016 Oct. TCB, for SAR testing of 5G WIFI 802.11a signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)".

SAR Measurement Variability

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz v01. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

The Highest Measured SAR Configuration in Each Frequency Band

Body

SAR probe calibration point	Frequency Band	Freq.(MHz)	EUT Position	Meas. SAR (W/kg)		Largest to Smallest SAR Ratio
				Original	Repeated	
1900 MHz (1850-1950MHz)	PCS 1900	1880	Body Top	0.864	0.811	1.07
1900 MHz (1850-1950MHz)	WCDMA Band 2	1880	Body Top	0.869	0.855	1.02
1900 MHz (1850-1950MHz)	LTE Band 2	1880	Body Top	0.96	0.924	1.04
2450 MHz (2400-2550MHz)	LTE Band 7	2535	Body Back	1.07	1.03	1.04
2600 MHz (2550-2700MHz)	LTE Band 41	2545	Body Back	1.15	1.08	1.06

Note:

1. Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20 .
2. The measured SAR results **do not** have to be scaled to the maximum tune-up tolerance to determine if repeated measurements are required.
3. SAR measurement variability must be assessed for each frequency band, which is determined by the **SAR probe calibration point and tissue-equivalent medium** used for the device measurements.

SAR SIMULTANEOUS TRANSMISSION DESCRIPTION

Simultaneous Transmission:

Description of Simultaneous Transmit Capabilities		
Transmitter Combination	Simultaneous?	Hotspot?
WWAN + Bluetooth	√	×
WWAN + WLAN	√	√
WLAN + Bluetooth	×	×

Simultaneous and Hotspot SAR test exclusion considerations:

Mode(SAR1+SAR2)	Position	Reported SAR(W/kg)		$\Sigma SAR < 1.6W/kg$
		SAR1	SAR2	
WWAN+WLAN	Body	1.18	0.37	1.55
WWAN+BT	Body	1.18	0.08	1.26

Conclusion:

Sum of SAR: $\Sigma SAR \leq 1.6 W/kg$ therefore simultaneous transmission SAR with SPLSR is **not required**.

SAR Plots

Please Refer to the Attachment.

APPENDIX A MEASUREMENT UNCERTAINTY

The uncertainty budget has been determined for the measurement system and is given in the following Table.

Measurement uncertainty evaluation for IEEE1528-2013 SAR test

Source of uncertainty	Tolerance/ uncertainty ± %	Probability distribution	Divisor	ci (1 g)	ci (10 g)	Standard uncertainty ± %, (1 g)	Standard uncertainty ± %, (10 g)
Measurement system							
Probe calibration	6.55	N	1	1	1	6.6	6.6
Axial Isotropy	4.7	R	$\sqrt{3}$	1	1	2.7	2.7
Hemispherical Isotropy	9.6	R	$\sqrt{3}$	0	0	0.0	0.0
Boundary effect	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Linearity	4.7	R	$\sqrt{3}$	1	1	2.7	2.7
Detection limits	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Readout electronics	0.3	N	1	1	1	0.3	0.3
Response time	0.0	R	$\sqrt{3}$	1	1	0.0	0.0
Integration time	0.0	R	$\sqrt{3}$	1	1	0.0	0.0
RF ambient conditions – noise	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
RF ambient conditions–reflections	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Probe positioner mech. Restrictions	0.8	R	$\sqrt{3}$	1	1	0.5	0.5
Probe positioning with respect to phantom shell	6.7	R	$\sqrt{3}$	1	1	3.9	3.9
Post-processing	2.0	R	$\sqrt{3}$	1	1	1.2	1.2
Test sample related							
Test sample positioning	2.8	N	1	1	1	2.8	2.8
Device holder uncertainty	6.3	N	1	1	1	6.3	6.3
Drift of output power	5.0	R	$\sqrt{3}$	1	1	2.9	2.9
Phantom and set-up							
Phantom uncertainty (shape and thickness tolerances)	4.0	R	$\sqrt{3}$	1	1	2.3	2.3
Liquid conductivity target)	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2
Liquid conductivity meas.)	2.5	N	1	0.64	0.43	1.6	1.1
Liquid permittivity target)	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4
Liquid permittivity meas.)	2.5	N	1	0.6	0.49	1.5	1.2
Combined standard uncertainty		RSS				12.2	12.0
Expanded uncertainty 95 % confidence interval)						24.3	23.9

APPENDIX B EUT TEST POSITION PHOTOS

Please Refer to the Attachment.

APPENDIX C PROBE CALIBRATION CERTIFICATES

Please Refer to the Attachment.

APPENDIX D DIPOLE CALIBRATION CERTIFICATES

Please Refer to the Attachment.

******* END OF REPORT *******