

## The Photos of SAR test

No. I18Z61354-SEM01

For

**FOXX** Development Inc.

mobile phone

Model Name: L590A

With

Hardware Version: L590MB V0.4

Software Version: R02.V04

FCC ID: 2AQRMFXMC52401



## Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S.Government.

## **Test Laboratory:**

CTTL, Telecommunication Technology Labs, CAICT


No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: <a href="mailto:cttl">cttl</a> terminals@caict.ac.cn, website: <a href="mailto:www.caict.ac.cn">www.caict.ac.cn</a>




Picture - 1 Constituents of the sample

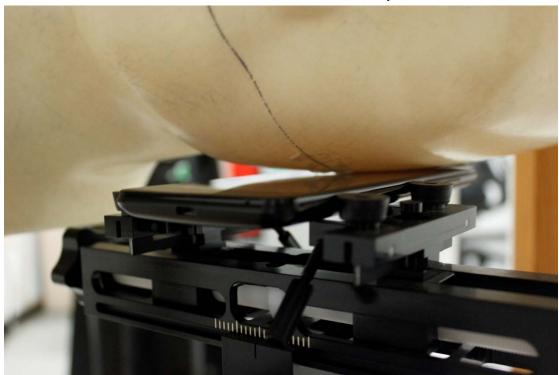


Picture - 2 Left Hand Touch Cheek Position



Picture - 3 Left Hand Tilt 15° Position

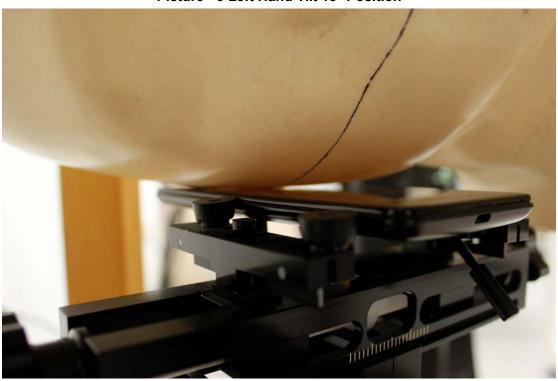


Picture - 4 Right Hand Touch Cheek Position

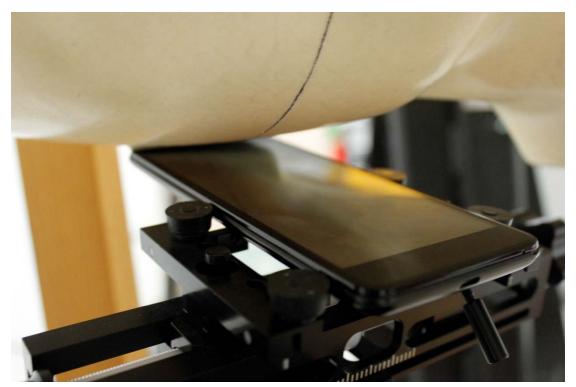


Picture - 5 Right Hand Tilt 15° Position

## Test positions for body:


The Body SAR is tested at the following 8 test positions all with the distance =10/0 mm between the EUT and the phantom bottom:

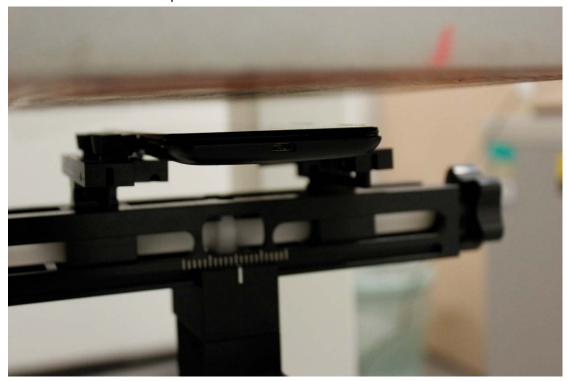


Picture - 6 Front

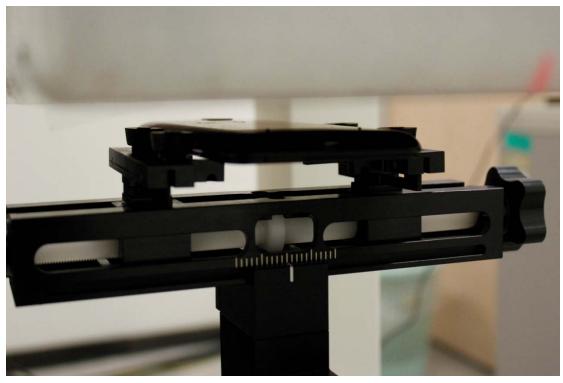


Picture - 7 Rear

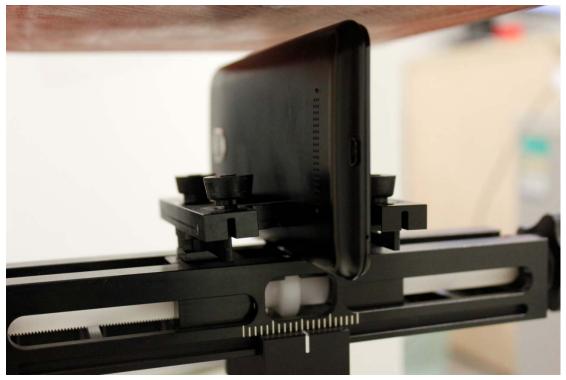

Picture - 8 Left edge

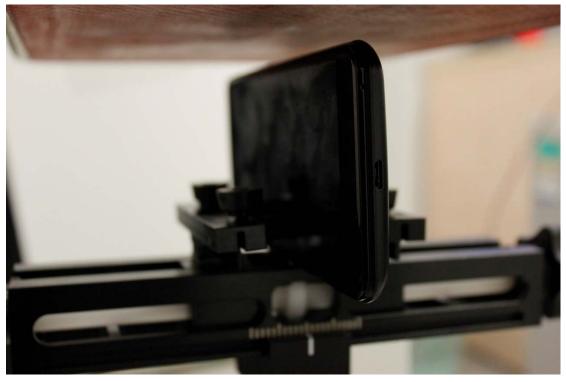


Picture - 9 Right edge

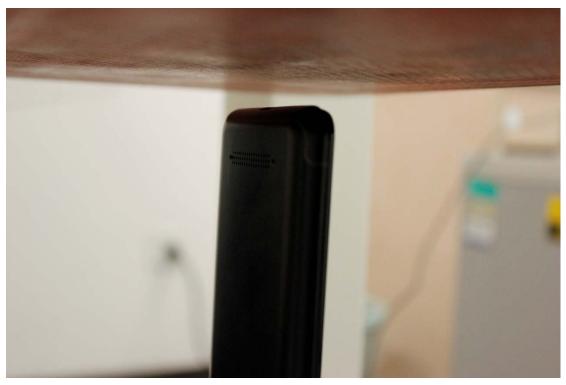

Picture - 10 Bottom edge



Picture - 11 Top edge

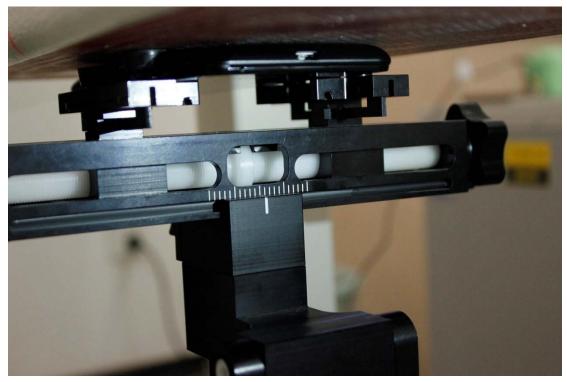

Picture - 12 Rear 0mm



Picture - 13 Bottom edge 0mm