




11AC40MIMO_Ant3_5230_5360~40000

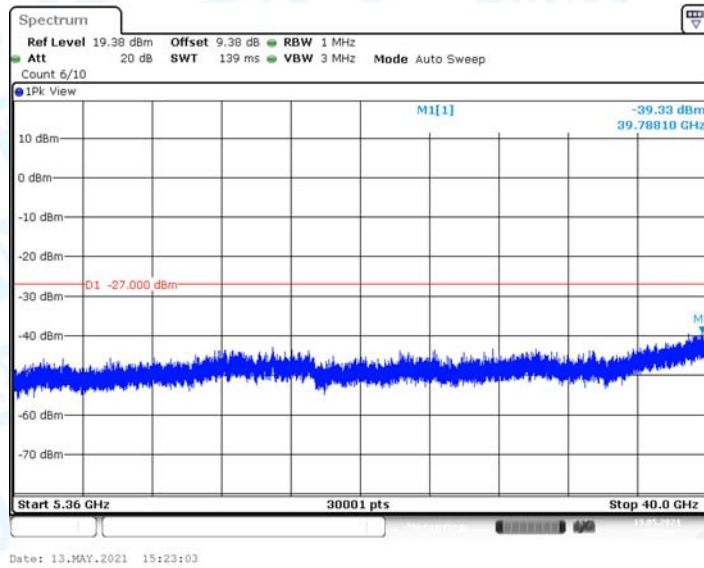


11AC40MIMO_Ant4_5230_30~5140

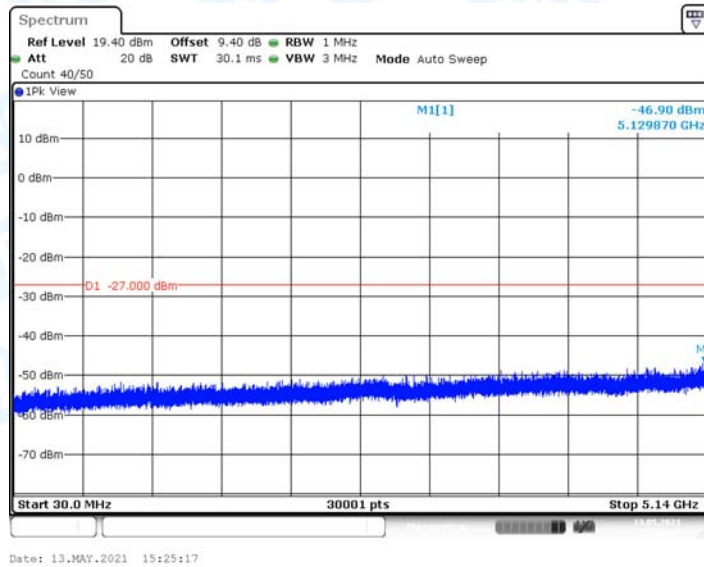


11AC40MIMO_Ant4_5230_5360~40000

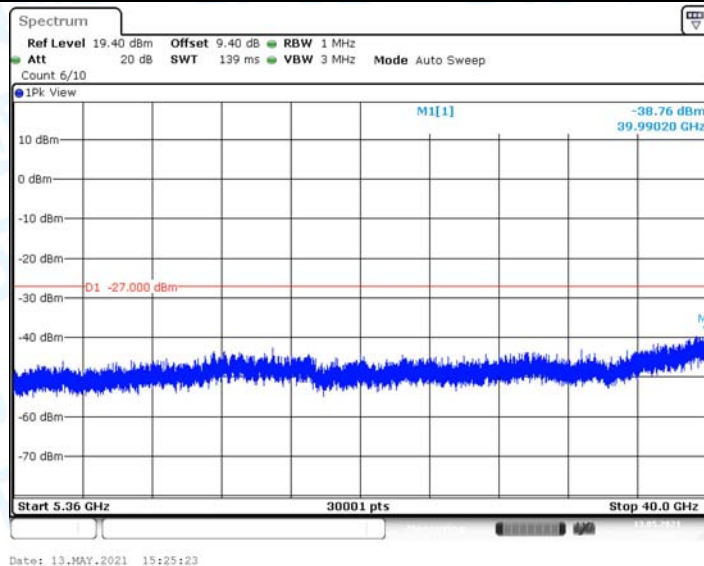


11AC40MIMO_Ant3_5755_30~1000

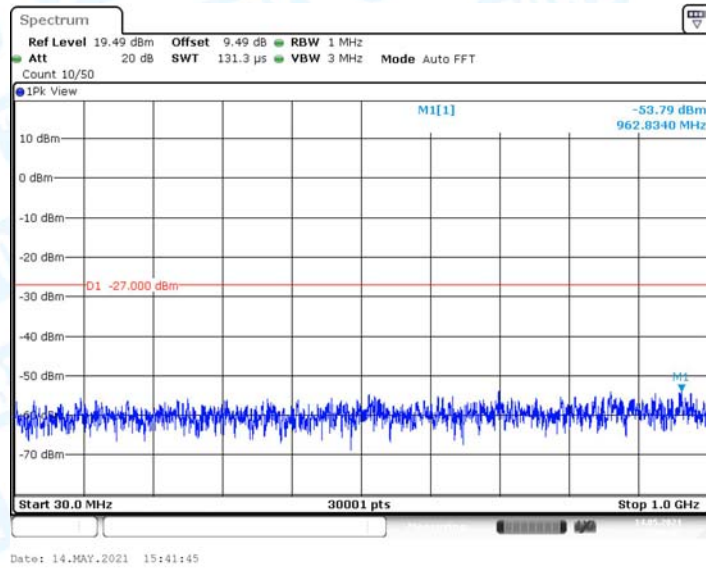


11AC40MIMO_Ant3_5755_1000~40000

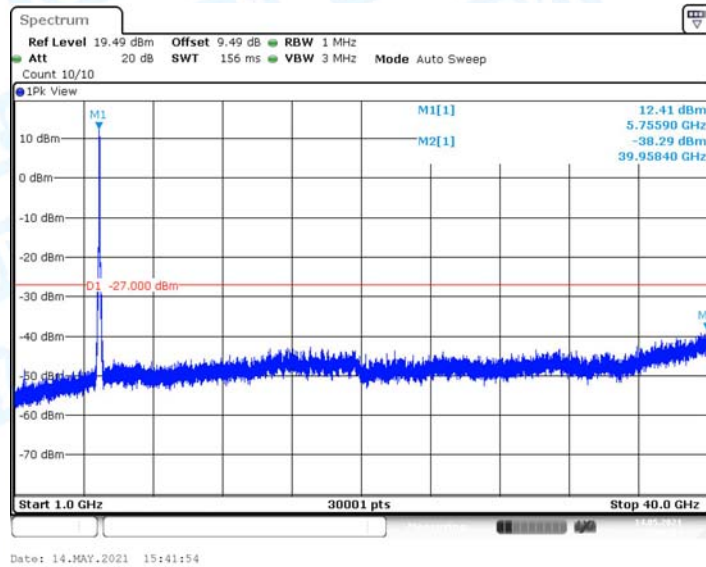


11AC40MIMO_Ant4_5755_30~1000

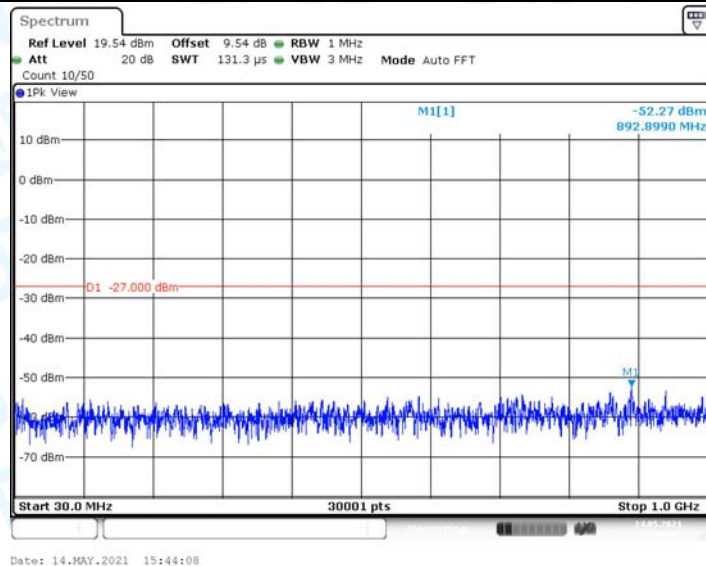


11AC40MIMO_Ant4_5755_1000~40000

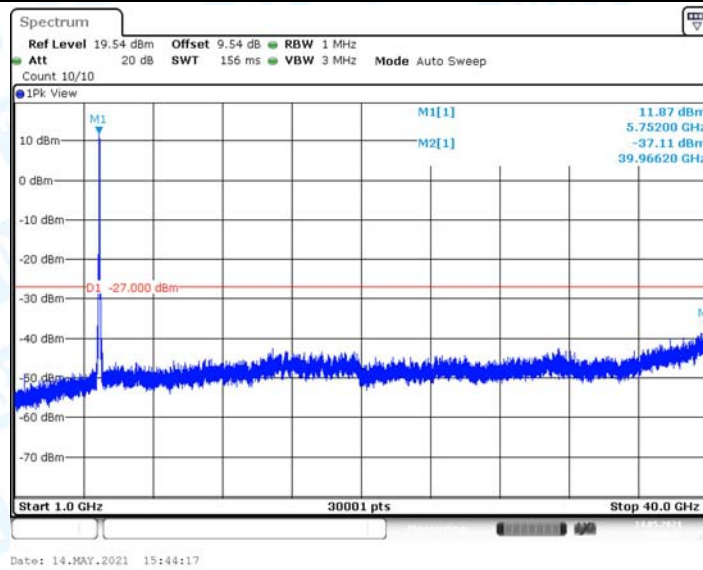


11AC40MIMO_Ant3_5795_30~1000

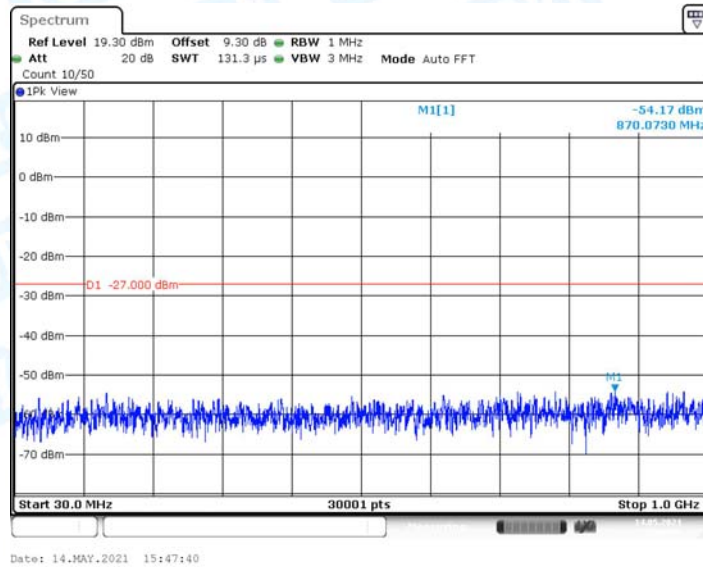


11AC40MIMO_Ant3_5795_1000~40000

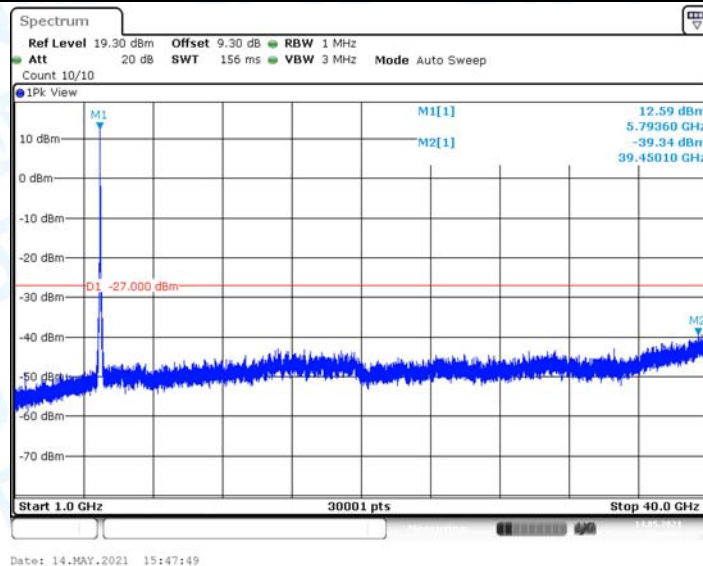


11AC40MIMO_Ant4_5795_30~1000

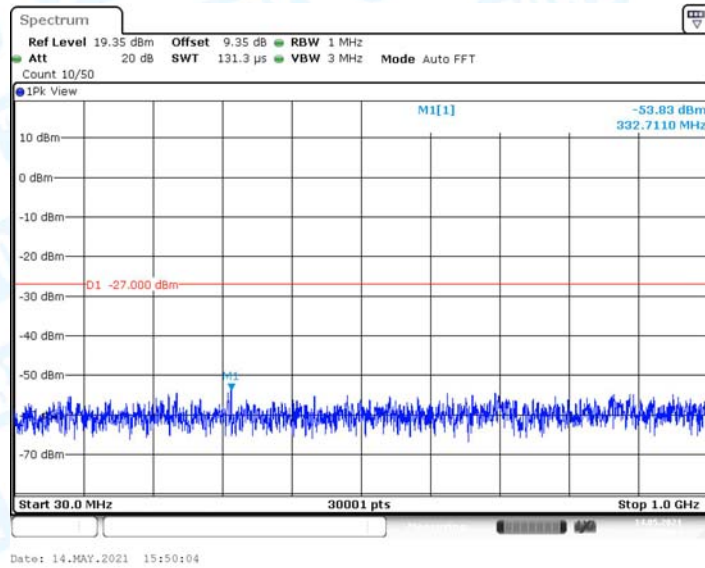


11AC40MIMO_Ant4_5795_1000~40000

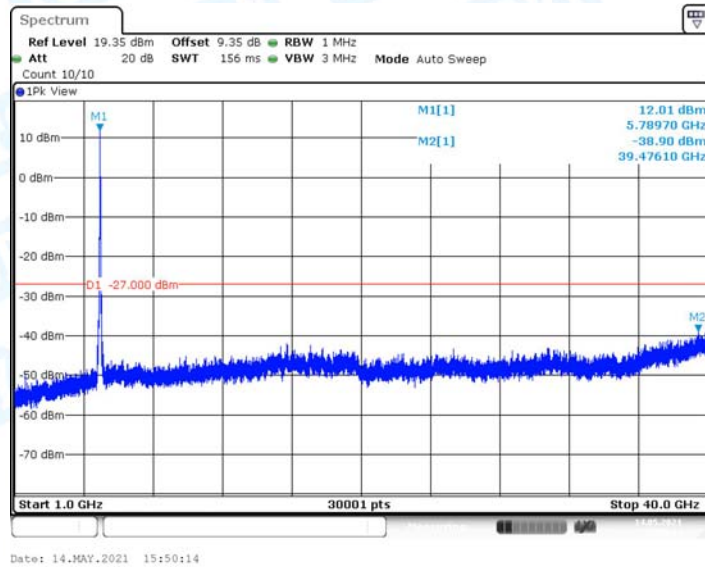


11AC80MIMO_Ant3_5210_30~5140

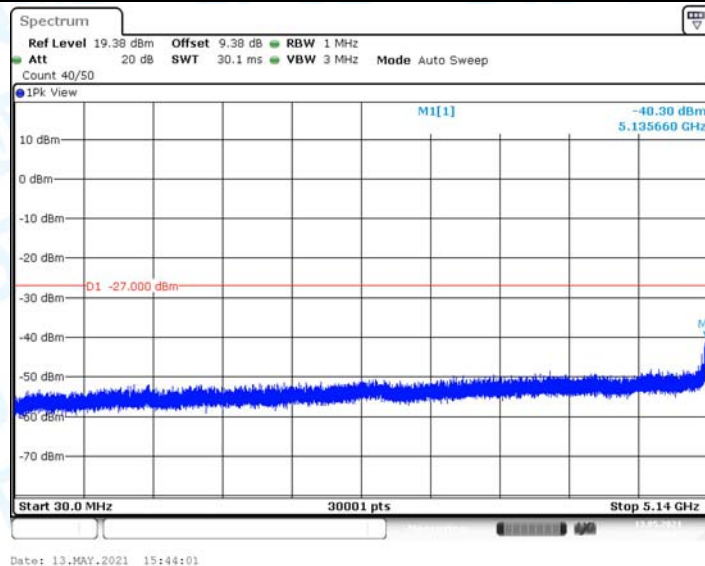


11AC80MIMO_Ant3_5210_5360~40000

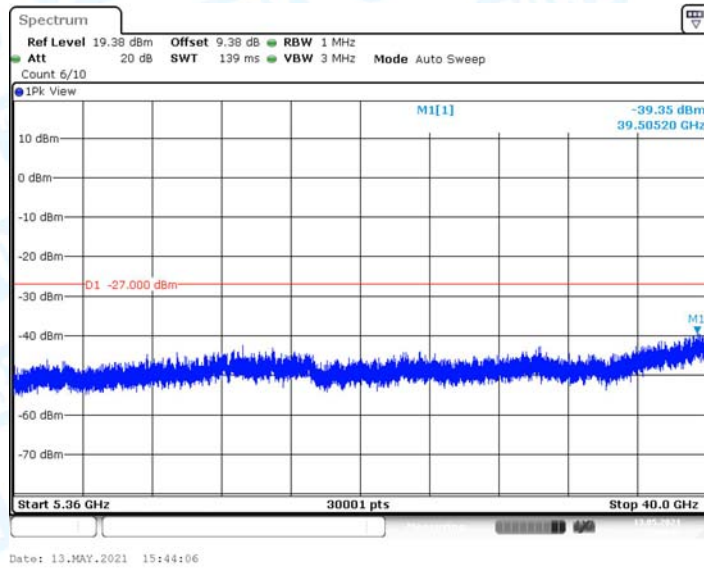


11AC80MIMO_Ant4_5210_30~5140

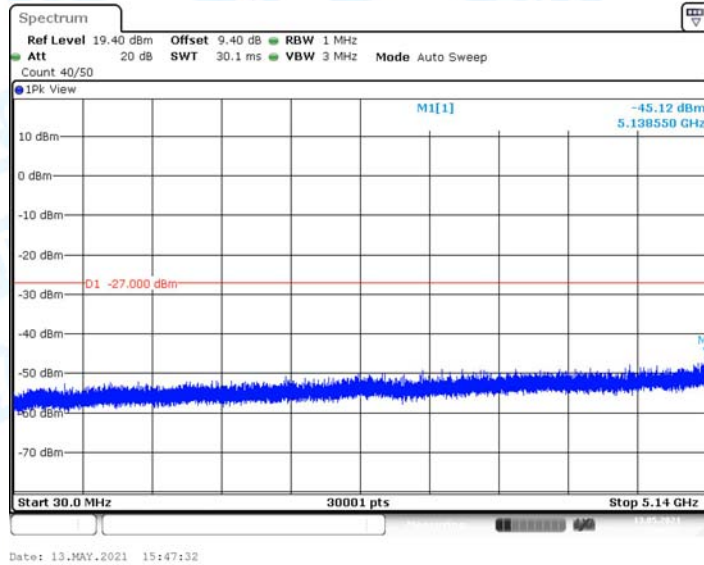


11AC80MIMO_Ant4_5210_5360~40000

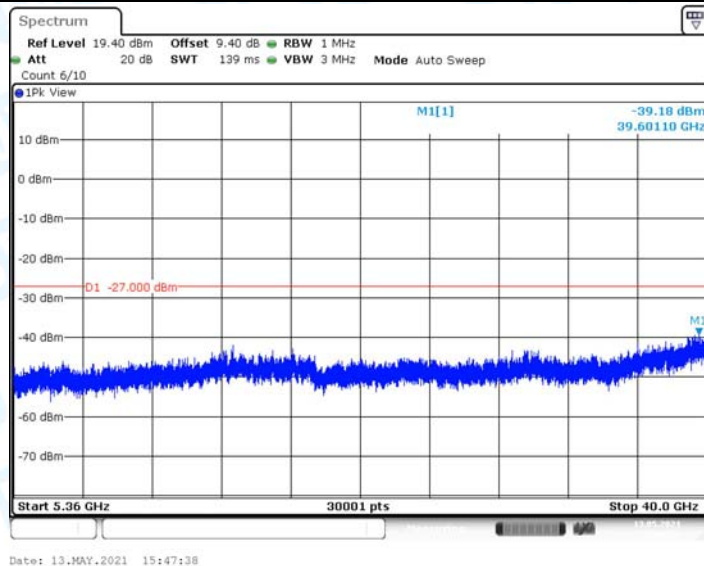


11AC80MIMO_Ant3_5775_30~1000

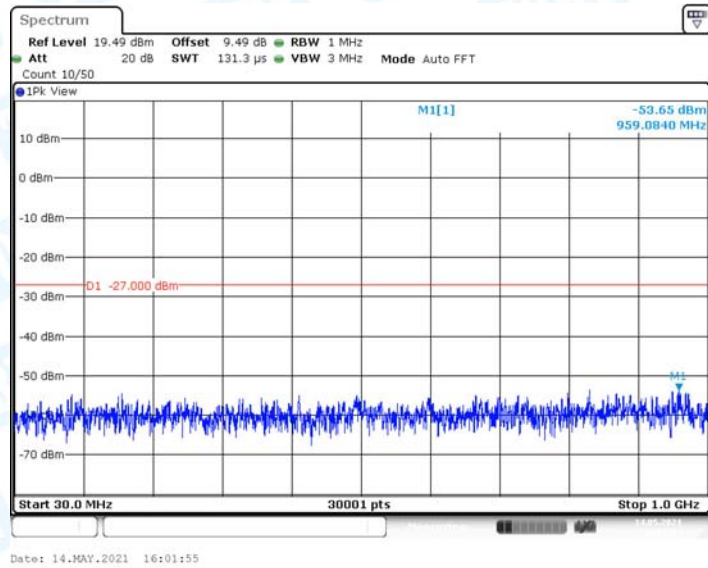


11AC80MIMO_Ant3_5775_1000~40000

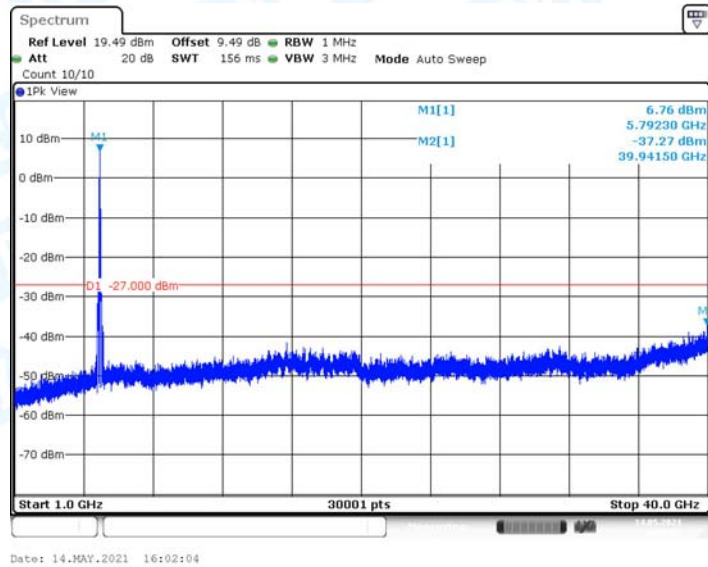


11AC80MIMO_Ant4_5775_30~1000

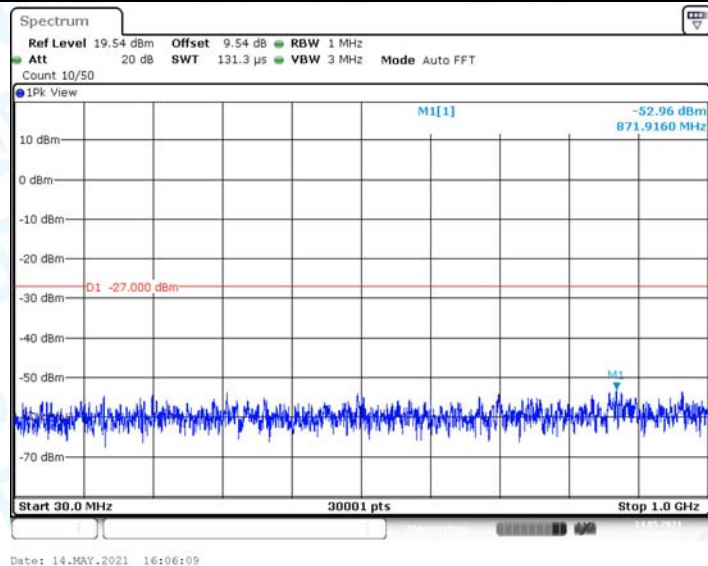


11AC80MIMO_Ant4_5775_1000~40000

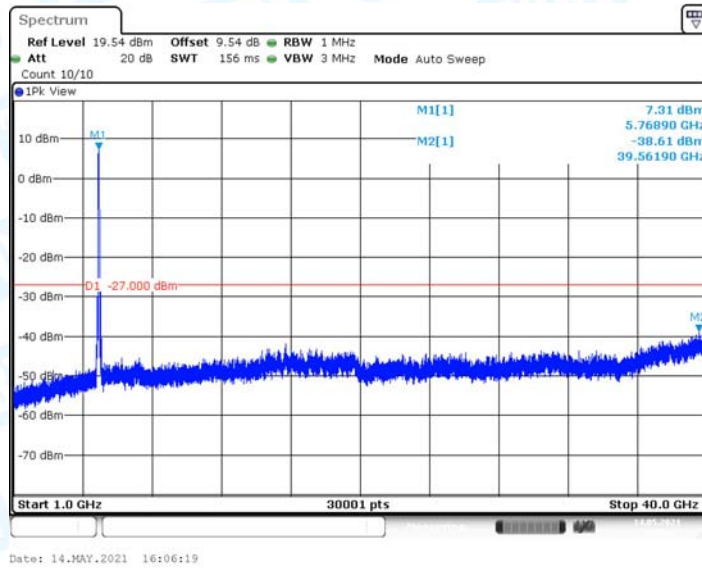


11AX20MIMO_Ant3_5180_30~5140

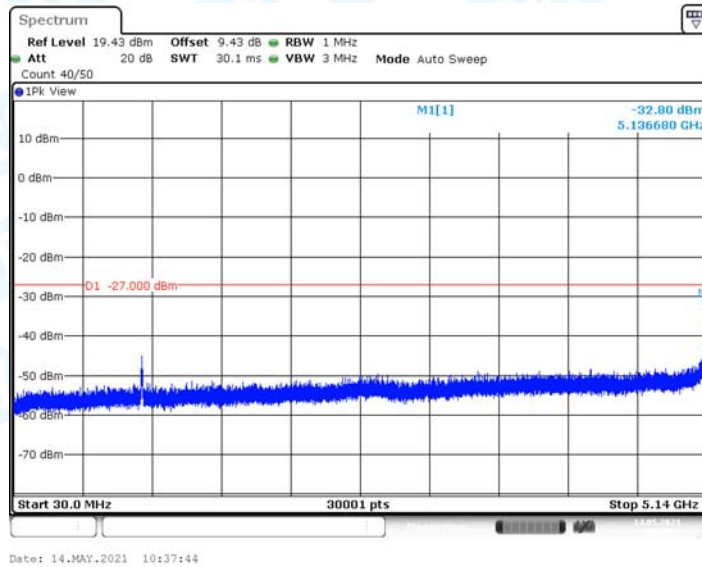


11AX20MIMO_Ant3_5180_5360~40000

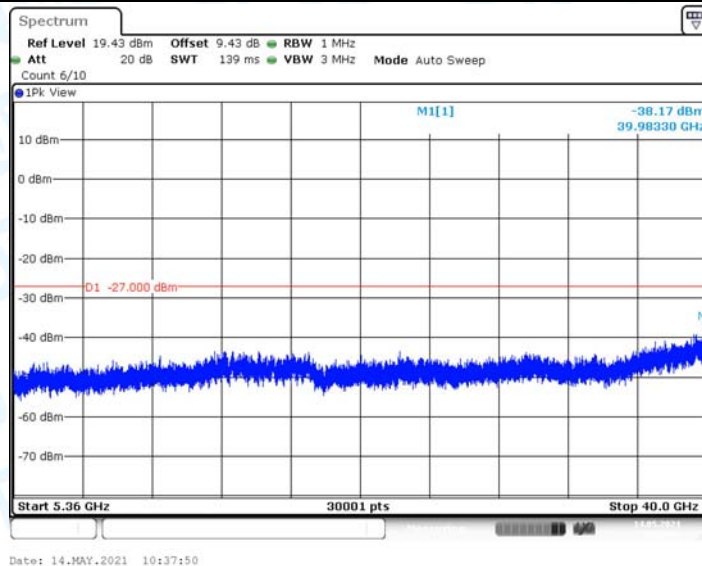


11AX20MIMO_Ant4_5180_30~5140

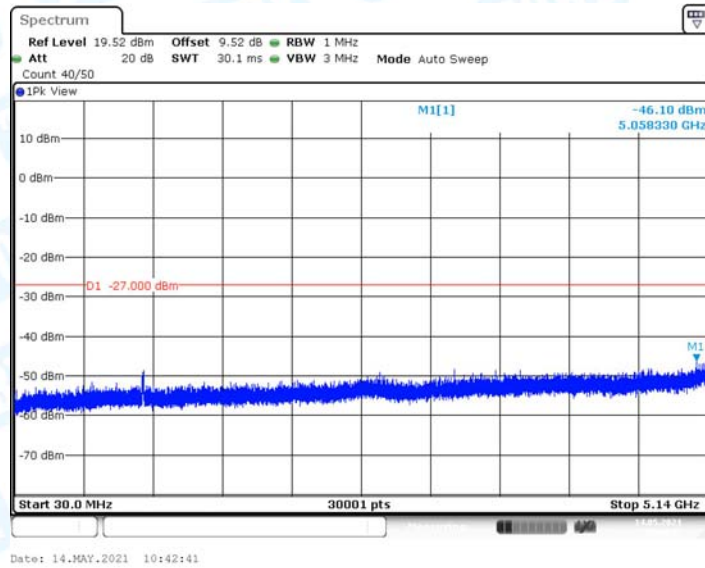


11AX20MIMO_Ant4_5180_5360~40000

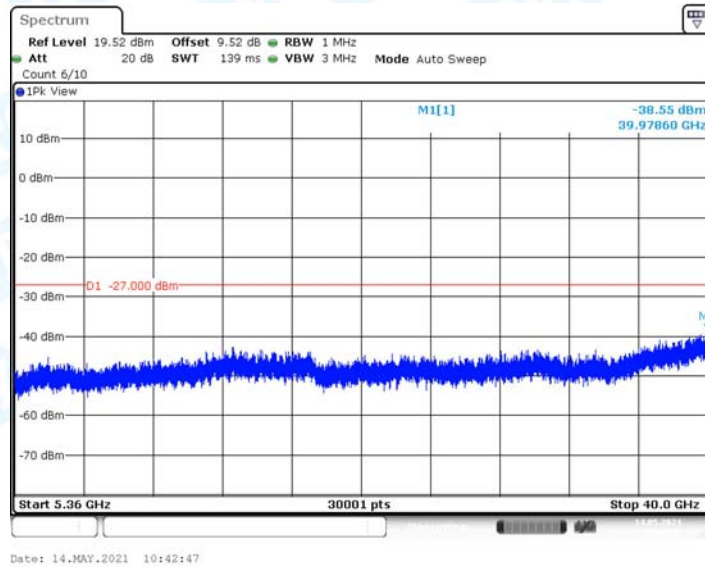


11AX20MIMO_Ant3_5200_30~5140

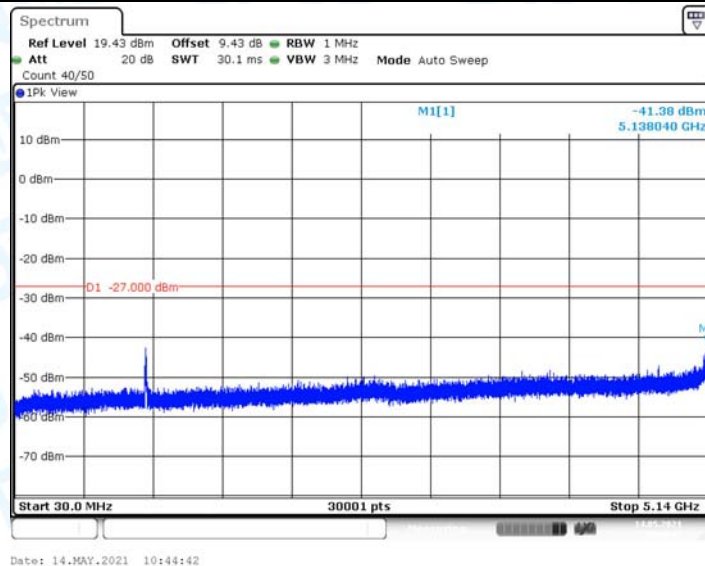


11AX20MIMO_Ant3_5200_5360~40000

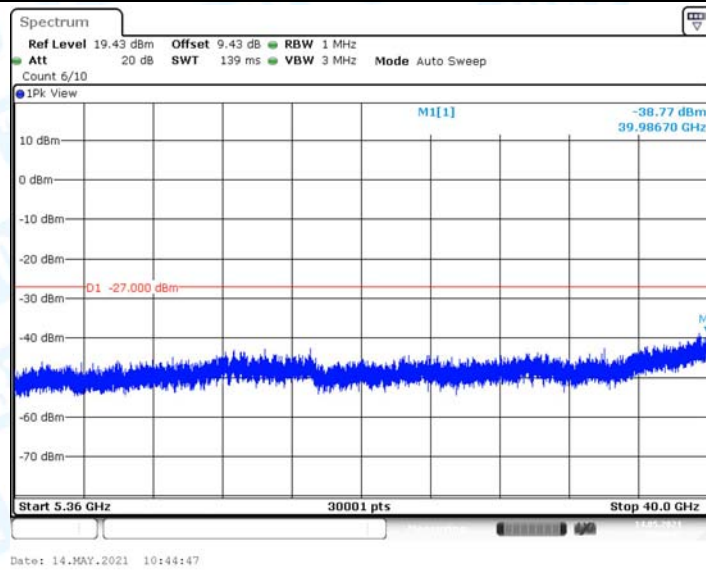


11AX20MIMO_Ant4_5200_30~5140

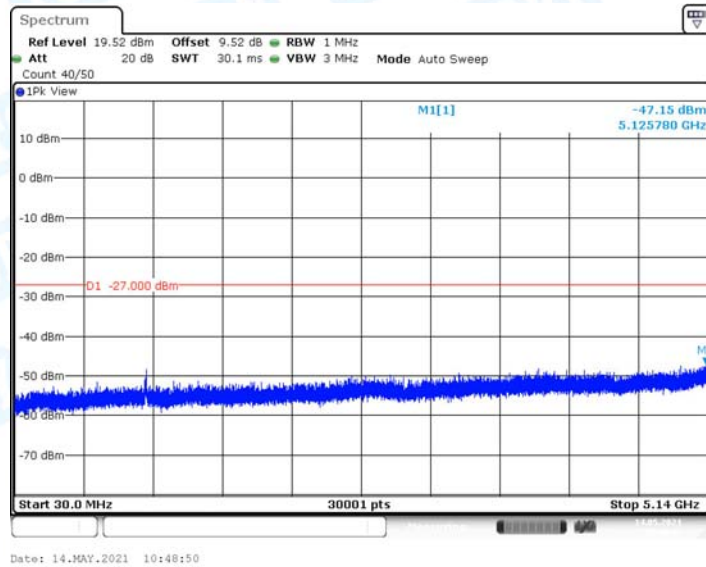


11AX20MIMO_Ant4_5200_5360~40000

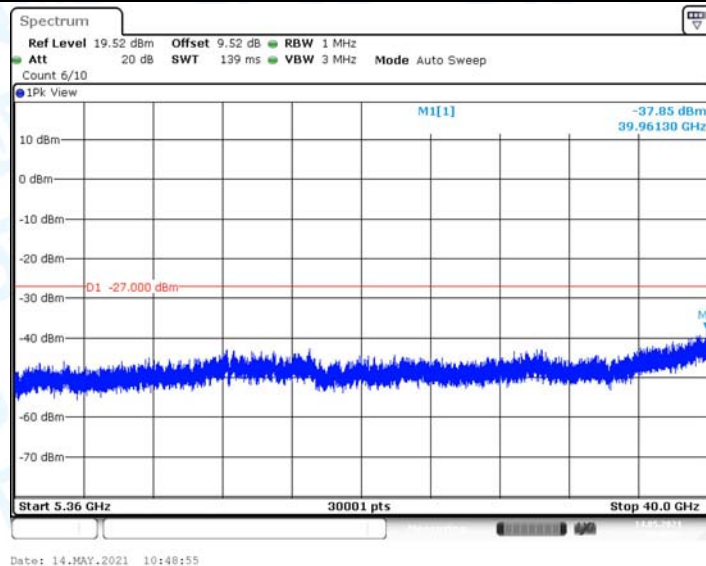


11AX20MIMO_Ant3_5240_30~5140

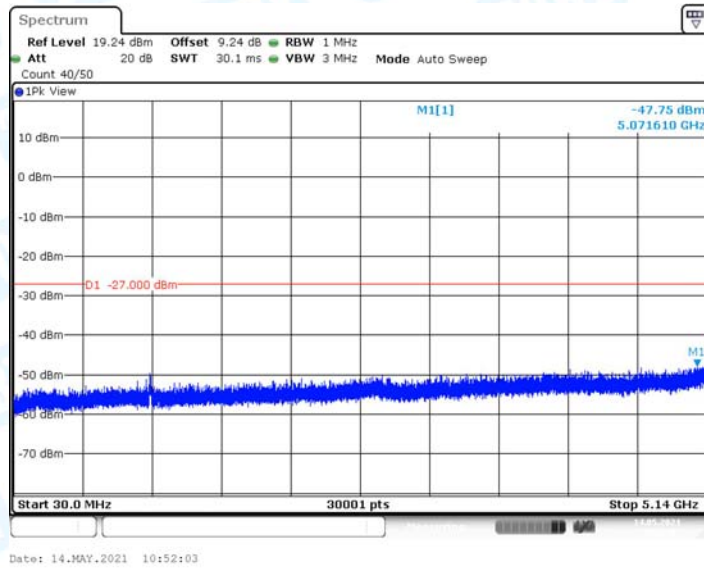


11AX20MIMO_Ant3_5240_5360~40000

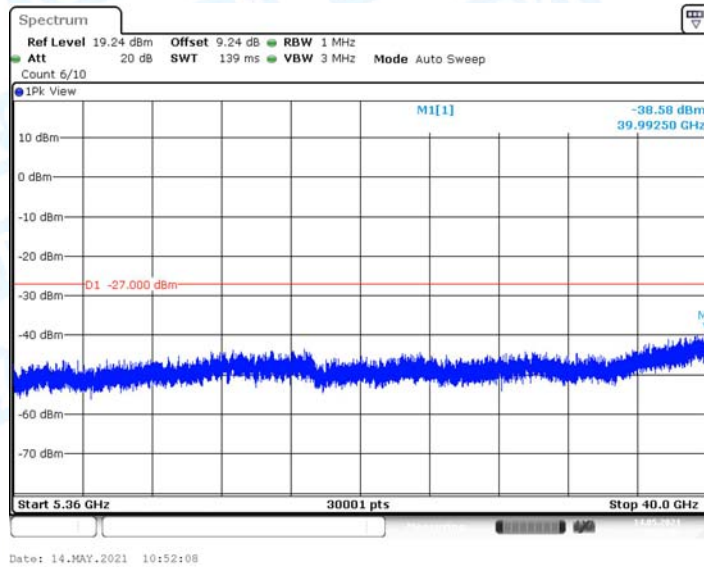


11AX20MIMO_Ant4_5240_30~5140

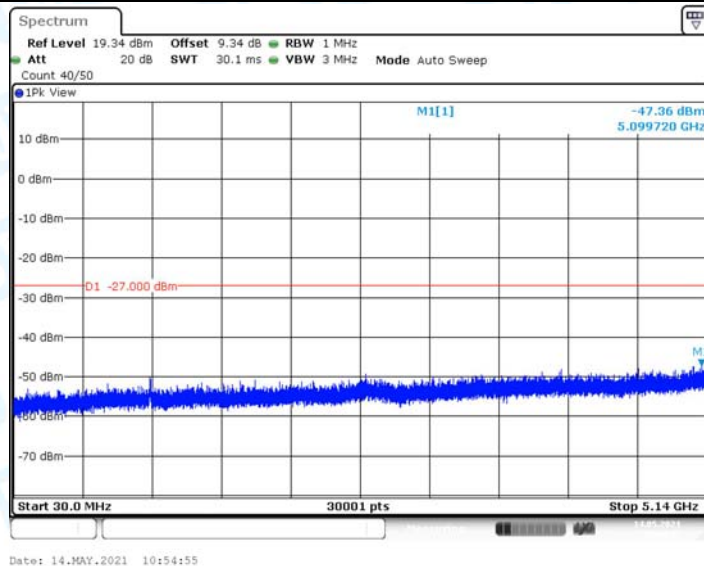


11AX20MIMO_Ant4_5240_5360~40000

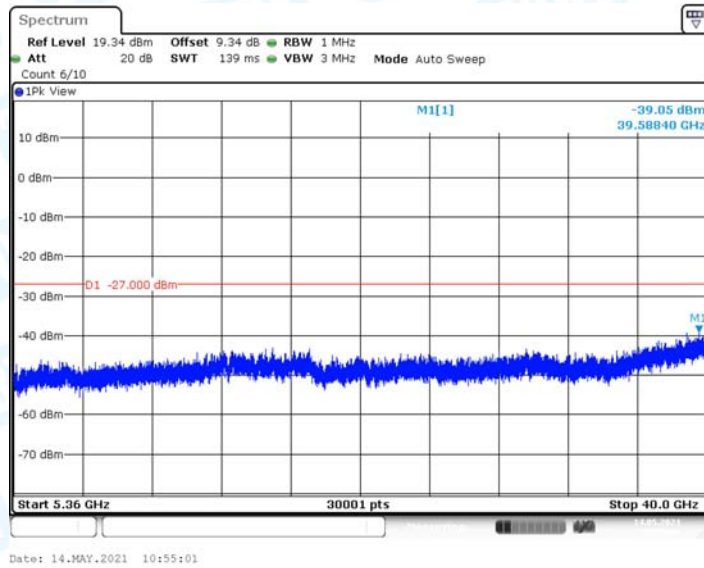


11AX20MIMO_Ant3_5745_30~1000

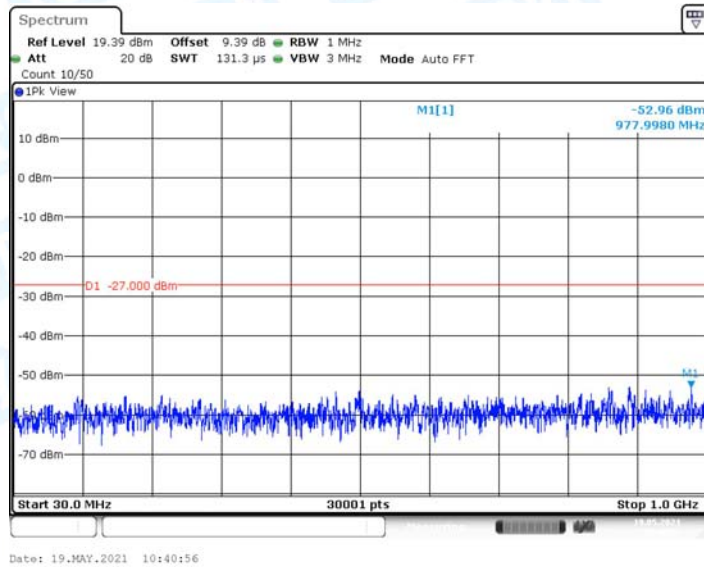


11AX20MIMO_Ant3_5745_1000~40000

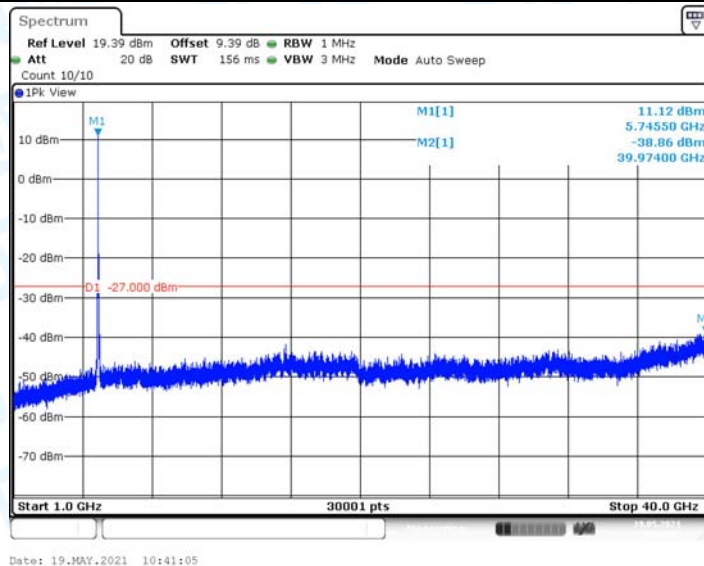


11AX20MIMO_Ant4_5745_30~1000

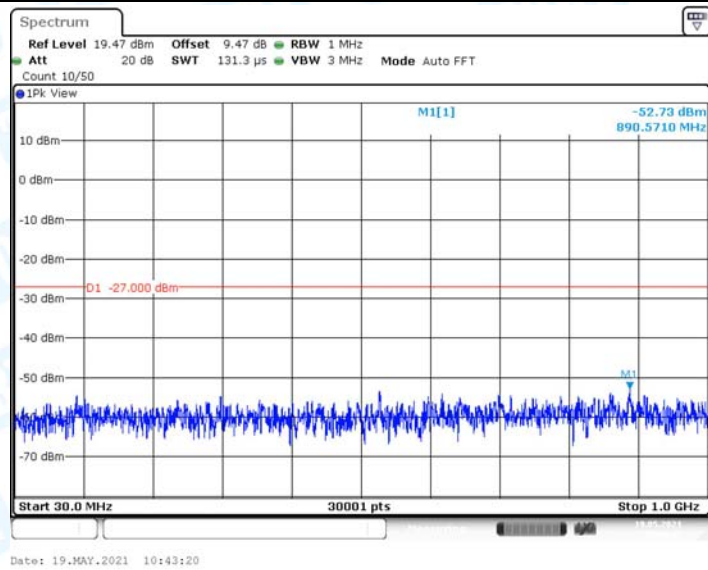


11AX20MIMO_Ant4_5745_1000~40000

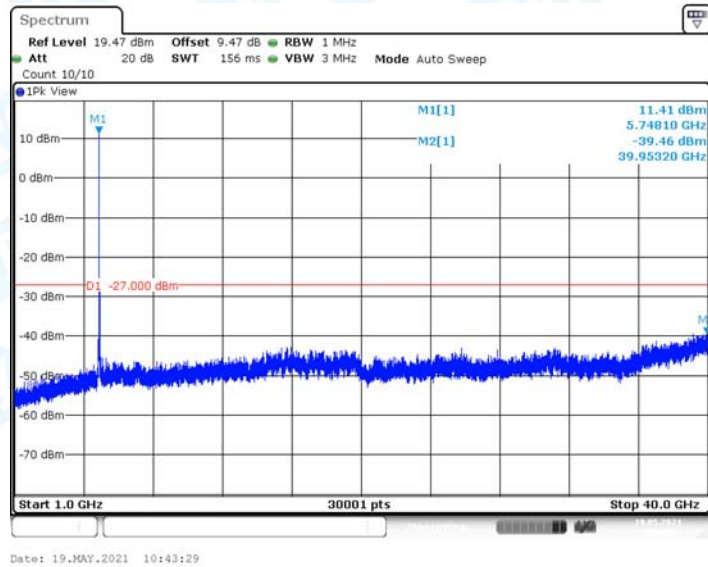


11AX20MIMO_Ant3_5785_30~1000

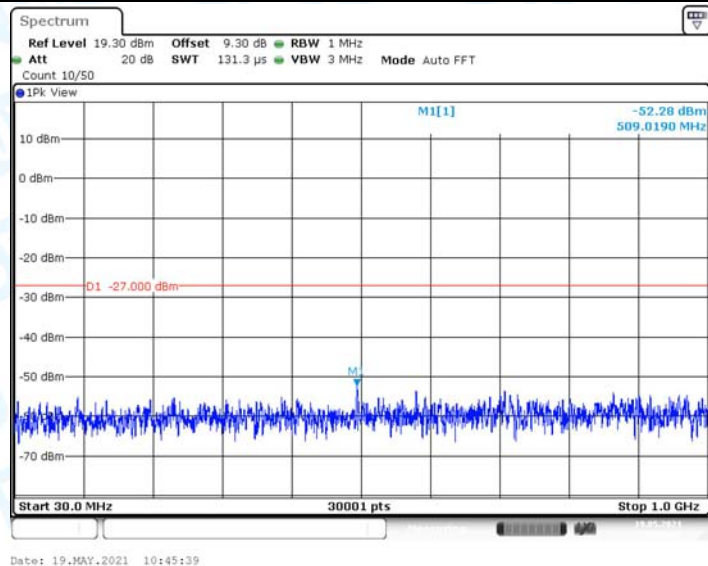


11AX20MIMO_Ant3_5785_1000~40000

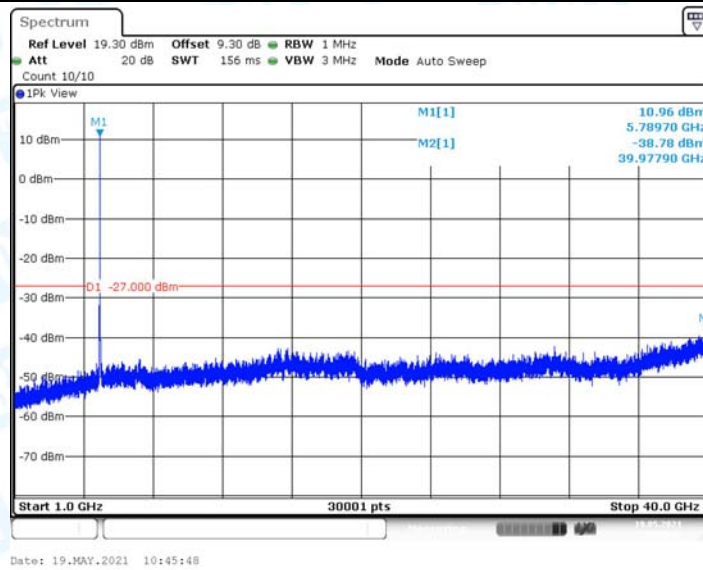


11AX20MIMO_Ant4_5785_30~1000

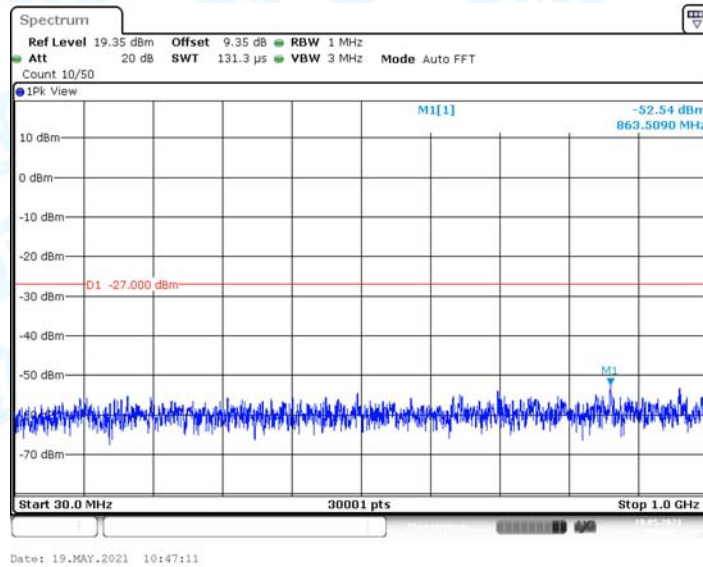


11AX20MIMO_Ant4_5785_1000~40000

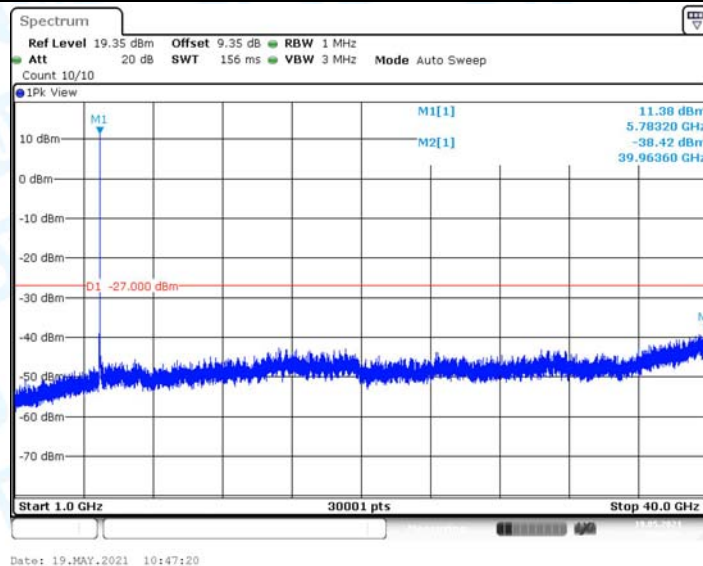


11AX20MIMO_Ant3_5825_30~1000

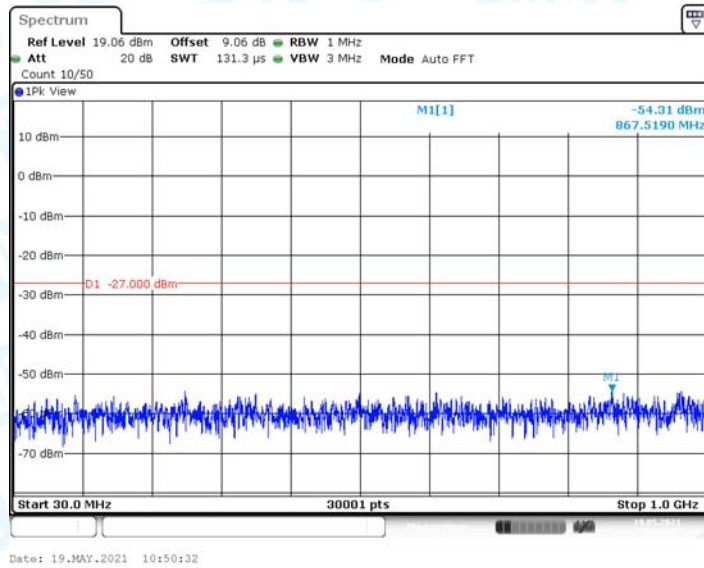


11AX20MIMO_Ant3_5825_1000~40000

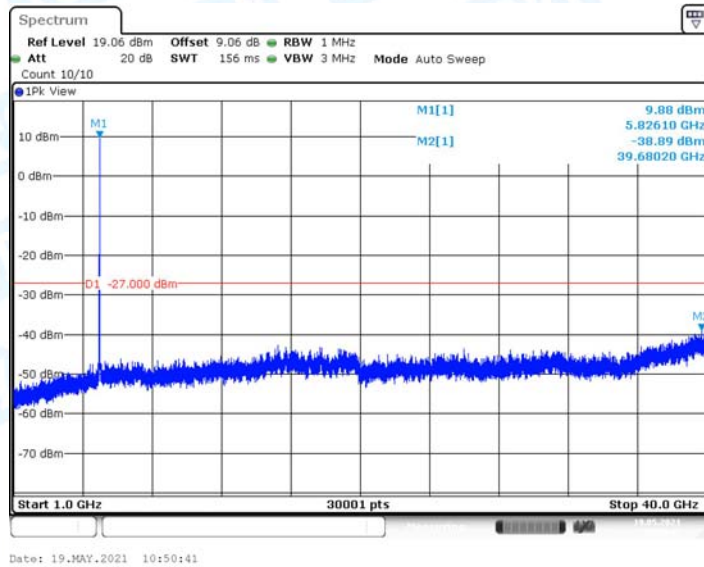


11AX20MIMO_Ant4_5825_30~1000

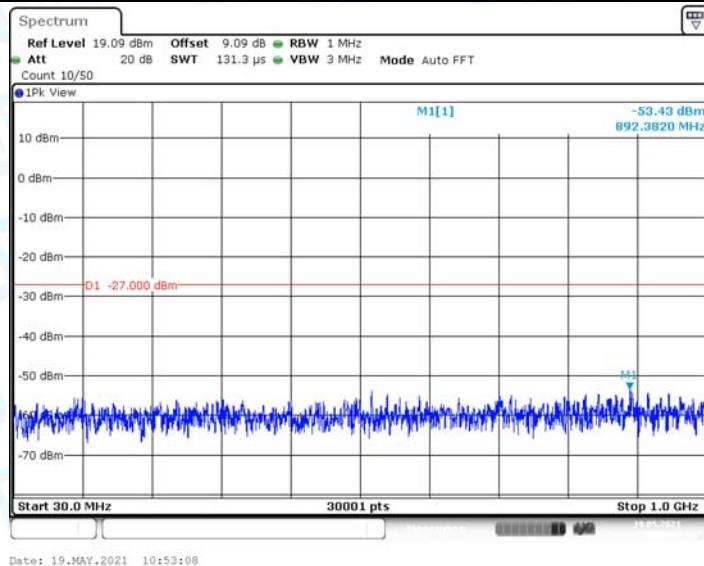


11AX20MIMO_Ant4_5825_1000~40000

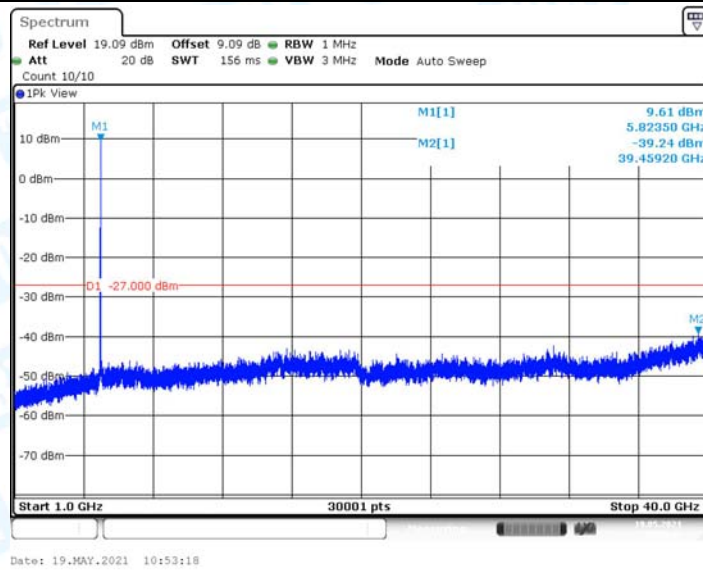


11AX40MIMO_Ant3_5190_30~5140

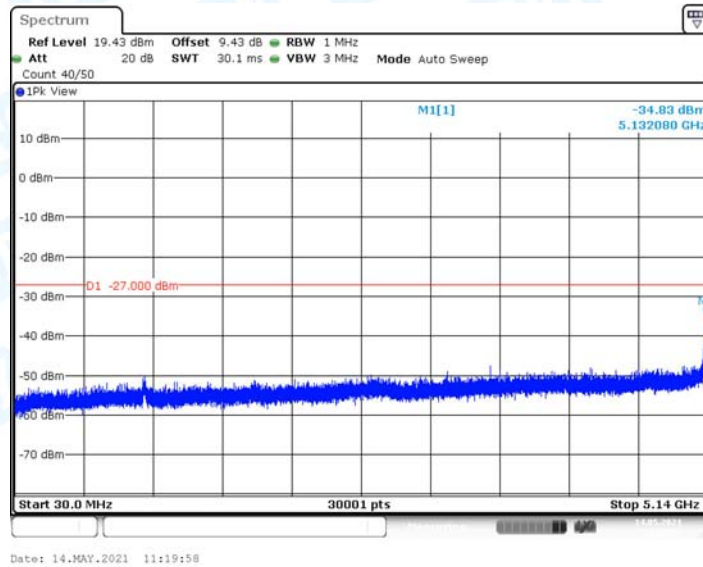


11AX40MIMO_Ant3_5190_5360~40000

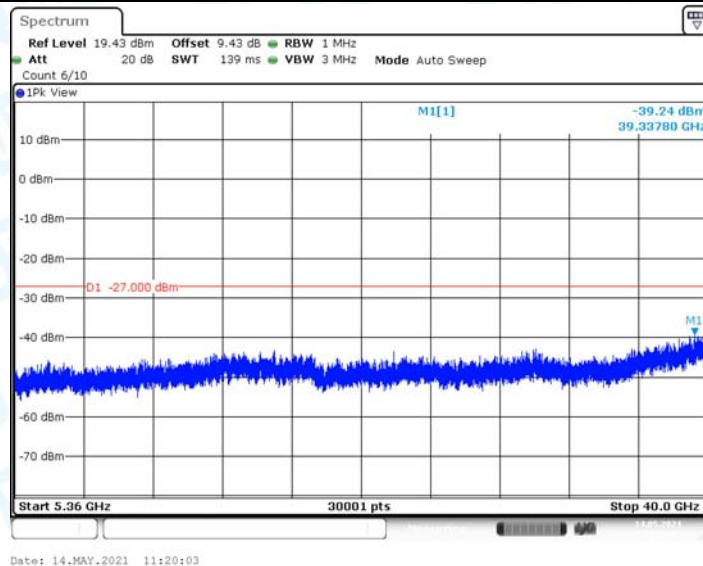


11AX40MIMO_Ant4_5190_30~5140

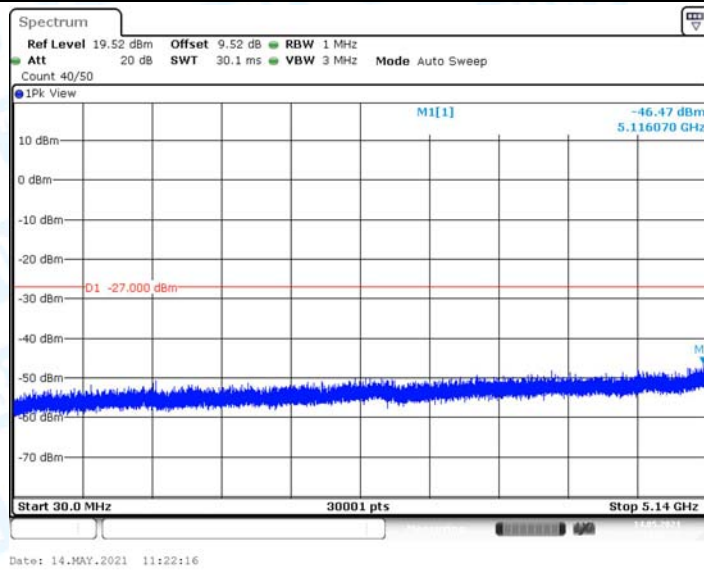


11AX40MIMO_Ant4_5190_5360~40000

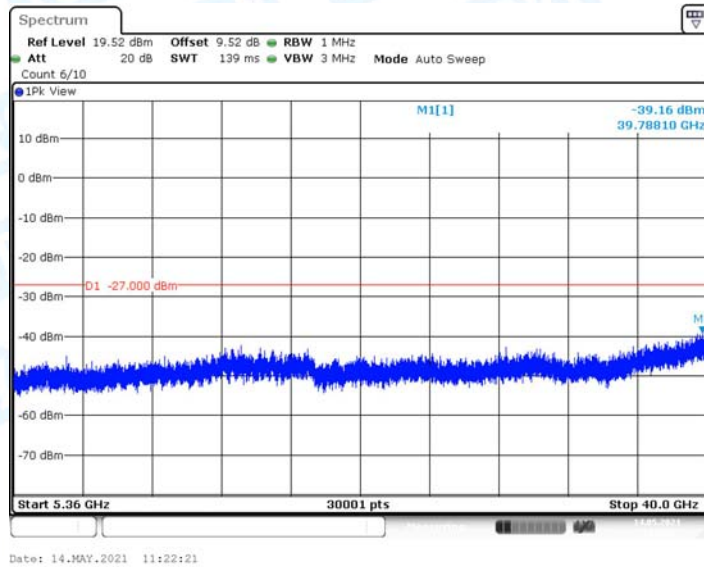


11AX40MIMO_Ant3_5230_30~5140

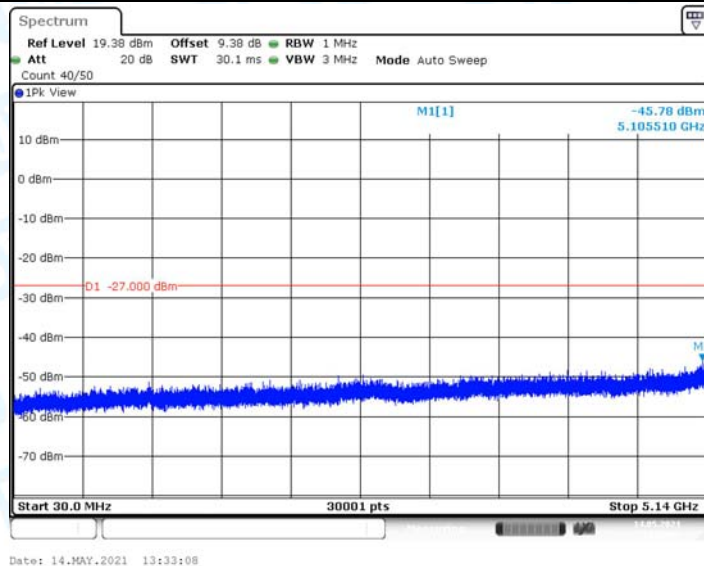


11AX40MIMO_Ant3_5230_5360~40000

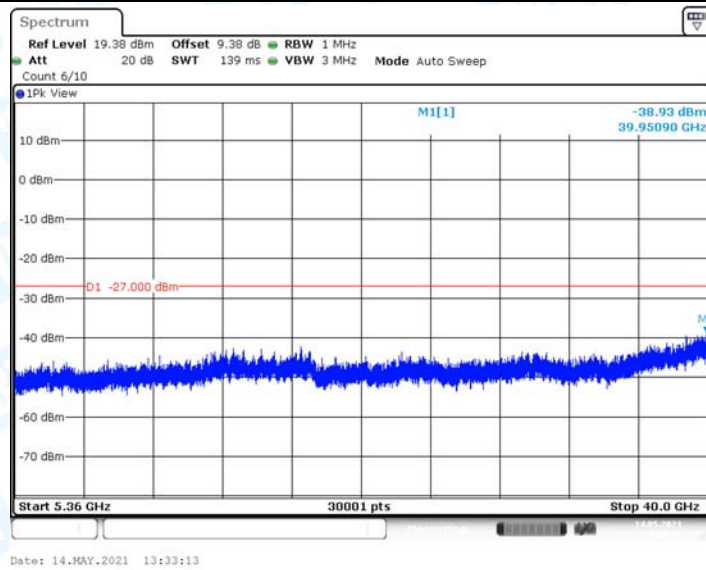


11AX40MIMO_Ant4_5230_30~5140

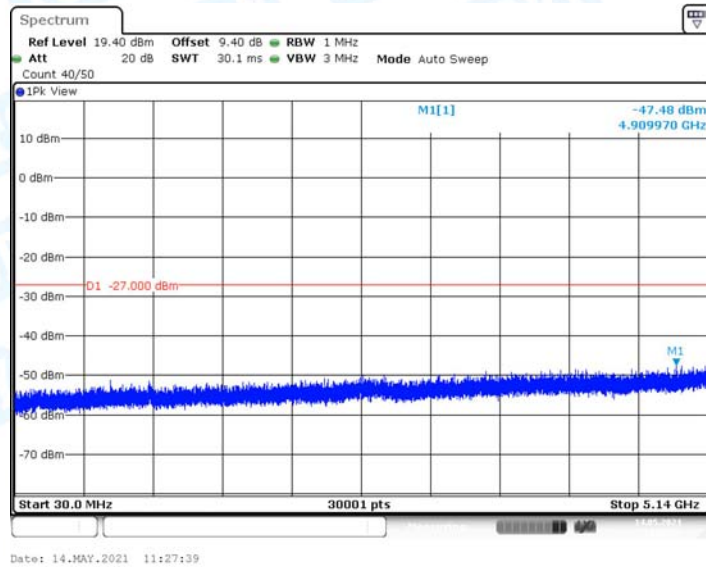


11AX40MIMO_Ant4_5230_5360~40000

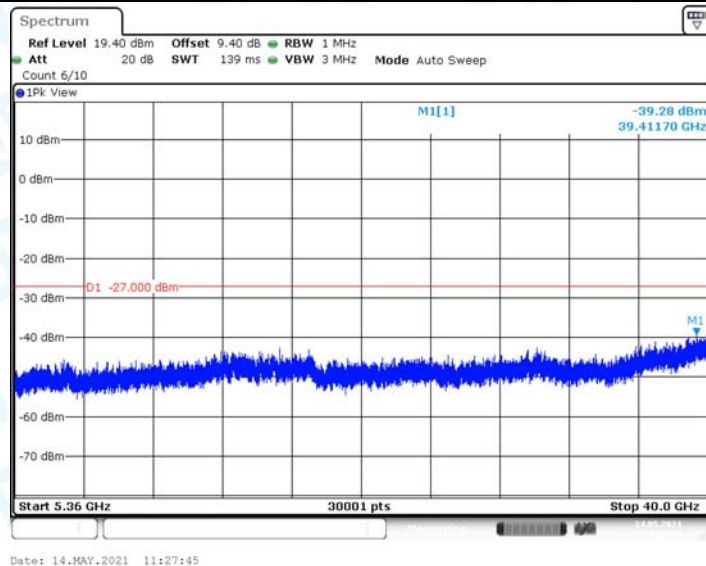


11AX40MIMO_Ant3_5755_30~1000

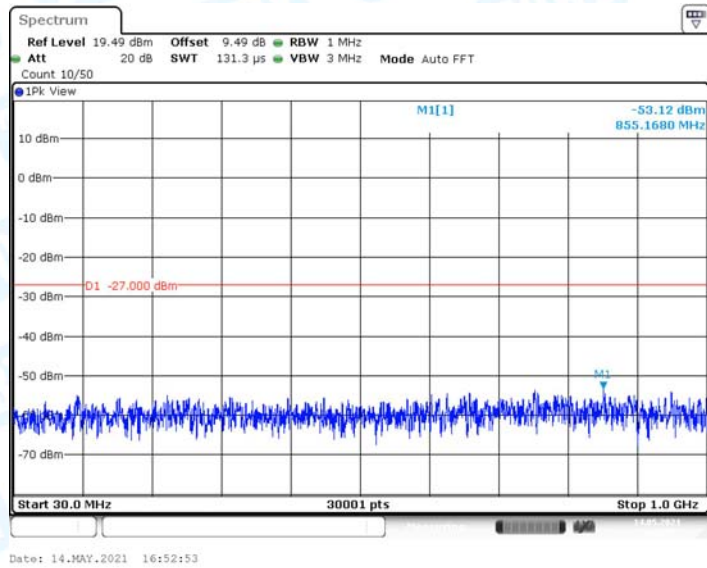


11AX40MIMO_Ant3_5755_1000~40000

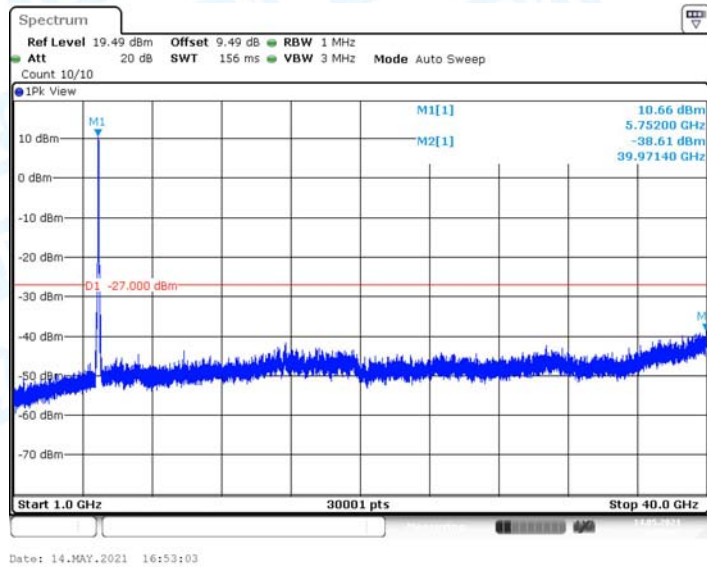


11AX40MIMO_Ant4_5755_30~1000

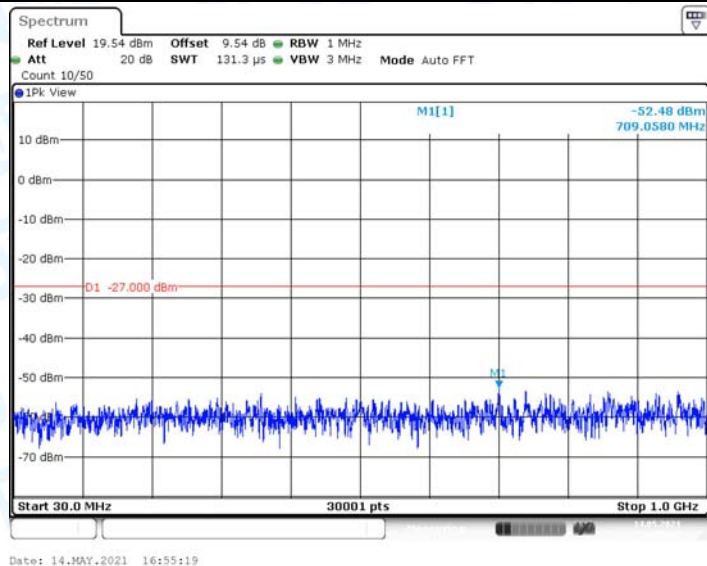


11AX40MIMO_Ant4_5755_1000~40000

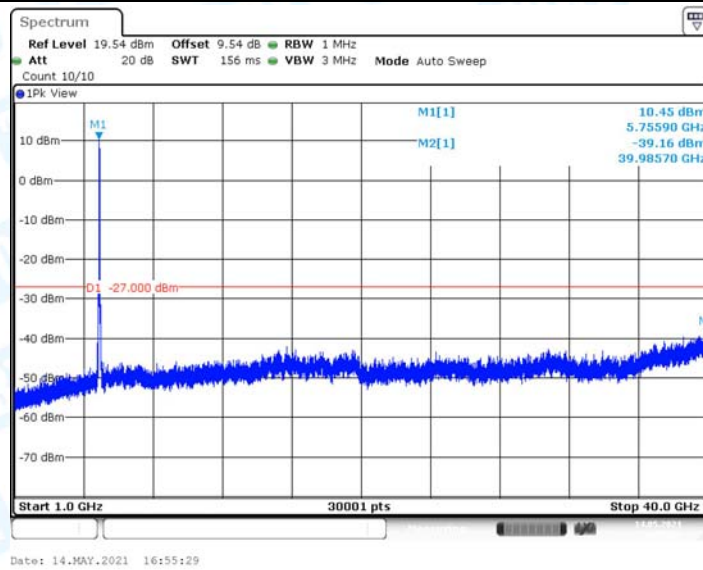


11AX40MIMO_Ant3_5795_30~1000

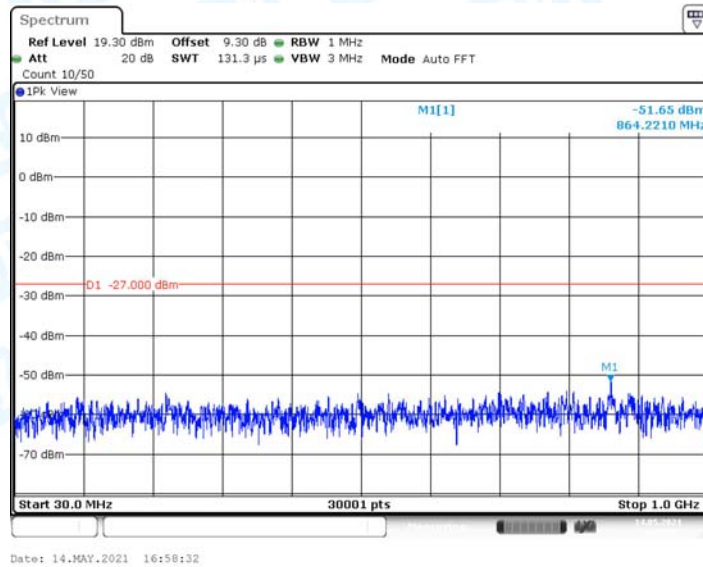


11AX40MIMO_Ant3_5795_1000~40000

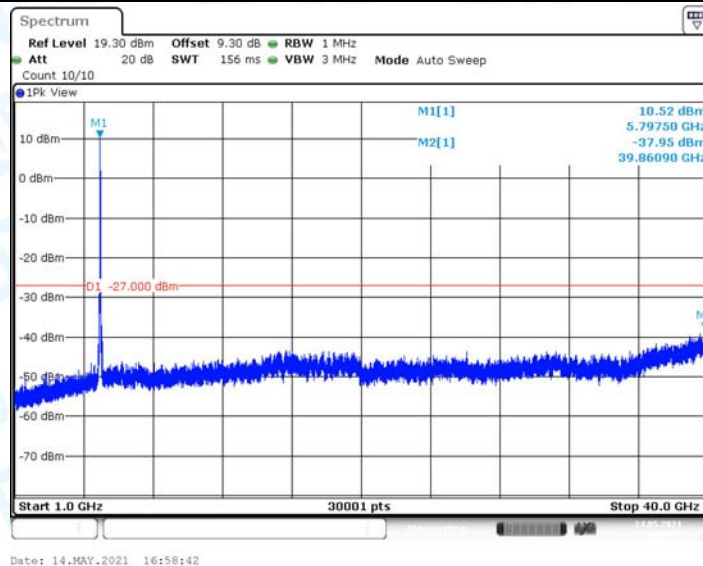


11AX40MIMO_Ant4_5795_30~1000

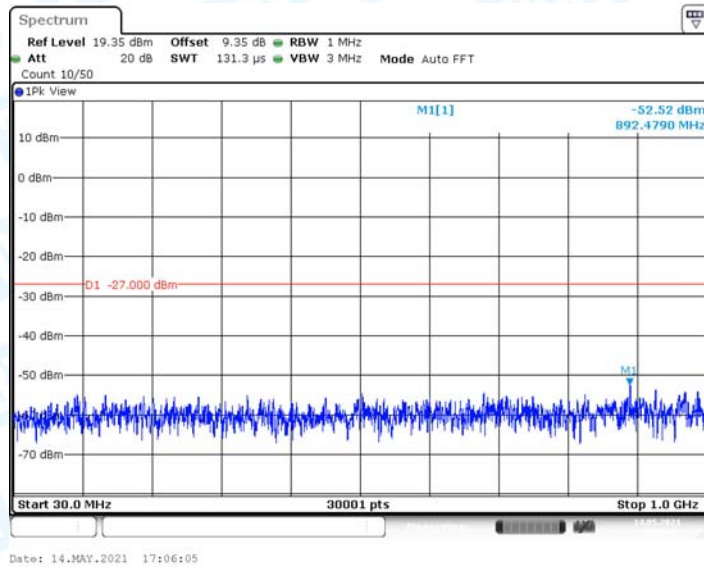


11AX40MIMO_Ant4_5795_1000~40000

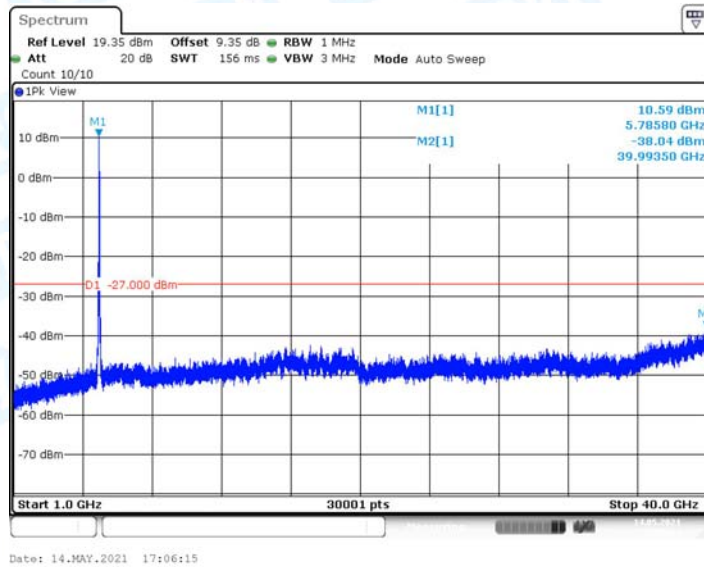


11AX80MIMO_Ant3_5210_30~5140

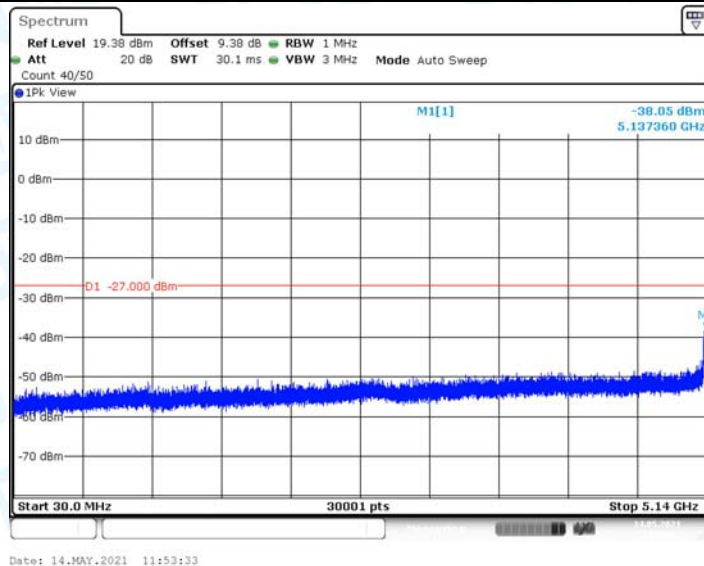


11AX80MIMO_Ant3_5210_5360~40000

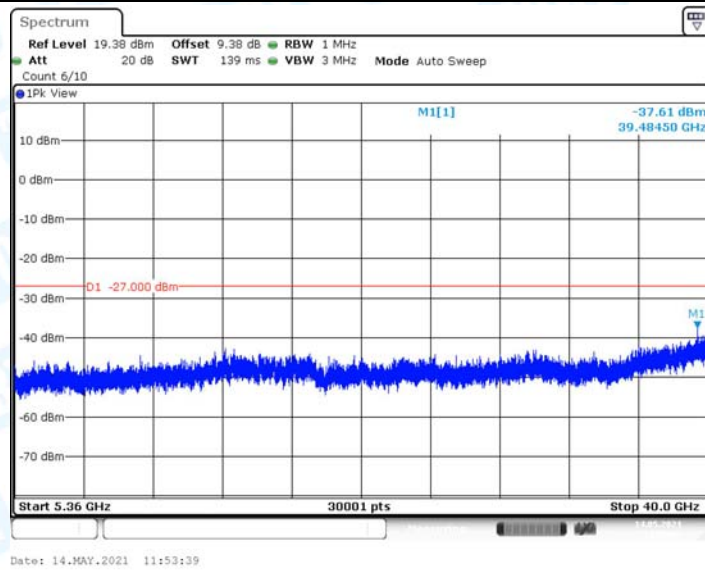


11AX80MIMO_Ant4_5210_30~5140

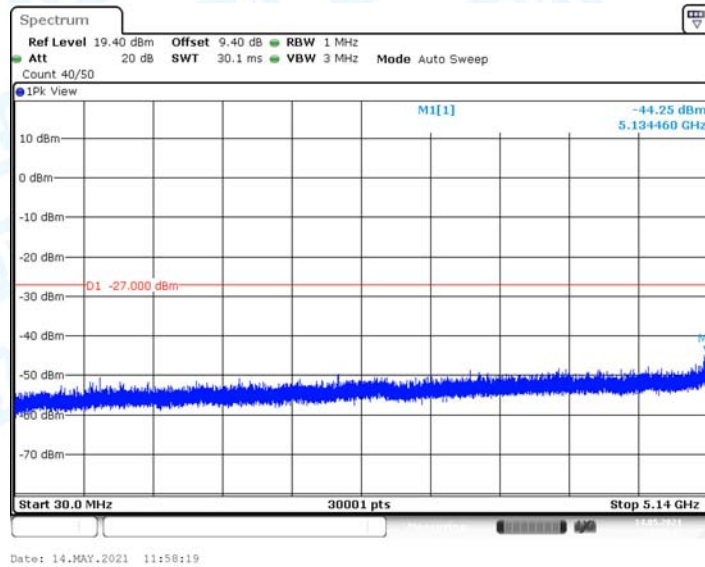


11AX80MIMO_Ant4_5210_5360~40000

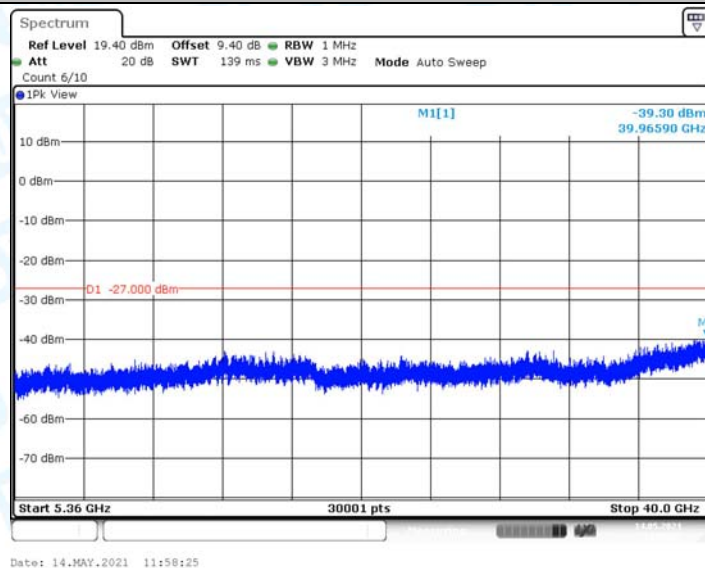


11AX80MIMO_Ant3_5775_30~1000

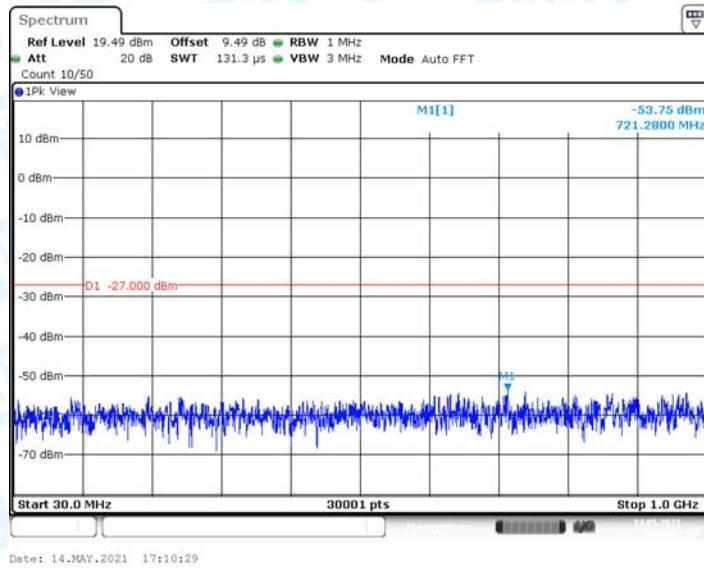


11AX80MIMO_Ant3_5775_1000~40000

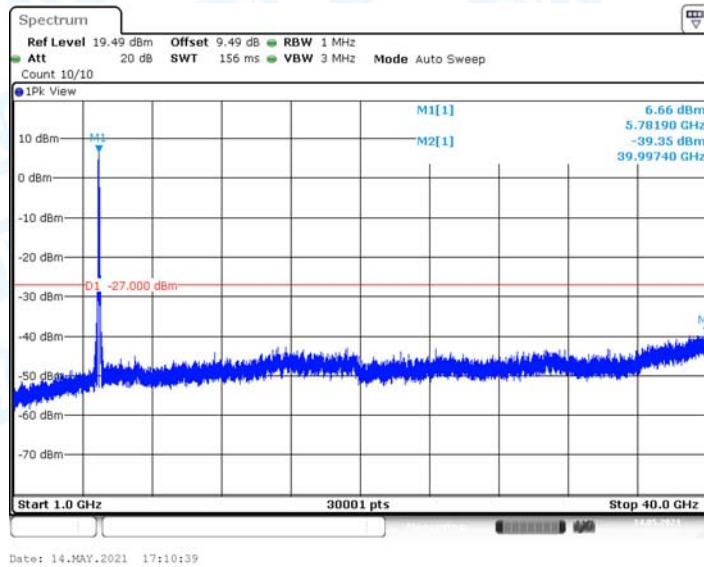

11AX80MIMO_Ant4_5775_30~1000

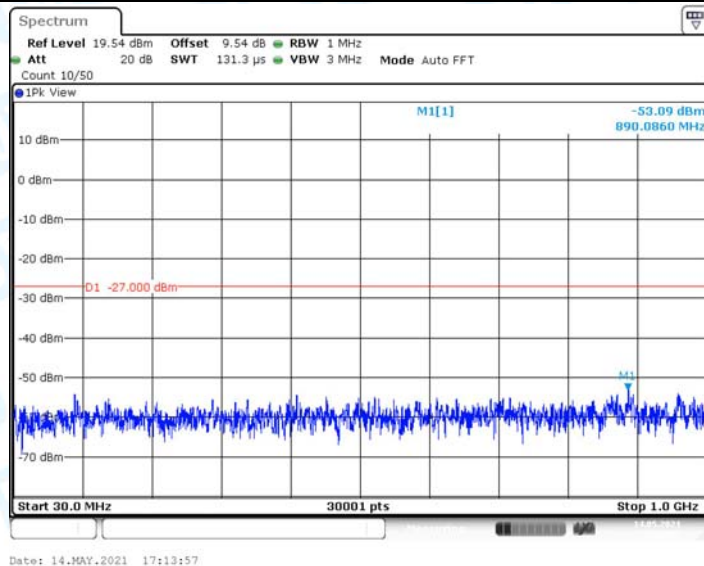

11AX80MIMO_Ant4_5775_1000~40000

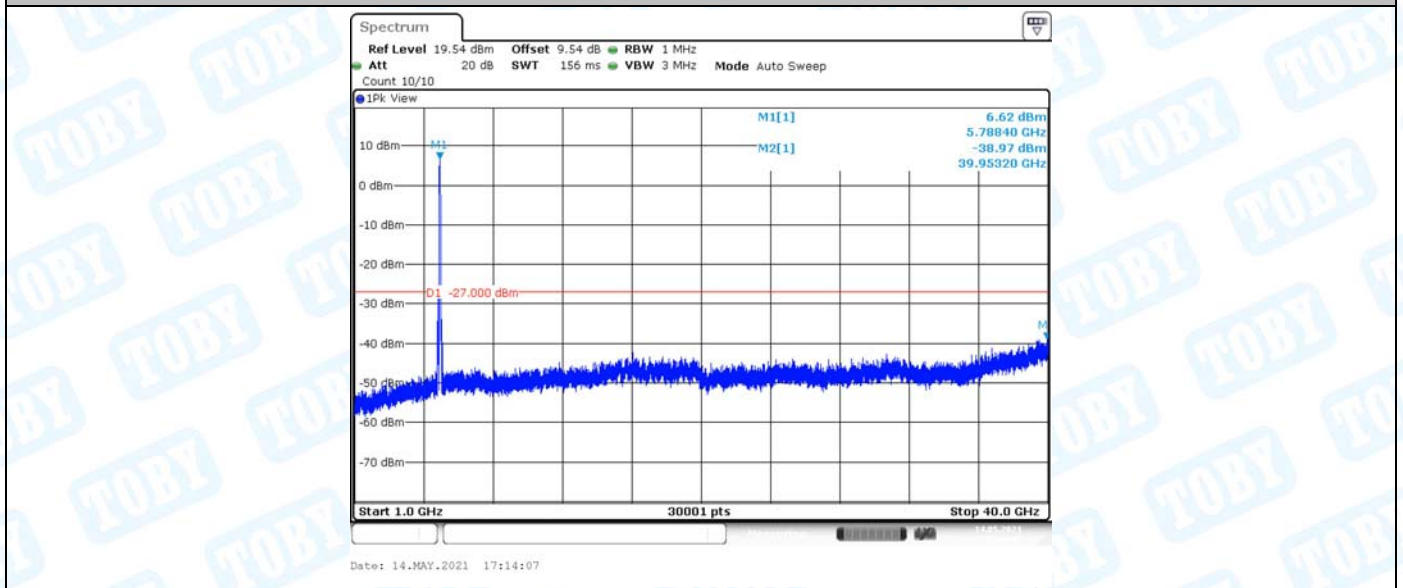


Attachment C--Restricted Bands Requirement Test Data

(1) Radiated Measurements for Restricted Bands

Only show the worst case antenna 3+4.

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5180 MHz (U-NII-1)		
Remark:	Only show the worst case Antenna 3+4.		

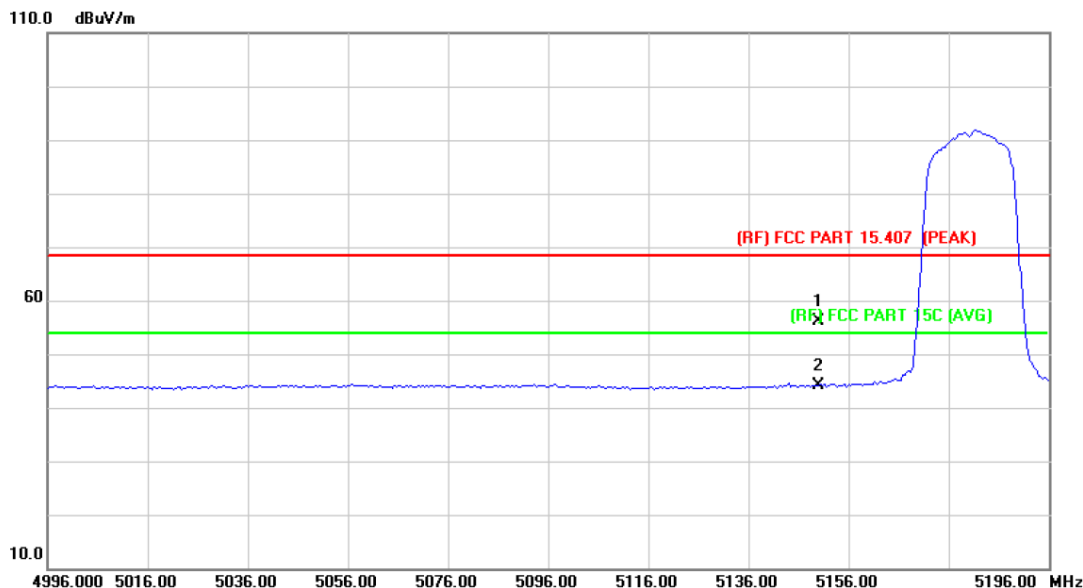

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	41.38	14.67	56.05	68.30	-12.25	peak
2	*	5150.000	29.41	14.67	44.08	54.00	-9.92	AVG


Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5180 MHz (U-NII-1)		
Remark:	Only show the worst case Antenna 3+4.		

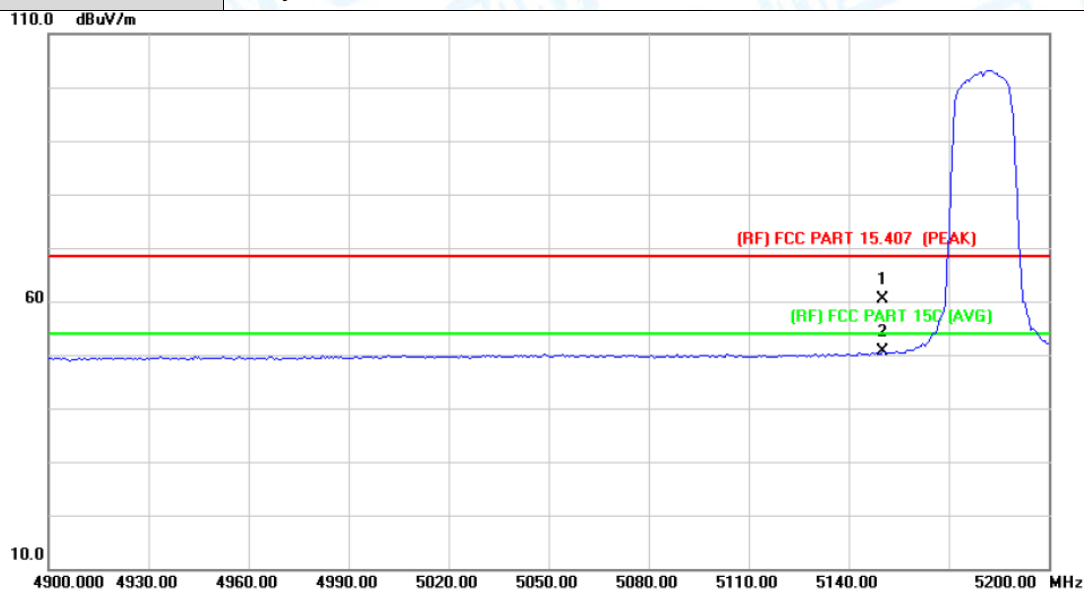


No.	Mk.	Freq. MHz	Reading Level dBμV	Correct Factor dB/m	Measure- ment dBμV/m	Limit dBμV/m	Over dB	Detector
1		5150.000	45.62	14.67	60.29	68.30	-8.01	peak
2	*	5150.000	35.84	14.67	50.51	54.00	-3.49	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5240 MHz (U-NII-1)		
Remark:	Only show the worst case Antenna 3+4.		

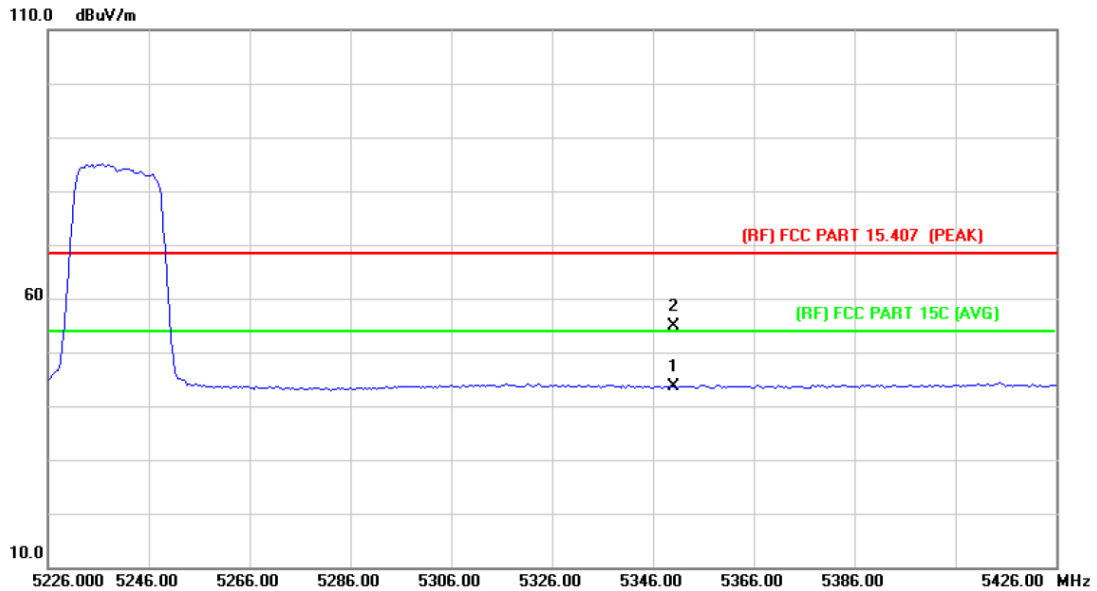

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1		5350.000	28.75	14.97	43.72	54.00	-10.28 AVG
2	*	5350.000	39.86	14.97	54.83	68.30	-13.47 peak


Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5240 MHz (U-NII-1)		
Remark:	Only show the worst case Antenna 3+4.		

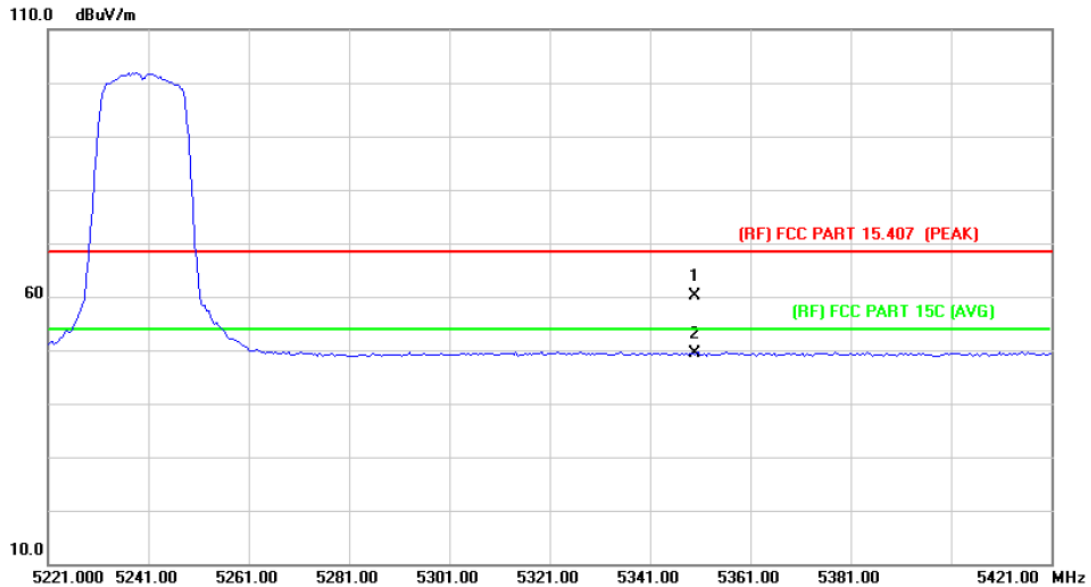


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5350.000	45.22	14.97	60.19	68.30	-8.11	peak
2	*	5350.000	34.50	14.97	49.47	54.00	-4.53	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT20) Mode 5180 MHz (U-NII-1)		
Remark:	Only show the worst case Antenna 3+4.		

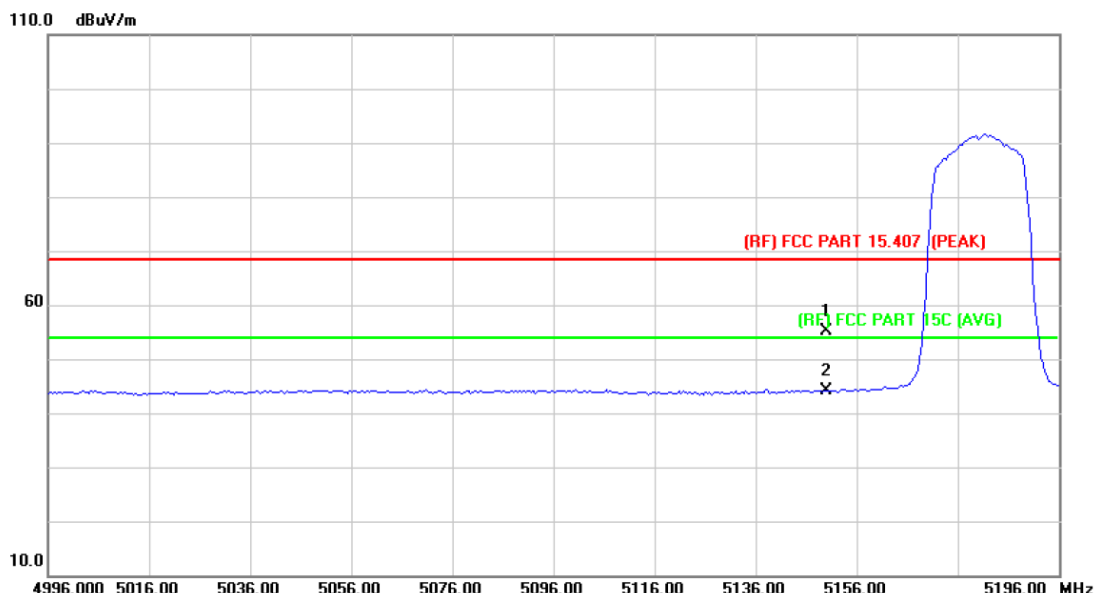


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	40.50	14.67	55.17	68.30	-13.13	peak
2	*	5150.000	29.48	14.67	44.15	54.00	-9.85	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5180 MHz (U-NII-1)		
Remark:	Only show the worst case Antenna 3+4.		

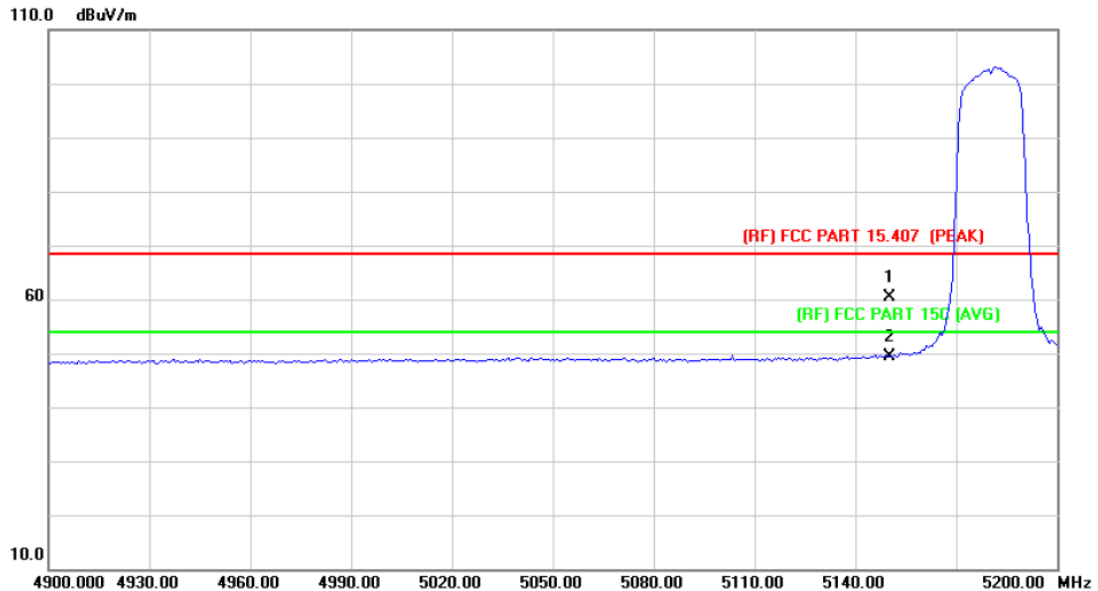

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	45.81	14.67	60.48	68.30	-7.82	peak
2	*	5150.000	34.68	14.67	49.35	54.00	-4.65	AVG


Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT20) Mode 5240 MHz (U-NII-1)		
Remark:	Only show the worst case Antenna 3+4.		

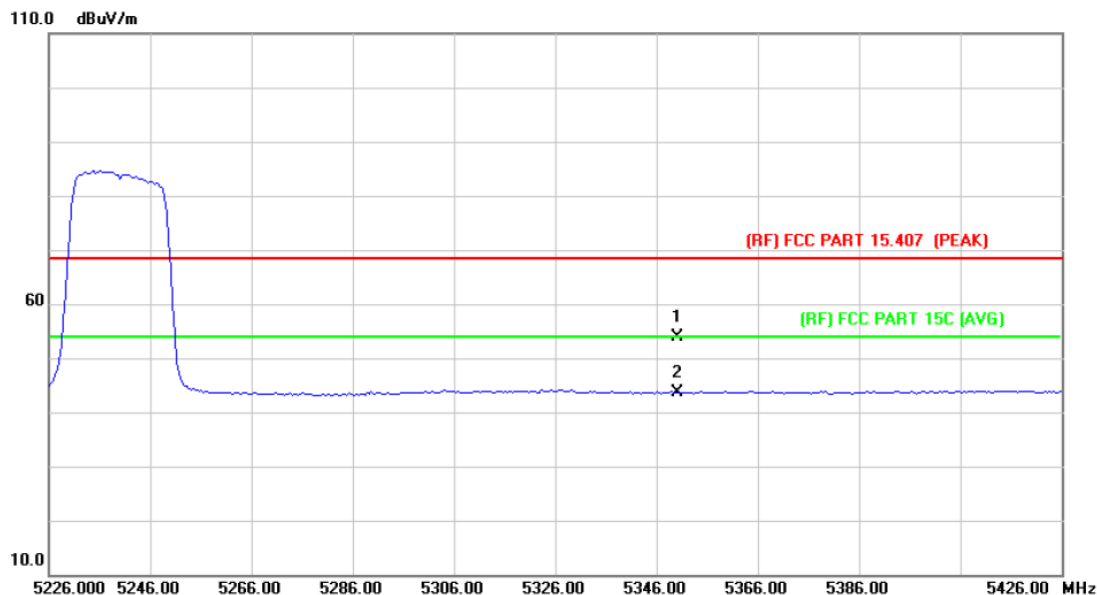

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5350.000	38.82	14.97	53.79	68.30	-14.51	peak
2	*	5350.000	28.76	14.97	43.73	54.00	-10.27	AVG


Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5240 MHz (U-NII-1)		
Remark:	Only show the worst case Antenna 3+4.		

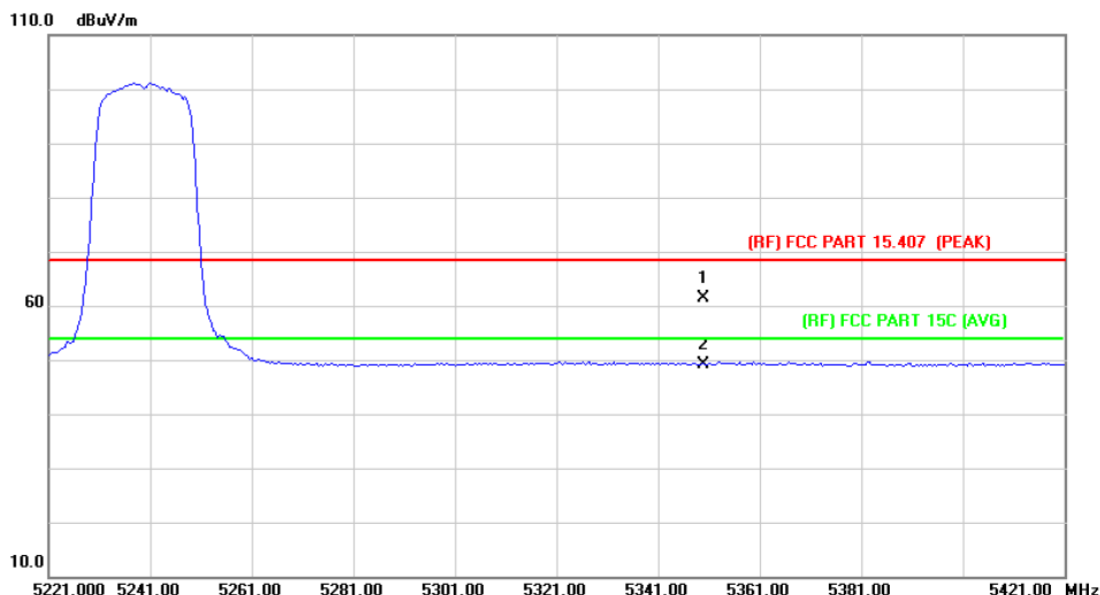

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5350.000	46.33	14.97	61.30	68.30	-7.00	peak
2	*	5350.000	34.13	14.97	49.10	54.00	-4.90	AVG


Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5180 MHz (U-NII-1)		
Remark:	Only show the worst case Antenna 3+4.		

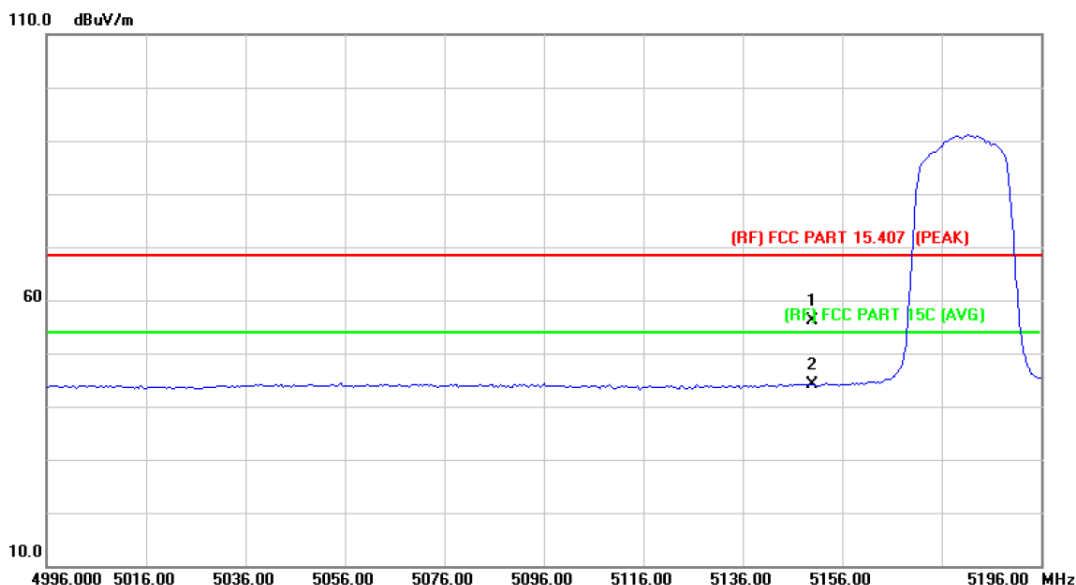


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	41.39	14.67	56.06	68.30	-12.24	peak
2	*	5150.000	29.42	14.67	44.09	54.00	-9.91	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT20) Mode 5180 MHz (U-NII-1)		
Remark:	Only show the worst case Antenna 3+4.		

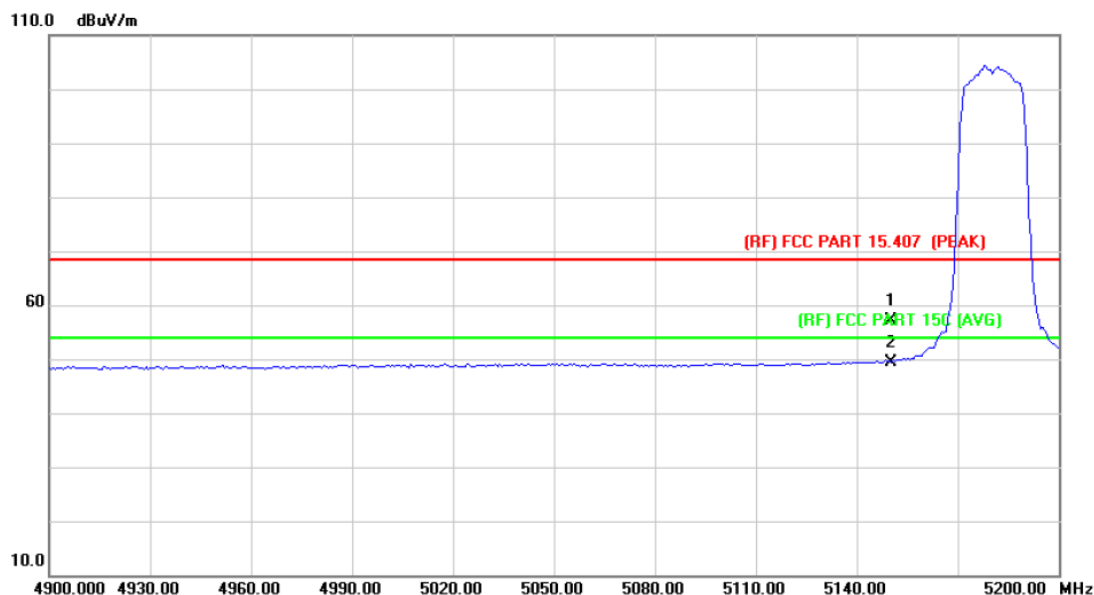

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	42.51	14.67	57.18	68.30	-11.12	peak
2	*	5150.000	34.81	14.67	49.48	54.00	-4.52	AVG


Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5240 MHz (U-NII-1)		
Remark:	Only show the worst case Antenna 3+4.		

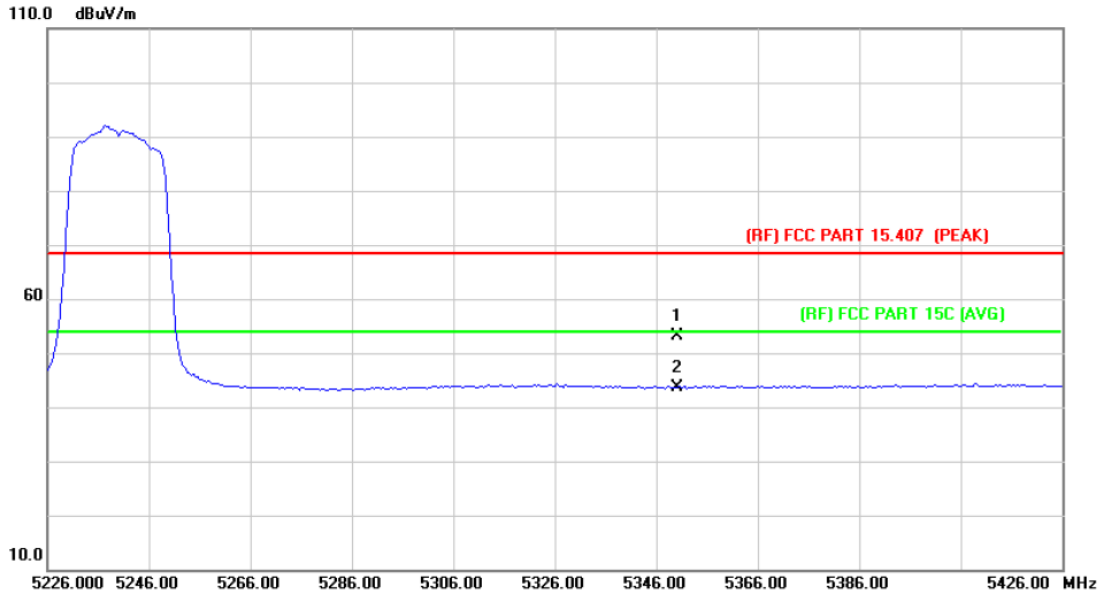

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5350.000	38.17	14.97	53.14	68.30	-15.16	peak
2	*	5350.000	28.54	14.97	43.51	54.00	-10.49	AVG


Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT20) Mode 5240 MHz (U-NII-1)		
Remark:	Only show the worst case Antenna 3+4.		

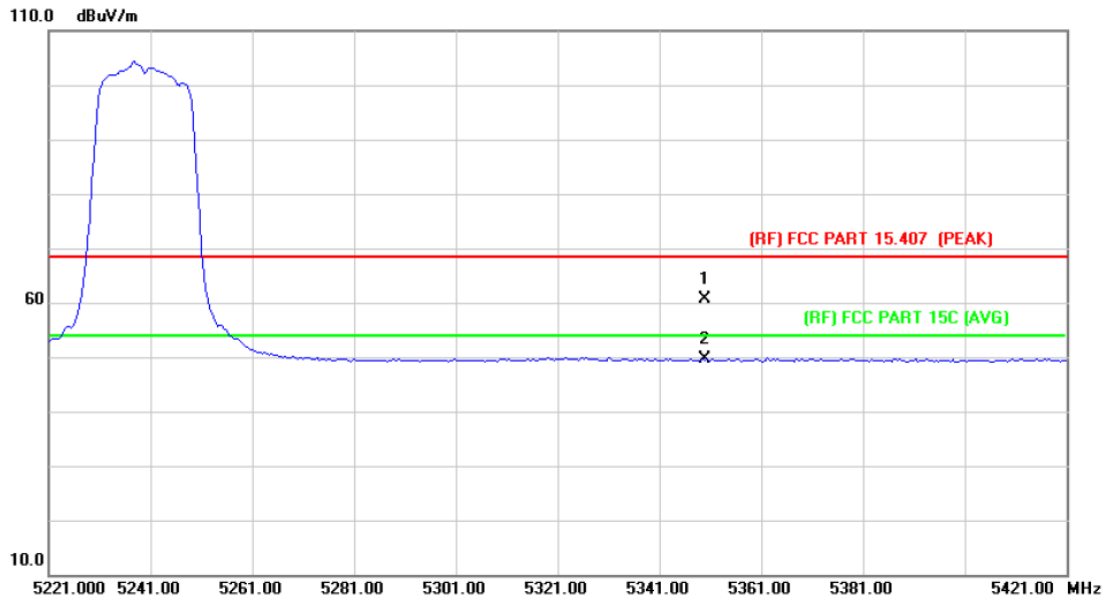


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5350.000	45.74	14.97	60.71	68.30	-7.59	peak
2	*	5350.000	34.61	14.97	49.58	54.00	-4.42	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ax(HE20) Mode 5180 MHz (U-NII-1)		
Remark:	Only show the worst case Antenna 3+4.		

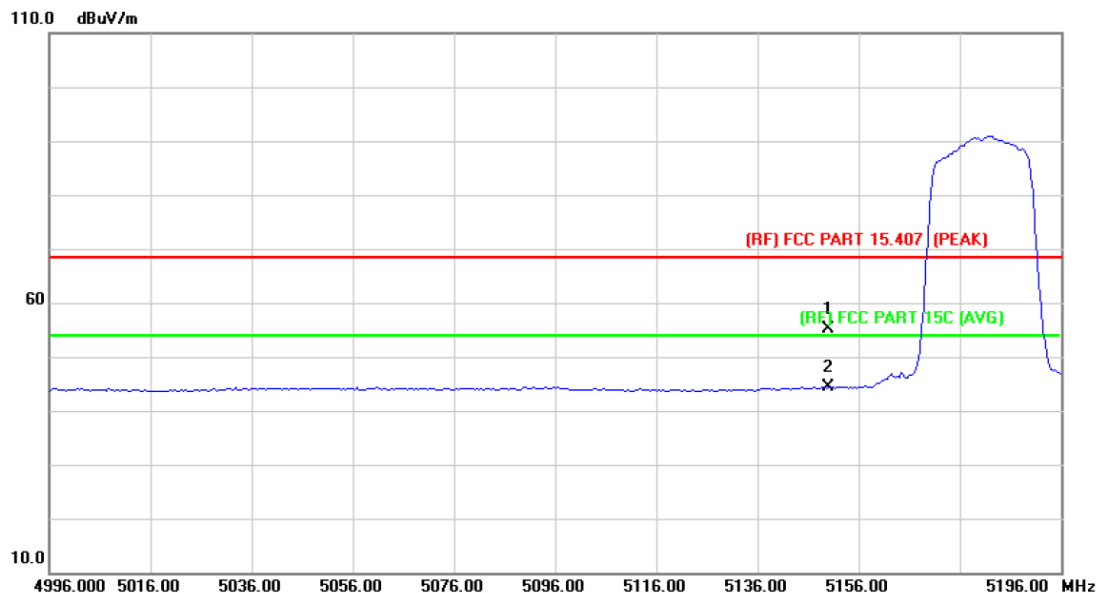

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	40.38	14.67	55.05	68.30	-13.25	peak
2	*	5150.000	29.69	14.67	44.36	54.00	-9.64	AVG


Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11 ax(HE20) Mode 5180 MHz (U-NII-1)		
Remark:	Only show the worst case Antenna 3+4.		

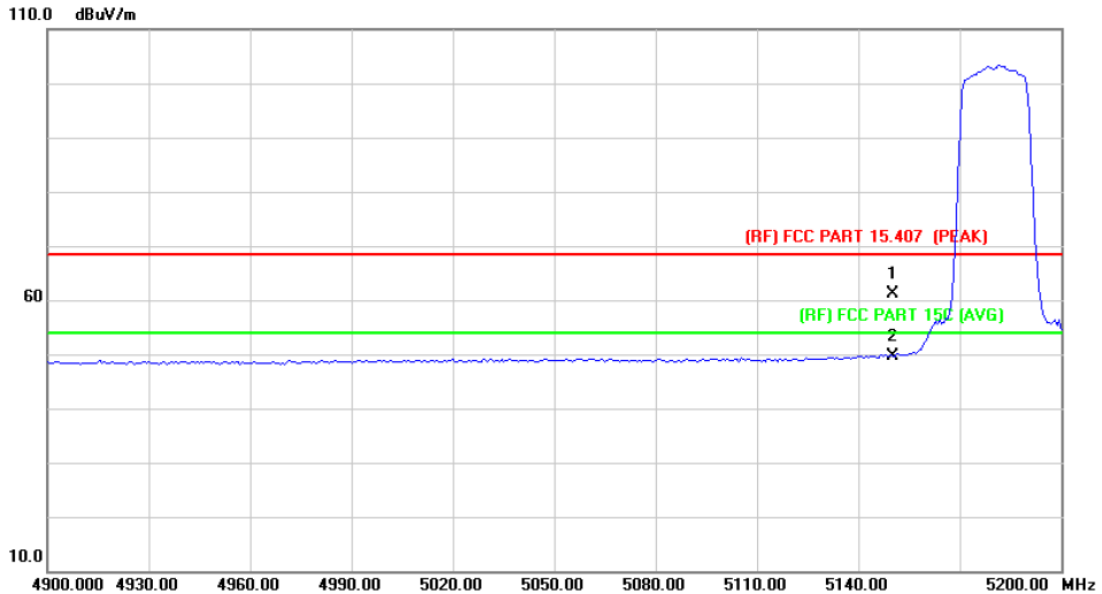


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	46.53	14.67	61.20	68.30	-7.10	peak
2	*	5150.000	34.97	14.67	49.64	54.00	-4.36	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11 ax(HE20) Mode 5240 MHz (U-NII-1)		
Remark:	Only show the worst case Antenna 3+4.		

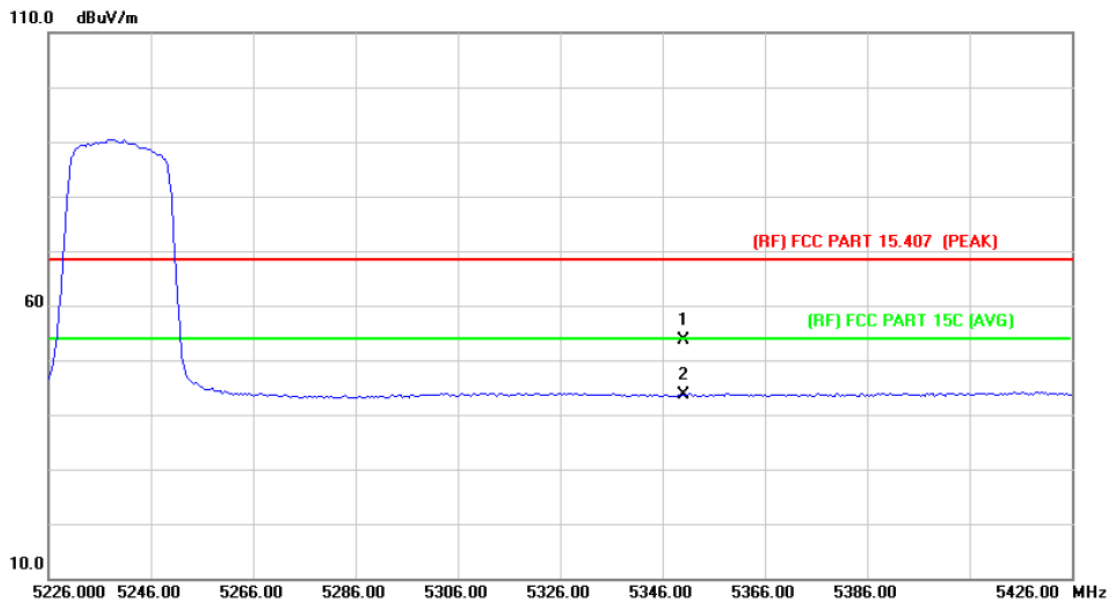

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5350.000	38.58	14.97	53.55	68.30	-14.75	peak
2	*	5350.000	28.75	14.97	43.72	54.00	-10.28	AVG


Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11 ax(HE20) Mode 5240 MHz (U-NII-1)		
Remark:	Only show the worst case Antenna 3+4.		

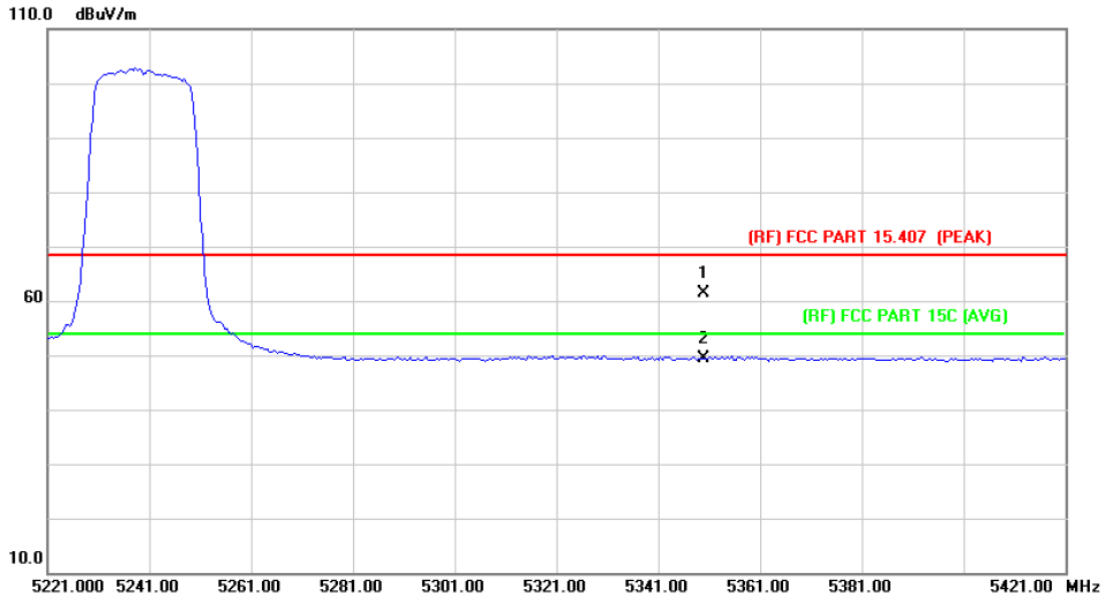


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5350.000	46.31	14.97	61.28	68.30	-7.02	peak
2	*	5350.000	34.50	14.97	49.47	54.00	-4.53	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5190 MHz (U-NII-1)		
Remark:	Only show the worst case Antenna 3+4.		

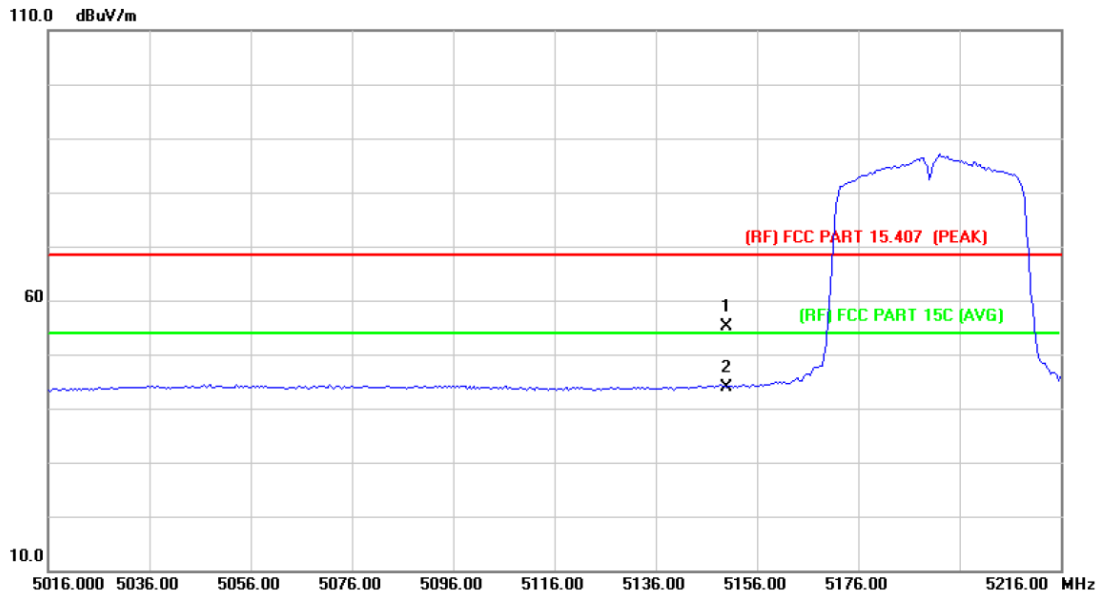


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	40.43	14.67	55.10	68.30	-13.20	peak
2	*	5150.000	29.25	14.67	43.92	54.00	-10.08	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5190 MHz (U-NII-1)		
Remark:	Only show the worst case Antenna 3+4.		

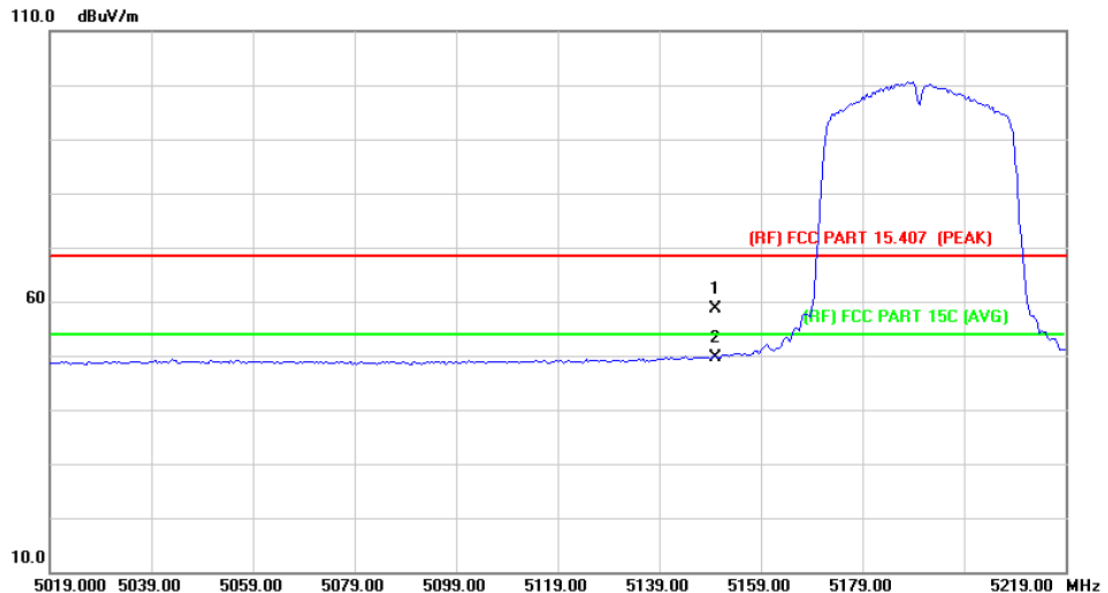


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	44.06	14.67	58.73	68.30	-9.57	peak
2	*	5150.000	34.95	14.67	49.62	54.00	-4.38	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5230 MHz (U-NII-1)		
Remark:	Only show the worst case Antenna 3+4.		

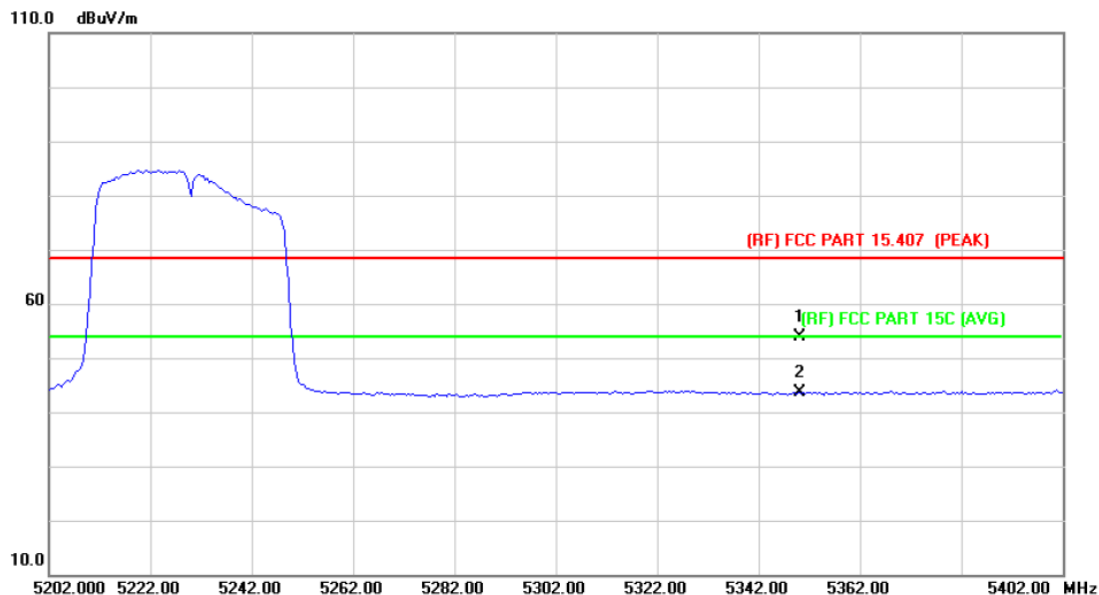

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5350.000	38.92	14.97	53.89	68.30	-14.41	peak
2	*	5350.000	28.71	14.97	43.68	54.00	-10.32	AVG


Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5230 MHz (U-NII-1)		
Remark:	Only show the worst case Antenna 3+4.		

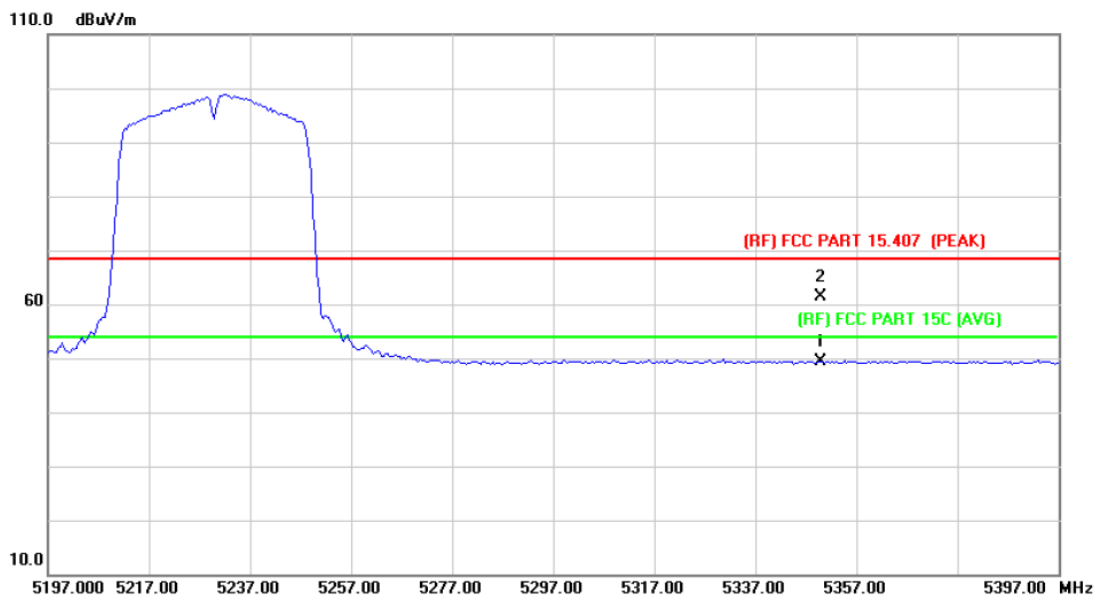

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5350.000	34.41	14.97	49.38	54.00	-4.62	AVG
2	*	5350.000	46.31	14.97	61.28	68.30	-7.02	peak


Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5190 MHz (U-NII-1)		
Remark:	Only show the worst case Antenna 3+4.		

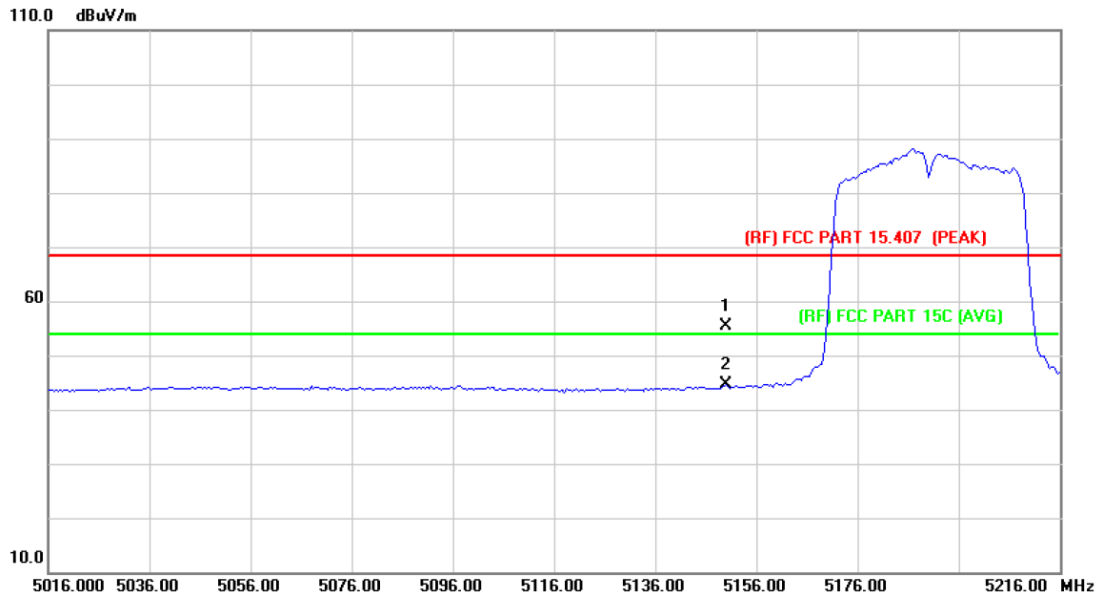

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	40.64	14.67	55.31	68.30	-12.99	peak
2	*	5150.000	29.90	14.67	44.57	54.00	-9.43	AVG


Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5190 MHz (U-NII-1)		
Remark:	Only show the worst case Antenna 3+4.		

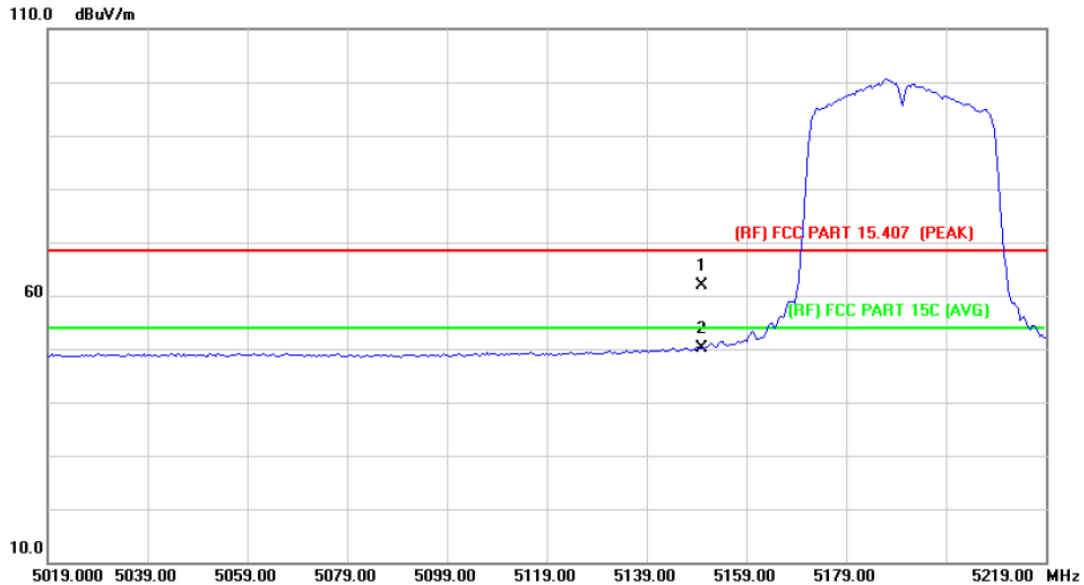

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5150.000	47.30	14.67	61.97	68.30	-6.33	peak
2	*	5150.000	35.39	14.67	50.06	54.00	-3.94	AVG


Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5230 MHz (U-NII-1)		
Remark:	Only show the worst case Antenna 3+4.		

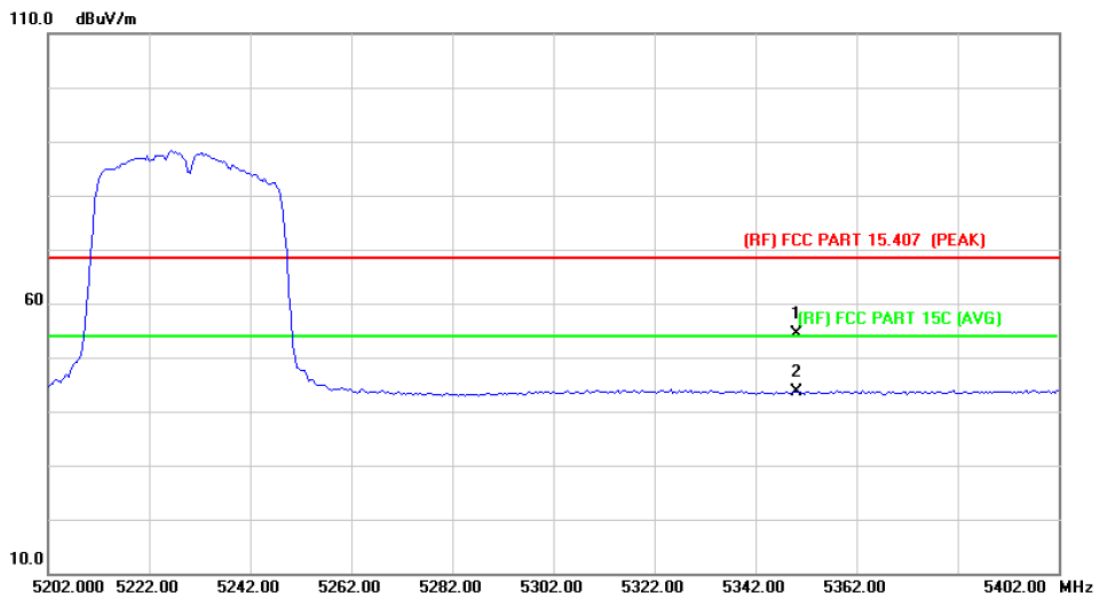

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5350.000	39.40	14.97	54.37	68.30	-13.93	peak
2	*	5350.000	28.63	14.97	43.60	54.00	-10.40	AVG


Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5230 MHz (U-NII-1)		
Remark:	Only show the worst case Antenna 3+4.		

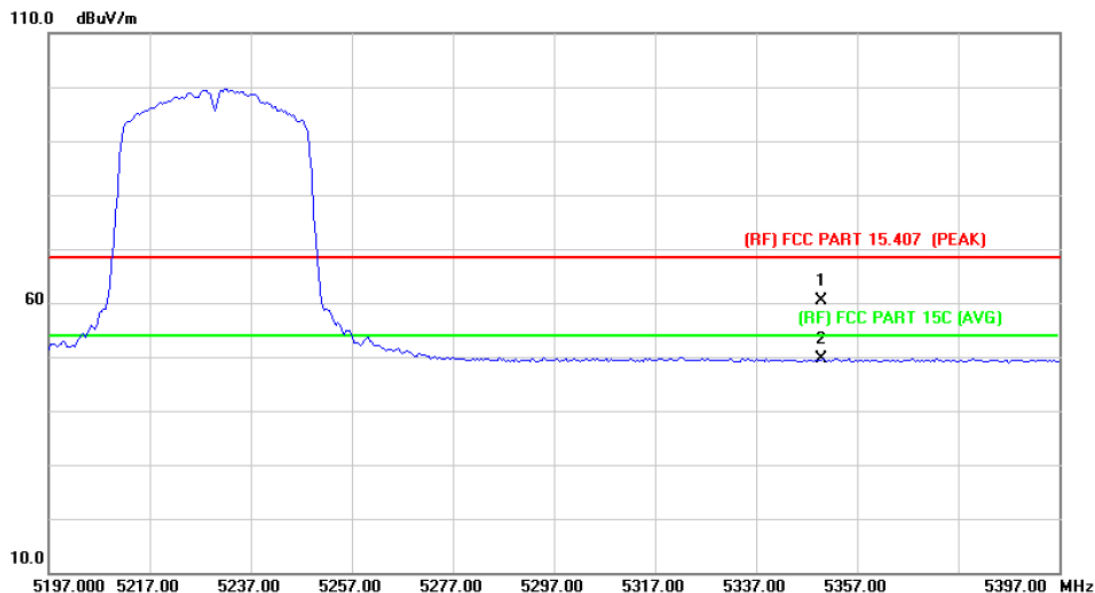

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5350.000	45.37	14.97	60.34	68.30	-7.96	peak
2	*	5350.000	34.54	14.97	49.51	54.00	-4.49	AVG


Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ax(HE40) Mode 5190 MHz (U-NII-1)		
Remark:	Only show the worst case Antenna 3+4.		

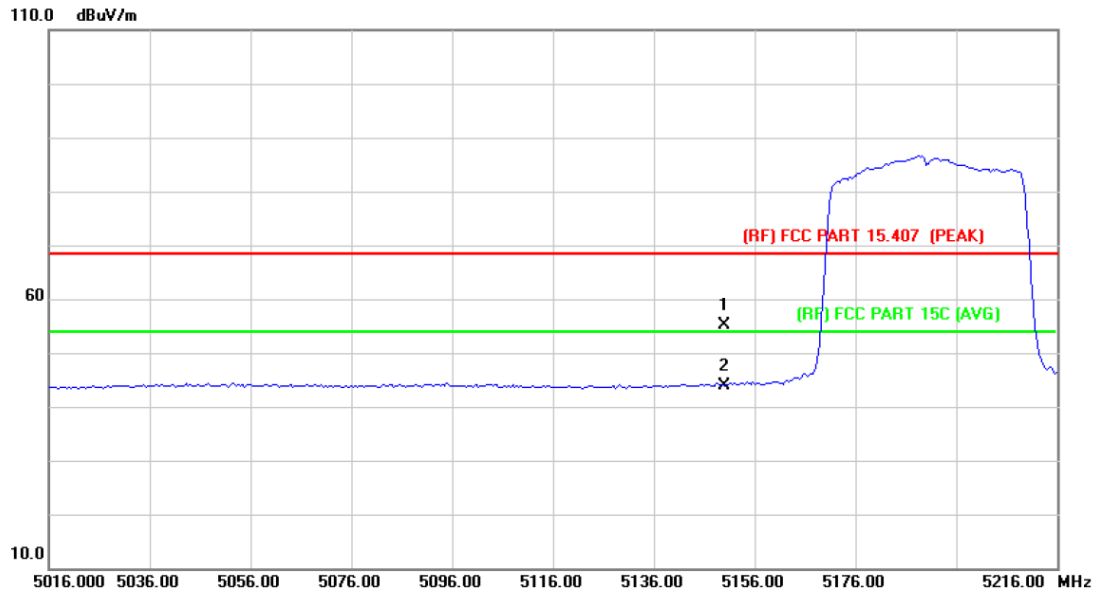


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	40.54	14.67	55.21	68.30	-13.09	peak
2	*	5150.000	29.31	14.67	43.98	54.00	-10.02	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11 ax(HE40) Mode 5190 MHz (U-NII-1)		
Remark:	Only show the worst case Antenna 3+4.		

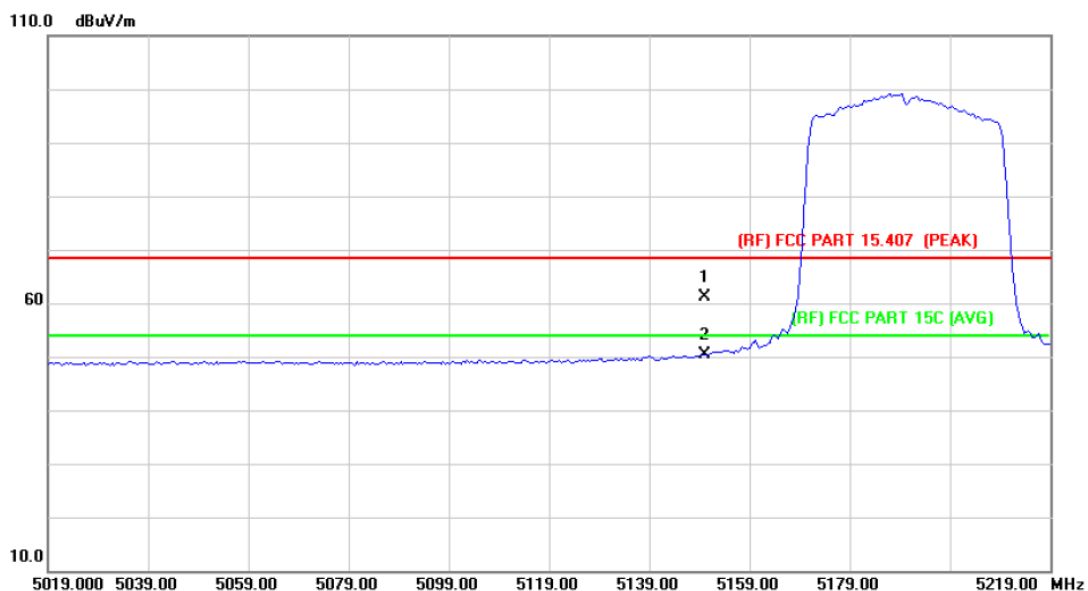

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	46.35	14.67	61.02	68.30	-7.28	peak
2	*	5150.000	35.65	14.67	50.32	54.00	-3.68	AVG


Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11 ax(HE40)Mode 5230 MHz (U-NII-1)		
Remark:	Only show the worst case Antenna 3+4.		

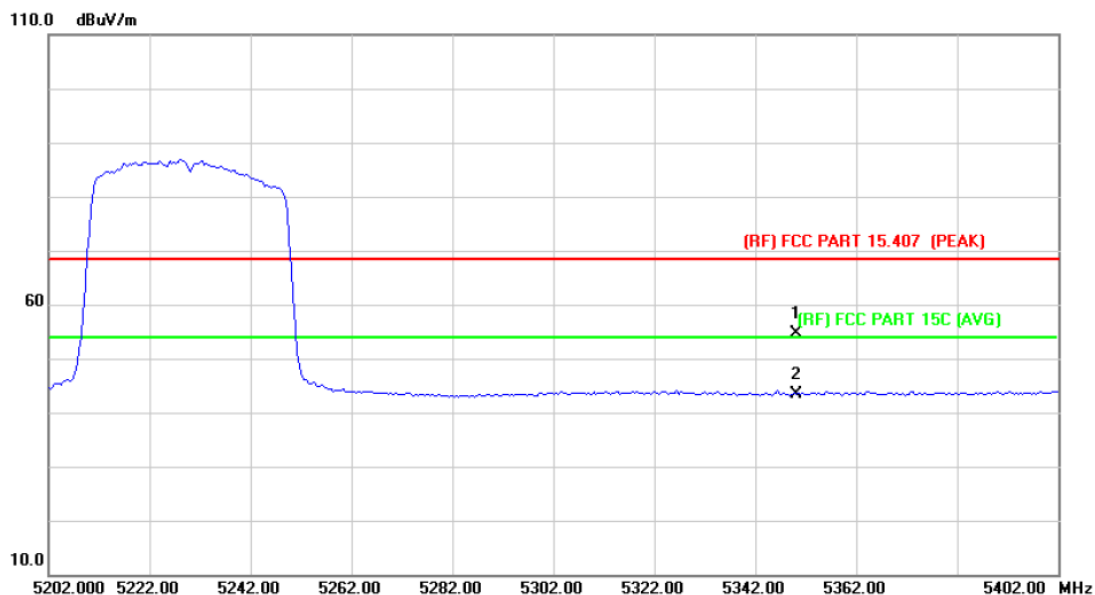

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5350.000	39.61	14.97	54.58	68.30	-13.72	peak
2	*	5350.000	28.48	14.97	43.45	54.00	-10.55	AVG


Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11 ax(HE40) Mode 5230 MHz (U-NII-1)		
Remark:	Only show the worst case Antenna 3+4.		

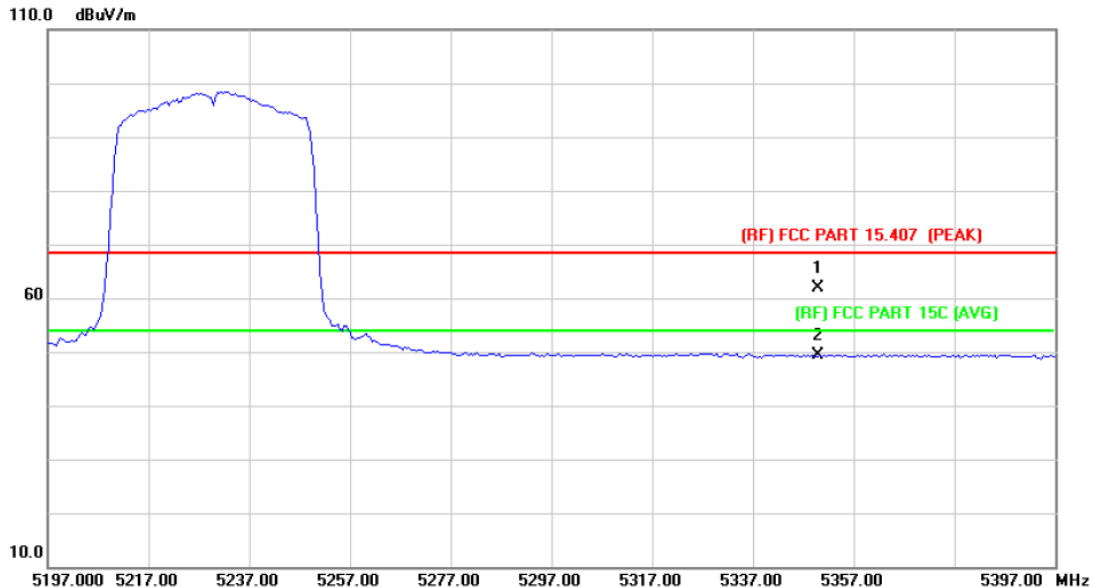


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5350.000	46.87	14.97	61.84	68.30	-6.46	peak
2	*	5350.000	34.37	14.97	49.34	54.00	-4.66	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT80) Mode 5210 MHz (U-NII-1)		
Remark:	Only show the worst case Antenna 3+4.		

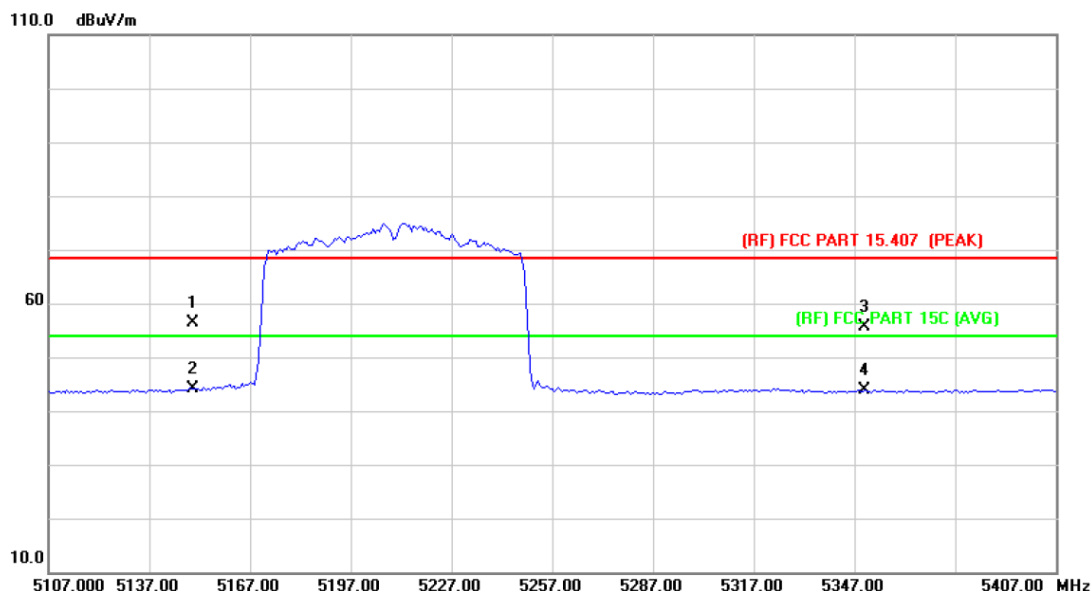

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	41.61	14.67	56.28	68.30	-12.02	peak
2	*	5150.000	29.46	14.67	44.13	54.00	-9.87	AVG
3		5350.000	40.71	14.97	55.68	68.30	-12.62	peak
4		5350.000	28.79	14.97	43.76	54.00	-10.24	AVG


Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT80) Mode 5210 MHz (U-NII-1)		
Remark:	Only show the worst case Antenna 3+4.		

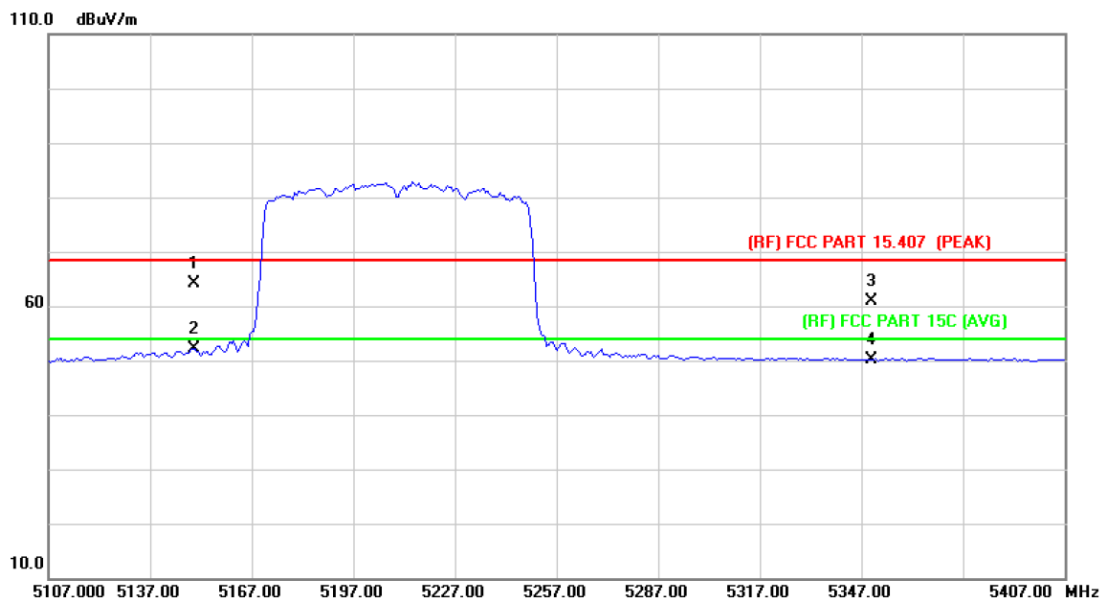

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	49.41	14.67	64.08	68.30	-4.22	peak
2	*	5150.000	37.43	14.67	52.10	54.00	-1.90	AVG
3		5350.000	45.81	14.97	60.78	68.30	-7.52	peak
4		5350.000	35.19	14.97	50.16	54.00	-3.84	AVG


Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ax(HE80) Mode 5210 MHz (U-NII-1)		
Remark:	Only show the worst case Antenna 3+4.		

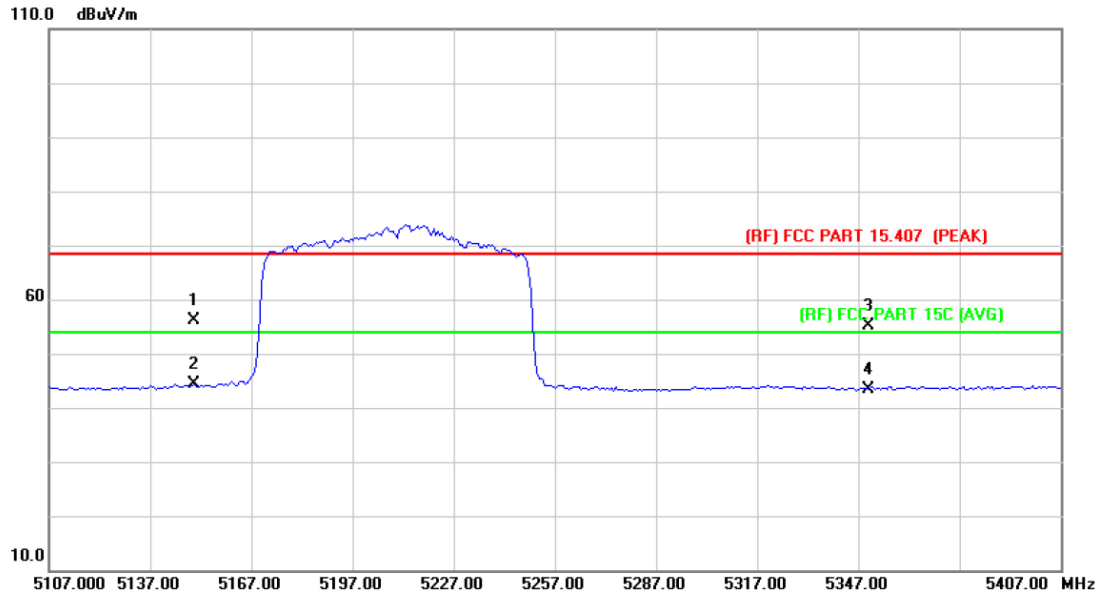


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	41.34	14.67	56.01	68.30	-12.29	peak
2	*	5150.000	29.60	14.67	44.27	54.00	-9.73	AVG
3		5350.000	40.07	14.97	55.04	68.30	-13.26	peak
4		5350.000	28.53	14.97	43.50	54.00	-10.50	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11 ax(HE80) Mode 5210 MHz (U-NII-1)		
Remark:	Only show the worst case Antenna 3+4.		

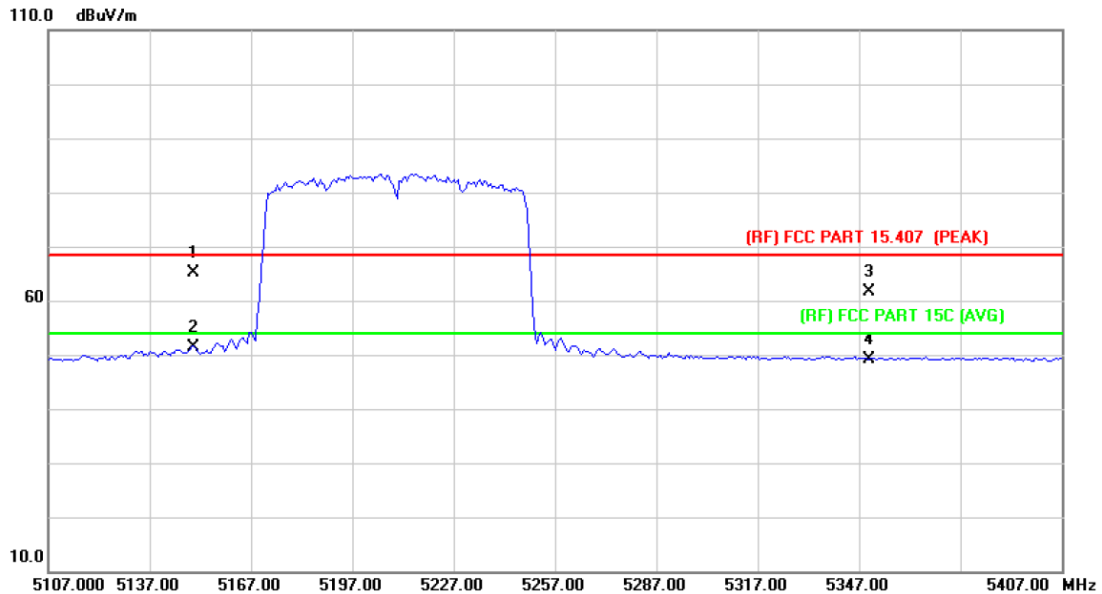

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5150.000	50.52	14.67	65.19	68.30	-3.11	peak
2	*	5150.000	36.81	14.67	51.48	54.00	-2.52	AVG
3		5350.000	46.59	14.97	61.56	68.30	-6.74	peak
4		5350.000	34.27	14.97	49.24	54.00	-4.76	AVG


Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5745 MHz (U-NII-3)		
Remark:	Only show the worst case Antenna 3+4.		

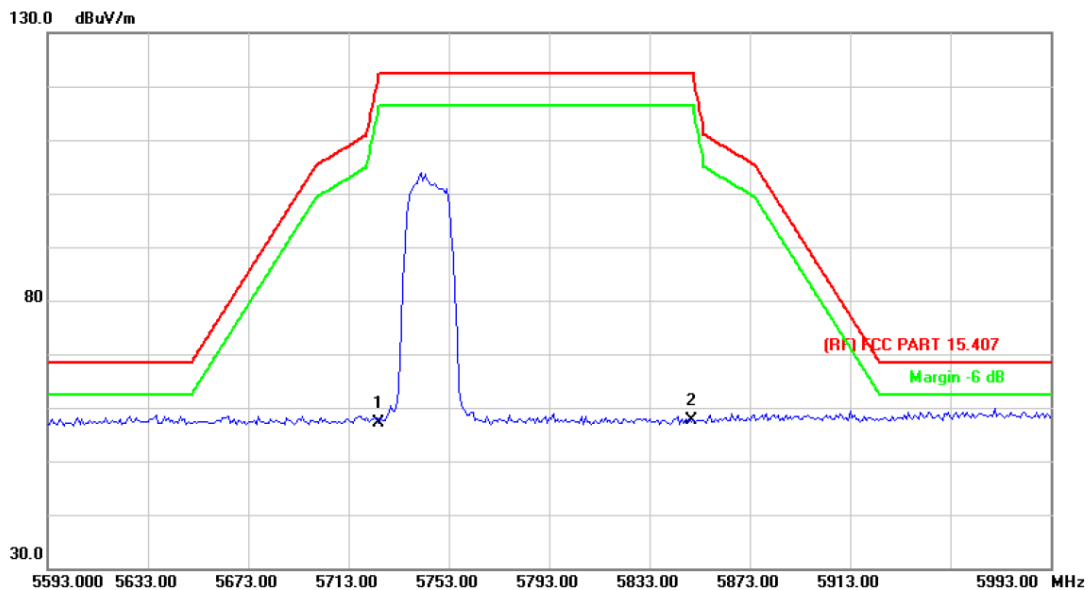


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	41.29	15.88	57.17	122.30	-65.13	peak
2	*	5850.000	41.37	16.27	57.64	122.30	-64.66	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5745 MHz (U-NII-3)		
Remark:	Only show the worst case Antenna 3+4.		

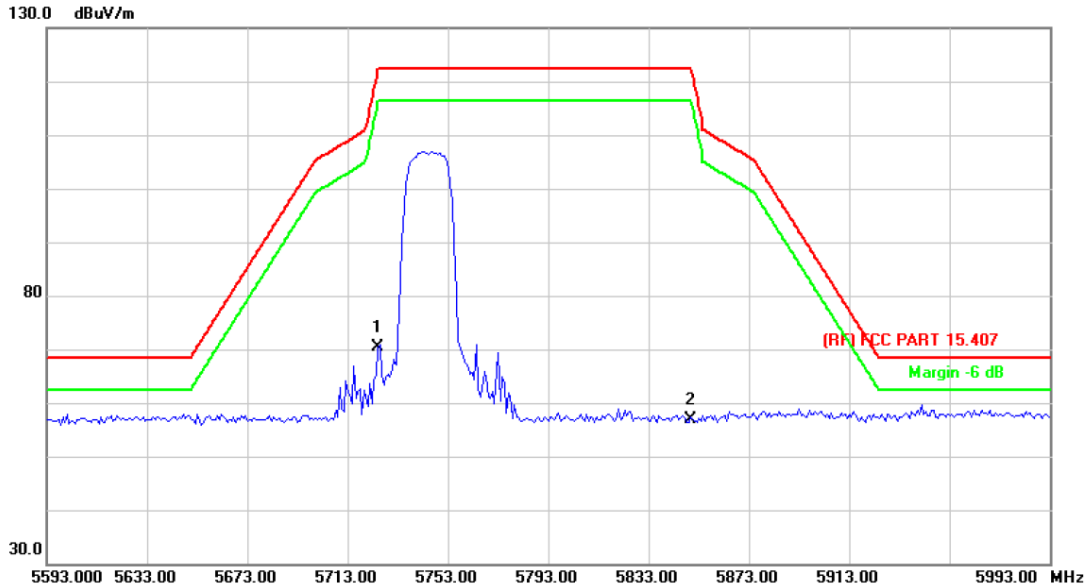

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	5725.000	54.42	15.88	70.30	122.30	-52.00	peak
2		5850.000	40.53	16.27	56.80	122.30	-65.50	peak


Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5825 MHz (U-NII-3)		
Remark:	Only show the worst case Antenna 3+4.		

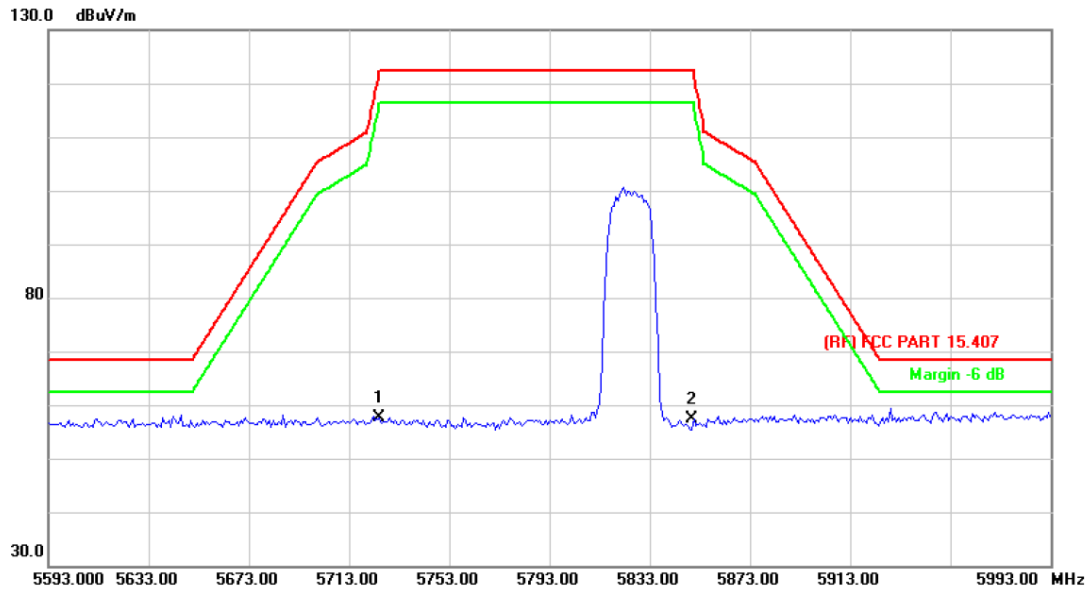

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	5725.000	41.73	15.88	57.61	122.30	-64.69	peak
2		5850.000	41.08	16.27	57.35	122.30	-64.95	peak


Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5825 MHz (U-NII-3)		
Remark:	Only show the worst case Antenna 3+4.		

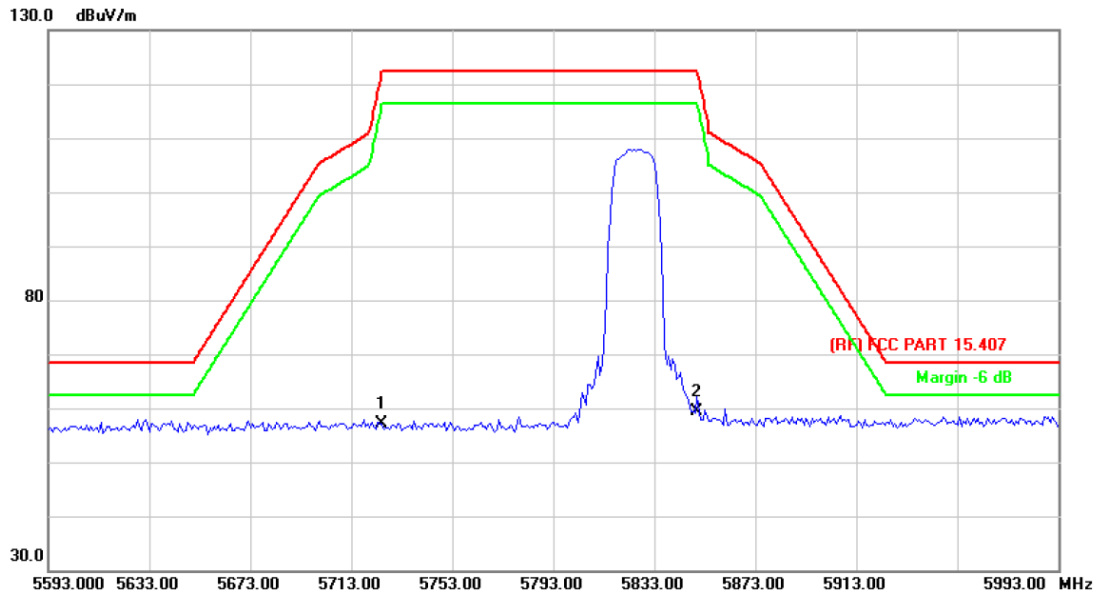

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5725.000	41.31	15.88	57.19	122.30	-65.11	peak
2	*	5850.000	43.05	16.27	59.32	122.30	-62.98	peak


Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT20) Mode 5745 MHz (U-NII-3)		
Remark:	Only show the worst case Antenna 3+4.		

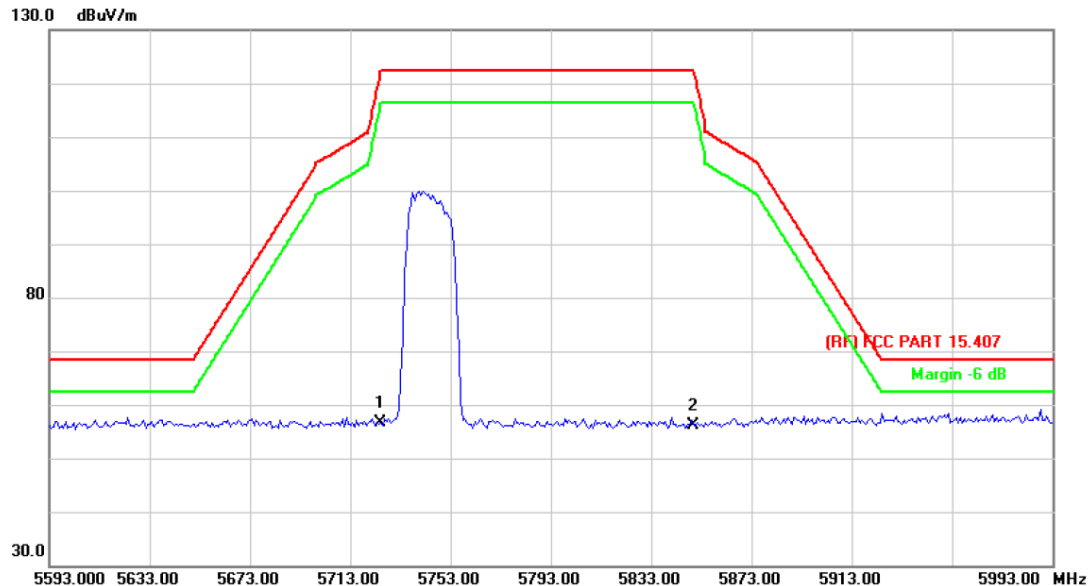

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5725.000	40.68	15.88	56.56	122.30	-65.74	peak
2		5850.000	39.92	16.27	56.19	122.30	-66.11	peak


Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5745 MHz (U-NII-3)		
Remark:	Only show the worst case Antenna 3+4.		

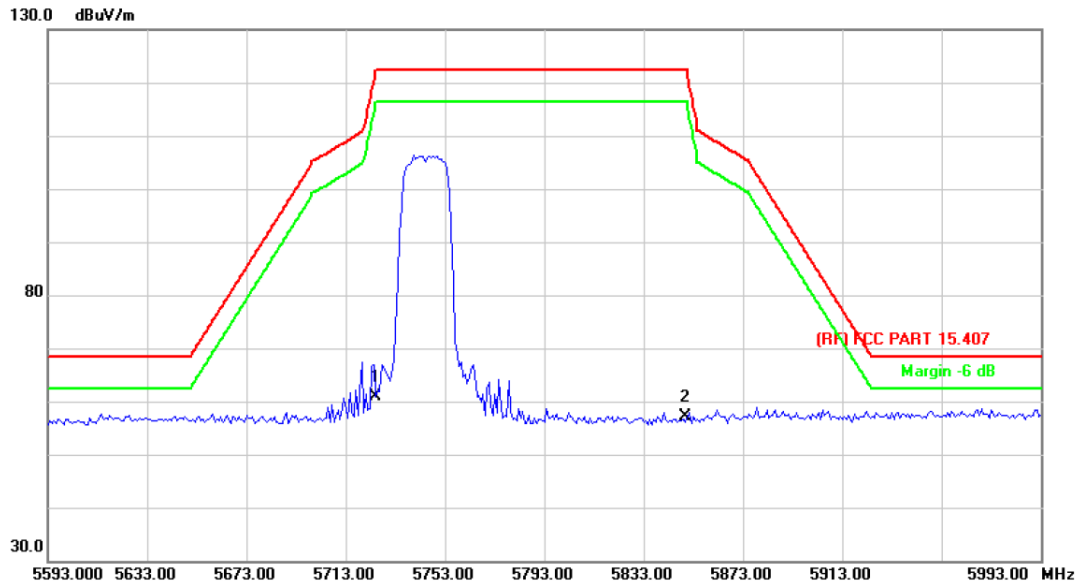

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	5725.000	45.11	15.88	60.99	122.30	-61.31	peak
2		5850.000	40.76	16.27	57.03	122.30	-65.27	peak


Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT20) Mode 5825 MHz (U-NII-3)		
Remark:	Only show the worst case Antenna 3+4.		

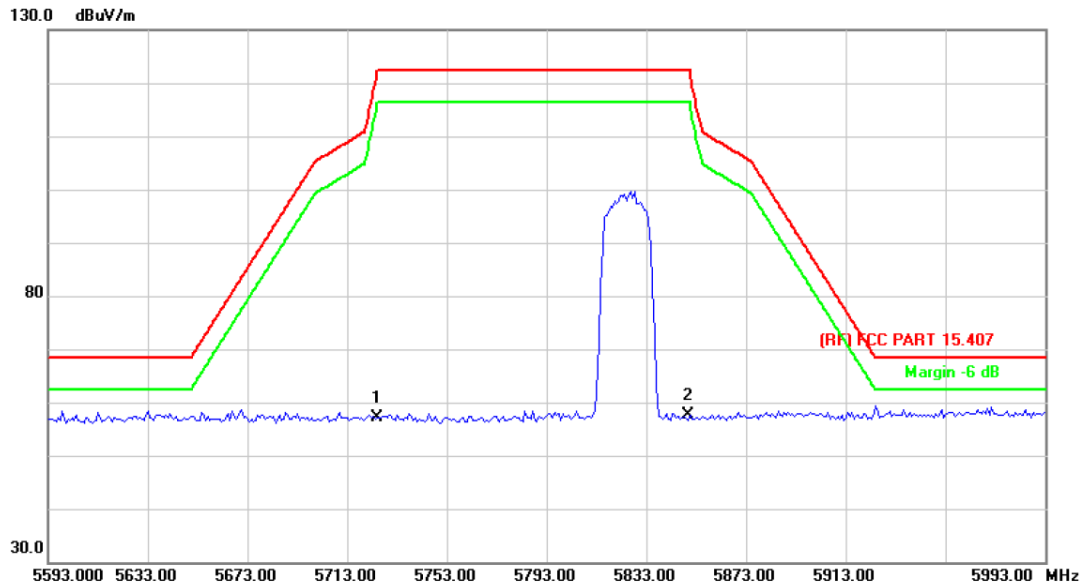

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	41.36	15.88	57.24	122.30	-65.06	peak
2	*	5850.000	41.29	16.27	57.56	122.30	-64.74	peak


Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5825 MHz (U-NII-3)		
Remark:	Only show the worst case Antenna 3+4.		

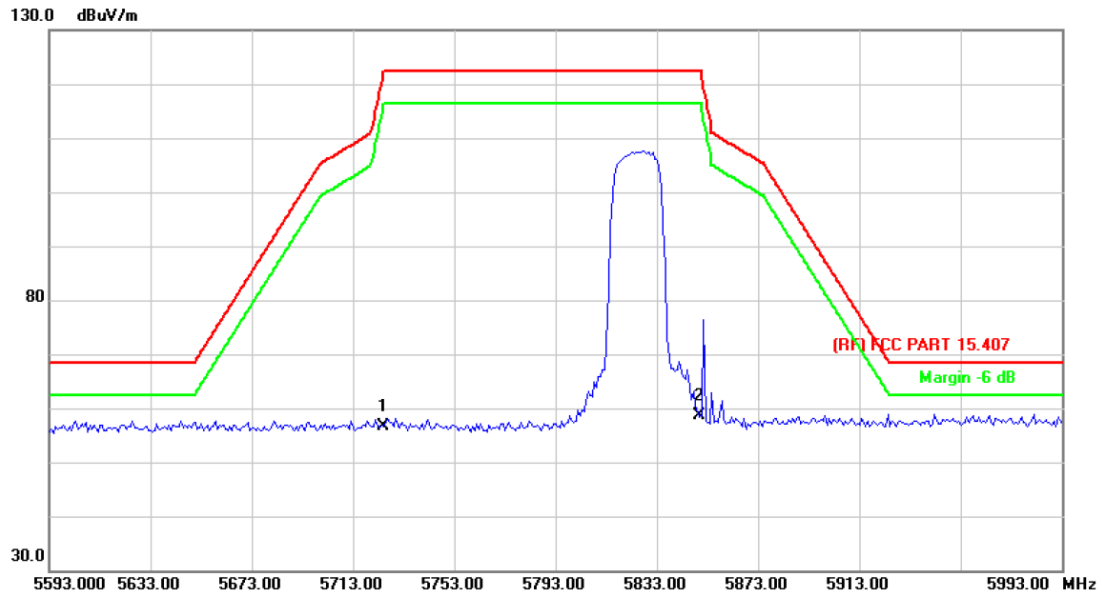

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1		5725.000	40.64	15.88	56.52	122.30	-65.78 peak
2	*	5850.000	42.39	16.27	58.66	122.30	-63.64 peak


Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5745 MHz (U-NII-3)		
Remark:	Only show the worst case Antenna 3+4.		

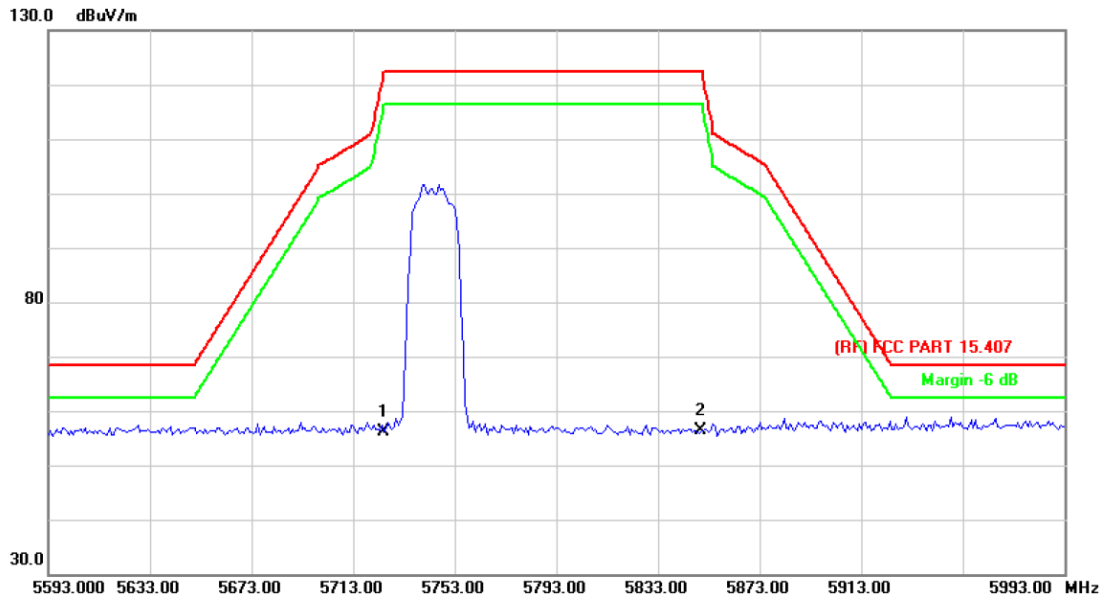

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5725.000	40.34	15.88	56.22	122.30	-66.08	peak
2	*	5850.000	40.05	16.27	56.32	122.30	-65.98	peak


Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT20) Mode 5745 MHz (U-NII-3)		
Remark:	Only show the worst case Antenna 3+4.		

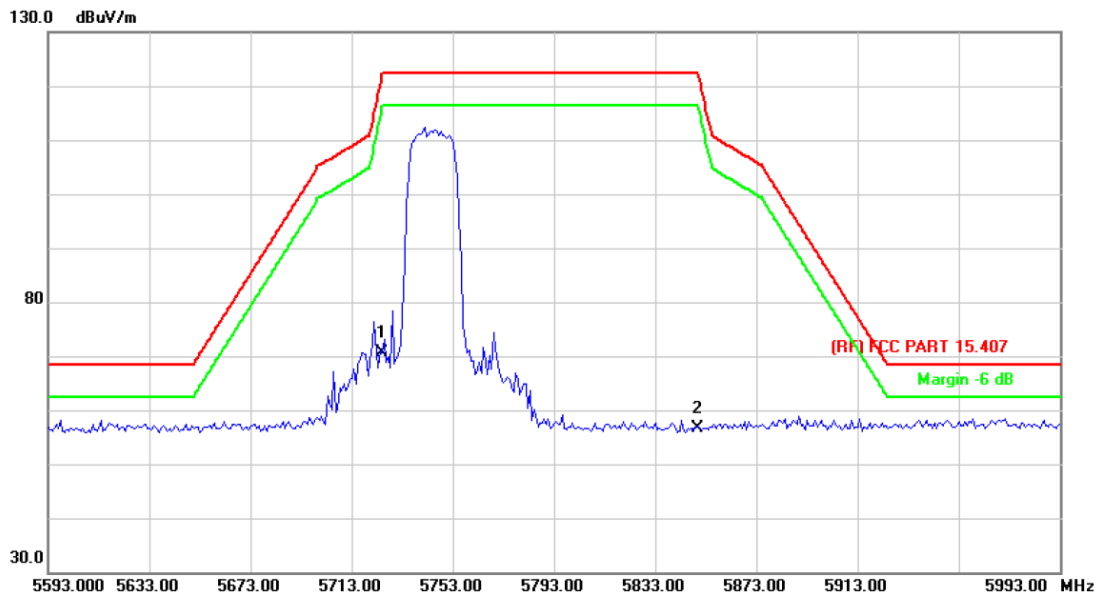

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	5725.000	54.83	15.88	70.71	122.30	-51.59	peak
2		5850.000	40.36	16.27	56.63	122.30	-65.67	peak


Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5825 MHz (U-NII-3)		
Remark:	Only show the worst case Antenna 3+4.		

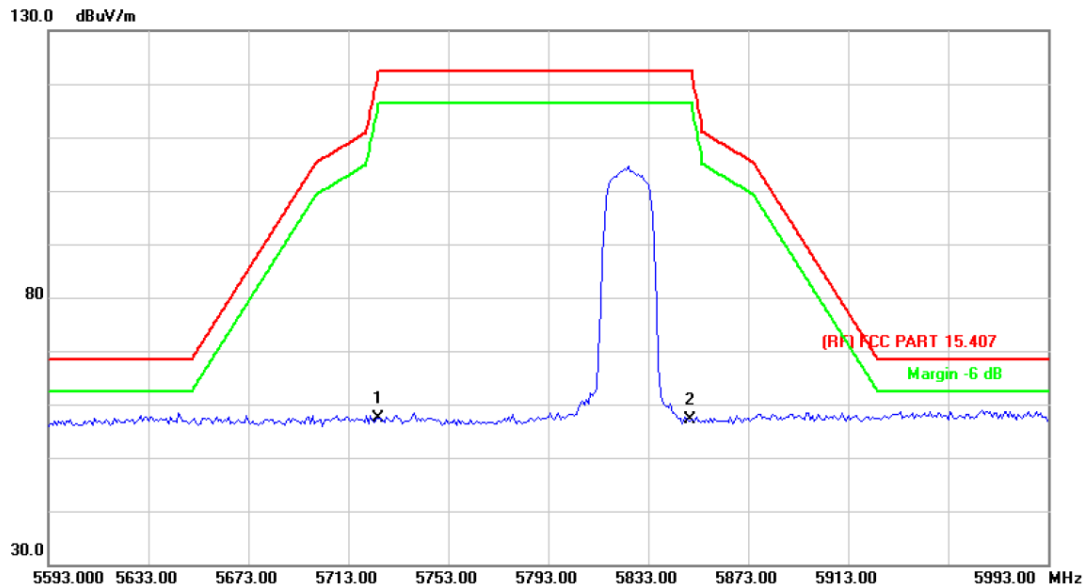

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	5725.000	41.55	15.88	57.43	122.30	-64.87	peak
2		5850.000	40.77	16.27	57.04	122.30	-65.26	peak


Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT20) Mode 5825 MHz (U-NII-3)		
Remark:	Only show the worst case Antenna 3+4.		

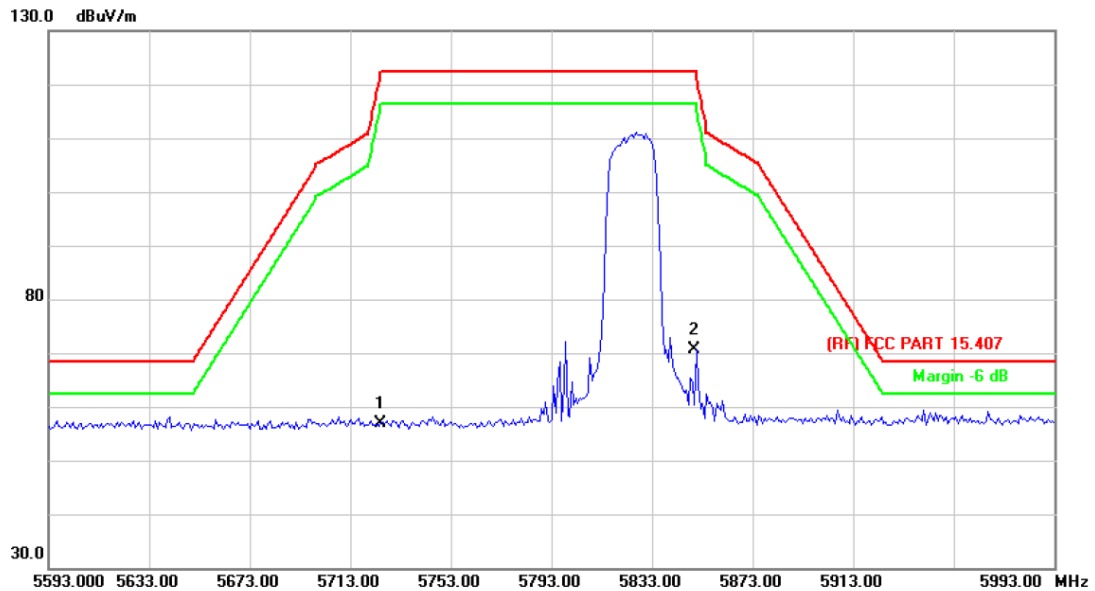

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	40.90	15.88	56.78	122.30	-65.52	peak
2	*	5850.000	54.40	16.27	70.67	122.30	-51.63	peak


Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ax(HE20) Mode 5745 MHz (U-NII-3)		
Remark:	Only show the worst case Antenna 3+4.		

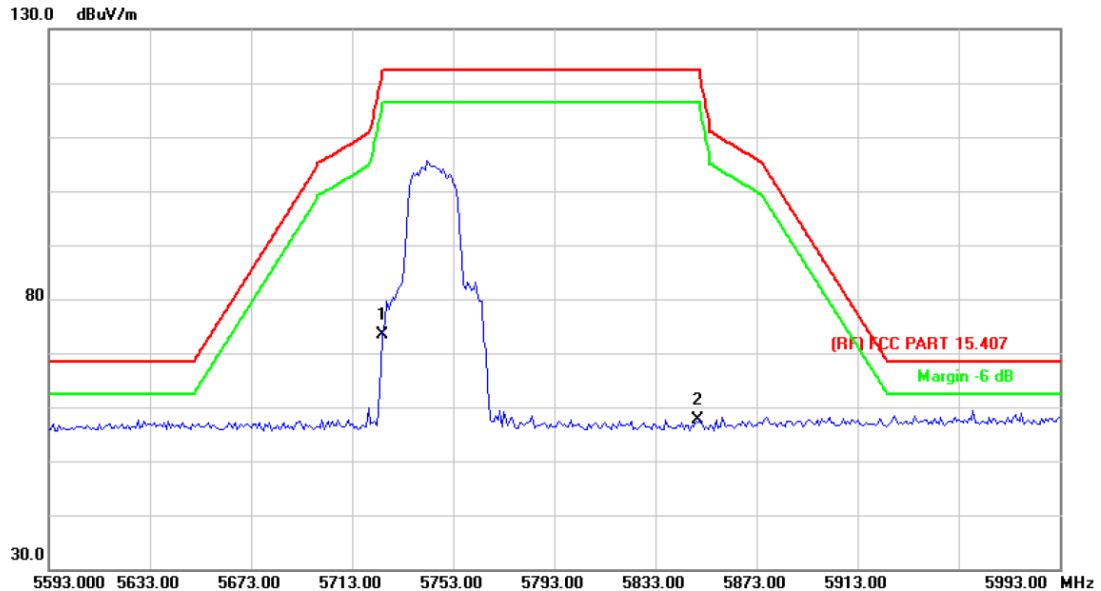

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	5725.000	57.39	15.88	73.27	122.30	-49.03	peak
2		5850.000	41.27	16.27	57.54	122.30	-64.76	peak


Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11 ax(HE20) Mode 5745 MHz (U-NII-3)		
Remark:	Only show the worst case Antenna 3+4.		

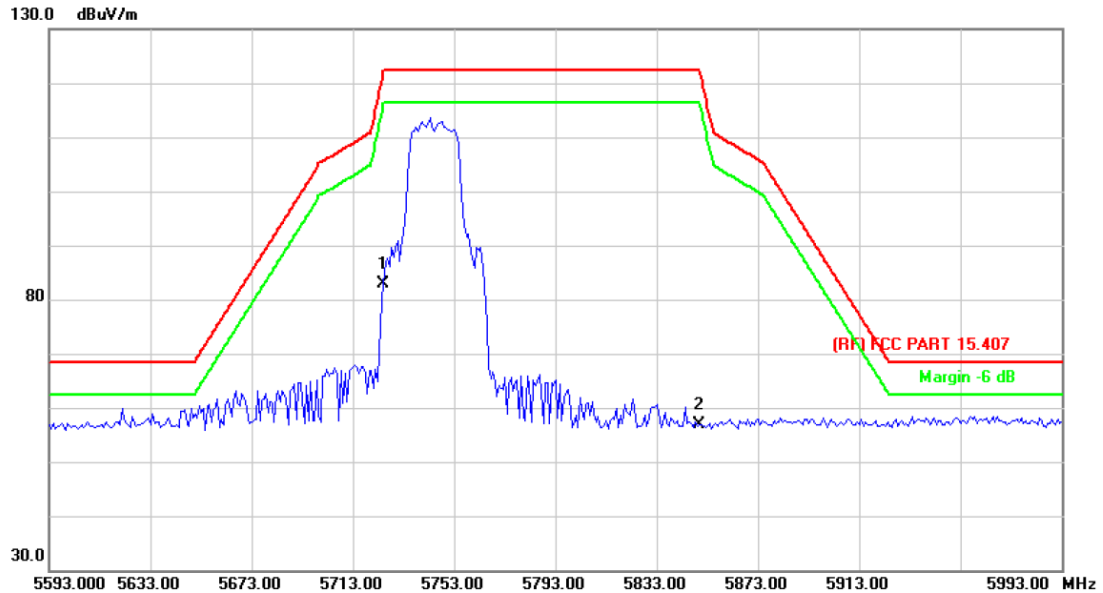

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	5725.000	67.10	15.88	82.98	122.30	-39.32	peak
2		5850.000	40.50	16.27	56.77	122.30	-65.53	peak


Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11 ax(HE20) Mode 5825 MHz (U-NII-3)		
Remark:	Only show the worst case Antenna 3+4.		

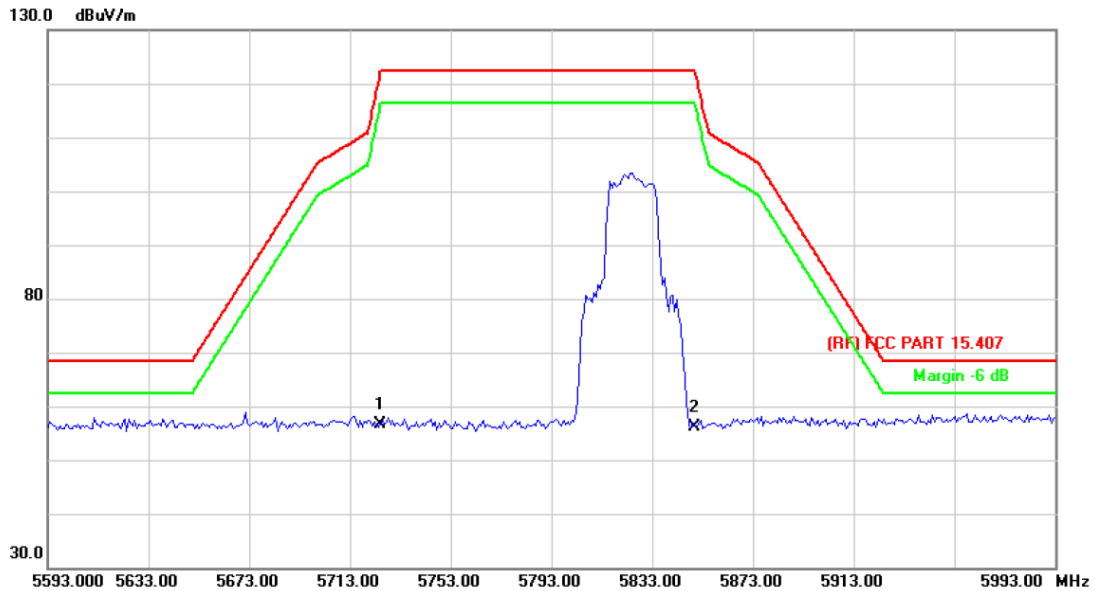

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	5725.000	40.75	15.88	56.63	122.30	-65.67	peak
2		5850.000	39.93	16.27	56.20	122.30	-66.10	peak


Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11 ax(HE20) Mode 5825 MHz (U-NII-3)		
Remark:	Only show the worst case Antenna 3+4.		

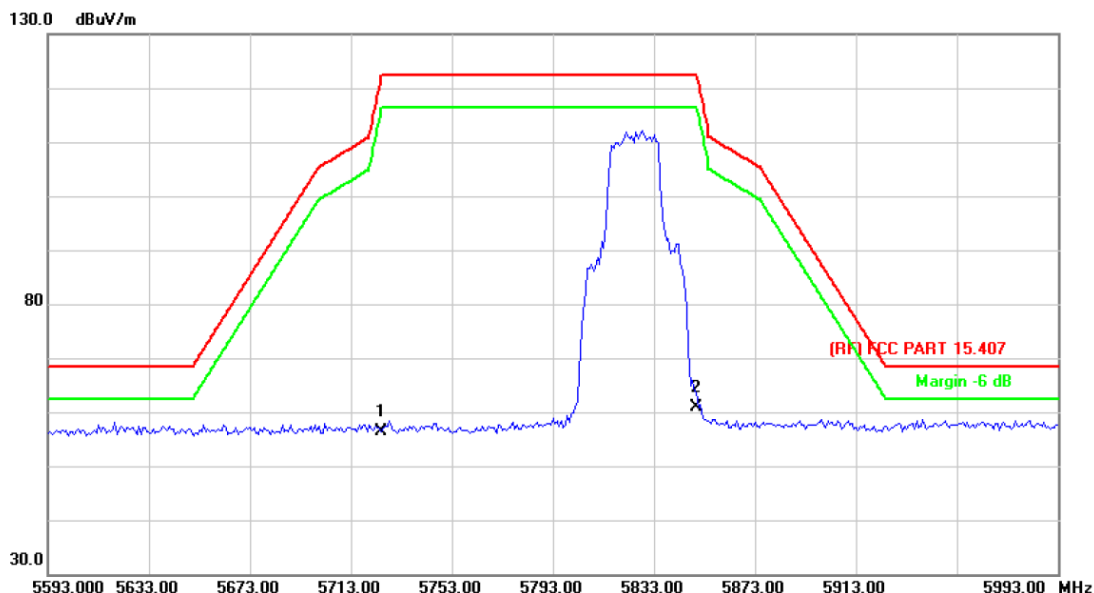

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	40.51	15.88	56.39	122.30	-65.91	peak
2	*	5850.000	44.55	16.27	60.82	122.30	-61.48	peak


Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5755 MHz (U-NII-3)		
Remark:	Only show the worst case Antenna 3+4.		

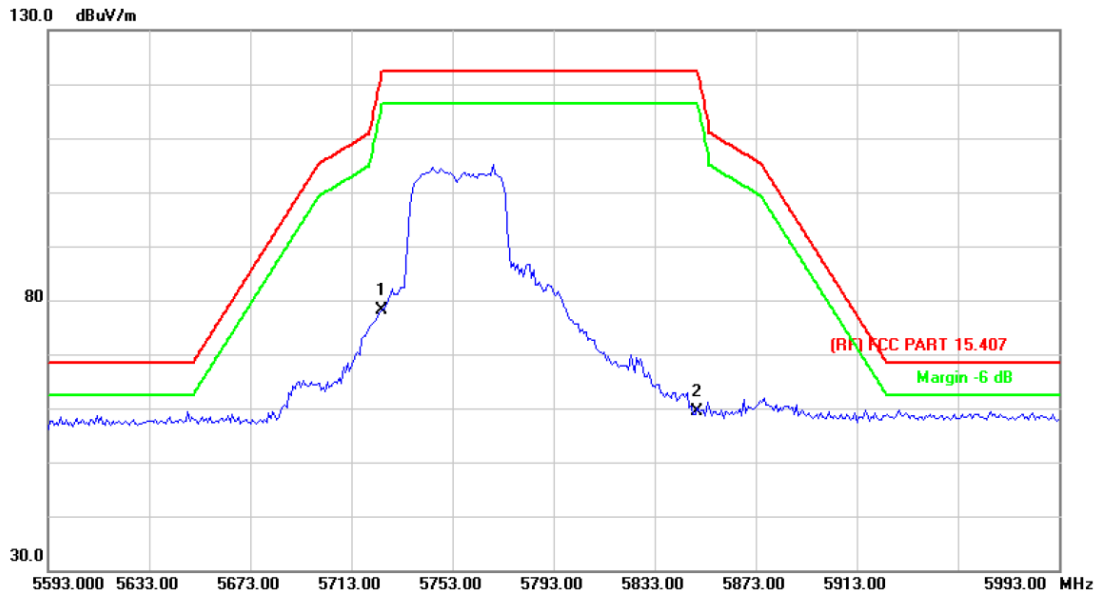

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	5725.000	62.13	15.88	78.01	122.30	-44.29	peak
2		5850.000	43.18	16.27	59.45	122.30	-62.85	peak


Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5755 MHz (U-NII-3)		
Remark:	Only show the worst case Antenna 3+4.		

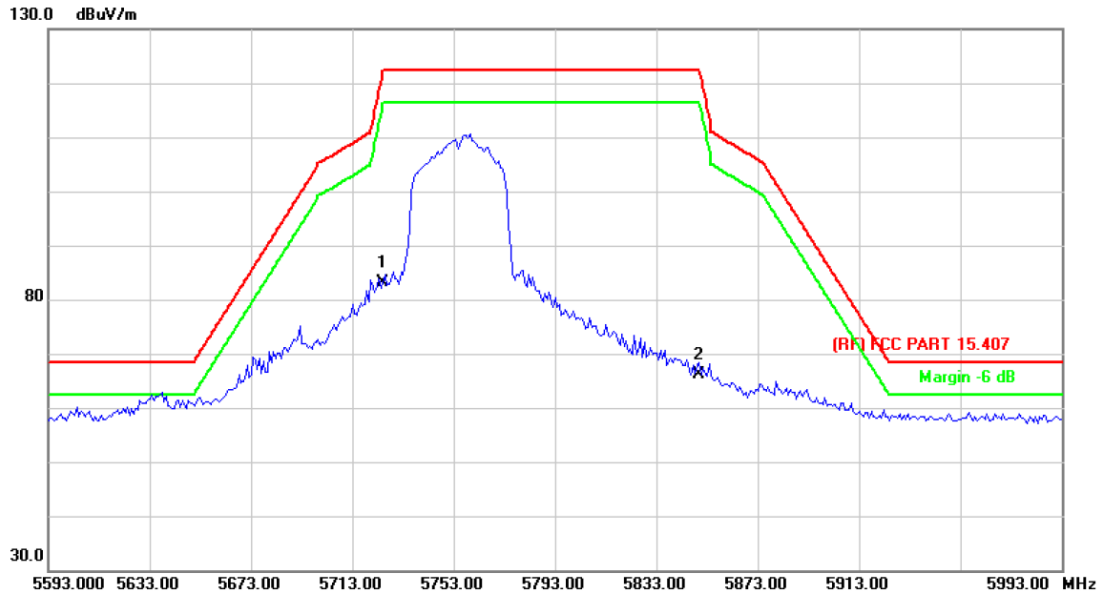

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5725.000	67.14	15.88	83.02	122.30	-39.28	peak
2		5850.000	49.92	16.27	66.19	122.30	-56.11	peak


Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5795 MHz (U-NII-3)		
Remark:	Only show the worst case Antenna 3+4.		

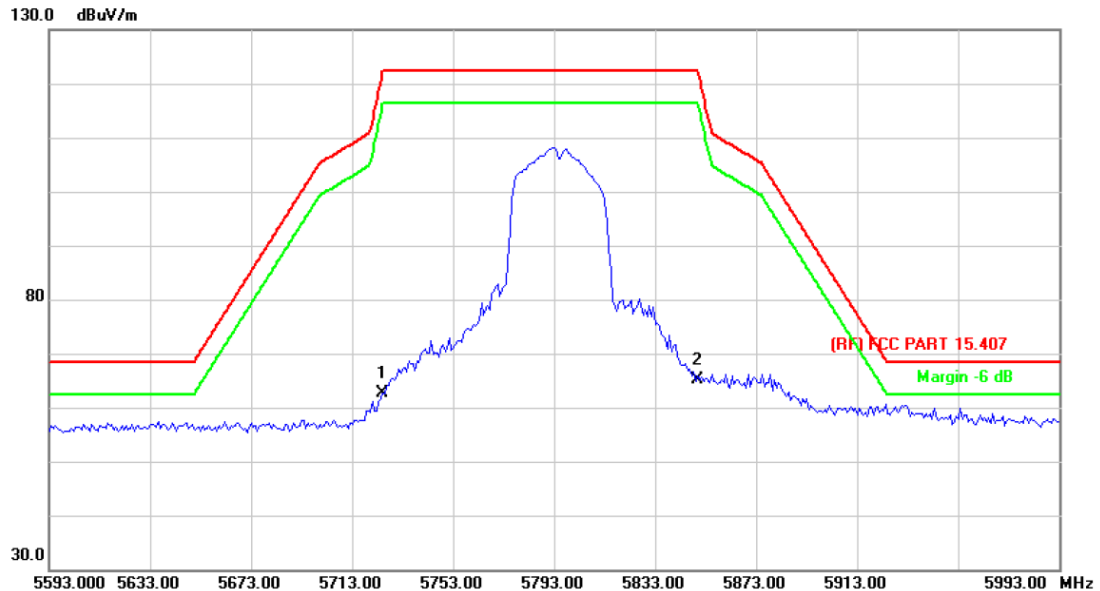

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	46.87	15.88	62.75	122.30	-59.55	peak
2	*	5850.000	48.74	16.27	65.01	122.30	-57.29	peak


Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5795 MHz (U-NII-3)		
Remark:	Only show the worst case Antenna 3+4.		

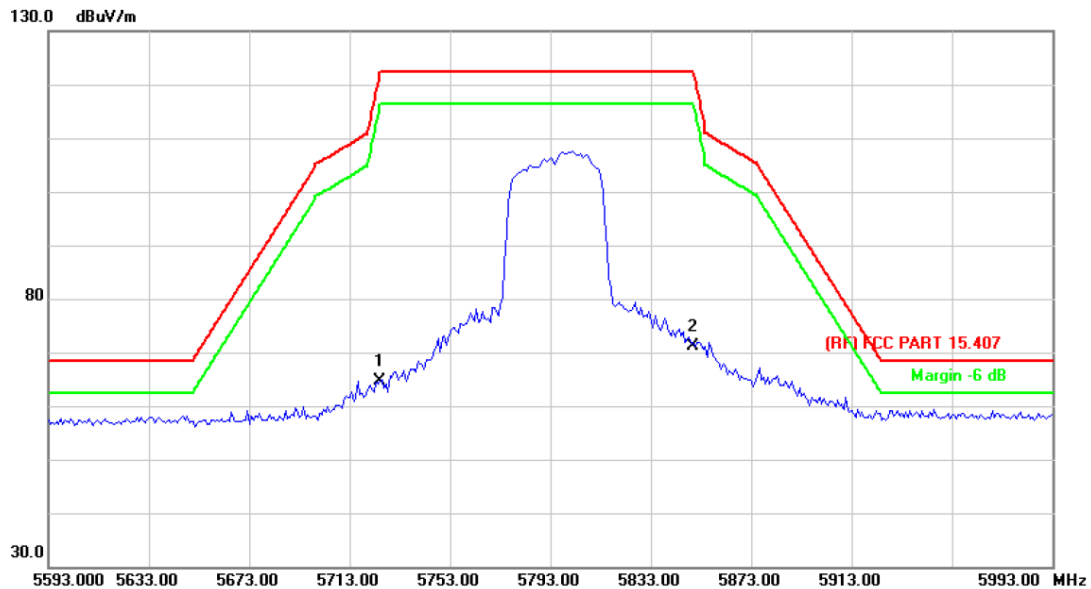

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5725.000	48.70	15.88	64.58	122.30	-57.72	peak
2	*	5850.000	54.80	16.27	71.07	122.30	-51.23	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)